



Report No.: TW2109117-01E File Reference No.: 2021-09-28

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Product: Tablet PC

Model No.: W113P, M10905, M10905-32, ST10905

Trademark: PACKARD BELL, Smartab

Test Standards: FCC Part 15.247

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Manager

Dated: September 28, 2021

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2109117-01E

Date: 2021-09-28



Page 2 of 93

Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — **Registration No.:5205A**

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	8
3.1	Summary of Test Results	8
3.2	Test Standards	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test.	13
5.1	Test Method and Test Procedure.	13
5.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
5.4	Radiated Emission Limit	15
7.0	6dB Bandwidth Measurement	24
8.0	Maximum Output Power	44
9.0	Power Spectral Density Measurement.	47
10.0	Out of Band Measurement	65
11.0	Antenna Requirement.	83
12.0	FCC ID Label	84
13.0	Photo of Test Setup and EUT View.	85

Report No.: TW2109117-01E Page 4 of 93

Date: 2021-09-28



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number: 744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community, Huaqiangbei,

Futian District, Shenzhen

Telephone: 0755-84688843 Fax: 0755-84688843

1.3 Description of EUT

Product: Tablet PC

Manufacturer: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community,

Huaqiangbei, Futian District, Shenzhen

Trademark: PACKARD BELL, Smartab

Model Number: W113P

Additional Model Number: M10905, M10905-32, ST10905

Hardware Version: A863T-68T5B

Software Version: M10905-32_20210901

Serial No.: M109052108000001~M109052108004000

Type of Modulation IEEE 802.11b: DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20, HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz; 802.11n HT40: 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n HT20, HT40

Air Data Rate IEEE 802.11b: 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2109117-01E Page 5 of 93

Date: 2021-09-28



IEEE 802.11n HT20/HT40: mcs0-mcs9

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels; EEE 802.11n (HT40): 7 Channels;

Antenna: FPC antenna used. The gain of the antennas is -0.77dBi (get from the antenna

specification provided the applicant)

Input Voltage: DC5.0V, 2.0A

Battery DC3.7V, 5000mAh, 18.5Wh

Power Supply: Model: TPA-46050200UU; Input: 100-240V~, 50/60Hz, 0.3A; Output: DC5V, 2A

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2021-09-11 to 2021-09-28

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2021-06-18	2022-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2021-06-18	2022-06-17
Loop Antenna	EMCO	6507	00078608	2021-06-18	2024-06-17
Spectrum	R&S	FSIQ26	100292	2021-06-18	2022-06-17
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2021-06-18	2022-06-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2021-07-02	2024-07-01
Power meter	Anritsu	ML2487A	6K00003613	2021-06-18	2022-06-17
Power sensor	Anritsu	MA2491A	32263	2021-06-18	2022-06-17
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2021-07-02	2024-07-01
9*6*6 Anechoic			N/A	2021-07-02	2022-07-01
EMI Test Receiver	RS	ESVB	826156/011	2021-06-18	2022-06-17
EMI Test Receiver	RS	ESH3	860904/006	2021-06-18	2022-06-17
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2021-06-18	2022-06-17
Spectrum	HP/Agilent	E4407B	MY50441392	2021-06-18	2022-06-17
Spectrum	RS	FSP	1164.4391.38	2021-01-07	2022-01-06
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2021-06-18	2022-06-17
RF Cable	Zhengdi	7m		2021-06-18	2022-06-17
RF Switch	EM	EMSW18	060391	2021-06-18	2022-06-17
Pre-Amplifier	Schwarebeck	BBV9743	#218	2021-06-18	2022-06-17
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2021-06-18	2022-06-17
LISN	SCHAFFNER	NNB42	00012	2021-01-06	2022-01-05

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

2.3 WIFI Test Software: RFtester_V2.4

Power Setting: 10

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 7 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing

IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: msc0 data rate (worst case) were chosen for full testing

Note: during the test, the duty cycle was set up to 100%.

Page 8 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



3.0 **Technical Details**

3.1 **Summary of test results**

Standard	Test Type	Result	Notes
CC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm/3kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: TW2109117-01E

Date: 2021-09-28



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

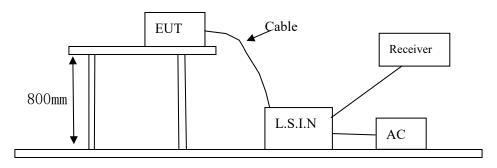

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
		W113P,	
Tolalet DC	Shenzhen Jingwah Information	M10905, RBD-W113P	DDD W112D
Tablet PC	Technology Co., Ltd.	M10905-32,	KBD-W113P
		ST10905	

B. Internal Device

Device Manufacturer Mod		Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2109117-01E Page 10 of 93

Date: 2021-09-28



C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	TIANYIN	TPA-46050200UU	Input: 100-240V~, 50/60Hz, 0.3A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (d	lB μ V)
(MHz)	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*
$0.50 \sim 5 00$	56.0	46.0
5.00 ~ 30.00	60.0	50.0

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2021-09-28



Conducted Emission on Live Terminal (150kHz to 30MHz) A:


EUT Operating Environment

Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keep WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

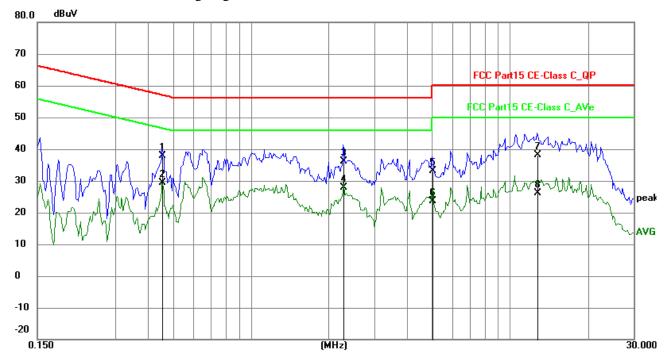

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.4542	28.10	9.77	37.87	56.80	-18.93	QP	Р
2	0.4542	19.54	9.77	29.31	46.80	-17.49	AVG	Р
3	2.2794	26.34	9.81	36.15	56.00	-19.85	QP	Р
4	2.2794	18.14	9.81	27.95	46.00	-18.05	AVG	Р
5	5.0202	23.29	9.93	33.22	60.00	-26.78	QP	Р
6	5.0202	13.59	9.93	23.52	50.00	-26.48	AVG	Р
7	12.7500	27.92	10.28	38.20	60.00	-21.80	QP	Р
8	12.7500	15.79	10.28	26.07	50.00	-23.93	AVG	П

Report No.: TW2109117-01E Page 12 of 93

Date: 2021-09-28



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keep WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

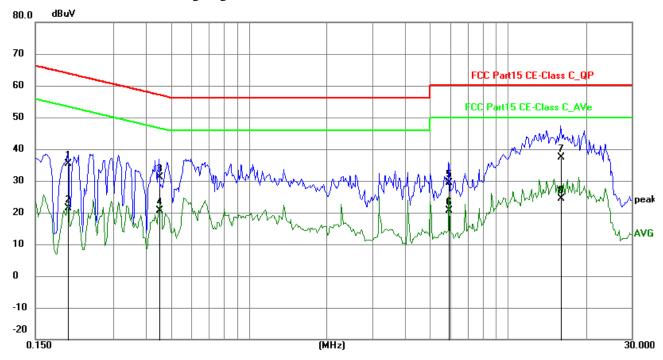

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2007	25.62	9.75	35.37	63.58	-28.21	QP	Р
2	0.2007	11.63	9.75	21.38	53.58	-32.20	AVG	Р
3	0.4503	21.48	9.77	31.25	56.87	-25.62	QP	Р
4	0.4503	10.84	9.77	20.61	46.87	-26.26	AVG	Р
5	5.9250	19.35	9.97	29.32	60.00	-30.68	QP	Р
6	5.9250	10.77	9.97	20.74	50.00	-29.26	AVG	Р
7	15.9948	26.88	10.44	37.32	60.00	-22.68	QP	Р
8	15.9948	14.05	10.44	24.49	50.00	-25.51	AVG	Р

Report No.: TW2109117-01E Page 13 of 93

Date: 2021-09-28




6 Radiated Emission Test

6.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

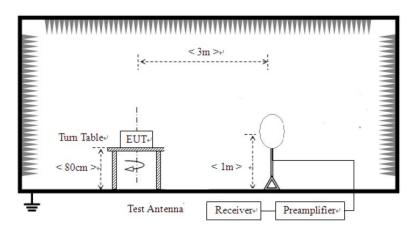


Page 14 of 93

Report No.: TW2109117-01E


Date: 2021-09-28



For radiated emissions from 30MHz to1GHz

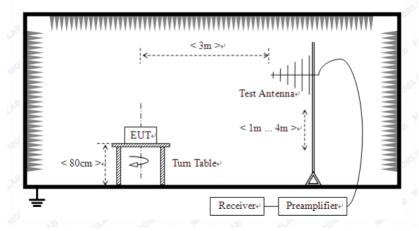

For radiated emissions above 1GHz

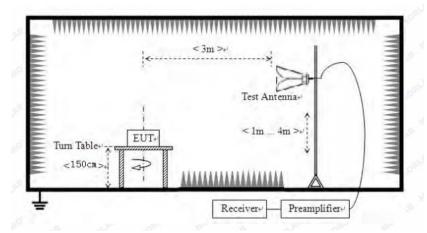

- 6.2 Configuration of The EUT Same as section 5.3 of this report
- 6.3 **EUT Operating Condition** Same as section 5.4 of this report.

Report No.: TW2109117-01E Page 15 of 93

Date: 2021-09-28



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. Worse case were recorded in the test report. 802.11b was the worst case.
- 5. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 16 of 93

Report No.: TW2109117-01E

Date: 2021-09-28




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

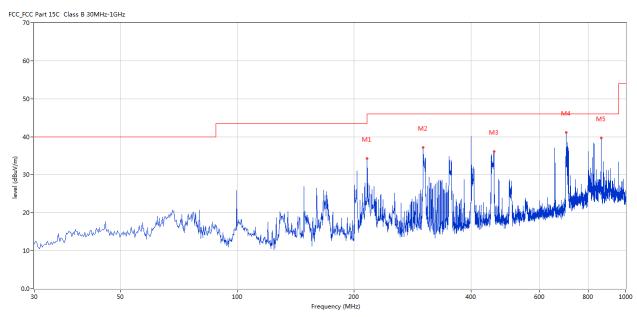

No	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	215.951	34.26	-13.60	43.5	-9.24	Peak	289.00	100	Horizontal	Pass
2	300.805	37.22	-11.01	46.0	-8.78	Peak	281.00	100	Horizontal	Pass
3	457.663	36.08	-7.79	46.0	-9.92	Peak	264.00	100	Horizontal	Pass
4	702.527	41.18	-4.09	46.0	-4.82	Peak	360.00	100	Horizontal	Pass
5	863.992	39.66	-2.34	46.0	-6.34	Peak	273.00	100	Horizontal	Pass

Report No.: TW2109117-01E Page 17 of 93

Date: 2021-09-28




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

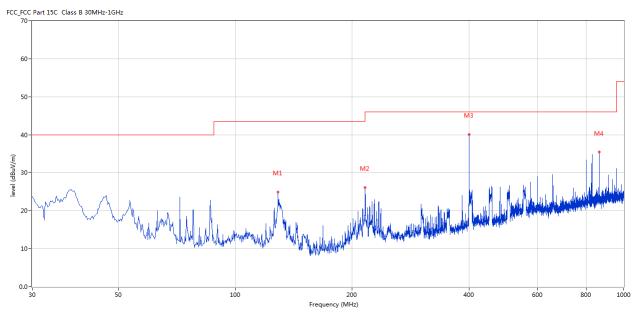

No	Frequenc	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	y (MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	128.915	24.88	-16.80	43.5	-18.62	Peak	87.00	100	Vertical	Pass
2	215.951	26.13	-13.60	43.5	-17.37	Peak	170.00	100	Vertical	Pass
3	399.963	40.06	-8.57	46.0	-5.94	Peak	0.00	100	Vertical	Pass
4	863.992	35.40	-2.34	46.0	-10.60	Peak	53.00	100	Vertical	Pass

Page 18 of 93


Report No.: TW2109117-01E

Date: 2021-09-28



Please refer to the following test plots for details:

CH01 for 11b at 1Mbps: Horizontal

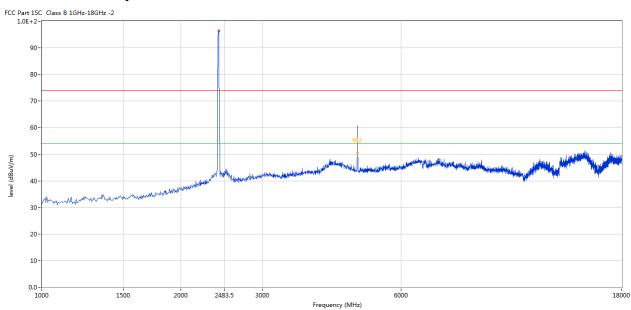


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	4824.044	60.91	3.14	74.0	-13.09	Peak	191.00	100	Horizontal	Pass
2**	4824.044	50.49	3.14	54.0	-3.51	AV	191.00	100	Horizontal	Pass

Page 19 of 93 Report No.: TW2109117-01E

Date: 2021-09-28



CH01 for 11b at 1Mbps: Vertical

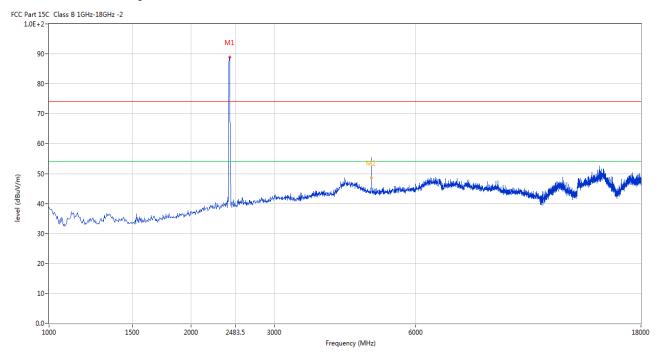


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4824.044	55.31	3.14	74.0	-18.69	Peak	163.00	100	Vertical	Pass
2**	4824.044	48.51	3.14	54.0	-5.49	AV	163.00	100	Vertical	Pass

Page 20 of 93 Report No.: TW2109117-01E

Date: 2021-09-28



CH06 for 11b at 1Mbps: Horizontal

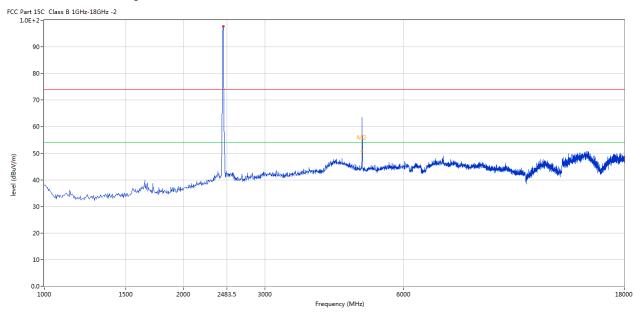


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	4875.031	62.50	3.19	74.0	-11.50	Peak	217.00	100	Horizontal	Pass
2**	4875.031	50.87	3.19	54.0	-3.13	AV	217.00	100	Horizontal	Pass

Page 21 of 93 Report No.: TW2109117-01E

Date: 2021-09-28



CH06 for 11b at 1Mbps: Vertical

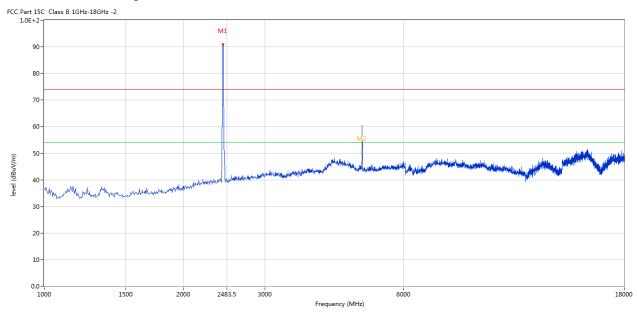


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	4875.031	60.53	3.19	74.0	-13.47	Peak	158.00	100	Vertical	Pass
2**	4875.031	50.42	3.19	54.0	-3.58	AV	158.00	100	Vertical	Pass

Page 22 of 93 Report No.: TW2109117-01E

Date: 2021-09-28



CH11 for 11b at 1Mbps: Horizontal

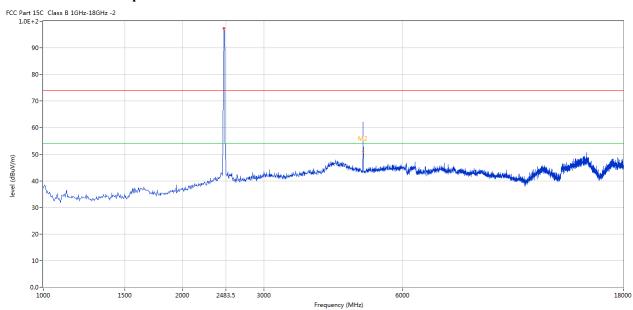


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	4921.770	62.14	3.27	74.0	-11.86	Peak	186.00	100	Horizontal	Pass
2**	4921.770	50.95	3.27	54.0	-3.05	AV	186.00	100	Horizontal	Pass

Report No.: TW2109117-01E Page 23 of 93

Date: 2021-09-28



CH11 for 11g at 6Mbps: Vertical

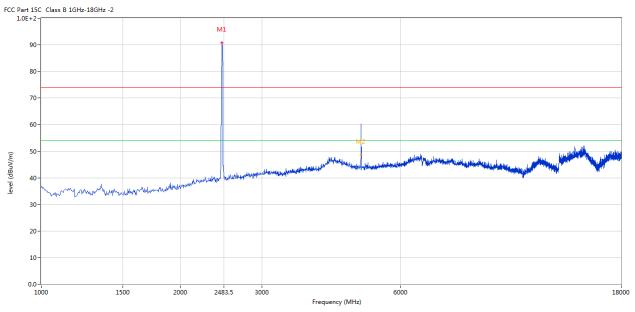

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	4921.770	60.31	3.27	74.0	-13.69	Peak	141.00	100	Vertical	Pass
2**	4921.770	48.63	3.27	54.0	-5.37	AV	141.00	100	Vertical	Pass

Note: 1. Result Level = Reading + Factor

2. Factor= AF + Cable Loss- Preamp

3. Margin = Result– Limit

4. For radiated Emissions from 18-25GHz and below 30MHz, it is only the floor noise.

5. The peak value less than the AV limit, no necessary to take down the AV measurement result.

Page 24 of 93


Report No.: TW2109117-01E

Date: 2021-09-28



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Report No.: TW2109117-01E Page 25 of 93

Date: 2021-09-28



6dB Occupied Bandwidth


EUT		T	ablet PC		Mod	lel	W 1	13P		
Mode		8	302.11b		Input Vol	tage	DC	3.7V		
Temperat	ure	24	4 deg. C,		Humidity	,	56%	6 RH		
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ndwidth Hz)		num Limit MHz)	Pass/ Fail		
1		2412	1	10	.04		0.5	Pass		
6		2437	1	10	.04		0.5	Pass		
11		2462	1	10	.04		0.5	Pass		
1		2412	11	9.	9.80		80 0.5		0.5	Pass
6		2437	11	9.	9.80		0.5	Pass		
11		2462	11	9.	80		0.5	Pass		

Report No.: TW2109117-01E Page 26 of 93

Date: 2021-09-28



1. 802.11b at 1Mbps of CH01

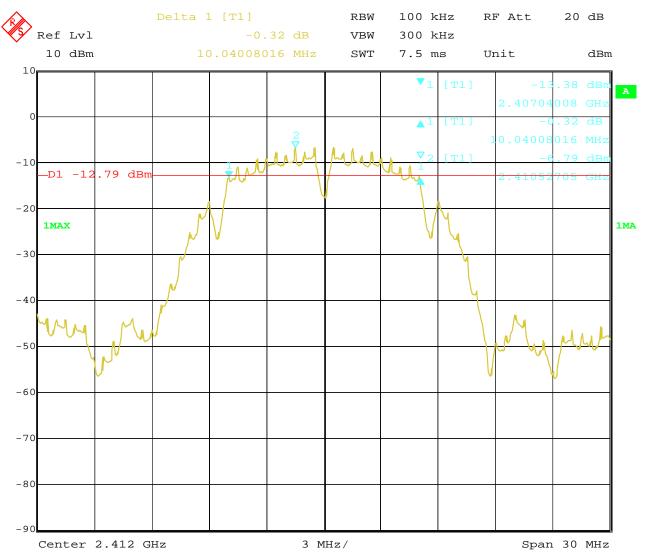


Date: 26.SEP.2021 14:45:05

Page 27 of 93 Report No.: TW2109117-01E

Date: 2021-09-28



2. 802.11b at 1Mbps of CH06

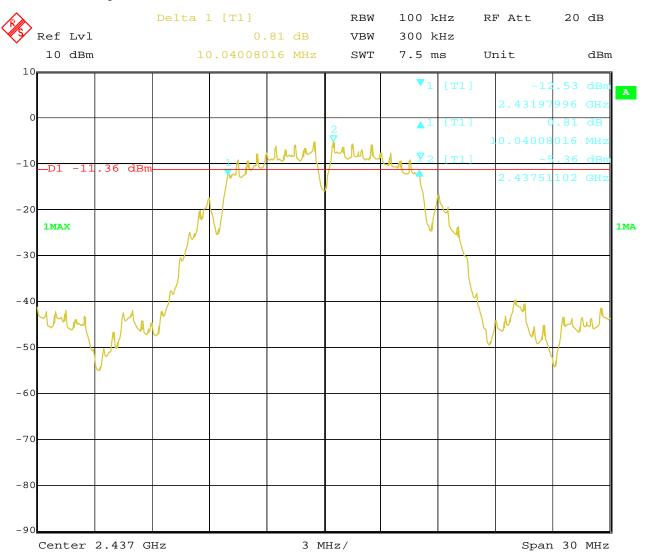


Date: 26.SEP.2021 15:01:40 Report No.: TW2109117-01E Page 28 of 93

Date: 2021-09-28



3. 802.11b at 1Mbps of CH11

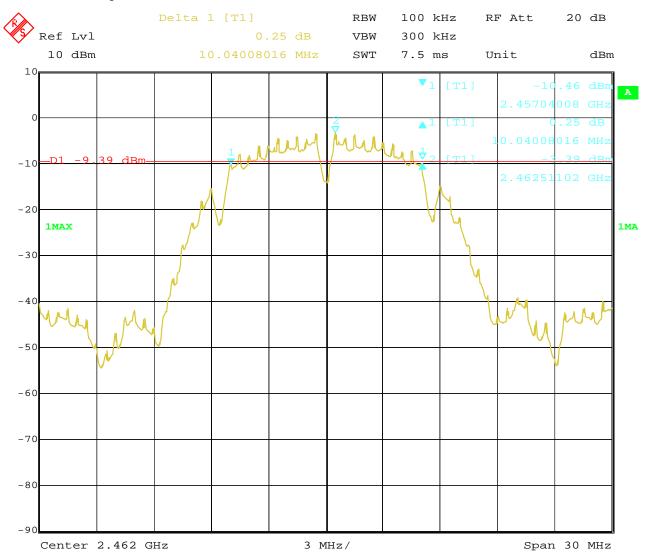


Date: 26.SEP.2021 15:06:05 Report No.: TW2109117-01E Page 29 of 93

Date: 2021-09-28



4. 802.11b at 11Mbps of CH01

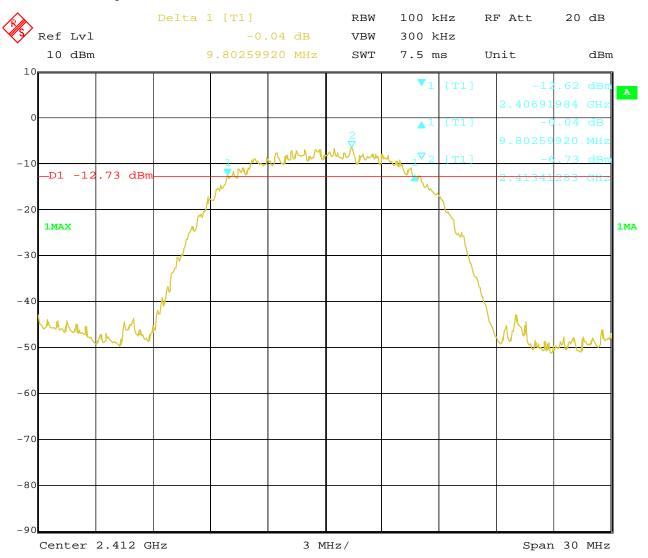


Date: 26.SEP.2021 16:17:20

Page 30 of 93 Report No.: TW2109117-01E

Date: 2021-09-28



5. 802.11b at 11Mbps of CH06

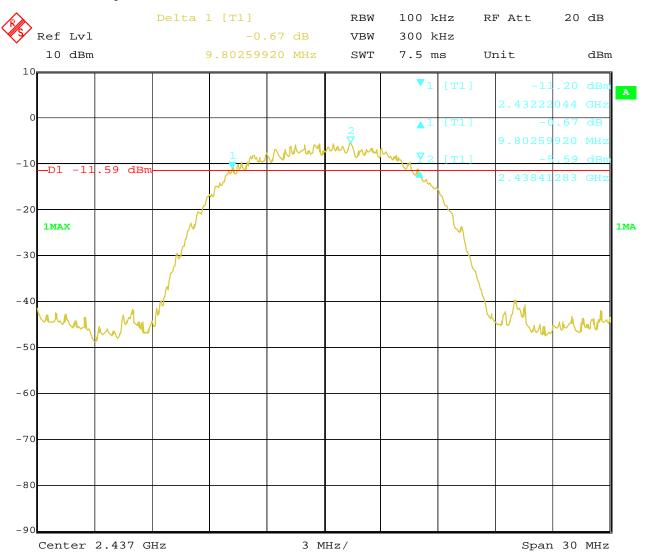


Date: 26.SEP.2021 16:13:31 Report No.: TW2109117-01E Page 31 of 93

Date: 2021-09-28



6. 802.11b at 11Mbps of CH11

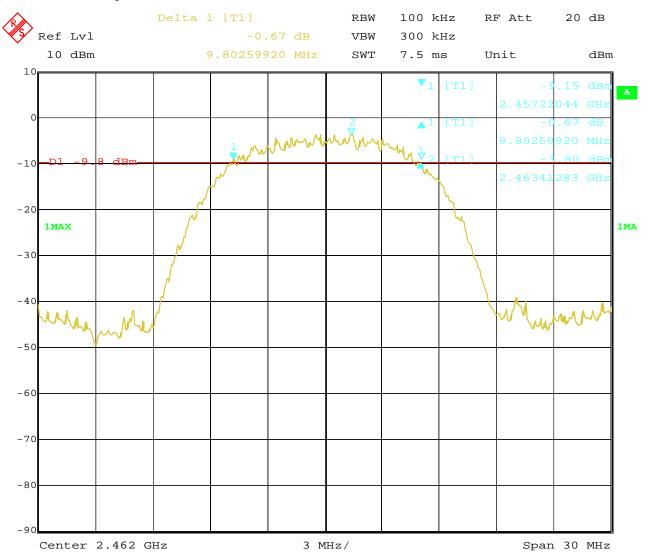

Date: 26.SEP.2021 15:52:18 Report No.: TW2109117-01E Page 32 of 93

Date: 2021-09-28



6dB Occupied Bandwidth

EUT		Ta	ablet PC		Mod	lel	,	W113P
Mode		8	302.11g		Input Vol	tage	Ι	OC3.7V
Temperat	ure	24	4 deg. C,		Humidity		5	6% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	_	andwidth Hz)	Minimum Limit (MHz)		Pass/ Fail
1		2412	6	15	5.87		0.5	Pass
6		2437	6	15	5.87	0.5		Pass
11		2462	6	15	5.87	0.5		Pass

Page 33 of 93


Report No.: TW2109117-01E

Date: 2021-09-28



Test Plots:

1. 802.11g at 6Mbps of CH01

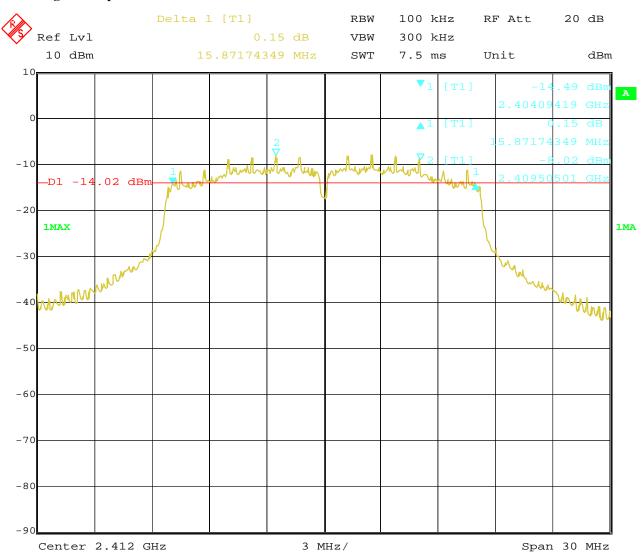

26.SEP.2021 15:23:24 Date:


Page 34 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



2. 802.11g at 6Mbps of CH06

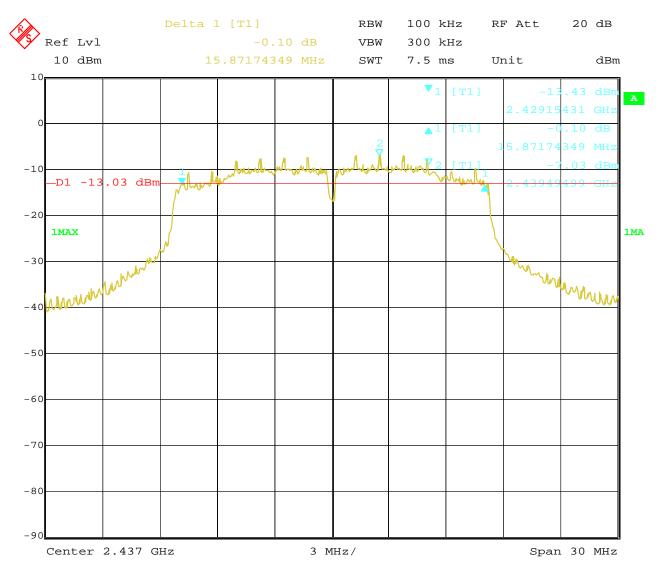


26.SEP.2021 15:20:06 Date:

Page 35 of 93 Report No.: TW2109117-01E

Date: 2021-09-28

3. 802.11g at 6Mbps of CH11

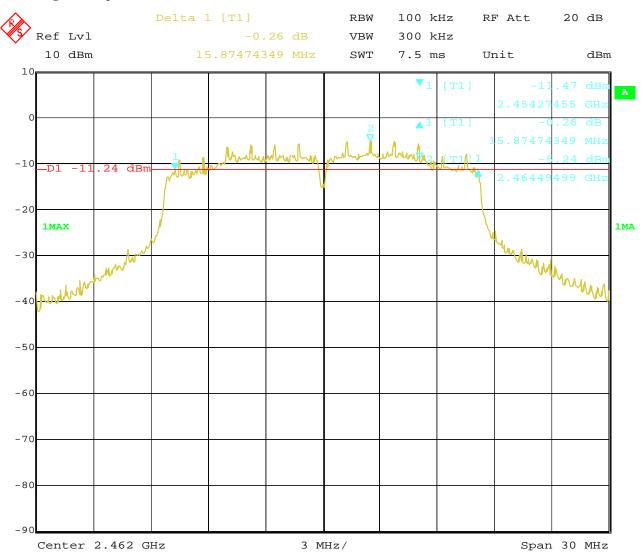

Date: 26.SEP.2021 15:37:20 Report No.: TW2109117-01E Page 36 of 93

Date: 2021-09-28



6dB Occupied Bandwidth

EUT		Tablet PC			Model		W113P	
Mode		802.11n HT20			Input Voltage		DC3.7V	
Temperature		24 deg. C,			Humidity		56% RH	
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail
1	2412		mcs0	16.84		0.5		Pass
6	2437 mcs0		16	16.84		0.5	Pass	
11		2462	mcs0	16.84			0.5	Pass

Page 37 of 93


Report No.: TW2109117-01E

Date: 2021-09-28



Test Plots:

1. 802.11n at HT20 of CH01

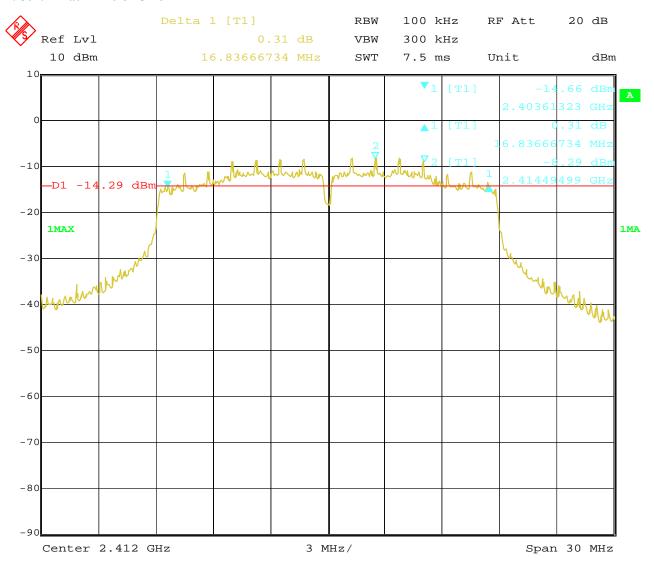


26.SEP.2021 16:33:34 Date:

Report No.: TW2109117-01E Page 38 of 93

Date: 2021-09-28



2. 802.11n at HT20 of CH06

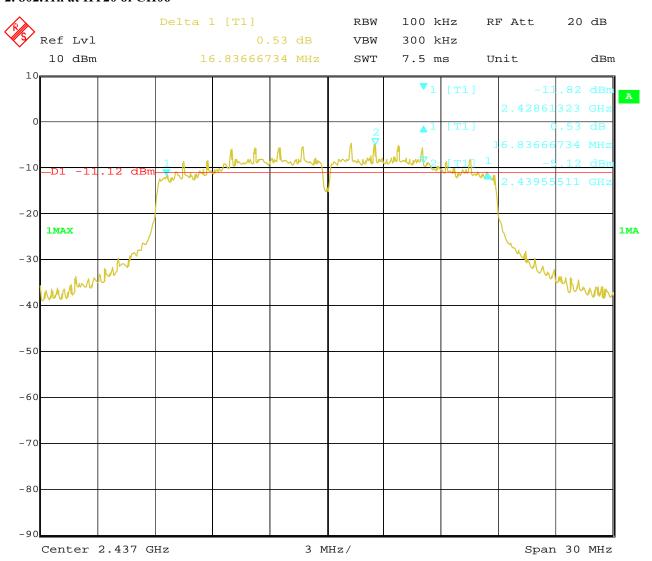


Date: 26.SEP.2021 16:45:04

Page 39 of 93 Report No.: TW2109117-01E

Date: 2021-09-28



3. 802.11n at HT20 of CH11

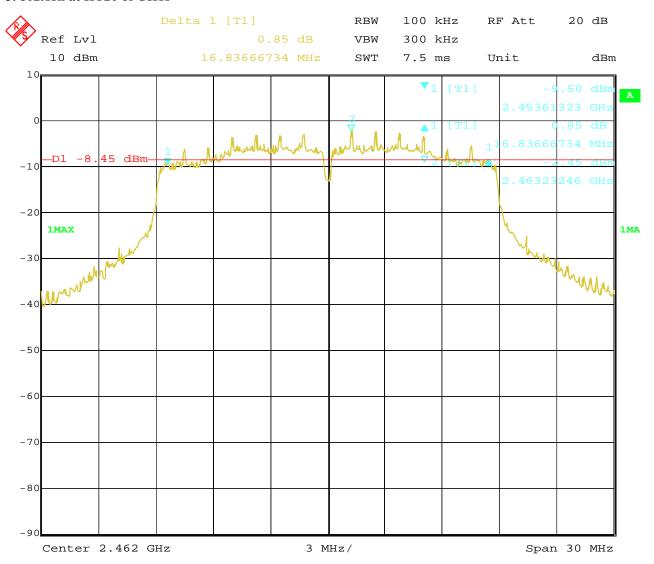

Date: 26.SEP.2021 17:20:11 Report No.: TW2109117-01E Page 40 of 93

Date: 2021-09-28



6dB Occupied Bandwidth

EUT		Т	ablet PC		Model		W113P	
Mode		802	2.11n HT40		Input Voltage		DC3.7V	
Temperat	ure	24	4 deg. C,		Humidity		56% RH	
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	-	ndwidth Hz)		num Limit MHz)	Pass/ Fail
3		2422	mcs0	35	.47		0.5	Pass
6		2437	mcs0	35	.47		0.5	Pass
9		2452	mcs0	35	.47		0.5	Pass

Page 41 of 93


Report No.: TW2109117-01E

Date: 2021-09-28



Test Plots:

1. 802.11n at HT40 of CH03

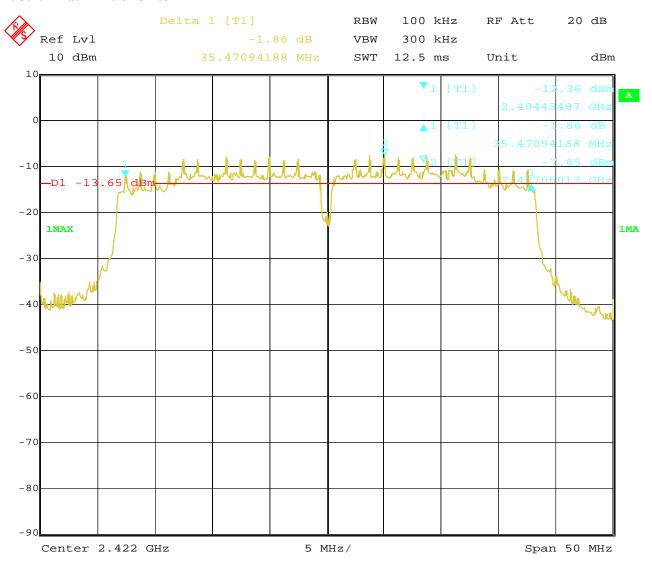


26.SEP.2021 17:22:05 Date:

Report No.: TW2109117-01E Page 42 of 93

Date: 2021-09-28



2. 802.11n at HT40 of CH06

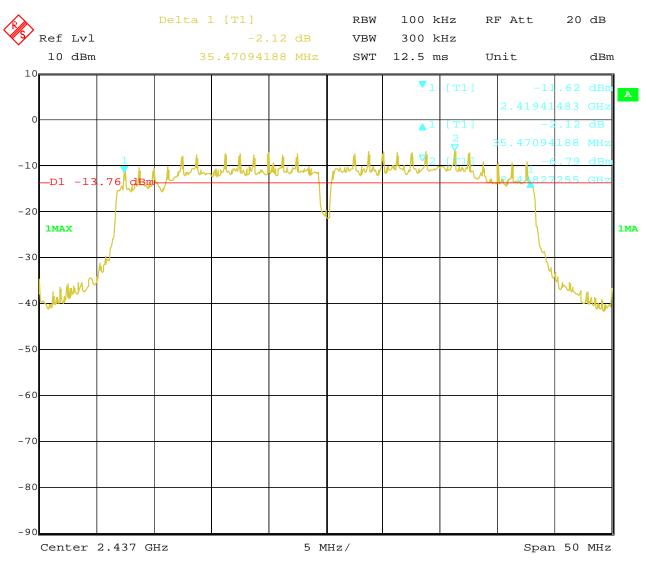


Date: 26.SEP.2021 17:30:38

Page 43 of 93 Report No.: TW2109117-01E

Date: 2021-09-28



3. 802.11n at HT40 of CH09

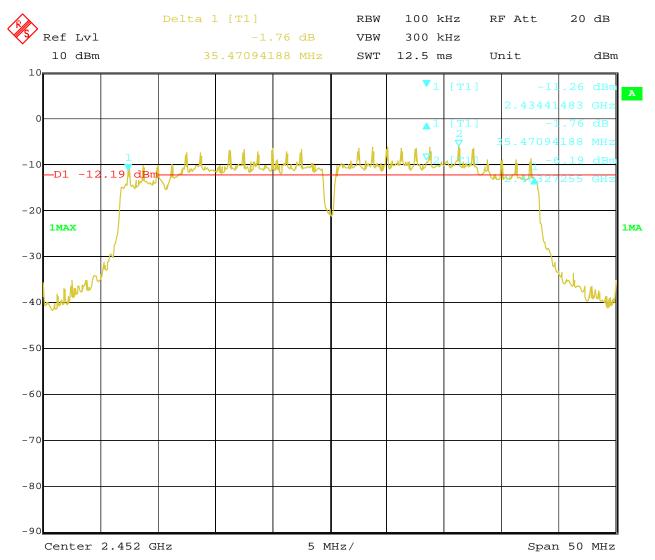

Date: 26.SEP.2021 17:39:00 Report No.: TW2109117-01E


Date: 2021-09-28



Page 44 of 93

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the AV power was measured

Page 45 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



8.4Test Results

EUT		Tablet PC		Model	W113P	
Mode		802.11b		Input Voltage	DC3.7V	
Temperat	mperature 24 deg. C,		24 deg. C,	Humidity	56% RH	
Channel	Frequ (MHz	-	Max. Powe	er Output (dBm)	Power Limit (dBm)	Pass/ Fail
1	2412		5.42		30	Pass
6	2437			4.36	30	Pass
11	2462			5.39	30	Pass

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		Tablet PC		Model	W113P	
Mode		802.11g		Input Voltage	DC3.7V	
Temperat	ure	re 24 deg. C,		Humidity	56% RH	
Channel	Frequ (MH	uency z)	Max. Power	r Output (dBm)	Power Limit (dBm)	Pass/ Fail
1	2412		4	4.50	30	Pass
6	2437			4.22	30	Pass
11	2462			4.35	30	Pass

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 46 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



EUT		Tablet PC		Model	W113P	
Mode		802.11n (HT20)		Input Voltage	DC3.7V	
Temperat	mperature 24 deg. C,		24 deg. C,	Humidity	56% RH	
Channel	Frequ (MH	uency z)	Max. Powe	er Output (dBm)	Power Limit (dBm)	Pass/ Fail
1	2412			4.68	30	Pass
6	2437			4.08	30	Pass
11	2462			4.21	30	Pass

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

- 2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded

EUT		Tablet PC		Model	W113P	
Mode		802.11n (HT40)		Input Voltage	DC3.7V	
Temperat	ure	are 24 deg. C,		Humidity	56% RH	
Channel	Frequ (MH	uency z)	Max. Powe	er Output (dBm)	Power Limit (dBm)	Pass/ Fail
3	2422			3.86	30	Pass
6	2437			4.20	30	Pass
9	2452			4.31	30	Pass

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH03, CH06 and CH09

- 2. The result basic equation calculation as follow:
 - Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded


Report No.: TW2109117-01E Page 47 of 93

Date: 2021-09-28



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be $\leq 8 \text{ dBm/3kHz}$.

Report No.: TW2109117-01E Page 48 of 93

Date: 2021-09-28



9.4Test Result

EUT		Tablet PC		Model	W113P	
Mode		802.11b 11Mb	ps Input Voltage		DC3.7V	
Temperat	ure	24 deg. C,		Humidity	56% RH	
Channel	F	requency (MHz)		r Spectral Density dBm/10kHz)	Limit (dBm/3kHz)	Pass/ Fail
1		2412		-15.40	8	Pass
6		2437		-14.37	8	Pass
11		2462		-12.82	8	Pass

EUT		Tablet PC		Model	W113P	
Mode		802.11b 1Mbps		Input Voltage	DC3.7V	
Temperat	ure	24 deg. C,		Humidity	56% RH	
Channel	F	requency (MHz)		r Spectral Density dBm/10kHz)	Limit (dBm/3kHz)	Pass/ Fail
1		2412		-19.16	8	Pass
6		2437		-17.91	8	Pass
11		2462		-16.95	8	Pass

EUT		Tablet PC		Model	W113P	
Mode		802.11g 6Mbps		Input Voltage	DC3.7V	
Temperat	ure 24 deg. C,		Humidity		56% RH	
Channel	F	requency (MHz)		r Spectral Density dBm/10kHz)	Limit (dBm/3kHz)	Pass/ Fail
1		2412		-15.66	8	Pass
6		2437		-14.34	8	Pass
11		2462		-13.30	8	Pass

Report No.: TW2109117-01E Page 49 of 93

Date: 2021-09-28



EUT		Tablet PC		Model	W113P	
Mode		802.11n HT20 mcs0		Input Voltage	DC3.7V	
Temperat	ure	24 deg. C	,	Humidity	56% RH	
Channel	Fr	requency (MHz)		Spectral Density lBm/10kHz)	Limit (dBm/3kHz)	Pass/ Fail
1		2412		-19.25	8	Pass
6		2437		-18.26	8	Pass
11		2462		-17.19	8	Pass

EUT		Tablet PC		Model	W113P	
Mode		802.11n HT40 mc		Input Voltage	DC3.7V	
Temperat	Temperature 24 deg. C		C, Humidity		56% RH	
Channel	Fr	Frequency (MHz)		Spectral Density lBm/10kHz)	Limit (dBm/3kHz)	Pass/ Fail
3		2422	-22.61		8	Pass
6		2437		-22.15	8	Pass
9		2452		-21.66	8	Pass


Page 50 of 93 Report No.: TW2109117-01E

Date: 2021-09-28



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

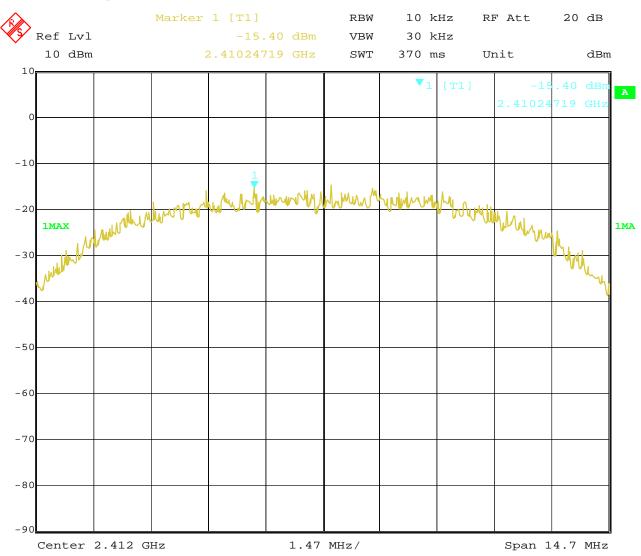

27.SEP.2021 11:02:54 Date:


Page 51 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



2. 802.11b at 11Mbps at CH06

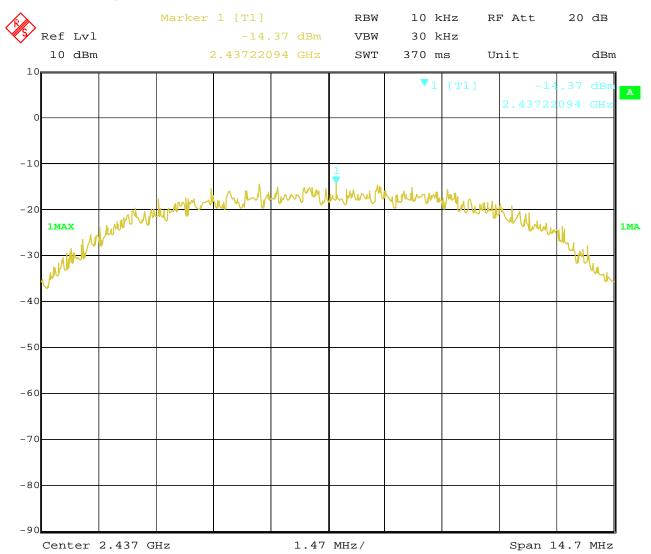

Date: 27.SEP.2021 11:11:13


Page 52 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



3. 802.11b at 11Mbps of CH11

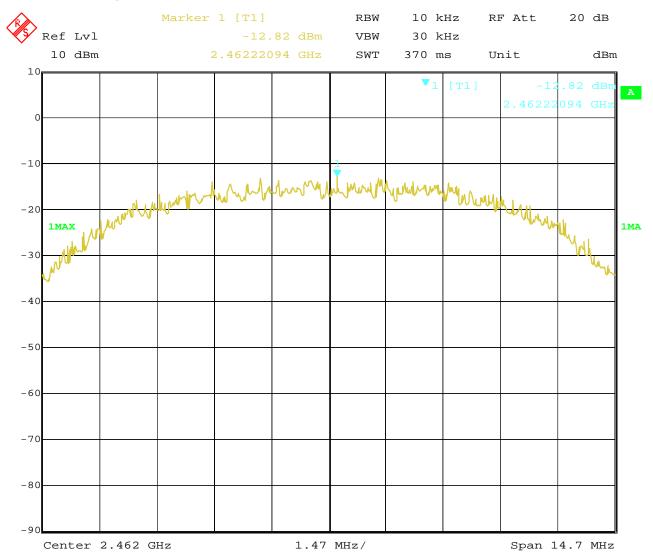

Date: 27.SEP.2021 11:15:30


Page 53 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



4. 802.11b at 1Mbps of CH1

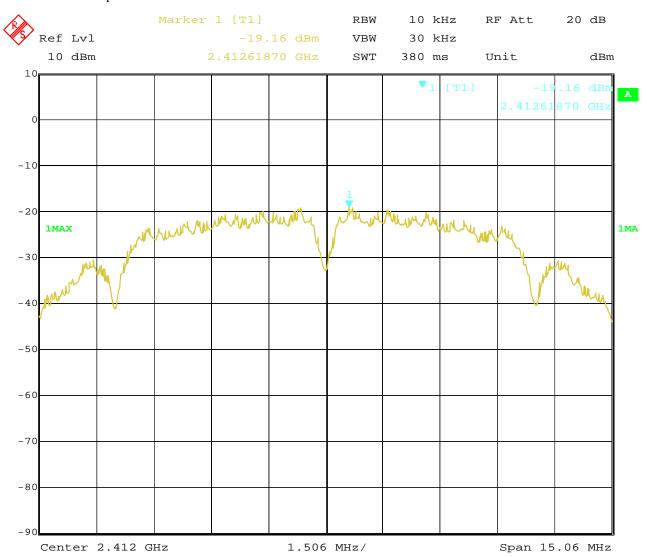

Date: 27.SEP.2021 13:05:55


Page 54 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



5. 802.11b at 1Mbps of CH6

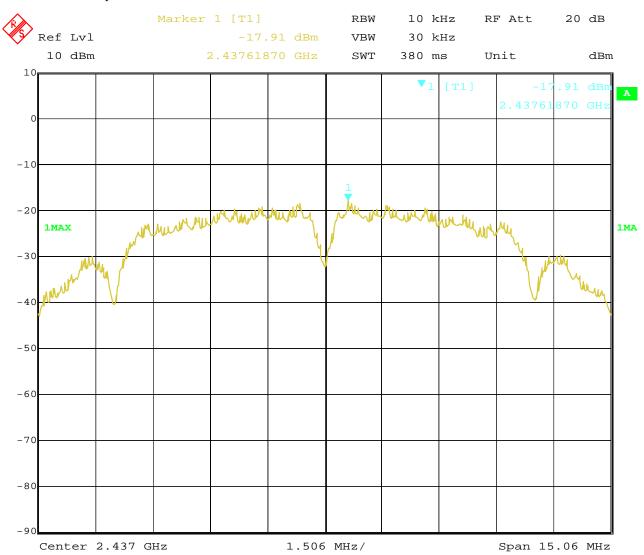

Date: 27.SEP.2021 13:11:30


Page 55 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



6. 802.11b at 1Mbps of CH11

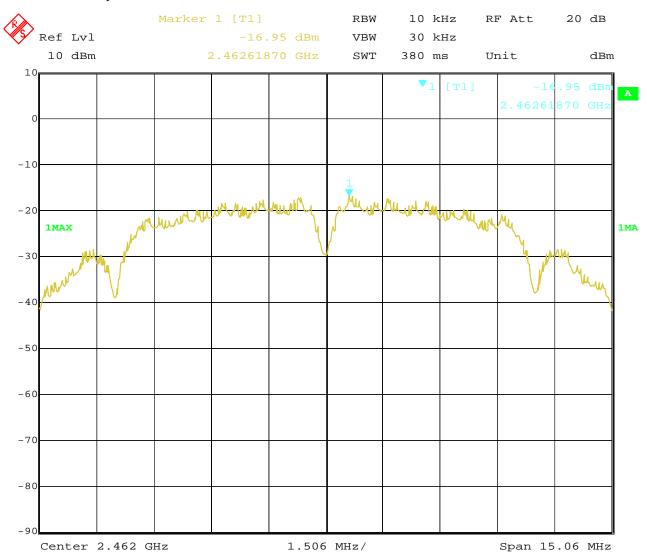

Date: 27.SEP.2021 13:18:28


Page 56 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



7. 802.11g at 6Mbps of CH1

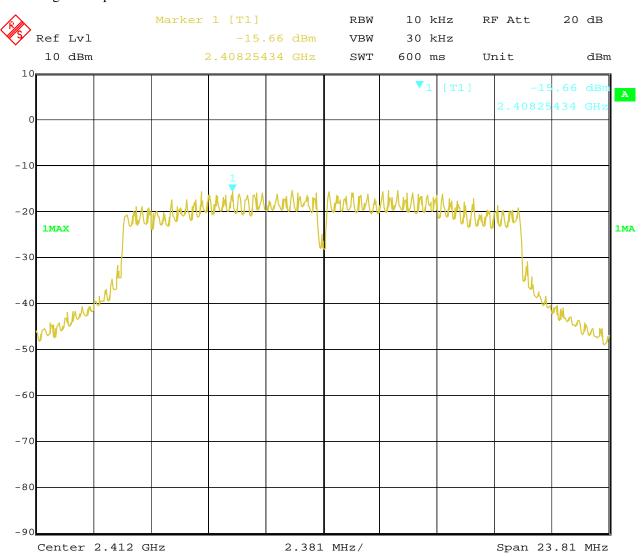

Date: 27.SEP.2021 11:35:15


Page 57 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



8. 802.11g at 6Mbps of CH6

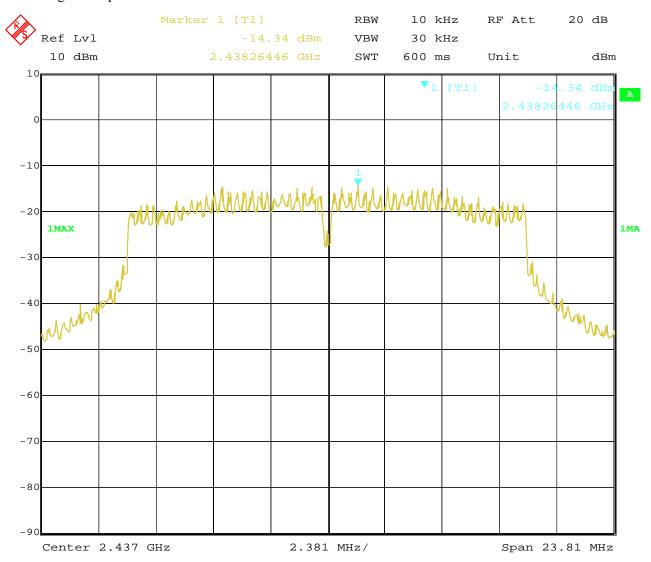

Date: 27.SEP.2021 11:23:48


Page 58 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



9. 802.11g at 6Mbps of CH11

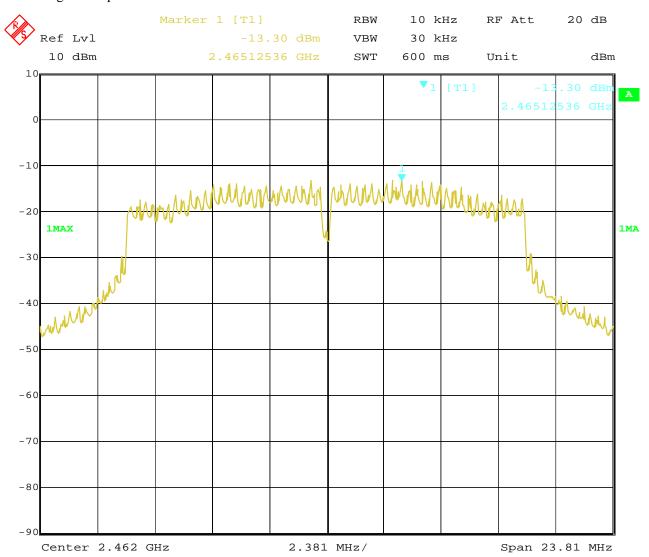

Date: 27.SEP.2021 11:21:15


Page 59 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



10. 802.11n at HT20 of CH01

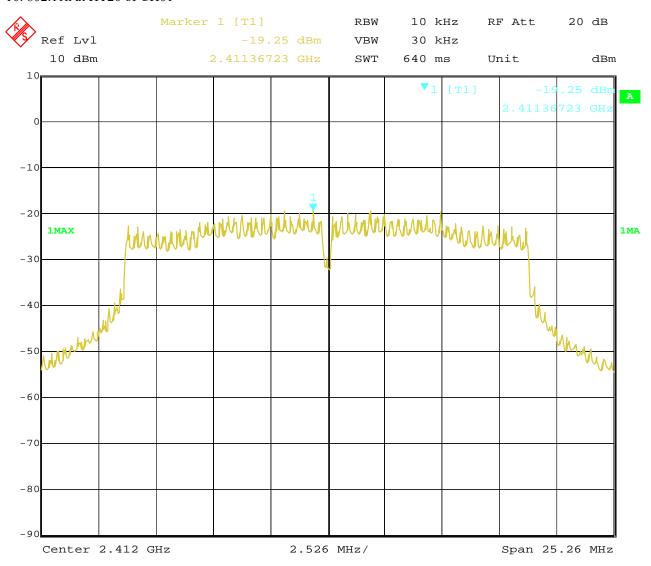


Date: 27.SEP.2021 13:35:14

Page 60 of 93 Report No.: TW2109117-01E

Date: 2021-09-28



11. 802.11n at HT20 of CH06

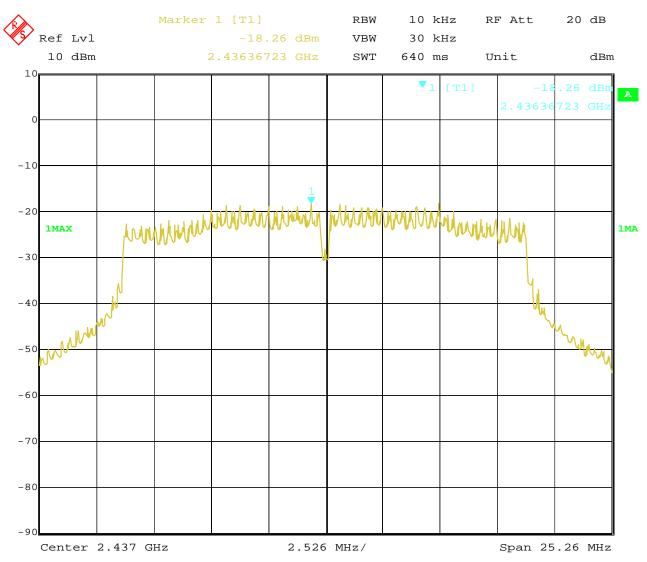

Date: 27.SEP.2021 14:06:22


Page 61 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



12. 802.11n at HT20 of CH11

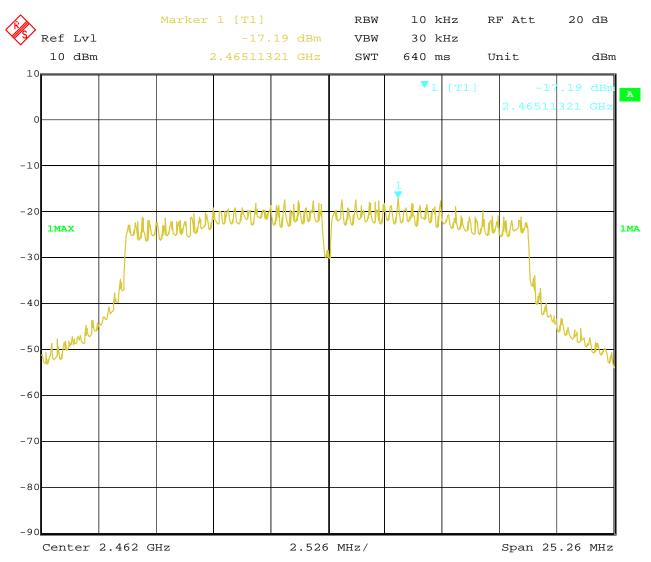


Date: 27.SEP.2021 13:25:54

Page 62 of 93 Report No.: TW2109117-01E

Date: 2021-09-28



13. 802.11n at HT40 of CH01

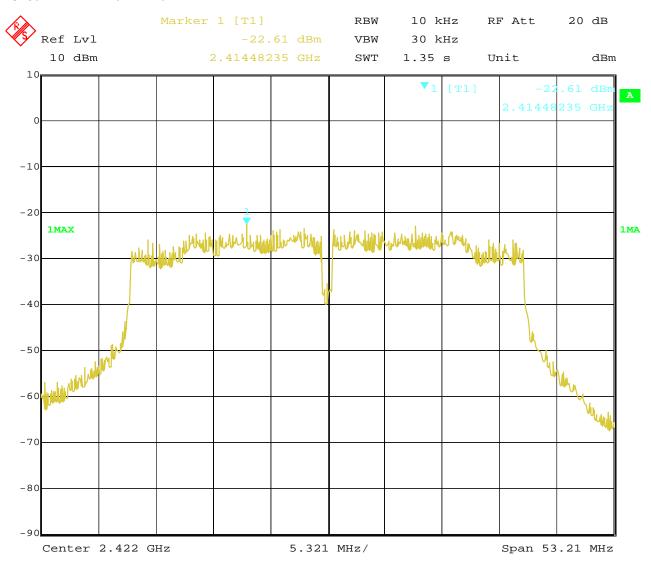


Date: 27.SEP.2021 13:43:25

Page 63 of 93 Report No.: TW2109117-01E

Date: 2021-09-28



14. 802.11n at HT40 of CH04

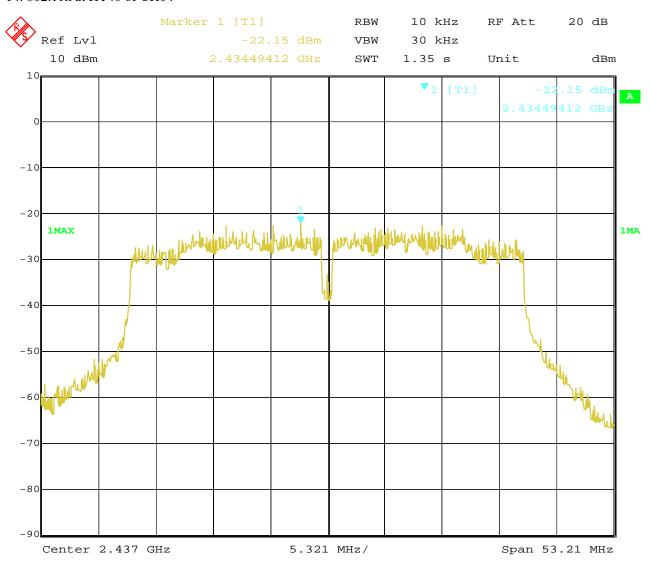

Date: 27.SEP.2021 13:53:20


Page 64 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



15. 802.11n at HT40 of CH07

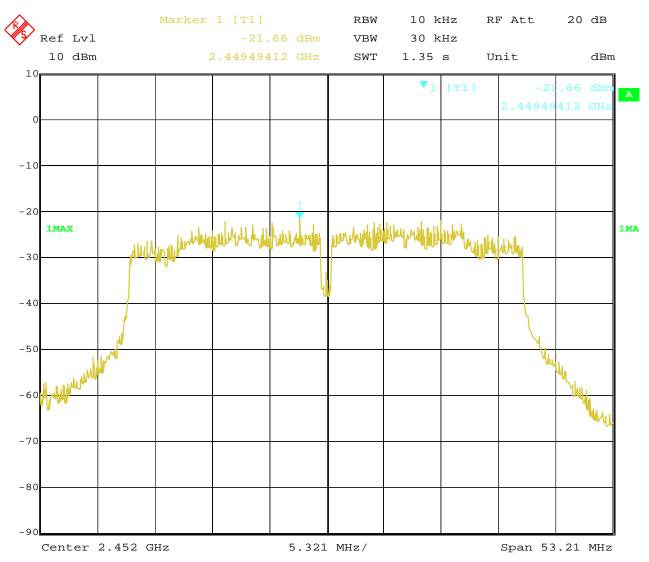


Date: 27.SEP.2021 13:56:55 Report No.: TW2109117-01E Page 65 of 93

Date: 2021-09-28



10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule. 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 66 of 93

Report No.: TW2109117-01E

Date: 2021-09-28




For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge Measurement

EUT	Tablet PC	Model	W113P
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

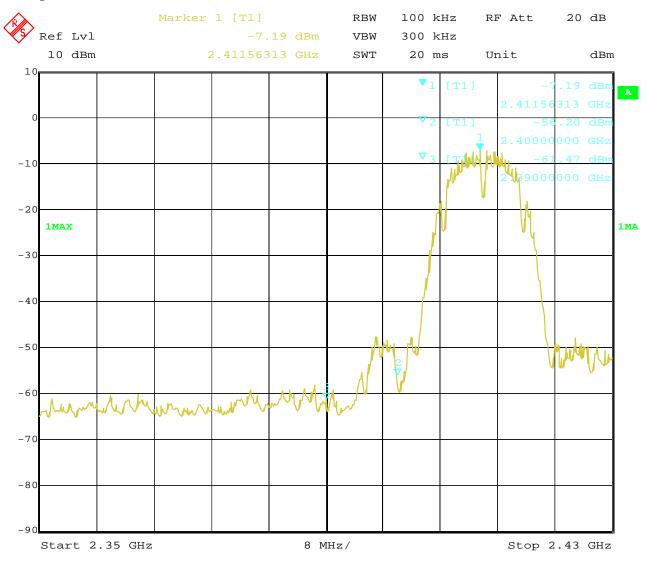

Date: 27.SEP.2021 14:43:49

Page 67 of 93

Report No.: TW2109117-01E

Date: 2021-09-28




CH11 at 1Mbps

10.4 Band-edge Measurement

EUT	Tablet PC	Model	W113P
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

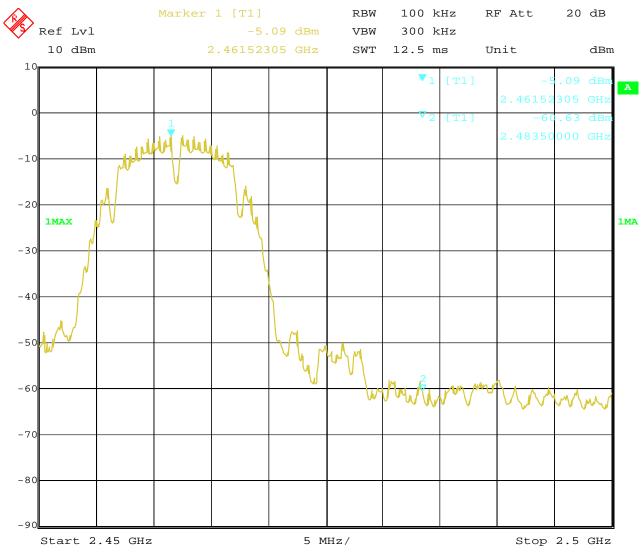

27.SEP.2021 Date: 15:05:20

Page 68 of 93

Report No.: TW2109117-01E

Date: 2021-09-28




For 802.11b mode

CH01 at 11Mbps

10.4 Band-edge Measurement

EUT	Tablet PC	Model	W113P
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

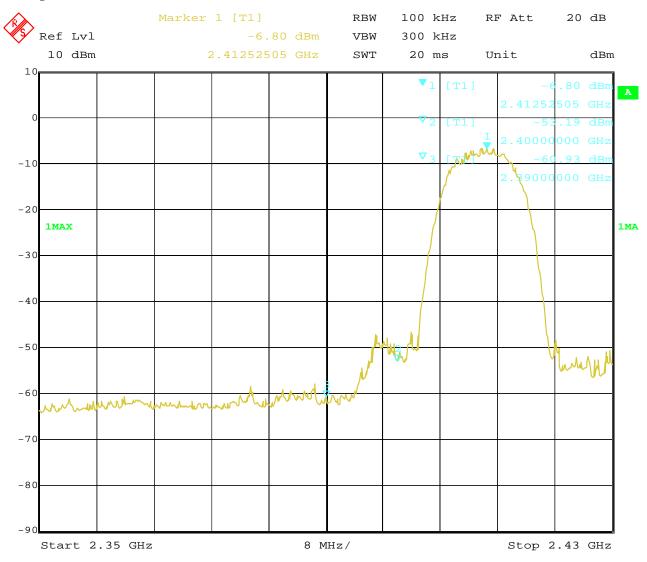

Date: 27.SEP.2021 14:35:14

Page 69 of 93

Report No.: TW2109117-01E

Date: 2021-09-28




CH11 at 11Mbps

10.4 Band-edge Measurement

EUT	Tablet PC	Model	W113P
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

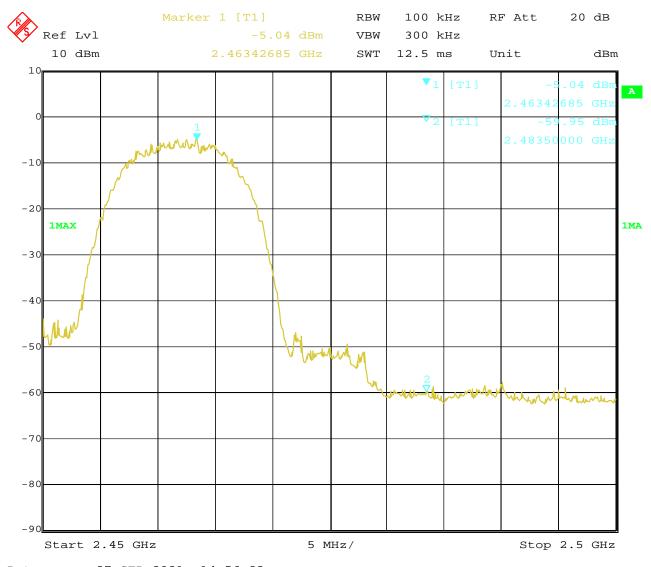

27.SEP.2021 Date: 14:56:23

Page 70 of 93

Report No.: TW2109117-01E

Date: 2021-09-28




For 802.11g mode

CH01 at 6Mbps

10.4 Band-edge Measurement

EUT	Tablet PC	Model	W113P
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

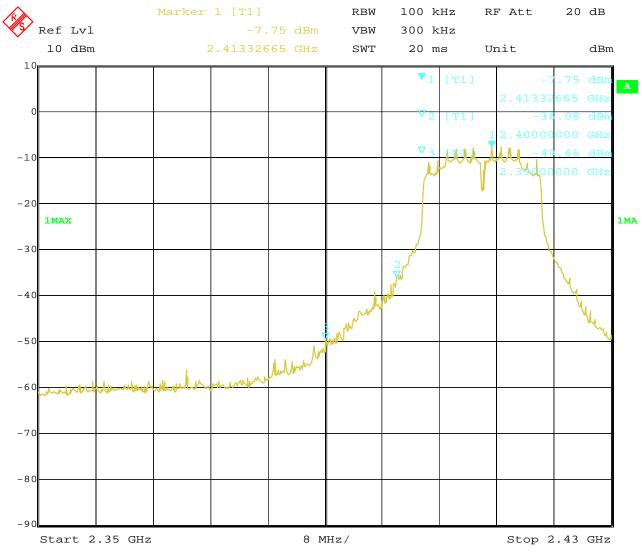

27.SEP.2021 14:38:59 Date:

Page 71 of 93

Report No.: TW2109117-01E

Date: 2021-09-28




CH11 at 6Mbps

Band-edge Measurement 10.4

EUT	Tablet PC	Model	W113P
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

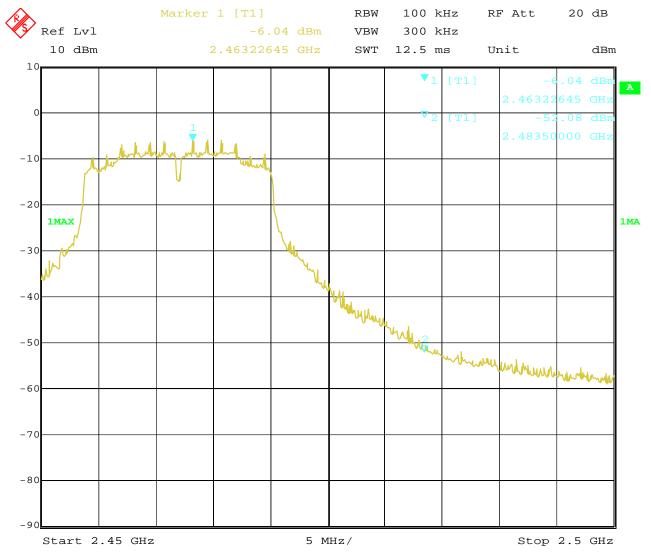

27.SEP.2021 Date: 15:03:42

Page 72 of 93

Report No.: TW2109117-01E

Date: 2021-09-28




For 802.11n (HT20) mode

CH01 at mcs0

Band-edge Measurement 10.4

EUT	Tablet PC	Model	W113P
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

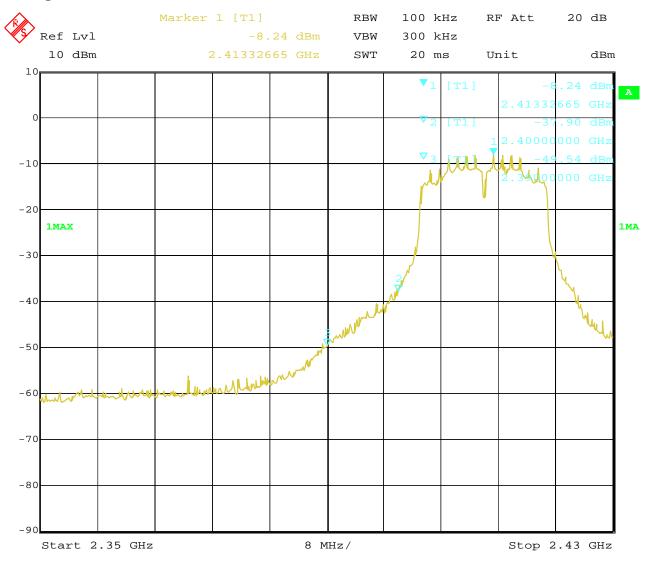

27.SEP.2021 14:47:03 Date:

Page 73 of 93

Report No.: TW2109117-01E

Date: 2021-09-28




CH11 at mcs0

10.4 Band-edge Measurement

EUT	Tablet PC	Model	W113P
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

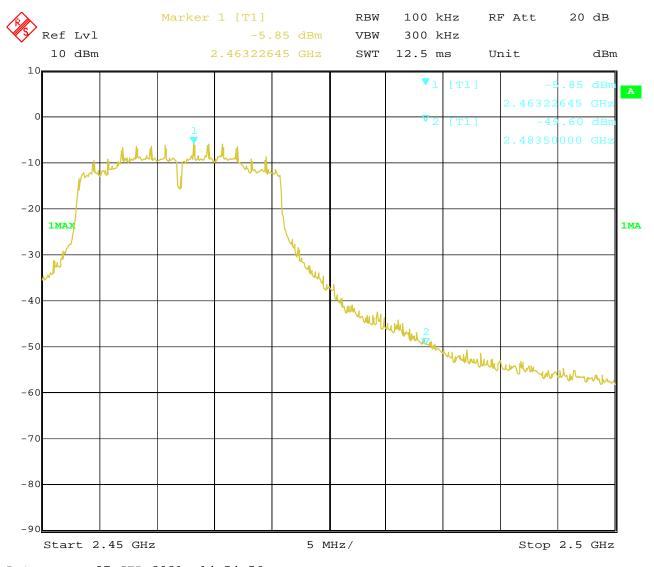

27.SEP.2021 Date: 14:54:56

Page 74 of 93

Report No.: TW2109117-01E

Date: 2021-09-28




For 802.11n (HT40) mode

CH03 at msc0

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC	Model	W113P
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

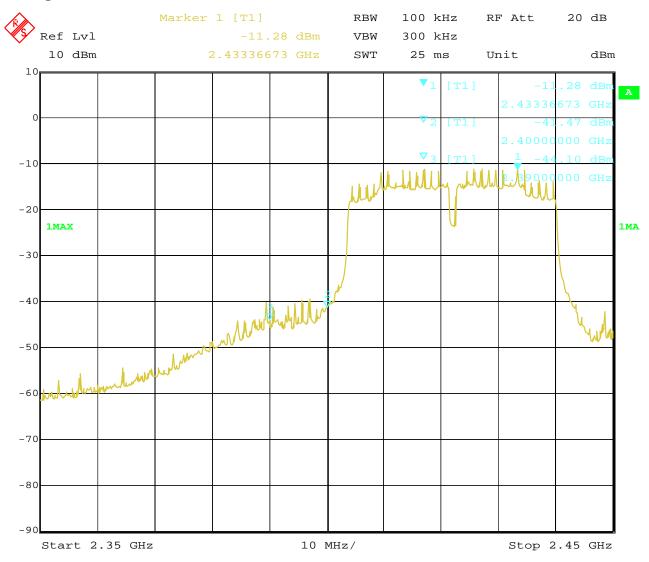

27.SEP.2021 15:11:52 Date:

Page 75 of 93

Report No.: TW2109117-01E

Date: 2021-09-28




CH09 at msc0

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC	Model	W113P
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

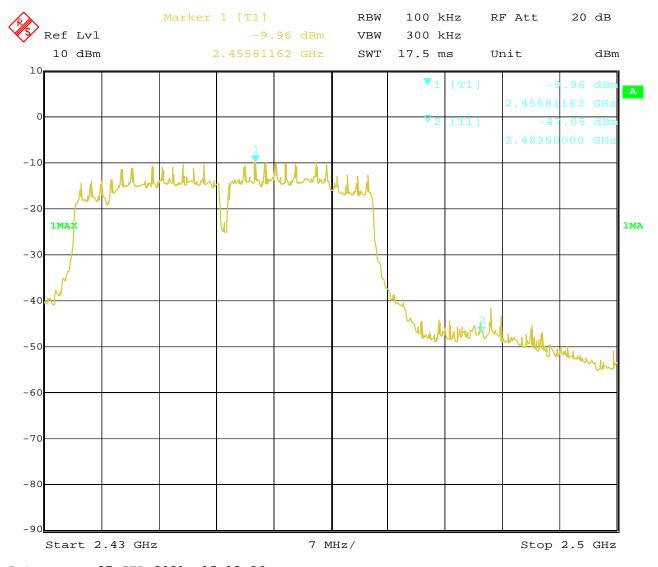

27.SEP.2021 Date: 15:13:36 Report No.: TW2109117-01E Page 76 of 93

Date: 2021-09-28



10.5 Restricted band Measurement

EUT	Tablet PC		Model	W113P	
Mode	Keeping	Transmitting	Input Voltage	DC3.7V	
Temperature	24	deg. C,	Humidity	56% RH	
Test Result:		Pass	Detector	PK	
802.11b mode, Low Channel, Horizontal					
2390	PK (dBµV/m)	44.71	T :!4	$74(dB\mu V/m)$	
	AV (dBμV/m)		Limit	54(dBμV/m)	
802.11b mode, Vertical					
2390	PK (dBμV/m)	43.82	Limit	74(dBμV/m)	
	AV (dBμV/m)		Limit	54(dBμV/m)	

10.5 Restricted band Measurement

EUT	Tablet PC		Model	W113P		
Mode	Keeping	Transmitting	Input Voltage	DC3.7V		
Temperature	24	deg. C,	Humidity	56% RH		
Test Result:		Pass	Detector	PK		
802.11b mode, High Channel, Horizontal						
2483.5	PK (dBµV/m)	46.86		$74(dB\mu V/m)$		
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$		
802.11b mode, High Channel, Vertical						
2483.5	PK (dBµV/m)	43.09	Limit	74(dBμV/m)		
	AV (dBμV/m)			$54(dB\mu V/m)$		

Report No.: TW2109117-01E Page 77 of 93

Date: 2021-09-28



10.5 Restricted band Measurement

EUT	Tablet PC		Model	W113P		
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V		
Temperature	24	deg. C,	Humidity	56% RH		
Test Result:		Pass	Detector	PK		
	802.11g mode, Low Channel, Horizontal					
2390	PK (dBμV/m)	46.53	T :!4	$74(dB\mu V/m)$		
	AV (dBμV/m)		Limit	54(dBμV/m)		
802.11g mode, Vertical						
2390	PK (dBμV/m)	44.11	Limit	$74(dB\mu V/m)$		
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$		

10.5 Restricted band Measurement

10.5 Restricted band inclustrement						
EUT	Tablet PC		Model	W113P		
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V		
Temperature	24	deg. C,	Humidity	56% RH		
Test Result:		Pass	Detector	PK		
802.11g mode, High Channel, Horizontal						
2483.5	PK (dBμV/m)	53.18	T 114	$74(dB\mu V/m)$		
	AV (dBμV/m)	40.29	Limit	$54(dB\mu V/m)$		
802.11g mode, High Channel, Vertical						
2483.5	PK (dBµV/m)	47.61	T ::4	$74(dB\mu V/m)$		
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$		

Report No.: TW2109117-01E Page 78 of 93

Date: 2021-09-28



10.5 Restricted band Measurement

EUT	Tablet PC		Model	W113P		
Mode	Keeping	Transmitting	Input Voltage	DC3.7V		
Temperature	24	deg. C,	Humidity	56% RH		
Test Result:		Pass	Detector	PK		
802.11n HT20 mode, Low Channel, Horizontal						
2390	PK (dBµV/m)	46.63	- · ·	$74(dB\mu V/m)$		
	AV (dBμV/m)		Limit	54(dBμV/m)		
802.11n HT20 mode, Low Channel, Vertical						
2390	PK (dBμV/m)	44.30	Limit	74(dBμV/m)		
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$		

10.5 Restricted band Measurement

EUT	Tablet PC		Model	W113P		
Mode	Keeping	Transmitting	Input Voltage	DC3.7V		
Temperature	24	deg. C,	Humidity	56% RH		
Test Result:		Pass	Detector	PK		
	802.11n HT20 mode, High Channel, Horizontal					
2483.5	PK (dBµV/m)	56.71	T 114	$74(dB\mu V/m)$		
	AV (dBμV/m)	43.85	Limit	$54(dB\mu V/m)$		
	802.11n HT20 mode, High Channel, Vertical					
2483.5	PK (dBμV/m)	49.12	Limit	74(dBμV/m)		
	AV (dBμV/m)		Lillill	$54(dB\mu V/m)$		

Page 79 of 93

Report No.: TW2109117-01E


Date: 2021-09-28



10.5 Restricted band Measurement

EUT	Tablet PC		Model	W113P		
Mode	Keeping	Transmitting	Input Voltage	DC3.7V		
Temperature	24	deg. C,	Humidity	56% RH		
Test Result:		Pass	Detector	PK		
802.11n HT40 mode, Low Channel, Horizontal						
2390	PK (dBµV/m)	49.26		$74(dB\mu V/m)$		
	AV (dBμV/m)		Limit	54(dBµV/m)		
	802.11n HT20 mode, Low Channel, Vertical					
2390	PK (dBμV/m)	45.31	T :it	74(dBμV/m)		
	AV (dBμV/m)		Limit	54(dBµV/m)		

Horizontal:

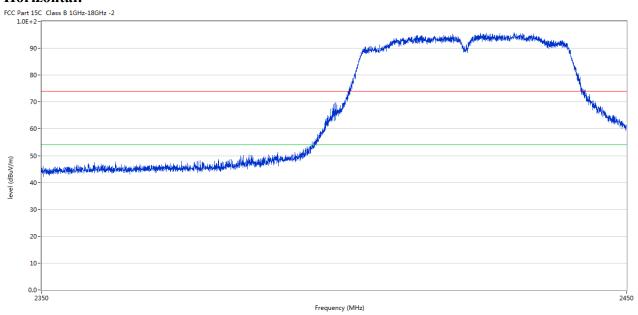


Page 80 of 93

Date: 2021-09-28

Report No.: TW2109117-01E



Vertical:

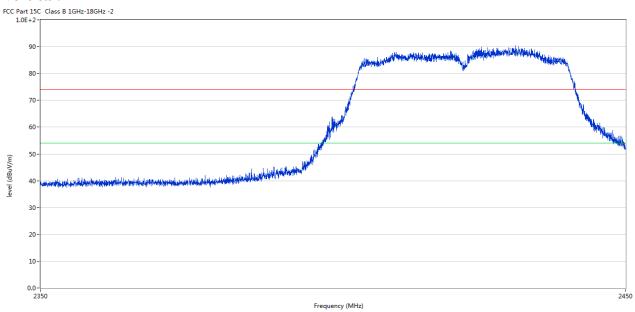

Page 81 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



10.5 Restricted band Measurement

EUT	Tablet PC		Model	W113P		
Mode	Keeping	g Transmitting	Input Voltage	120V~ DC3.7V		
Temperature	24	l deg. C,	Humidity	56% RH		
Test Result:		Pass	Detector	PK		
802.11n HT40 mode, High Channel, Horizontal						
2483.5	PK (dBμV/m)	63.66	Limit	$74(dB\mu V/m)$		
	AV (dBμV/m)	50.11	Limit	54(dBμV/m)		
802.11n HT20 mode, High Channel, Vertical						
2483.5	PK (dBμV/m)	51.67	Limit	74(dBμV/m)		
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$		

Horizontal:




Page 82 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



Vertical:

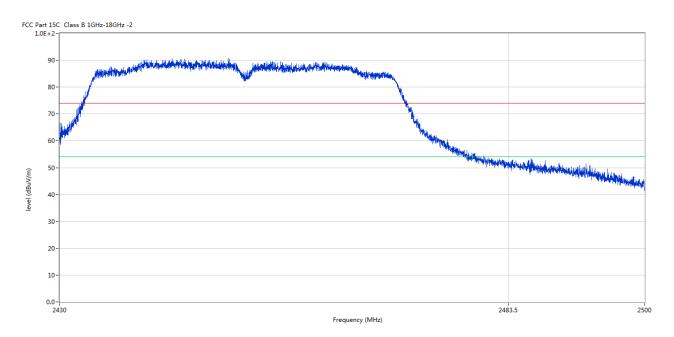

Report No.: TW2109117-01E

Date: 2021-09-28



Page 83 of 93

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

FPC antenna used. The gain of -0.77dBi.

Report No.: TW2109117-01E Page 84 of 93

Date: 2021-09-28



12.0 FCC ID Label

FCC ID: RBD-W113P

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 85 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



13.0 **Photo of testing**

Conducted Emission Test Setup:



Report No.: TW2109117-01E

Date: 2021-09-28



Radiated Emission Test Setup:





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2109117-01E

Date: 2021-09-28



Photographs - EUT

Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to


Page 88 of 93


Report No.: TW2109117-01E

Date: 2021-09-28



Outside View

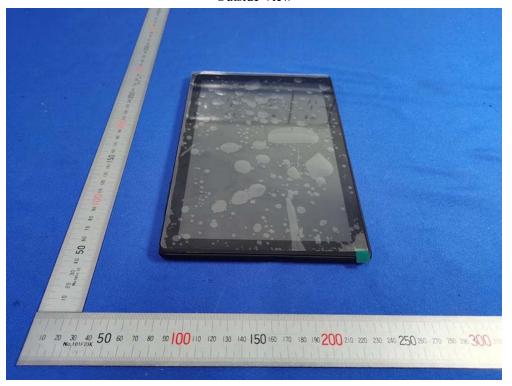

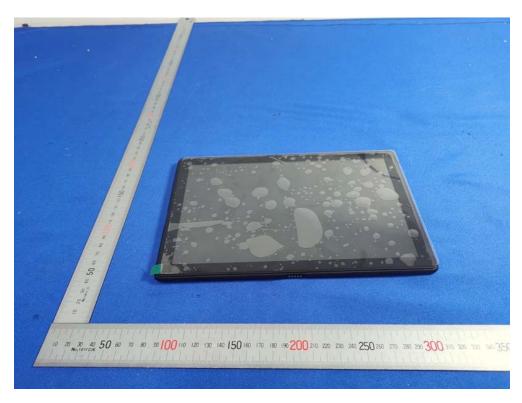

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to


Page 89 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



Outside View

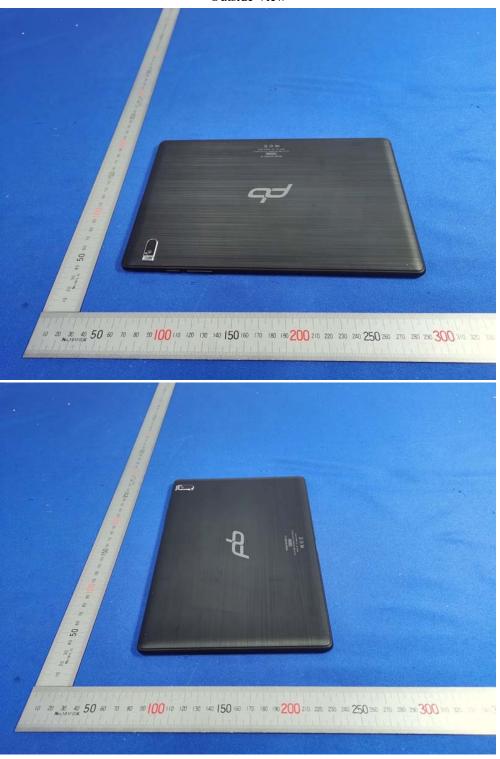

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 90 of 93 Report No.: TW2109117-01E

Date: 2021-09-28



Outside View




Page 91 of 93

Report No.: TW2109117-01E

Date: 2021-09-28



Inside view

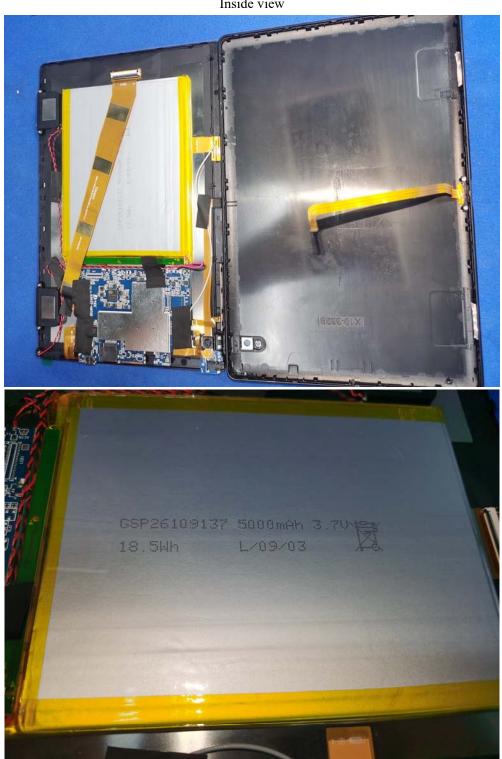

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 92 of 93


Report No.: TW2109117-01E

Date: 2021-09-28



Inside view



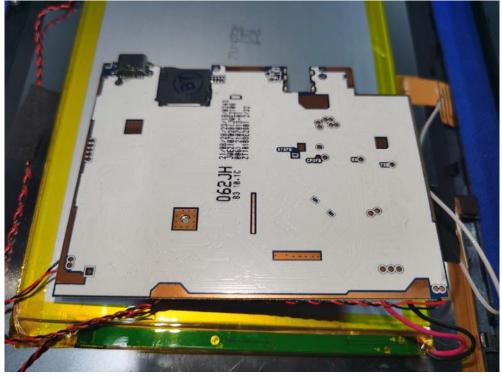

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2109117-01E Page 93 of 93

Date: 2021-09-28



Inside view

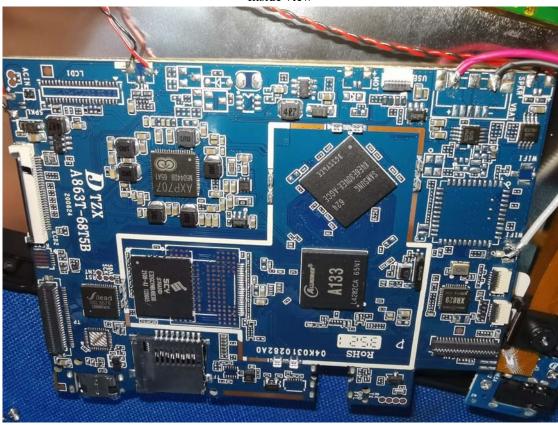

End of the report