

FCC TEST REPORT	
FCC 47 CFR Part 15C Industry Canada RSS-210 Frequency hopping systems operating within the 2400 – 2483.5 MHz band	
Report Reference No.....	G0M-1406-3919-TFC247BT-V01
Testing Laboratory	Eurofins Product Service GmbH
Address.....	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	  A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A
Applicant's name	Leica Geosystems AG
Address.....	Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND
Test specification:	
Standard	47 CFR Part 15C RSS-210, Issue 8, 2010-12 RSS-Gen, Issue 4, 2014-11 ANSI C63.4:2009
Test scope.....	complete Radio compliance test
Equipment under test (EUT):	
Product description	Field Controller Win EC7
Model No.	CS20
Additional Model(s)	None
Brand Name(s)	Leica Geosystems
Hardware version	V5.0
Firmware / Software version	None
	FCC-ID: RFD-CSNGB IC: 3177A-CSNGB
Test result	Passed

Possible test case verdicts:

- neither assessed nor tested: N/N
- required by standard but not appl. to test object.....: N/A
- required by standard but not tested.....: N/T
- not required by standard for the test object: N/R
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Test Lab Temperature.....: 20 – 23 °C

Test Lab Humidity: 32 – 38 %

Date of receipt of test item: 2015-02-25

Date (s) of performance of tests: 2014-08-06 – 2015-02-27

Compiled by: Burkhard Pudell

Tested by (+ signature).....: Burkhard Pudell
(Responsible for Test) *R. Pudell*

Approved by (+ signature): Christian Weber *C. Weber*

Date of issue: 2015-04-29

Total number of pages: 169

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Test Report No.: G0M-1406-3919-TFC247BT-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Version History

Version	Issue Date	Remarks	Revised by
01	2015-04-29	Initial Release	

REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos – Equipment External	6
1.2	Photos – Equipment internal	7
1.3	Photos – Test setup	9
1.4	Supporting Equipment Used During Testing	10
1.5	Test Modes	11
1.6	Test Equipment Used During Testing	13
1.7	Sample emission level calculation	15
2	RESULT SUMMARY	16
3	TEST CONDITIONS AND RESULTS	17
3.1	Test Conditions and Results – Occupied Bandwidth	17
3.2	Test Conditions and Results – 20 dB Bandwidth	27
3.3	Test Conditions and Results – Number of hopping frequencies	37
3.4	Test Conditions and Results – Frequency hopping channel separation	41
3.5	Test Conditions and Results – Time of occupancy (Dwell Time)	43
3.6	Test Conditions and Results – Maximum peak conducted power	45
3.7	Test Conditions and Results – AC power line conducted emissions	47
3.8	Test Conditions and Results – Band edge compliance	50
3.9	Test Conditions and Results – Conducted spurious emissions	64
3.10	Test Conditions and Results – Transmitter radiated emissions	74
3.11	Test Conditions and Results – Receiver radiated emissions	76
ANNEX A	Transmitter radiated spurious emissions	78
ANNEX B	Receiver radiated spurious emissions	162

1 Equipment (Test item) Description

Description	Field Controller Win EC7	
Model	CS20	
Additional Model(s)	None	
Brand Name(s)	Leica Geosystems	
Serial number	None	
Hardware version	V5.0	
Software / Firmware version	None	
FCC-ID	RFD-CSNGB	
IC	3177A-CSNGB	
Equipment type	End product	
Radio type	Transceiver	
Radio technology	Bluetooth	
Operating frequency range	2402 - 2480 MHz	
Assigned frequency band	2400 - 2483.5 MHz	
Main test frequencies	F _{LOW}	2402 MHz
	F _{MID}	2441 MHz
	F _{HIGH}	2480 MHz
Spreading	FHSS	
Modulations	GFSK, PI/4-DQPSK, 8-PSK	
Number of channels	79 hopping channels at all	
Channel spacing	1 MHz	
Number of antennas	1	
Antenna	Type	integrated
	Model	W3008c
	Manufacturer	Pulse
	Gain	+2.2 dBi (manufacturer declaration)
Manufacturer	Leica Geosystems AG Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND	
Power supply	V _{NOM}	11.1V DC
AC/DC-Adaptor	Model	AEL40US15
	Vendor	XP Power
	Input	100 - 240 V AC
	Output	15 V DC

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
SIM	CBT	R&S	EF00358	Bluetooth-Tester
*Note: Use the following abbreviations: AE : Auxiliary/Associated Equipment, or SIM : Simulator (Not Subjected to Test) CABL : Connecting cables				

1.5 Test Modes

Mode #	Description	
DH5-Sngl	General conditions:	EUT powered by laboratory power supply.
	Radio conditions:	Mode = standalone transmit Spreading = Hopping stopped (single hopping channel) Modulation = GFSK Packet type = DH5 Data rate = 1 Mbps Duty cycle = 77 % Power level = Maximum
2DH5-Sngl	General conditions:	EUT powered by laboratory power supply.
	Radio conditions:	Mode = standalone transmit Spreading = Hopping stopped (single hopping channel) Modulation = $\pi/4$ -DQPSK Packet type = 2DH5 Data rate = 2 Mbps Duty cycle = 77 % Power level = Maximum
3DH5-Sngl	General conditions:	EUT powered by laboratory power supply.
	Radio conditions:	Mode = standalone transmit Spreading = Hopping stopped (single hopping channel) Modulation = 8-DPSK Packet type = 3DH5 Data rate = 3 Mbps Duty cycle = 77 % Power level = Maximum
DH5-Hop	General conditions:	EUT powered by laboratory power supply.
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Modulation = GFSK Packet type = DH5 Data rate = 1 Mbps Duty cycle = 77 % Power level = Maximum

2DH5-Hop	General conditions:	EUT powered by laboratory power supply.
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Modulation = $\pi/4$ -DQPSK Packet type = 2DH5 Data rate = 2 Mbps Duty cycle = 77 % Power level = Maximum
3DH5-Hop	General conditions:	EUT powered by laboratory power supply.
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Modulation = 8-DPSK Packet type = 3DH5 Data rate = 3 Mbps Duty cycle = 77 % Power level = Maximum
Receive	General conditions:	EUT powered by laboratory power supply.
	Radio conditions:	Mode = standalone receive Spreading = Hopping
AC-Powerline	General conditions:	EUT powered by commercial AC/DC-Adapter
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Power level = Maximum

1.6 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

Occupied Bandwidth					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSIQ26	EF00242	2014-03	2015-03

20dB Bandwidth					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Number of hopping frequencies					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Time of occupancy					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Maximum peak conducted power					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Band edge compliance					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Conducted spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Radiated spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 1	EF00062	-	-
Spectrum Analyzer	R&S	FSIQ26	EF00242	2014-03	2015-03
Biconical Antenna	R&S	HK 116	EF00186	2014-02	2016-02
LPD Antenna	R&S	HL 223	EF00202	2014-02	2016-02
LPD Antenna	R&S	HL 025	EF00014	2014-01	2016-01

AC powerline conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2014-11	2016-11
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15C, IC RSS-210				
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks
RSS-Gen 6.6	Occupied Bandwidth	RSS-Gen 6.6	N/R	Informational only
FCC § 15.247(a)(1) IC RSS-210 § A8.1	20 dB Bandwidth	Public notice DA 00-705	PASS	
FCC § 15.247(a)(1)(iii) IC RSS-210 § A8.1	Number of hopping frequencies	Public notice DA 00-705	PASS	
FCC § 15.247(a)(1) IC RSS-210 § A8.1	Frequency hopping channel separation	Public notice DA 00-705	PASS	
FCC § 15.247(a)(1)(iii) IC RSS-210 § A8.1	Time of occupancy (Dwell time)	Public notice DA 00-705	PASS	
FCC § 15.247(b)(1) IC RSS-210 § A8.4	Maximum peak conducted power	Public notice DA 00-705	PASS	
47 CFR 15.207 RSS-Gen 8.8	AC power line conducted emissions	ANSI C63.4	PASS	
FCC § 15.247(d) IC RSS-210 § A8.5	Band edge compliance	Public notice DA 00-705	PASS	
FCC § 15.247(d) IC RSS-210 § A8.5	Conducted spurious emissions	Public notice DA 00-705	PASS	
FCC § 15.247(d) FCC § 15.209 IC RSS-210 A8.5 IC RSS-Gen 6.13	Transmitter radiated spurious emissions	Public notice DA 00-705 / ANSI C 63.4	PASS	
IC RSS-Gen 7.1	Receiver radiated spurious emissions	ANSI C 63.4	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Occupied Bandwidth


Occupied Bandwidth acc. to IC RSS-Gen			Verdict: PASS
Test according to measurement reference	Reference Method		
	RSS-Gen 6.6		
Test frequency range	Tested frequencies		
	F _{LOW} / F _{MID} / F _{HIGH}		
Limits			
None (Informational only)			
Test setup			
Spectrum Analyzer EUT			
Test procedure			
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to at least twice the emission spectrum 3. Resolution bandwidth set to 1 % of span 4. Occupied Bandwidth (99 %) measurement with spectrum analyzer built in measurement function			
Test results			
Channel	Frequency [MHz]	Mode	Occupied Bandwidth [kHz]
F _{LOW}	2402	DH5-Sngl	951.904
F _{MID}	2441	DH5-Sngl	951.904
F _{HIGH}	2480	DH5-Sngl	941.884
F _{LOW}	2402	2DH5-Sngl	1252.505
F _{MID}	2441	2DH5-Sngl	1262.525
F _{HIGH}	2480	2DH5-Sngl	1242.485
F _{LOW}	2402	3DH5-Sngl	1252.505
F _{MID}	2441	3DH5-Sngl	1242.485
F _{HIGH}	2480	3DH5-Sngl	1262.525
Comments:			

Occupied Bandwidth – DH5-Sngl F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: Tx, BT-BR, CH: 0, 2402 MHz, DH5
Test Date: 2015-02-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 951.904 kHz

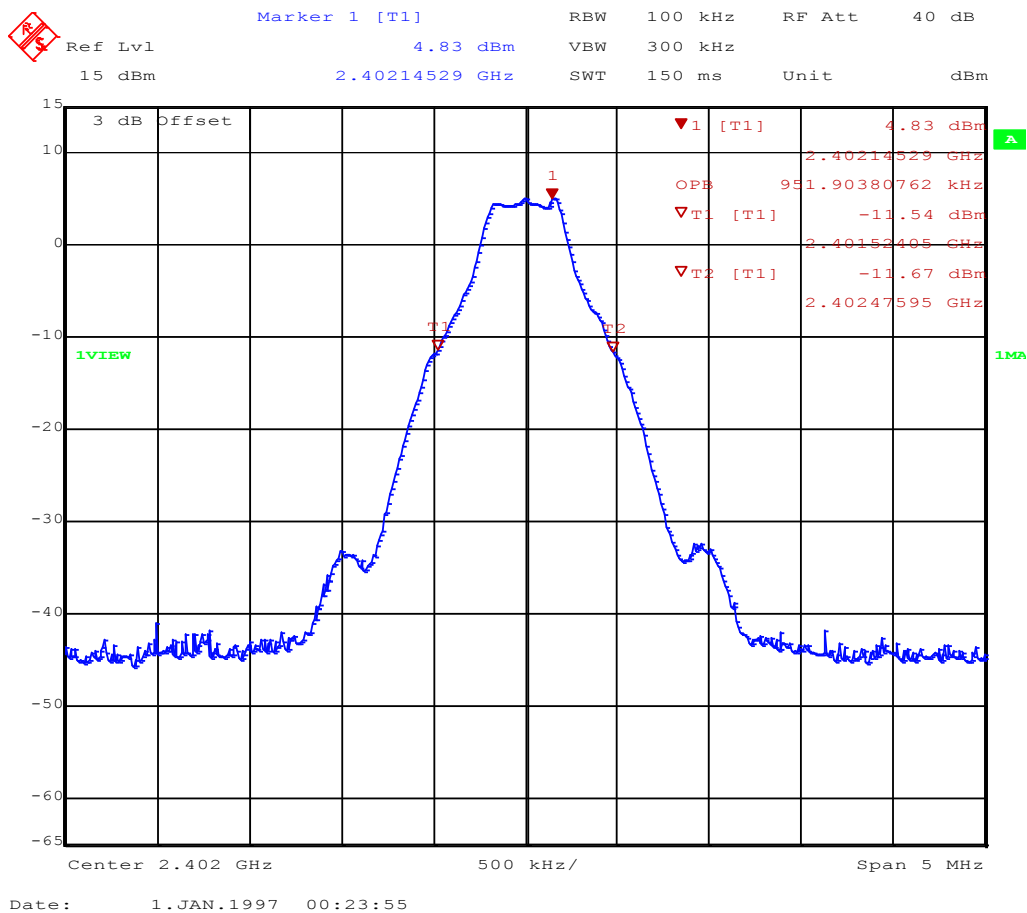

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – DH5-Sngl F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: Tx, BT-BR, CH: 39, 2441 MHz, DH5
Test Date: 2015-02-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 951.904 kHz

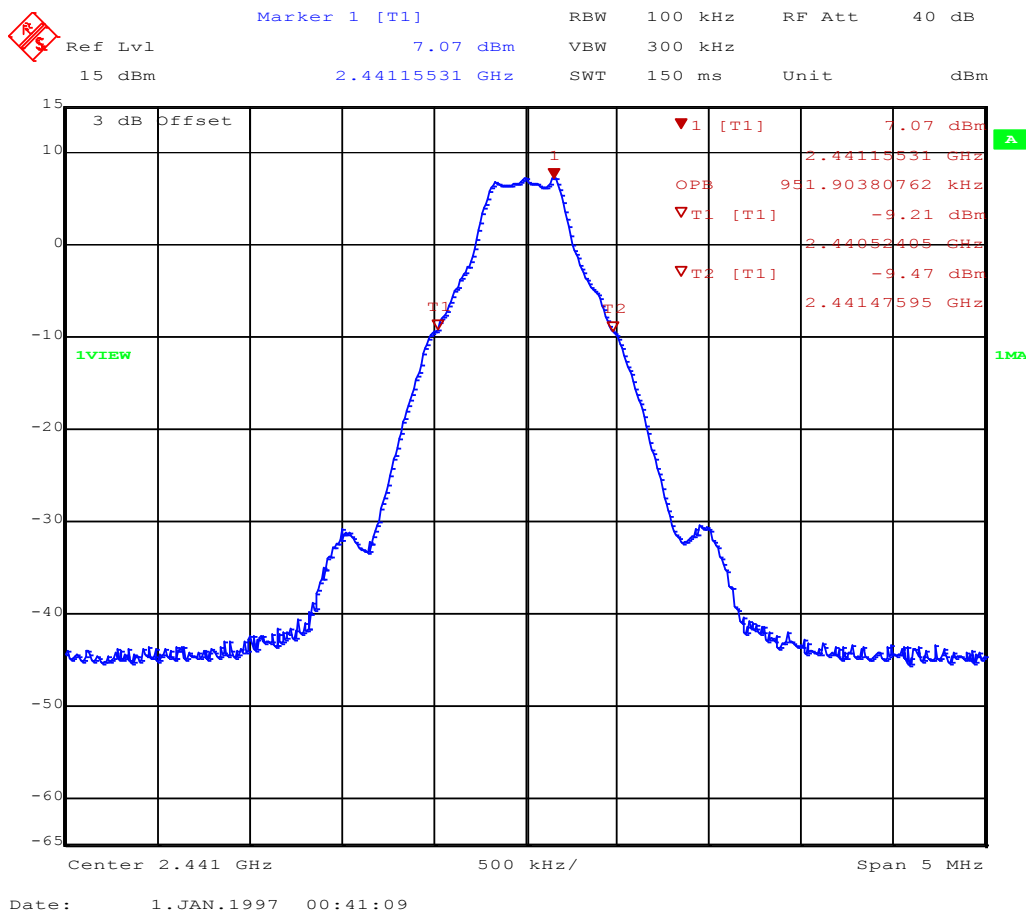


Occupied Bandwidth – DH5-Sngl F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: Tx, BT-BR, CH: 78, 2480 MHz, DH5
Test Date: 2015-02-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 941.884 kHz

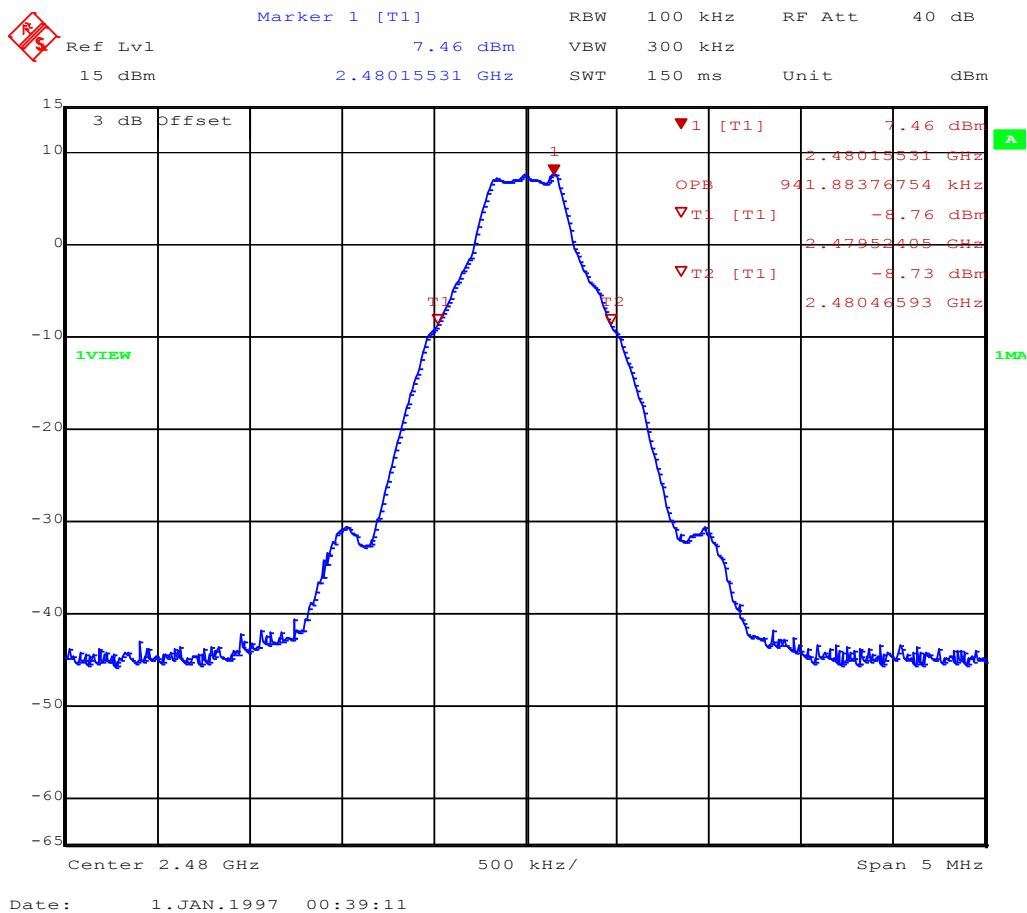


Occupied Bandwidth – 2-DH5-Sngl F_{LOW}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: Tx, BT-EDR, CH: 0, 2402 MHz, 2-DH5
Test Date: 2015-02-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 1252.505 kHz

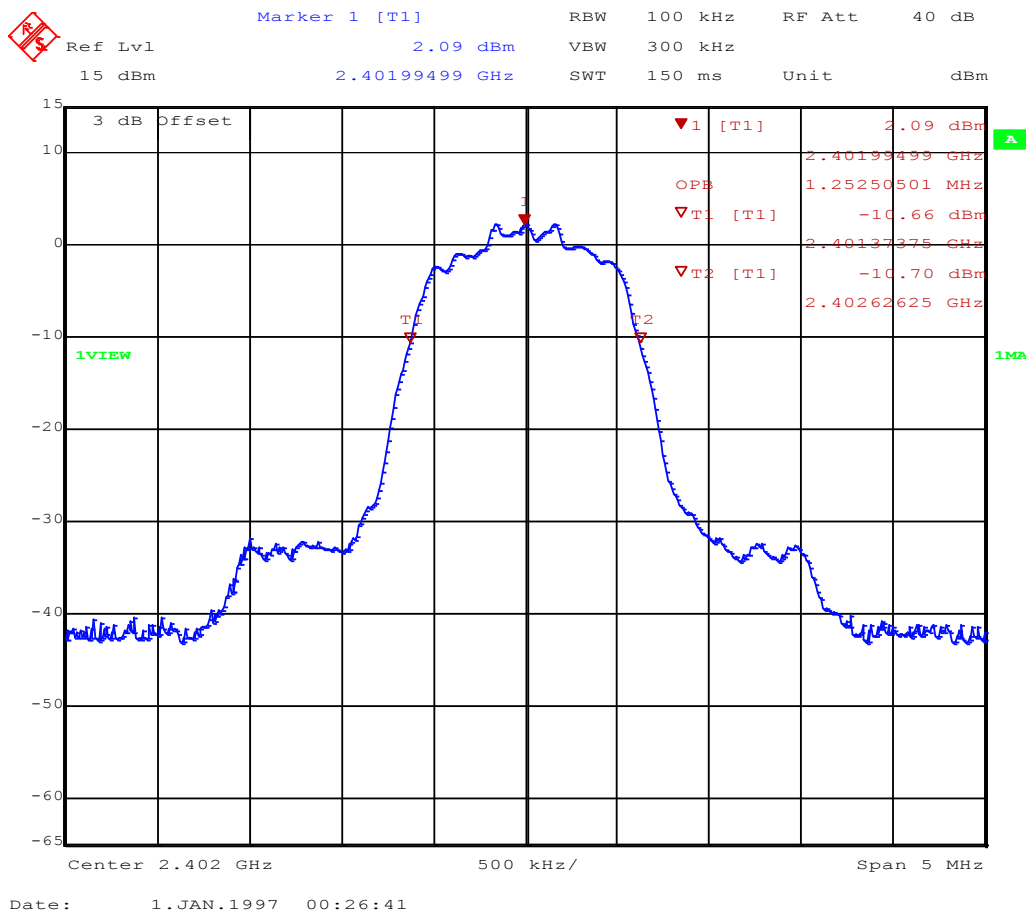

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – 2-DH5-Sngl F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: Tx, BT-EDR, CH: 39, 2441 MHz, 2-DH5
Test Date: 2015-02-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW= 1242.485 kHz

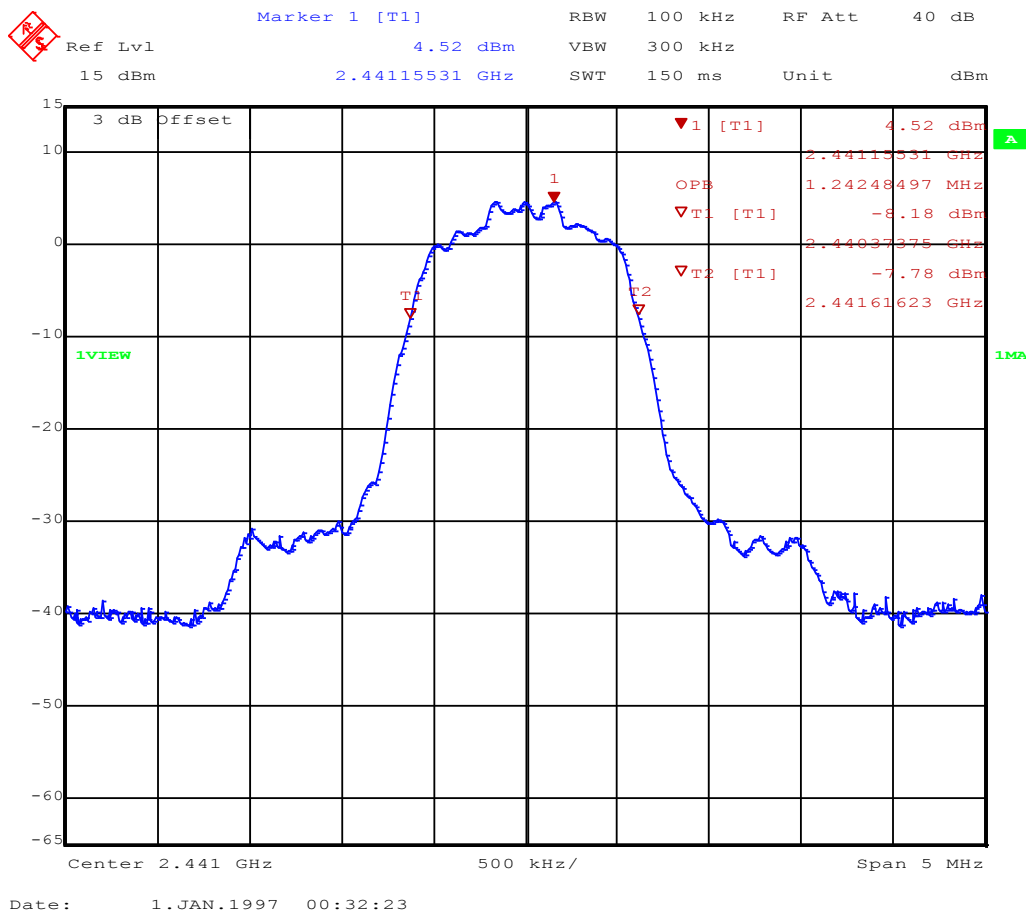

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – 2-DH5-Sngl F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Burkhard Pudell
Test Conditions:	Tnom / Vnom
Mode:	Tx, BT-EDR, CH: 78, 2480 MHz, 2-DH5
Test Date:	2015-02-27
Verdict:	NONE (INFORMATION ONLY)
Note 1:	A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2:	OBW= 1242.485 kHz

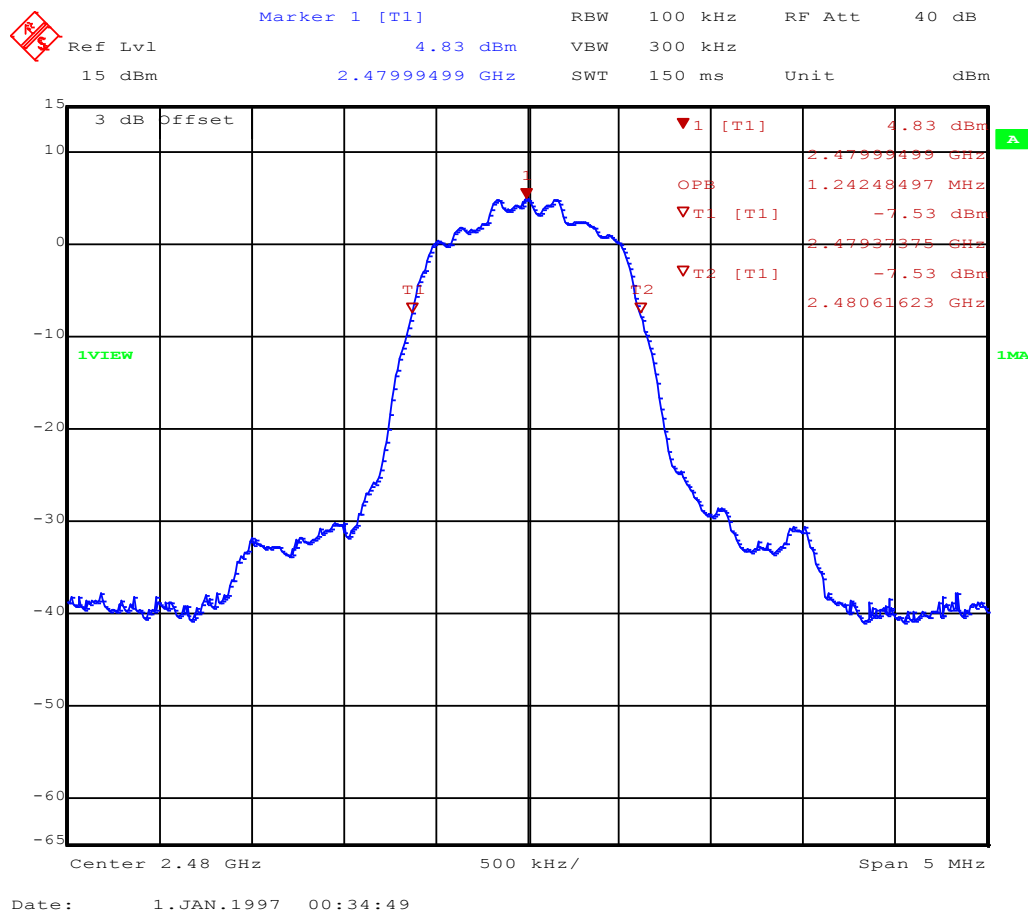

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – 3-DH5-Sngl F_{LOW}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: Tx, BT-EDR, CH: 0, 2402 MHz, 3-DH5
Test Date: 2015-02-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW= 1262.525 kHz

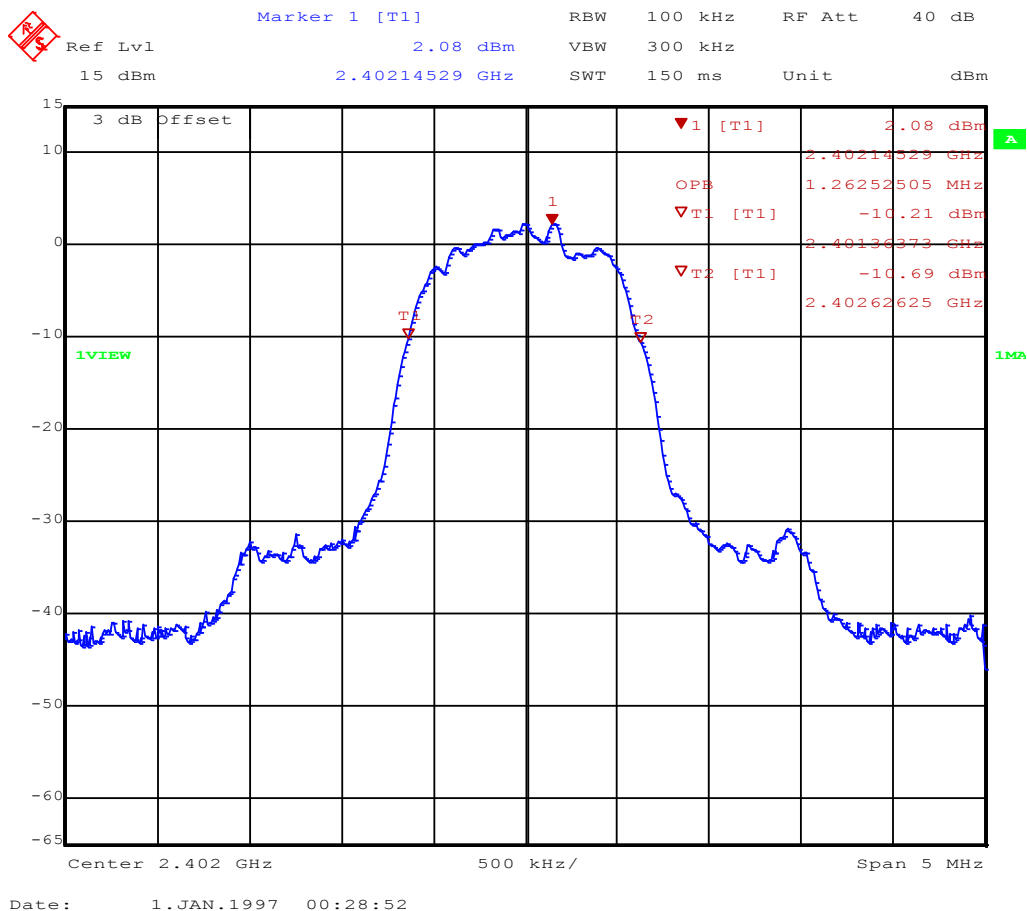

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – 3-DH5-Sngl F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: Tx, BT-EDR, CH: 39, 2441 MHz, 3-DH5
Test Date: 2015-02-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW= 1252.505 kHz

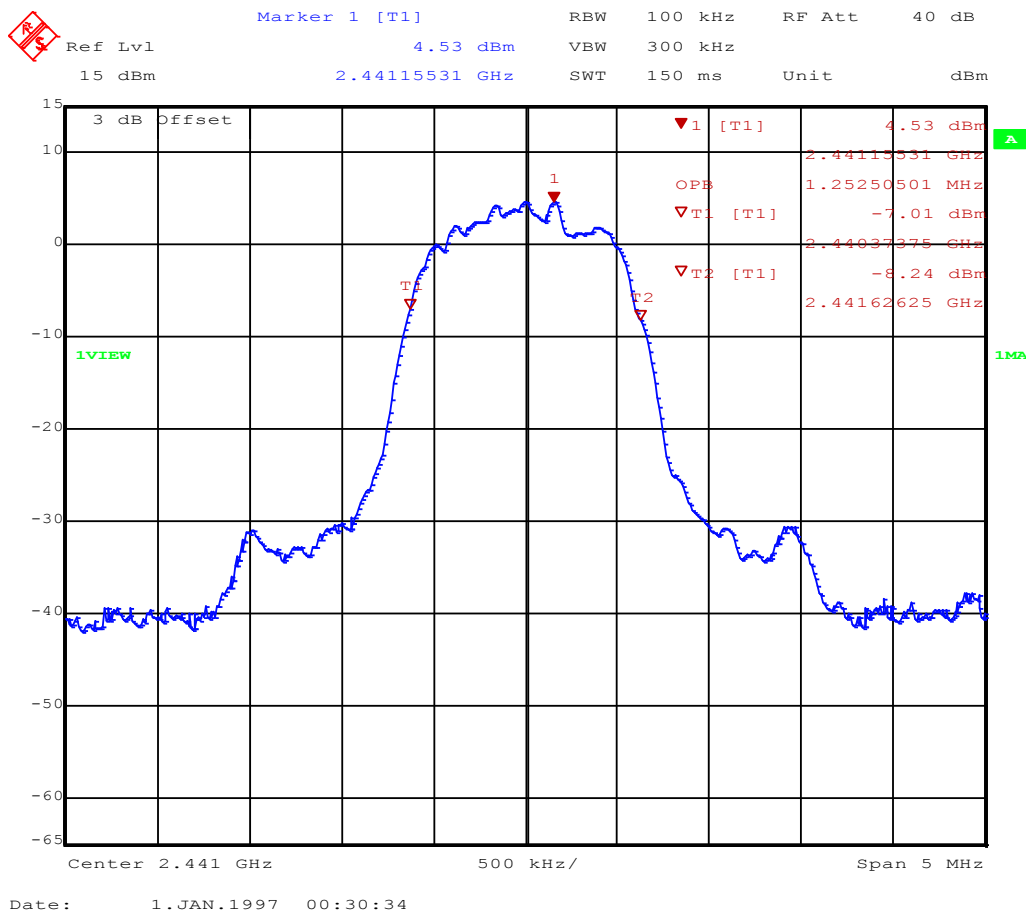

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – 3-DH5-Sngl F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: Tx, BT-EDR, CH: 78, 2480 MHz, 3-DH5
Test Date: 2015-02-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW= 1262.525 kHz

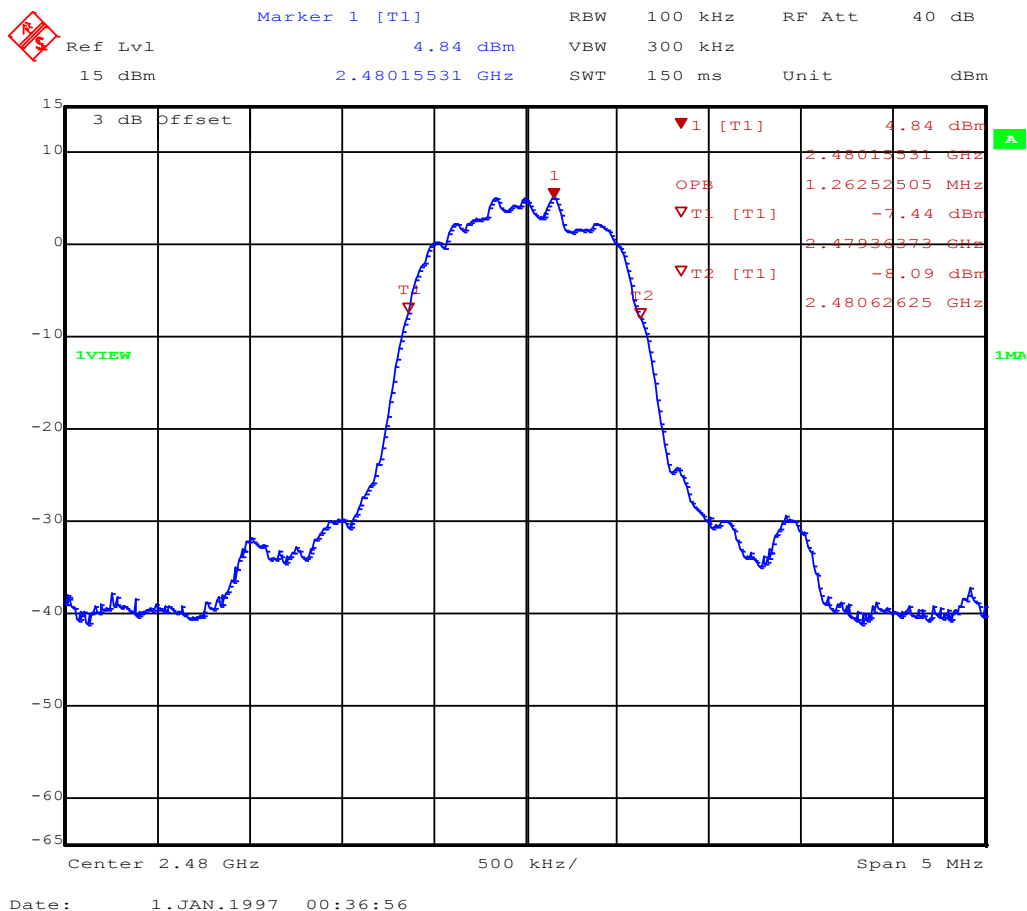

Test Report No.: G0M-1406-3919-TFC247BT-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.2 Test Conditions and Results – 20 dB Bandwidth

20 dB Bandwidth acc. to FCC 15.247 / IC RSS-210				Verdict: PASS	
EUT requirement rule parts and clause	Reference				
	FCC 15.247(a)(1) / IC RSS-210 A8.1				
Test according to measurement reference	Reference Method				
	FCC Public Notice DA 00-705				
Test frequency range	Tested frequencies				
	F _{LOW} / F _{MID} / F _{HIGH}				
Limits					
Limit		Condition			
1.5 · Carrier spacing		Output power ≤ 125 mW / 21 dBm			
1.0 · Carrier spacing		125 mW / 21 dBm < Output power ≤ 1 W / 30 dBm			
Test setup					
Spectrum Analyzer EUT					
Test procedure					
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to at least twice the emission spectrum 3. Detector set to peak and max hold 4. Envelope peak value of emission spectrum is selected 5. Marker on envelope of spectrum is set to level of -20 dB to the left of the peak 6. Marker on envelope of spectrum is set to level of -20 dB to the right of the peak 7. 20dB Bandwidth is determined by marker frequency separation					
Test results					
Channel	Frequency [MHz]	Mode	20 dB Bandwidth [MHz]	Limit [MHz]	Result
F _{LOW}	2402	DH5-Sngl	0.9262	1.5	PASS
F _{MID}	2441	DH5-Sngl	0.9262	1.5	PASS
F _{HIGH}	2480	DH5-Sngl	0.9262	1.5	PASS
F _{LOW}	2402	2DH5-Sngl	1322.2	1.5	PASS
F _{MID}	2441	2DH5-Sngl	1326.6	1.5	PASS
F _{HIGH}	2480	2DH5-Sngl	1322.2	1.5	PASS
F _{LOW}	2402	3DH5-Sngl	1322.2	1.5	PASS
F _{MID}	2441	3DH5-Sngl	1326.6	1.5	PASS
F _{HIGH}	2480	3DH5-Sngl	1326.6	1.5	PASS
Comments:					

20 dB Bandwidth – DH5-Sngl F_{LOW}


20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BT, DH5, 2402 MHz, modulated
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: FCC part 15 section 247 (a)



*RBW 10 kHz Delta 1 [T1]
 *VBW 10 kHz -0.02 dB
 Ref 15 dBm Att 40 dB SWT 45 ms 926.20000000 kHz

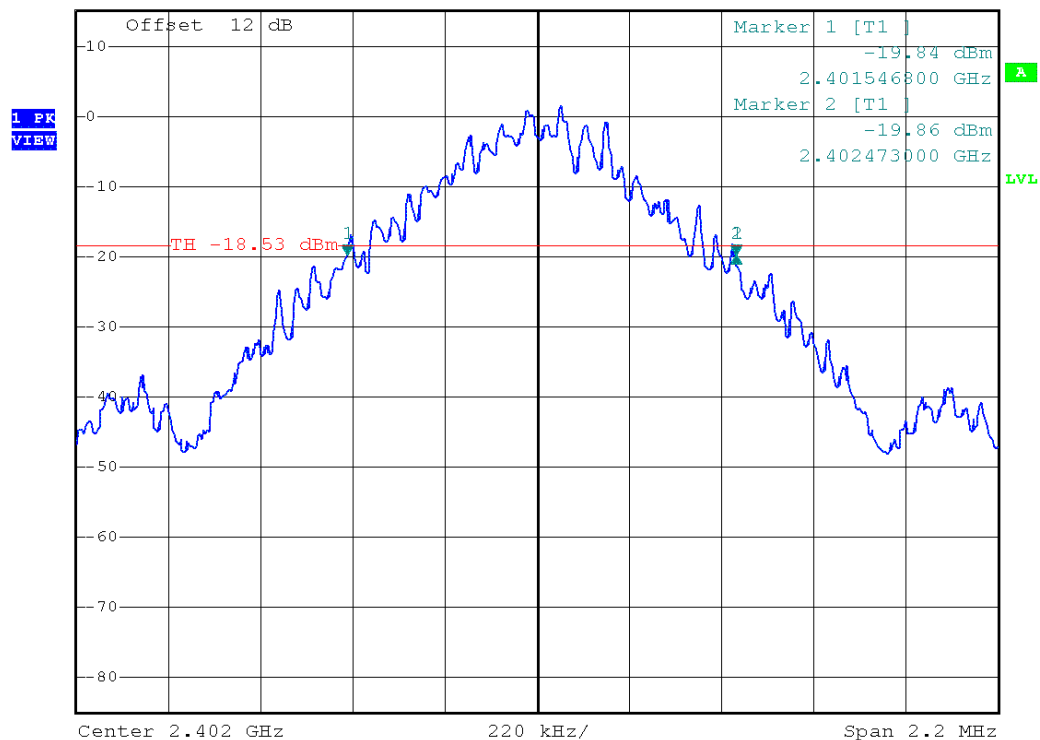

Date: 26.JAN.2015 09:24:53

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

20 dB Bandwidth – DH5-Sngl F_{MID}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BT, DH5, 2441 MHz, modulated
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: FCC part 15 section 247 (a)

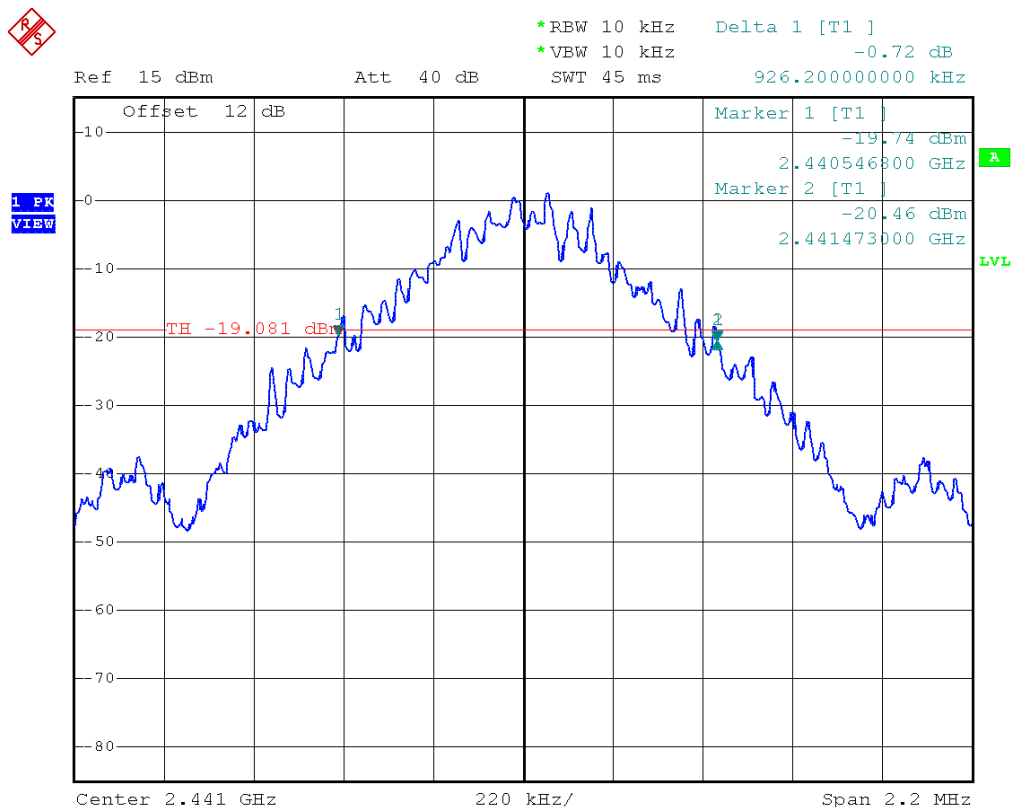

Comment: 20 dB bandwidth: 926.2 KHz
 Date: 26.JAN.2015 09:26:23

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

20 dB Bandwidth – DH5-Sngl F_{HIGH}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BT, DH5, 2480 MHz, modulated
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: FCC part 15 section 247 (a)

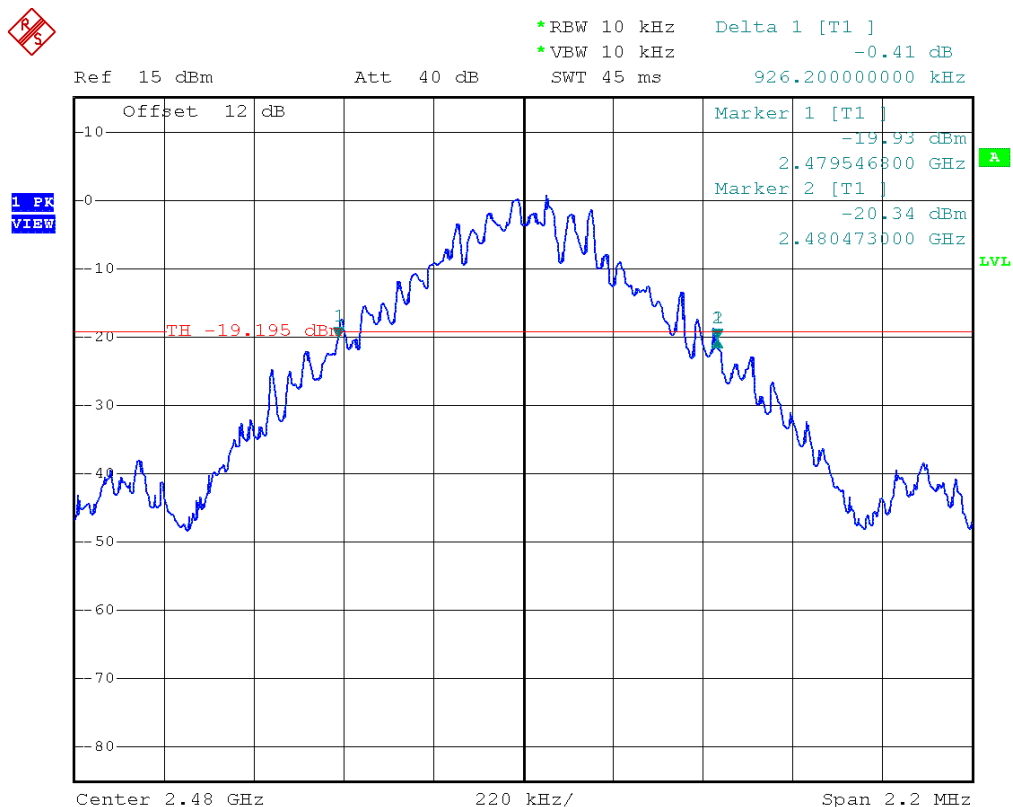

Comment: 20 dB bandwidth: 926.2 KHz
 Date: 26.JAN.2015 09:27:26

Test Report No.: G0M-1406-3919-TFC247BT-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

20 dB Bandwidth – 2-DH5-Sngl F_{Low}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BT, 2-DH5, 2402 MHz, modulated
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: FCC part 15 section 247 (a)



Comment: 20 dB bandwidth: 1322.2 KHz
 Date: 26.JAN.2015 09:28:48

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

20 dB Bandwidth – 2-DH5-Sngl F_{MID}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, BT, 2-DH5, 2441 MHz, modulated
Test Date: 2015-01-26
Verdict: NONE (INFORMATION ONLY)
Note 1: FCC part 15 section 247 (a)

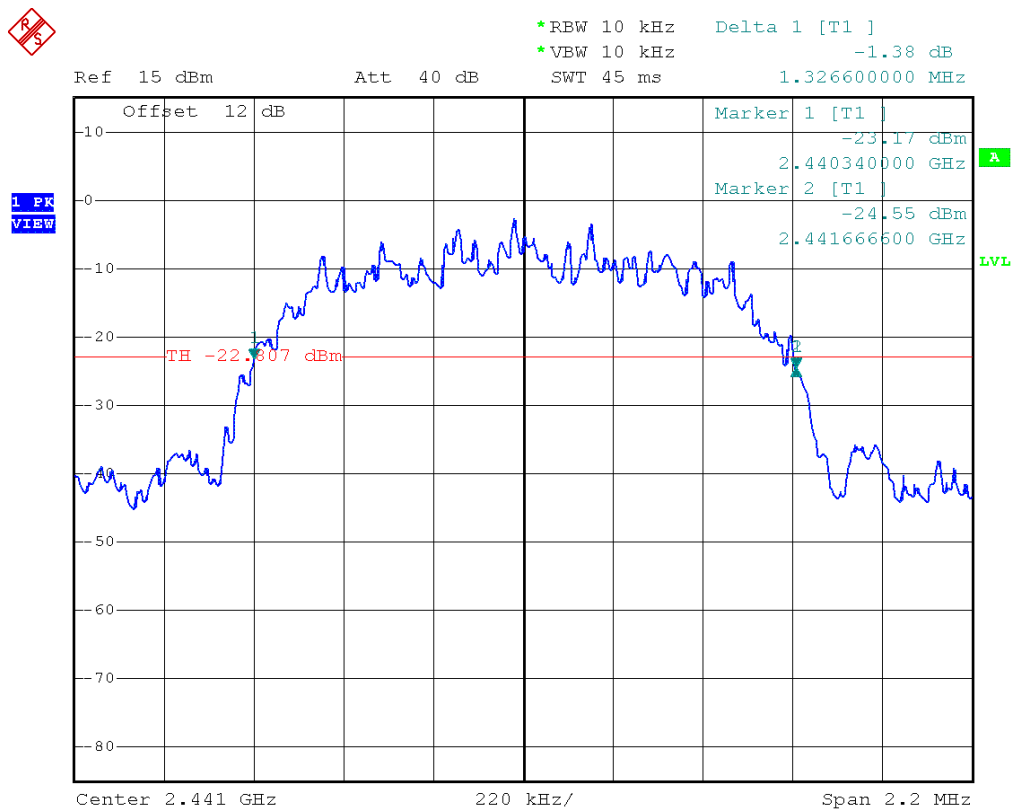

Comment: 20 dB bandwidth: 1326.6 KHz
Date: 26.JAN.2015 09:29:56

Test Report No.: G0M-1406-3919-TFC247BT-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

20 dB Bandwidth – 2-DH5-Sngl F_{HIGH}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, BT, 2-DH5, 2480 MHz, modulated
Test Date: 2015-01-26
Verdict: NONE (INFORMATION ONLY)
Note 1: FCC part 15 section 247 (a)



Comment: 20 dB bandwidth: 1322.2 KHz
Date: 26.JAN.2015 09:31:12

20 dB Bandwidth – 3-DH5-Sngl F_{Low}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BT, 3-DH5, 2402 MHz, modulated
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: FCC part 15 section 247 (a)



Comment: 20 dB bandwidth: 1322.2 KHz
 Date: 26.JAN.2015 09:32:33

Test Report No.: G0M-1406-3919-TFC247BT-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

20 dB Bandwidth – 3-DH5-Sngl F_{MID}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, BT, 3-DH5, 2441 MHz, modulated
Test Date: 2015-01-26
Verdict: NONE (INFORMATION ONLY)
Note 1: FCC part 15 section 247 (a)



Comment: 20 dB bandwidth: 1326.6 KHz
Date: 26.JAN.2015 09:33:37

Test Report No.: G0M-1406-3919-TFC247BT-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

20 dB Bandwidth – 3-DH5-Sngl F_{HIGH}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BT, 3-DH5, 2480 MHz, modulated
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: FCC part 15 section 247 (a)



Comment: 20 dB bandwidth: 1326.6 KHz
 Date: 26.JAN.2015 09:34:54

Test Report No.: G0M-1406-3919-TFC247BT-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.3 Test Conditions and Results – Number of hopping frequencies


Number of hopping frequencies acc. to FCC 15.247 / IC RSS-210		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.247(a)(1)(iii) / IC RSS-210 A8.1	
Test according to measurement reference	Reference Method	
	FCC Public Notice DA 00-705	
Test frequency range	Tested frequencies	
	F _{LOW} - F _{HIGH}	
EUT test mode	DH5-Hop	
Limits		
Limit	Condition	
Number of hopping channels ≥ 15	Output power ≤ 125 mW / 21 dBm	
Number of hopping channels ≥ 75	125 mW / 21 dBm < Output power ≤ 1 W / 30 dBm	
Test setup		
Spectrum Analyzer EUT		
Test procedure		
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to measurement frequency range 3. Detector set to peak and max hold 4. Resolution bandwidth is set small enough to resolve hopping channel emission spectra 5. The number of peaks is counted to determine number of hopping frequencies		
Test results		
Number of hopping frequencies	Limit	Result
79	≥ 15	PASS
Comments:		

Number of hopping frequencies - Range A

Number of Hopping Frequencies acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, DH5, hopping mode
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: Number of Hopping Frequencies (DA 00-705 Meas Guidance)
 Note 2: conducted measurement, channel 0-24

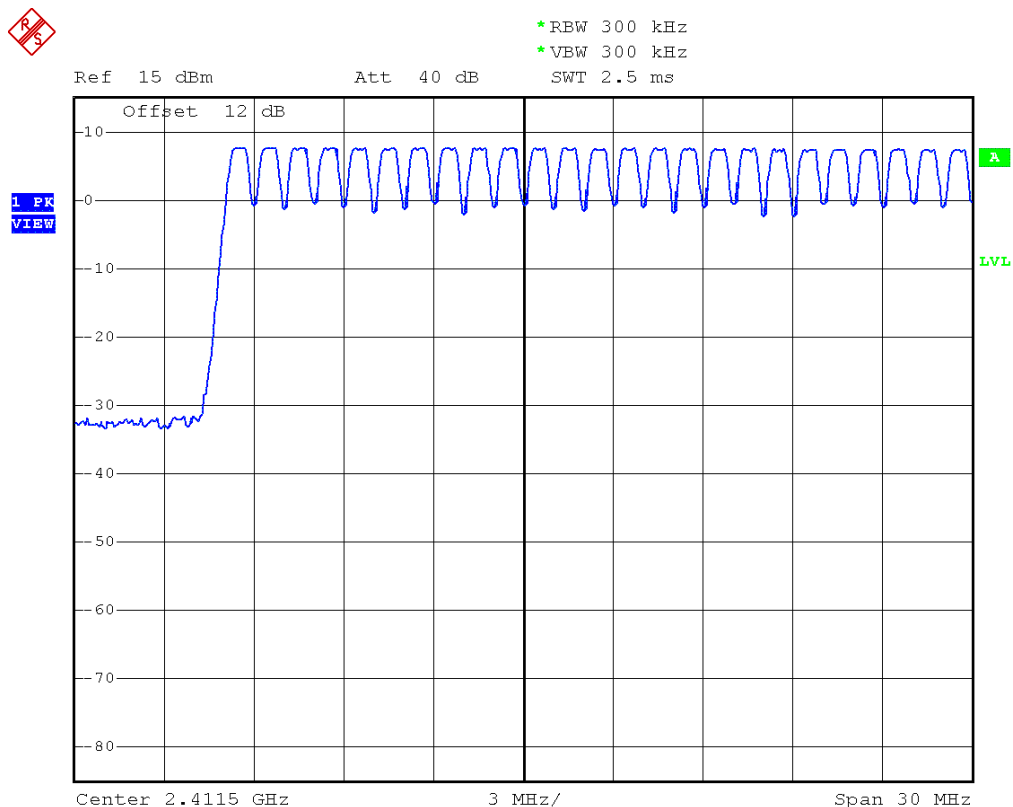


Comment: Number of hopping frequencies
 Date: 26.JAN.2015 09:41:18

Number of hopping frequencies - Range B

Number of Hopping Frequencies acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, DH5, hopping mode
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: Number of Hopping Frequencies (DA 00-705 Meas Guidance)
 Note 2: conducted measurement, channel 25-53

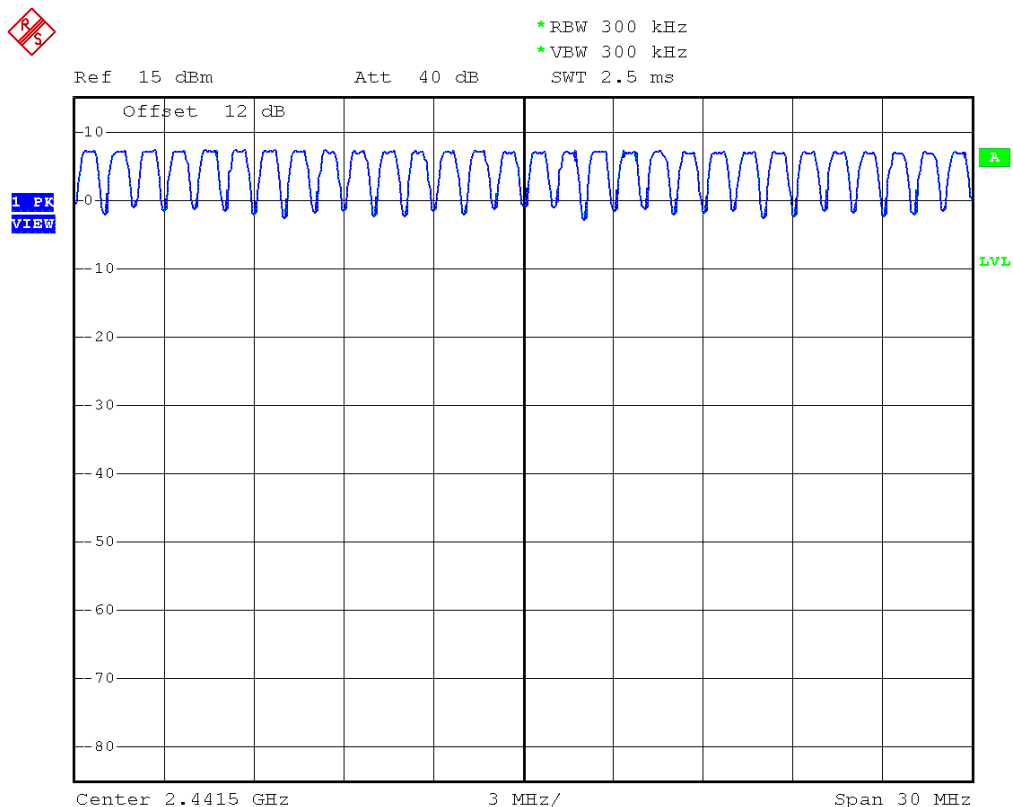

Comment: Number of hopping frequencies
 Date: 26.JAN.2015 09:43:09

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Number of hopping frequencies - Range C

Number of Hopping Frequencies acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, DH5, hopping mode
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: Number of Hopping Frequencies (DA 00-705 Meas Guidance)
 Note 2: conducted measurement, channel 55-78

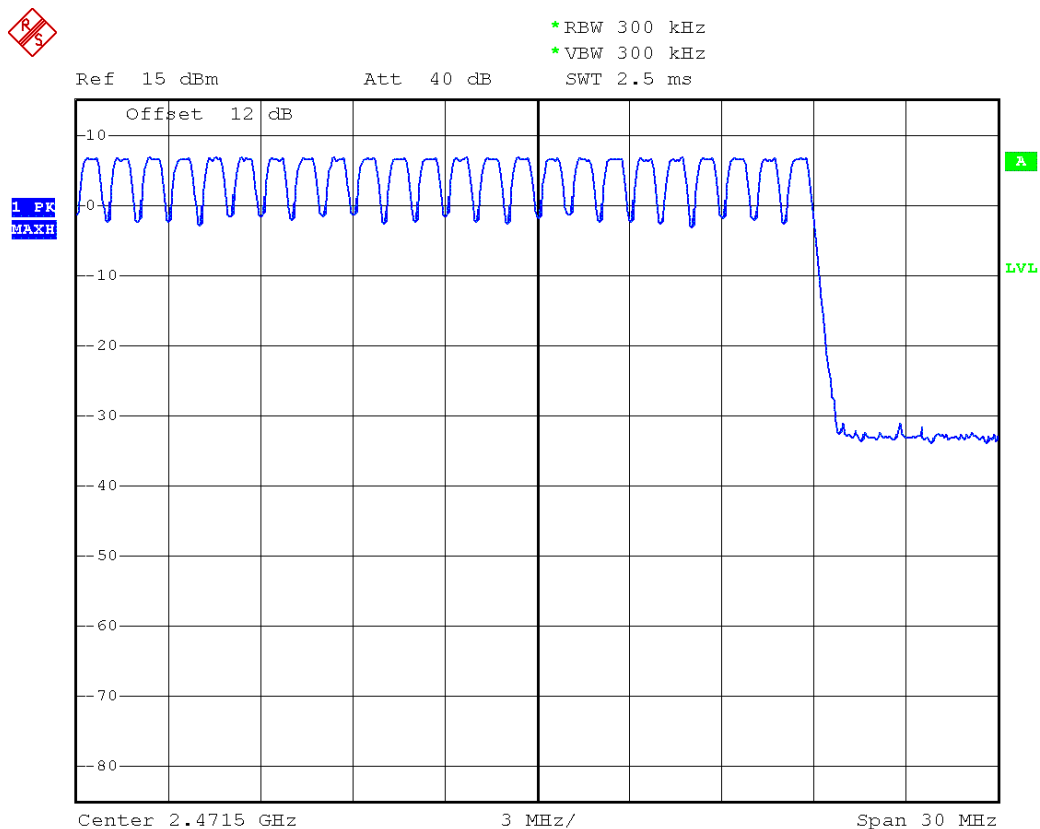

Date: 26.JAN.2015 14:44:11

Test Report No.: G0M-1406-3919-TFC247BT-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.4 Test Conditions and Results – Frequency hopping channel separation


Frequency hopping channel separation acc. to FCC 15.247 / IC RSS-210		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.247(a)(1) / IC RSS-210 A8.1	
Test according to measurement reference	Reference Method	
	FCC Public Notice DA 00-705	
Test frequency range	Tested frequencies	
	2441 & 2442 MHz	
EUT test mode	DH5-Hop	
Limits		
Limit	Condition	
≥ 25 kHz or ⅔ of 20 dB bandwidth	Output power ≤ 125 mW / 21 dBm	
≥ 25 kHz or 20 dB bandwidth	125 mW / 21 dBm < Output power ≤ 1 W / 30 dBm	
Test setup		
Spectrum Analyzer EUT		
Test procedure		
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to measurement frequency range 3. Detector set to peak and max hold 4. Resolution bandwidth is set small enough to resolve hopping channel emission spectra 5. The two adjacent channel peaks are marked 6. Channel separation is determined from frequency separation of markers		
Test results		
Channel separation [kHz]	Limit [kHz]	Result
998.0	≥ ⅔ · 926.6 = 617.73	PASS
Comments:		

Frequency hopping channel separation

Carrier Frequency Separation acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, DH5, hopping mode
Test Date: 2015-01-26
Verdict: NONE (INFORMATION ONLY)
Note 1: Carrier Frequency Separation (DA 00-705 Meas Guidance)
Note 2: conducted measurement

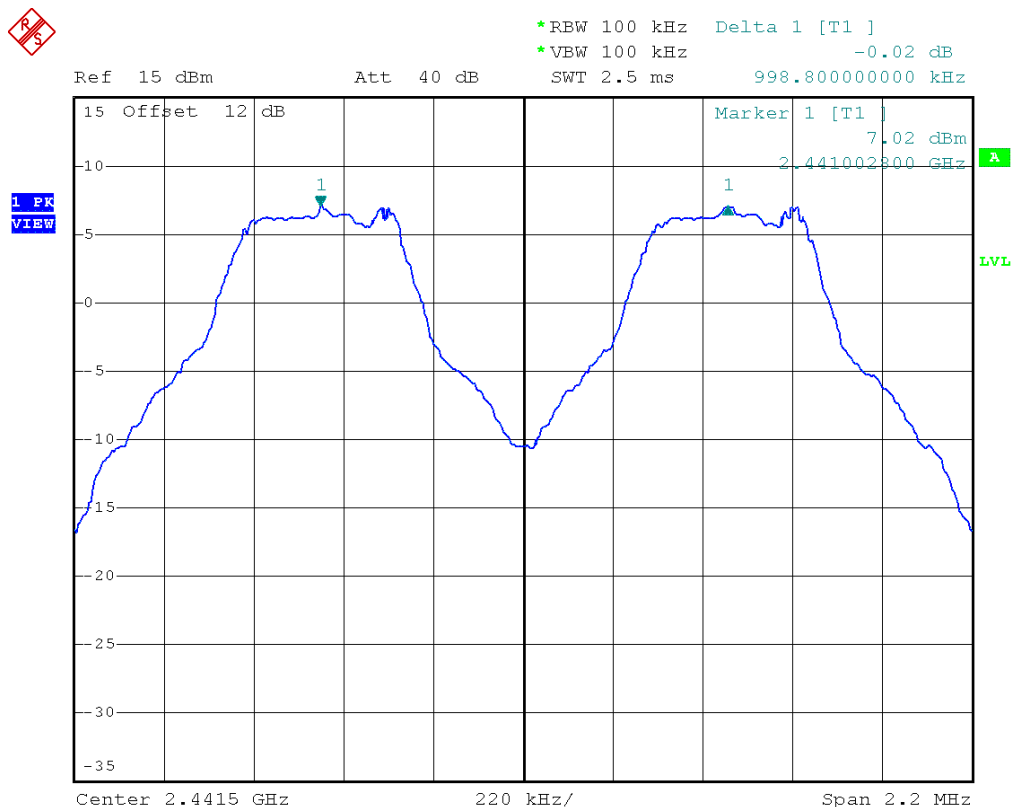

Comment: Limit: > two-thirds of the 20 dB bandwidth ; Result: Pass
Date: 26.JAN.2015 10:08:14

Test Report No.: G0M-1406-3919-TFC247BT-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.5 Test Conditions and Results – Time of occupancy (Dwell Time)


Time of occupancy (Dwell time) acc. to FCC 15.247 / IC RSS-210				Verdict: PASS	
EUT requirement rule parts and clause		Reference			
		FCC 15.247(a)(1)(iii) / IC RSS-210 A8.1			
Test according to measurement reference		Reference Method			
		FCC Public Notice DA 00-705			
Test frequency range		Tested frequencies			
		2441 MHz			
EUT test mode		DH5-Hop			
Limits					
Limit					
Time of occupancy ≤ 0.4 s within 0.4 s · Number of hopping channels					
Test setup					
Spectrum Analyzer EUT					
Test procedure					
1. EUT set to test mode (Communication tester is used if needed) 2. Center frequency set to test channel center frequency 3. Span set to zero span and detector to peak and max hold 4. Resolution bandwidth is set to 100kHz and sweep time to observation period 5. Time of occupancy determined from number of peaks multiplied by single hop dwell time					
Test results					
Observation period [s]	No. of hops	Dwell time/hop [s]	Time of occupancy [s]	Limit [s]	Result
31.6	91	0.0028992	93.9	≤ 0.4	PASS
Comments:					

Time of occupancy

Time of Occupancy acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, DH5, channel 2442MHz, hopping mode
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: 91 events * 2.8992 ms; Result: 93.9 ms Limit < 0.4 s
 Note 2: conducted measurement, (DA 00-705 Meas Guidance)

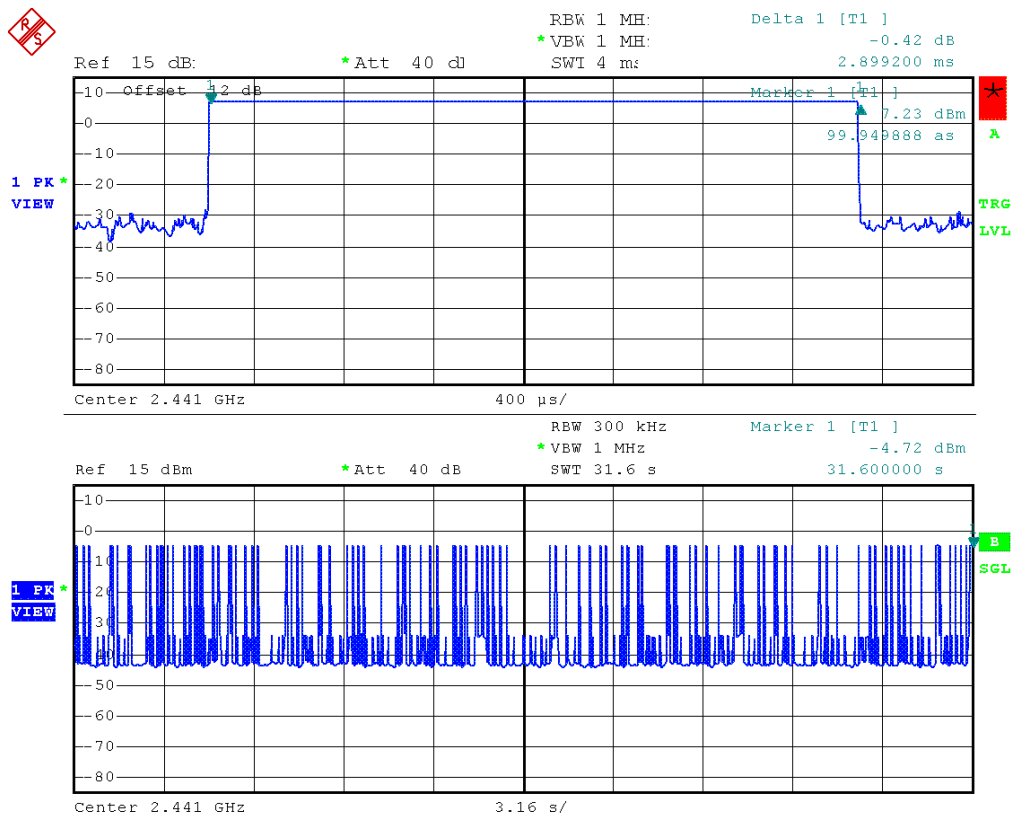

Comment: Burst length=2.8992 ms
 Date: 26.JAN.2015 10:05:20

3.6 Test Conditions and Results – Maximum peak conducted power

Maximum peak conducted power acc. to FCC 15.247 / IC RSS-210		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.247(b)(1) / IC RSS-210 A8.4	
Test according to measurement reference	Reference Method	
	FCC Public Notice DA 00-705	
Test frequency range	Tested frequencies	
	F _{LOW} / F _{MID} / F _{HIGH}	
Measurement mode	Peak	
Maximum antenna gain	2.2 dBi ⇒ Limit correction = 0 dB	
Limits		
Limit	Condition	
1 W (30 dBm)	Number of hopping channels ≥ 75	
0.125 W (21 dBm)	75 > Number of hopping channels ≥ 15	
The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.		
Test setup		
Spectrum Analyzer EUT		
Test procedure		
1. EUT set to test mode (Communication tester is used if needed) 2. Center frequency set to test channel center frequency 3. Span set to twice the 20 dB bandwidth and detector to peak and max hold 4. Resolution bandwidth is set to 3 MHz 5. Peak conducted power is determined from peak of spectrum envelope		

Test results								
Channel	Frequency [MHz]	Voltage	Mode	Peak power [dbm]	Peak power [W]	Limit [dBm]	Margin [dB]	Result
F _{LOW}	2402	11.1V DC	DH5-Sngl	7.5	0.006	30	-22.50	PASS
F _{MID}	2441	11.1V DC	DH5-Sngl	7.2	0.005	30	-22.80	PASS
F _{HIGH}	2480	11.1V DC	DH5-Sngl	7.0	0.005	30	-23.00	PASS
F _{LOW}	2402	11.1V DC	2DH5-Sngl	7.7	0.006	30	-22.30	PASS
F _{MID}	2441	11.1V DC	2DH5-Sngl	7.4	0.005	30	-22.60	PASS
F _{HIGH}	2480	11.1V DC	2DH5-Sngl	7.3	0.005	30	-22.70	PASS
F _{LOW}	2402	11.1V DC	3DH5-Sngl	8.2	0.007	30	-21.80	PASS
F _{MID}	2441	11.1V DC	3DH5-Sngl	7.9	0.006	30	-22.10	PASS
F _{HIGH}	2480	11.1V DC	3DH5-Sngl	7.8	0.006	30	-22.20	PASS
Comments:								

3.7 Test Conditions and Results – AC power line conducted emissions

Power line conducted emissions acc. to FCC 47 CFR 15.207 / IC RSS-Gen				Verdict: PASS	
Test according referenced standards		Reference Method			
		ANSI C63.4			
Fully configured sample scanned over the following frequency range		Frequency range			
		0.15 MHz to 30 MHz			
Points of Application		Application Interface			
AC Mains		LISN			
EUT test mode		AC-Powerline			
Limits and results					
Frequency [MHz]	Quasi-Peak [dBμV]	Result	Average [dBμV]	Result	
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS	
0.5 to 5	56	PASS	46	PASS	
5 to 30	60	PASS	50	PASS	
Comments:					
* Limit decreases linearly with the logarithm of the frequency.					


Conducted Emissions

EMI voltage test in the ac-mains according to FCC Part 15b

Project number: G0M-1406-3919

Manufacturer: Leica Geosystems AG
 EUT Name: Feld- Controller
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 25°C, Unom: 10.8VDC via AC/DC Adapter
 LISN: ESH2-Z5 N
 Mode: Basic, with power supply, WLAN link to AP, BT link to GPS Antenna
 Test Date: 2014-08-06
 Note:

Index 13

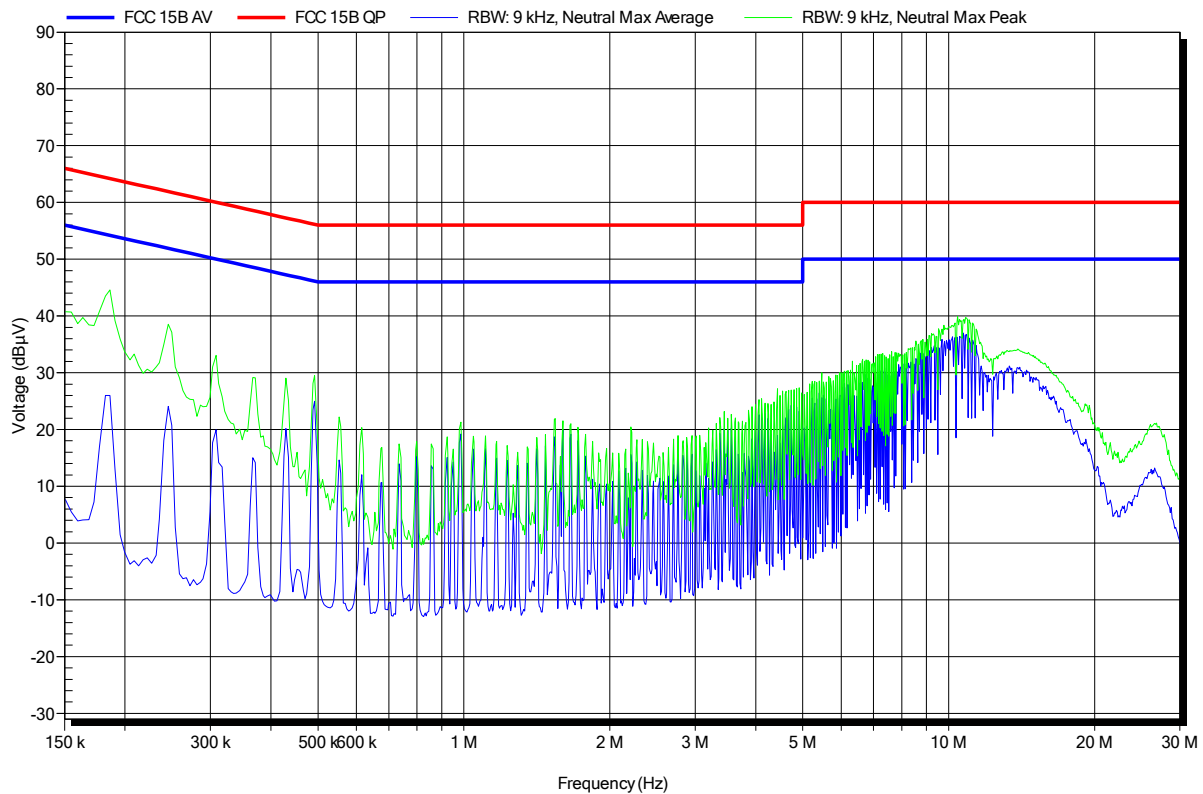


Conducted Emissions

EMI voltage test in the ac-mains according to FCC Part 15b

Project number: G0M-1406-3919

Manufacturer: Leica Geosystems AG
 EUT Name: Feld- Controller
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 25°C, Unom: 10.8VDC via AC/DC Adapter
 LISN: ESH2-Z5 L
 Mode: Basic, with power supply, WLAN link to AP, BT link to GPS Antenna
 Test Date: 2014-08-06
 Note:

Index 14

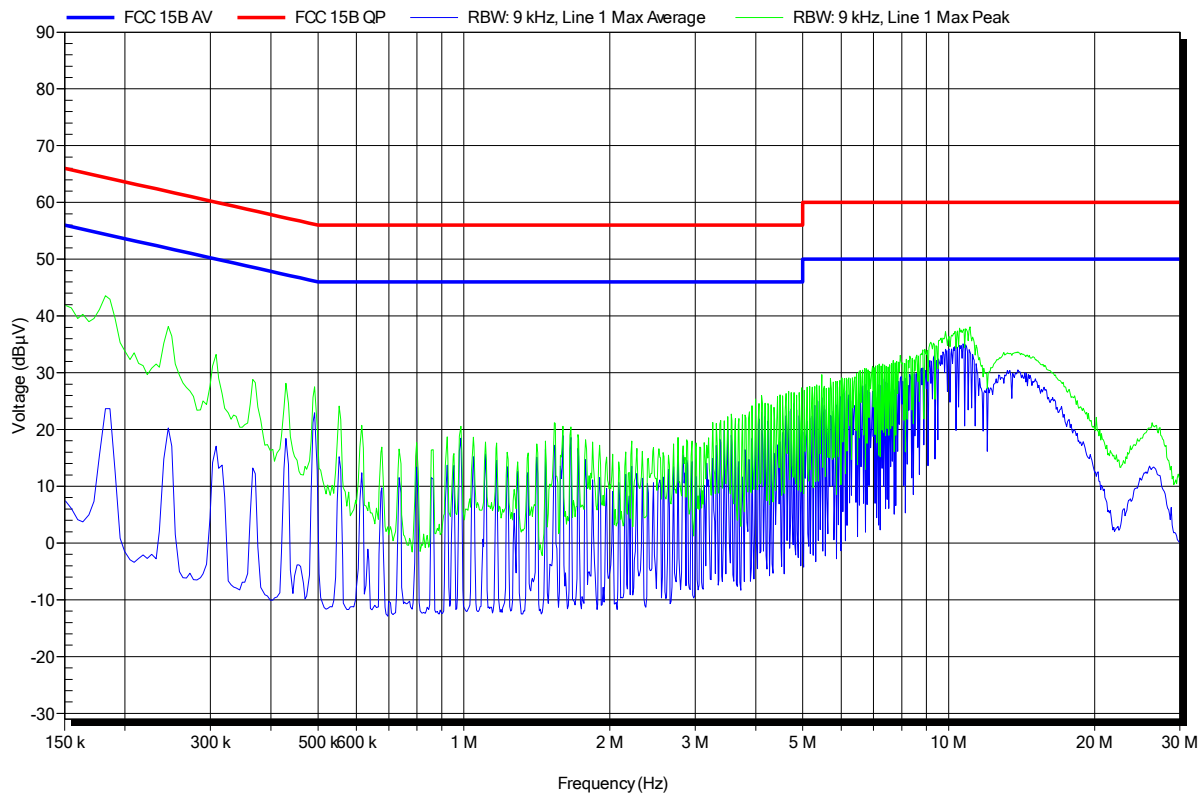

3.8 Test Conditions and Results – Band edge compliance


Band-edge compliance acc. to FCC 15.247 / IC RSS-210					Verdict: PASS	
EUT requirement rule parts and clause			Reference			
			FCC 15.247(d) / IC RSS-210 A8.5			
Test according to measurement reference			Reference Method			
			FCC Public Notice DA 00-705			
Test frequency range			Tested frequencies			
			F _{LOW} / F _{HIGH}			
Measurement mode			Peak			
Limits						
Limit				Condition		
≤ -20 dB/100 kHz				Peak power measurement detector = Peak		
≤ -30 dB/100 kHz				Peak power measurement detector = RMS		
Test setup						
Spectrum Analyzer EUT						
Test procedure						
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference						
Test results						
Channel	Frequency [MHz]	Mode	Level [dBc]	Limit [dBc]	Margin [dB]	Result
F _{LOW}	2402	DH5-Sngl	-44.87	-20	-24.87	PASS
F _{HIGH}	2480	DH5-Sngl	-44.73	-20	-24.73	PASS
F _{LOW}	2402	DH5-Hop	-43.80	-20	-23.80	PASS
F _{HIGH}	2480	DH5-Hop	-42.62	-20	-22.62	PASS
F _{LOW}	2402	2DH5-Sngl	-42.58	-20	-22.58	PASS
F _{HIGH}	2480	2DH5-Sngl	-40.54	-20	-20.54	PASS
F _{LOW}	2402	2DH5-Hop	-42.04	-20	-22.04	PASS
F _{HIGH}	2480	2DH5-Hop	-41.41	-20	-21.41	PASS

F _{LOW}	2402	3DH5-Sngl	-42.70	-20	-22.70	PASS
F _{HIGH}	2480	3DH5-Sngl	-41.36	-20	-21.36	PASS
F _{LOW}	2402	3DH5-Hop	-40.90	-20	-20.90	PASS
F _{HIGH}	2480	3DH5-Hop	-39.80	-20	-19.80	PASS
Comments:						

Band-edge compliance – DH5-Sngl F_{Low}
Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, DH5, 2402 MHz, single frequency
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: 20 dB down method (DA 00-705 Meas Guidance)
 Note 2: lower Band-edge, conducted measurement

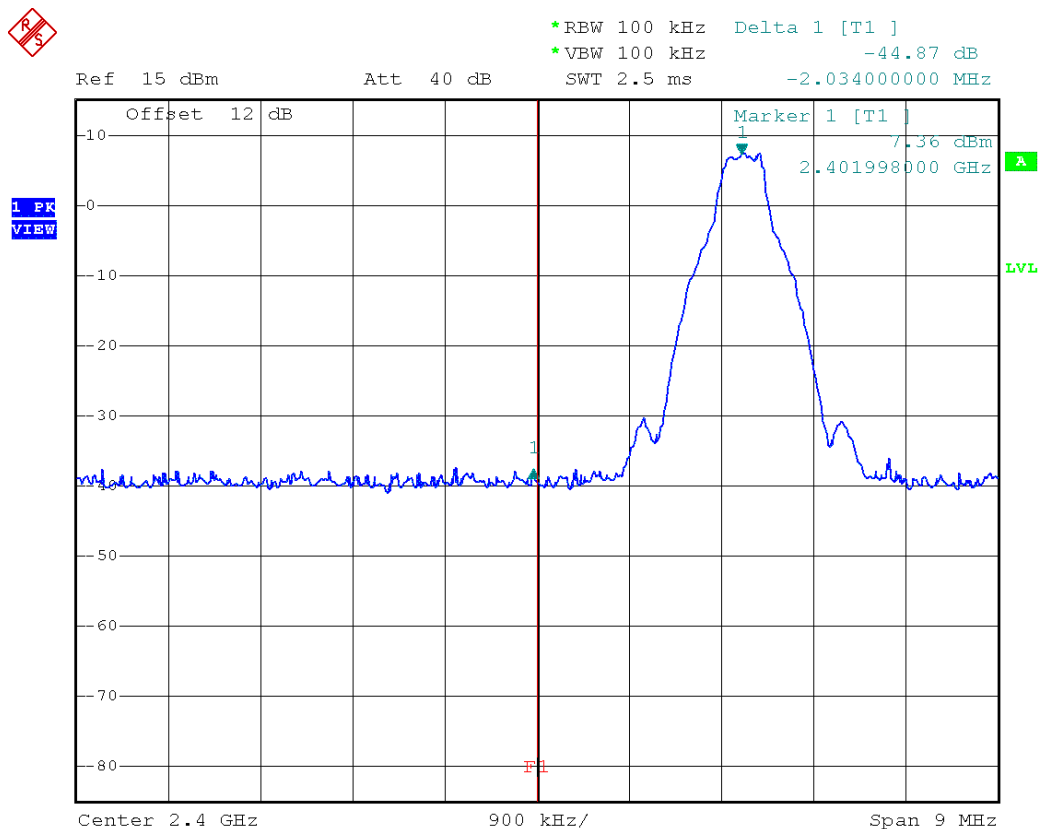

Date: 26.JAN.2015 10:20:39


Test Report No.: G0M-1406-3919-TFC247BT-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Band-edge compliance – DH5-Sngl F_{HIGH}
Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, DH5, 2480 MHz, single frequency
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: 20 dB down method (DA 00-705 Meas Guidance)
 Note 2: upper Band-edge, conducted measurement

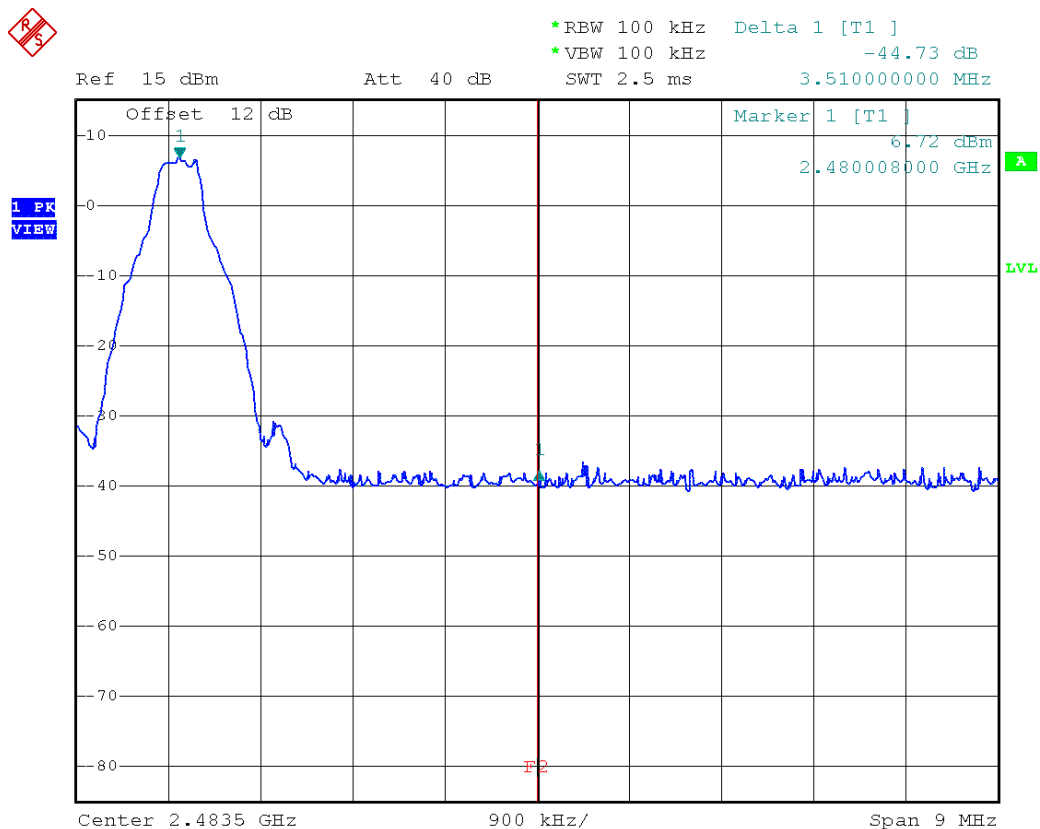

Date: 26.JAN.2015 10:22:28

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Band-edge compliance – DH5-Hop F_{Low}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, DH5, hopping mode
Test Date: 2015-01-26
Verdict: NONE (INFORMATION ONLY)
Note 1: 20 dB down method (DA 00-705 Meas Guidance)
Note 2: lower Band-edge, conducted measurement

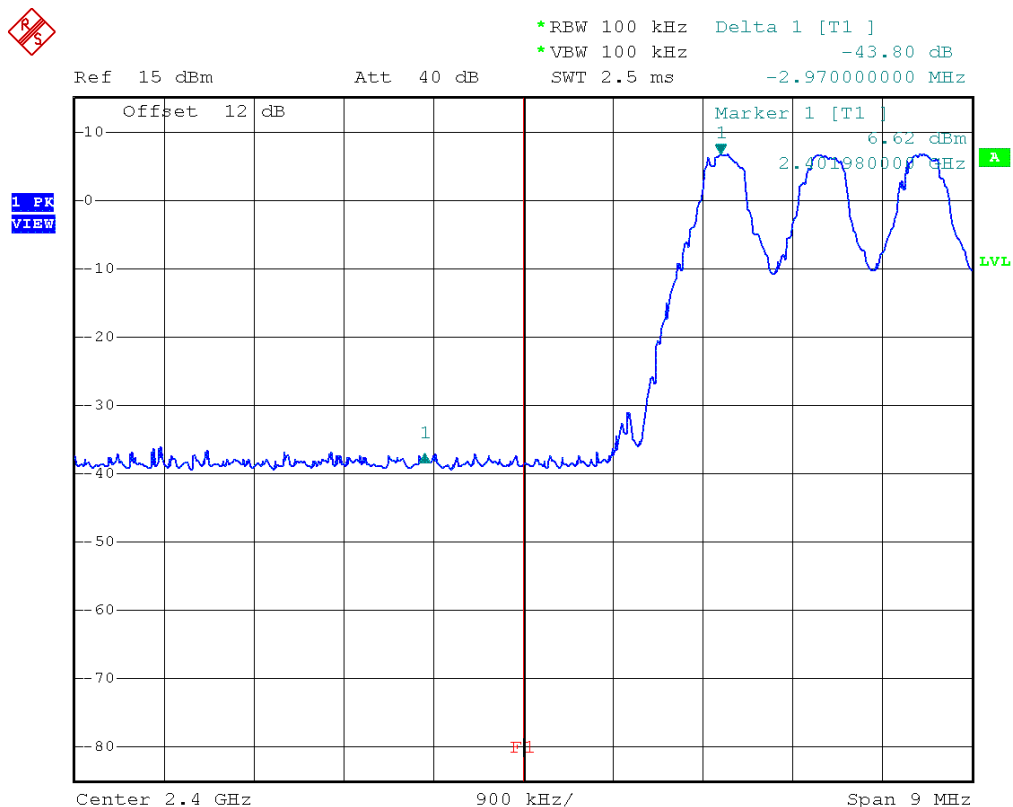

Comment: Limit: Marker Delta value >20 dB; Result: PASS
Date: 26.JAN.2015 10:33:32

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Band-edge compliance – DH5-Hop F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, DH5, hopping mode
Test Date: 2015-01-26
Verdict: NONE (INFORMATION ONLY)
Note 1: 20 dB down method (DA 00-705 Meas Guidance)
Note 2: upper Band-edge, conducted measurement

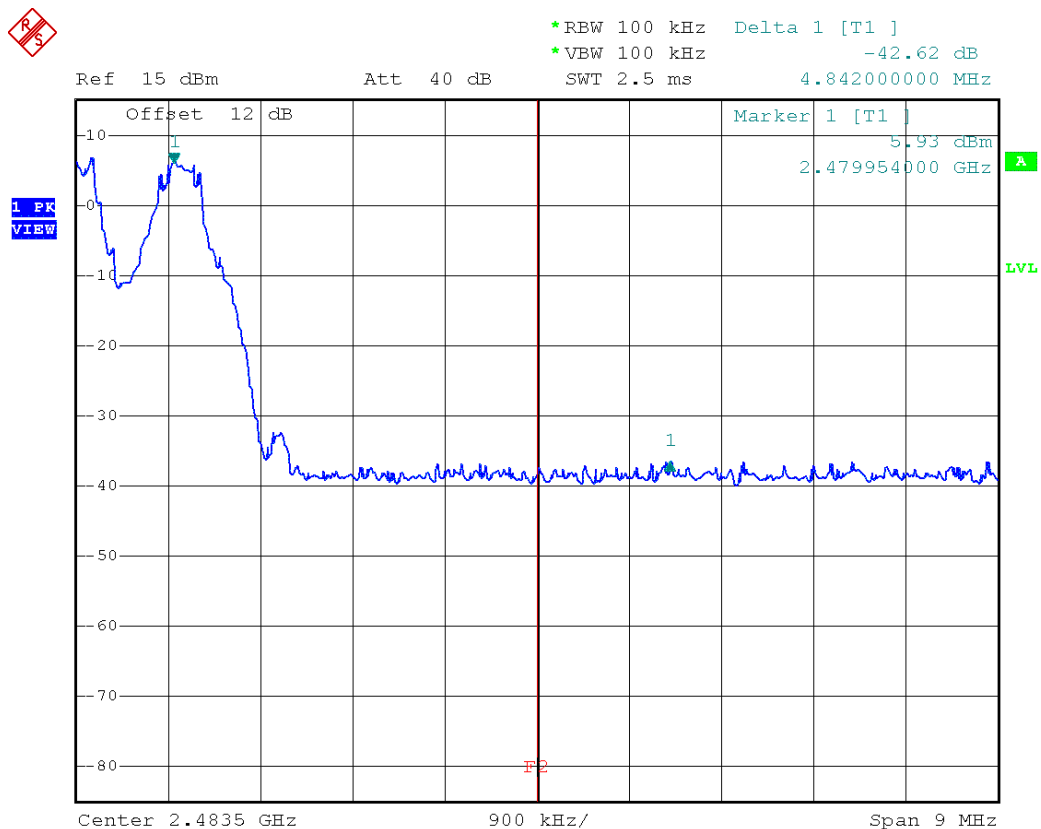

Date: 26.JAN.2015 10:35:24

Test Report No.: G0M-1406-3919-TFC247BT-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Band-edge compliance – 2-DH5-Sngl F_{LOW}
Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, 2-DH5, 2402 MHz, single frequency
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: 20 dB down method (DA 00-705 Meas Guidance)
 Note 2: lower Band-edge, conducted measurement



*RBW 100 kHz Delta 1 [T1]
 *VBW 100 kHz -42.58 dB
 Ref 15 dBm Att 40 dB SWT 2.5 ms -2.466000000 MHz

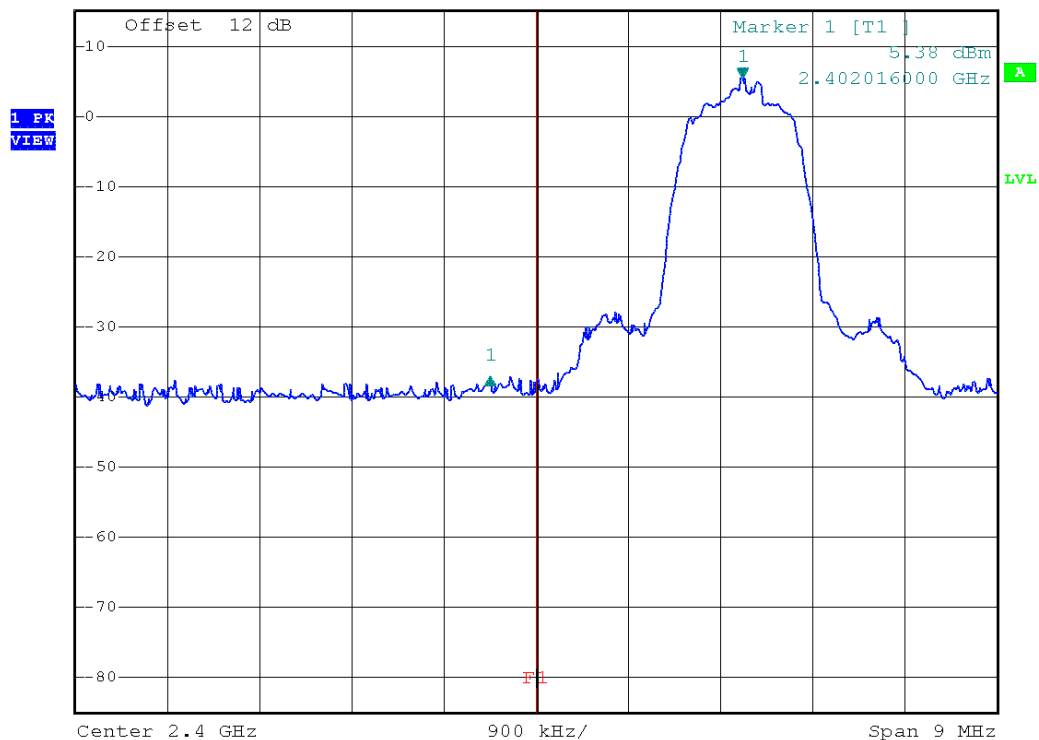

Date: 26.JAN.2015 10:24:19

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Band-edge compliance – 2-DH5-Sngl F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, 2-DH5, 2480 MHz, single frequency
Test Date: 2015-01-26
Verdict: NONE (INFORMATION ONLY)
Note 1: 20 dB down method (DA 00-705 Meas Guidance)
Note 2: upper Band-edge, conducted measurement

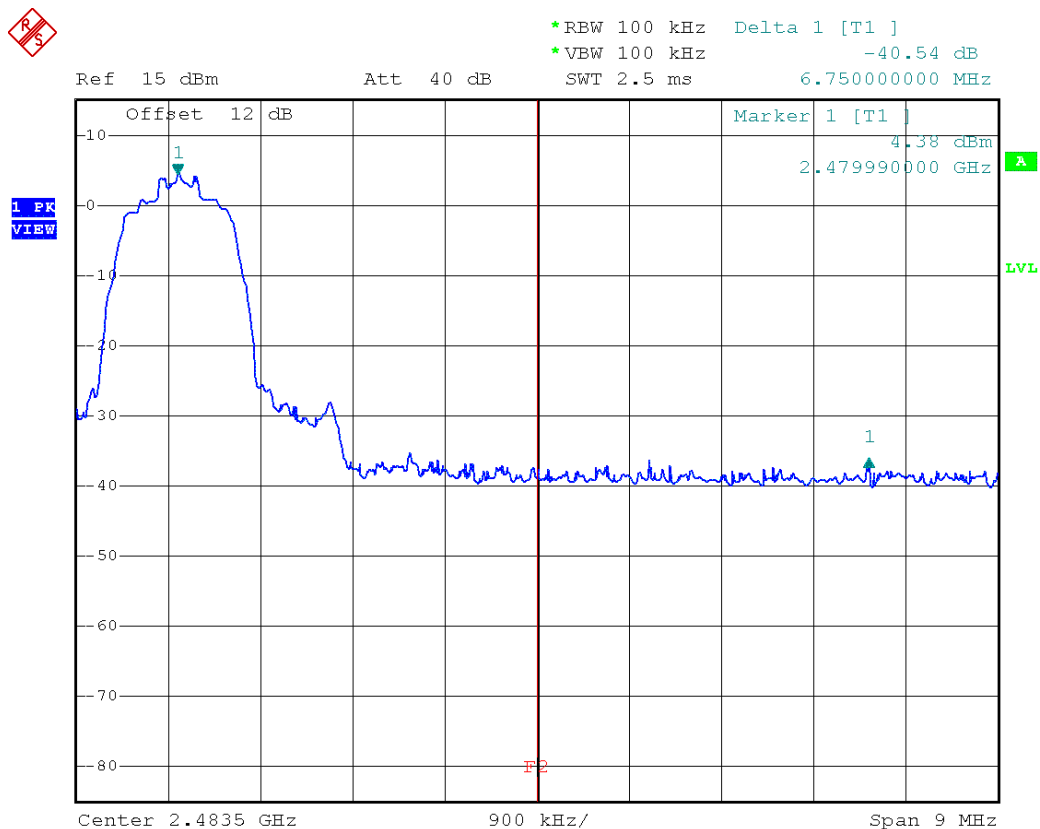

Date: 26.JAN.2015 10:26:04

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Band-edge compliance – 2-DH5-Hop F_{LOW}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, 2-DH5, hopping mode
Test Date: 2015-01-26
Verdict: NONE (INFORMATION ONLY)
Note 1: 20 dB down method (DA 00-705 Meas Guidance)
Note 2: lower Band-edge, conducted measurement

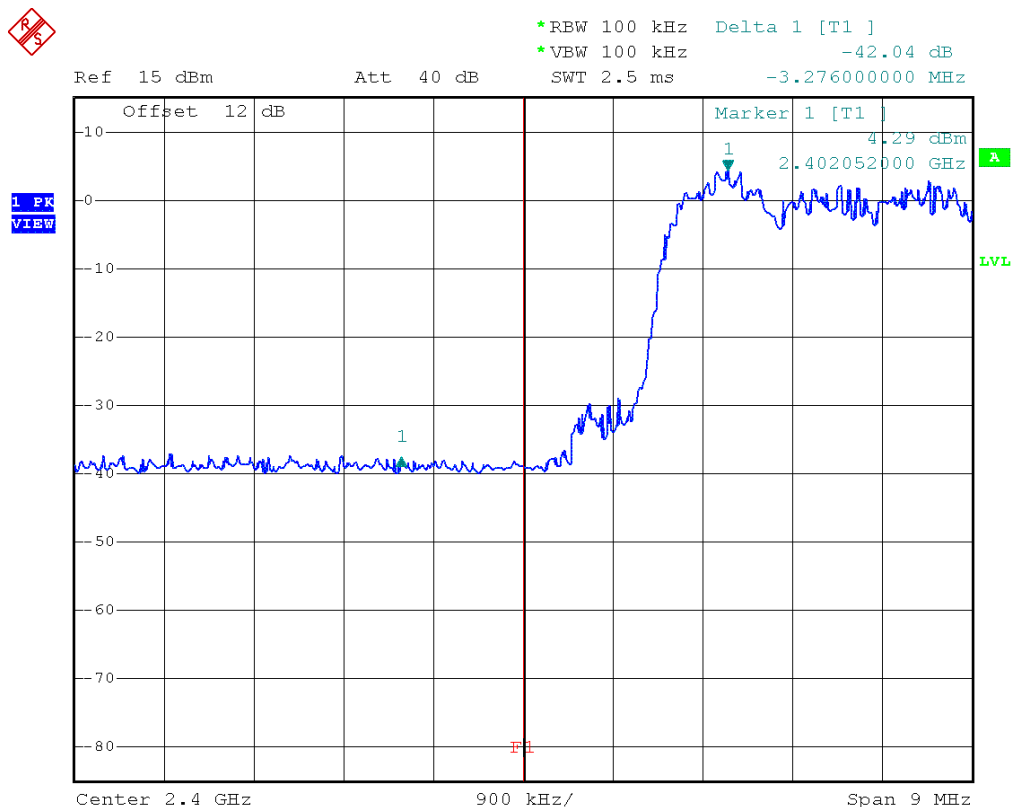

Comment: Limit: Marker Delta value >20 dB; Result: PASS
Date: 26.JAN.2015 10:46:42

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Band-edge compliance – 2-DH5-Hop F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, 2-DH5, hopping mode
Test Date: 2015-01-26
Verdict: NONE (INFORMATION ONLY)
Note 1: 20 dB down method (DA 00-705 Meas Guidance)
Note 2: upper Band-edge, conducted measurement

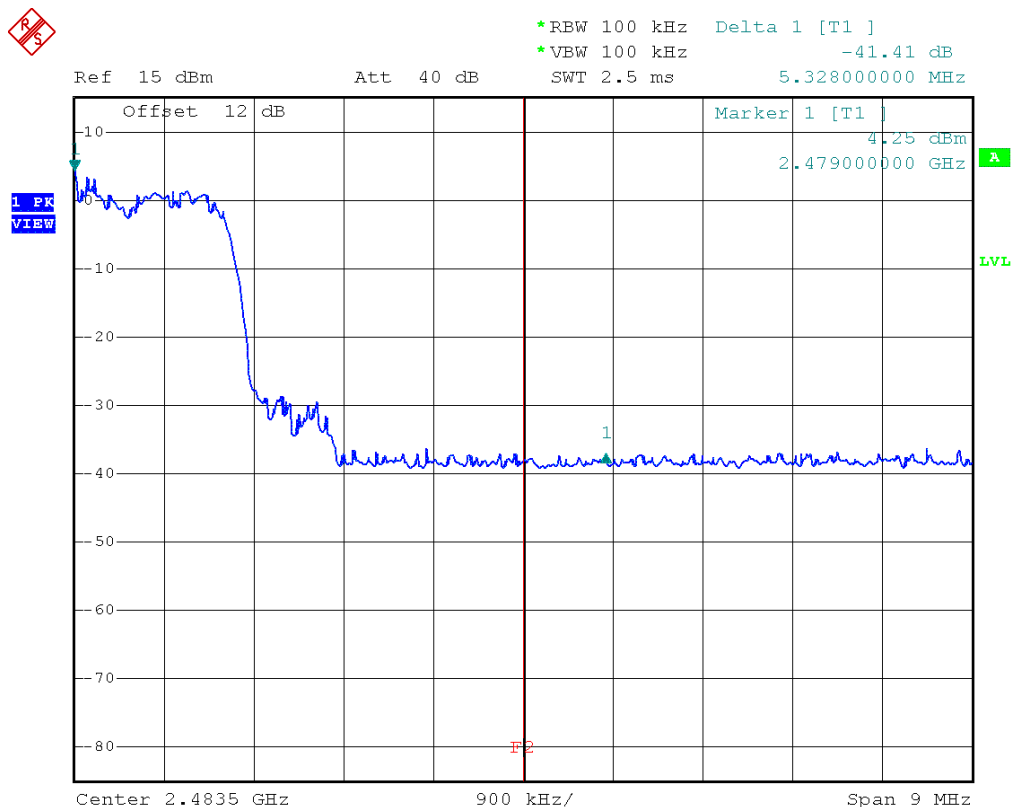

Comment: Limit: Marker Delta value >20 dB; Result: PASS
Date: 26.JAN.2015 10:49:00

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Band-edge compliance – 3-DH5-Sngl F_{LOW}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, 3-DH5, 2402 MHz, single frequency
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: 20 dB down method (DA 00-705 Meas Guidance)
 Note 2: lower Band-edge, conducted measurement

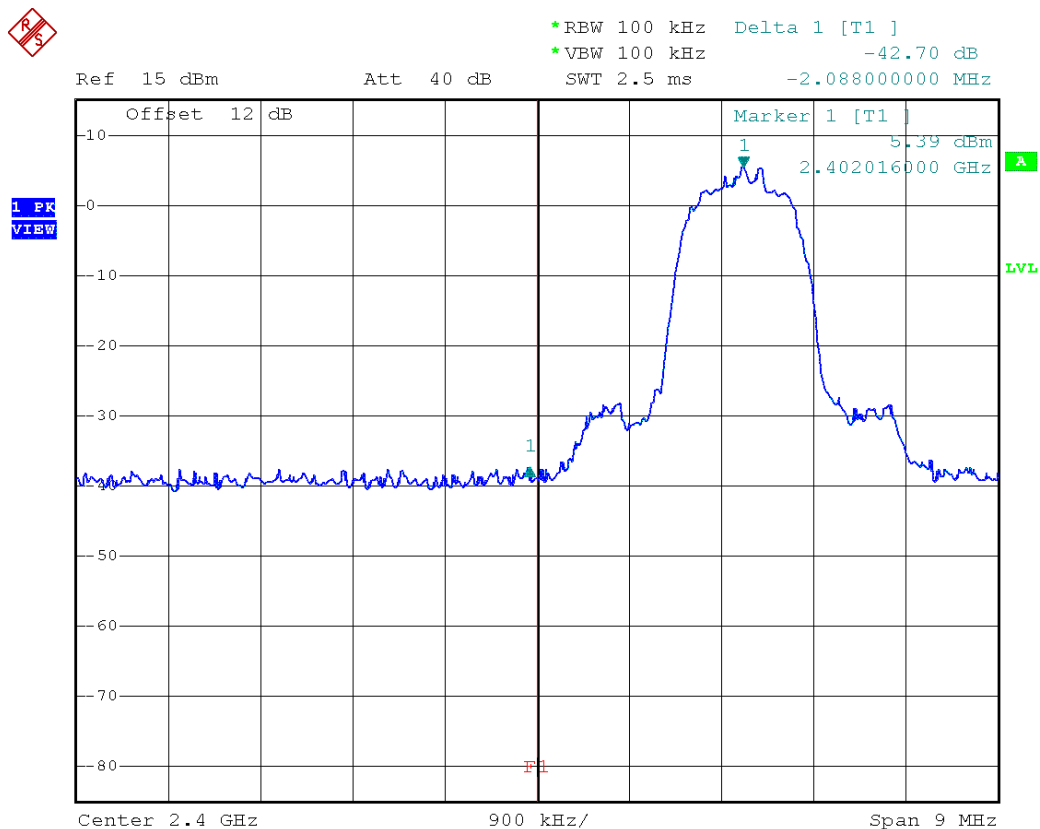


Band-edge compliance – 3-DH5-Sngl F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, 3-DH5, 2480 MHz, single frequency
Test Date: 2015-01-26
Verdict: NONE (INFORMATION ONLY)
Note 1: 20 dB down method (DA 00-705 Meas Guidance)
Note 2: upper Band-edge, conducted measurement

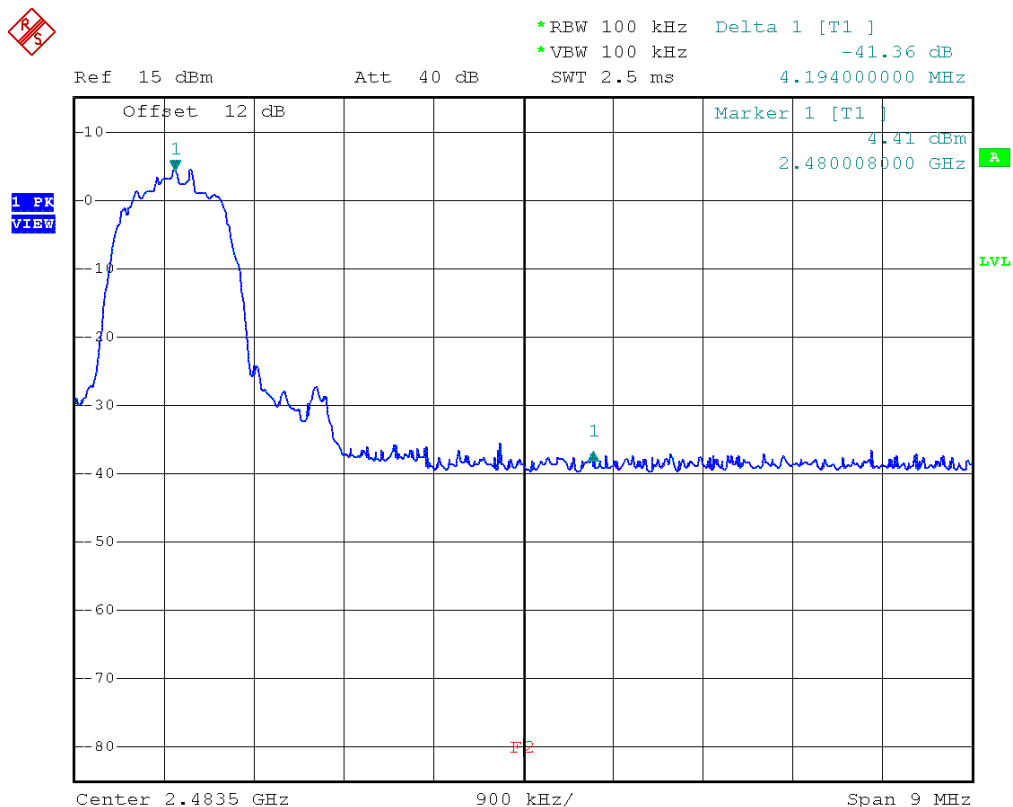

Comment: Limit: Marker Delta value >20 dB; Result: PASS
Date: 26.JAN.2015 10:30:15

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Band-edge compliance – 3-DH5-Hop F_{LOW}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, 3-DH5, hopping mode
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: 20 dB down method (DA 00-705 Meas Guidance)
 Note 2: lower Band-edge, conducted measurement

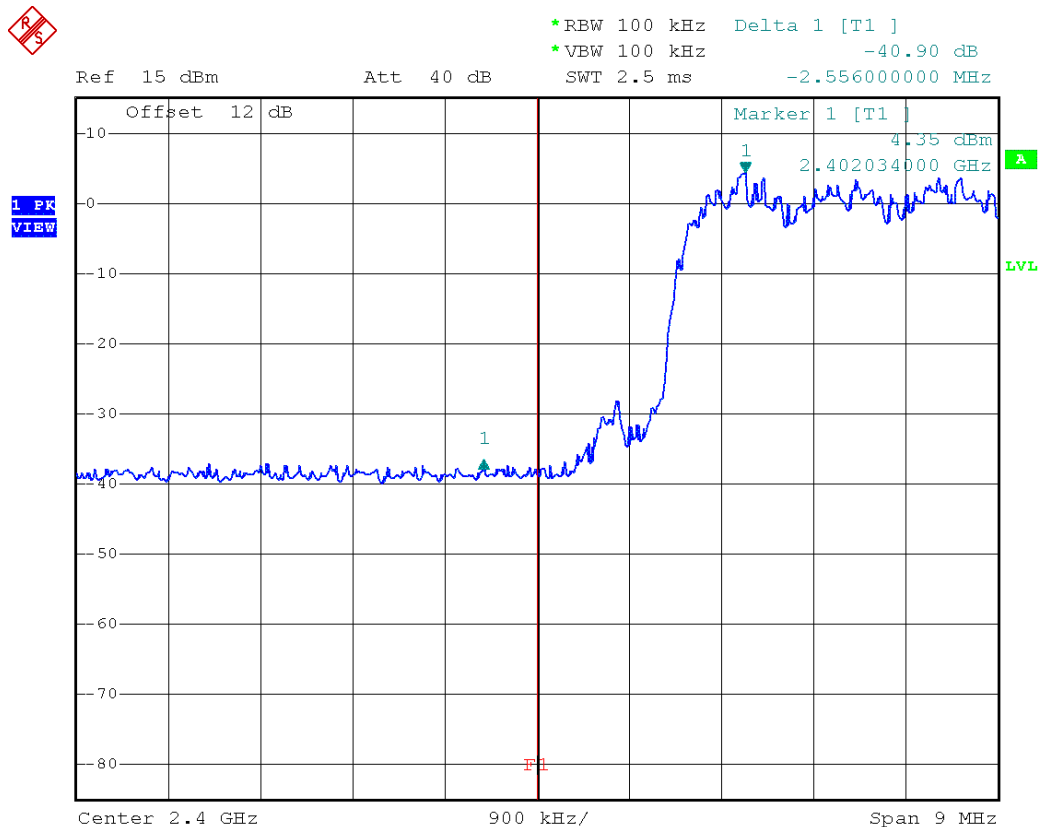

Date: 26.JAN.2015 10:51:33

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Band-edge compliance – 3-DH5-Hop F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, 3-DH5, hopping mode
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: 20 dB down method (DA 00-705 Meas Guidance)
 Note 2: upper Band-edge, conducted measurement

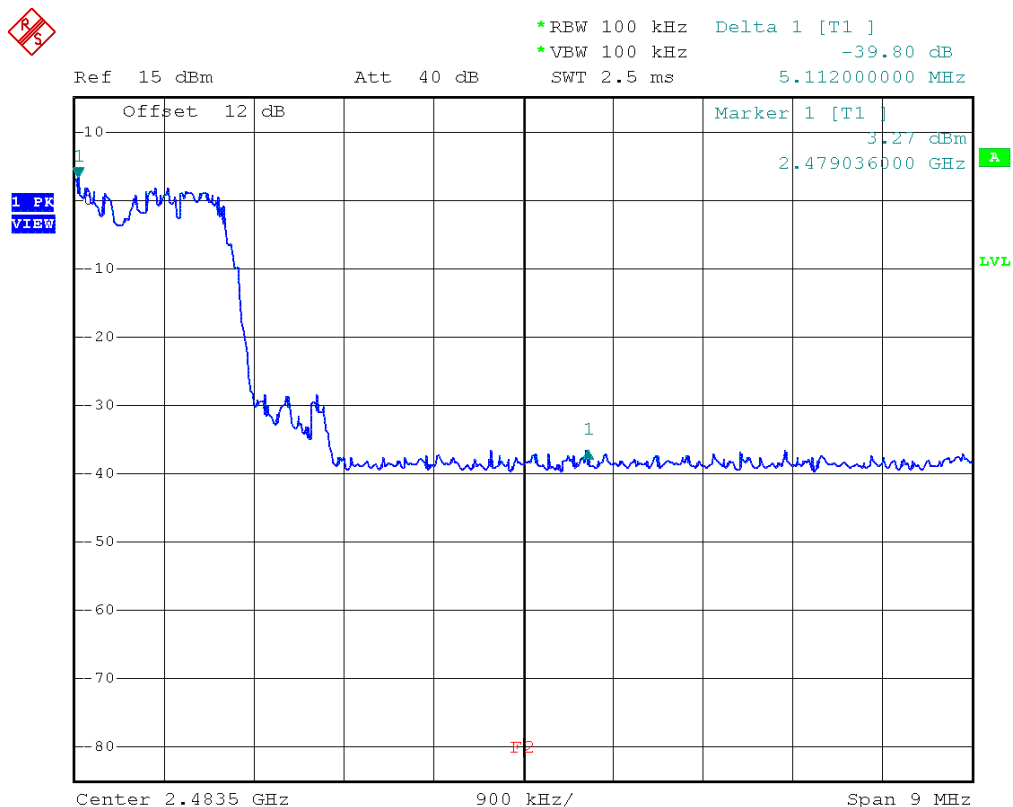

Comment: Limit: Marker Delta value >20 dB; Result: PASS
 Date: 26.JAN.2015 10:53:27

Test Report No.: G0M-1406-3919-TFC247BT-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.9 Test Conditions and Results – Conducted spurious emissions

Conducted spurious emissions acc. to FCC 15.247 / IC RSS-210							Verdict: PASS	
EUT requirement rule parts and clause			Reference					
			FCC 15.247(d) / IC RSS-210 A8.5					
Test according to measurement reference			Reference Method					
			FCC Public Notice DA 00-705					
Test frequency range			Tested frequencies					
			10 MHz – 10 th Harmonic					
Measurement mode			Peak					
Limits								
Limit				Condition				
≤ -20 dB/100 kHz				Peak power measurement detector = Peak				
≤ -30 dB/100 kHz				Peak power measurement detector = RMS				
Test setup								
Spectrum Analyzer EUT								
Test procedure								
1. EUT set to test mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth is set to 100 kHz and detector to peak and max hold 4. Markers are set to peak emission levels within frequency band 5. Emission level is determined by second marker on emission peak 6. Attenuation is determined from level difference								
Test results								
Channel	Frequency [MHz]	Mode	Emission [MHz]	Emission Level [dbm]	Peak power [dBm]	Limit [dBm]	Margin [dB]	Result
F _{LOW}	2402	DH5-Sngl	4805	-40.32	6.6	-13.4	-26.92	PASS
F _{MID}	2441	DH5-Sngl	4889	-40.08	6.3	-13.7	-26.38	PASS
F _{HIGH}	2480	DH5-Sngl	4959	-40.33	6.2	-13.8	-26.53	PASS
F _{LOW}	2402	2DH5-Sngl	2303	-39.40	2.5	-17.5	-21.90	PASS
F _{MID}	2441	2DH5-Sngl	2303	-39.91	1.5	-18.5	-21.41	PASS
F _{HIGH}	2480	2DH5-Sngl	2303	-41.17	3.8	-16.2	-24.97	PASS
F _{LOW}	2402	3DH5-Sngl	4358	-42.86	3.0	-17.0	-25.86	PASS
F _{MID}	2441	3DH5-Sngl	2303	-39.88	2.6	-17.4	-22.48	PASS
F _{HIGH}	2480	3DH5-Sngl	4959	-41.35	1.8	-18.2	-23.15	PASS
Comments:								

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – DH5-Sngl F_{Low}

Spurious Emissions acc. to FCC 15.247

Project Number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BT, DH5 2402 MHz, modulated
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
 Note 2: conducted measurement

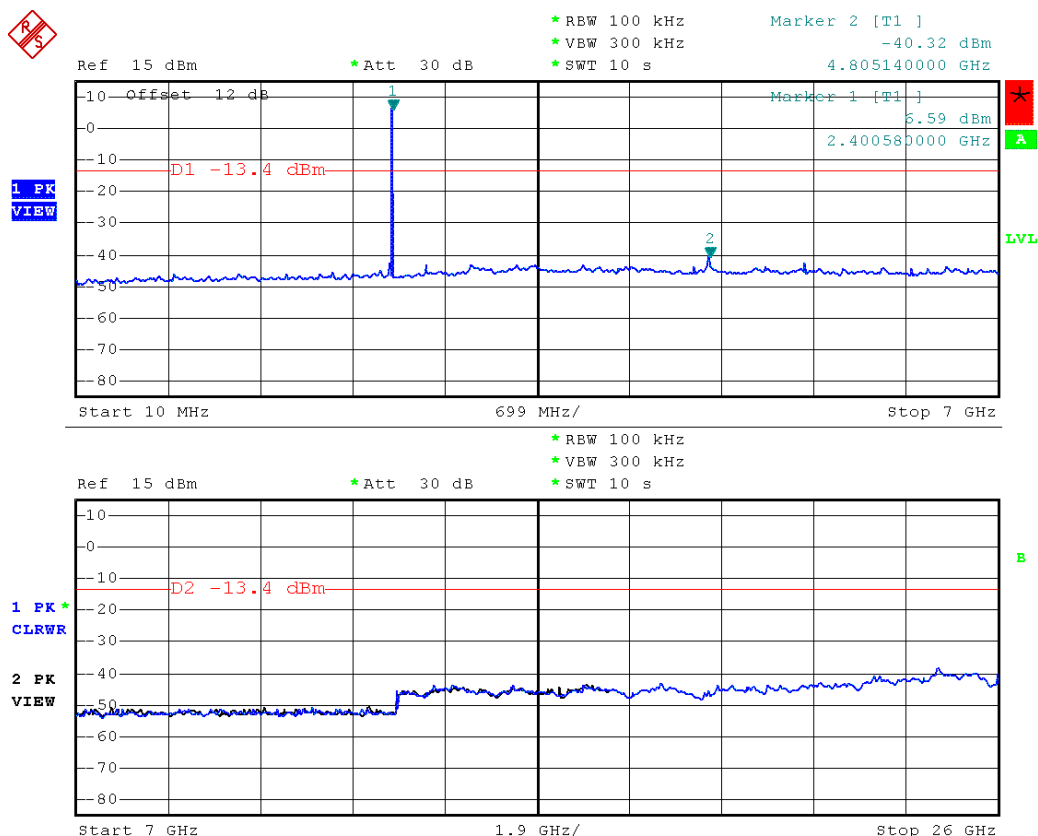

Date: 26.JAN.2015 10:57:13

Test Report No.: GOM-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – DH5-Sngl F_{MID}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BT, DH5 2441 MHz, modulated
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
 Note 2: conducted measurement

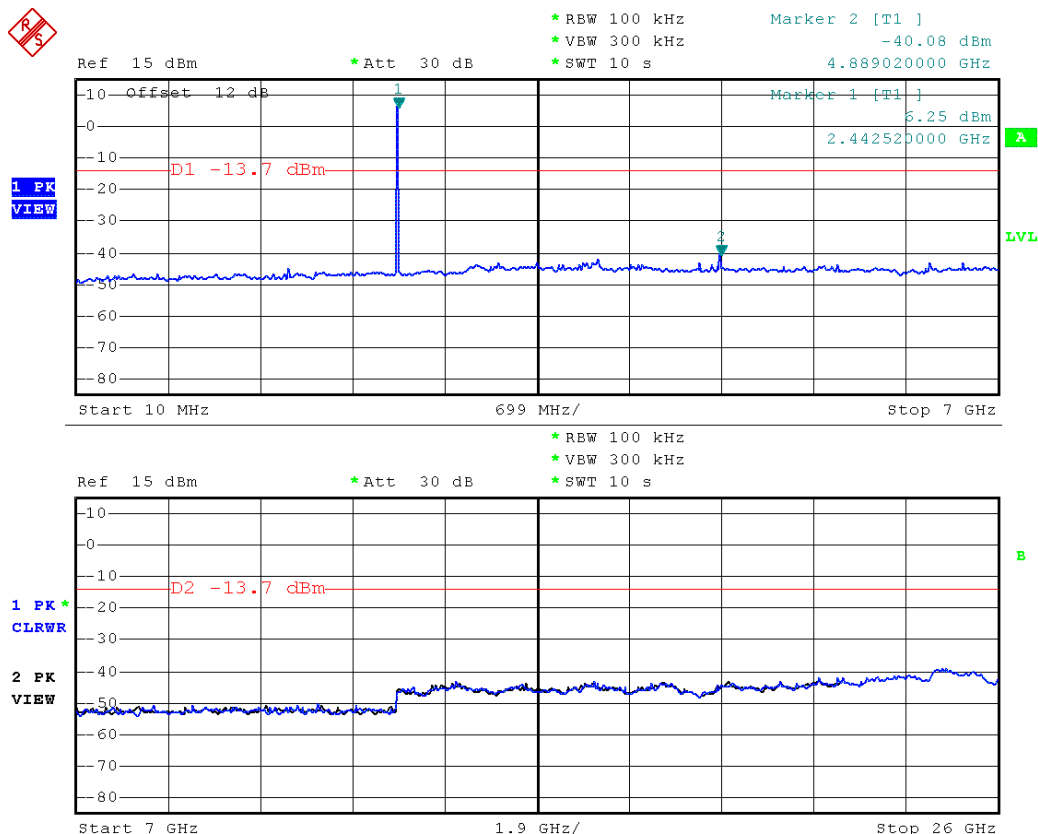

Date: 26.JAN.2015 10:59:47

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – DH5-Sngl F_{HIGH}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BT, DH5 2480 MHz, modulated
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
 Note 2: conducted measurement

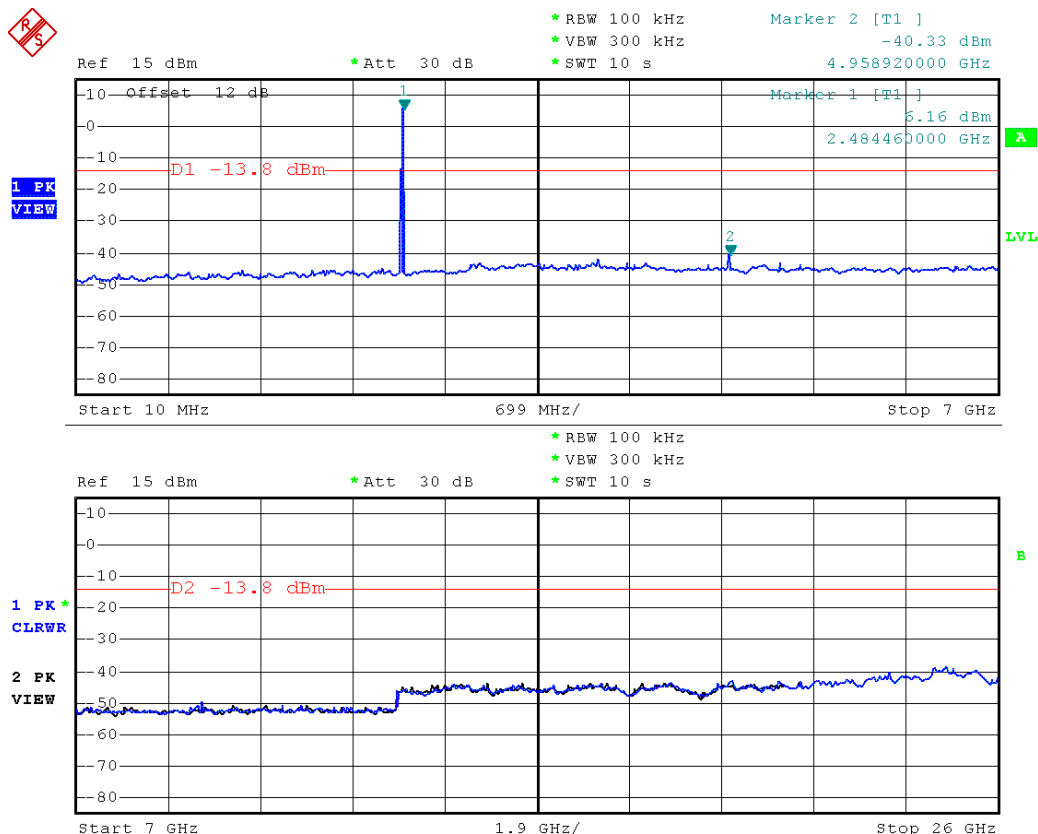

Date: 26.JAN.2015 11:01:53

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – 2-DH5-Sngl F_{Low}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BT, 2-DH5 2402 MHz, modulated
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
 Note 2: conducted measurement

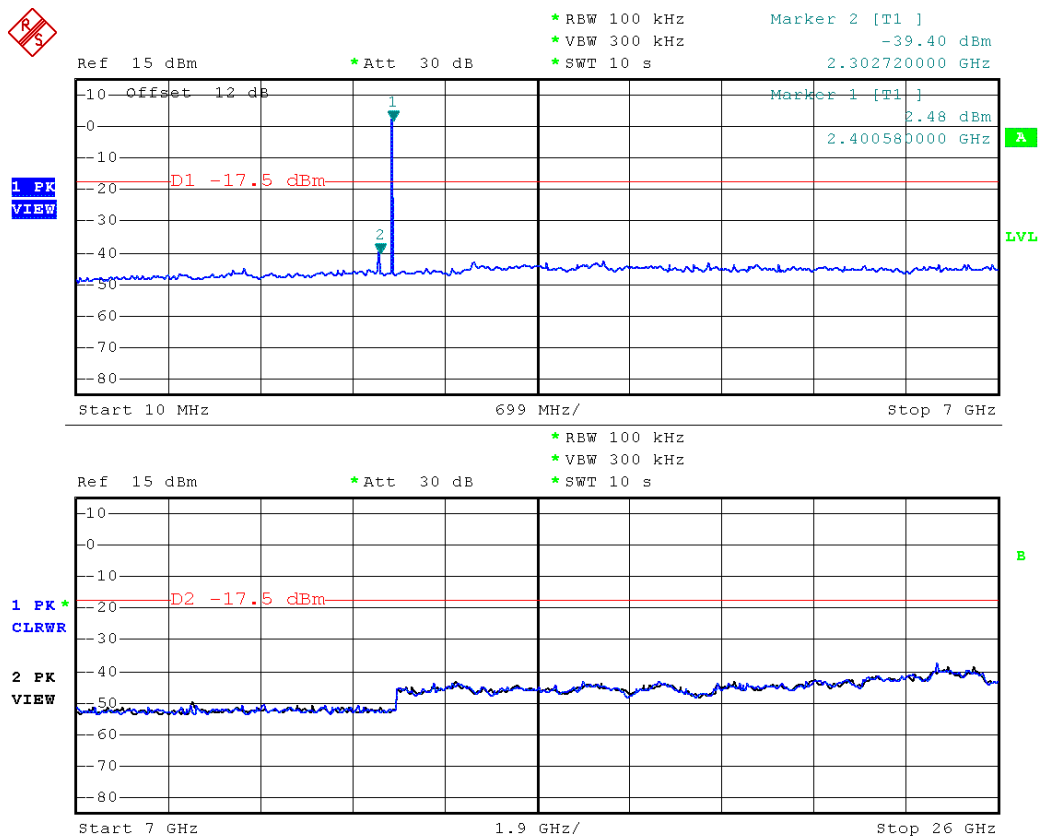

Date: 26.JAN.2015 11:04:29

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – 2-DH5-Sngl F_{MD}

Spurious Emissions acc. to FCC 15.247

Project Number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BT, 2-DH5 2441 MHz, modulated
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
 Note 2: conducted measurement

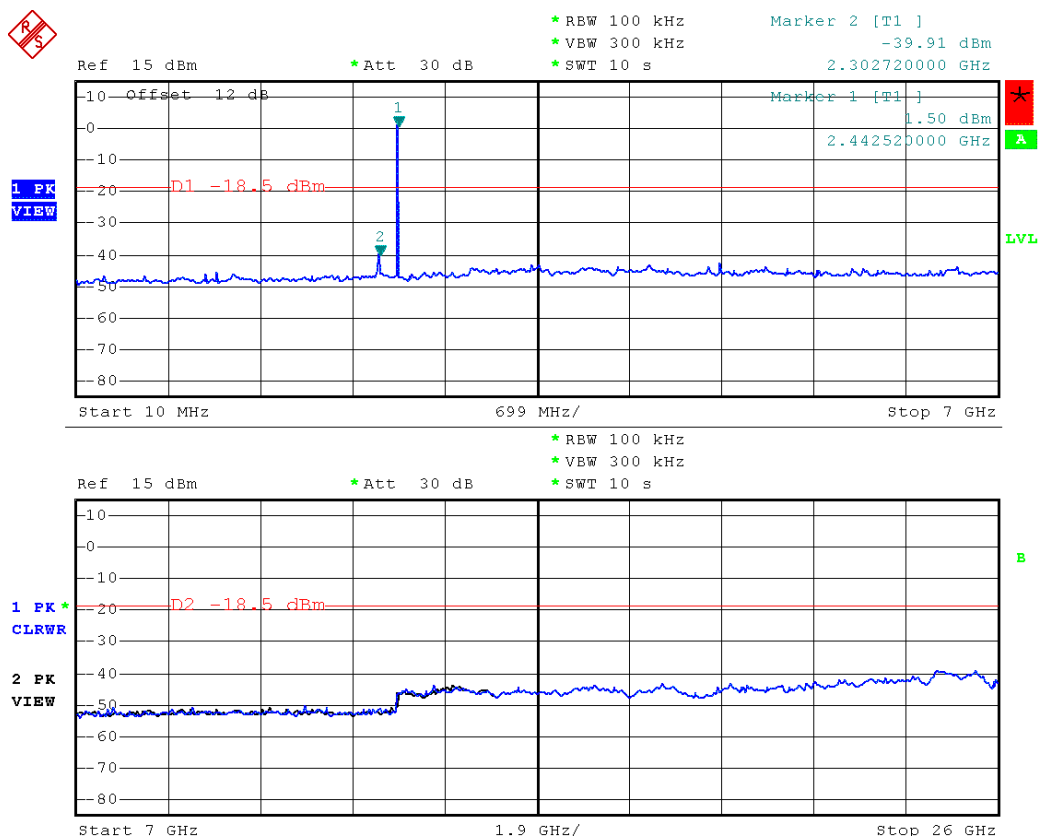

Date: 26.JAN.2015 11:09:52

Test Report No.: GOM-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – 2-DH5-Sngl F_{HIGH}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BT, 2-DH5 2480 MHz, modulated
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
 Note 2: conducted measurement

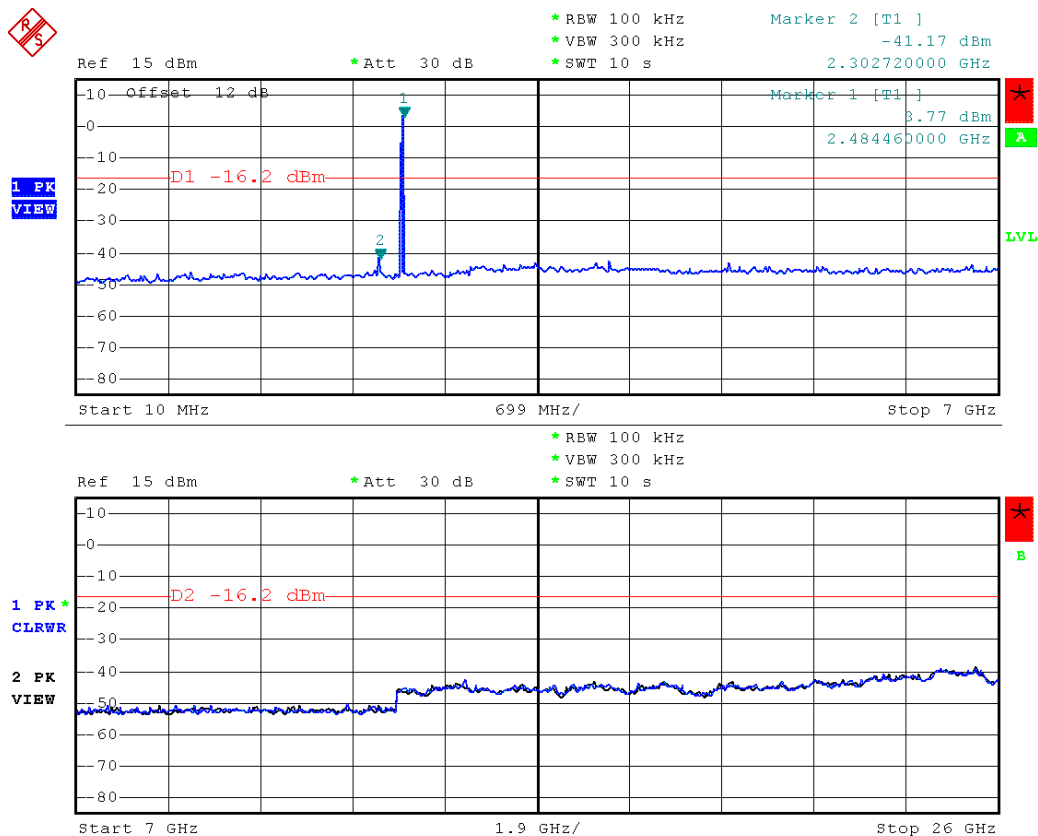

Date: 26.JAN.2015 11:11:26

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – 3-DH5-Sngl F_{LOW}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Christian Weber
Test Conditions:	Tnom / Vnom
Mode:	Tx, BT, 3-DH5 2402 MHz, modulated
Test Date:	2015-01-26
Verdict:	NONE (INFORMATION ONLY)
Note 1:	Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
Note 2:	conducted measurement

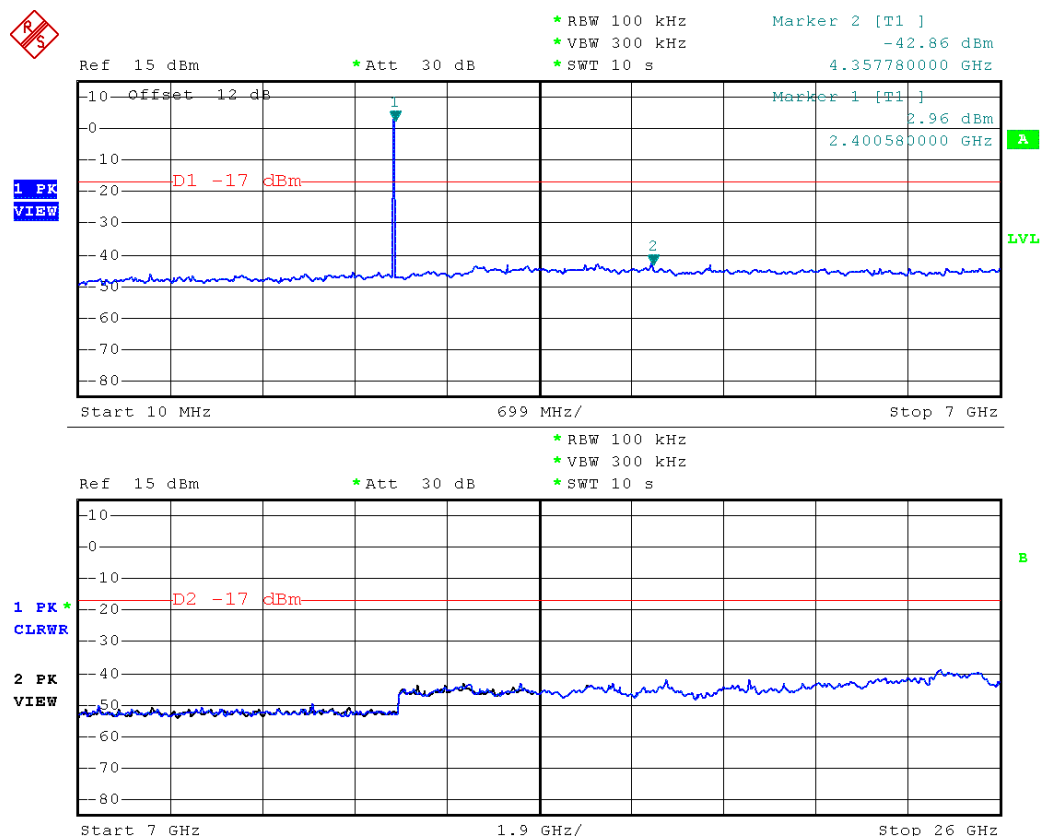

Date: 26.JAN.2015 11:13:56

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – 3-DH5-Sngl F_{MD}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BT, 3-DH5 2441 MHz, modulated
 Test Date: 2015-01-26
 Verdict: NONE (INFORMATION ONLY)
 Note 1: Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
 Note 2: conducted measurement

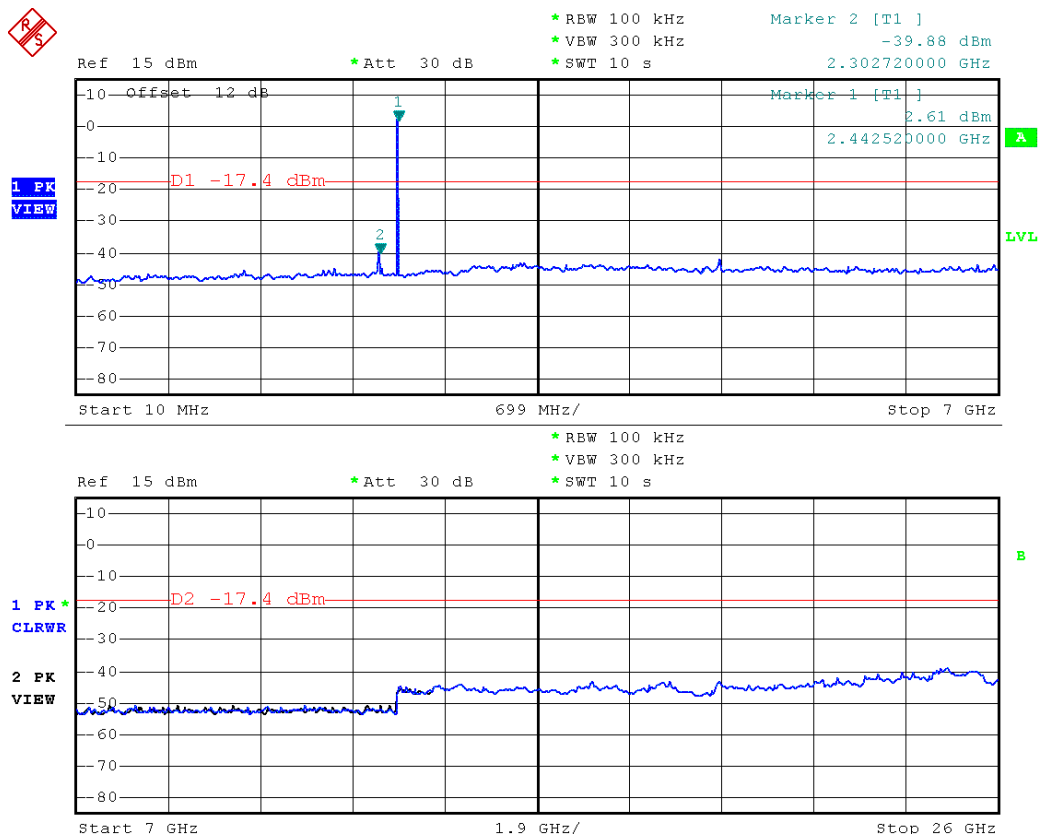

Date: 26.JAN.2015 11:16:34

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – 3-DH5-Sngl F_{HIGH}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Christian Weber
Test Conditions:	Tnom / Vnom
Mode:	Tx, BT, 3-DH5 2480 MHz, modulated
Test Date:	2015-01-26
Verdict:	NONE (INFORMATION ONLY)
Note 1:	Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
Note 2:	conducted measurement

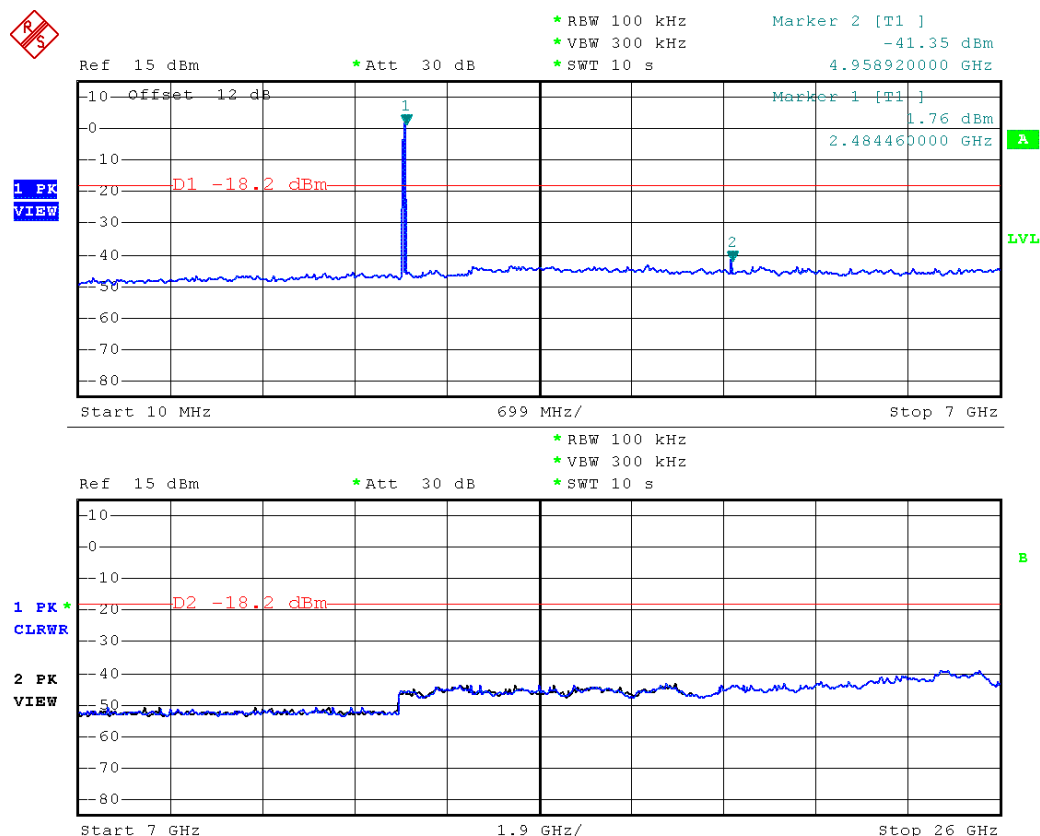

Date: 26.JAN.2015 11:18:50

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.10 Test Conditions and Results – Transmitter radiated emissions

Transmitter radiated emissions acc. to FCC 47 CFR 15.247 / IC RSS-210				Verdict: PASS	
Test according referenced standards		Reference Method			
		FCC 15.247(d) / IC RSS-210 A8.5			
Test according to measurement reference		Reference Method			
		FCC Public Notice DA 00-705 / ANSI C63.4			
Test frequency range		Tested frequencies			
		30 MHz – 10 th Harmonic			
Limits					
Frequency range [MHz]	Detector	Limit [μV/m]	Limit [dBμV/m]	Limit Distance [m]	
30 – 88	Quasi-Peak	100	40	3	
88 – 216	Quasi-Peak	150	43.5	3	
216 – 960	Quasi-Peak	200	46	3	
960 – 1000	Quasi-Peak	500	54	3	
> 1000	Average	500	54	3	
Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.					
Test setup					

Test procedure									
- EUT set to test mode (Communication tester is used if needed) - Span it set according to measurement range - Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz - Markers are set to peak emission levels within restricted bands									
Test results									
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Limit dist. [m]*	Margin [dB]
F _{LOW}	2402	DH5-Sngl	No significant spurious emissions						
F _{MID}	2441	DH5-Sngl	2381	53.87	pk	hor	74.00	3	-20.13
F _{MID}	2441	DH5-Sngl	2381	29.52	RMS	hor	54.00	3	-24.48
F _{HIGH}	2480	DH5-Sngl	2380	53.70	pk	hor	74.00	3	-20.30
F _{HIGH}	2480	DH5-Sngl	2380	29.29	RMS	hor	54.00	3	-24.71
F _{HIGH}	2480	DH5-Sngl	2483.5	56.09	pk	ver	74.00	3	-17.91
F _{HIGH}	2480	DH5-Sngl	2483.5	49.64	RMS	ver	54.00	3	-04.36
F _{HIGH}	2480	DH5-Sngl	2483.5	53.95	pk	hor	74.00	3	-20.05
F _{HIGH}	2480	DH5-Sngl	2483.5	48.23	RMS	hor	54.00	3	-05.77
F _{HIGH}	2480	DH5-Sngl	2486.2	53.63	pk	ver	74.00	3	-20.37
F _{HIGH}	2480	DH5-Sngl	2486.2	34.45	RMS	ver	54.00	3	-19.55
F _{HIGH}	2480	DH5-Sngl	2503	55.04	pk	ver	95.00	3	-39.96
F _{HIGH}	2480	DH5-Sngl	2503	54.41	pk	hor	95.00	3	-40.59
F _{LOW}	2402	3-DH5-Sngl	2380	53.74	pk	hor	74.00	3	-20.26
F _{LOW}	2402	3-DH5-Sngl	2380	30.71	RMS	hor	54.00	3	-23.29
F _{MID}	2441	3-DH5-Sngl	2379	53.51	pk	hor	74.00	3	-20.49
F _{MID}	2441	3-DH5-Sngl	2379	29.18	RMS	hor	54.00	3	-24.82
F _{HIGH}	2480	3-DH5-Sngl	2379	53.89	pk	hor	74.00	3	-20.11
F _{HIGH}	2480	3-DH5-Sngl	2379	29.07	RMS	hor	54.00	3	-24.93
F _{HIGH}	2480	3-DH5-Sngl	2483.5	60.30	pk	ver	74.00	3	-13.70
F _{HIGH}	2480	3-DH5-Sngl	2483.5	50.08	RMS	ver	54.00	3	-03.92
F _{HIGH}	2480	3-DH5-Sngl	2483.5	58.85	pk	hor	74.00	3	-15.15
F _{HIGH}	2480	3-DH5-Sngl	2483.5	47.44	RMS	hor	54.00	3	-06.56
F _{HIGH}	2480	3-DH5-Sngl	2484.8	55.14	pk	ver	74.00	3	-18.86
F _{HIGH}	2480	3-DH5-Sngl	2484.8	40.18	RMS	ver	54.00	3	-13.82
F _{HIGH}	2480	3-DH5-Sngl	2503	48.50	pk	ver	74.00	3	-46.50
Comments: * Physical distance between EUT and measurement antenna.									

3.11 Test Conditions and Results – Receiver radiated emissions

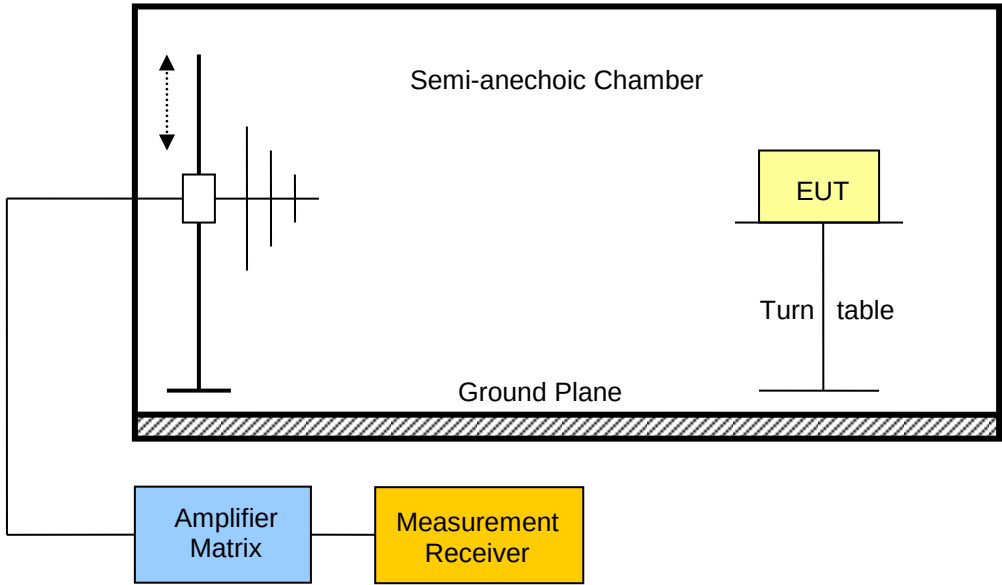Receiver radiated emissions acc. to IC RSS-210				Verdict: PASS
Test according referenced standards	Reference Method			
	IC RSS-210 A8.5			
Test according to measurement reference	Reference Method			
	ANSI C63.4			
Test frequency range	Tested frequencies			
	30 MHz – 3 th Harmonic			
EUT test mode	Receive			
Limits				
Frequency range [MHz]	Detector	Limit [μV/m]	Limit [dBμV/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Test setup				
				

Test procedure							
1. EUT set to receive mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to peak emission levels							
Test results							
Channel	Mode	Emission [MHz]	Emission Level [dbµV/m]	Polarisation	Det.	Limit [dbµV/m]	Margin [dbµV/m]
Hop	RX-Scan	123.293	33.98	ver	pk	43.50	-9.52 dB
Hop	RX-Scan	416	36.24	ver	pk	46.00	-9.76 dB
Comments: * Physical distance between EUT and measurement antenna. ** Emission level corresponds to ambient noise floor							


ANNEX A Transmitter radiated spurious emissions

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3 m
Mode:	TX; BT-BR; CH: 0; 2402 MHz; DUT-TX-Mode; DH5
Test Date:	2015-02-26
Note:	EUT vertical

Index 148

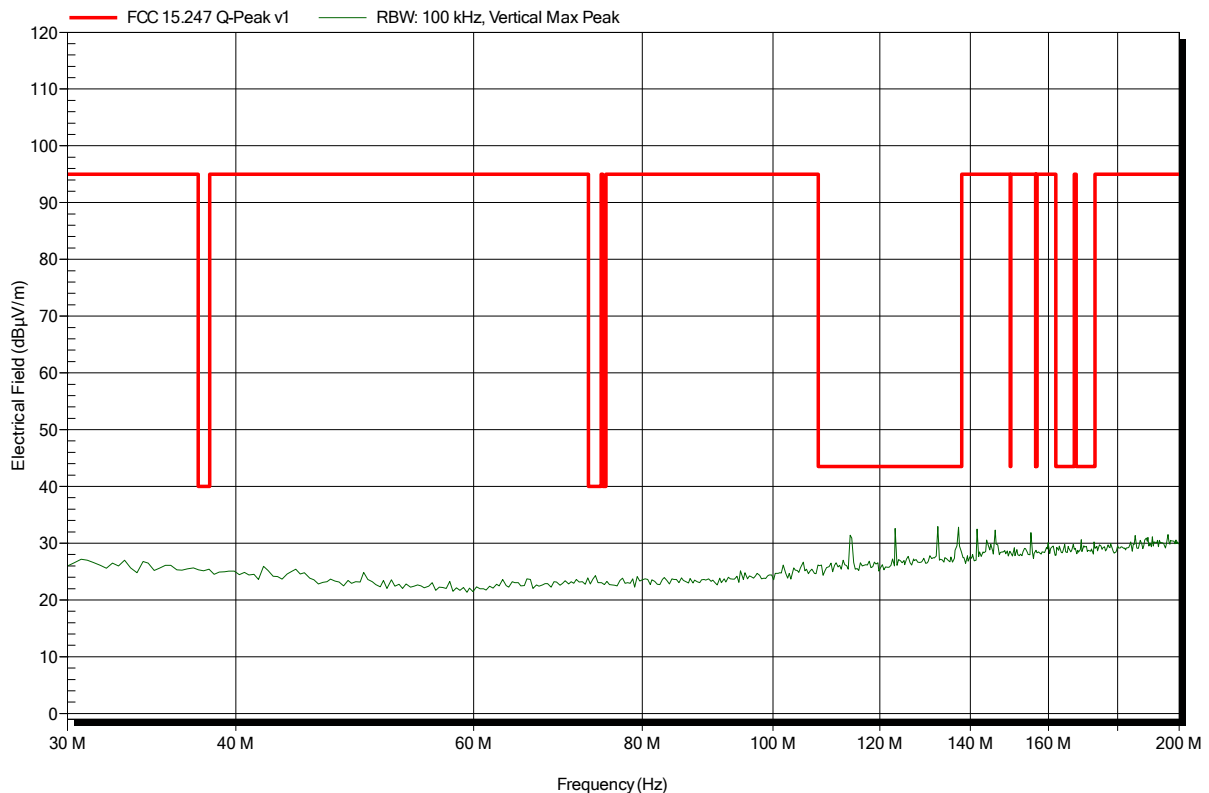


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3 m
Mode:	TX; BT-BR; CH: 0; 2402 MHz; DUT-TX-Mode; DH5
Test Date:	2015-02-26
Note:	EUT vertical

Index 151

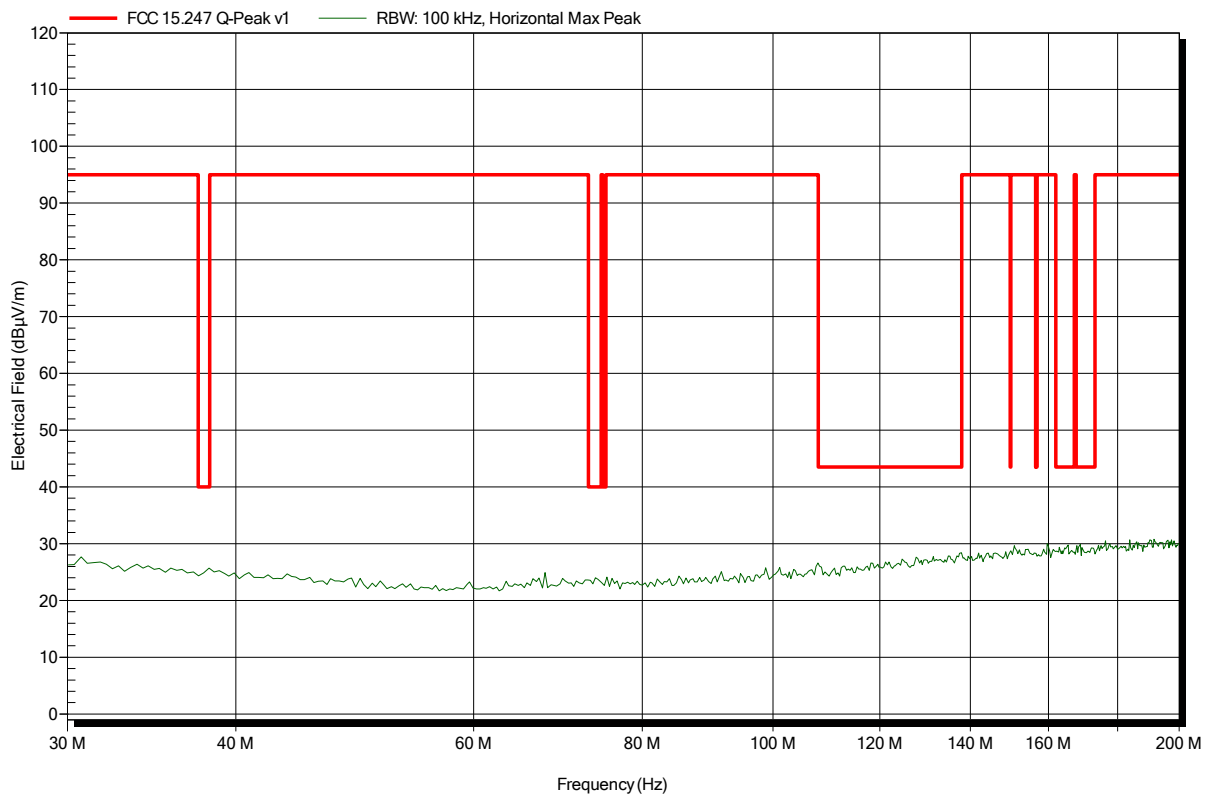


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3 m
Mode:	TX; BT-BR; CH: 39; 2441 MHz; DUT-TX-Mode; DH5
Test Date:	2015-02-26
Note:	EUT vertical

Index 149

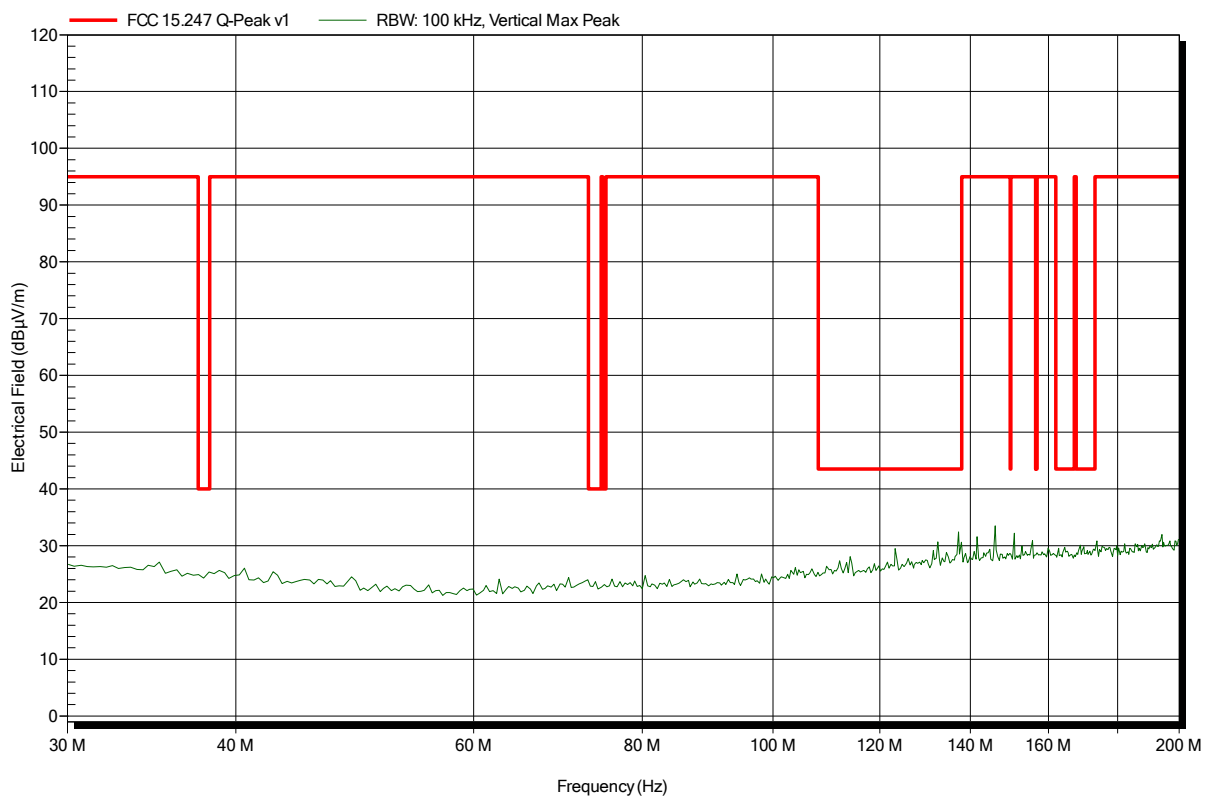


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3 m
Mode:	TX; BT-BR; CH: 39; 2441 MHz; DUT-TX-Mode; DH5
Test Date:	2015-02-26
Note:	EUT vertical

Index 152

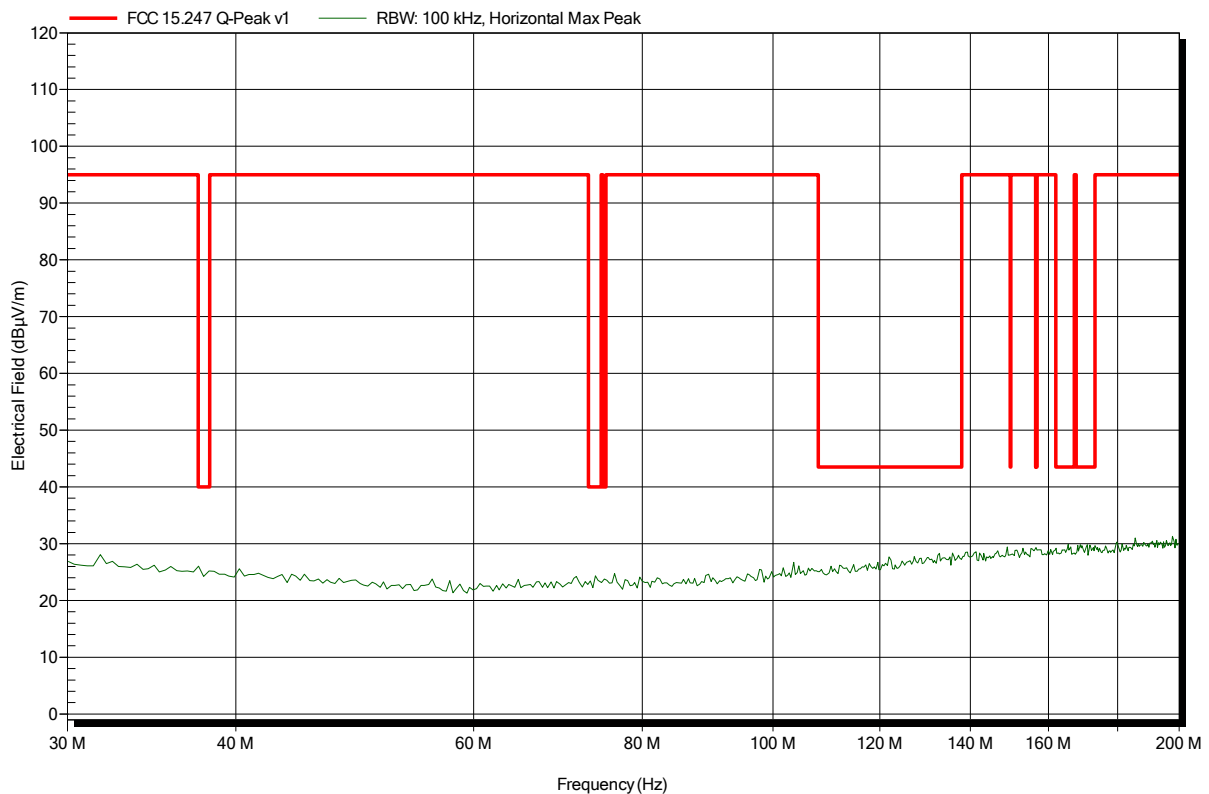


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3 m
Mode:	TX; BT-BR; CH: 78; 2480 MHz; DUT-TX-Mode; DH5
Test Date:	2015-02-26
Note:	EUT vertical

Index 150

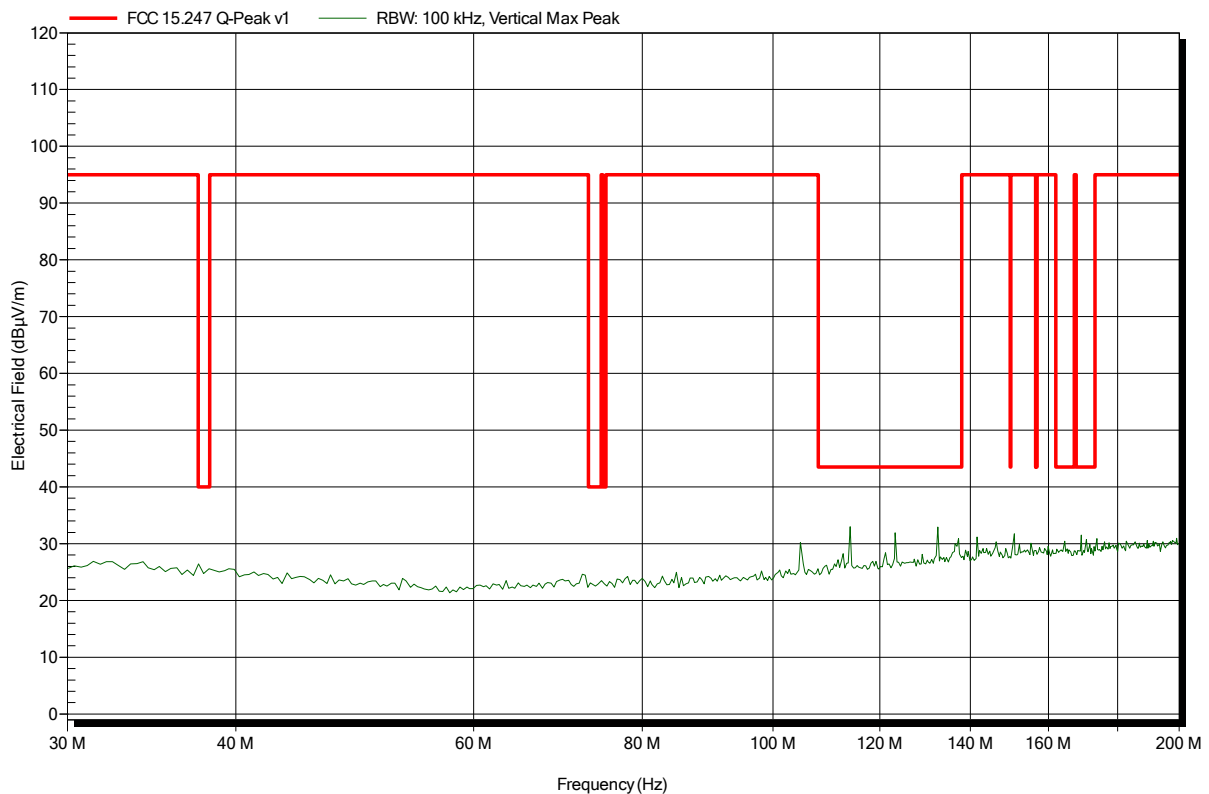


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3 m
Mode:	TX; BT-BR; CH: 78; 2480 MHz; DUT-TX-Mode; DH5
Test Date:	2015-02-26
Note:	EUT vertical

Index 153

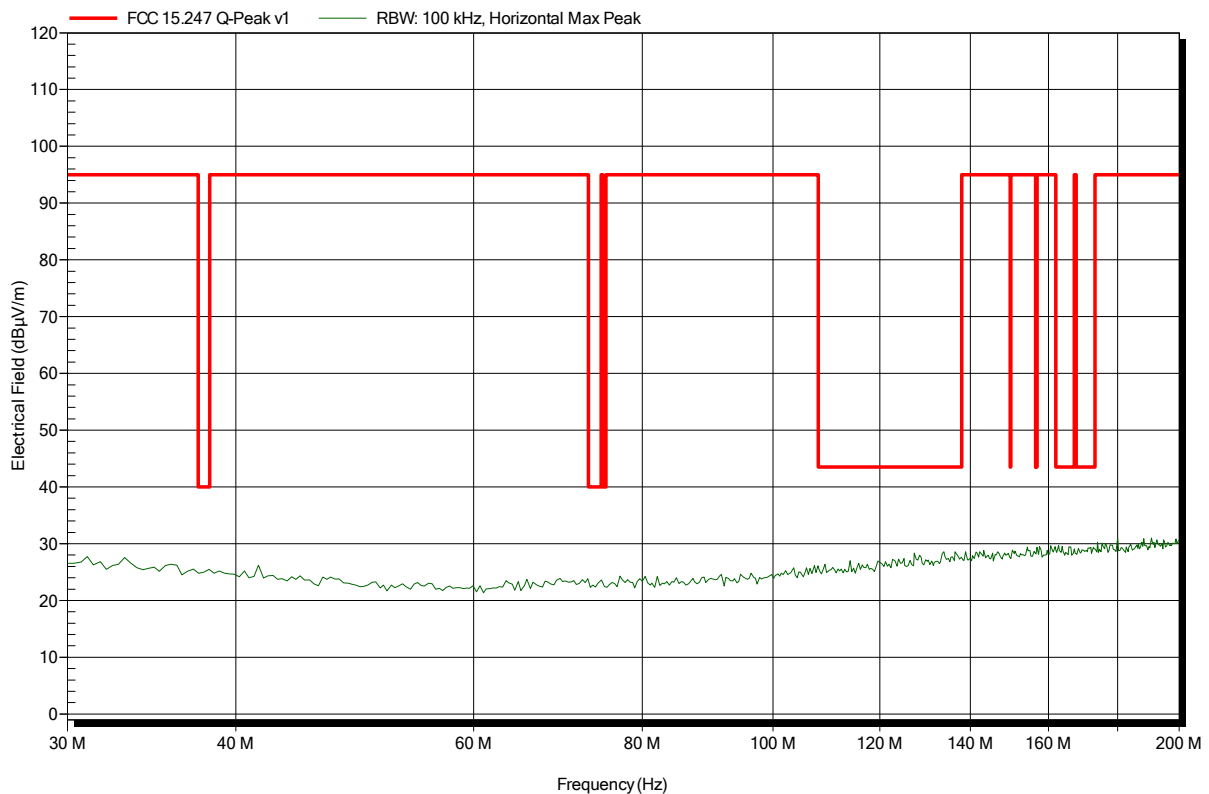


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3 m
Mode:	TX; BT-BR; CH: 0; 2402 MHz; DUT-TX-Mode; DH5
Test Date:	2015-02-26
Note:	EUT vertical

Index 142

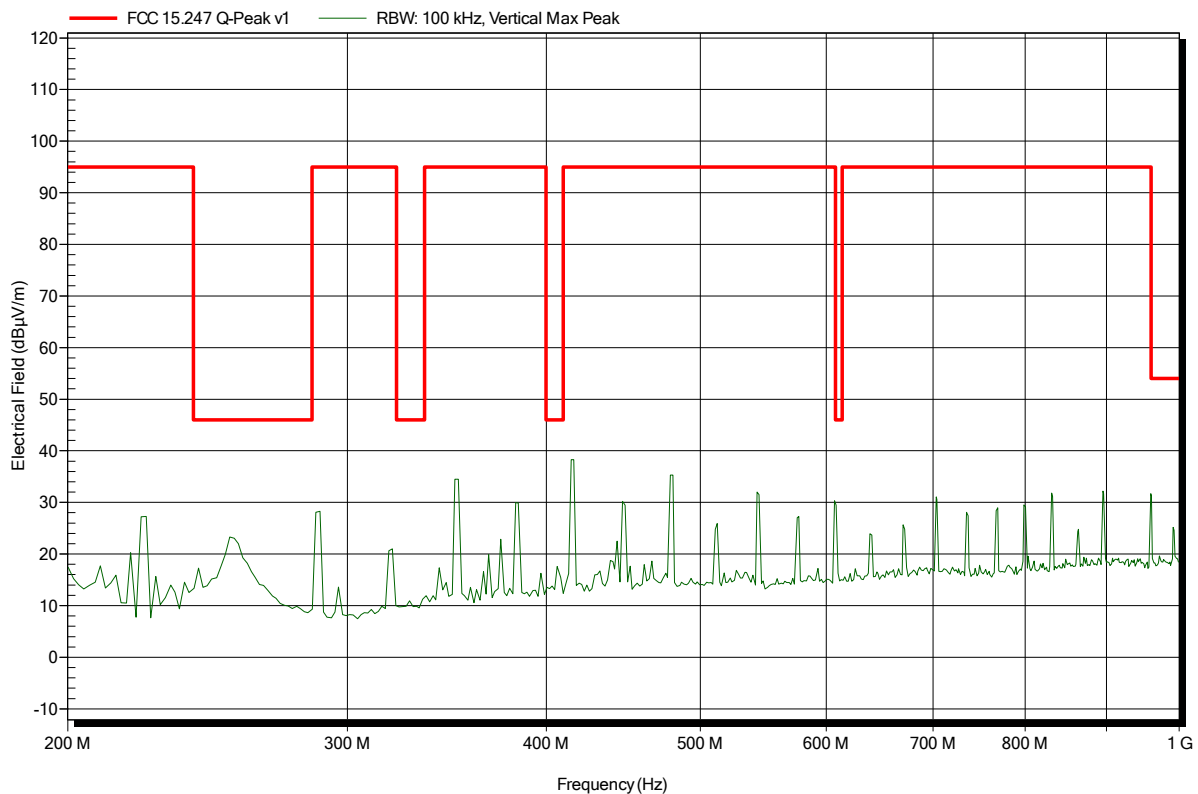


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3 m
Mode:	TX; BT-BR; CH: 0; 2402 MHz; DUT-TX-Mode; DH5
Test Date:	2015-02-26
Note:	EUT vertical

Index 145

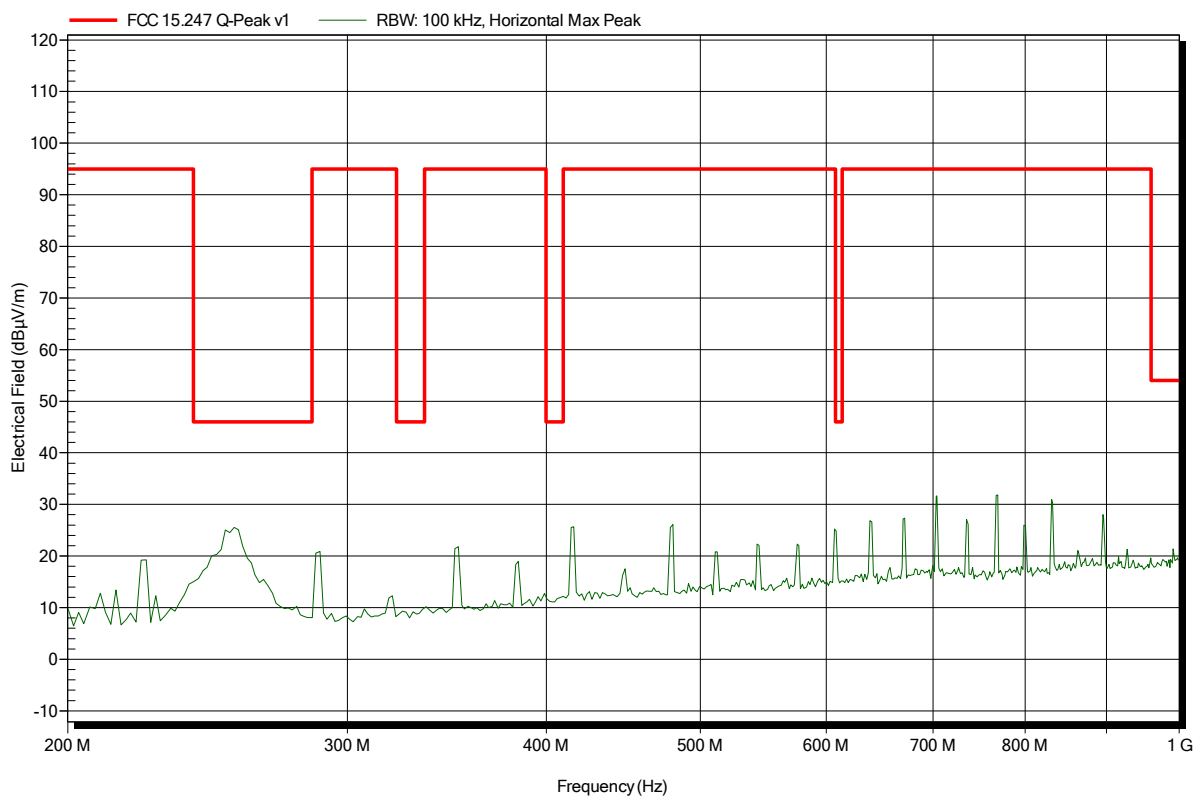


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3 m
Mode:	TX; BT-BR; CH: 39; 2441 MHz; DUT-TX-Mode; DH5
Test Date:	2015-02-26
Note:	EUT vertical

Index 143

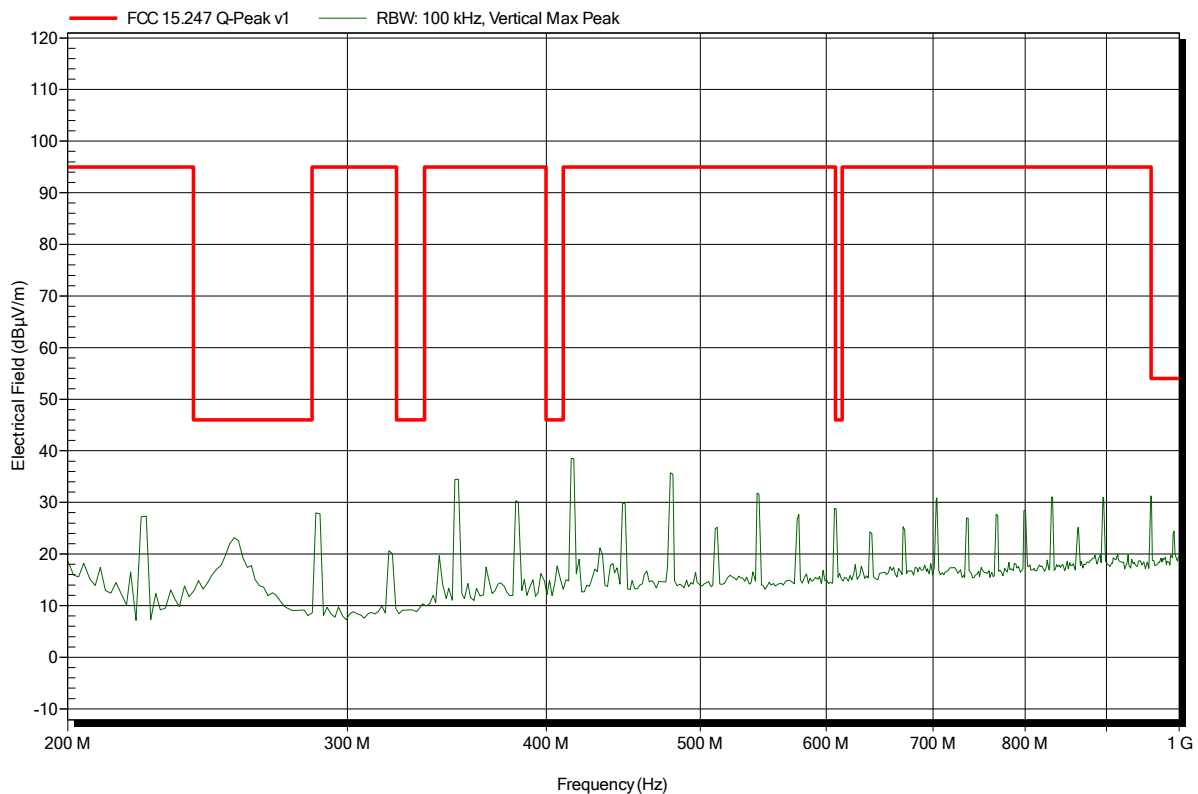


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3 m
Mode:	TX; BT-BR; CH: 39; 2441 MHz; DUT-TX-Mode; DH5
Test Date:	2015-02-26
Note:	EUT vertical

Index 146

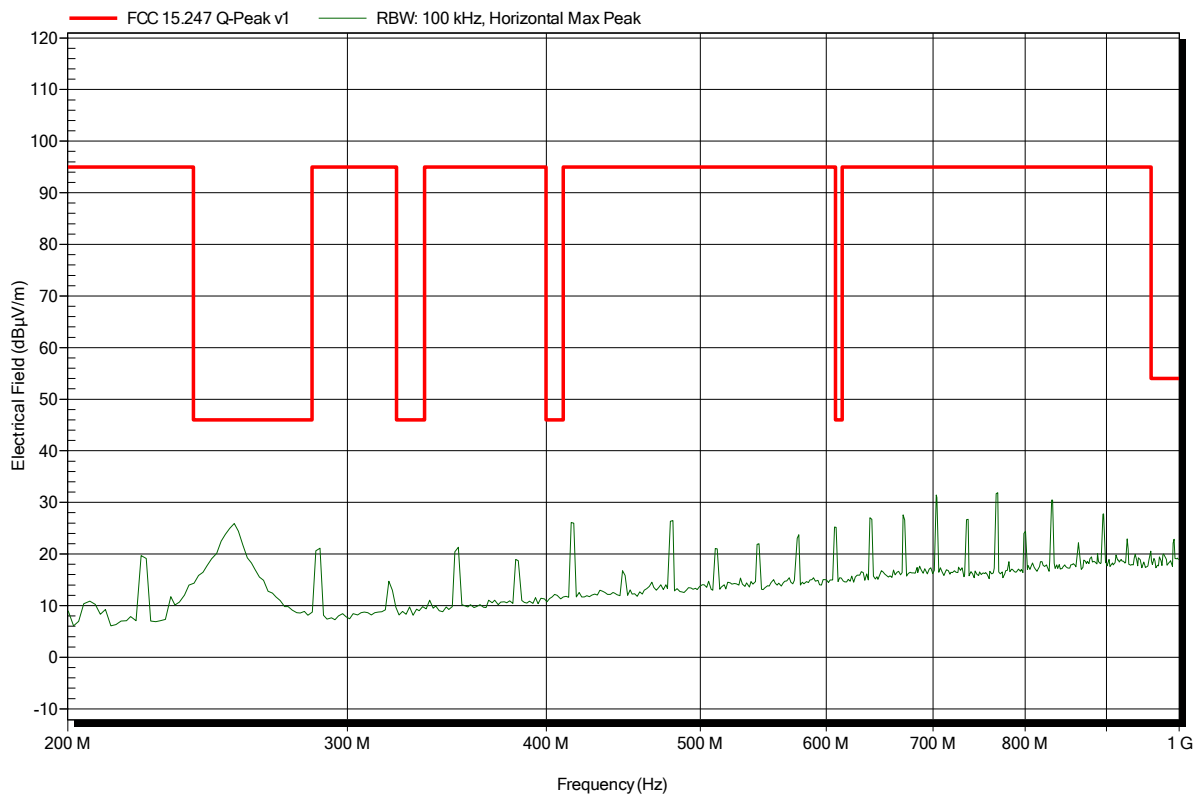


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3 m
Mode:	TX; BT-BR; CH: 78; 2480 MHz; DUT-TX-Mode; DH5
Test Date:	2015-02-26
Note:	EUT vertical

Index 144

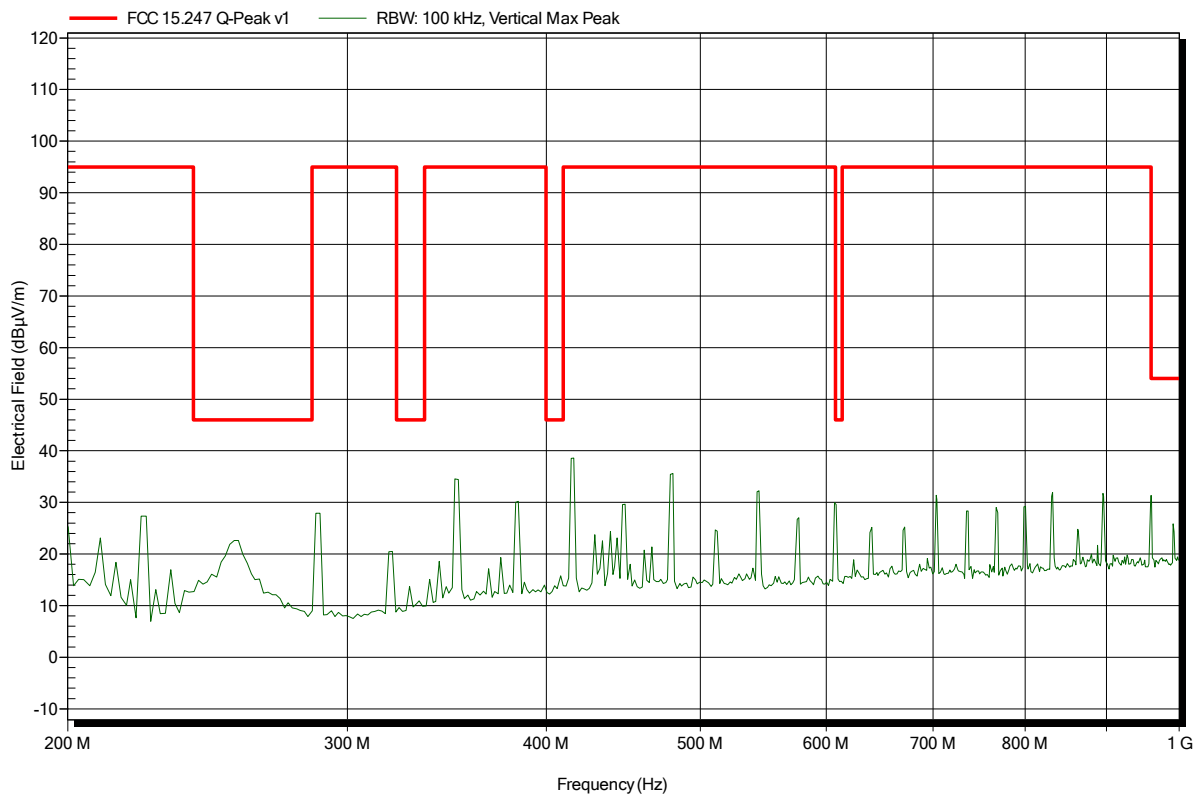


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3 m
Mode:	TX; BT-BR; CH: 78; 2480 MHz; DUT-TX-Mode; DH5
Test Date:	2015-02-26
Note:	EUT vertical

Index 147

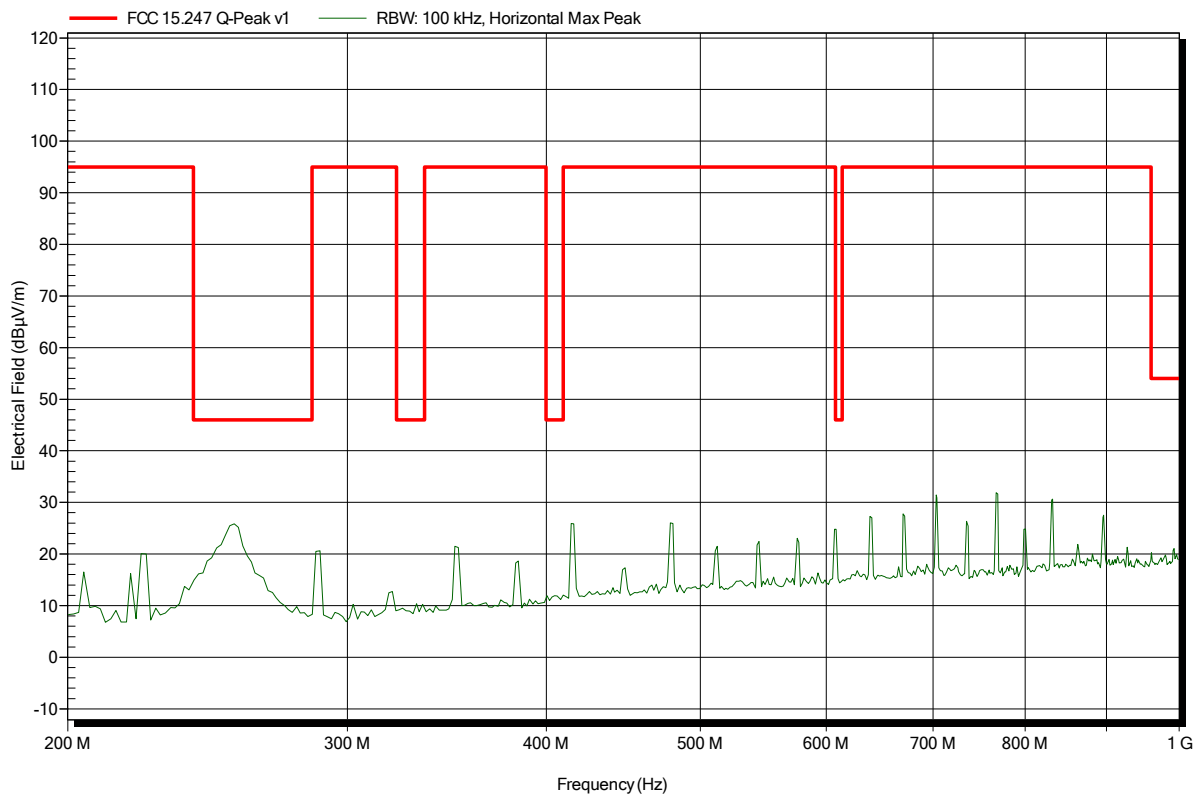


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3 m
 Mode: TX; BT-BR; CH: 0; 2402 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-25
 Note: EUT vertical

Index 106

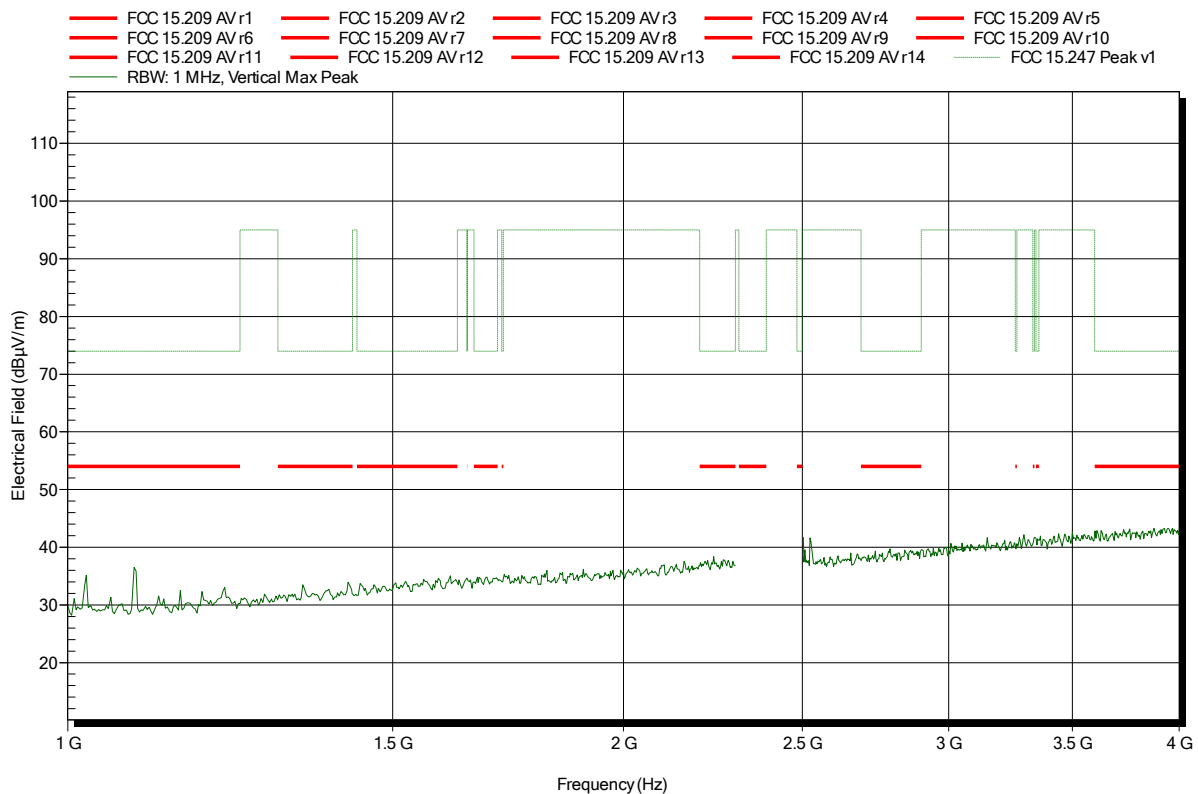


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m
 Mode: TX; BT-BR; CH: 0; 2402 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-25
 Note: EUT vertical

Index 115

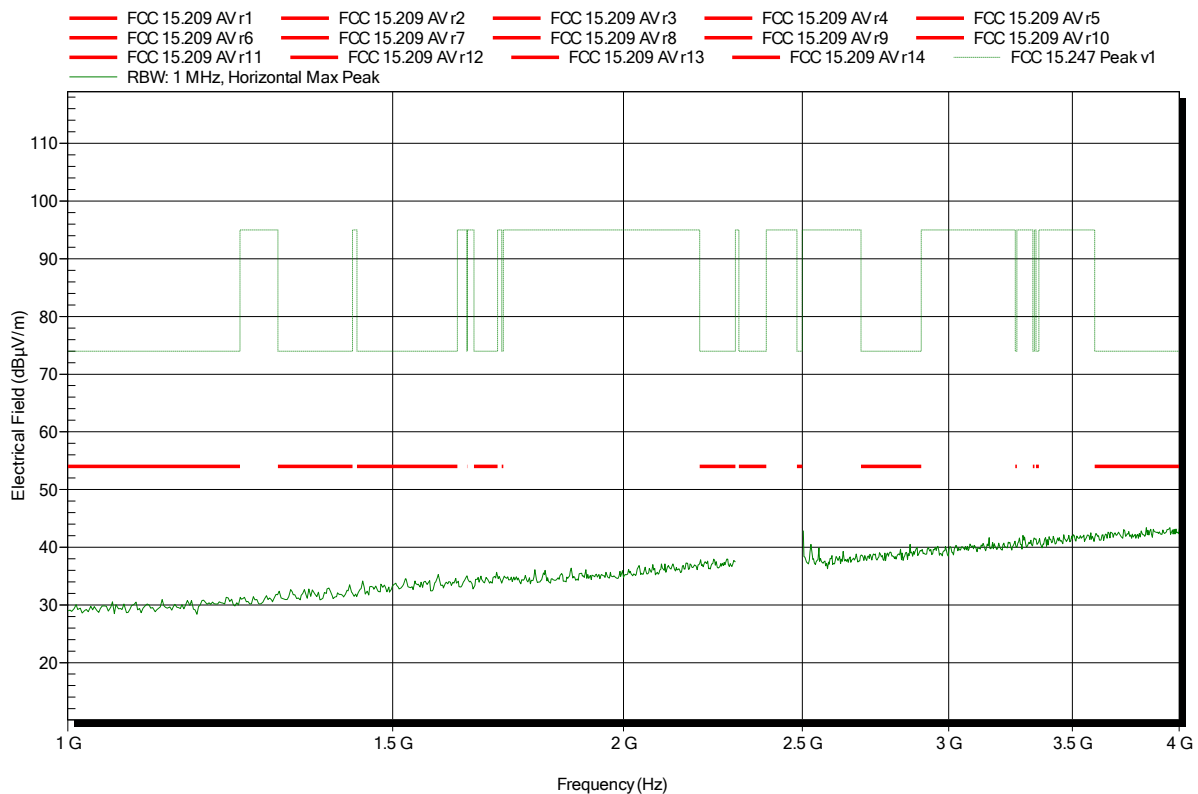


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3 m
 Mode: TX; BT-BR; CH: 39; 2441 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-25
 Note: EUT vertical

Index 107

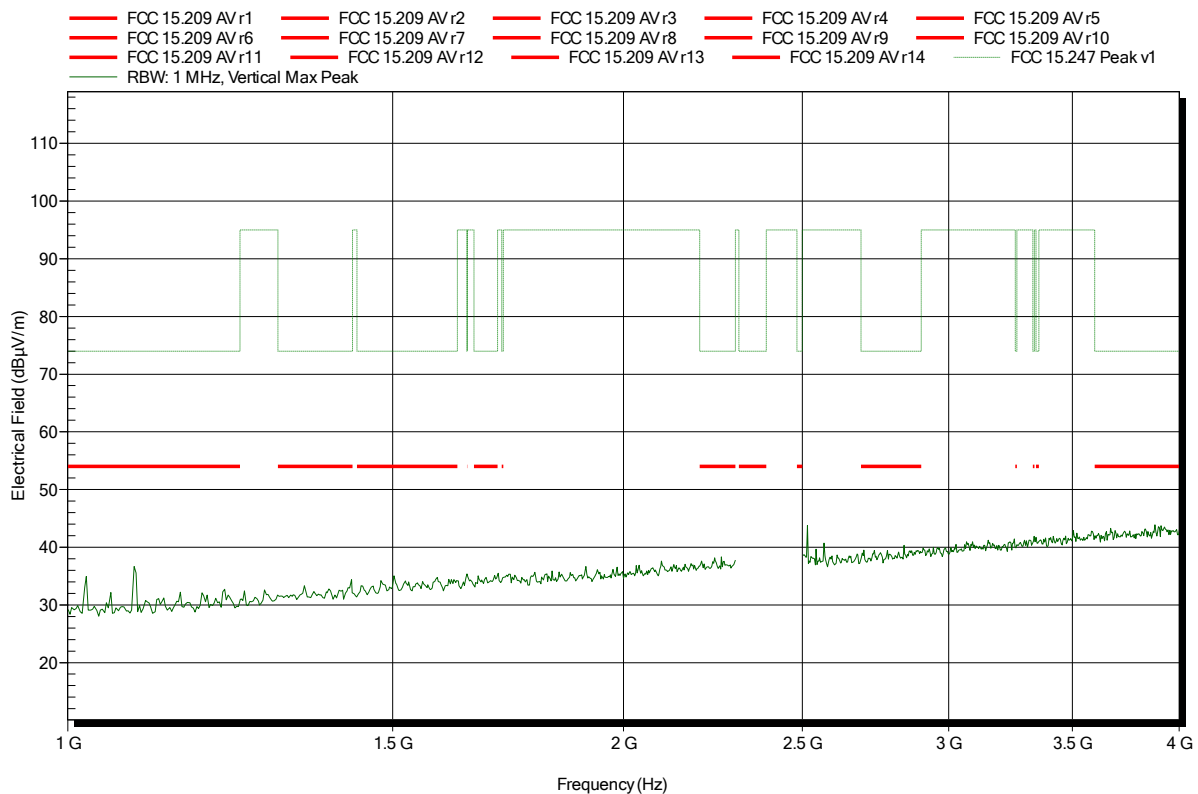


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m
 Mode: TX; BT-BR; CH: 39; 2441 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 118

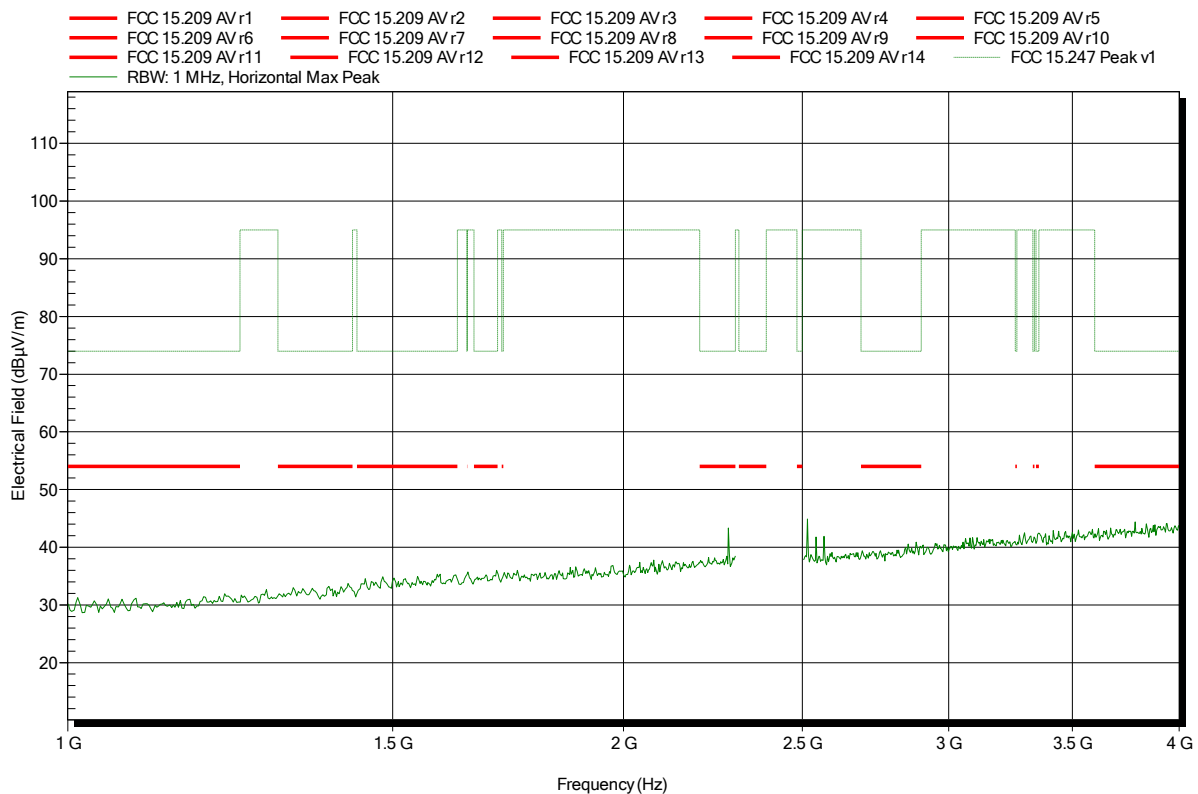


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3 m
 Mode: TX; BT-BR; CH: 78; 2480 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-25
 Note: EUT vertical

Index 108

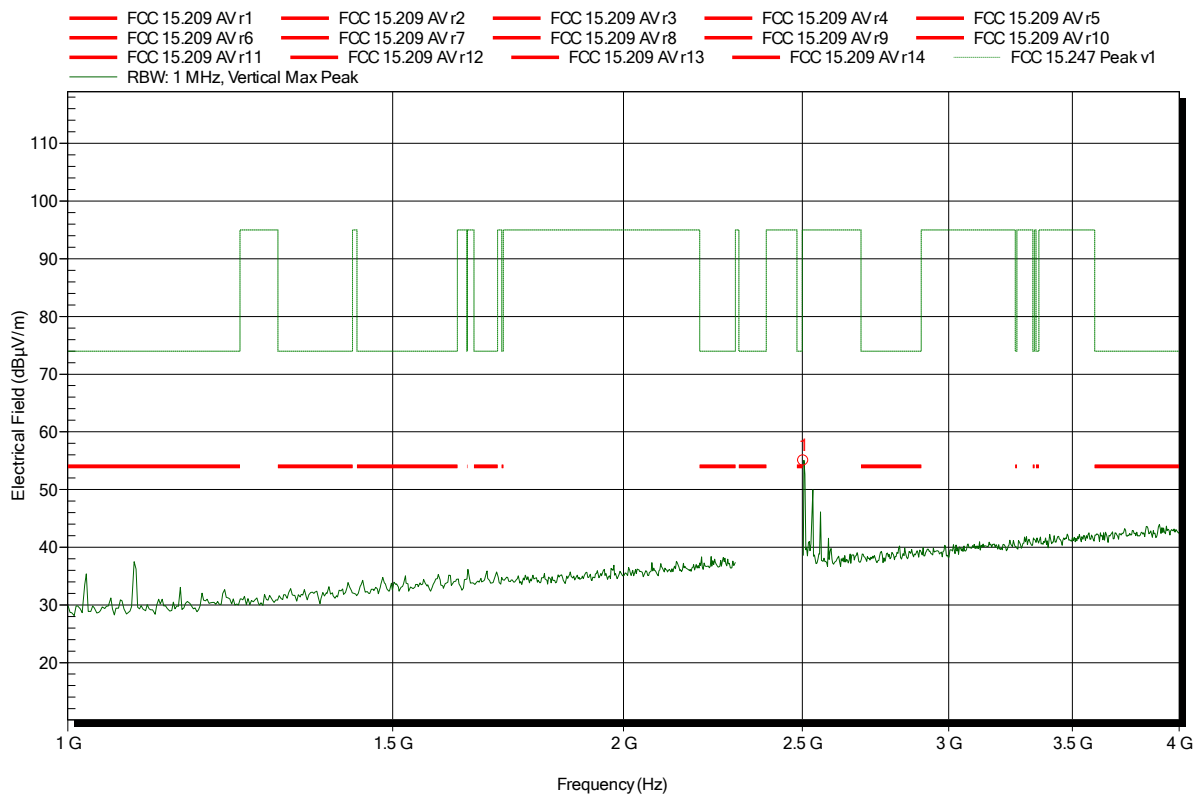

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.503 GHz	55.04 dBµV/m	95 dBµV/m	-39.96 dB	Pass

Test Report No.: GOM-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m
 Mode: TX; BT-BR; CH: 78; 2480 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 121

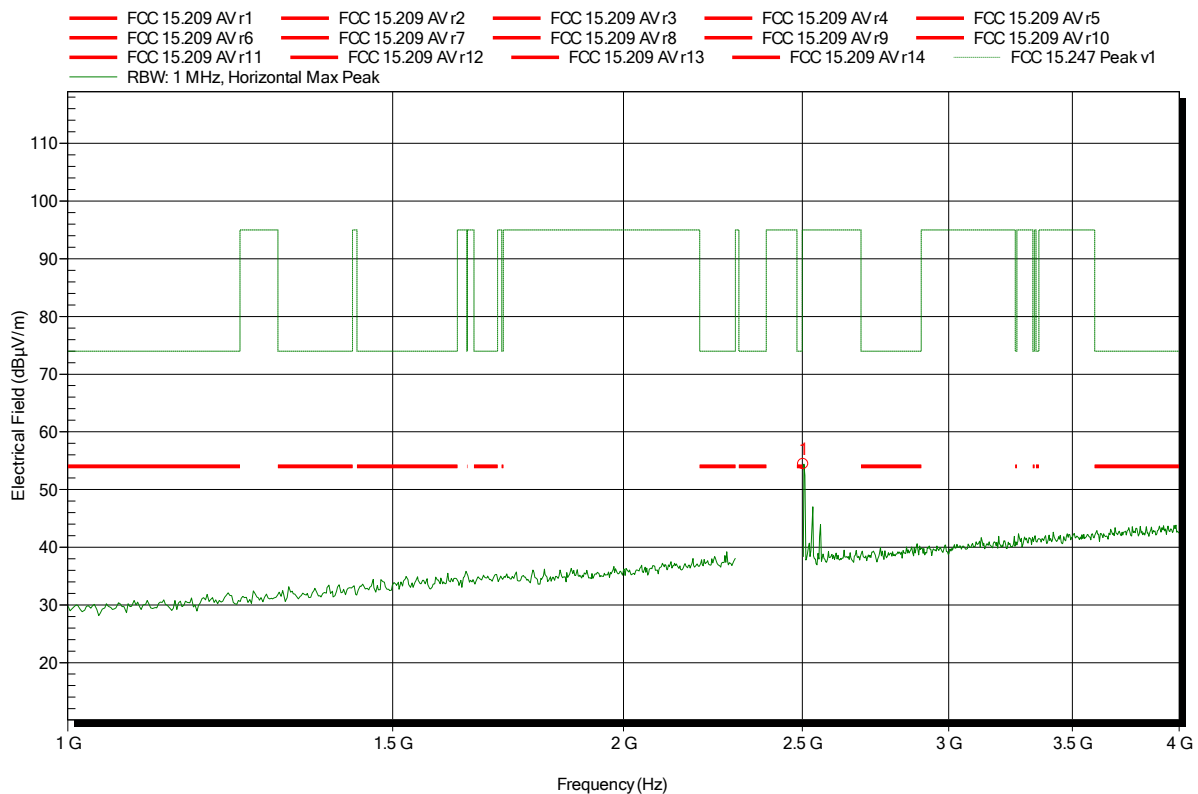


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.503 GHz	54.41 dBµV/m	95 dBµV/m	-40.59 dB	Pass

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	3 m converted to 3m
Mode:	TX; BT-BR; CH: 0; 2402 MHz; DUT-TX-Mode; DH5
Test Date:	2015-02-25
Note:	EUT vertical; lower bandedge

Index 109

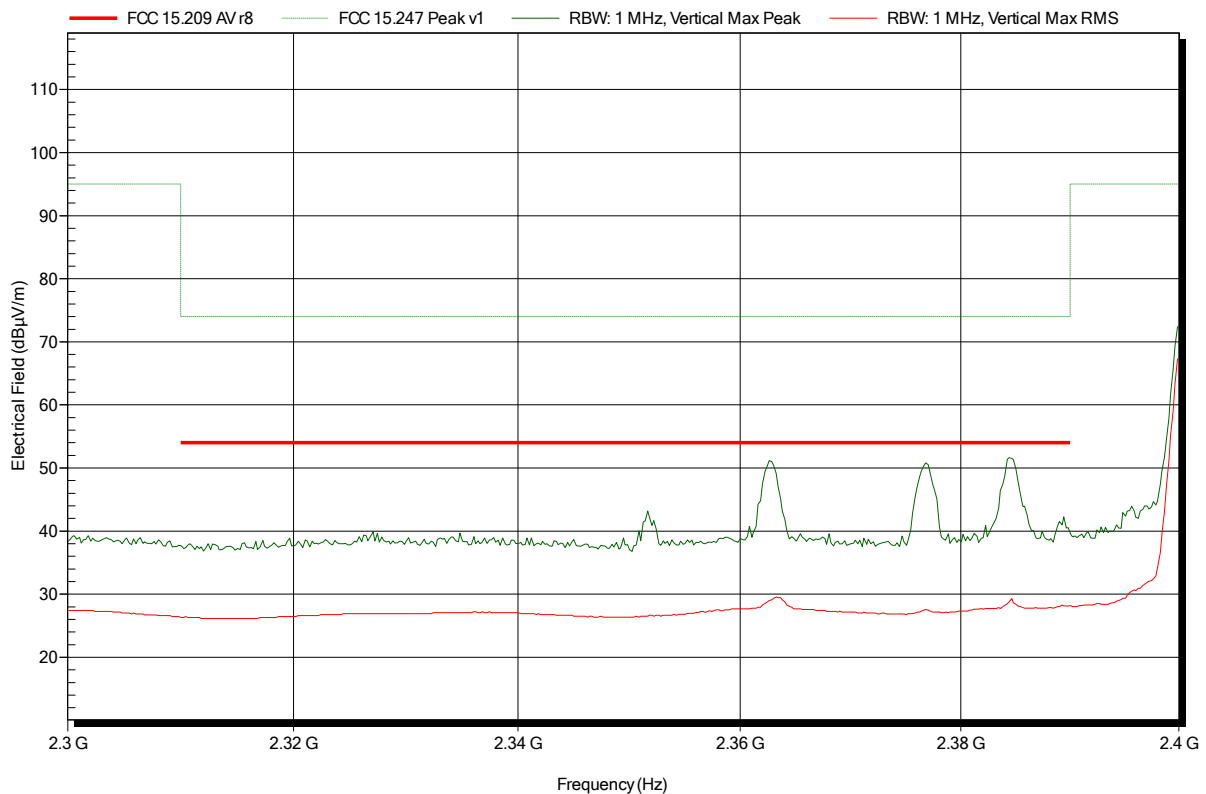


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-BR; CH: 0; 2402 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-25
 Note: EUT vertical; lower bandedge

Index 116

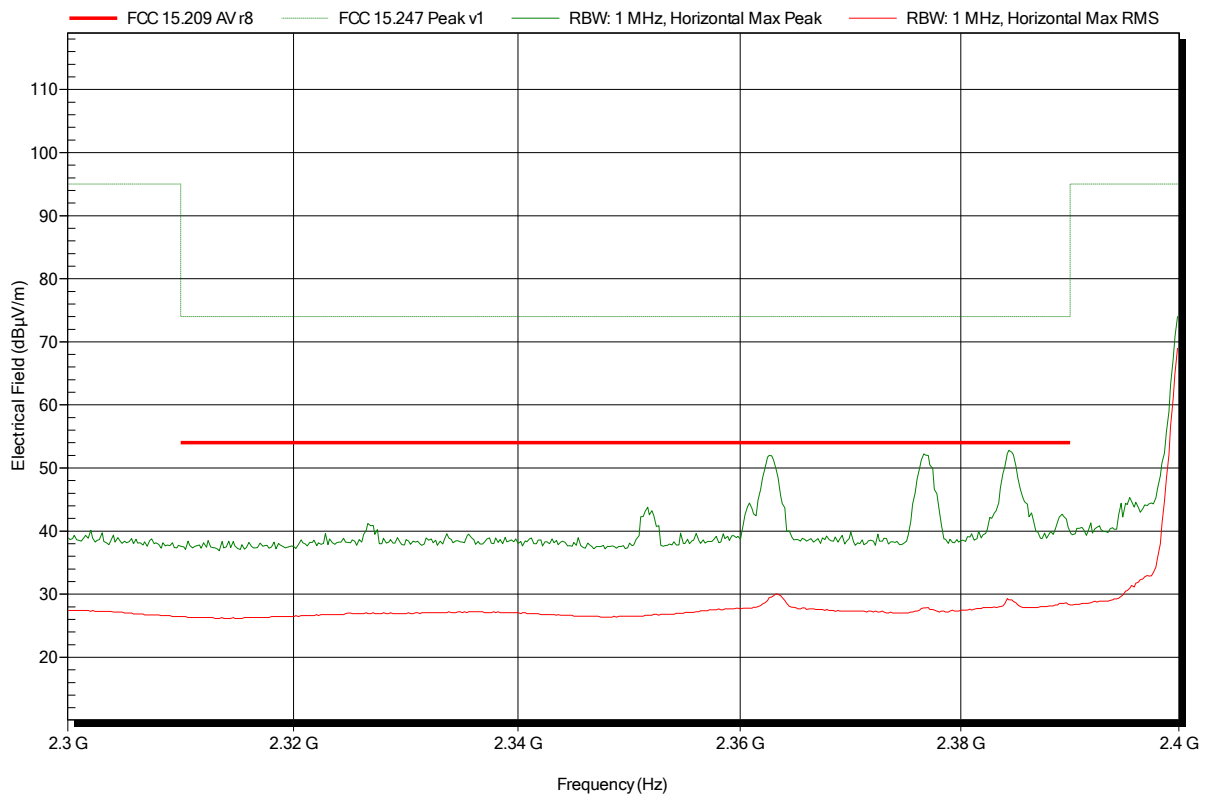


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	3 m converted to 3m
Mode:	TX; BT-BR; CH: 39; 2441 MHz; DUT-TX-Mode; DH5
Test Date:	2015-02-25
Note:	EUT vertical; lower bandedge

Index 111

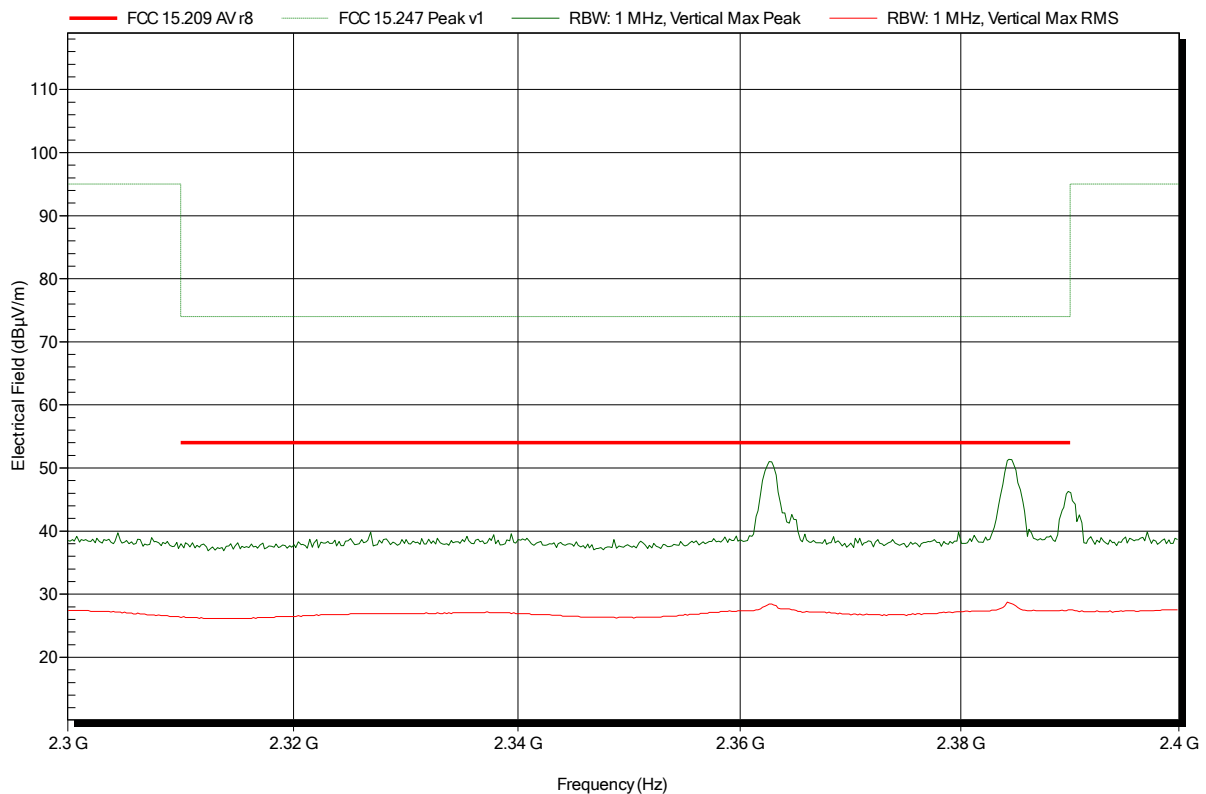


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-BR; CH: 39; 2441 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical; lower bandedge

Index 119

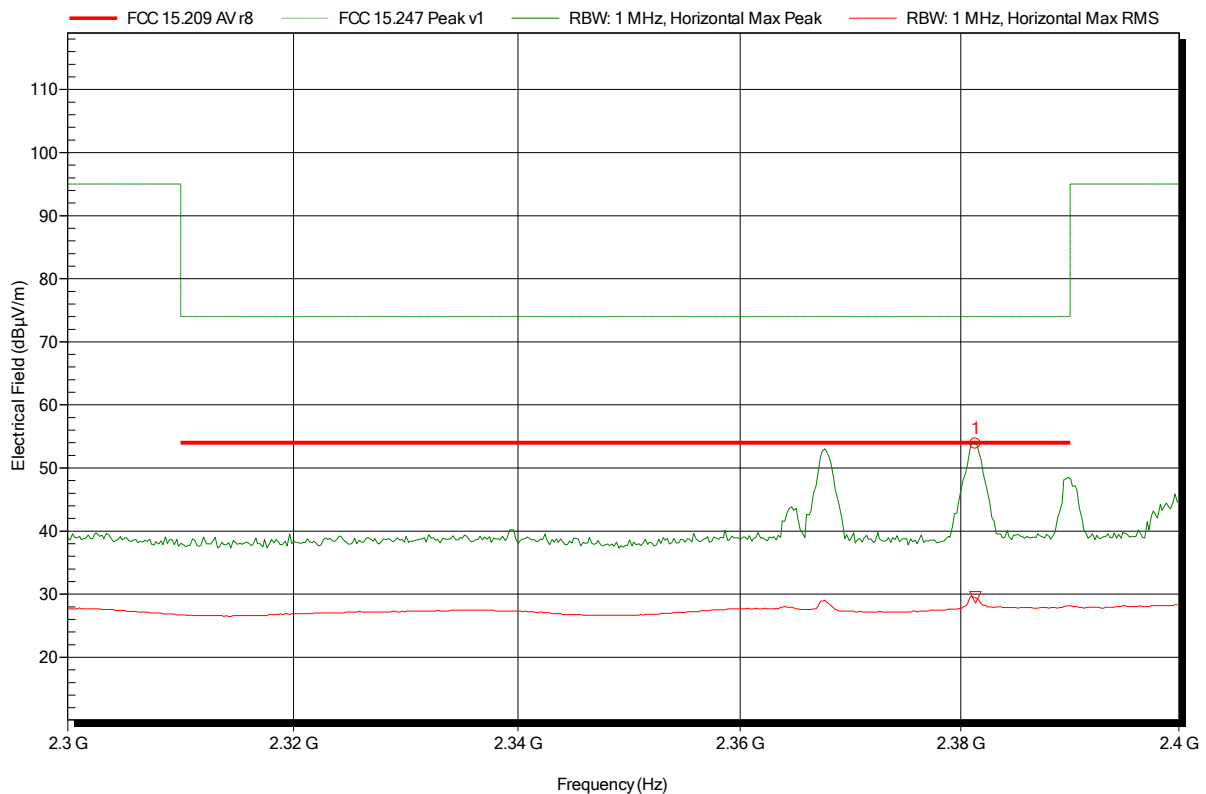


Frequency 2.381 GHz	Peak 53.87 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -20.13 dB	Peak Status Pass
Frequency 2.381 GHz	RMS 29.52 dBµV/m	RMS Limit 54 dBµV/m	RMS Difference -24.48 dB	RMS Status Pass

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-BR; CH: 78; 2480 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-25
 Note: EUT vertical; lower bandedge

Index 113

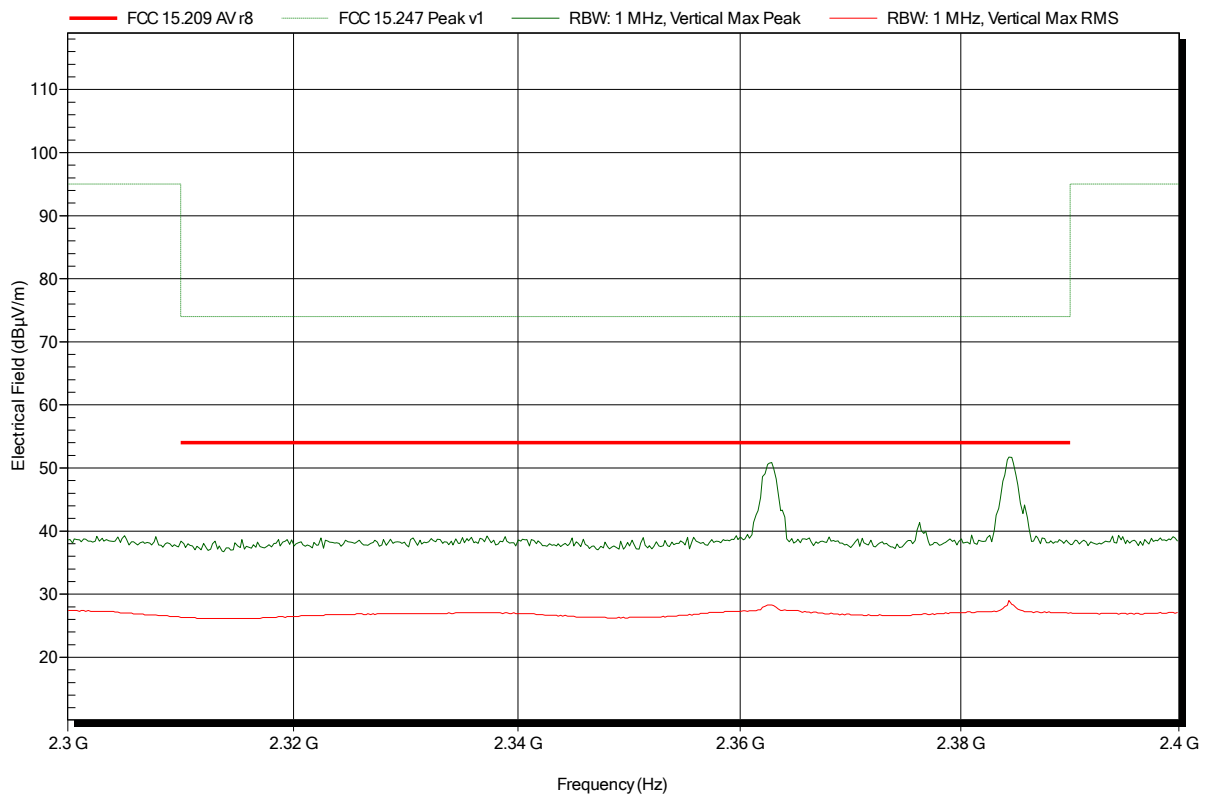


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-BR; CH: 78; 2480 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical; lower bandedge

Index 122

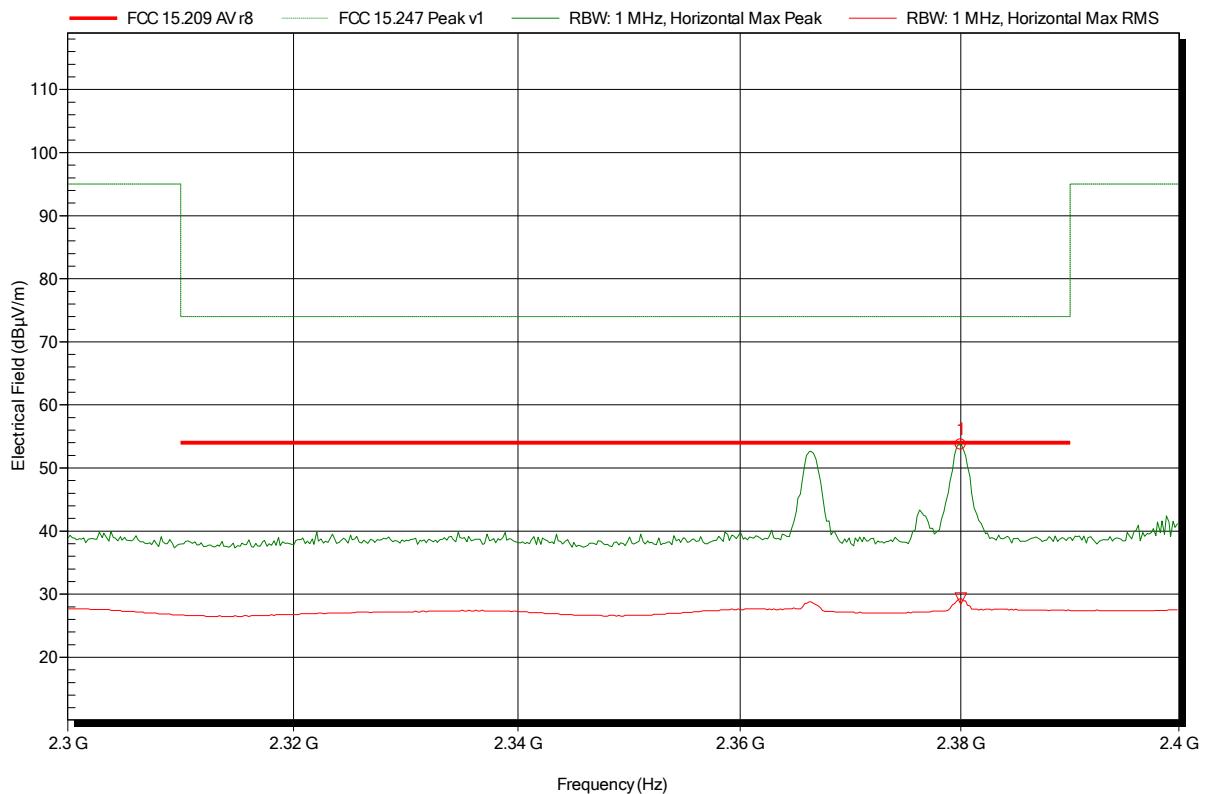


Frequency 2.38 GHz	Peak 53.7 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -20.3 dB	Peak Status Pass
Frequency 2.38 GHz	RMS 29.29 dBµV/m	RMS Limit 54 dBµV/m	RMS Difference -24.71 dB	RMS Status Pass

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-BR; CH: 0; 2402 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-25
 Note: EUT vertical; upper bandedge

Index 110

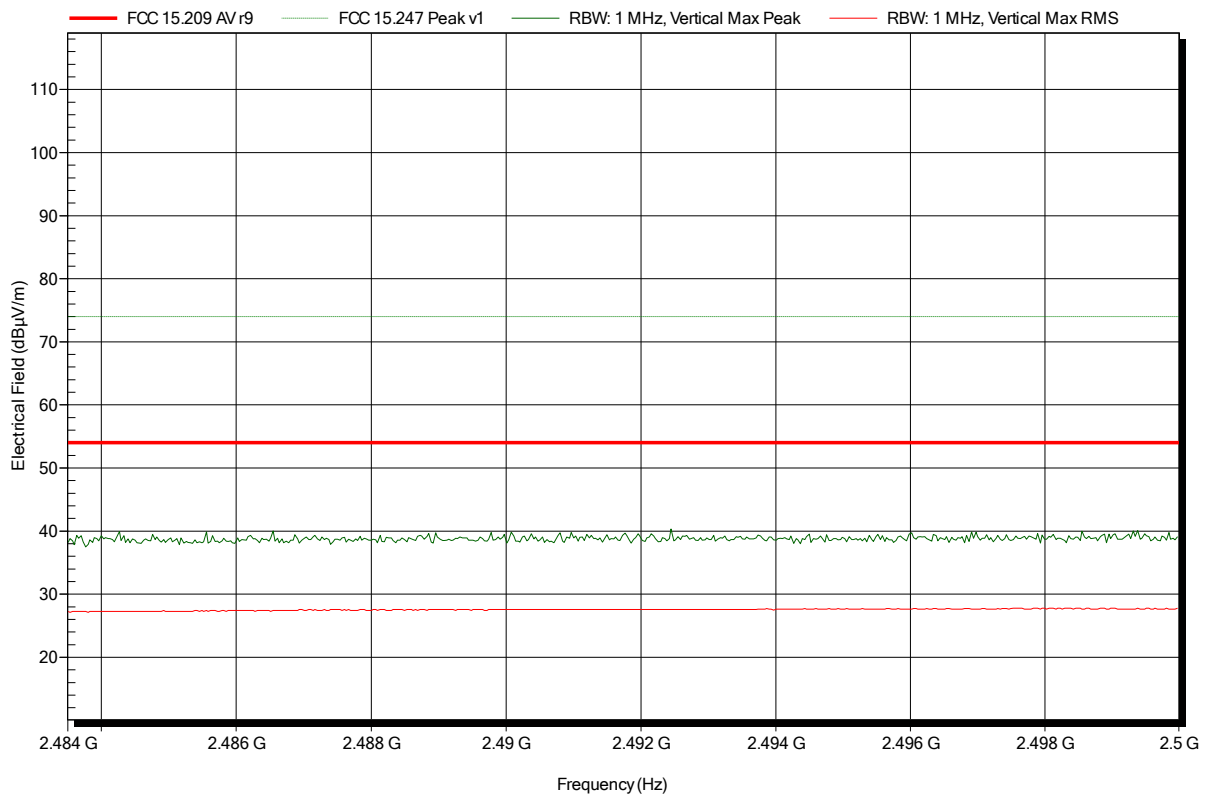


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-BR; CH: 0; 2402 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-25
 Note: EUT vertical; upper bandedge

Index 117

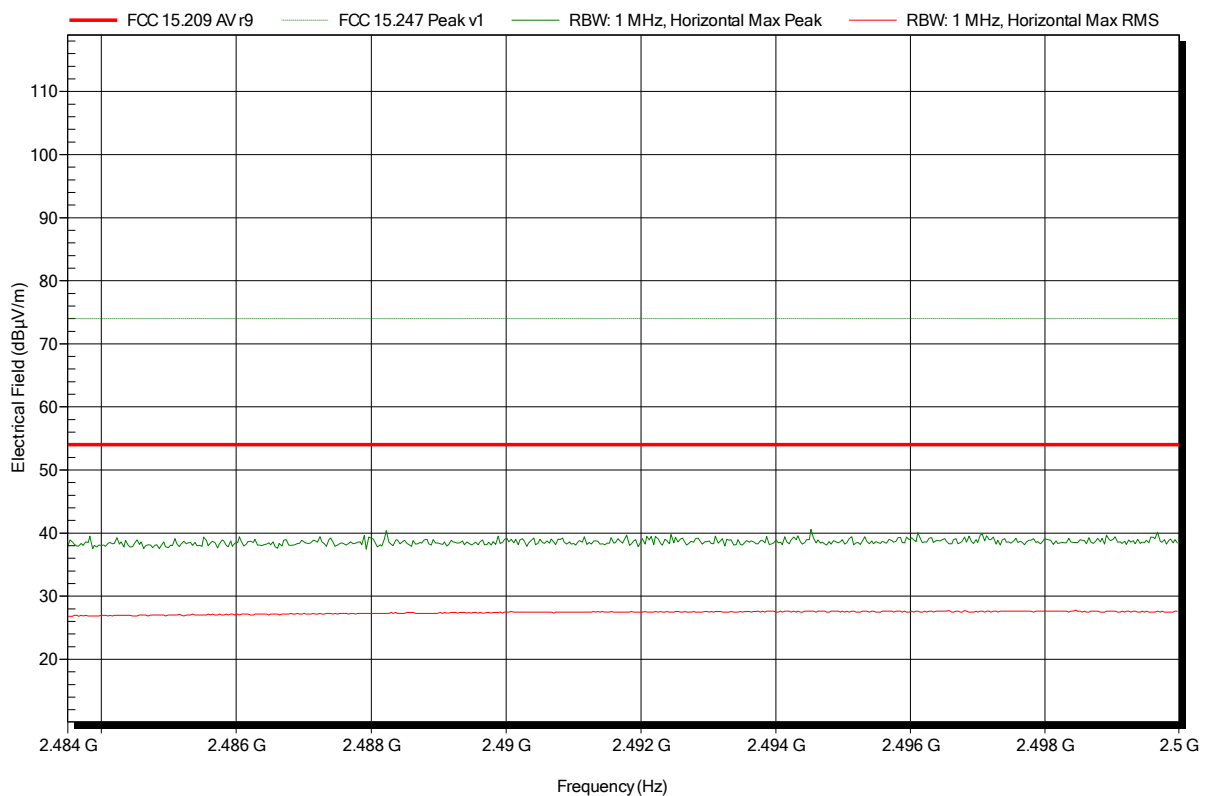


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-BR; CH: 39; 2441 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-25
 Note: EUT vertical; upper bandedge

Index 112

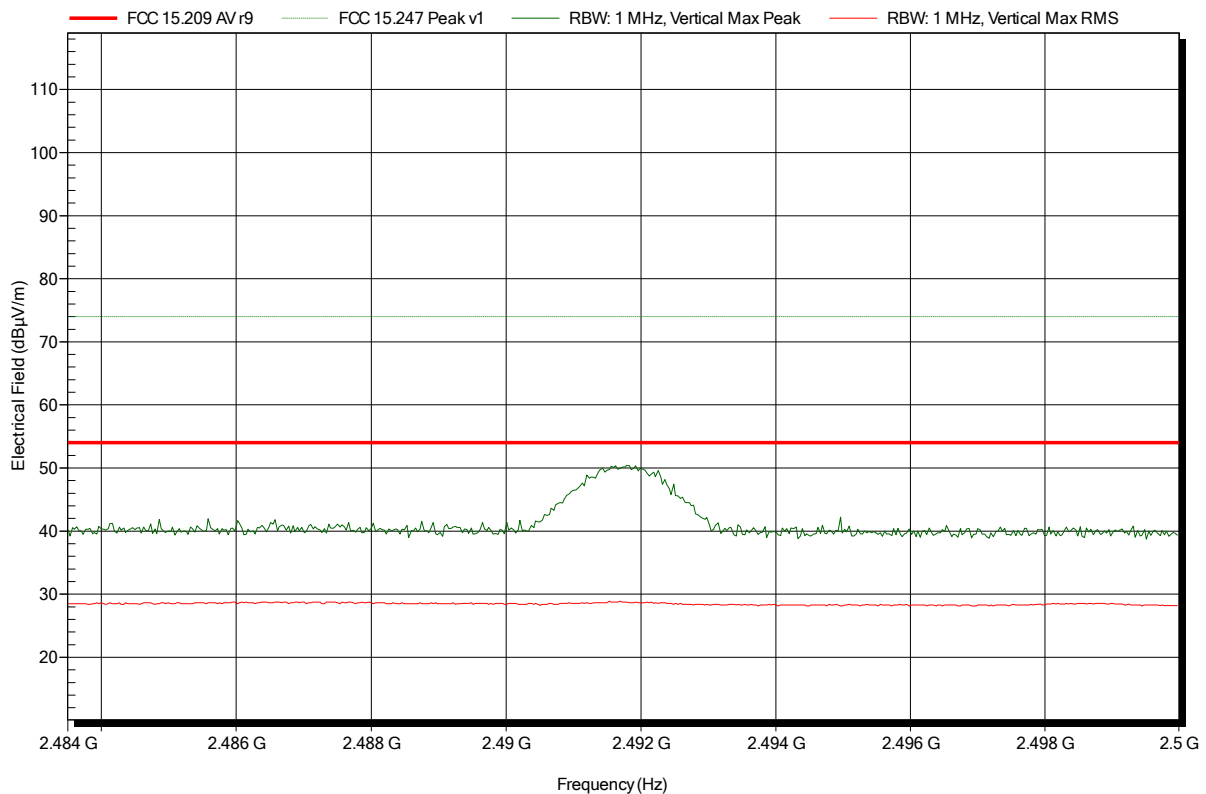


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-BR; CH: 39; 2441 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical; upper bandedge

Index 120

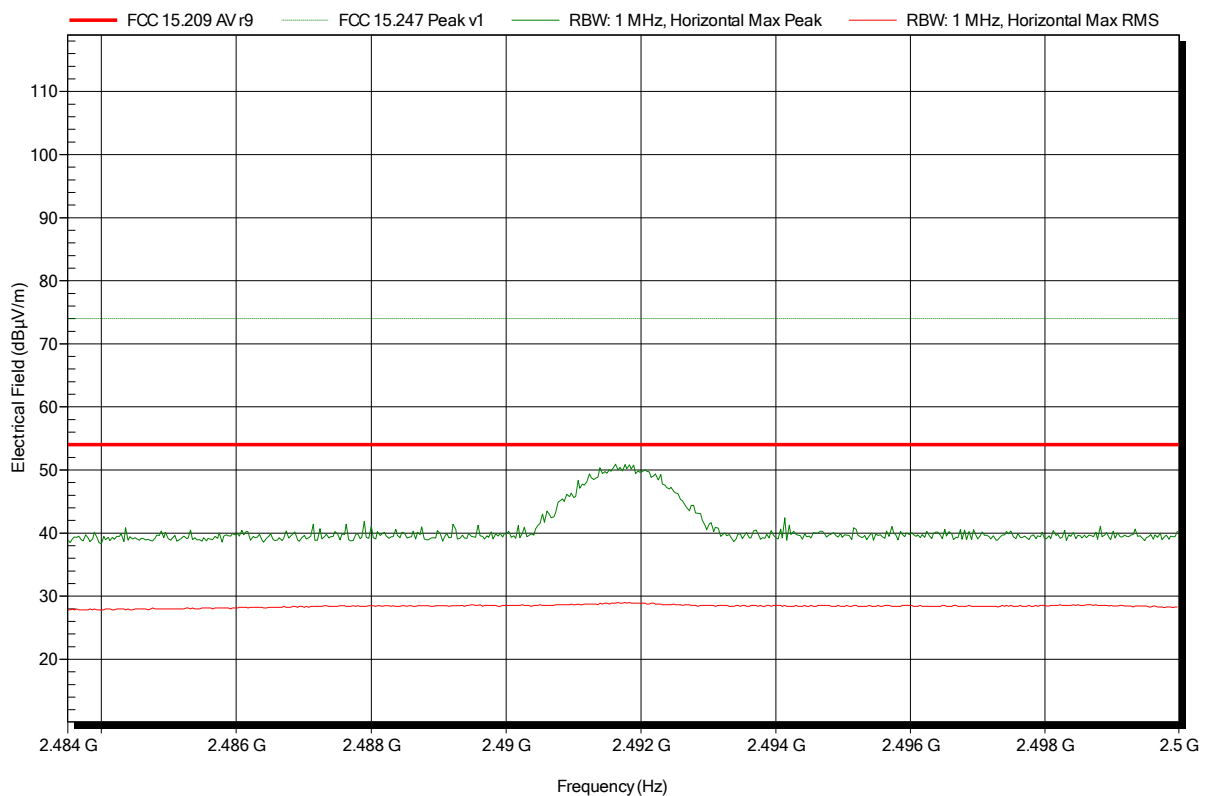


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-BR; CH: 78; 2480 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-25
 Note: EUT vertical; upper bandedge

Index 114

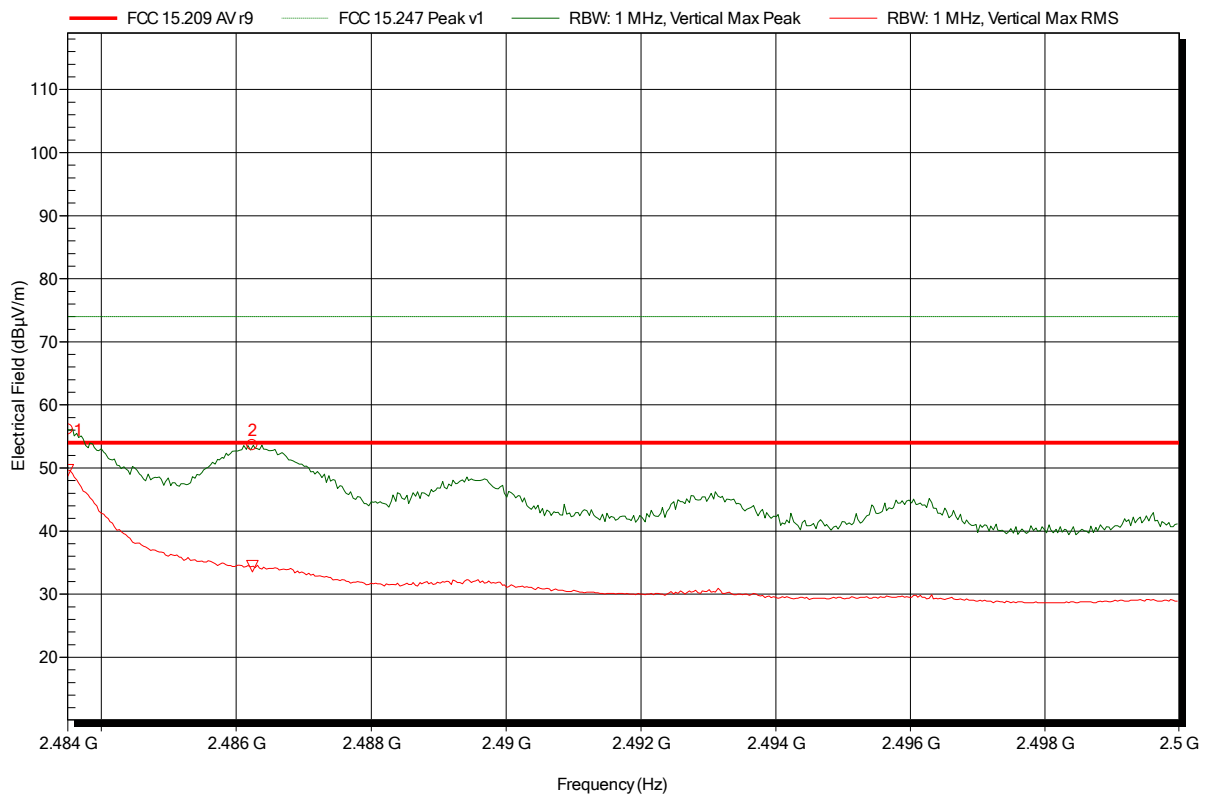

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4835 GHz	56.09 dBμV/m	74 dBμV/m	-17.91 dB	Pass
2.4862 GHz	53.63 dBμV/m	74 dBμV/m	-20.37 dB	Pass

Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4835 GHz	49.64 dBμV/m	54 dBμV/m	-4.36 dB	Pass
2.4862 GHz	34.45 dBμV/m	54 dBμV/m	-19.55 dB	Pass

Test Report No.: GOM-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-BR; CH: 78; 2480 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical; upper bandedge

Index 123

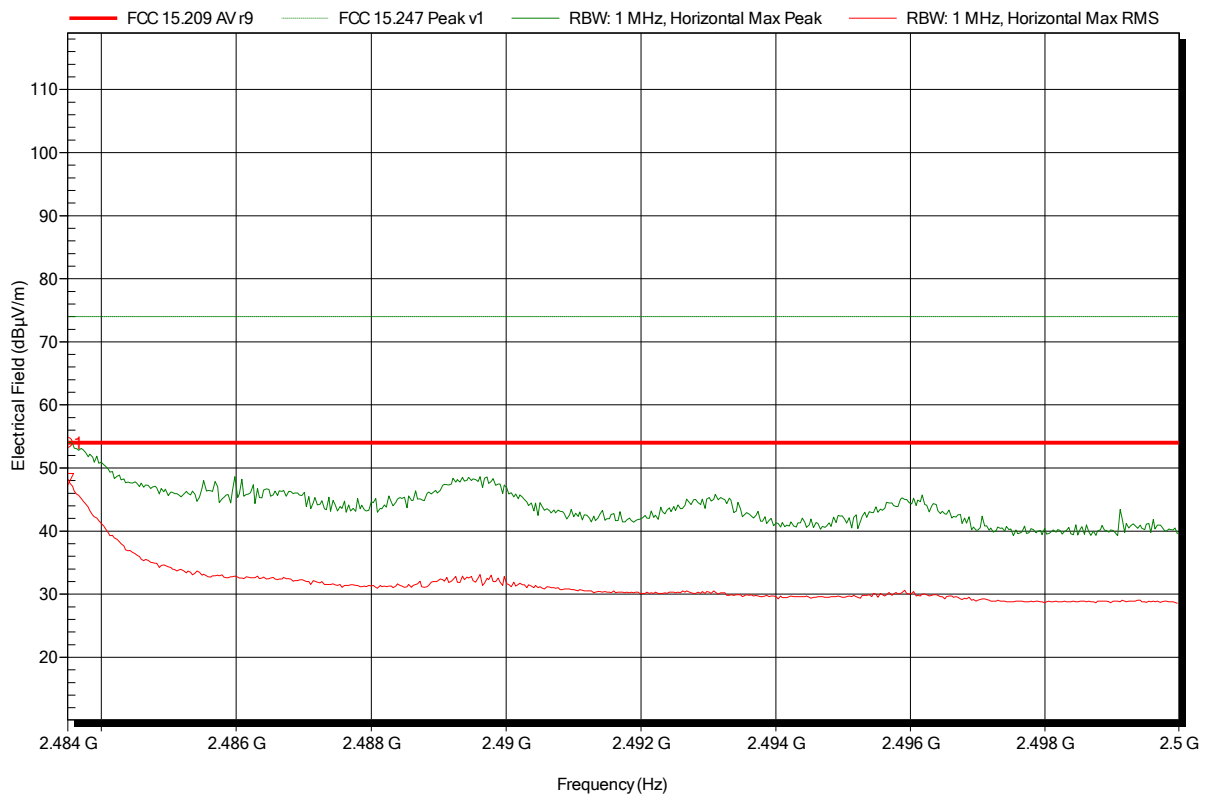

Frequency 2.4835 GHz	Peak 53.95 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -20.05 dB	Peak Status Pass
Frequency 2.4835 GHz	RMS 48.23 dBµV/m	RMS Limit 54 dBµV/m	RMS Difference -5.77 dB	RMS Status Pass

Test Report No.: GOM-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 0; 2402 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 124

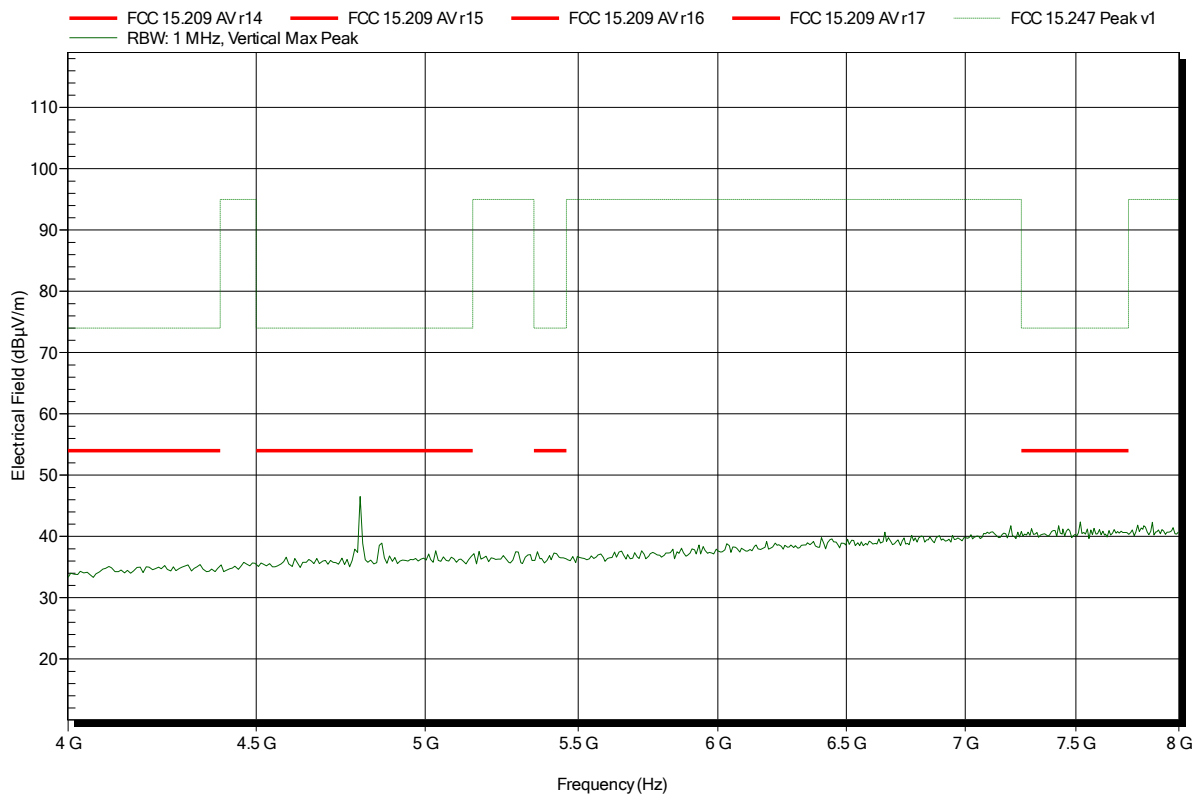


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 0; 2402 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 129

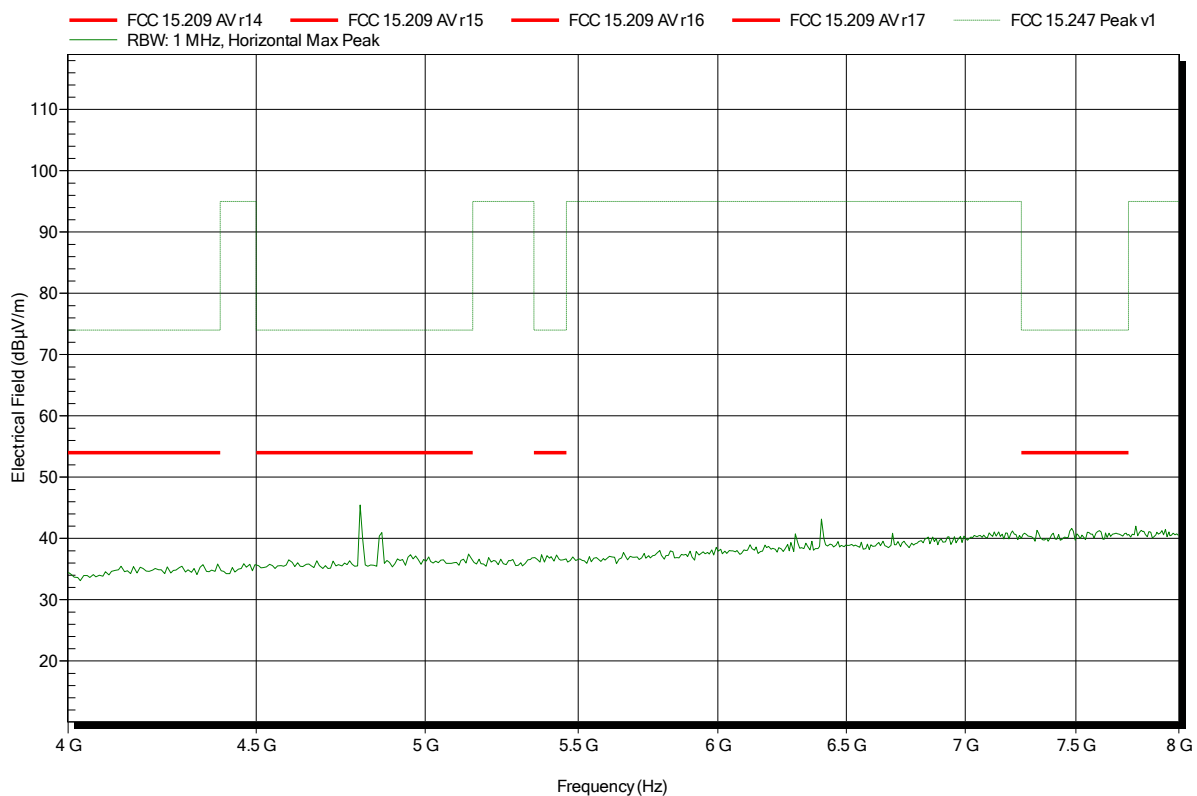

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 39; 2441 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 125

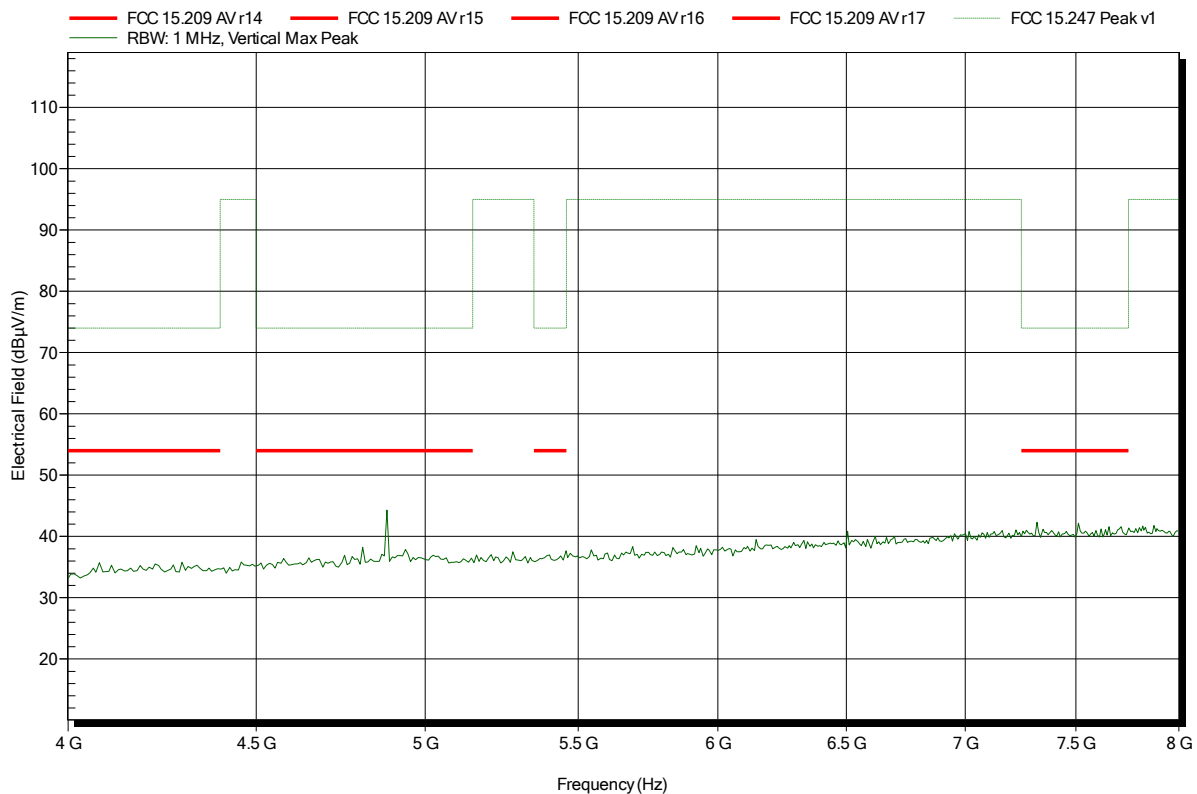


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 39; 2441 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 128

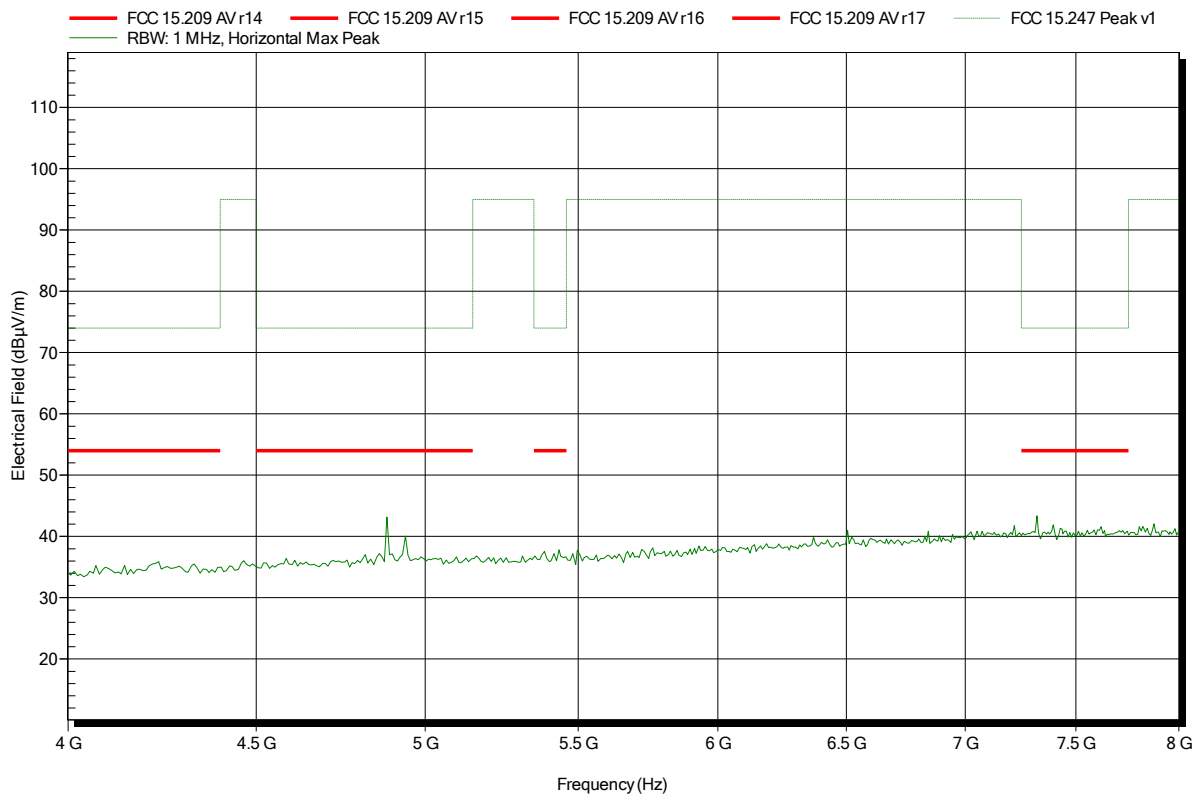


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 78; 2480 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 126

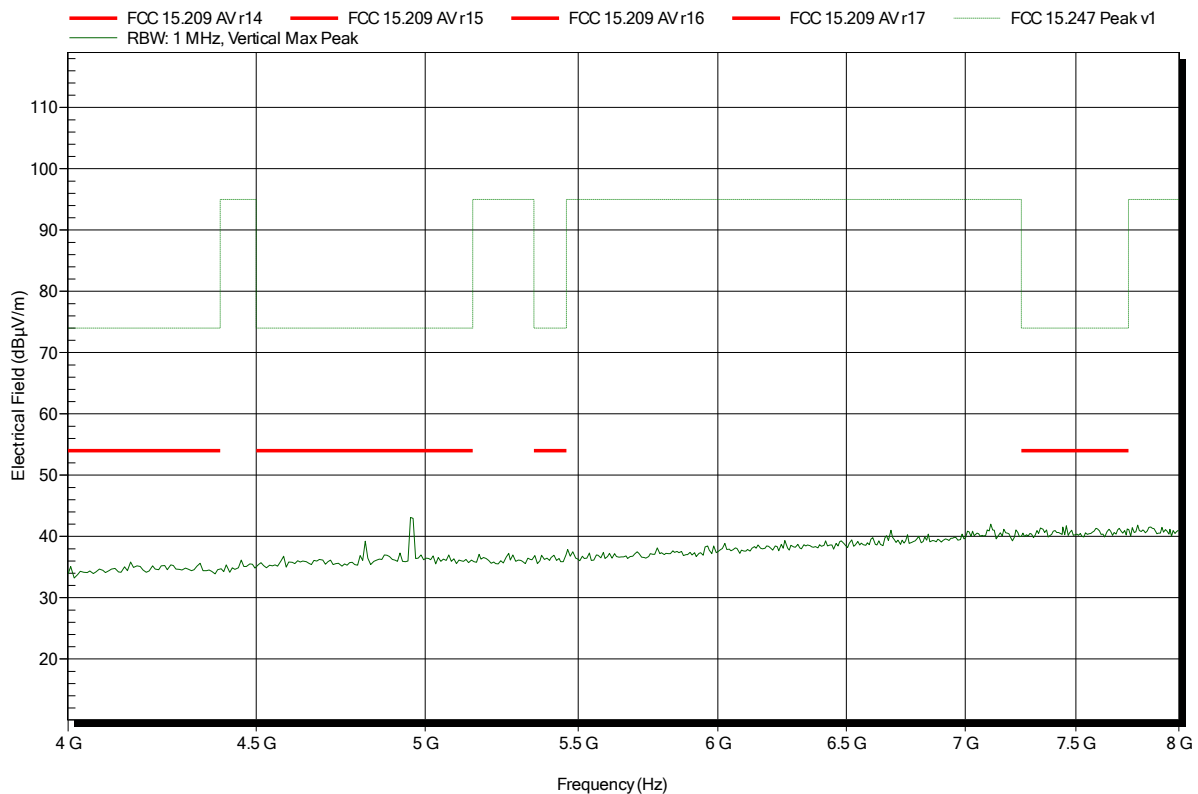


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 78; 2480 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 127

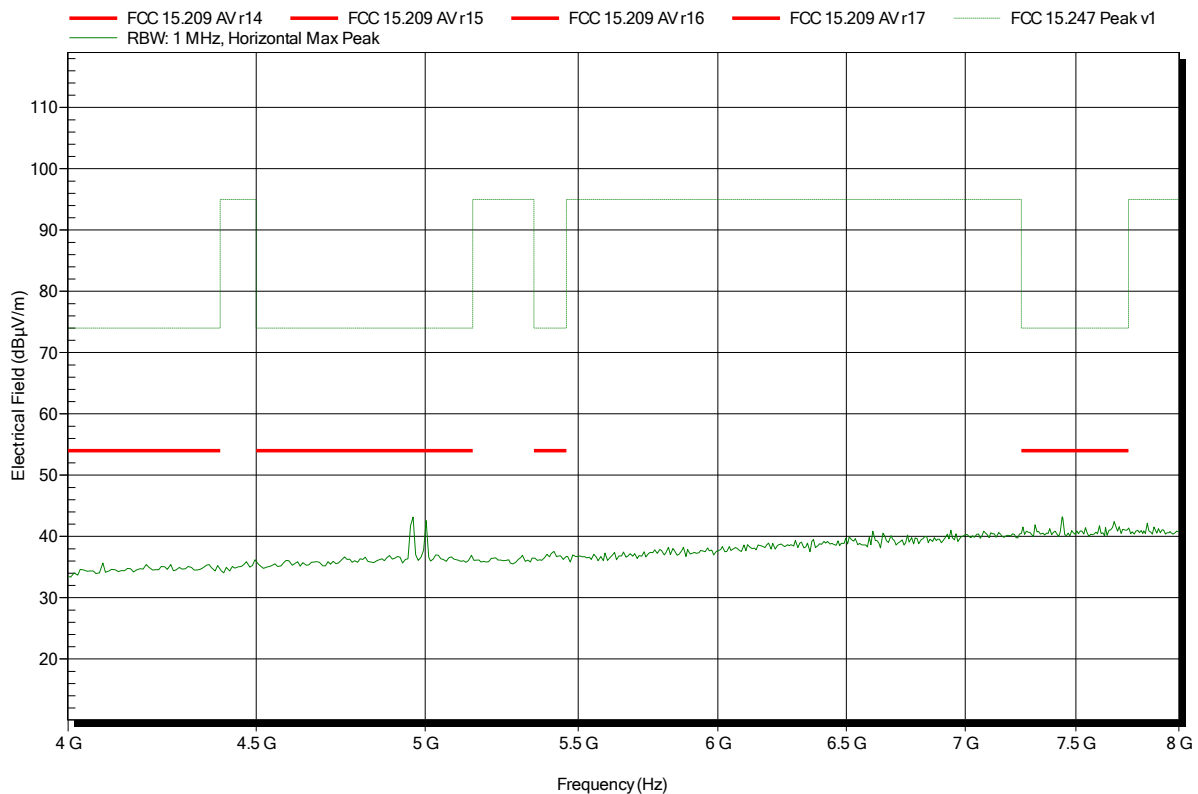


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 0; 2402 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 130

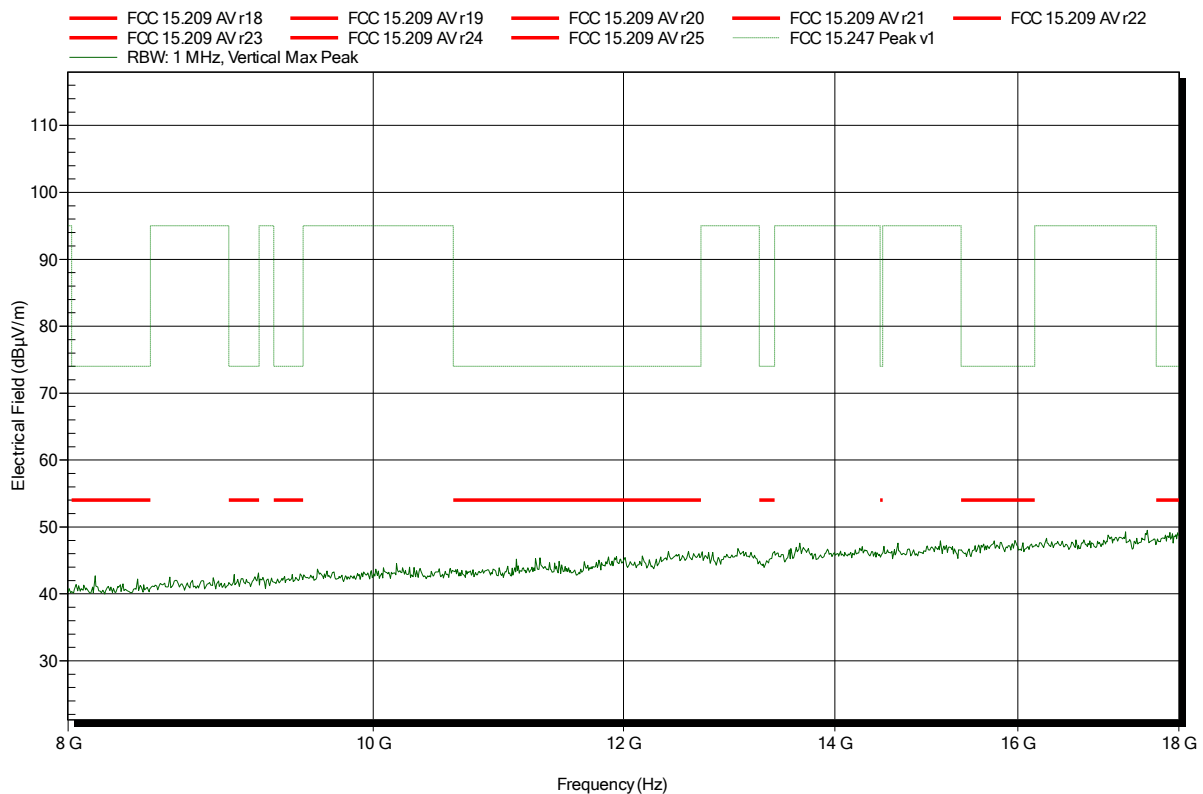


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 0; 2402 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 136

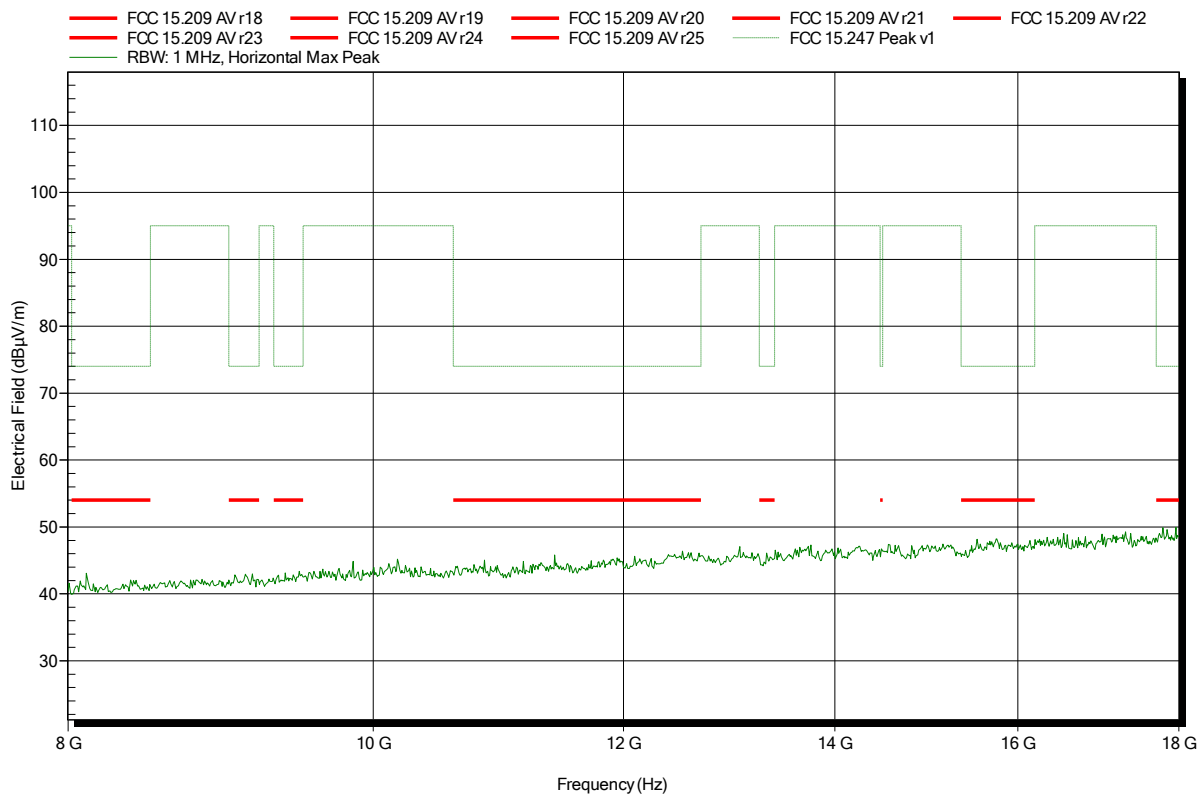


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 39; 2441 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 132

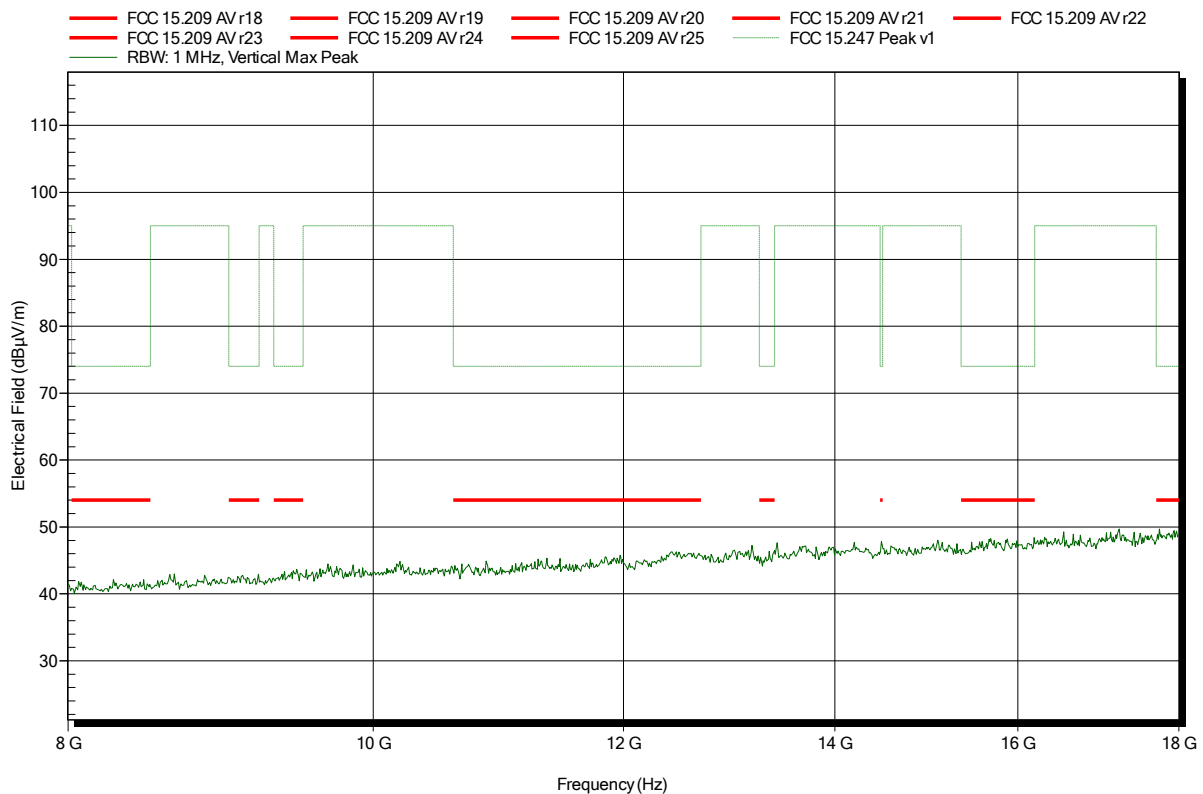


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 39; 2441 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 138

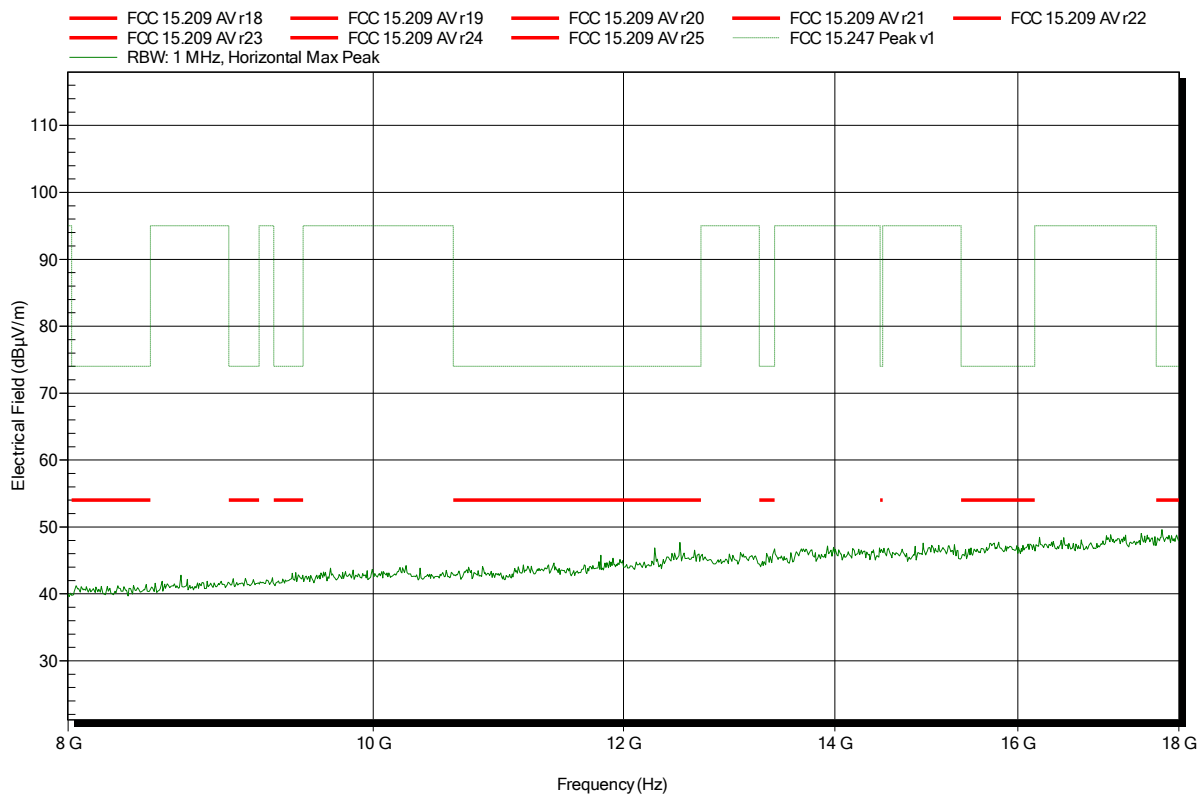


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 78; 2480 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 134

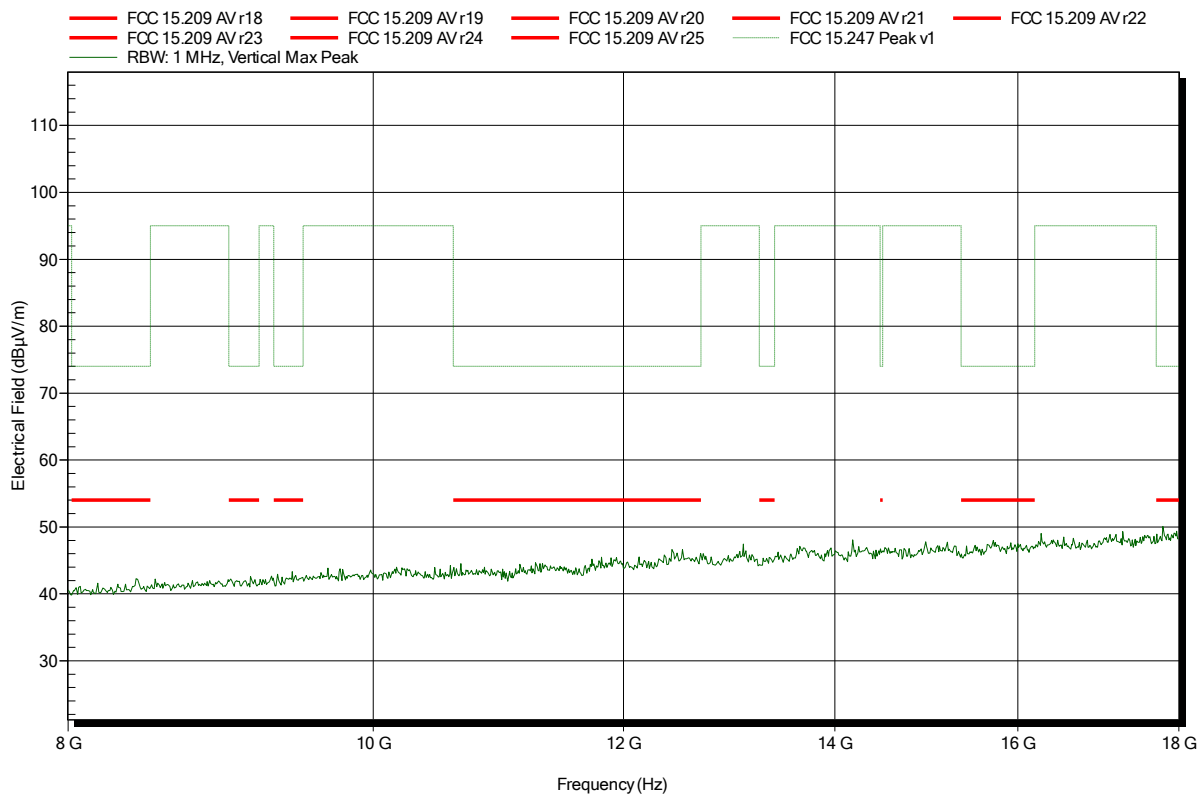


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 78; 2480 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 140

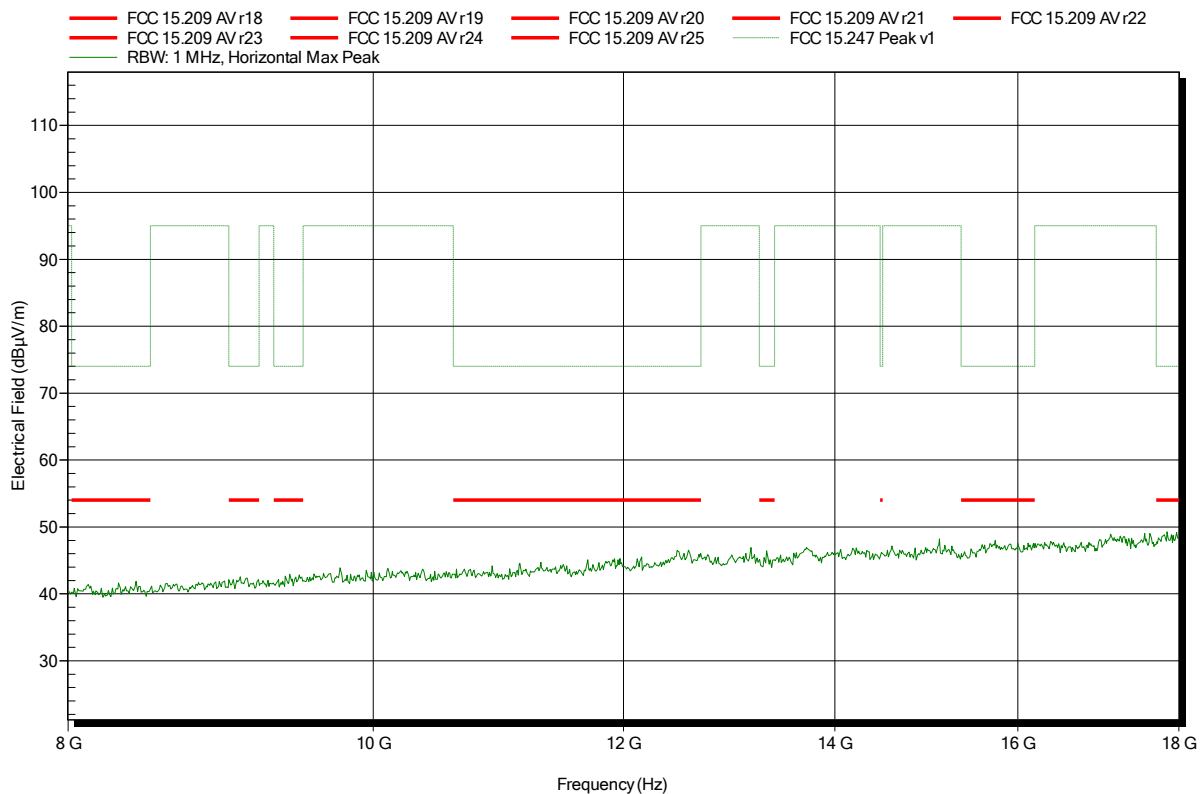


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 0; 2402 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 131

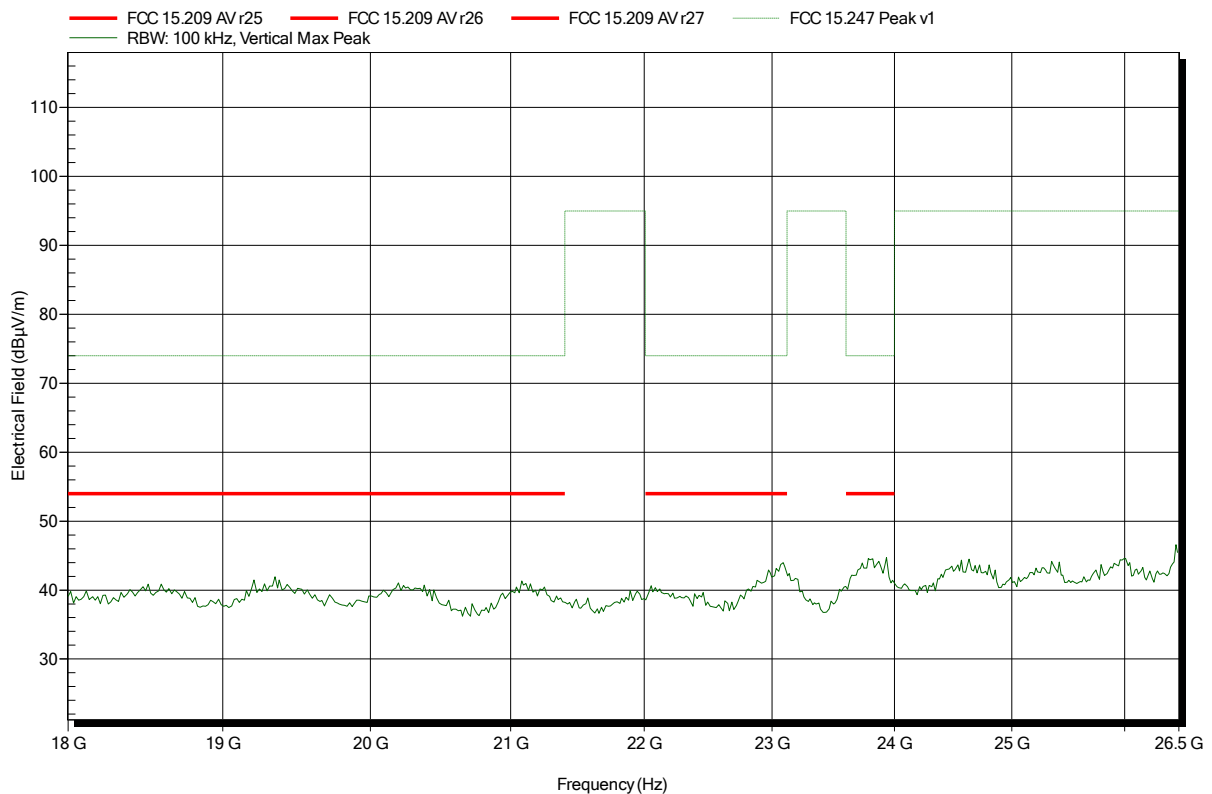


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 0; 2402 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 137

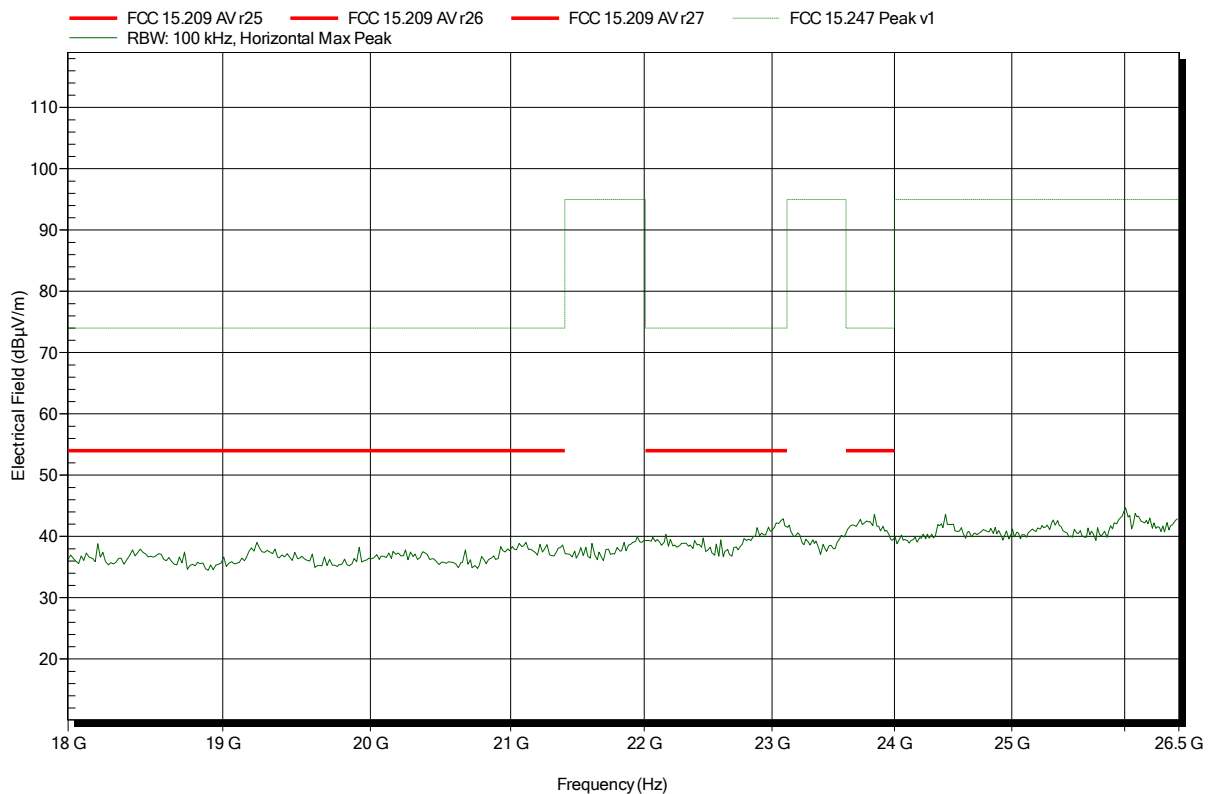


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 39; 2441 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 133

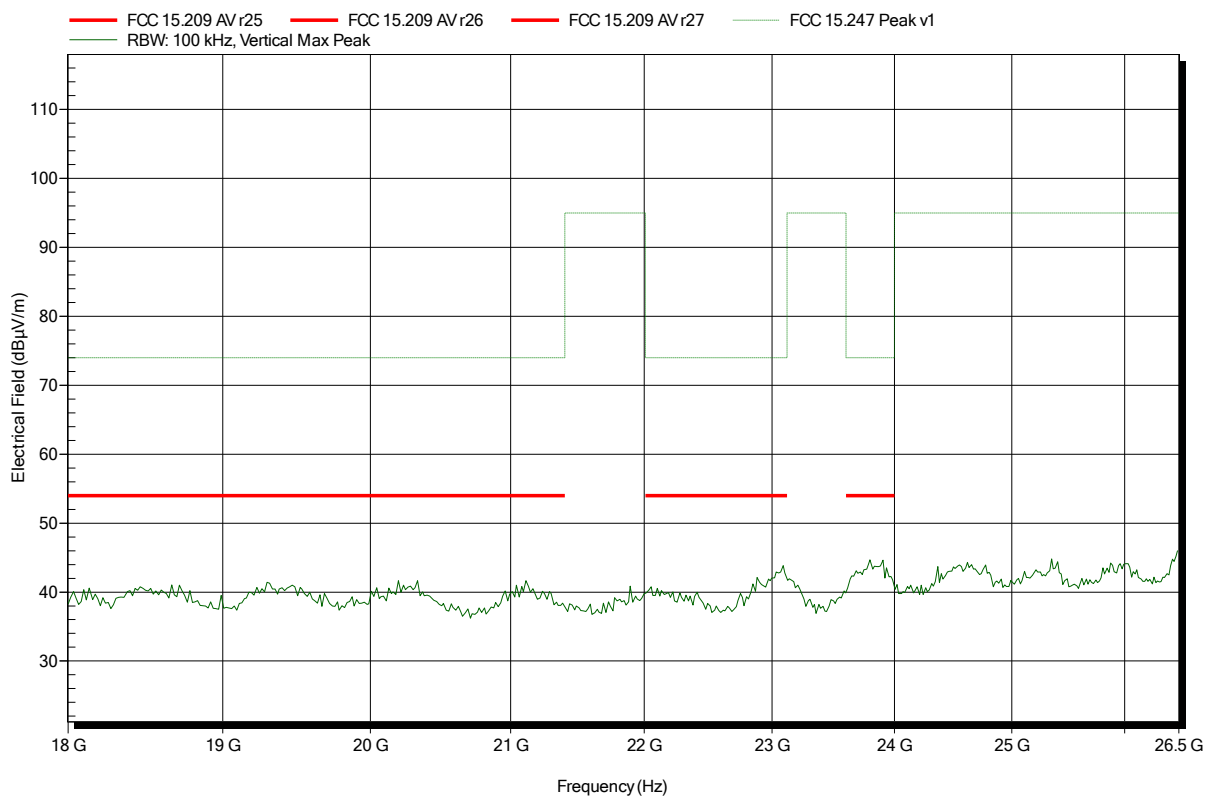

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 39; 2441 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 139

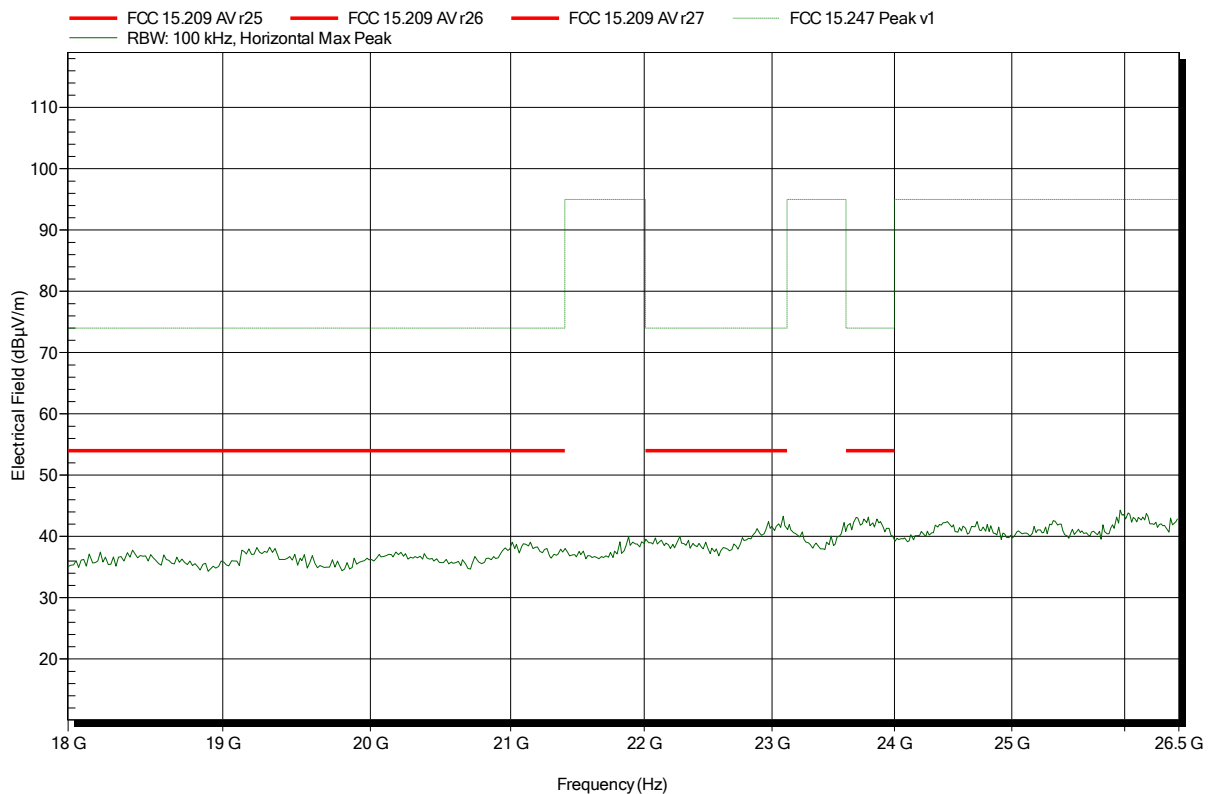


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 78; 2480 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 135

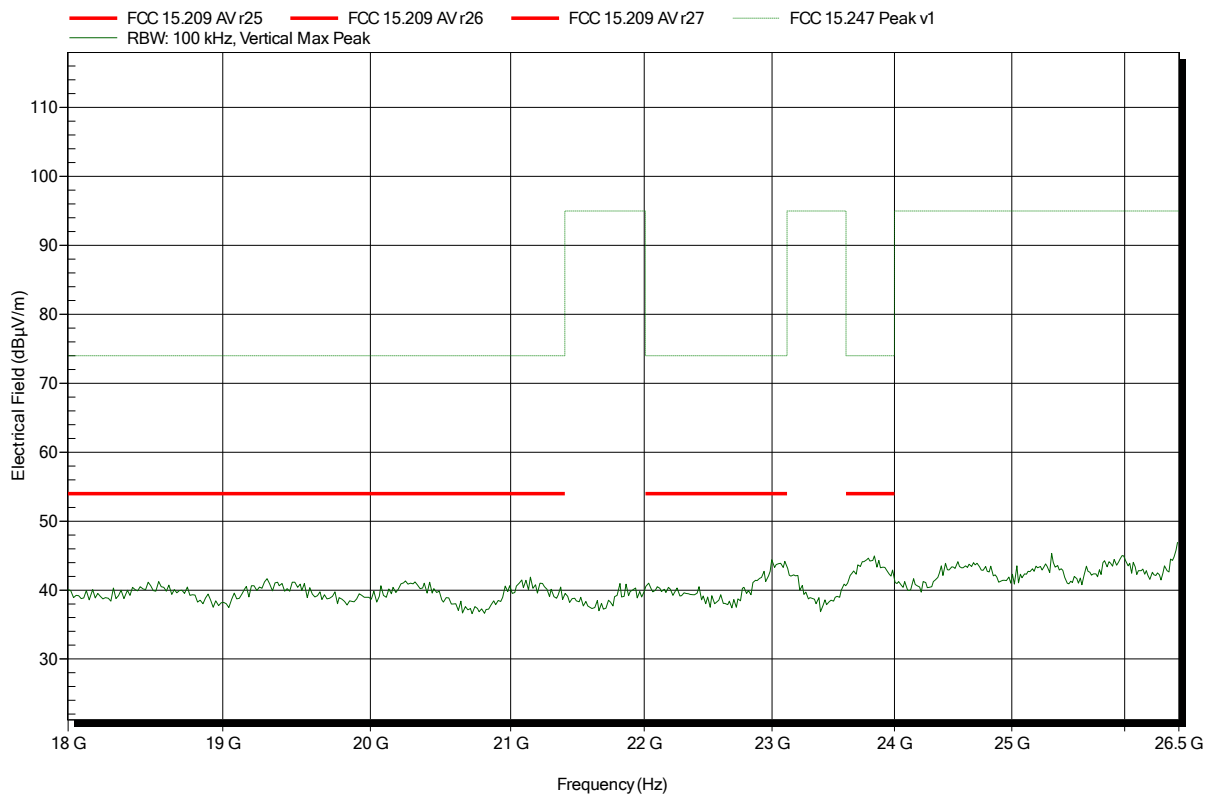


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-BR; CH: 78; 2480 MHz; DUT-TX-Mode; DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 141

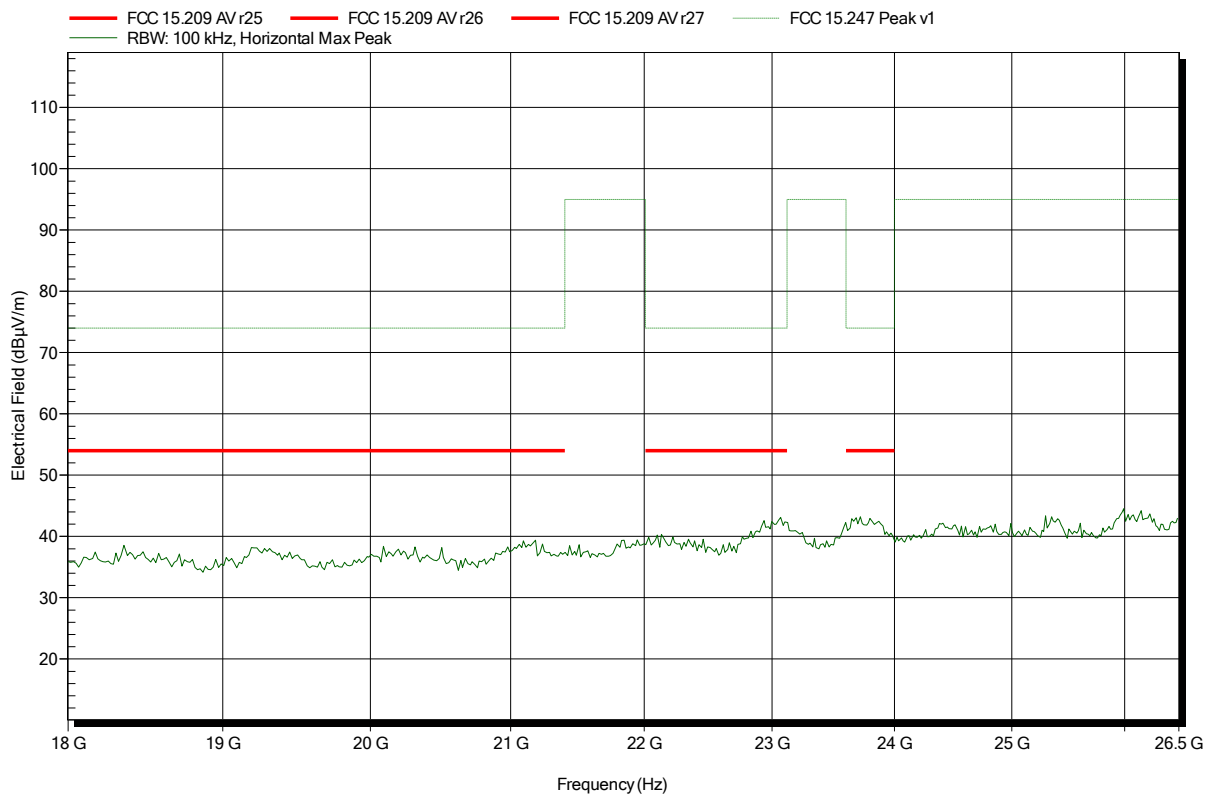


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3 m
 Mode: TX; BT-EDR; CH: 0; 2402 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-25
 Note: EUT vertical

Index 109

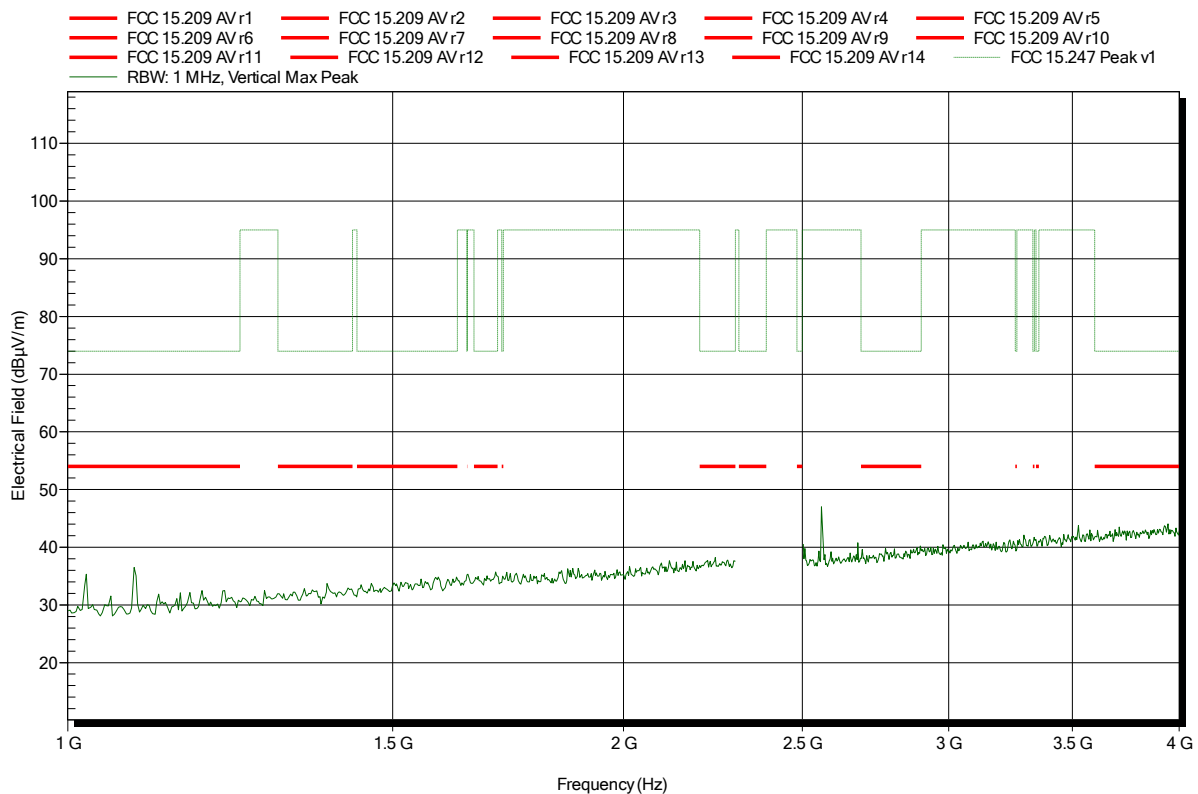


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m
 Mode: TX; BT-EDR; CH: 0; 2402 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 118

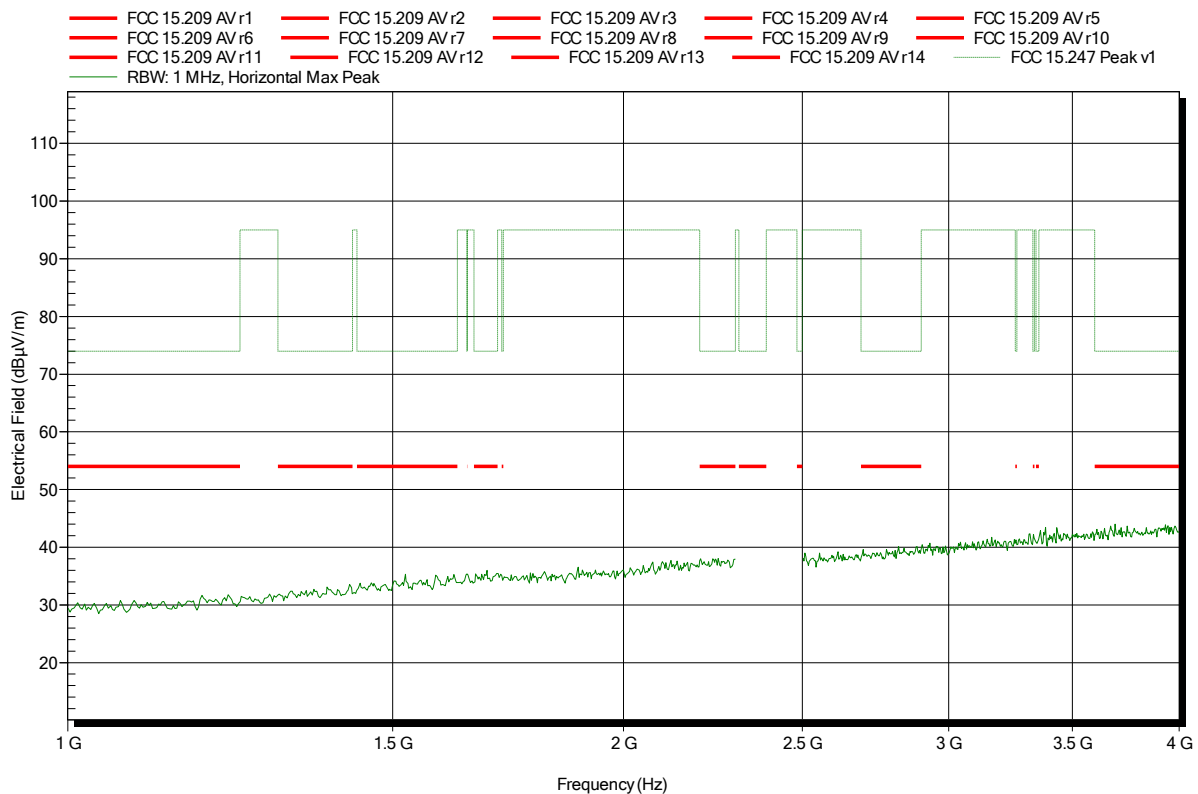


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3 m
 Mode: TX; BT-EDR; CH: 39; 2441 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-25
 Note: EUT vertical

Index 110

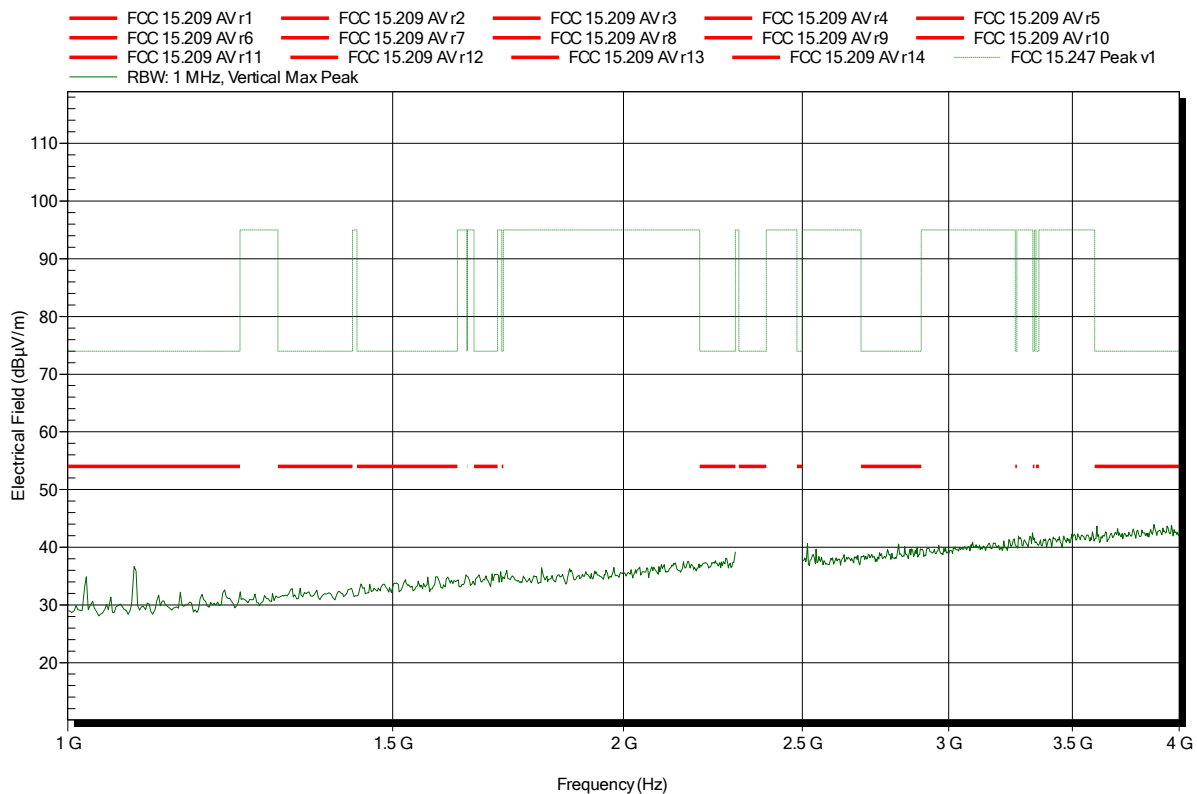


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m
 Mode: TX; BT-EDR; CH: 39; 2441 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 121

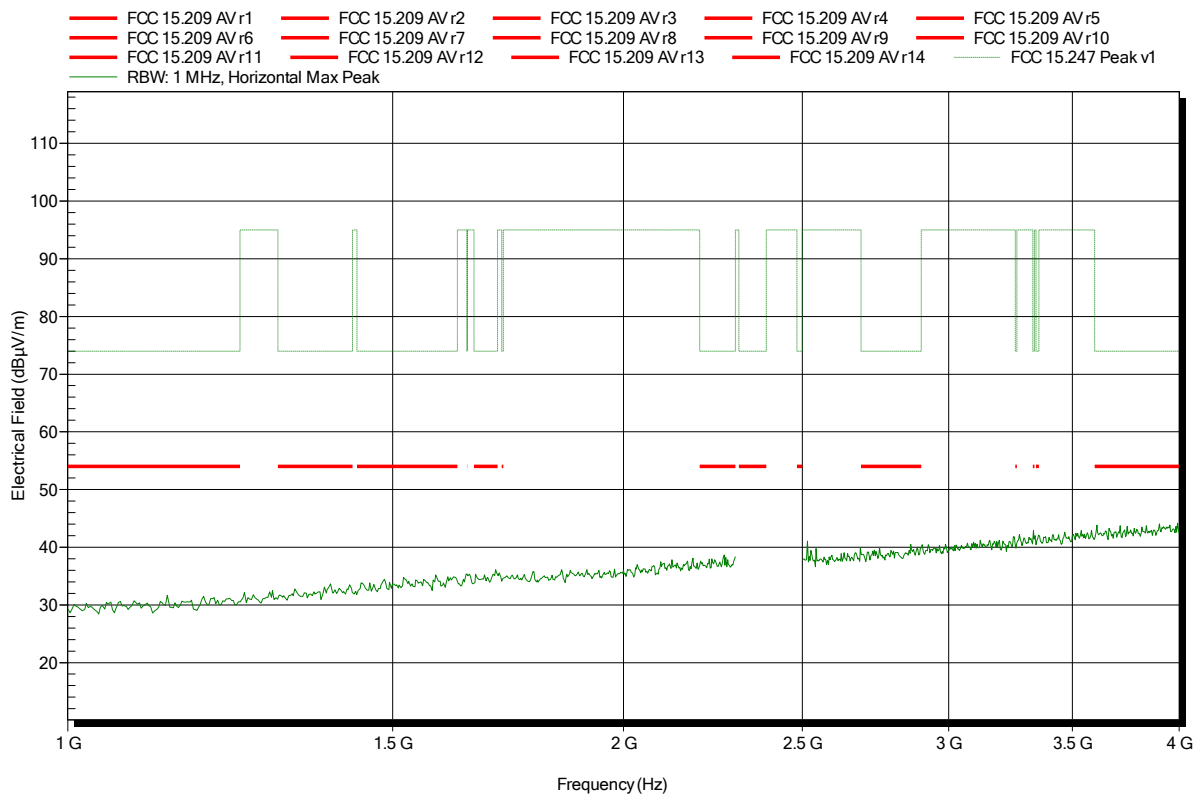


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3 m
 Mode: TX; BT-EDR; CH: 78; 2480 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-25
 Note: EUT vertical

Index 111

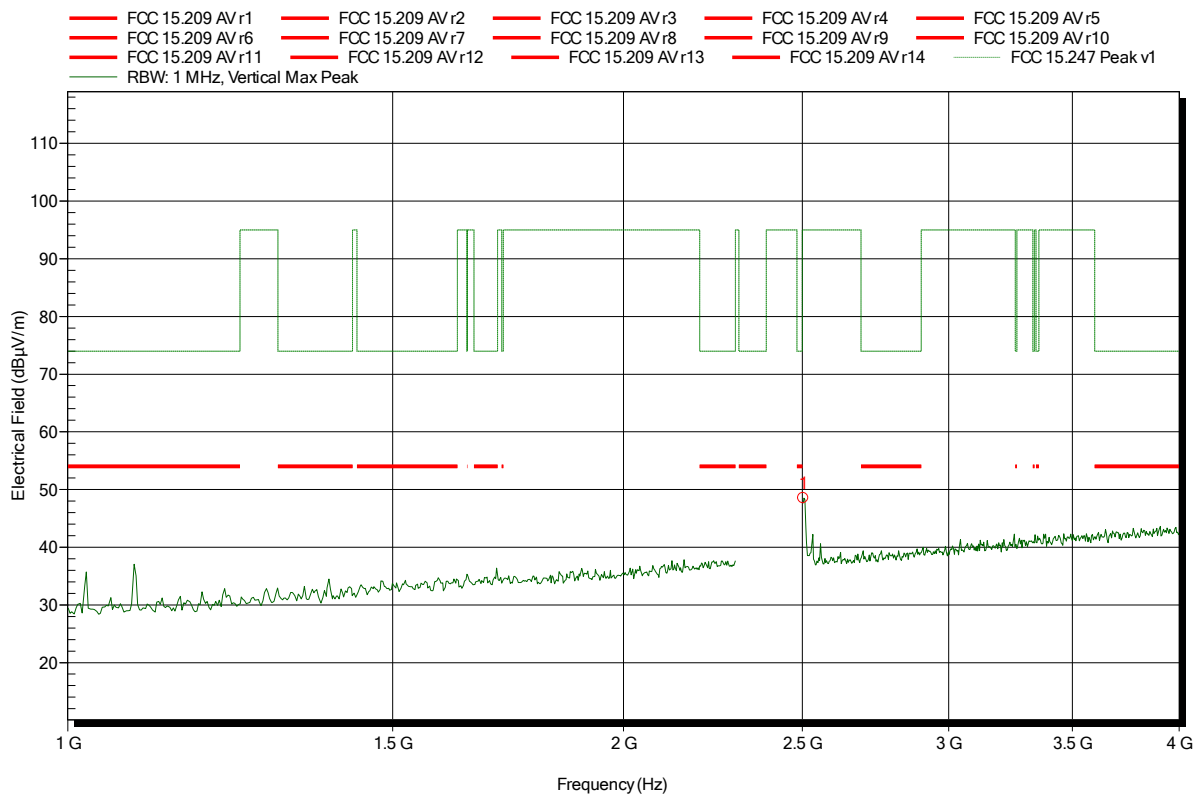


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.503 GHz	48.5 dBµV/m	95 dBµV/m	-46.5 dB	Pass

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m
 Mode: TX; BT-EDR; CH: 78; 2480 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 124

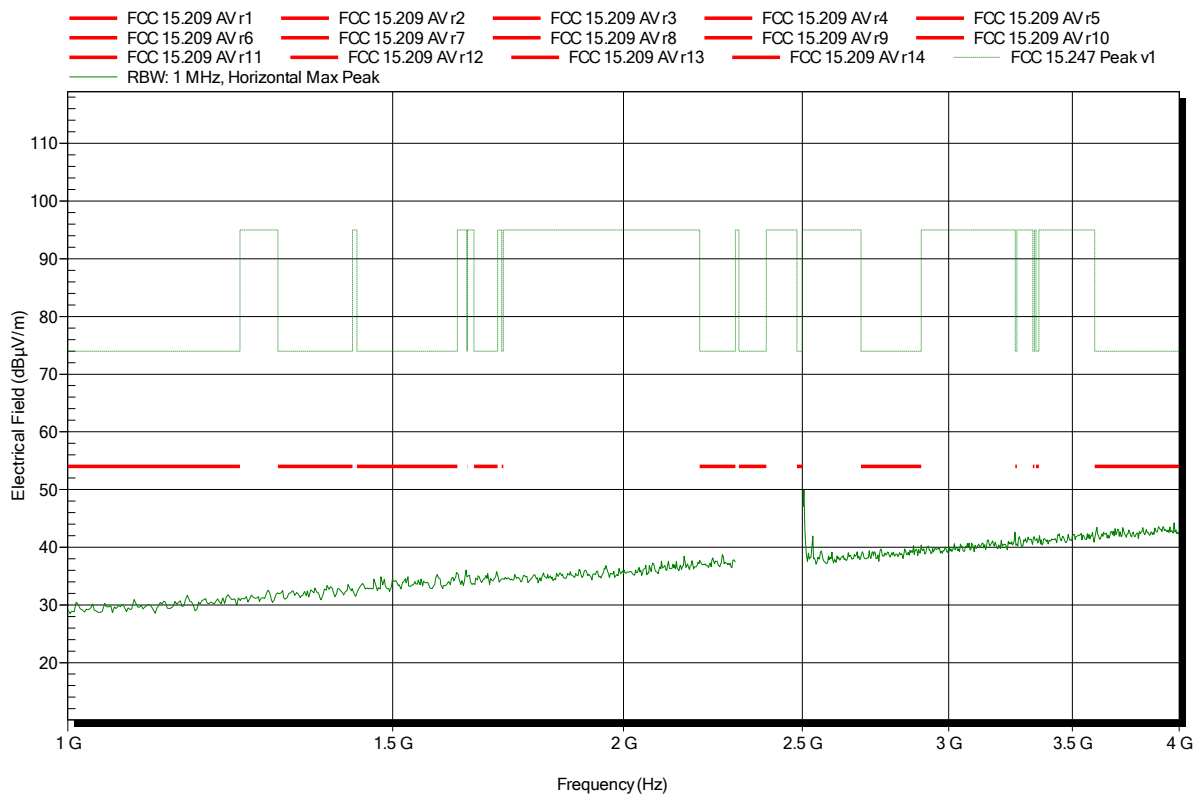


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-EDR; CH: 0; 2402 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-25
 Note: EUT vertical; lower bandedge

Index 112

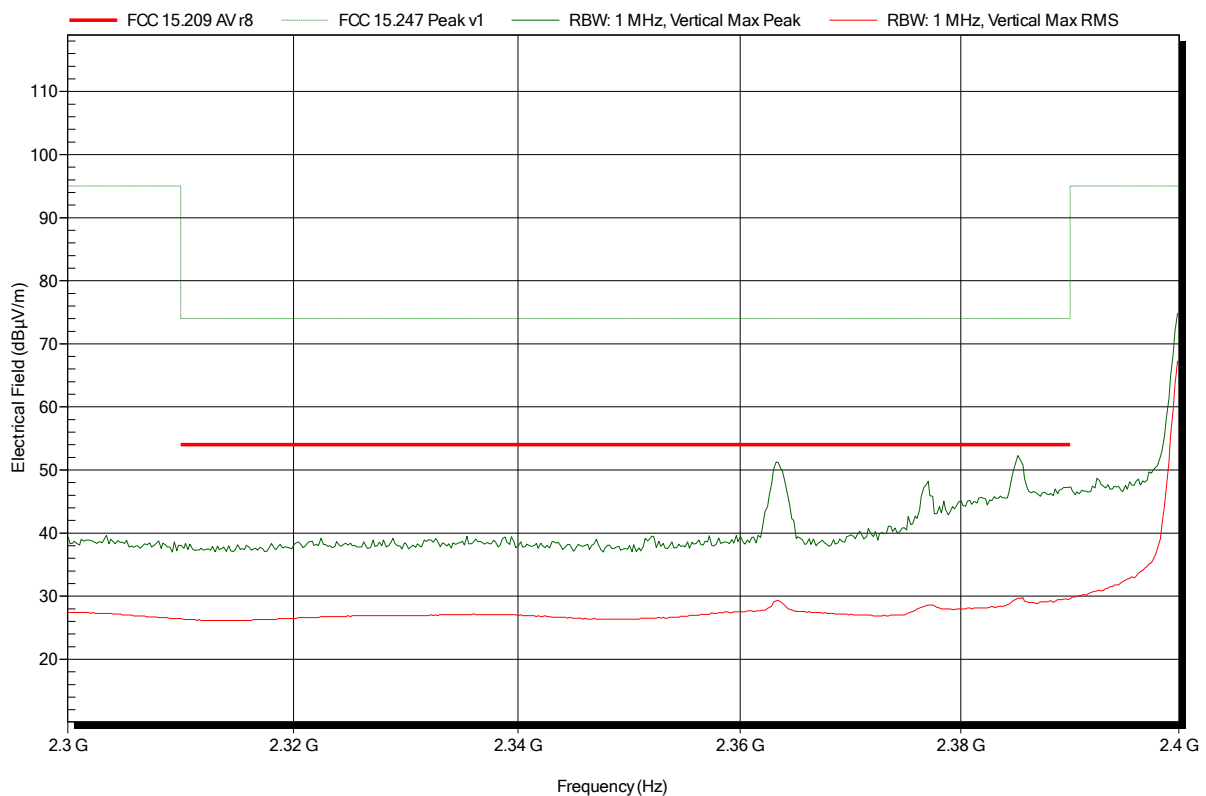


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-EDR; CH: 0; 2402 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical; lower bandedge

Index 119

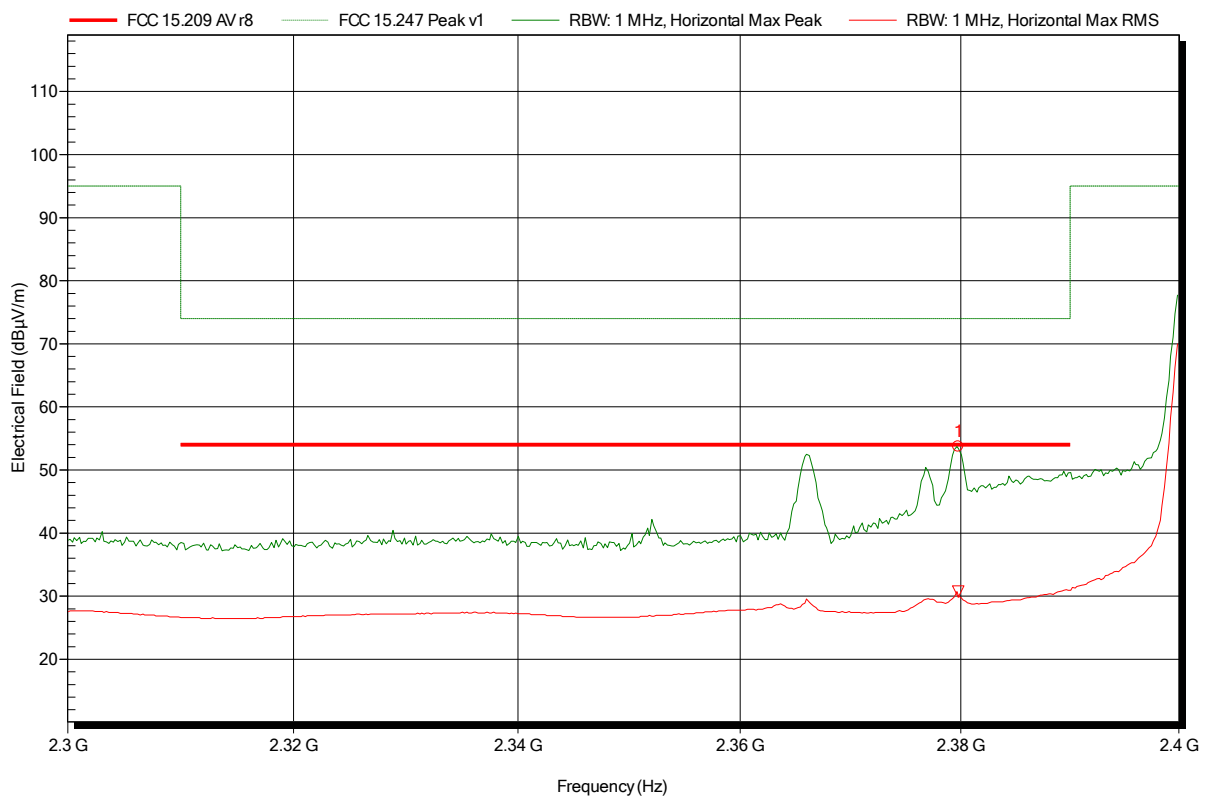


Frequency 2.38 GHz	Peak 53.74 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -20.26 dB	Peak Status Pass
Frequency 2.38 GHz	RMS 30.71 dBµV/m	RMS Limit 54 dBµV/m	RMS Difference -23.29 dB	RMS Status Pass

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	3 m converted to 3m
Mode:	TX; BT-EDR; CH: 39; 2441 MHz; DUT-TX-Mode; 3-DH5
Test Date:	2015-02-25
Note:	EUT vertical; lower bandedge

Index 114

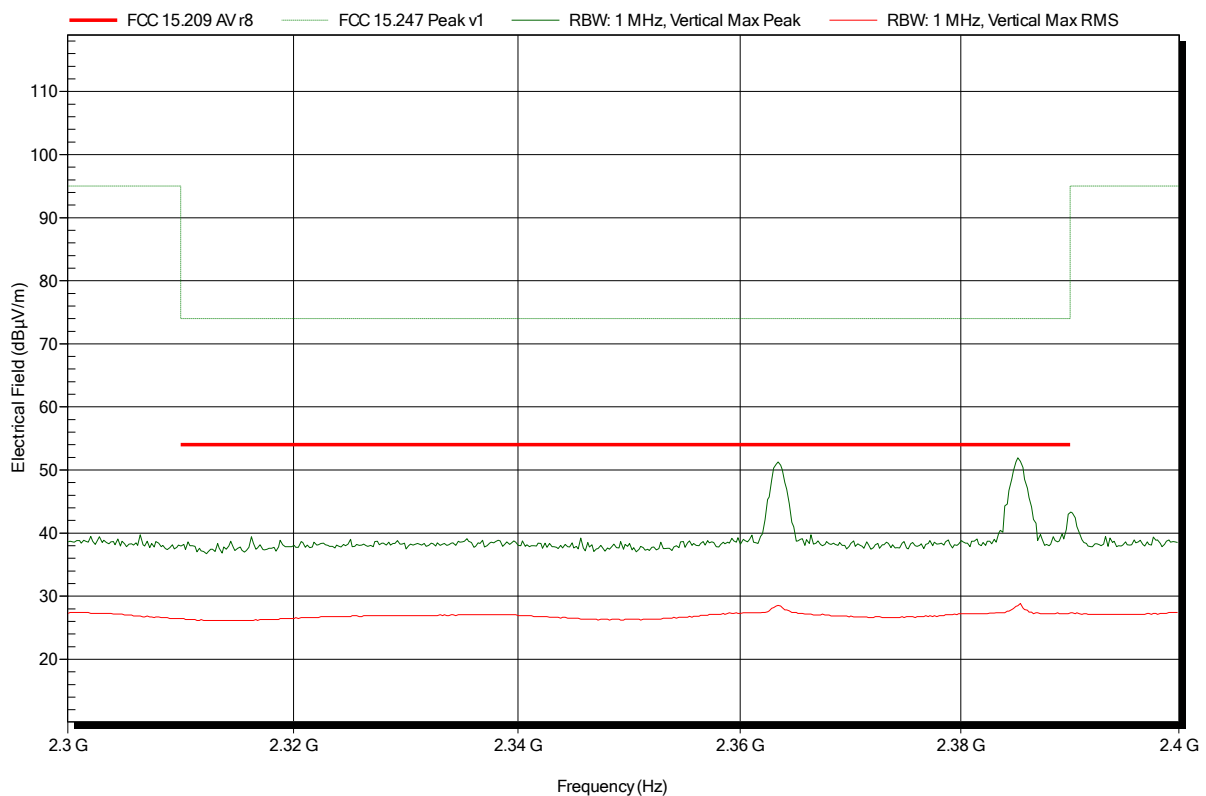


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: GOM-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-EDR; CH: 39; 2441 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical; lower bandedge

Index 122

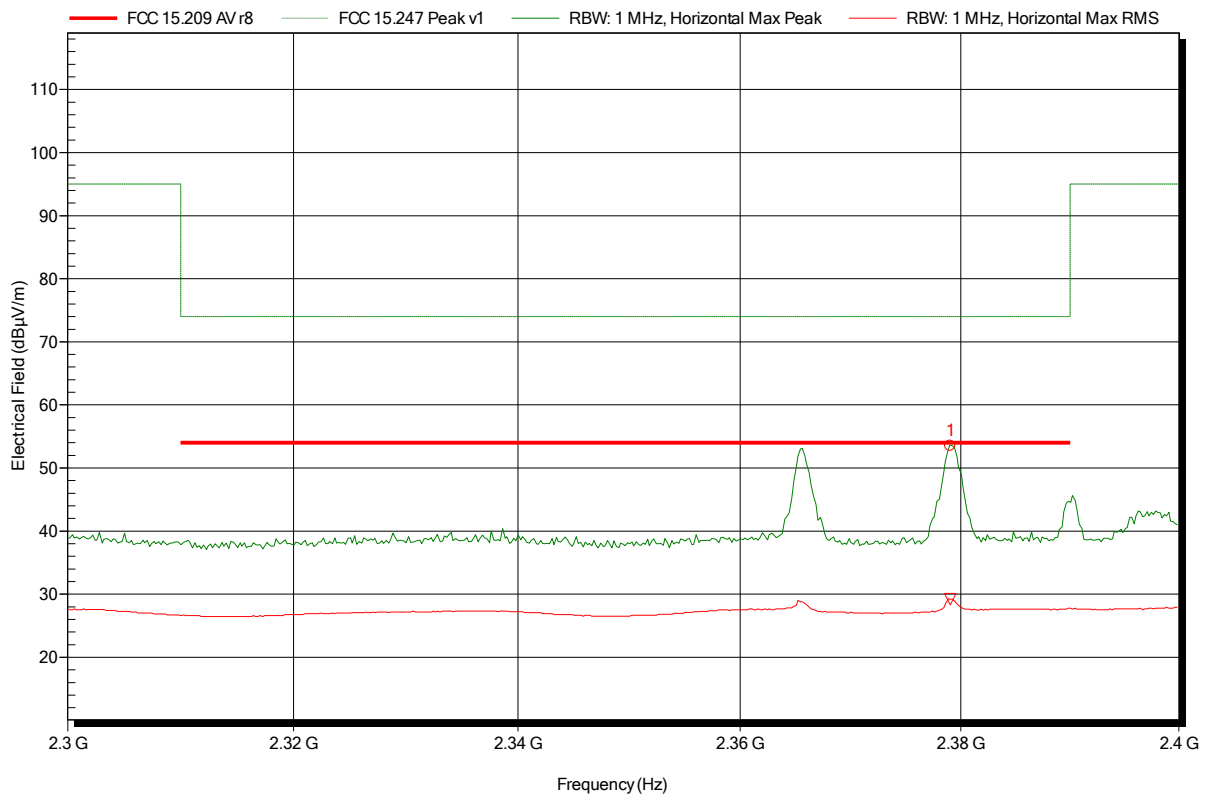


Frequency 2.379 GHz	Peak 53.51 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -20.49 dB	Peak Status Pass
Frequency 2.379 GHz	RMS 29.18 dBµV/m	RMS Limit 54 dBµV/m	RMS Difference -24.82 dB	RMS Status Pass

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-EDR; CH: 78; 2480 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-25
 Note: EUT vertical; lower bandedge

Index 116

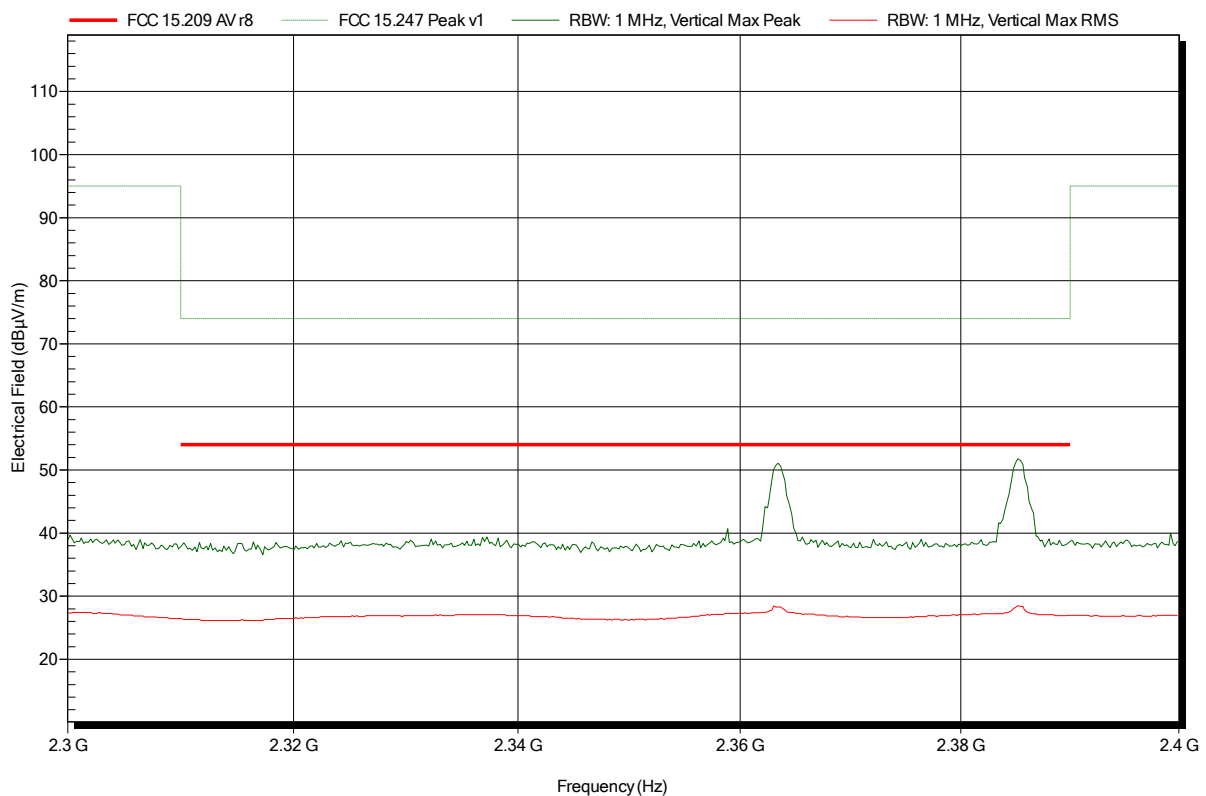


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-EDR; CH: 78; 2480 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical; lower bandedge

Index 125

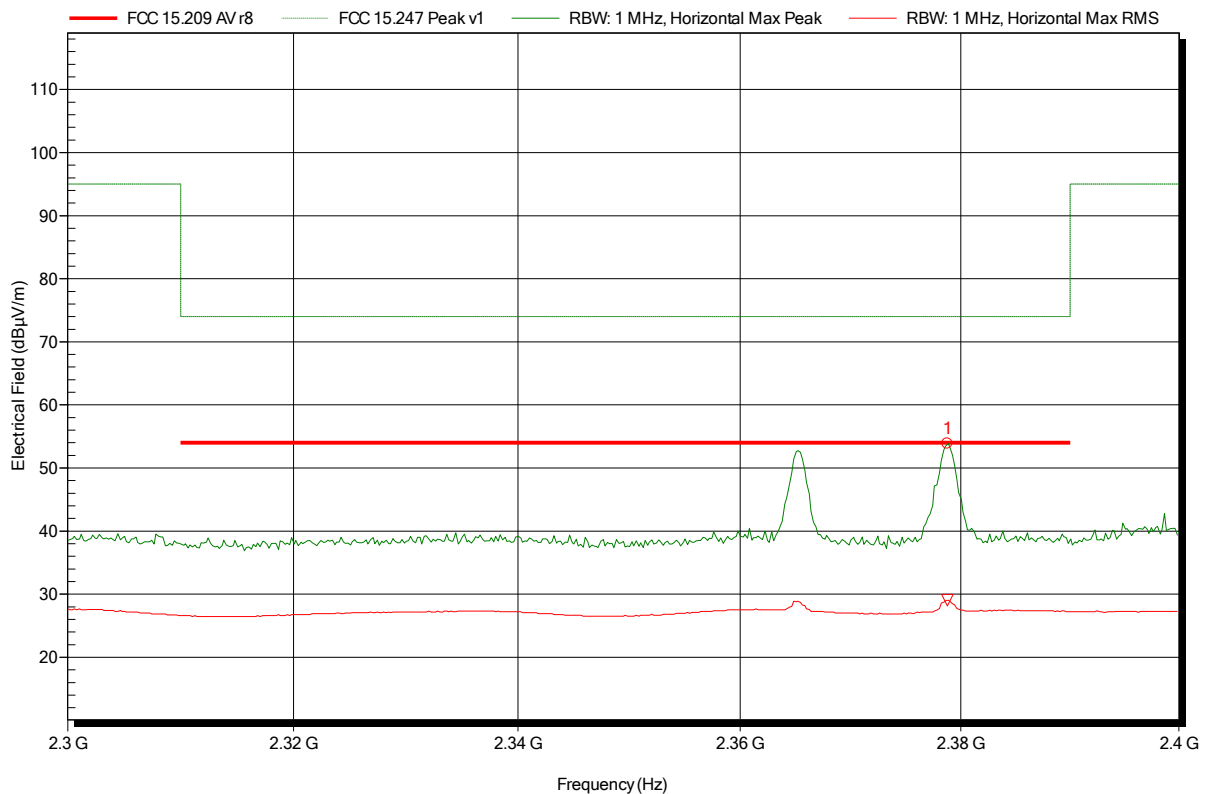


Frequency 2.379 GHz	Peak 53.89 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -20.11 dB	Peak Status Pass
Frequency 2.379 GHz	RMS 29.07 dBµV/m	RMS Limit 54 dBµV/m	RMS Difference -24.93 dB	RMS Status Pass

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-EDR; CH: 0; 2402 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-25
 Note: EUT vertical; upper bandedge

Index 113

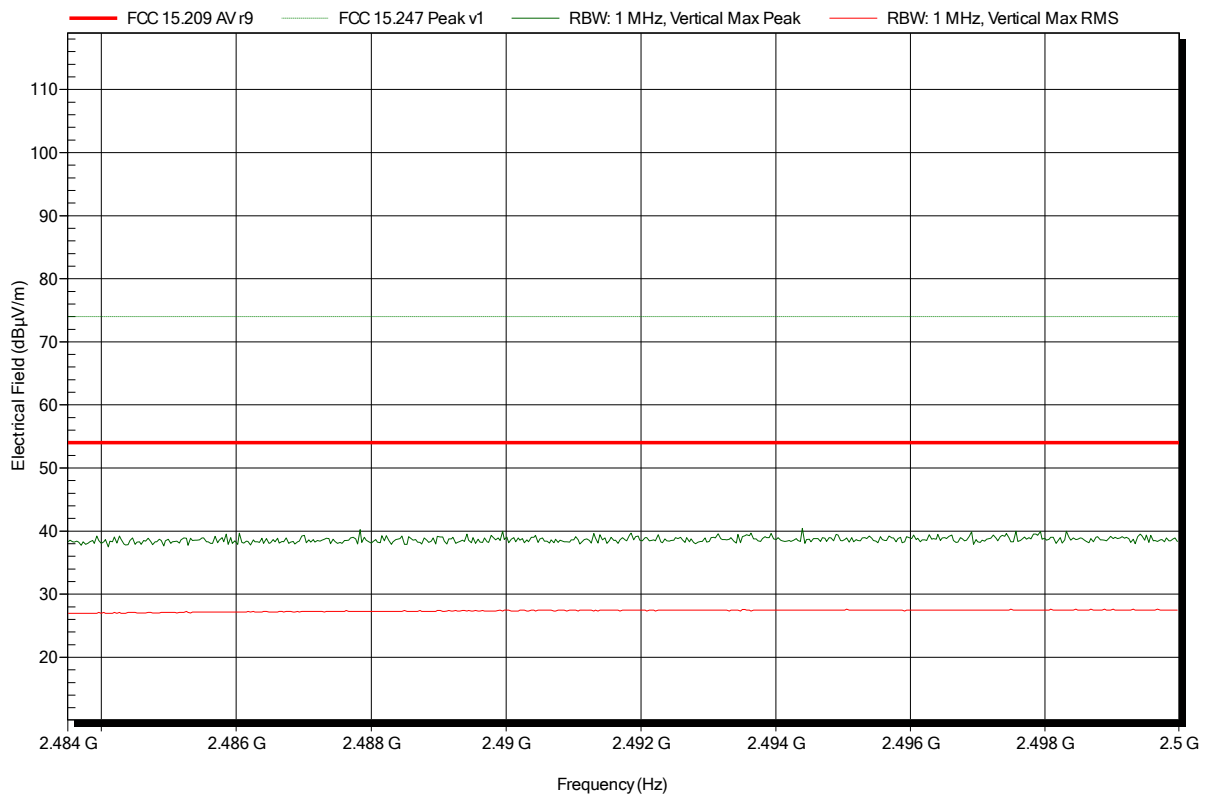


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-EDR; CH: 0; 2402 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical; upper bandedge

Index 120

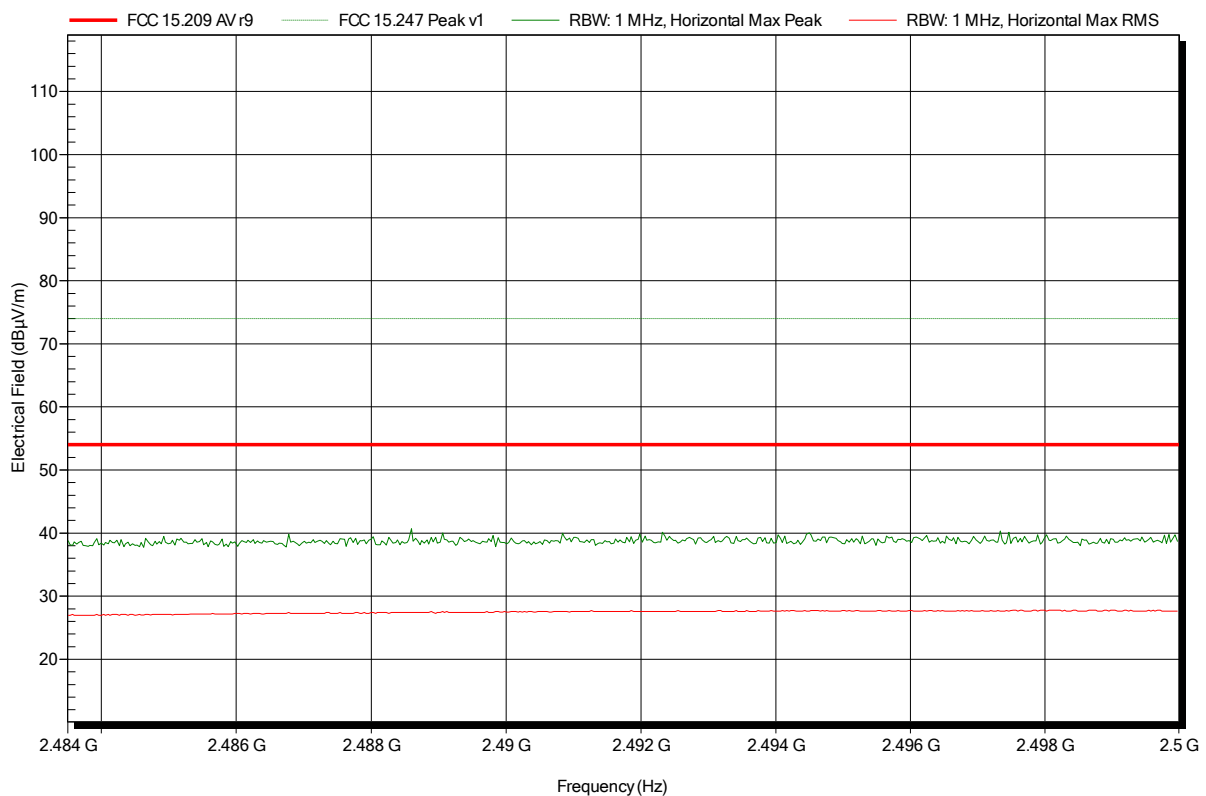


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-EDR; CH: 39; 2441 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-25
 Note: EUT vertical; upper bandedge

Index 115

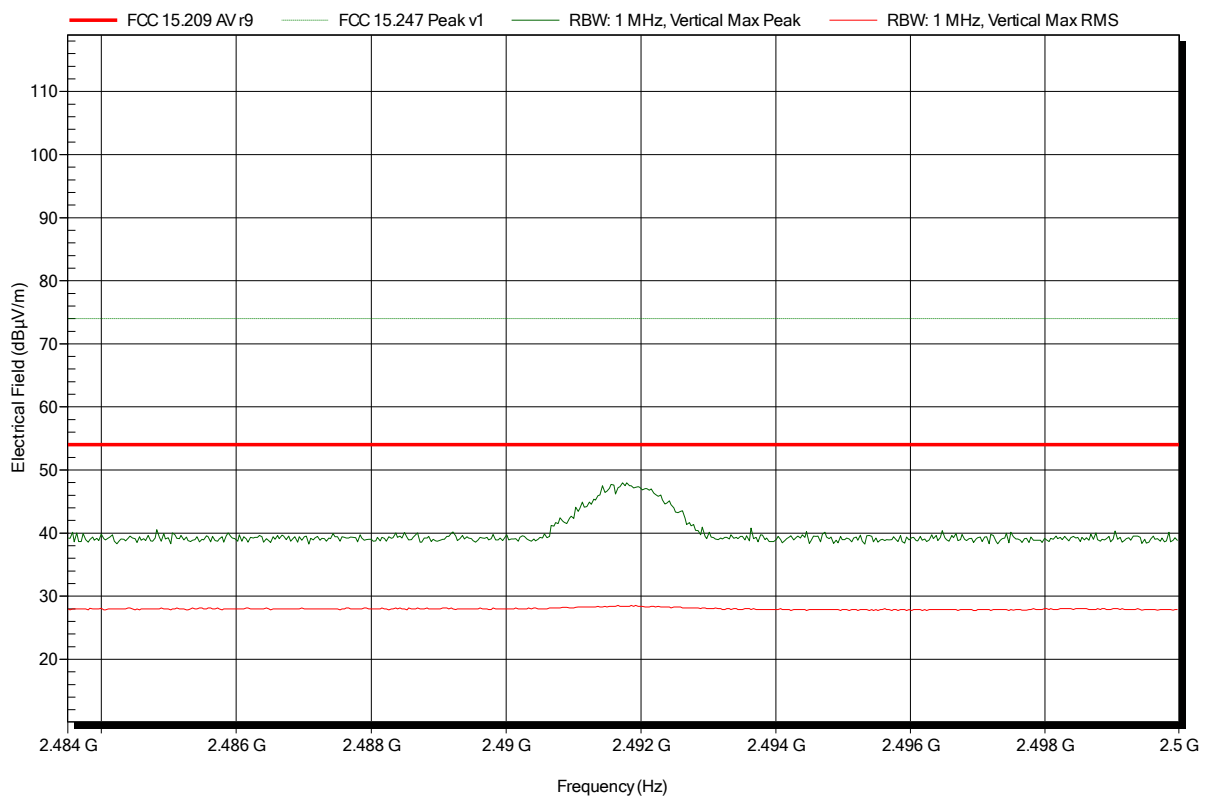

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-EDR; CH: 39; 2441 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical; upper bandedge

Index 123

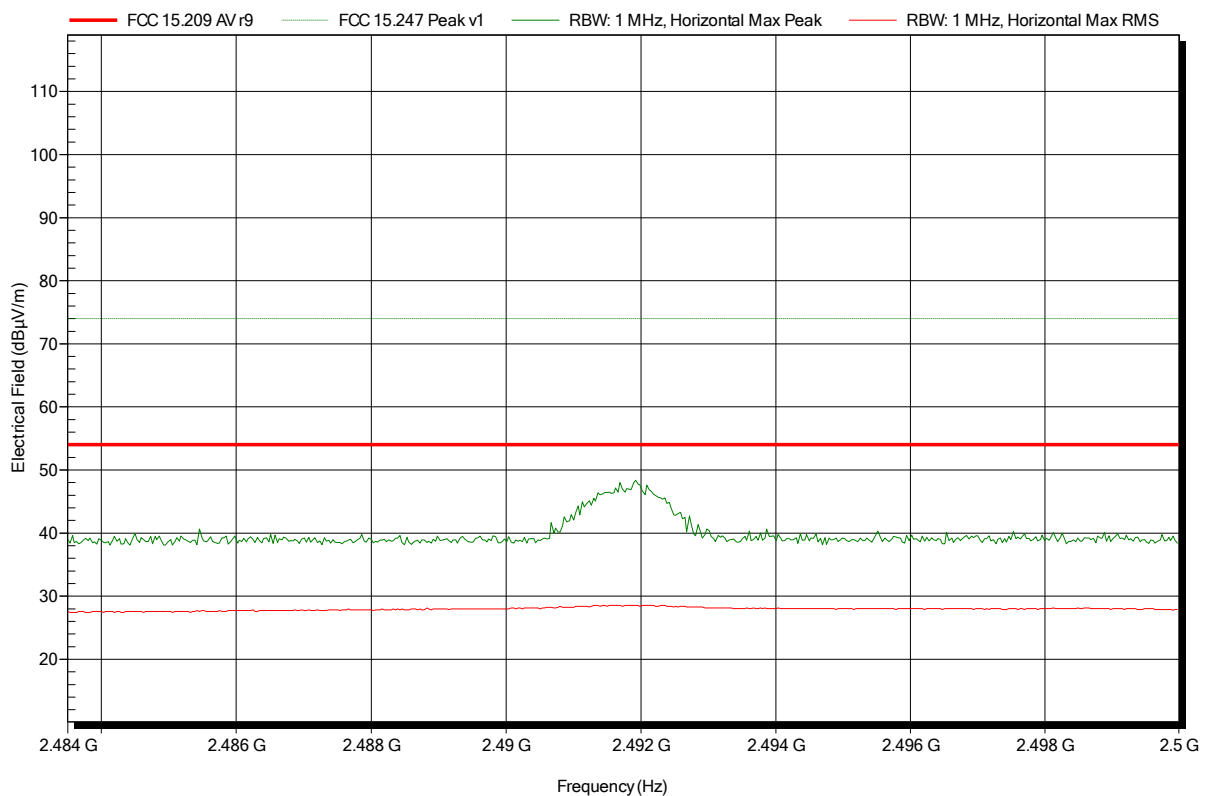


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-EDR; CH: 78; 2480 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-25
 Note: EUT vertical; upper bandedge

Index 117

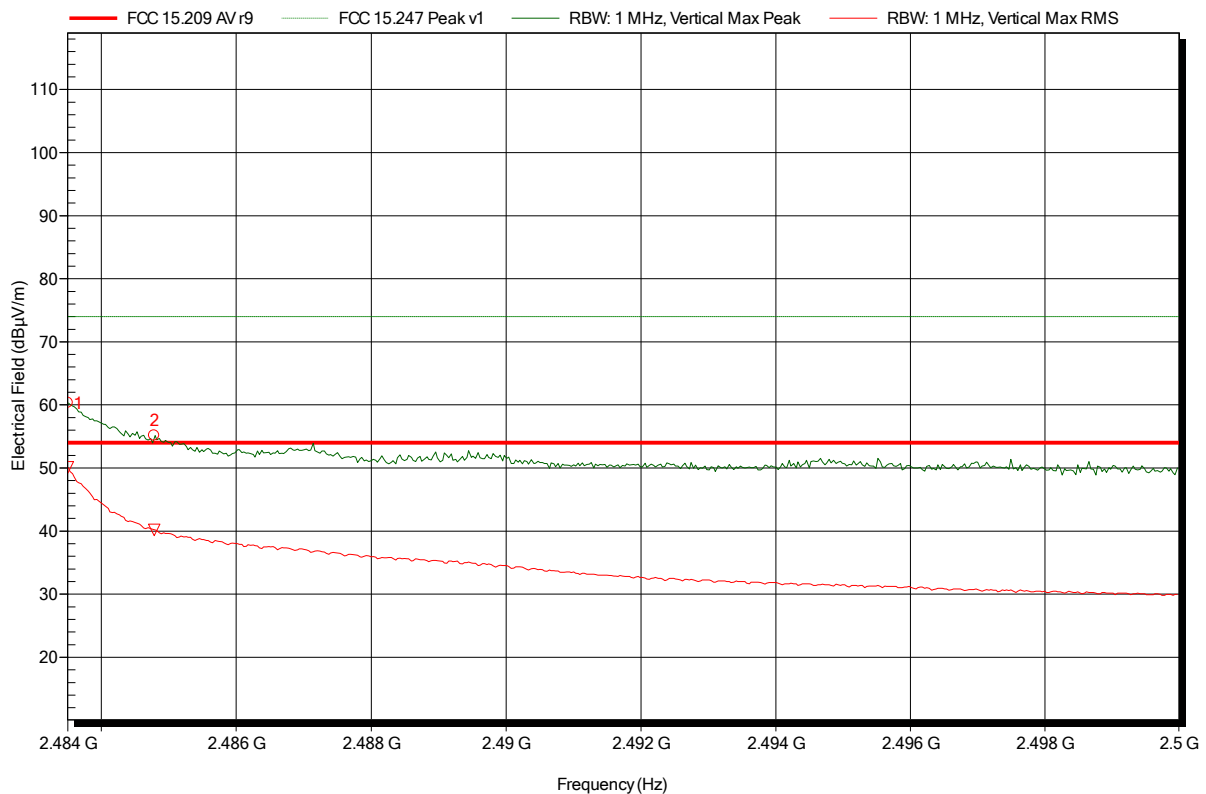

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4835 GHz	60.3 dBμV/m	74 dBμV/m	-13.7 dB	Pass
2.4848 GHz	55.14 dBμV/m	74 dBμV/m	-18.86 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4835 GHz	50.08 dBμV/m	54 dBμV/m	-3.92 dB	Pass
2.4848 GHz	40.18 dBμV/m	54 dBμV/m	-13.82 dB	Pass

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT-EDR; CH: 78; 2480 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical; upper bandedge

Index 126

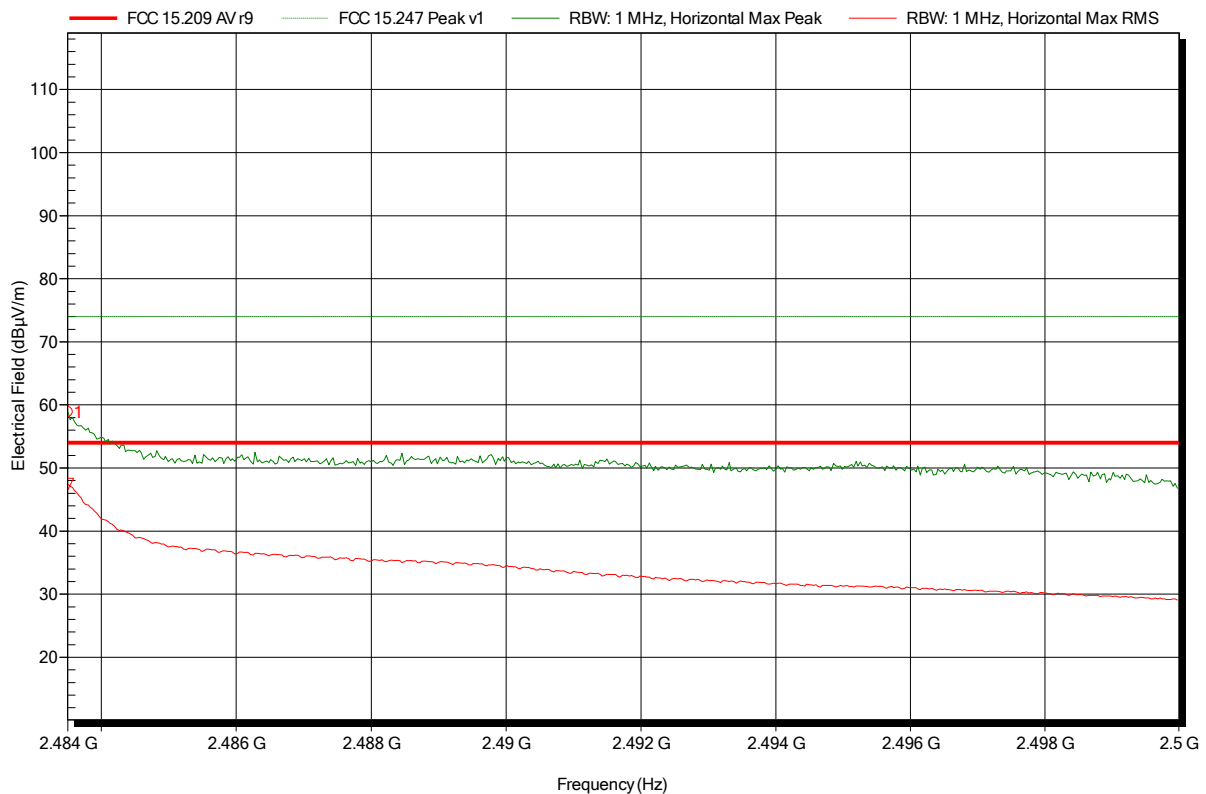


Frequency 2.4835 GHz	Peak 58.85 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -15.15 dB	Peak Status Pass
Frequency 2.4835 GHz	RMS 47.44 dBµV/m	RMS Limit 54 dBµV/m	RMS Difference -6.56 dB	RMS Status Pass

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 0; 2402 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 132

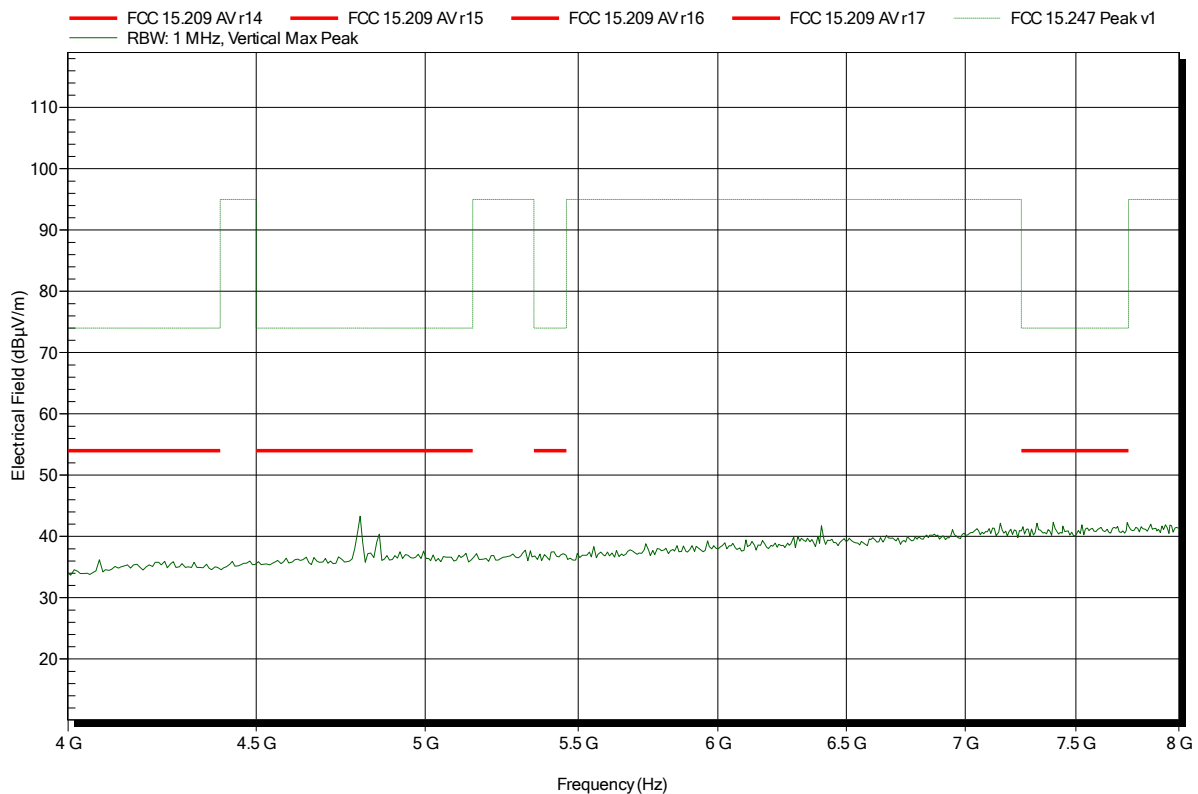


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 0; 2402 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 141

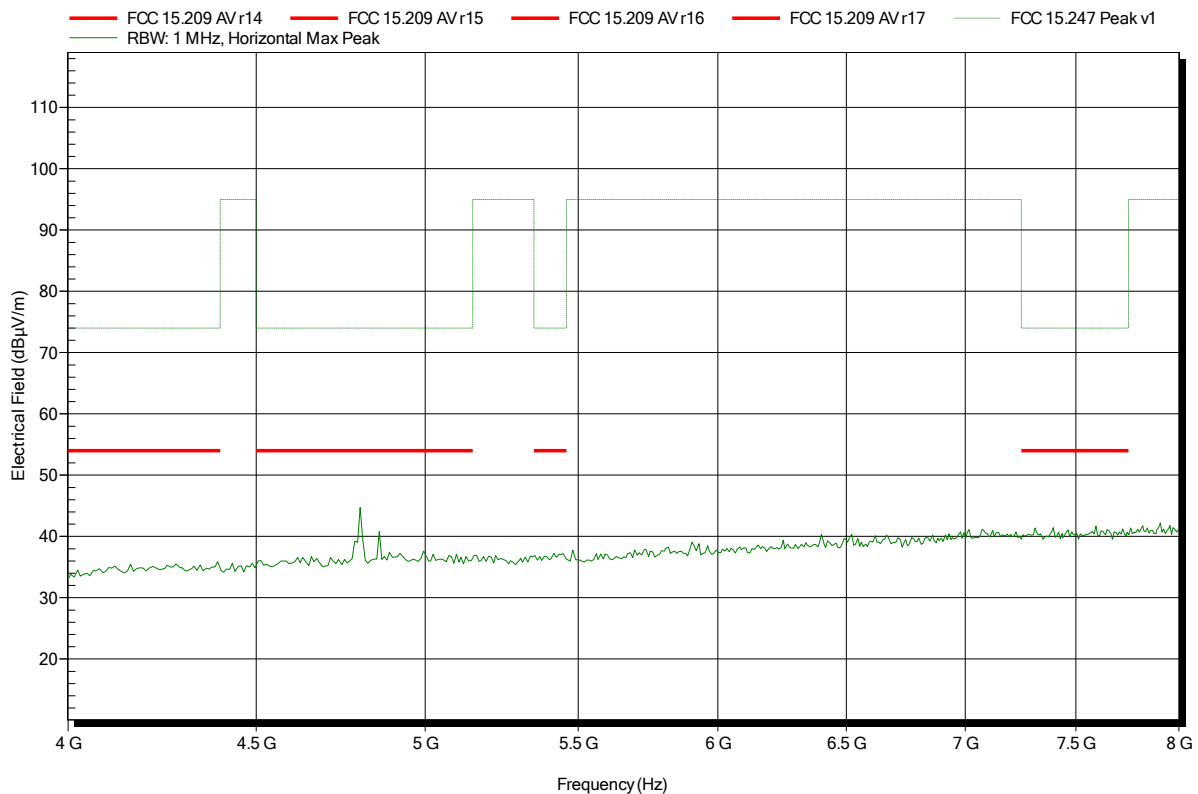


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 39; 2441 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 135

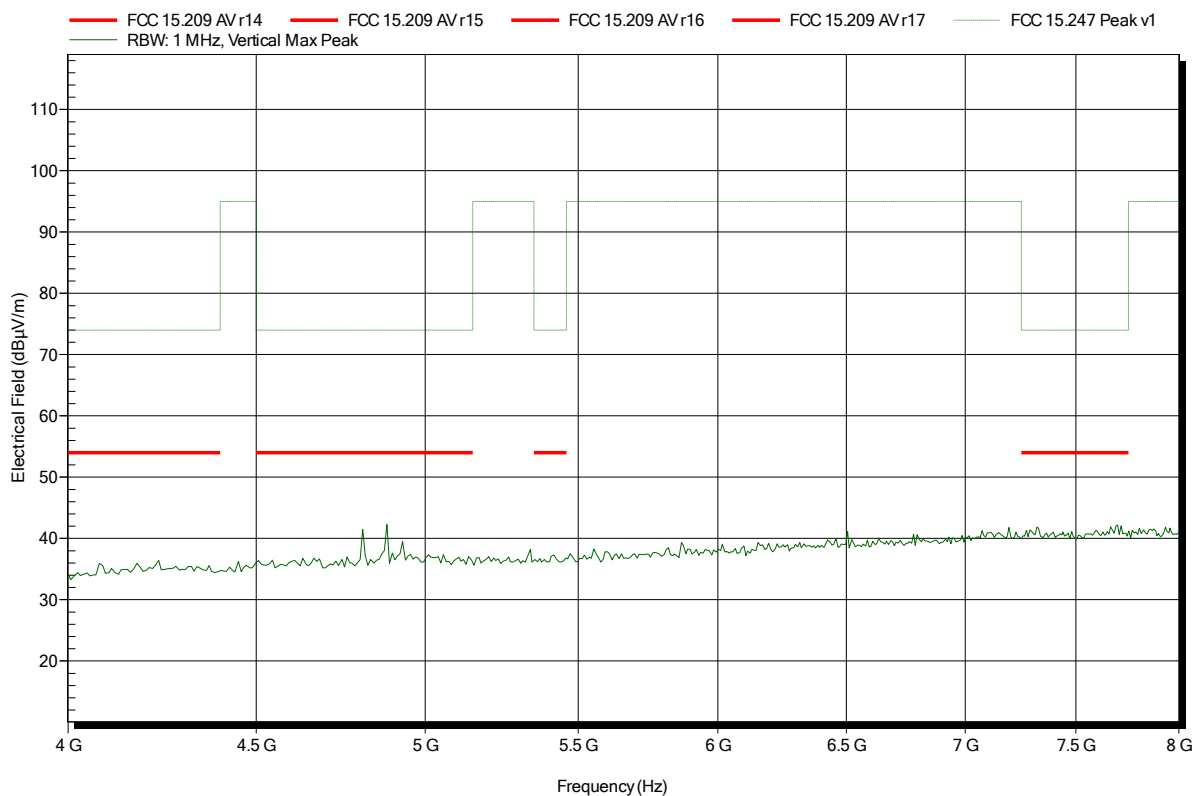


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 39; 2441 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 140

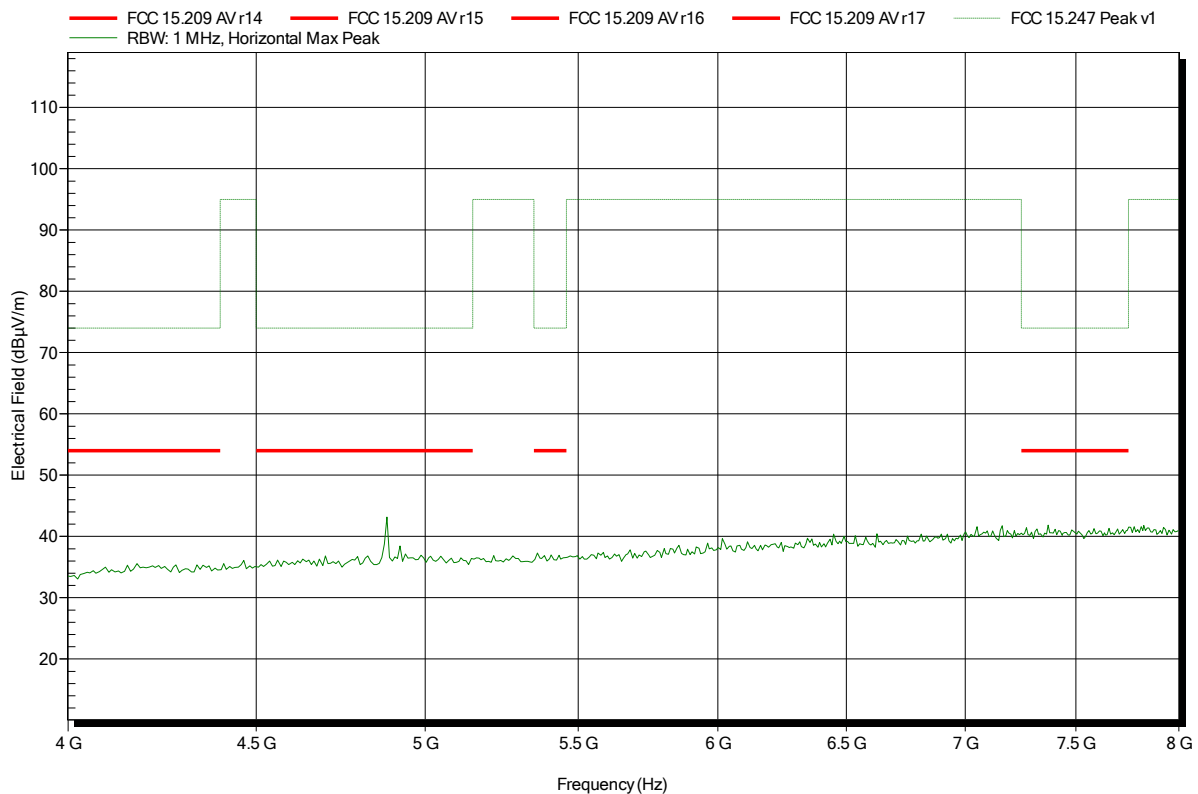


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 78; 2480 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 138

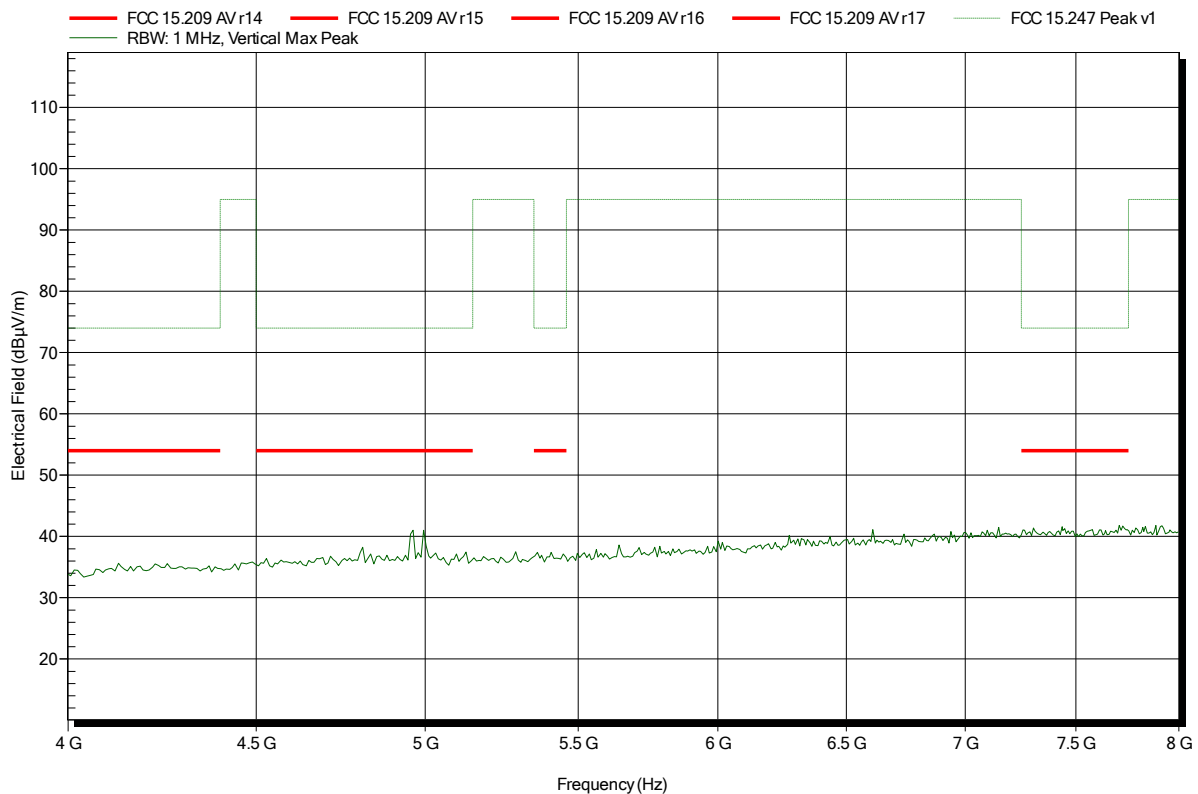


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 78; 2480 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 139

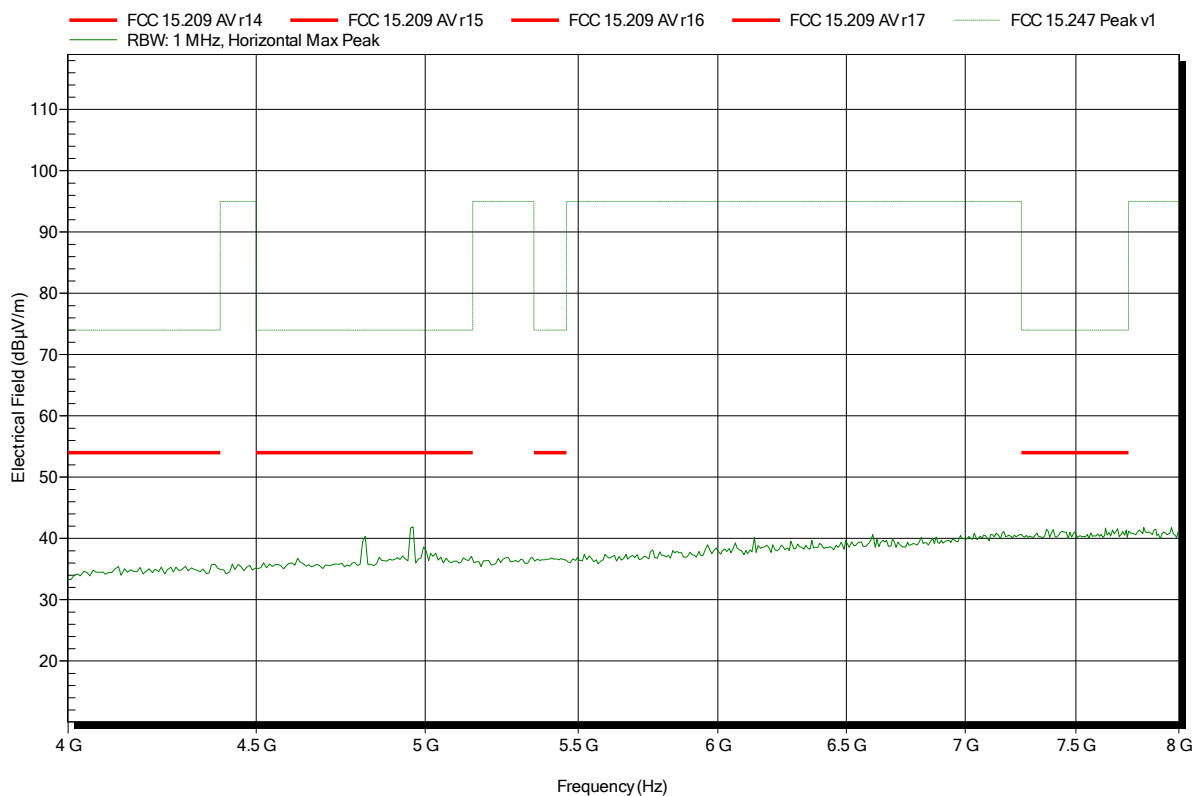

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 0; 2402 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 133

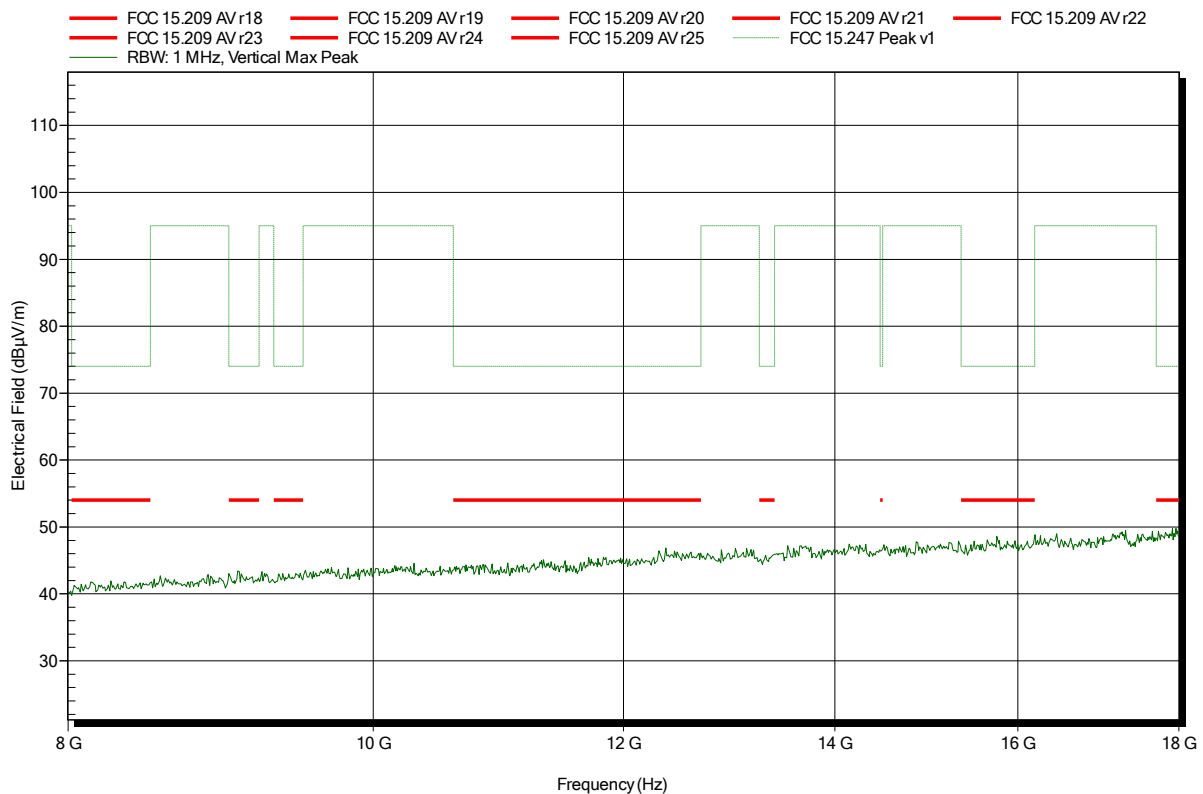


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 0; 2402 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 142

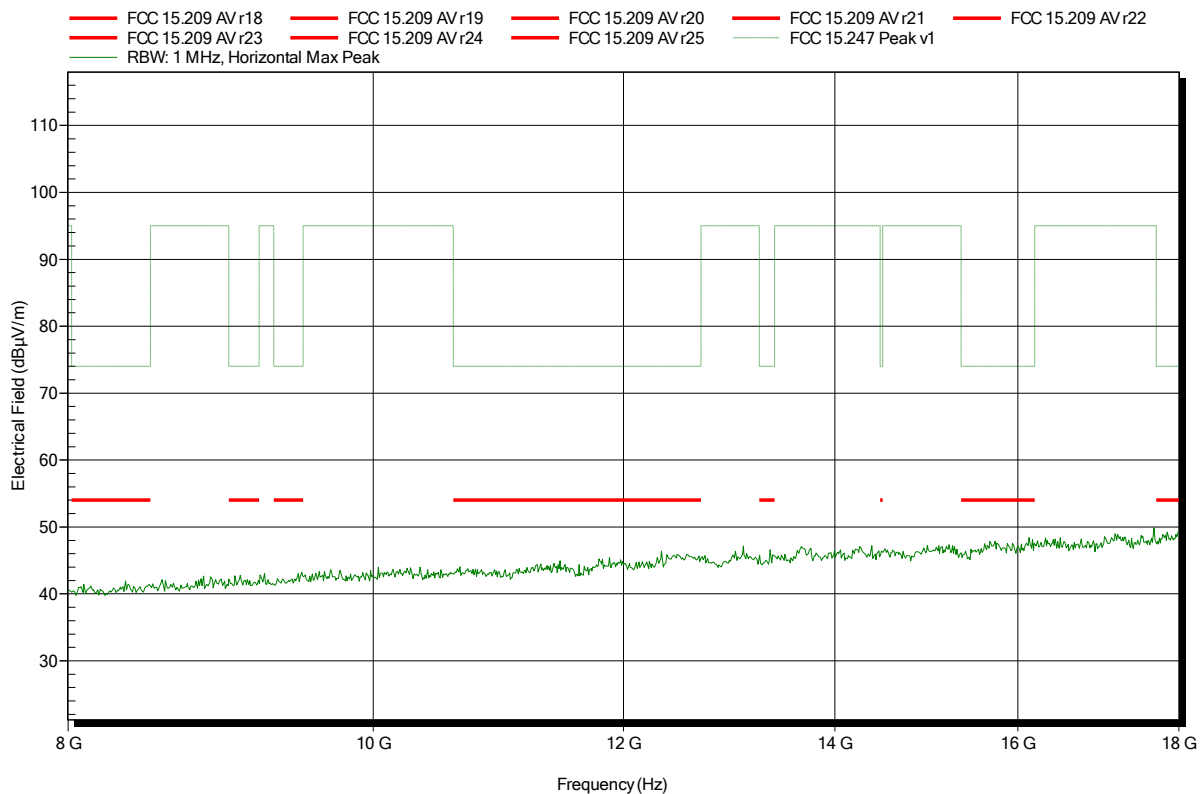


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 39; 2441 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 136

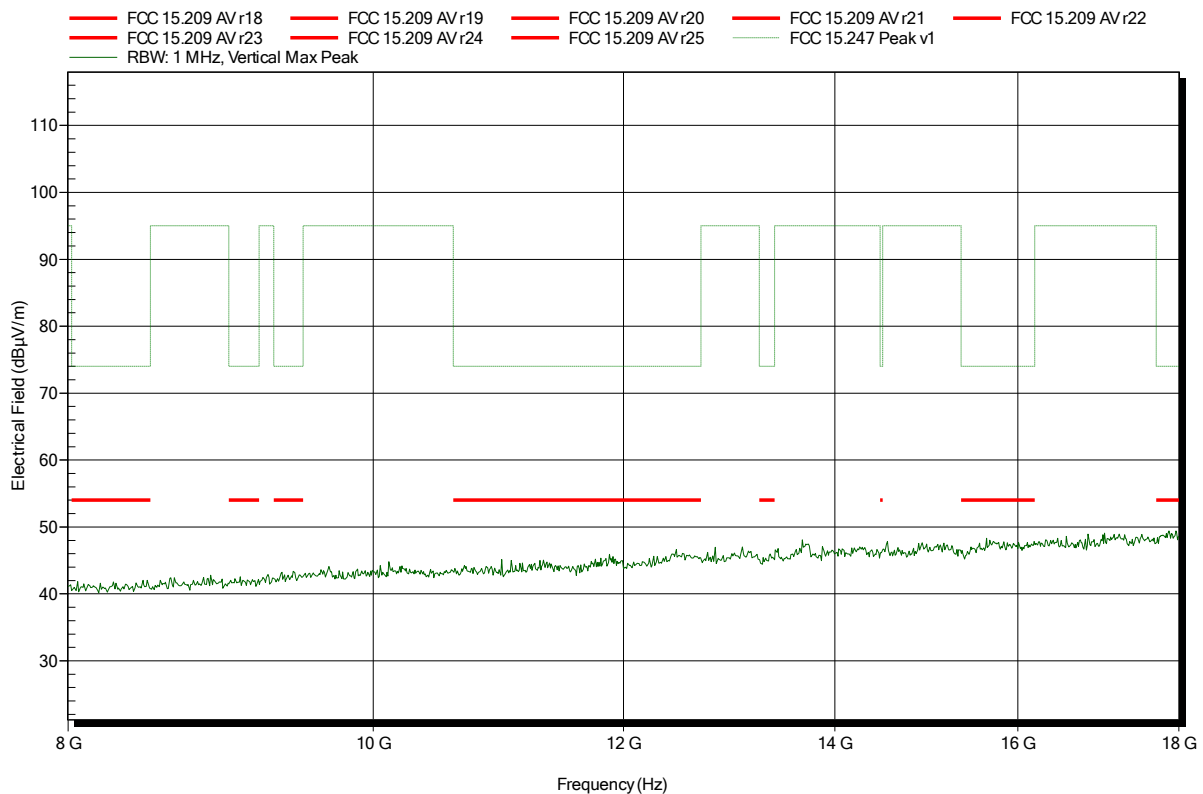


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 39; 2441 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 144

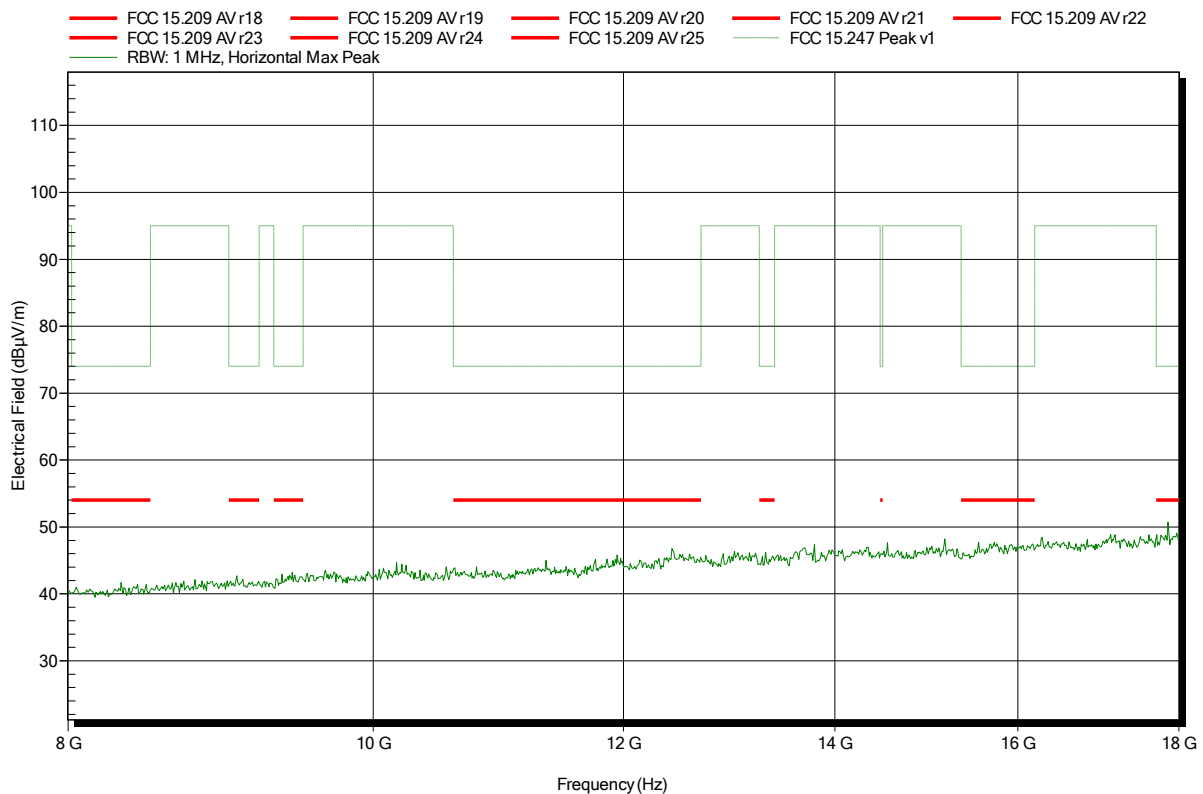


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 78; 2480 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 148

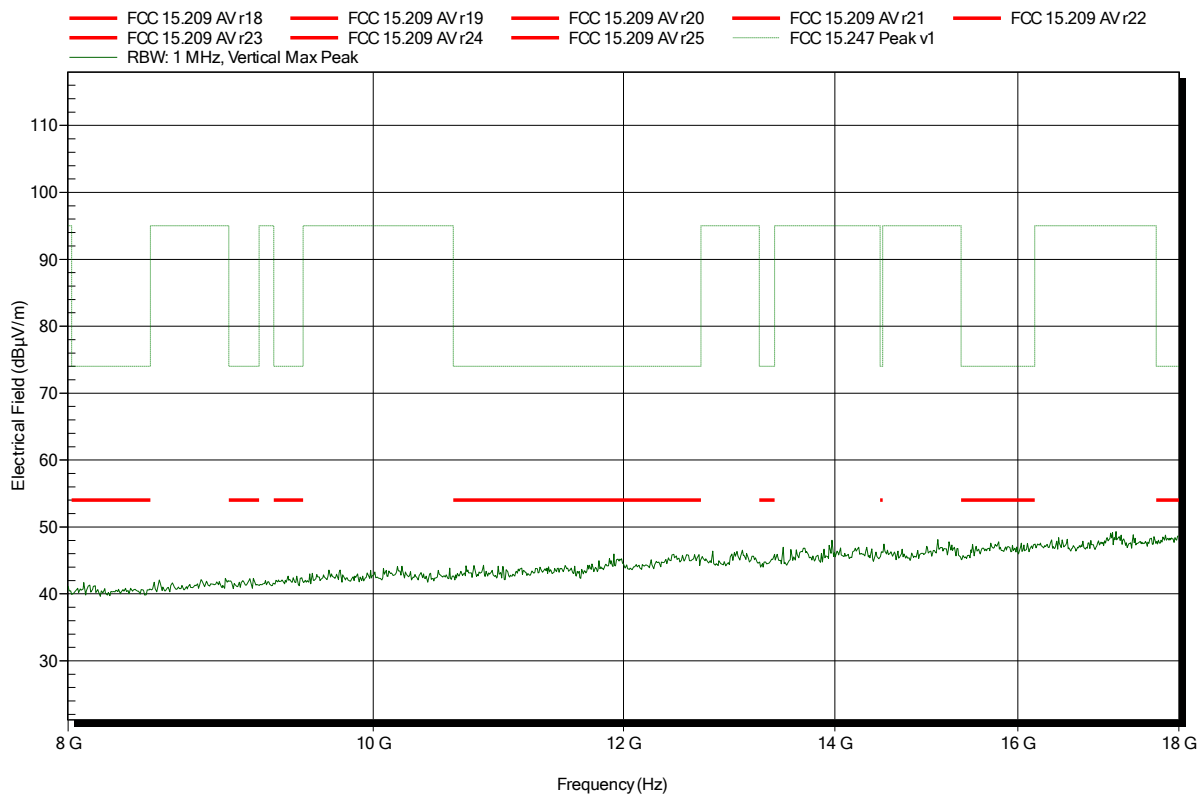


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 78; 2480 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 146

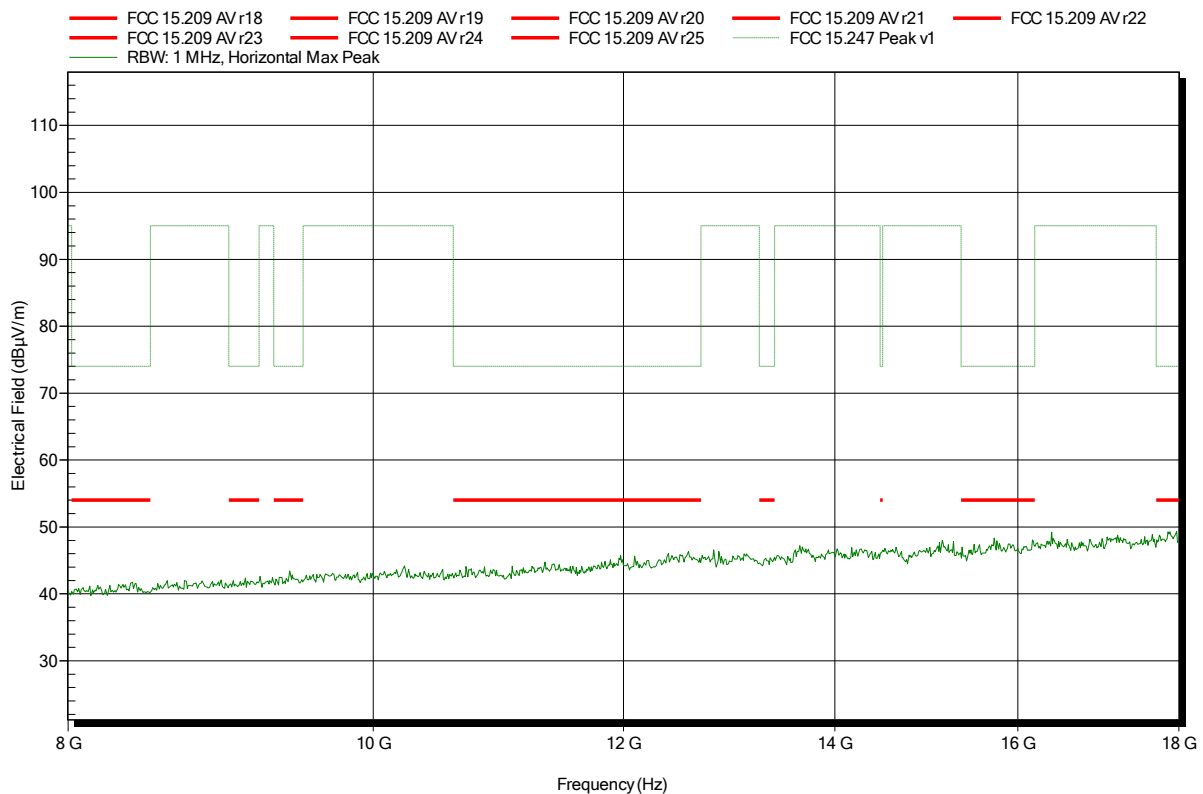


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 0; 2402 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 134

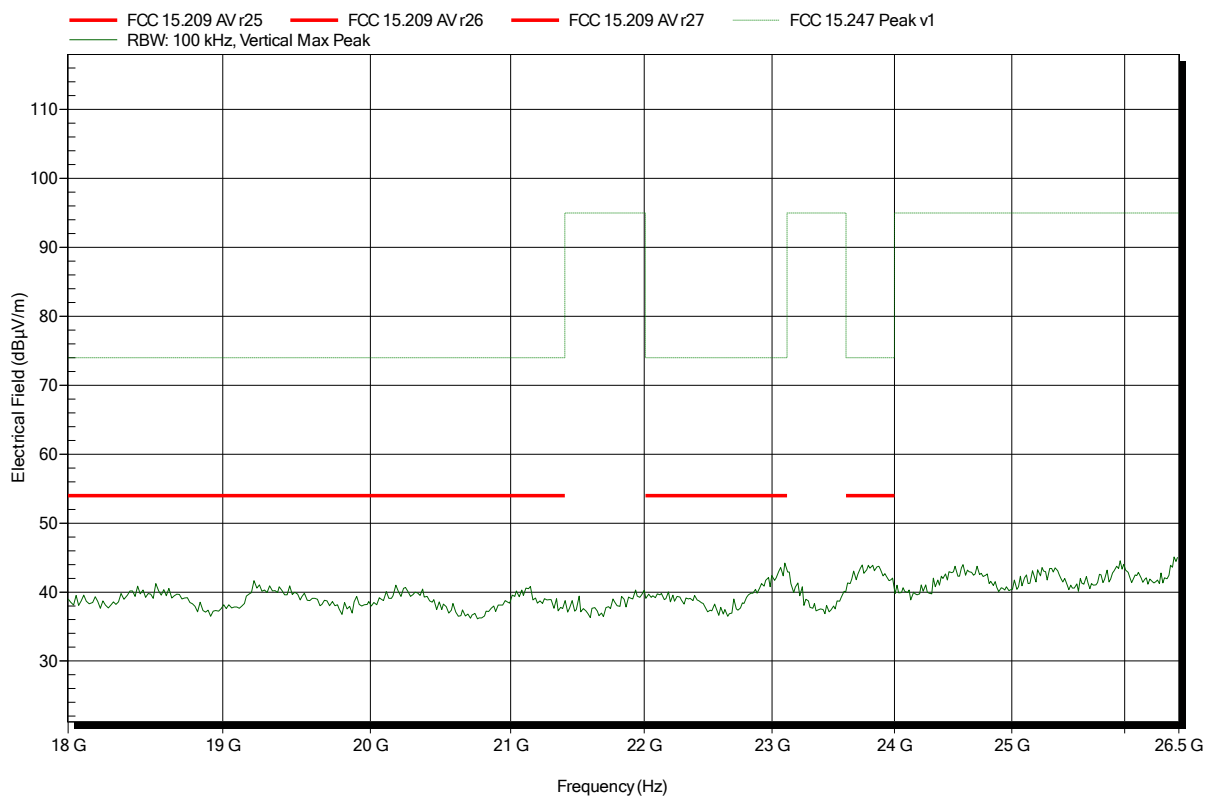


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 0; 2402 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 143

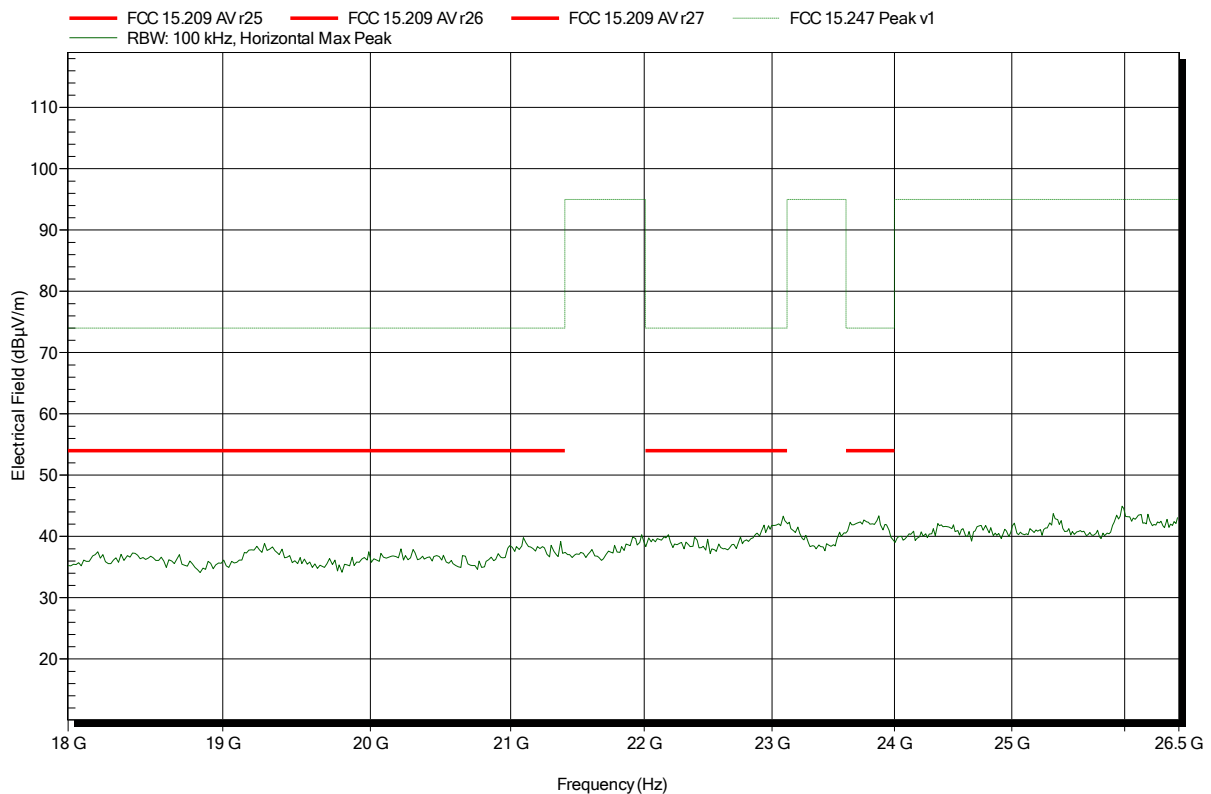


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 39; 2441 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 137

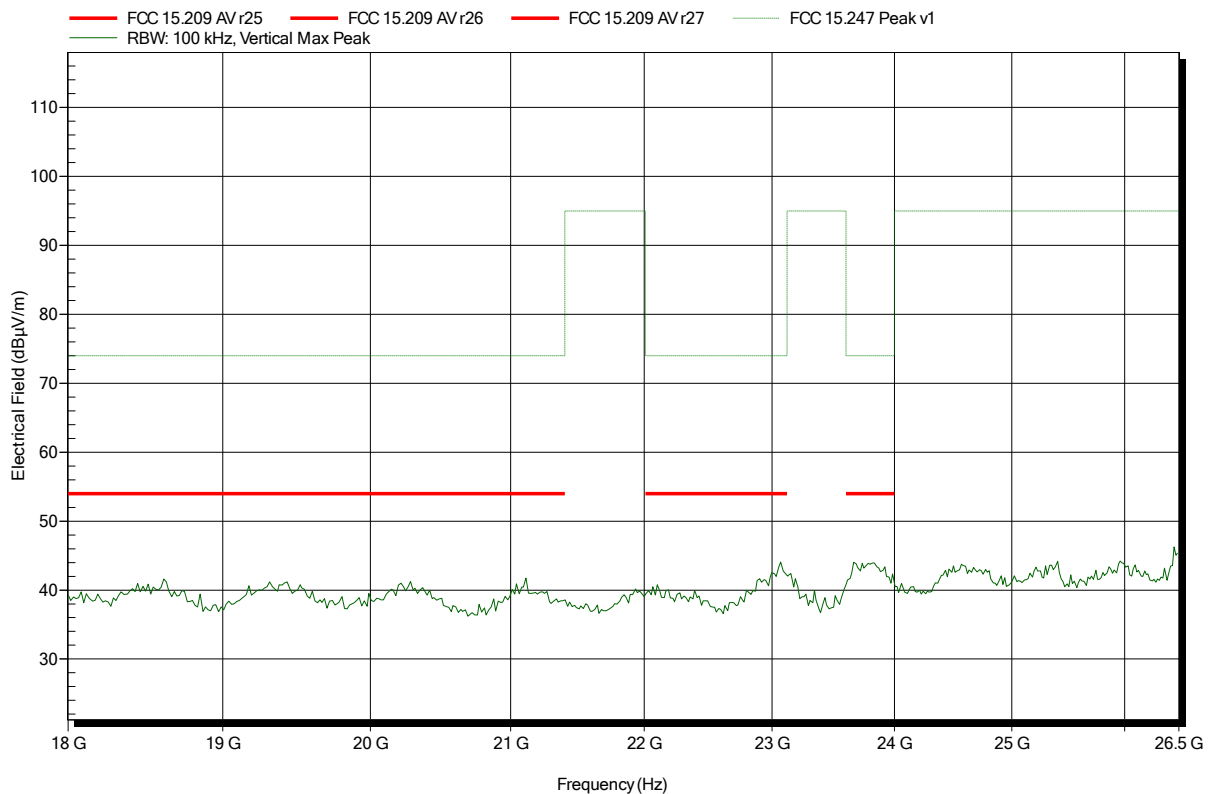


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 39; 2441 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 145

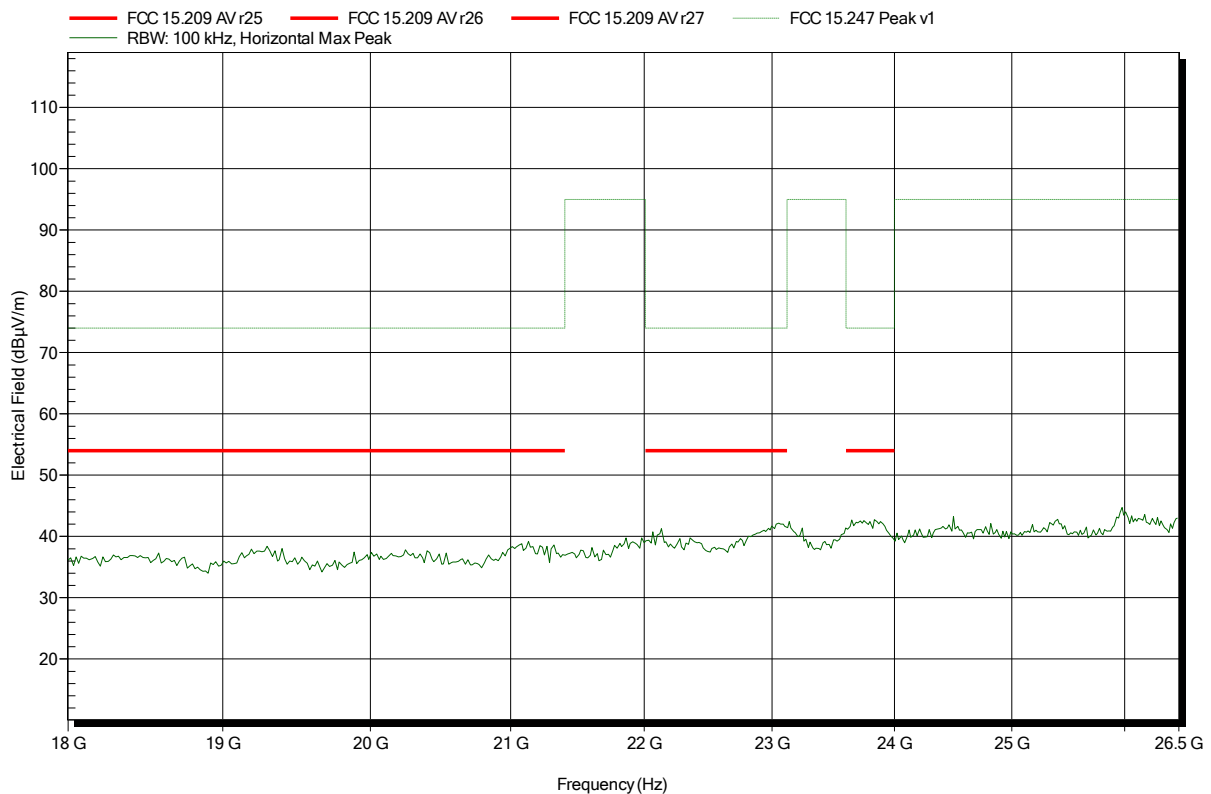


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 78; 2480 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 149

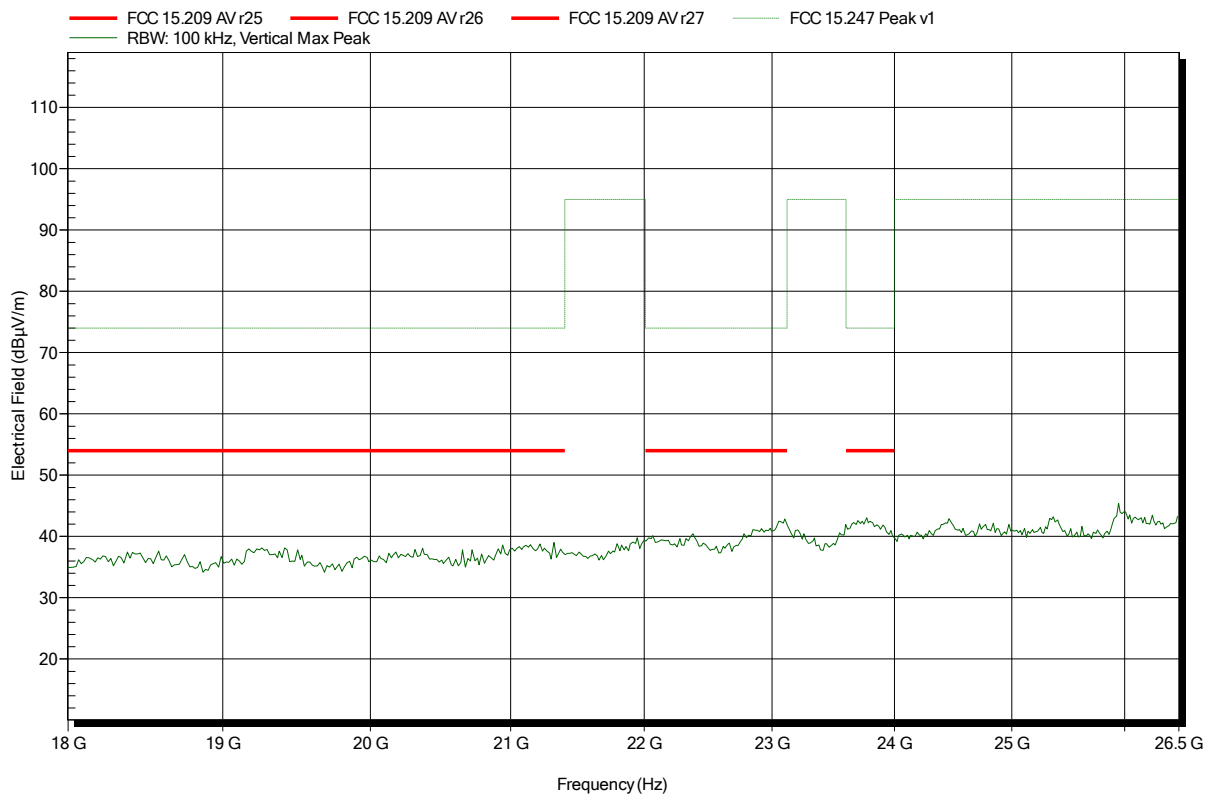


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT-EDR; CH: 78; 2480 MHz; DUT-TX-Mode; 3-DH5
 Test Date: 2015-02-26
 Note: EUT vertical

Index 147

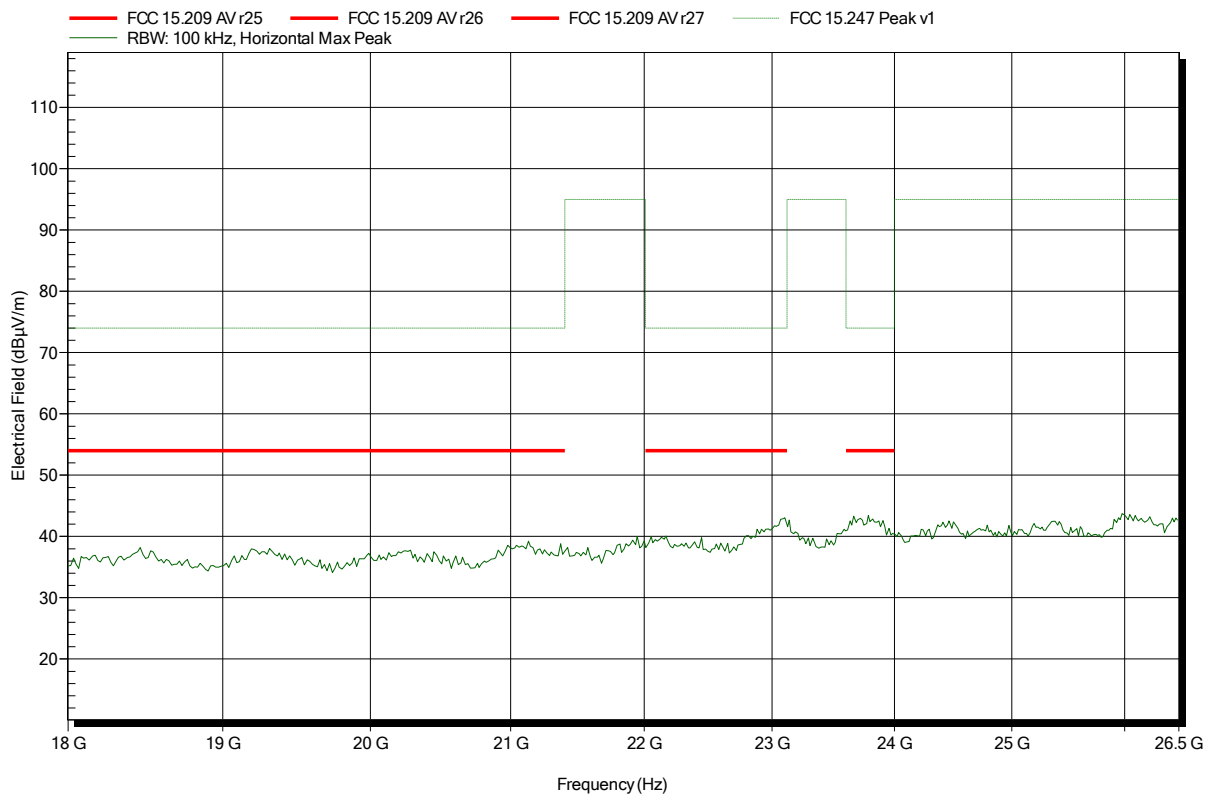


ANNEX B Receiver radiated spurious emissions

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1VDC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: RX; BT-BR; CH: Hopping; RX -Scan-Mode
 Test Date: 2015-02-27
 Note: EUT vertical

Index 88

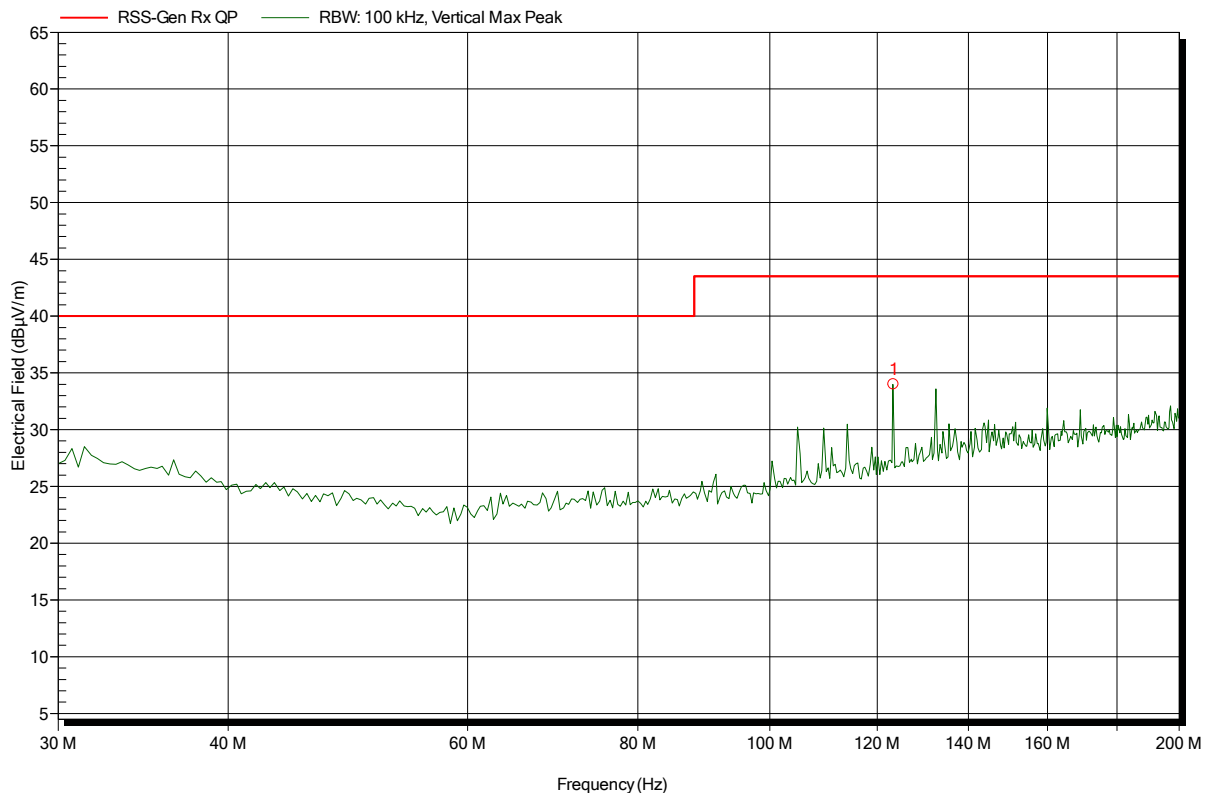

Frequency	Peak	Peak Limit	Peak Difference	Status
123.293 MHz	33.98 dBµV/m	43.5 dBµV/m	-9.52 dB	Pass

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1VDC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: RX; BT-BR; CH: Hopping; RX -Scan-Mode
 Test Date: 2015-02-27
 Note: EUT vertical

Index 91

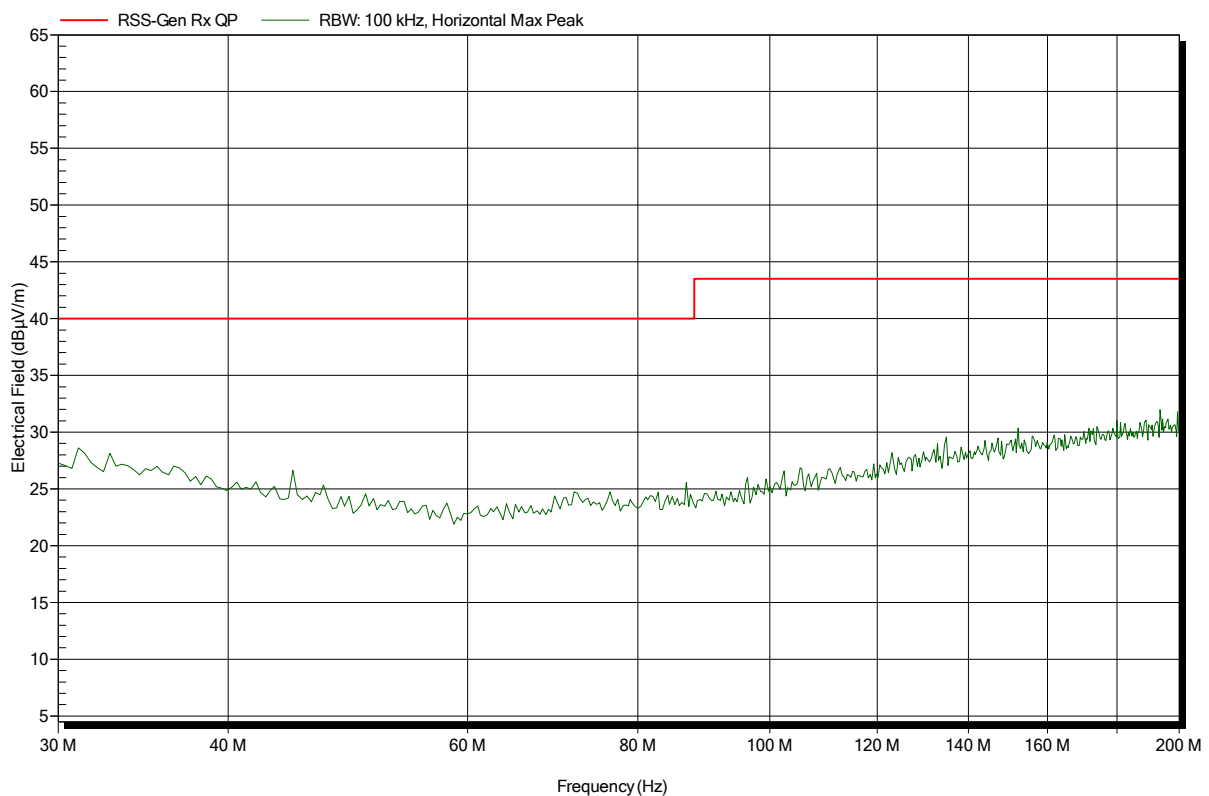


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: RX; BT-BR; CH: Hopping; RX -Scan-Mode
 Test Date: 2015-02-27
 Note: EUT vertical

Index 82

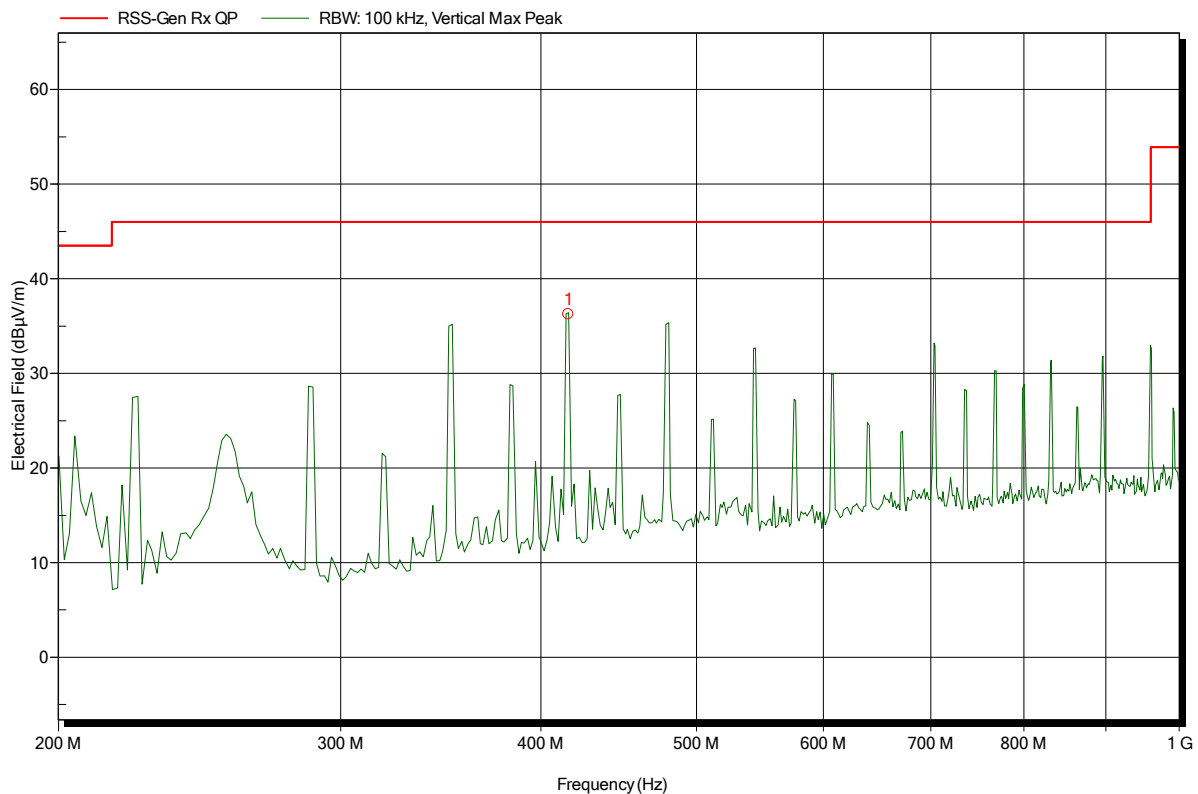

Frequency	Peak	Peak Limit	Peak Difference	Status
416 MHz	36.24 dBµV/m	46 dBµV/m	-9.76 dB	Pass

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1VDC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: RX; BT-BR; CH: Hopping; RX -Scan-Mode
 Test Date: 2015-02-27
 Note: EUT vertical

Index 85

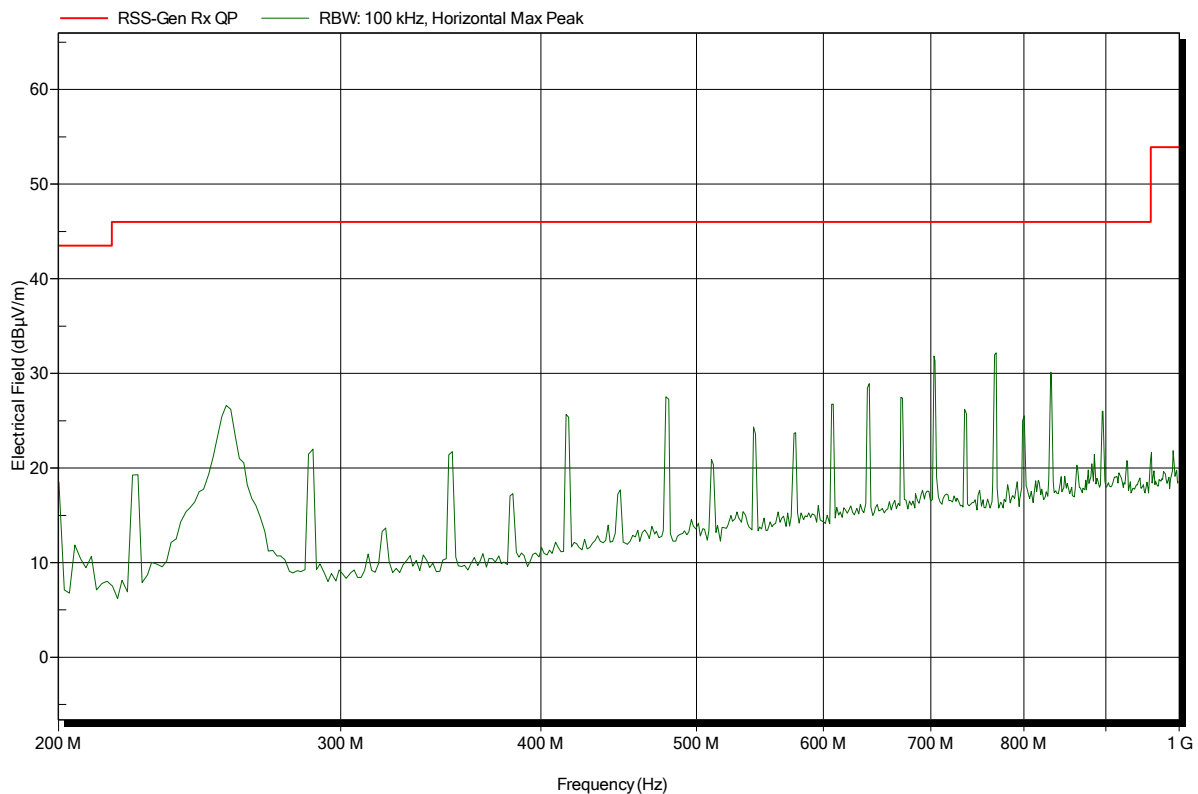


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1VDC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3 m
 Mode: RX; BT-BR; CH: Hopping; RX -Scan-Mode
 Test Date: 2015-02-27
 Note: EUT vertical

Index 71

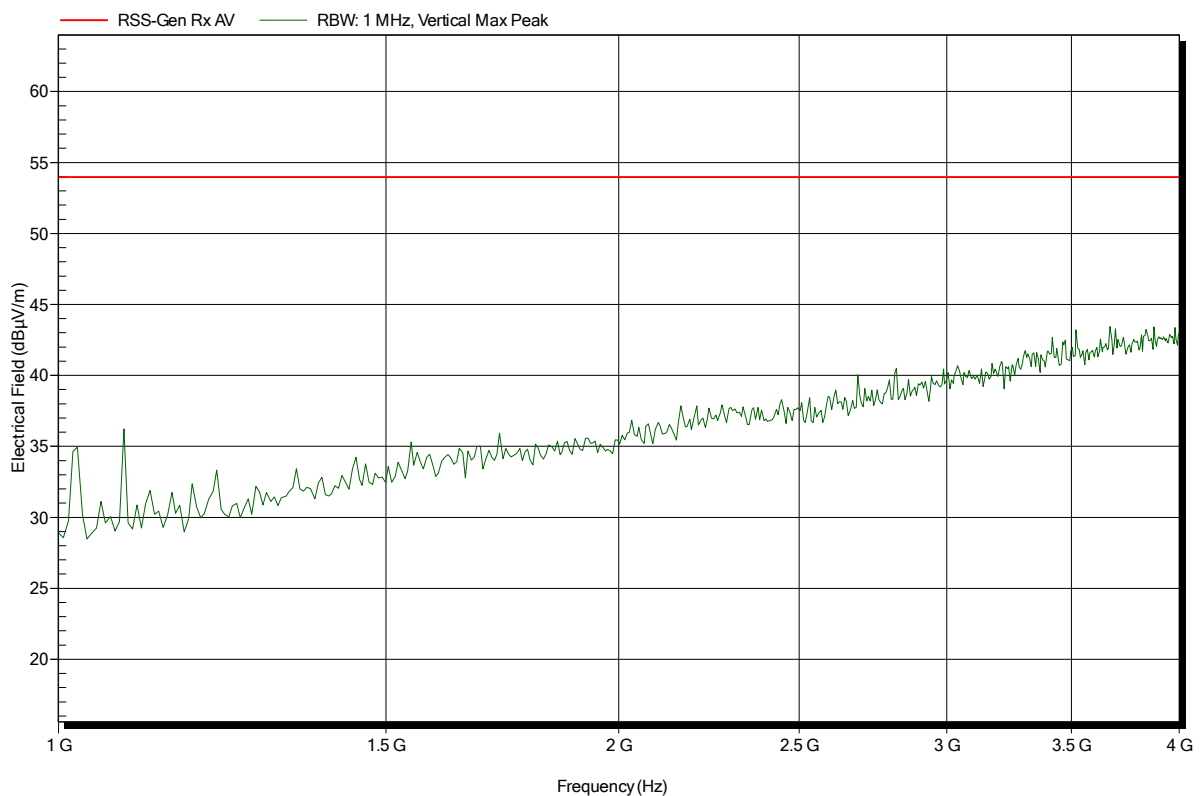


Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1VDC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m
 Mode: RX; BT-BR; CH: Hopping; RX -Scan-Mode
 Test Date: 2015-02-27
 Note: EUT vertical

Index 77

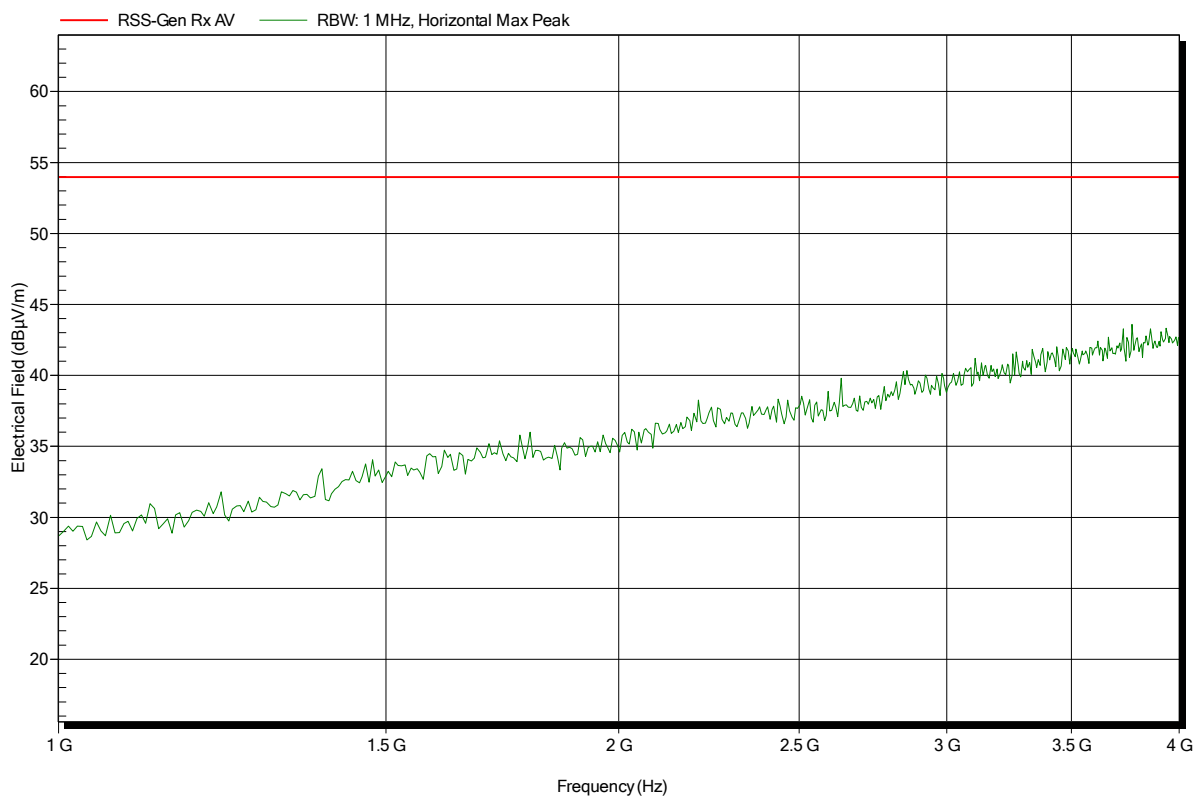

Test Report No.: G0M-1406-3919-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1VDC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	3 m
Mode:	RX; BT-BR; CH: Hopping; RX -Scan-Mode
Test Date:	2015-02-27
Note:	EUT vertical

Index 72

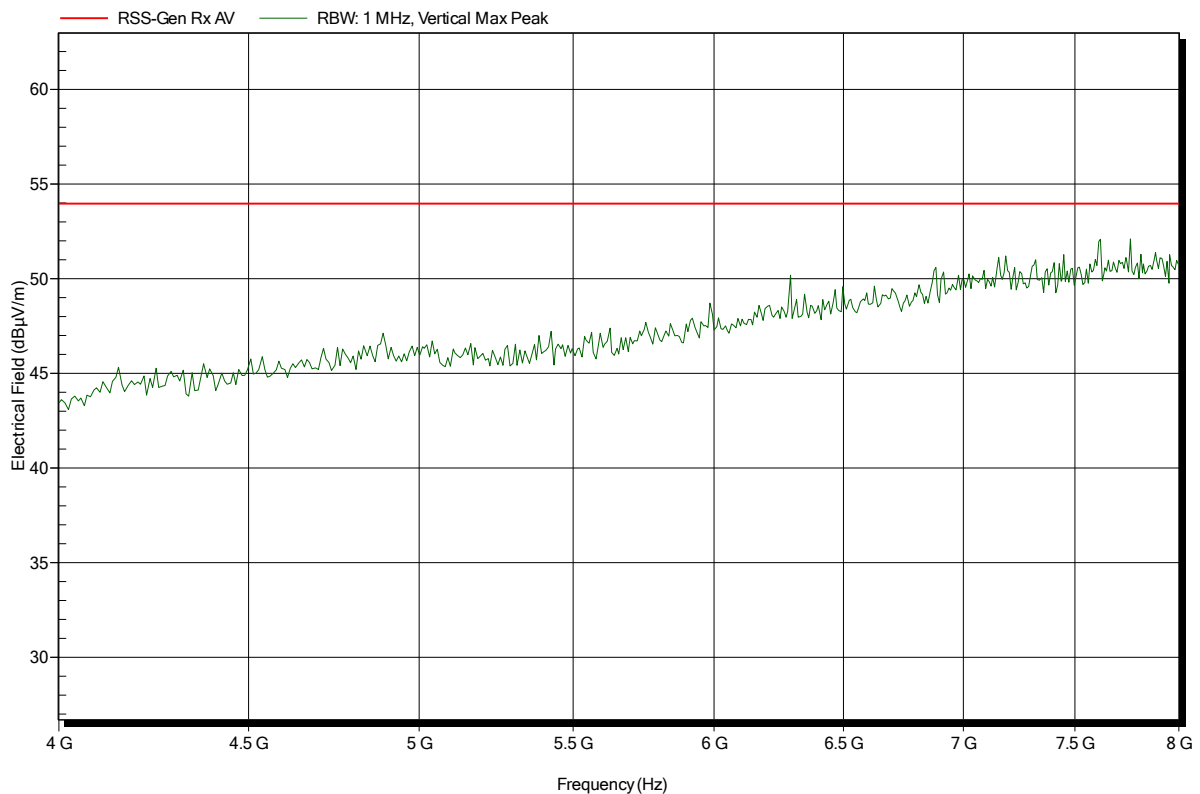

Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3919

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Test Conditions: Tnom: 24°C, Vnom: 11.1VDC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3 m
 Mode: RX; BT-BR; CH: Hopping; RX -Scan-Mode
 Test Date: 2015-02-27
 Note: EUT vertical

Index 78

