



APPLICATION SPECIFICATION

2.4/5GHZ WIFI DUAL BAND ANTENNA WITH SIDE SOLDER CABLE

TABLE OF CONTENTS

1.0 SCOPE

2.0 PRODUCT DESCRIPTION

3.0 APPLICABLE DOCUMENTS

4.0 ANTENNA PERFORMANCE

5.0 ASSEMBLY GUIDELINE

6.0 THE ANTENNA PERFORMANCE VARIATION WITH CABLE LENGTH

7.0 RF PERFORMANCE AS A FUNCTION OF IMPLEMENTATION

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	SHEET No. 1 of 32
DOCUMENT NUMBER: AS-2042810200	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24



APPLICATION SPECIFICATION

2.4/5GHZ WIFI DUAL BAND ANTENNA WITH SIDE SOLDER CABLE

1.0 SCOPE

This specification describes the antenna application and surrounding. The information in this document is for reference and benchmark purposes only. The user is responsible for validating antenna RF performance based on the user's actual implementation.

Although this document AS-2042810200 is for U.FL compatible connector and 200mm cable, it is applicable to all products under 204281 series. All measurements in this document are done with the part no.2042810200 with a cable length of 200mm, it is used to illustrate the product application. There is no different between the performances for 204810100 and 204811100. The document is applicable to all cable length as well.

Antenna illustrations in this document are generic representations. They are not intended to be an image of any antenna listed in the scope.

2.0 PRODUCT DESCRIPTION

2.1 PRODUCT NAME AND SERIES NUMBER (S)

Product name: 2.4/5GHz WIFI Dual Band Antenna with Side Solder Cable


Series Number: 204281

2.2 DESCRIPTION

Series 204281 is a balanced, side-fed, dipole-type, high efficiency antenna for 2.4/5 GHz applications, including WiFi, Bluetooth, Zigbee and others. This antenna is made from poly-flexible material with small size 35*11*0.1mm, and has double-sided adhesive tape for easy "peel and stick" mounting. This balanced antenna with ground plane independent design offers various cable length options for ease of integration into various devices.

2.3 PRODUCT STRUCTURE INFORMATION

Please refer to PS-2042810200 for full information.

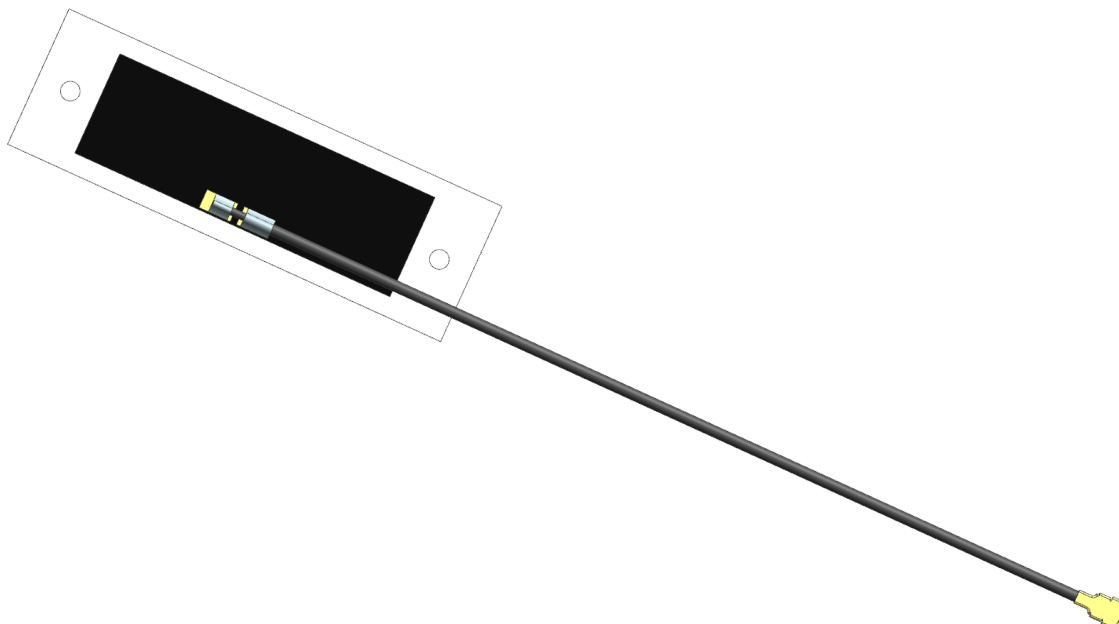

Molex 204281XXXX 2.4/5GHz Wide dual band Antenna 3D View

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	2 of 32
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

3.0 APPLICABLE DOCUMENTS

Document	Number	Description
Sales Drawing(SD)	SD-2042810200	Mechanical Dimension of the product
	SD-2042811100	
Product Specification (PS)	PS-2042810200	Product Specification
Packing Drawing(PK)	PK-2042810200	Product packaging specifications

4.0 ANTENNA PERFORMANCE

Product name	2.4/5GHz Wide Dual Band Antenna with side solder cable
Part number	204281****
Frequency	2.4GHz-2.5GHz
	5.15GHz-5.85GHz
Polarization	Linear
Operating with matching	-30℃ to 85℃
Storage with matching	-40℃ to 95℃
RF Power	2 Watts
Impedance with matching	50 Ohms
Antenna type	Flex
Connector type	U.FL for 2042810***
	IPEX MHF4 for 2042811***
User Implementation type	Adhesive 3M9077
Cable diameter	Ø1.13mm
Cable length	50mm (P/N for 2042810050 and 2042811050)
	100mm (P/N for 2042810100 and 2042811100)
	150mm (P/N for 2042810150 and 2042811150)
	200mm (P/N for 2042810200 and 2042811200)
	250mm (P/N for 2042810250 and 2042811250)
	300mm to 400mm (P/N for 2042810300 and 2042811300)

4.1 RF TEST CONDITIONS

All measurements are done of the antenna mounted on a PC/ABS material block of 1mm thickness with VNA Agilent 5071C and Over-The-Air (OTA) chamber. All measurements in this document are done with the part no.2042810200 and 2042811100 with a cable length of 200mm.

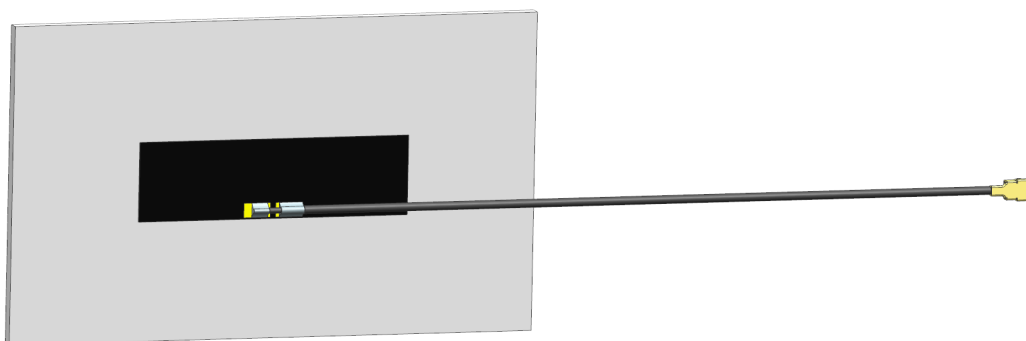


FIGURE4.1.1 ANTENNA LOADED WITH PC/ABS BLOCK OF 1MM THICKNESS

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	3 of 32
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

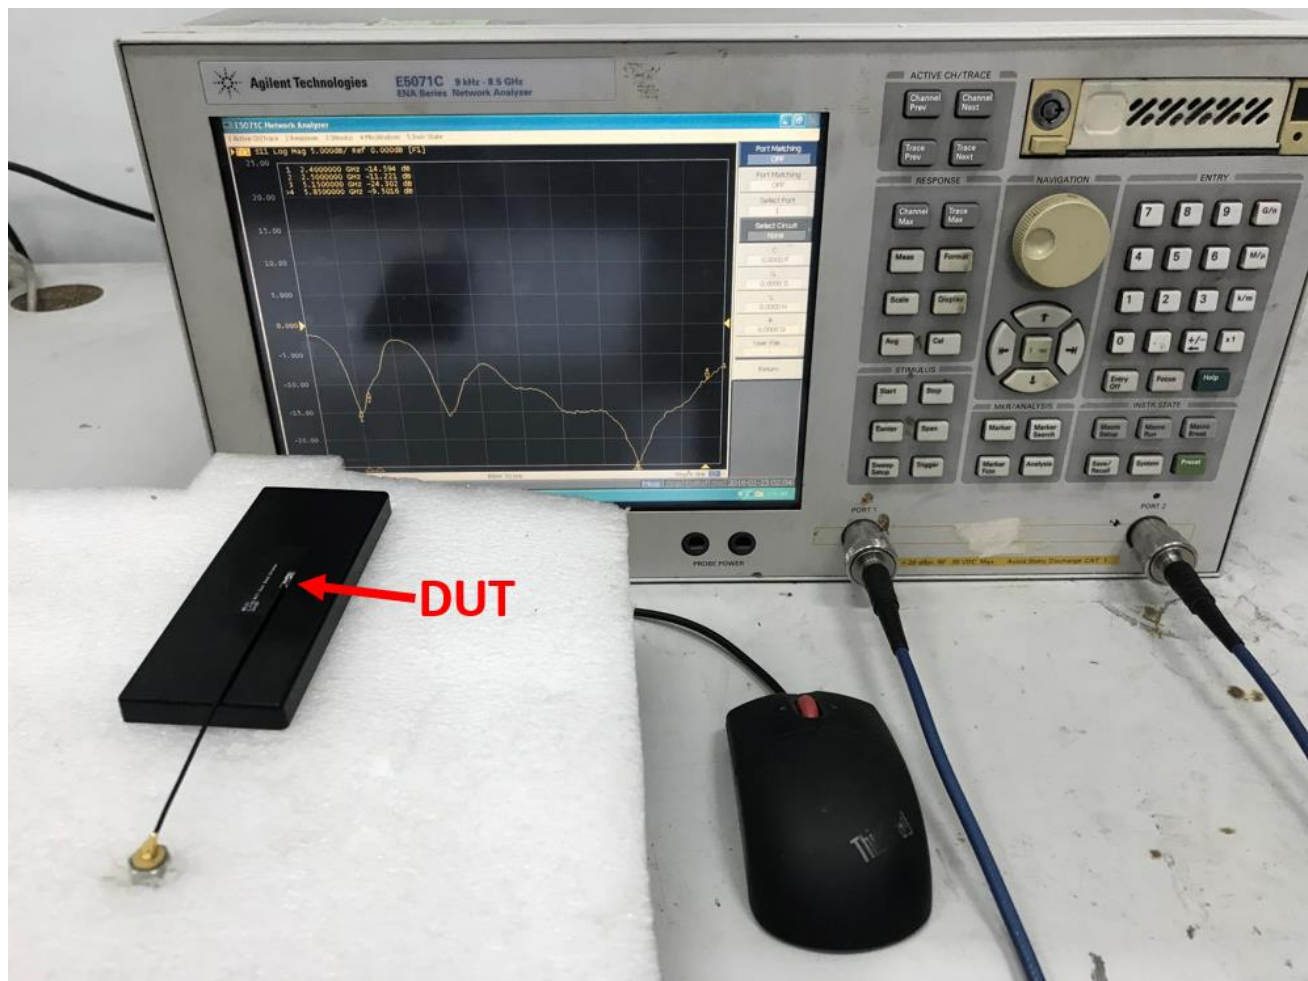


FIGURE 4.1.2 ANTENNA LOADED WITH PC/ABS BLOCK OF 1MM THICKNESS TESTED WITH VNA E5071C

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE			SHEET No. 4 of 32
DOCUMENT NUMBER: AS-2042810200	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24		

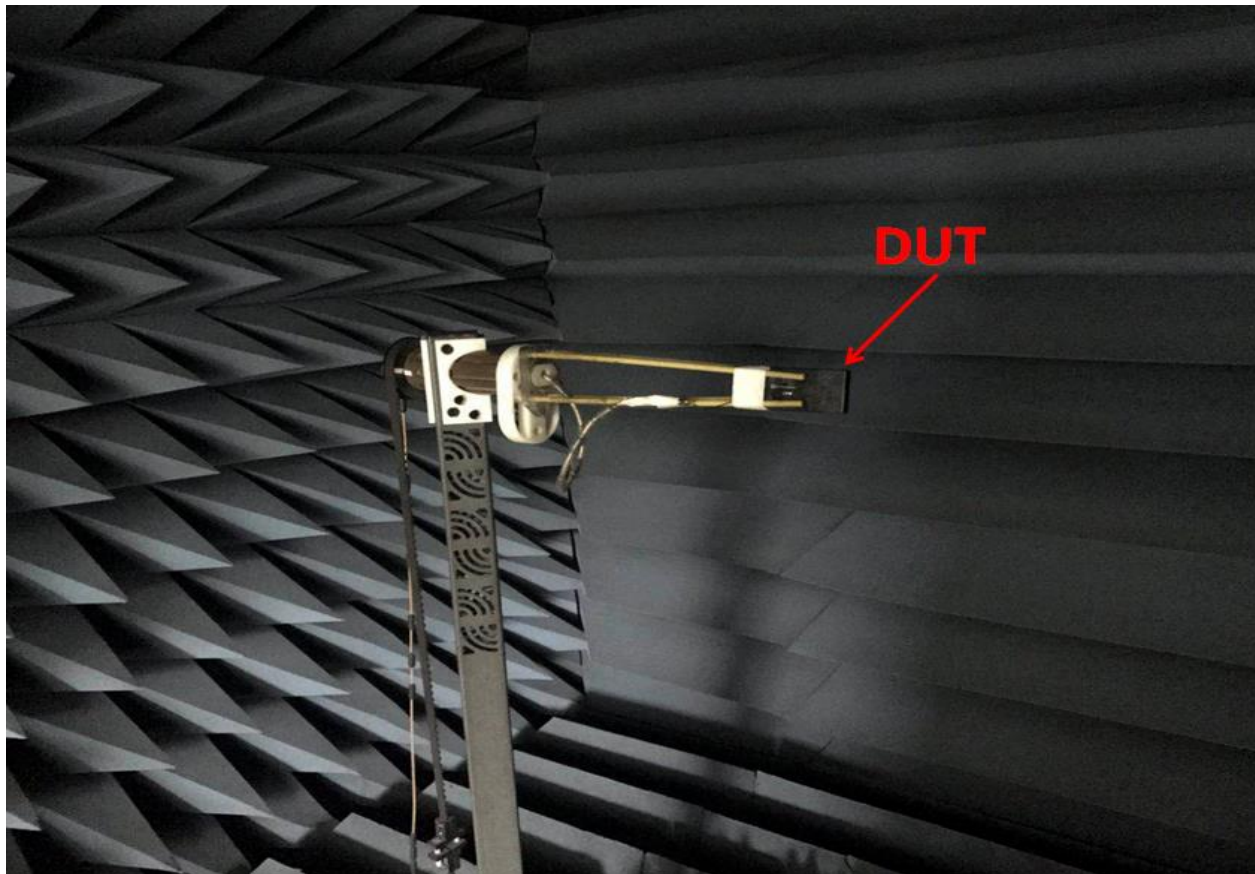


FIGURE4.1.3 ANTENNA LOADED WITH PC/ABS BLOCK OF 1MM THICKNESS TESTED IN OTA CHAMBER

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	SHEET No. 5 of 32
DOCUMENT NUMBER: AS-2042810200	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24



APPLICATION SPECIFICATION

4.2 ANTENNA PERFORMANCE

5.1.2 ANTENNA PERFORMANCE FOR CABLE LENGTH 100mm

P/N	2042810100 and 2042811100	
Frequency Range	2.4GHz-2.5GHz	5.15GHz-5.85GHz
Peak Gain(Max)	2.0dBi	3.3dBi
Total efficiency	>65%	>68%
Return Loss	<-10dB	

ANTENNA PERFORMANCE FOR CABLE LENGTH 150mm

P/N	2042810150 and 2042811150	
Frequency Range	2.4GHz-2.5GHz	5.15GHz-5.85GHz
Peak Gain(Max)	1.8dBi	3.0dBi
Total efficiency	>62%	>65%
Return Loss	<-10dB	

ANTENNA PERFORMANCE FOR CABLE LENGTH 200mm

P/N	2042810200 and 2042811200	
Frequency Range	2.4GHz-2.5GHz	5.15GHz-5.85GHz
Peak Gain(Max)	1.6dBi	2.8dBi
Total efficiency	>59%	>60%
Return Loss	<-10dB	

ANTENNA PERFORMANCE FOR CABLE LENGTH 250mm

P/N	2042810250 and 2042811250	
Frequency Range	2.4GHz-2.5GHz	5.15GHz-5.85GHz
Peak Gain(Max)	1.5dBi	2.6dBi
Total efficiency	>56%	>55%
Return Loss	<-10dB	

ANTENNA PERFORMANCE FOR CABLE LENGTH 300mm to 400mm

P/N	2042810300 and 2042811300	
Frequency Range	2.4GHz-2.5GHz	5.15GHz-5.85GHz
Peak Gain(Max)	1.3dBi	2.3dBi
Total efficiency	>53%	>50%
Return Loss	<-10dB	

REVISION:

C

ECR/ECN INFORMATION:

EC No: **171309**

DATE: **2018/01/24**

TITLE:

**2.4/5G WIFI ANTENNA WITH SIDE
SOLDER CABLE**

SHEET No.

6 of 32

DOCUMENT NUMBER:

AS-2042810200

CREATED / REVISED BY:

Benson Liu 2018/01/24

CHECKED BY:

Kang Cheng 2018/01/24

APPROVED BY:

Chris Zhong 2018/01/24

4.3 RETURN LOSS PLOT

All measurements in this document are done with a cable length of 200mm

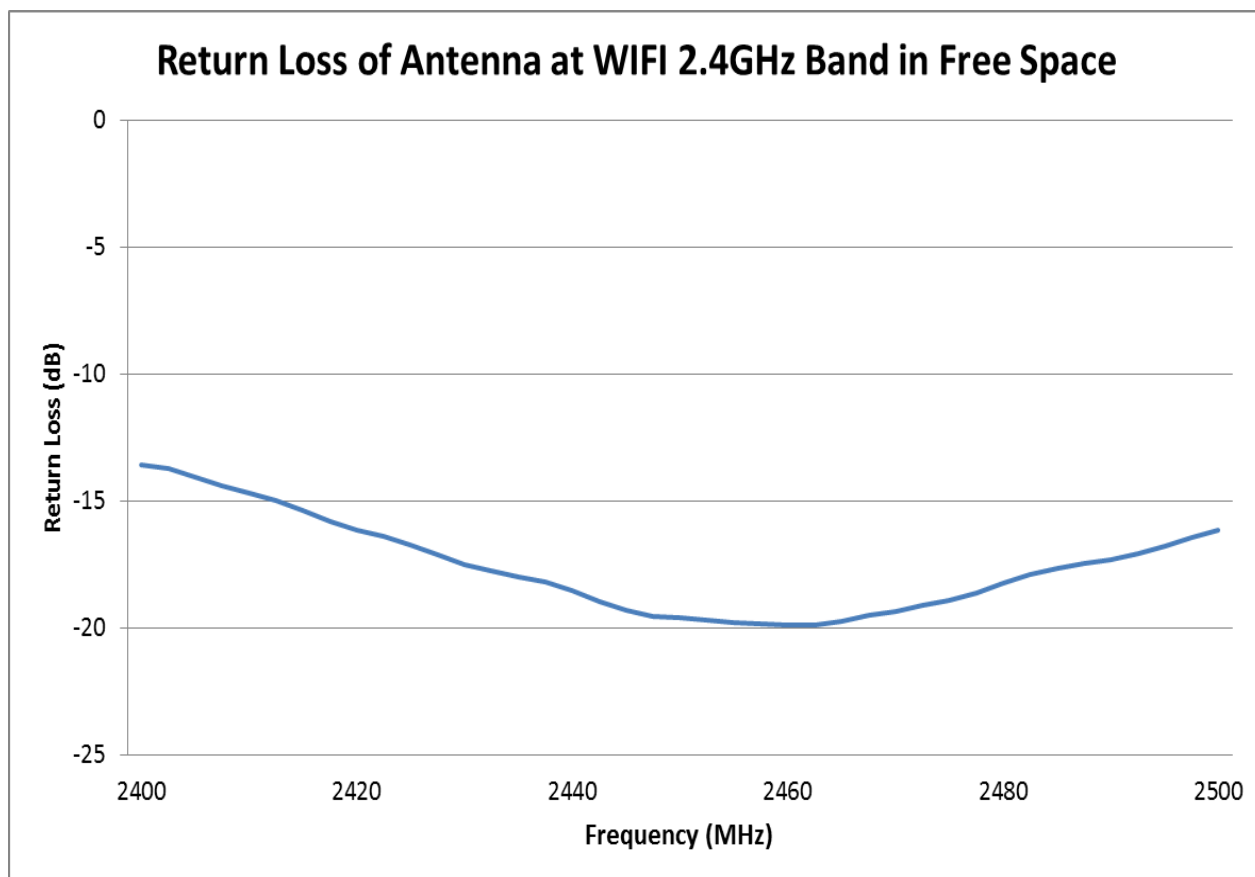


FIGURE 4.3.1 RETURN LOSS OF ANTENNA AT WIFI 2.4GHZ BAND IN FREE SPACE

REVISION:	ECR/ECN INFORMATION:	TITLE:		SHEET No.
C	EC No: 171309	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE		7 of 32
	DATE: 2018/01/24			
DOCUMENT NUMBER:		CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200		Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

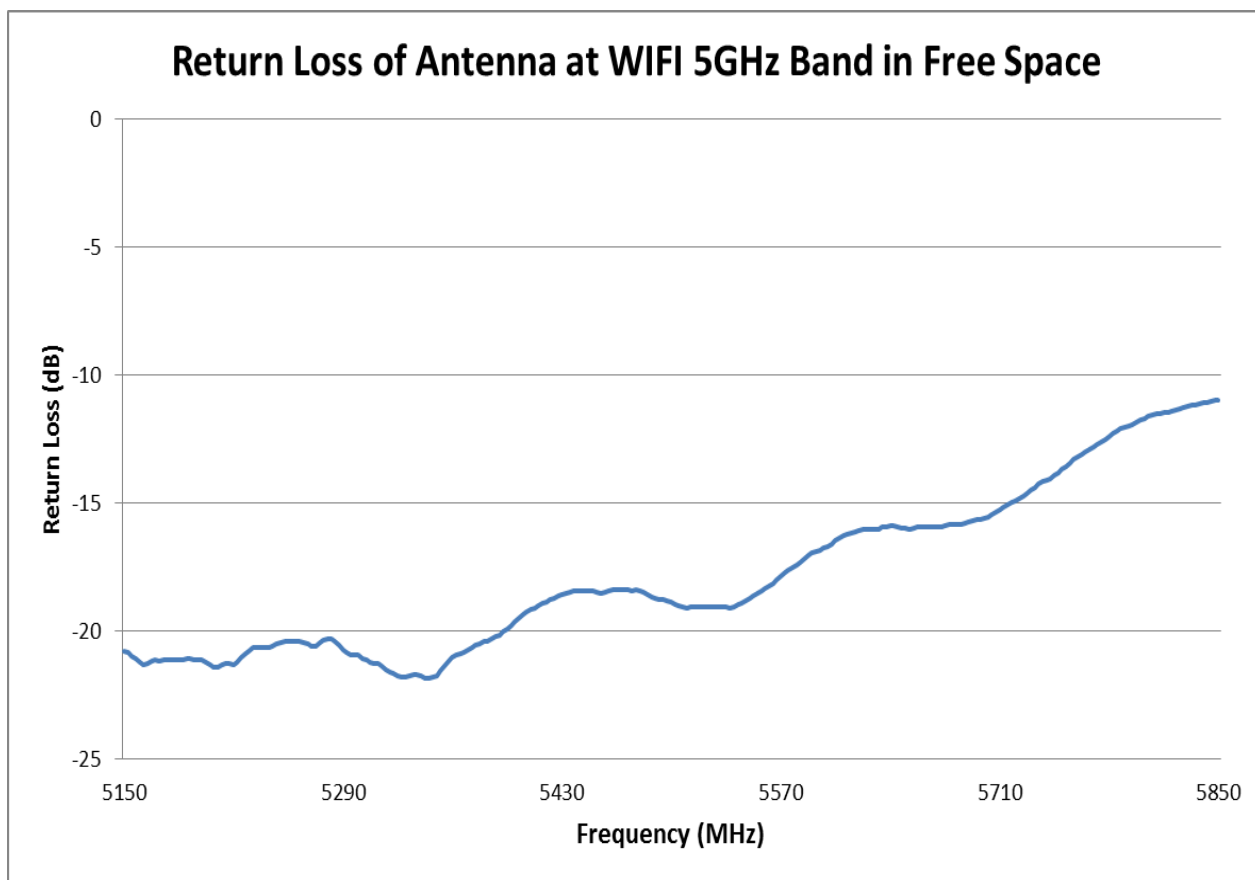


FIGURE 4.3.2 RETURN LOSS OF ANTENNA AT WIFI 5GHZ BAND IN FREE SPACE

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	8 of 32
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

4.4 EFFICIENCY PLOT

All measurements in this document are done with a cable length of 200mm

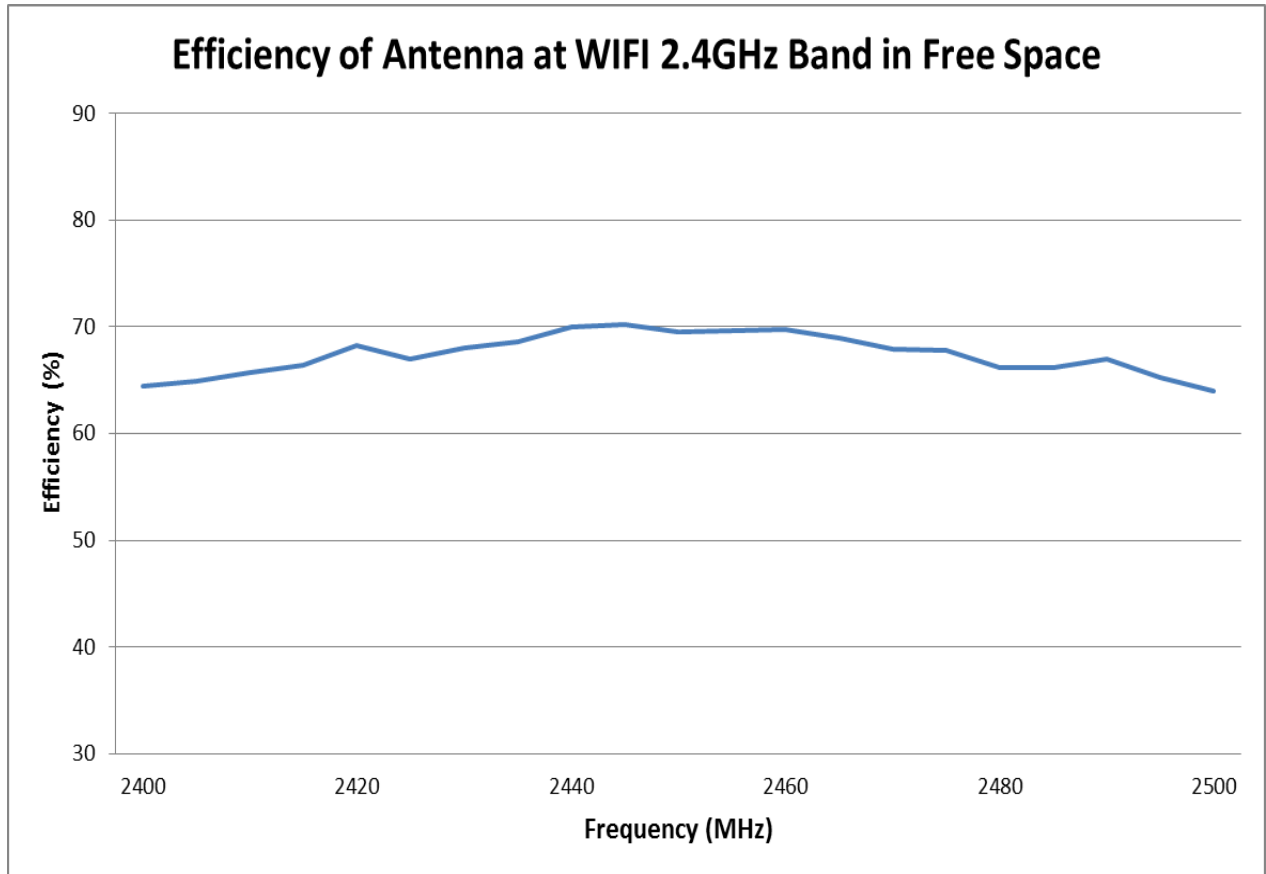


FIGURE 4.4.1 EFFICIENCY OF ANTENNA AT WIFI 2.4GHZ BAND IN FREE SPACE

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	9 of 32
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

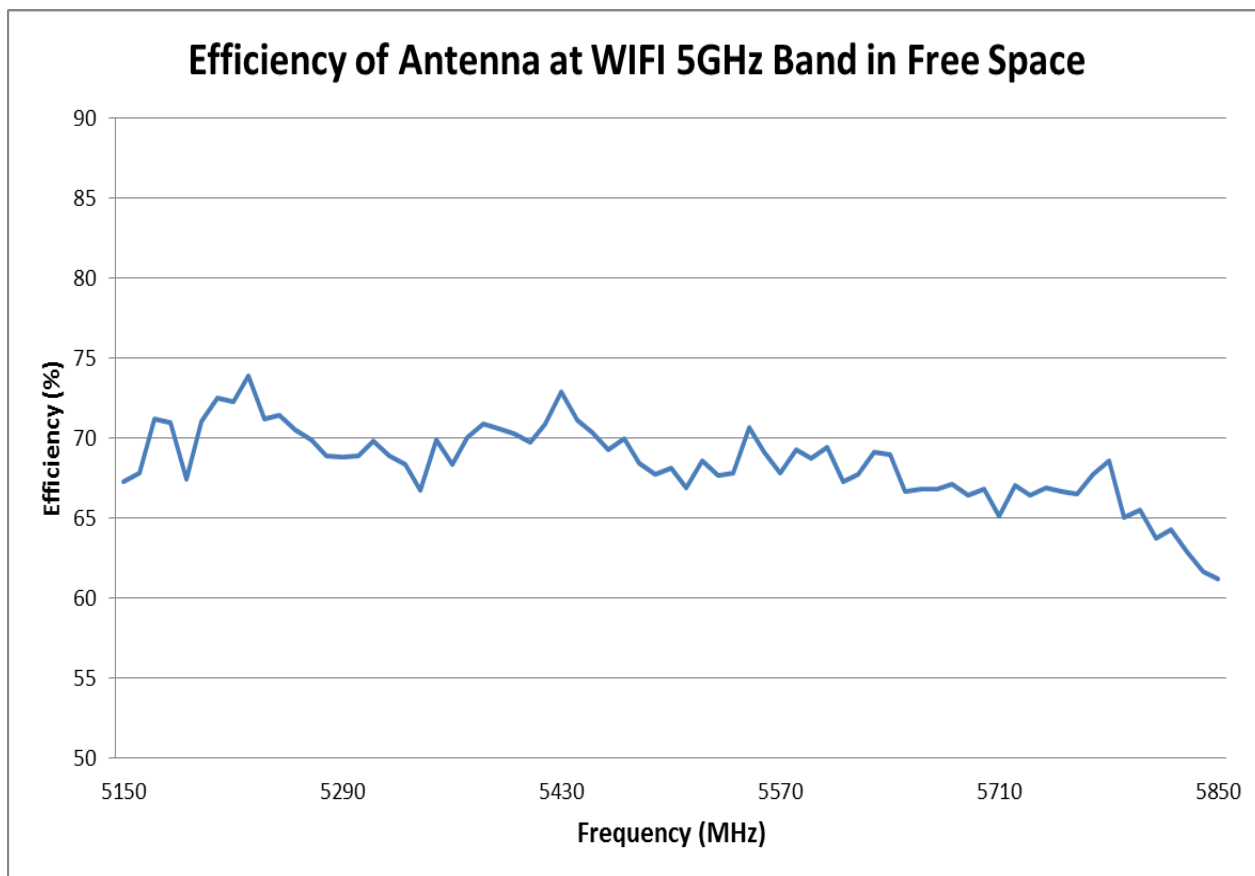


FIGURE 4.4.2 EFFICIENCY OF ANTENNA AT WIFI 5GHZ BAND IN FREE SPACE

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE		SHEET No. 10 of 32
DOCUMENT NUMBER: AS-2042810200		CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24

4.5 RADIATION PATTERN

All measurements in this document are done with a cable length of 200mm.



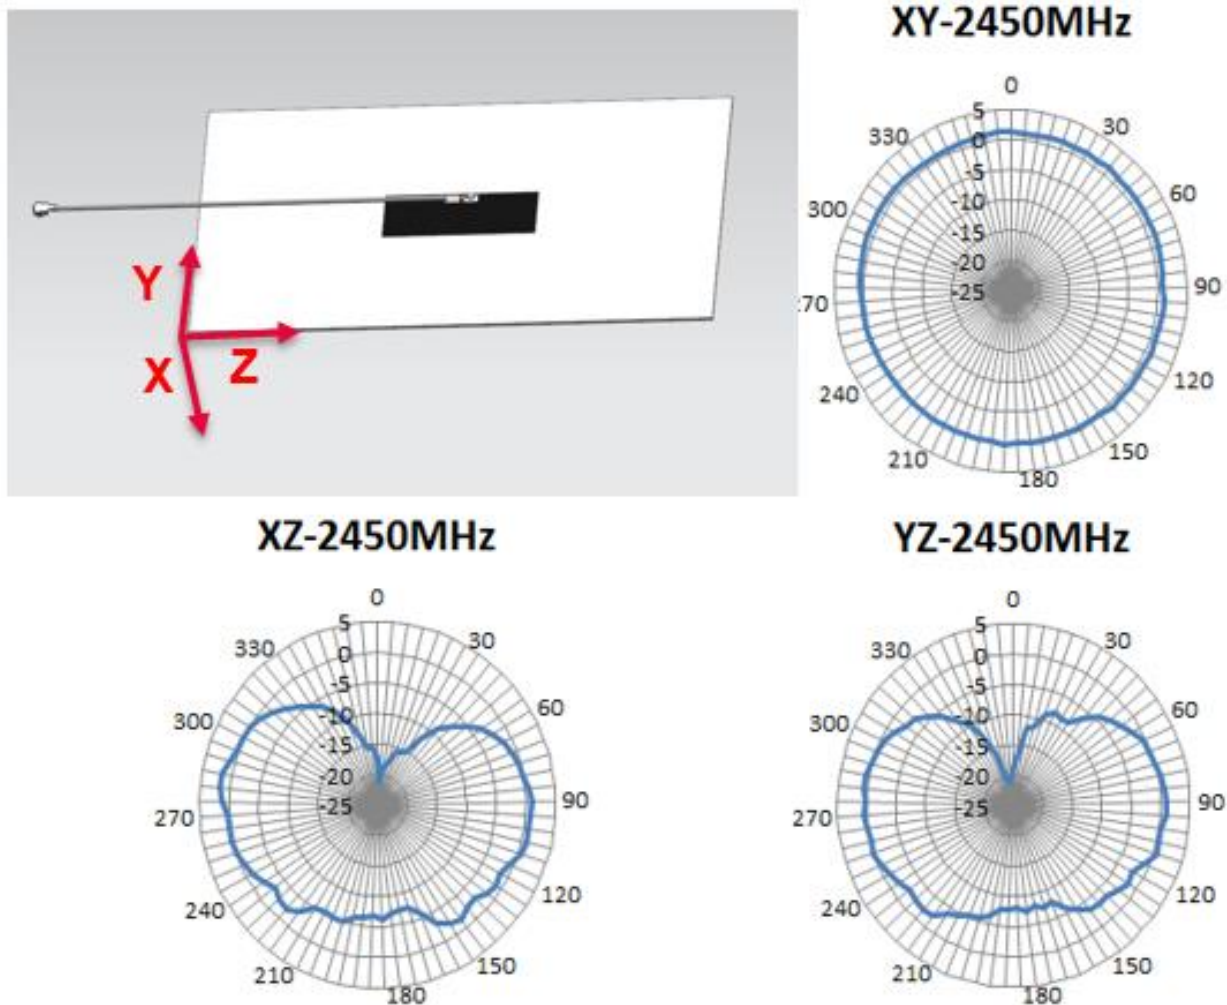


FIGURE 4.5.1 2D RADIATION PATTERN OF ANTENNA AT 2.45GHZ IN FREE SPACE


REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	11 of 32
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

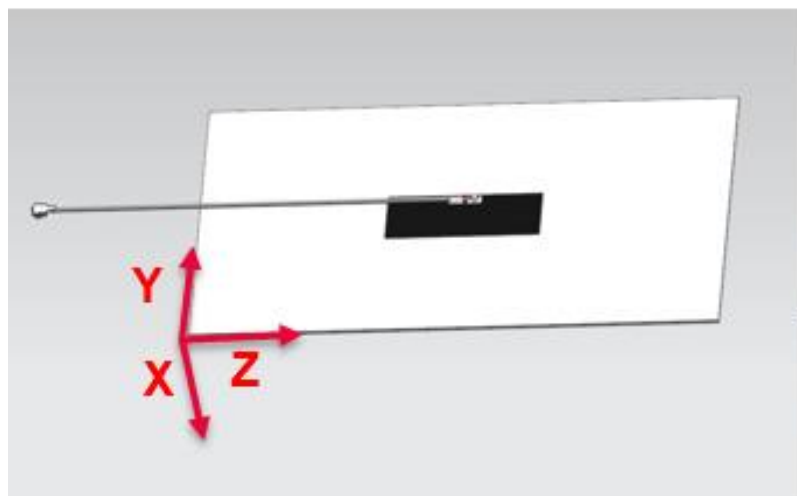

XY-5450MHz

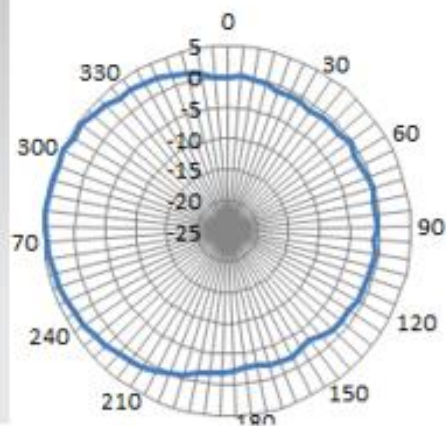

XZ-5450MHz

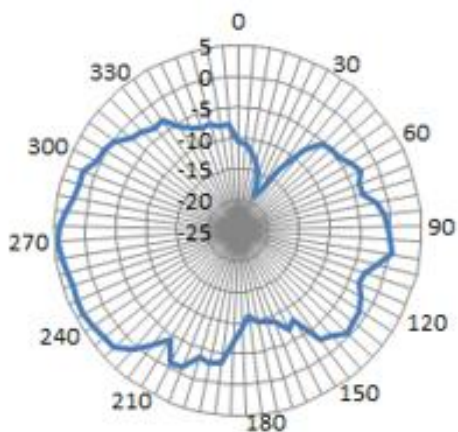

YZ-5450MHz

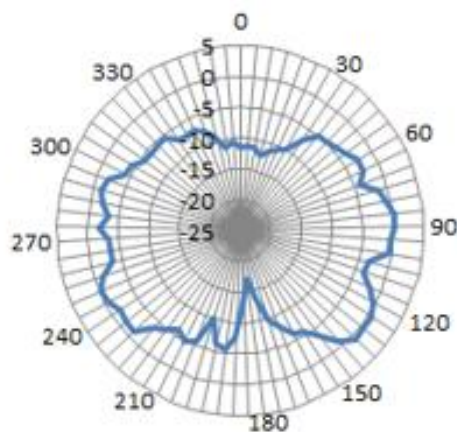


FIGURE 4.5.2 2D RADIATION PATTERN OF ANTENNA AT 5.45GHZ IN FREE SPACE

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	12 of 32
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

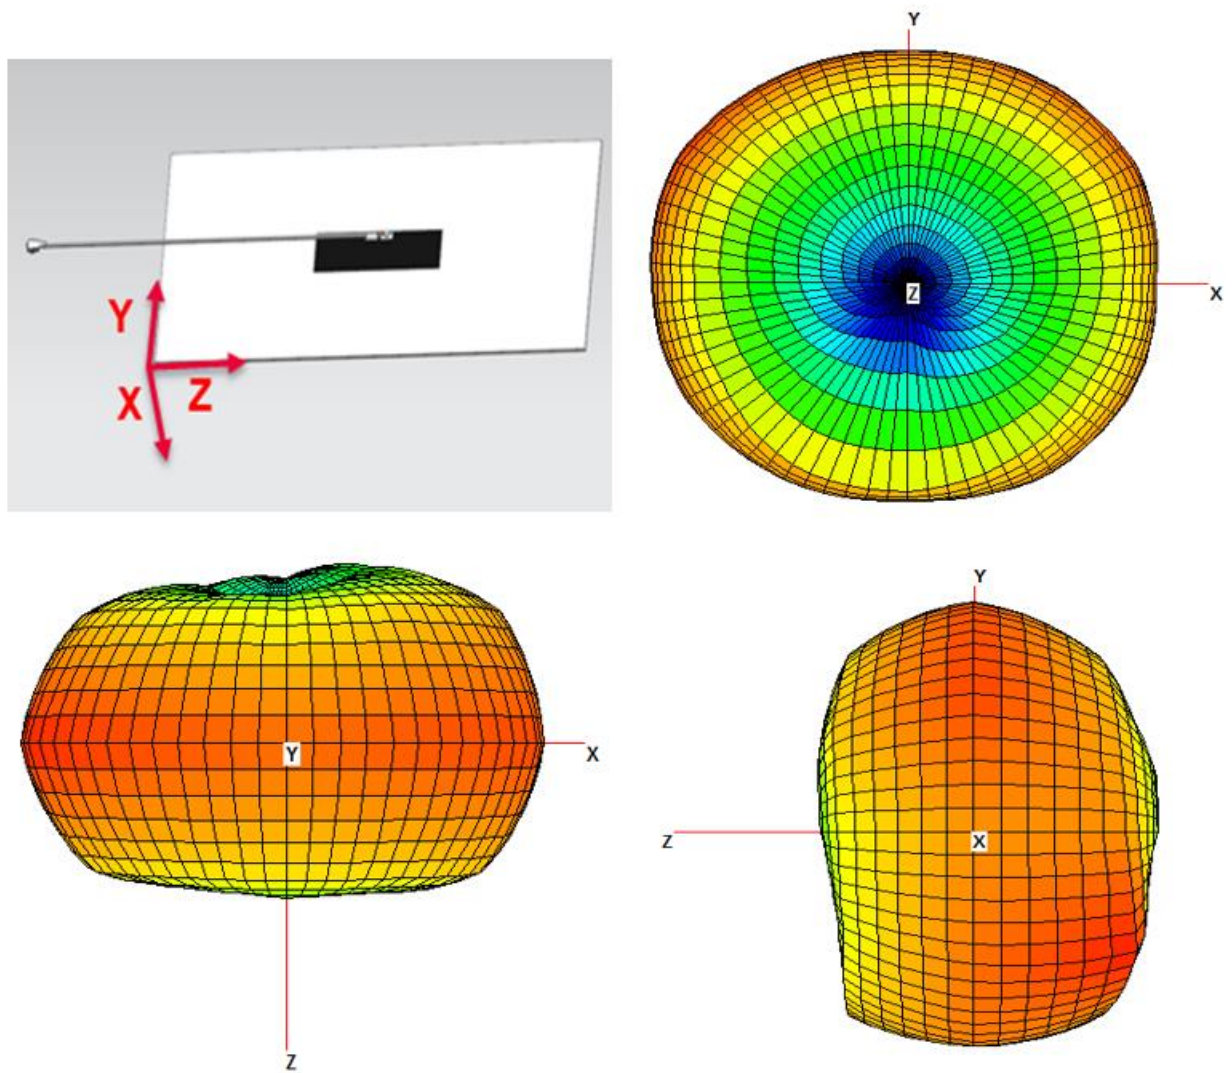


FIGURE 4.5.3 3D RADIATION PATTERN OF ANTENNA AT 2.45GHZ IN FREE SPACE

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	13 of 32
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

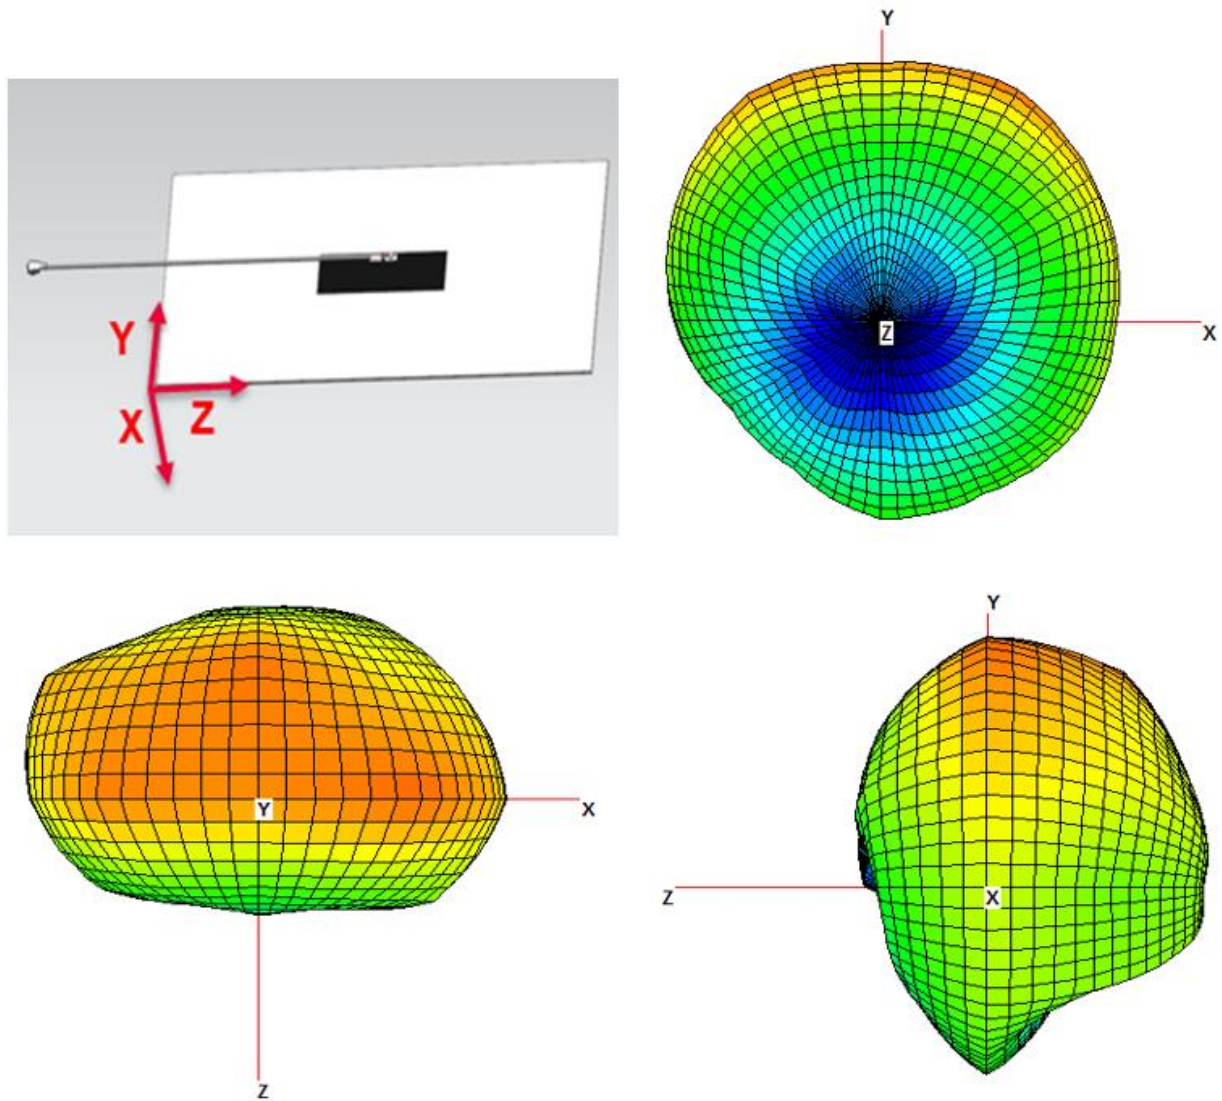


FIGURE 4.5.4 3D RADIATION PATTERN OF ANTENNA AT 5.45GHZ IN FREE SPACE

REVISION:	ECR/ECN INFORMATION:	TITLE:		SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE		14 of 32
DOCUMENT NUMBER:		CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200		Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

5.0 ASSEMBLY GUIDELINE

The flex antenna comes with an adhesive 3M9077 for assemble onto the plastic wall of the system. The surface should be smooth with $Ra < 1.6\mu m$, and need to clean the surface before sticking this product. The antenna cannot be placed on a metallic surface.

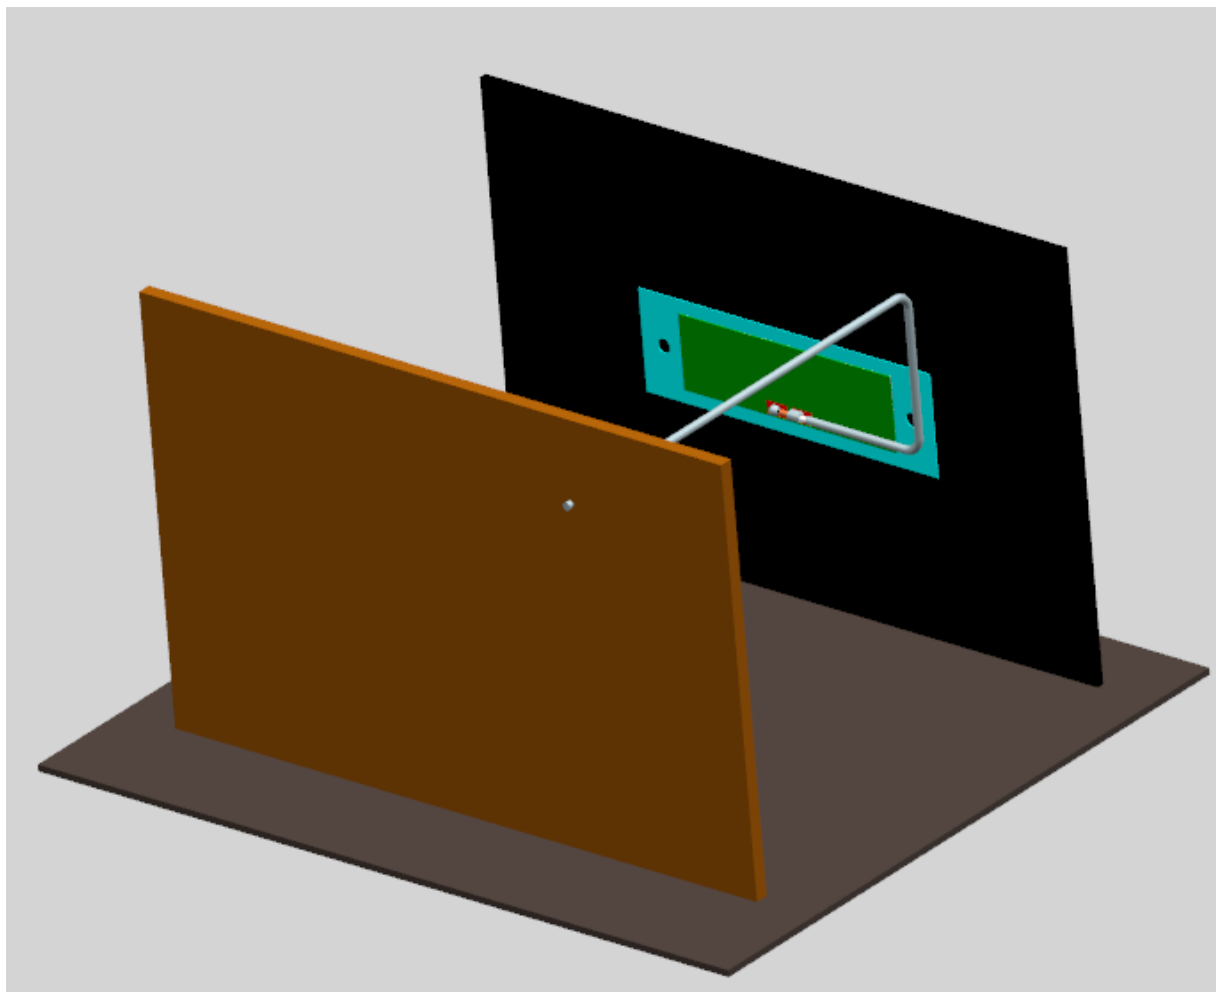


FIGURE 5.1 ASSEMBLY GUIDELINE

During the assembly of the antenna in a device, the cable needs to be positioned away from the antenna flex to achieve best performance. The cable must be away from the pattern at least 5mm as shown in figure 5.2. If the cable crosses into the antenna flex, the antenna performance will be degraded.

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	15 of 32
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

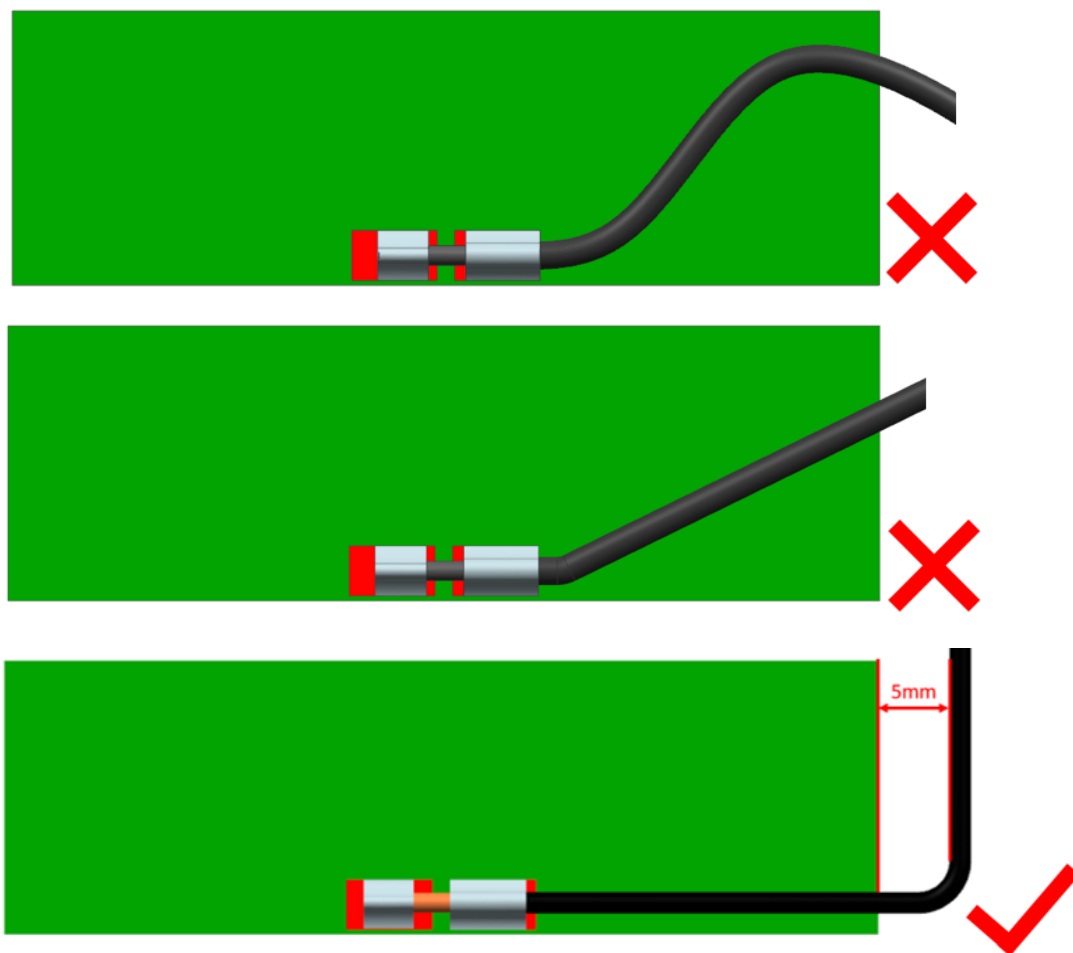


FIGURE 5.2 CABLE BENDING

6.0 THE ANTENNA PERFORMANCE VARIATION WITH CABLE LENGTH

6.1 CABLE LOSS

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENTS	
	Frequency Range	2.4GHz/5GHz	2GHz~3GHz	5GHz~6.0GHz
6.1.1	Attenuation	1m cable measured by VNA5071C	$\leq 3.5\text{dB/m}$	$\leq 5\text{dB/m}$

REVISION:	ECR/ECN INFORMATION:	TITLE:			SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE			16 of 32
DOCUMENT NUMBER:		CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:	
AS-2042810200		Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24	



APPLICATION SPECIFICATION

6.2 CABLE LENGTH AFFECT THE ANTENNA PERFORMANCE

Balance antenna resonance is insensitive by cable's length, but the cable's loss will affect the total efficiency. Refer to 6.1.1.

6.3 FOR EXAMPLE

Frequency (MHz)	100mm cable		Cable Loss	200mm cable	
	Efficiency (dB)	Efficiency (%)		Efficiency (dB)	Efficiency (%)
	X		X-LOSS=Y	Y	
2400	-1.91	64.44	0.2m*3.5dB/m	-2.61	54.85
2420	-1.66	68.21		-2.36	58.06
2440	-1.55	69.92		-2.25	59.52
2460	-1.56	69.74		-2.26	59.36
2480	-1.79	66.18		-2.49	56.33
2500	-1.94	64.02		-2.64	54.49
5150	-1.72	67.25	0.2m*5dB/m	-2.72	53.42
5200	-1.49	71.00		-2.49	56.40
5250	-1.46	71.40		-2.46	56.71
5300	-1.62	68.86		-2.62	54.69
5350	-1.56	69.89		-2.56	55.52
5400	-1.53	70.30		-2.53	55.84
5450	-1.53	70.32		-2.53	55.85
5500	-1.67	68.08		-2.67	54.08
5550	-1.51	70.63		-2.51	56.10
5600	-1.59	69.40		-2.59	55.13
5650	-1.76	66.66		-2.76	52.95
5700	-1.75	66.78		-2.75	53.04
5750	-1.76	66.67		-2.76	52.96
5800	-1.84	65.48		-2.84	52.01
5850	-2.13	61.21		-3.13	48.62

- The data is just for your reference, all accurate performance should be according to the test results in the OTA chamber.

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	17 of 32
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

7.0 RF PERFORMANCE AS A FUNCTION OF IMPLEMENTATION

7.1 ANTENNA RF PERFORMANCE AS A FUNCTION OF DIFFERENT LOCATIONS WITH PARALLEL PLANE GROUND

Antenna performance will be degraded if the antenna is placed too close to a ground plane. Four locations from 5mm, 10mm, 15mm and 20mm with a parallel plane ground have been evaluated. The locations are shown in figure 7.1.1. The plane ground size is 90mm*90mm. The antenna performance is better with larger distance between antenna and parallel plane ground. The minimum distance between antenna and plane ground is recommended to be at least 15mm to achieve acceptable RF performance.

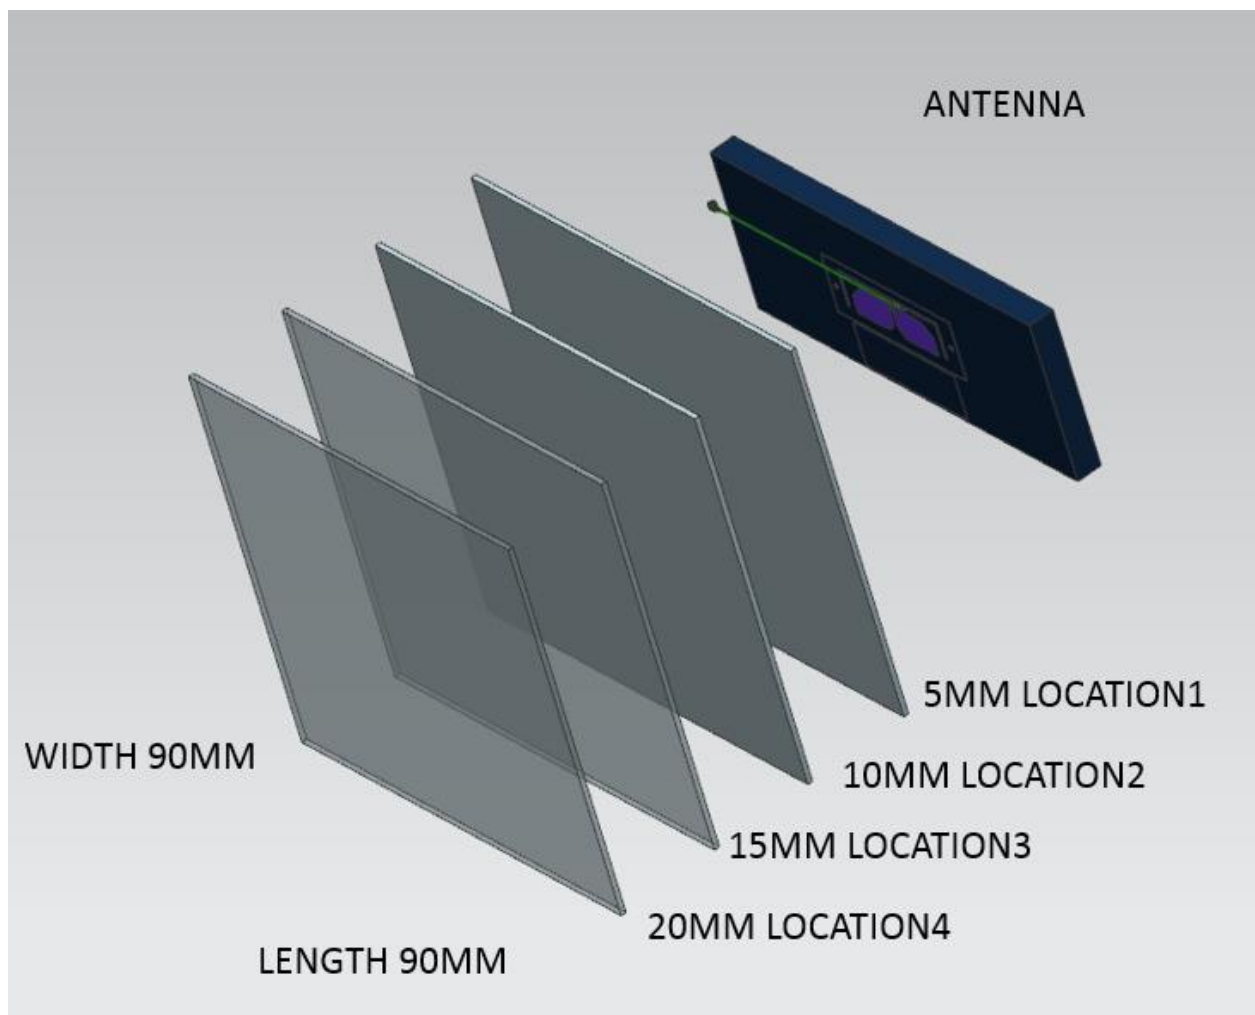


FIGURE 7.1.1 FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	18 of 32
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

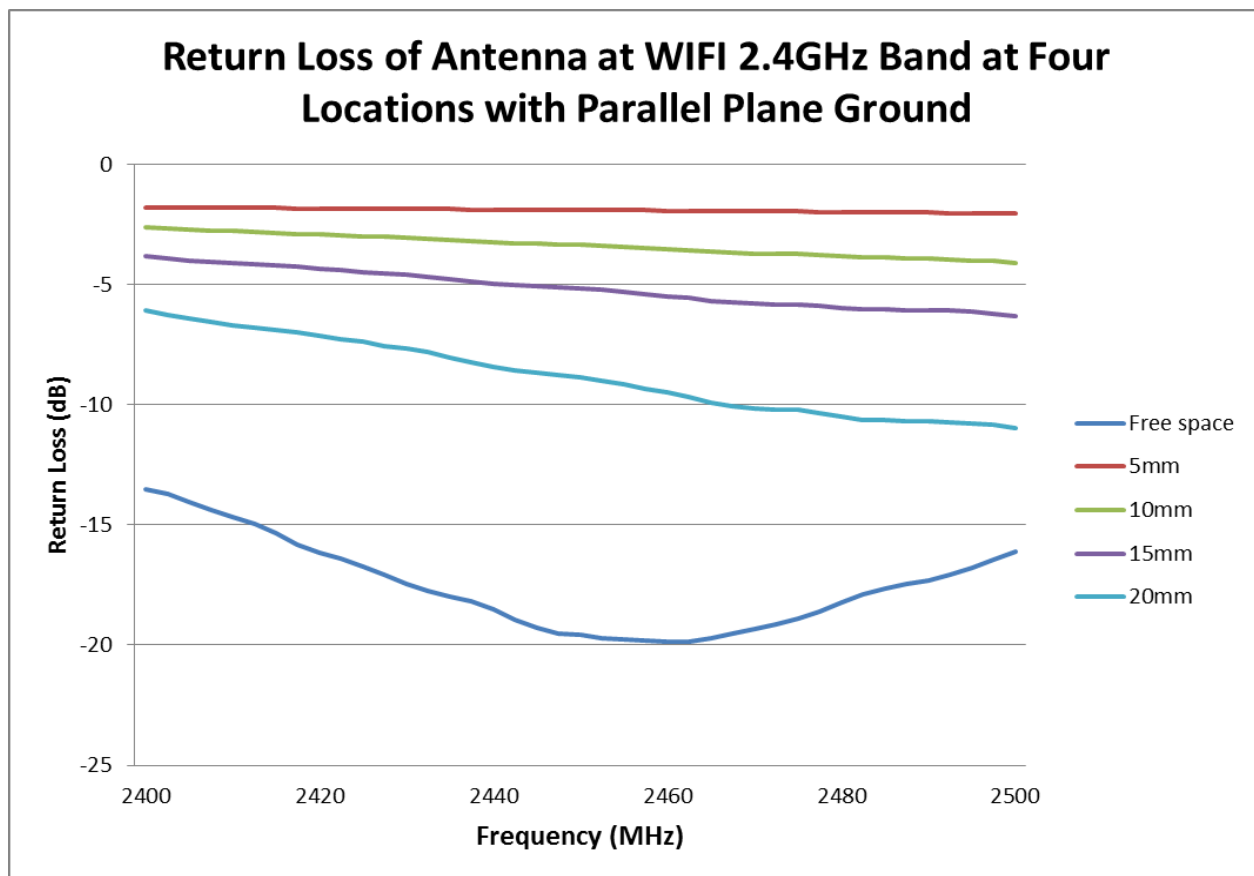


FIGURE 7.1.2 RETURN LOSS OF ANTENNA AT WIFI 2.4GHZ BAND AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	SHEET No. 19 of 32
DOCUMENT NUMBER: AS-2042810200	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24

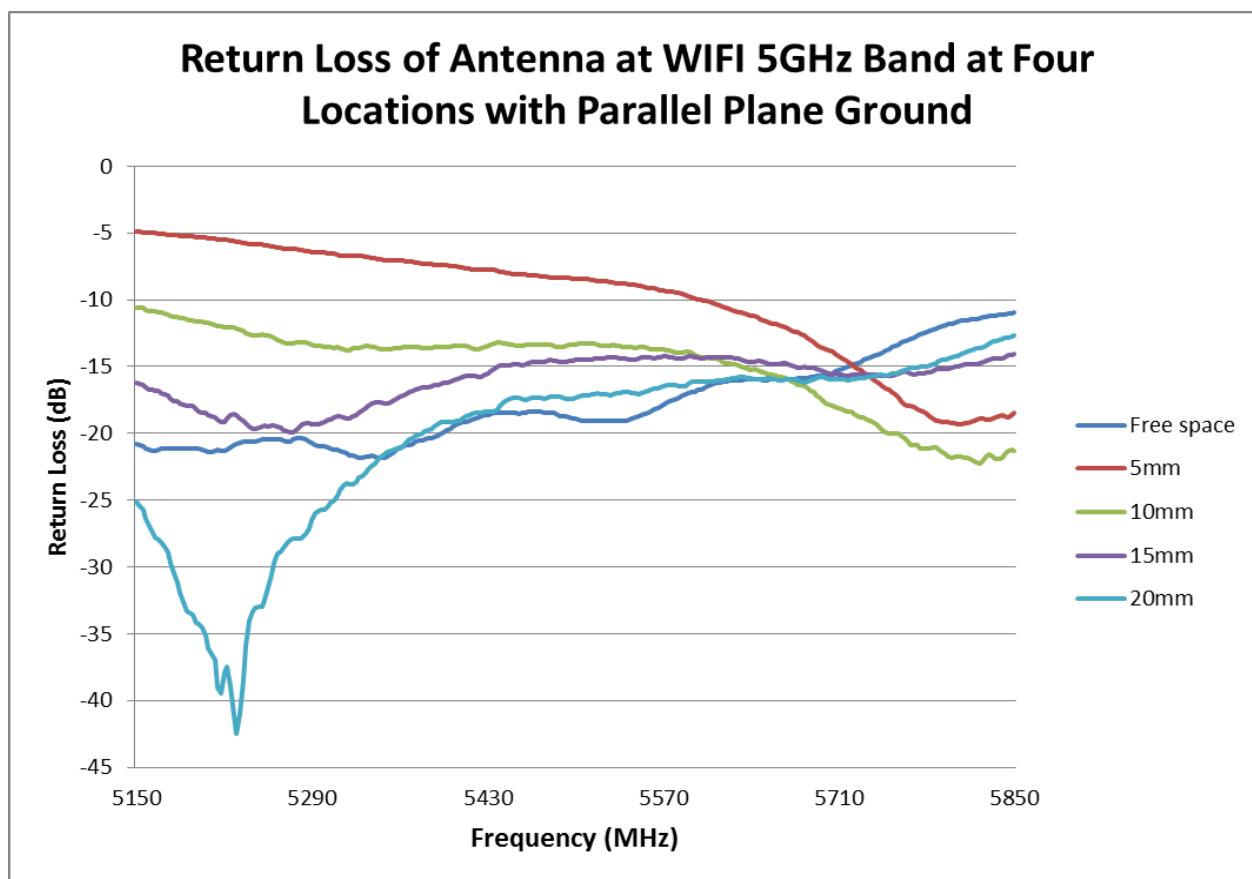


FIGURE 7.1.3 RETURN LOSS OF ANTENNA AT WIFI 5GHZ BAND AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	SHEET No. 20 of 32
DOCUMENT NUMBER: AS-2042810200	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24

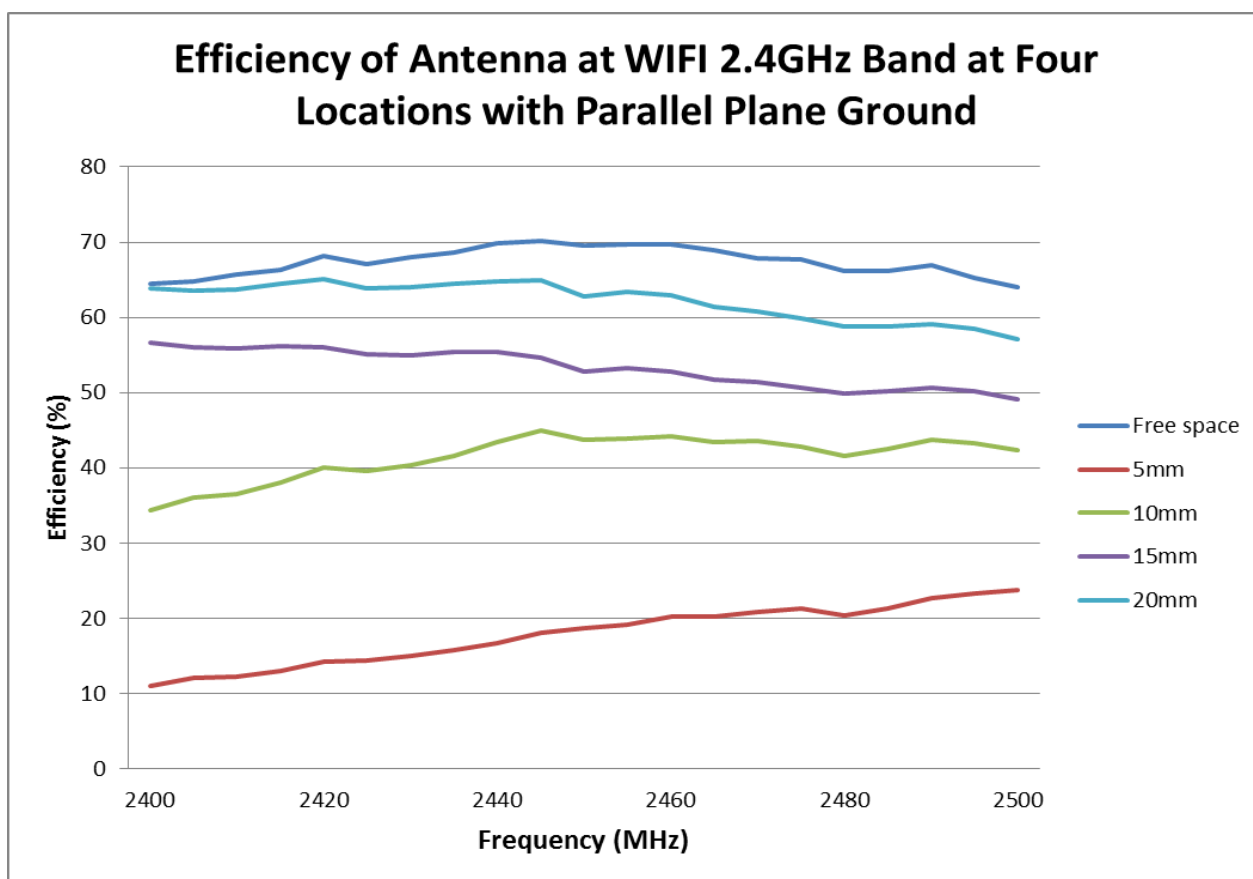


FIGURE 7.1.4 EFFICIENCY OF ANTENNA AT WIFI 2.4GHZ BAND AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	SHEET No. 21 of 32
DOCUMENT NUMBER: AS-2042810200	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24

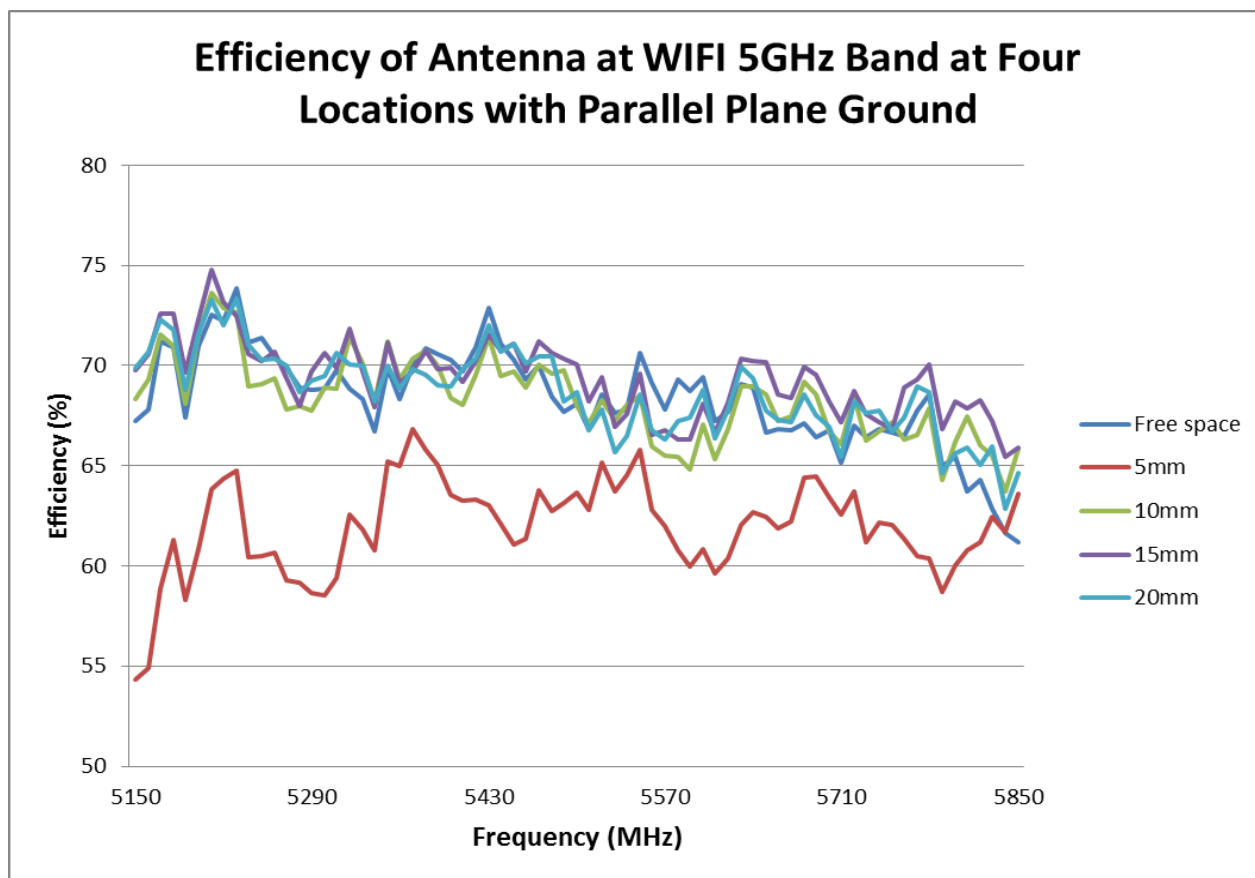


FIGURE 7.1.5 EFFICIENCY OF ANTENNA AT WIFI 5GHz BAND AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	SHEET No. 22 of 32
DOCUMENT NUMBER: AS-2042810200	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24

7.2 ANTENNA RF PERFORMANCE AS A FUNCTION OF DIFFERENT LOCATIONS WITH VERTICAL PLANE GROUND

Antenna performance will be degraded if the antenna is placed too close to a ground plane. Four locations of 5mm, 10mm, 15mm and 20mm away from the vertical plane ground have been evaluated. These locations are shown in figure 7.2.1. The plane ground size is 90mm*90mm. The antenna performance is better with larger distance between antenna and vertical plane ground. The minimum distance between antenna and plane ground is recommended to be at least 10mm to achieve acceptable RF performance.

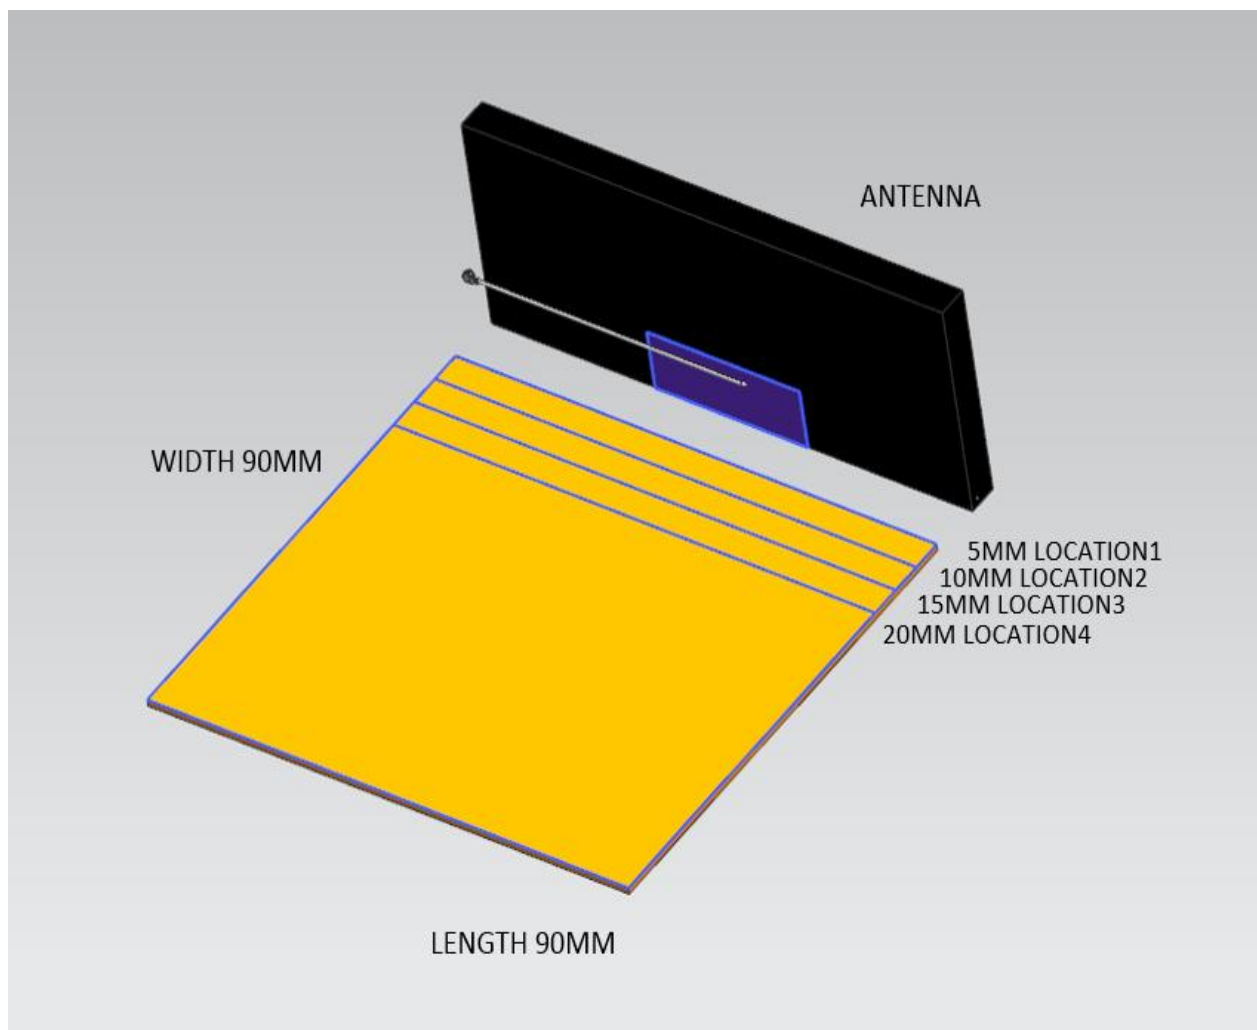


FIGURE 7.2.1 FOUR LOCATIONS WITH VERTICAL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:		SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE		23 of 32
DOCUMENT NUMBER:		CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200		Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

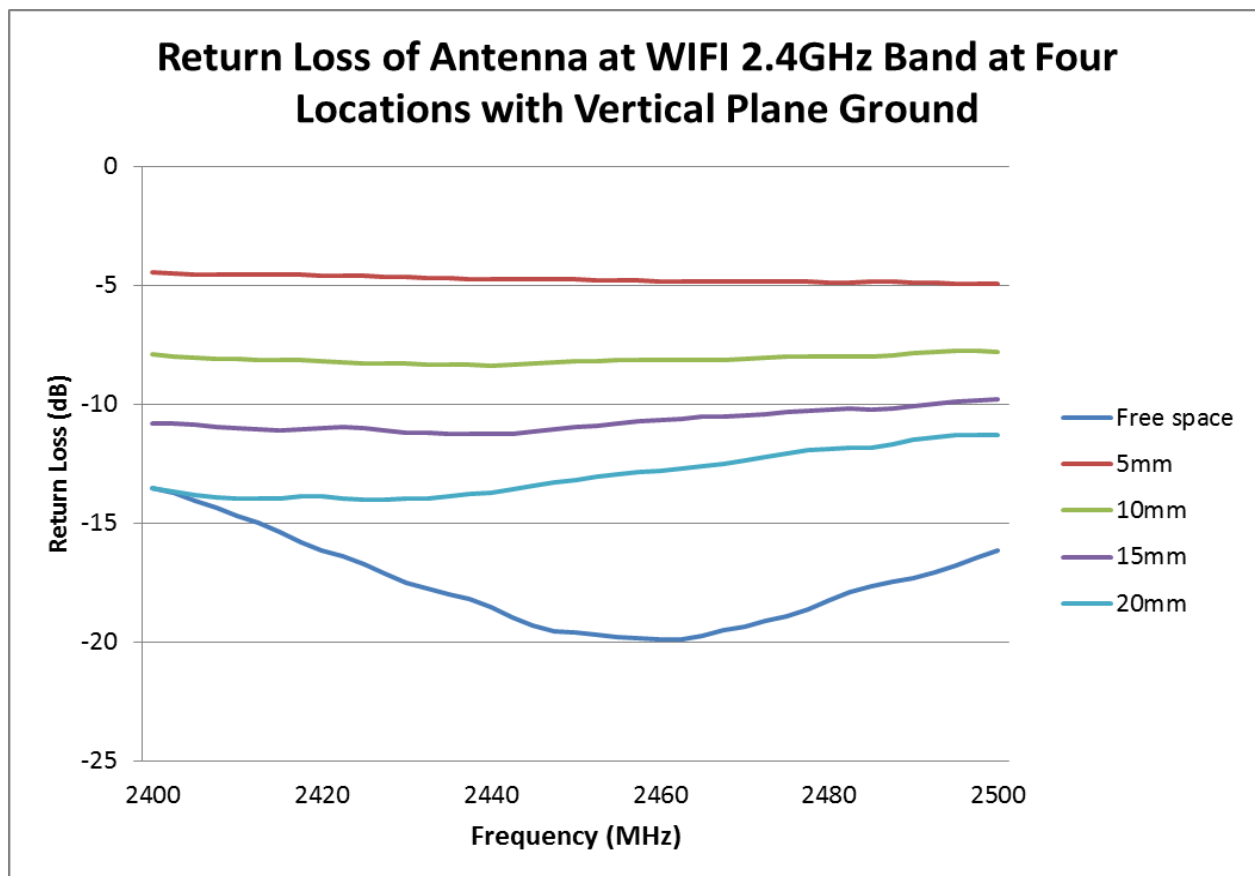


FIGURE 7.2.2 RETURN LOSS OF ANTENNA AT WIFI 2.4GHZ BAND AT FOUR LOCATIONS WITH VERTICAL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	24 of 32
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

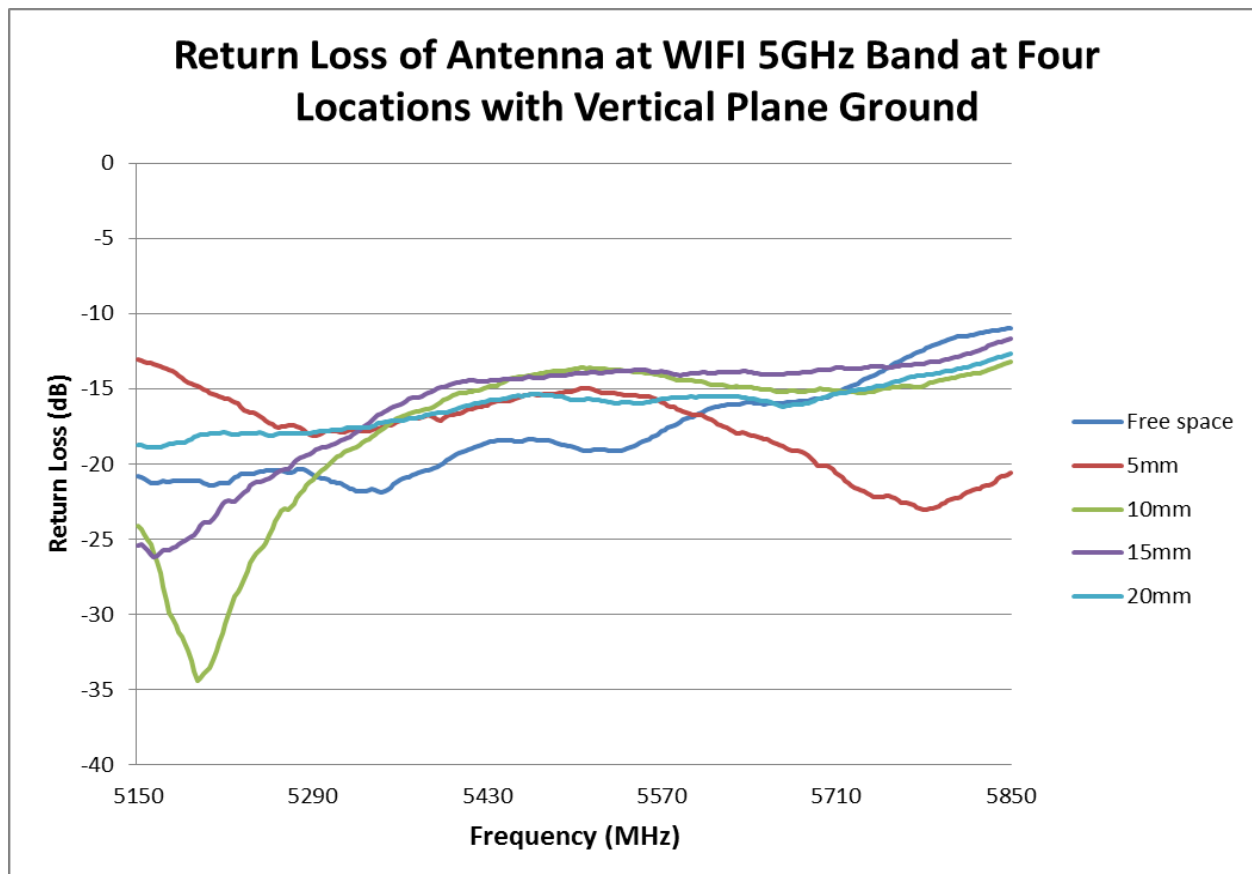


FIGURE 7.2.3 RETURN LOSS OF ANTENNA AT WIFI 5GHz BAND AT FOUR LOCATIONS WITH VERTICAL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	25 of 32
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

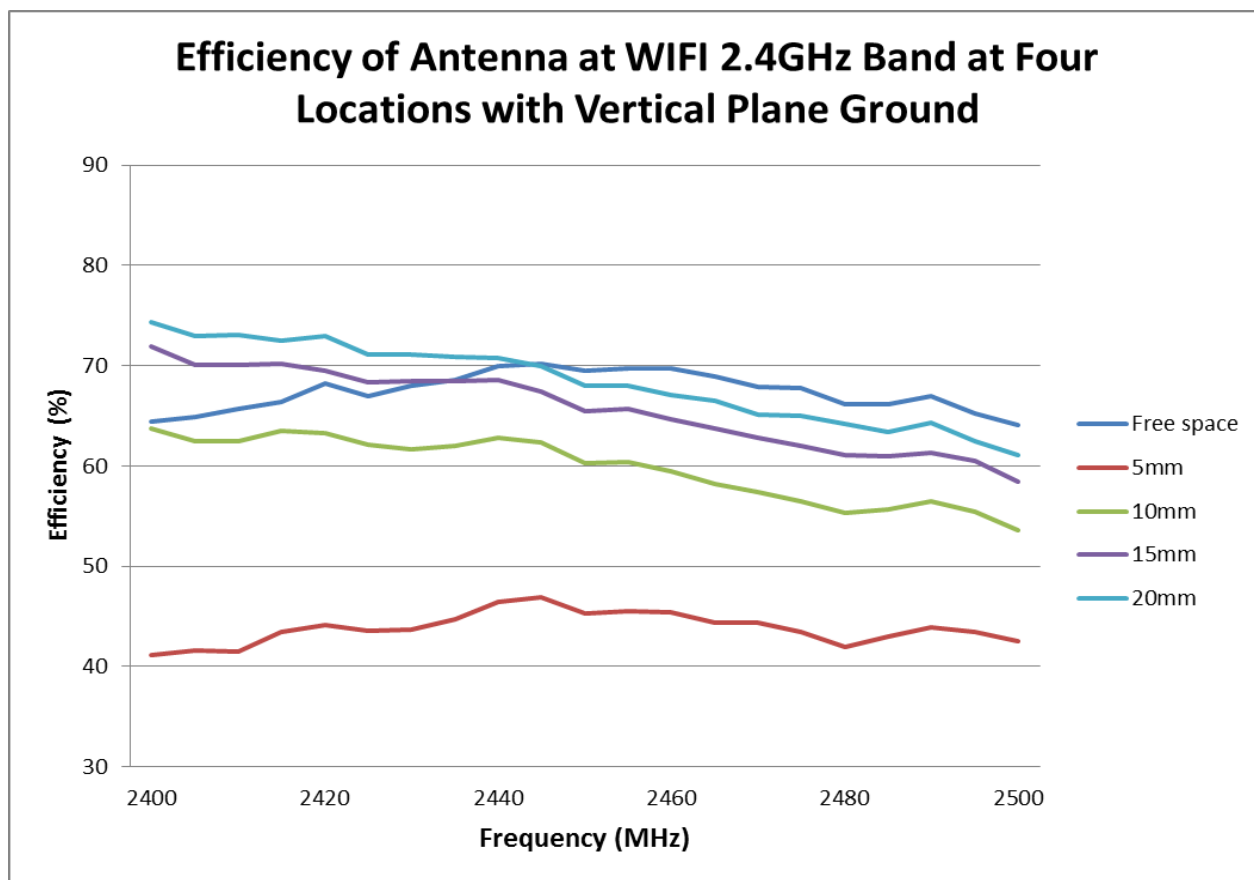


FIGURE 7.2.4 EFFICIENCY OF ANTENNA AT WIFI 2.4GHZ BAND AT FOUR LOCATIONS WITH VERTICAL PLANE GROUND

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	SHEET No. 26 of 32
DOCUMENT NUMBER: AS-2042810200	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24

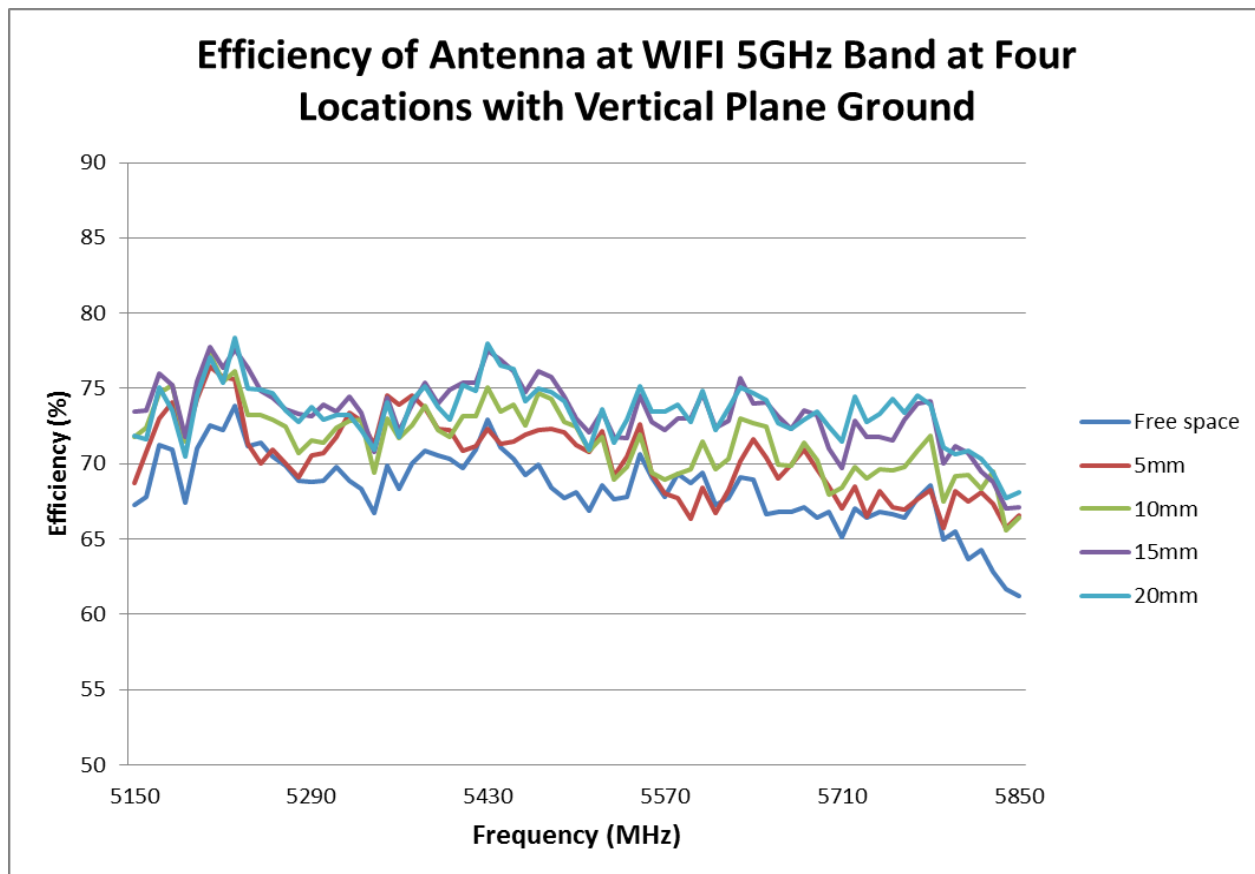


FIGURE 7.2.5 EFFICIENCY OF ANTENNA AT WIFI 5GHZ BAND AT FOUR LOCATIONS WITH VERTICAL PLANE GROUND

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	SHEET No. 27 of 32
DOCUMENT NUMBER: AS-2042810200	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24

7.3 ANTENNA RF PERFORMANCE AS A FUNCTION OF DIFFERENT DISTANCES WITH PARALLEL PLANE GROUND

Antenna performance will be degraded if the antenna is placed too close to a ground plane. Four locations 5mm, 10mm, 15mm and 20mm from a parallel plane ground have been evaluated. These locations are shown in figure 7.3.1. The plane ground size is 90mm*90mm. The antenna performance is better with larger distance between the antenna and the parallel plane ground. The minimum distance between the antenna and the plane ground is recommended to be at least 10mm to achieve acceptable RF performance.

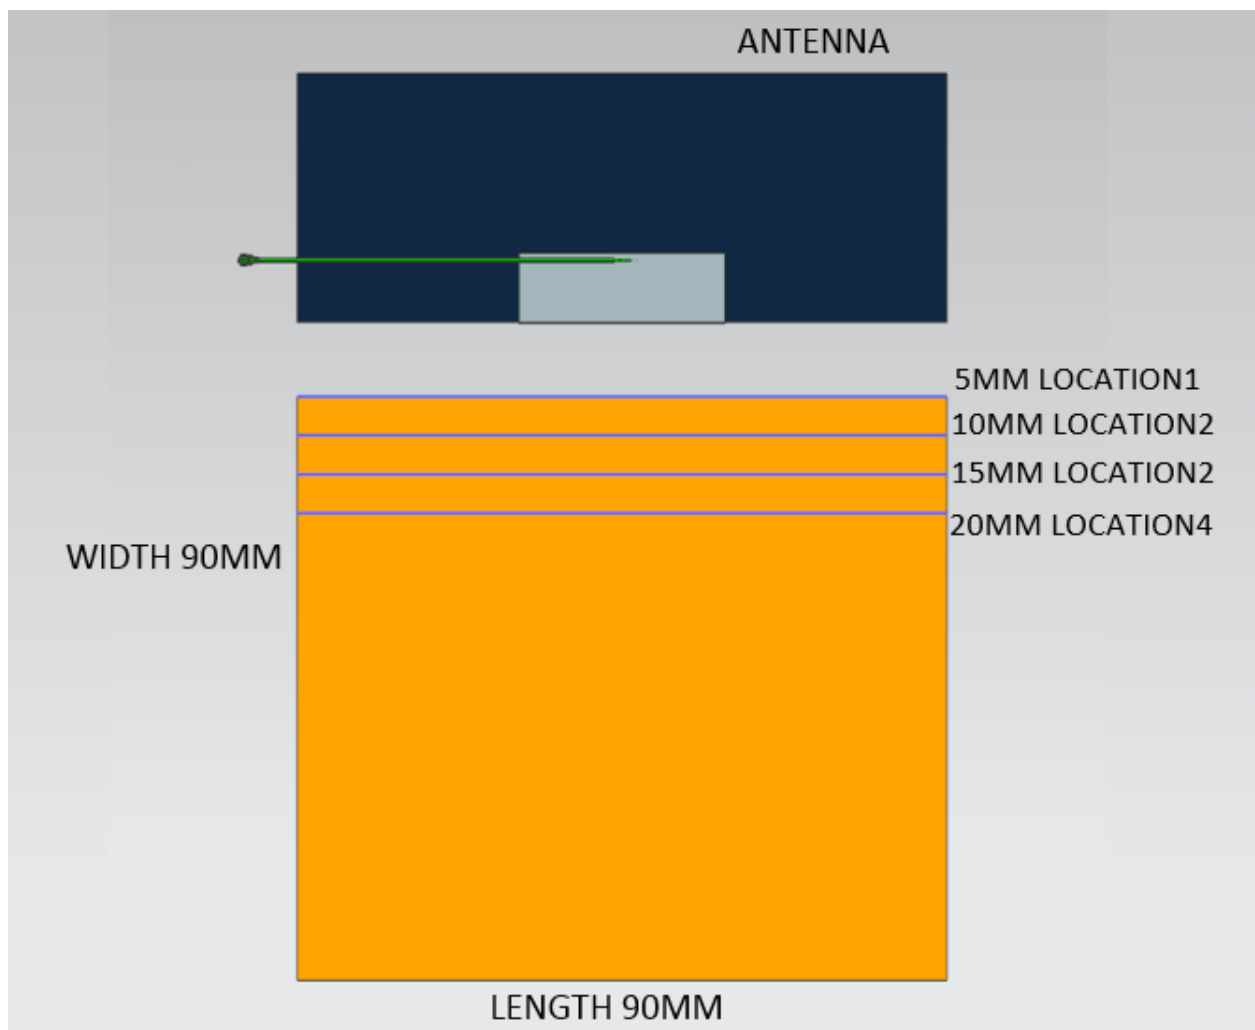


FIGURE 7.3.1 FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	28 of 32
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

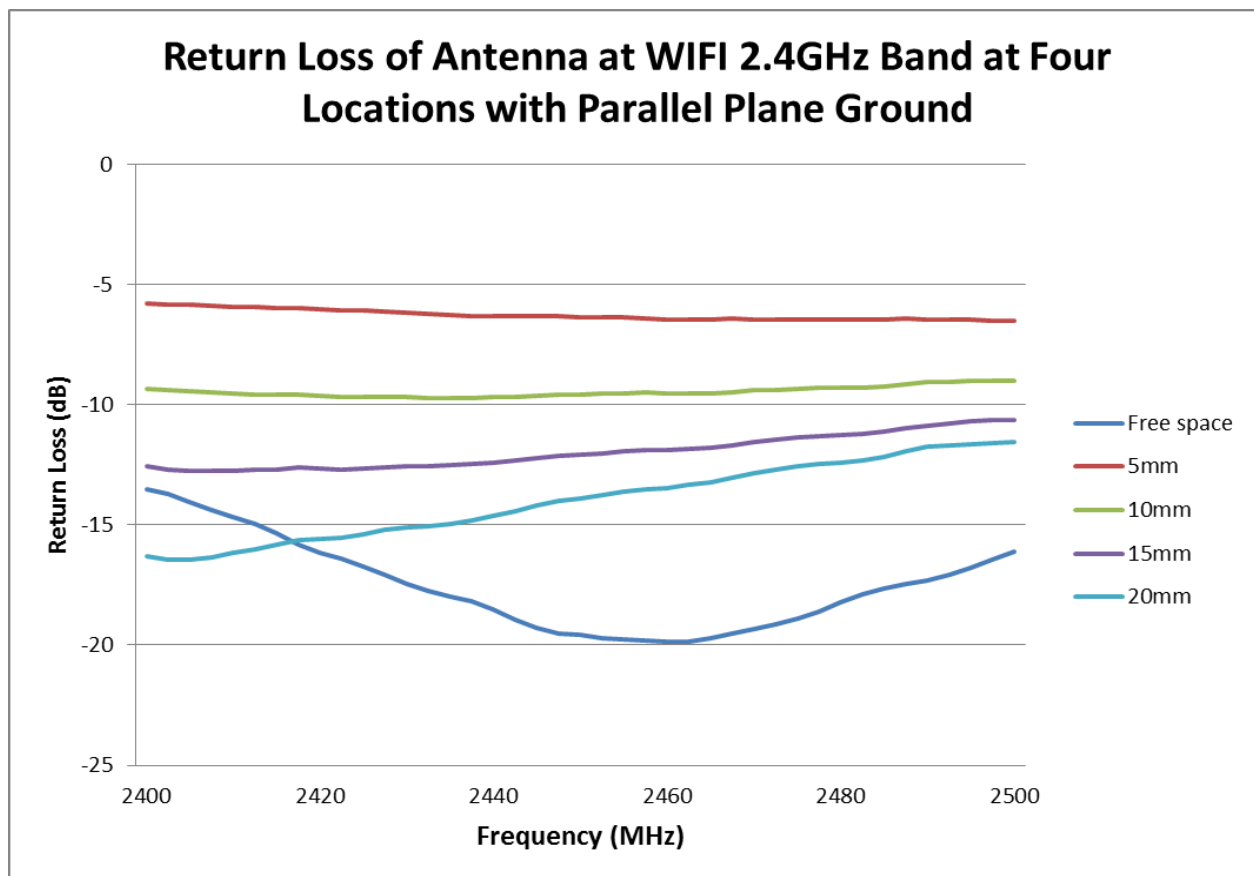


FIGURE 7.3.2 RETURN LOSS OF ANTENNA AT WIFI 2.4GHZ BAND AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	SHEET No. 29 of 32
DOCUMENT NUMBER: AS-2042810200	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24

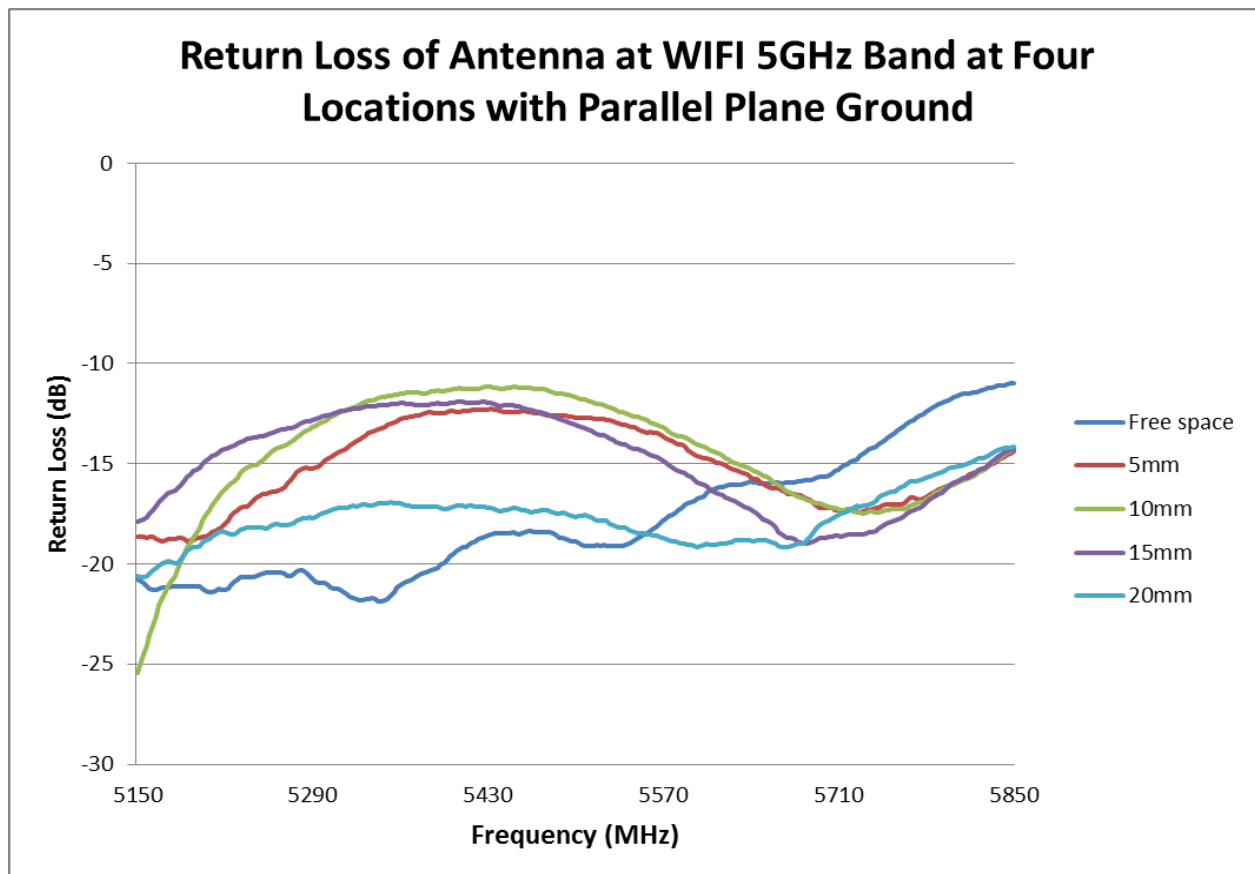


FIGURE 7.3.3 RETURN LOSS OF ANTENNA AT WIFI 5GHZ BAND AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
C	EC No: 171309 DATE: 2018/01/24	2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	30 of 32
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2042810200	Benson Liu 2018/01/24	Kang Cheng 2018/01/24	Chris Zhong 2018/01/24

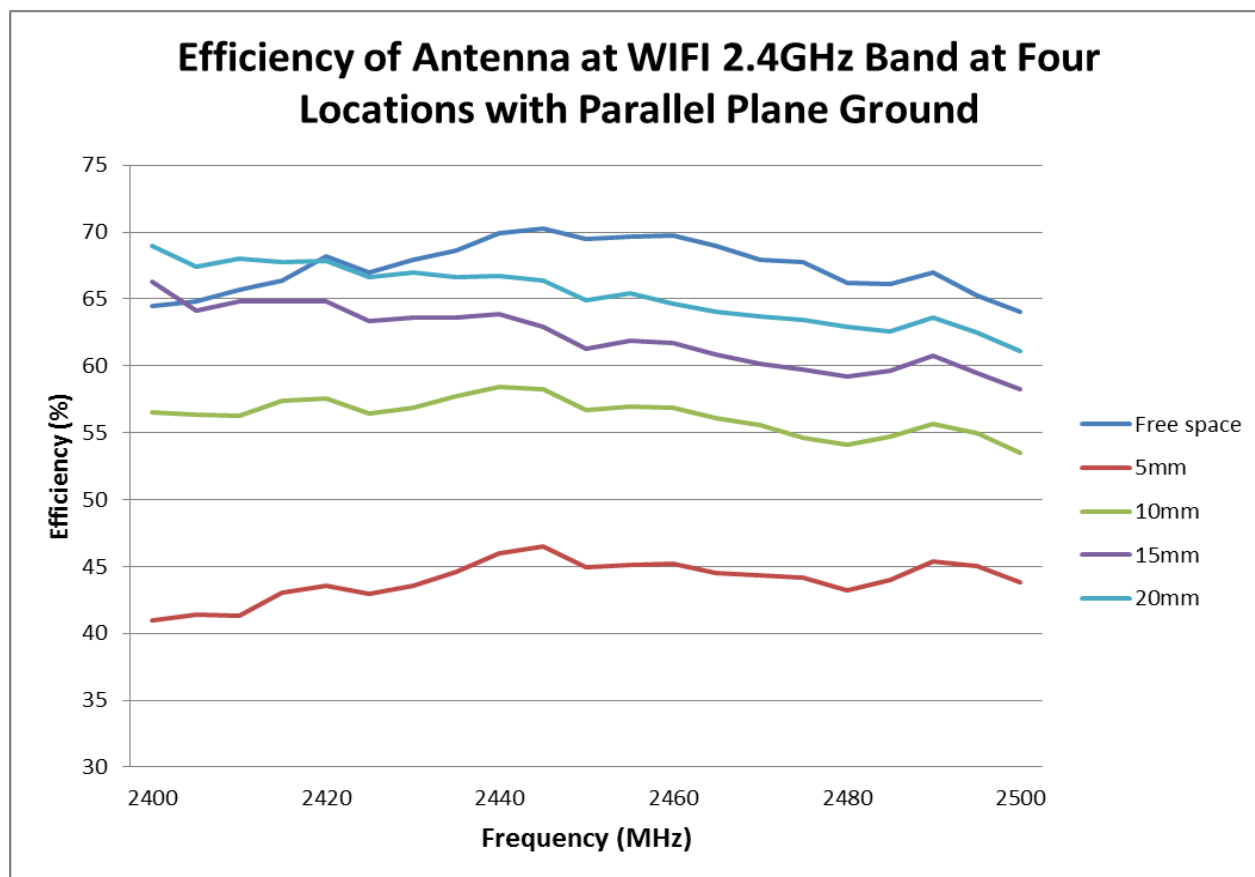


FIGURE 7.3.4 EFFICIENCY OF ANTENNA AT WIFI 2.4GHZ BAND AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	SHEET No. 31 of 32
DOCUMENT NUMBER: AS-2042810200	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24

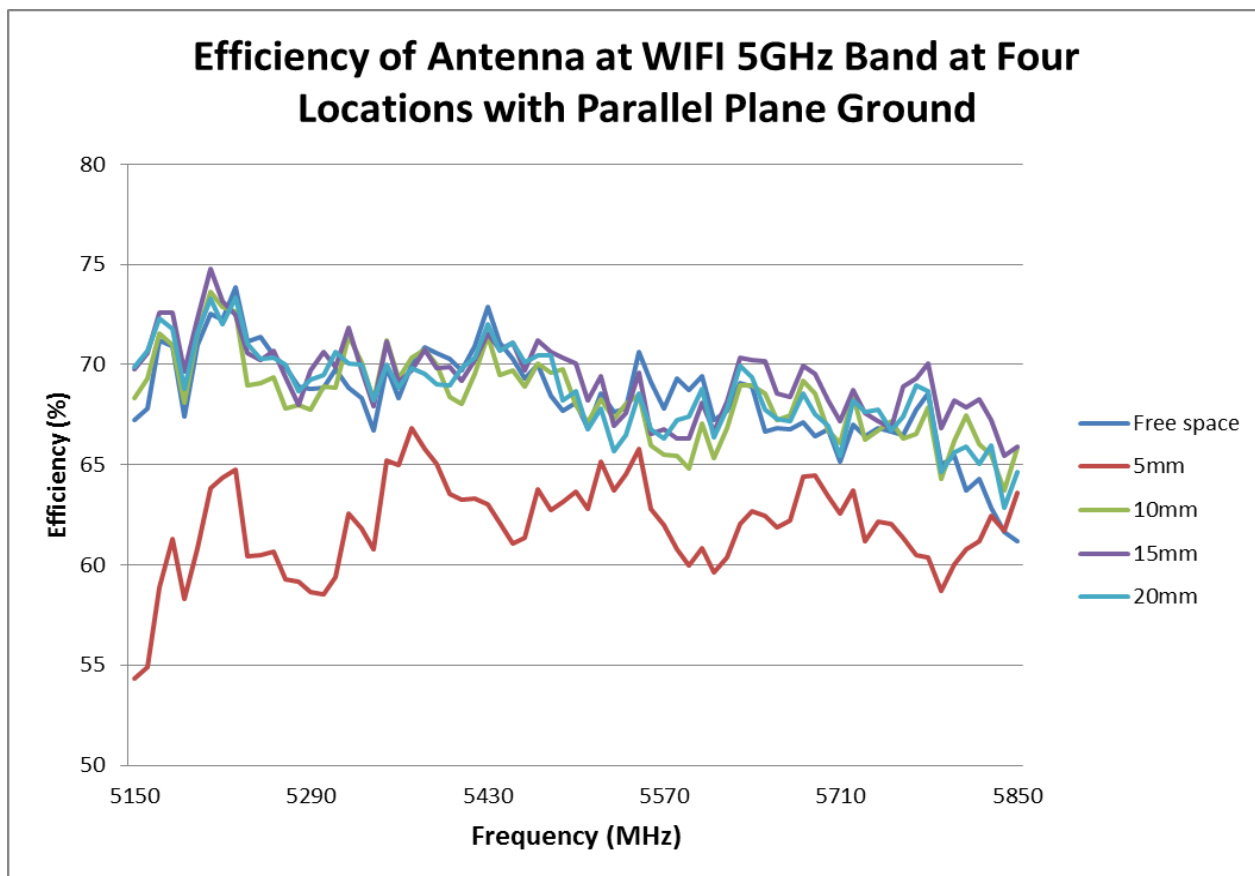


FIGURE 7.3.5 EFFICIENCY OF ANTENNA AT WIFI 5GHz BAND AT FOUR LOCATIONS WITH PARALLEL PLANE GROUND

REVISION: C	ECR/ECN INFORMATION: EC No: 171309 DATE: 2018/01/24	TITLE: 2.4/5G WIFI ANTENNA WITH SIDE SOLDER CABLE	SHEET No. 32 of 32
DOCUMENT NUMBER: AS-2042810200	CREATED / REVISED BY: Benson Liu 2018/01/24	CHECKED BY: Kang Cheng 2018/01/24	APPROVED BY: Chris Zhong 2018/01/24