


Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	Mode 1
Remark:	Only worse case is reported.

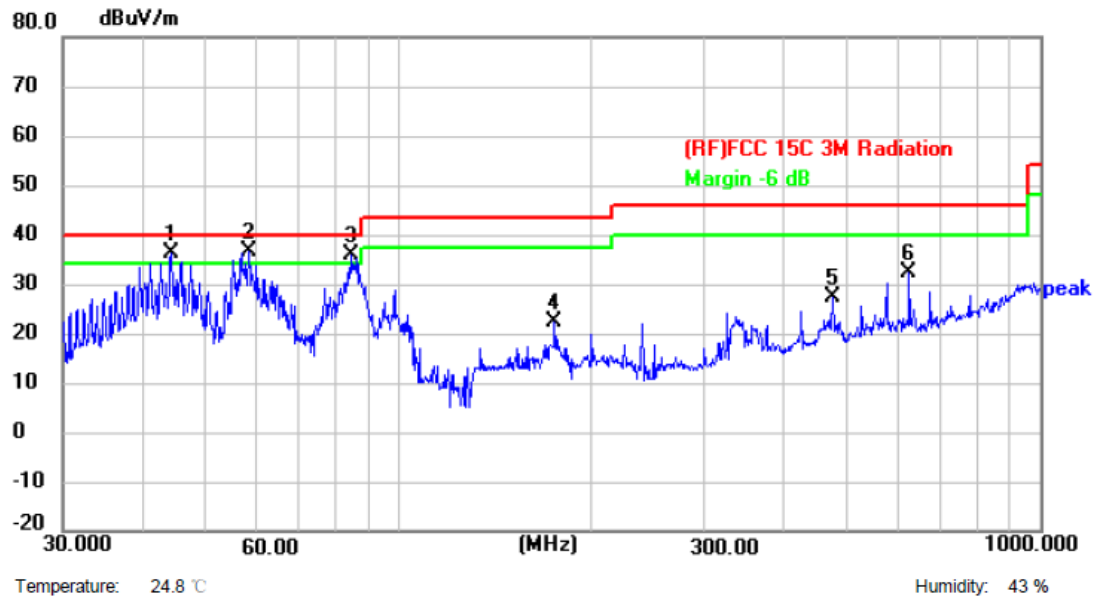

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 !	44.2751	60.19	-23.86	36.33	40.00	-3.67	peak	P
2 *	58.6126	60.68	-24.05	36.63	40.00	-3.37	peak	P
3 !	84.7020	62.96	-27.20	35.76	40.00	-4.24	peak	P
4	175.0364	45.64	-23.44	22.20	43.50	-21.30	peak	P
5	475.4990	44.15	-16.83	27.32	46.00	-18.68	peak	P
6	625.0780	45.46	-13.31	32.15	46.00	-13.85	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = QuasiPeak (dBuV/m) - Limit QPK (dBuV/m)



Above 1GHz

Temperature:	24.6℃	Relative Humidity:		48%				
Test Voltage:	DC 3.6V							
Test Mode:	802.11 b Mode TX 2412 MHz							
Remark:	Only worse case is reported.							
Horizontal								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10970.500	43.87	-0.34	43.53	74.00	-30.47	peak	P
2 *	14948.500	39.74	3.87	43.61	74.00	-30.39	peak	P
Vertical								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	9491.500	45.71	0.44	46.15	74.00	-27.85	peak	P
2	14362.000	43.20	2.15	45.35	74.00	-28.65	peak	P
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.								
5. No report for the emission which below the prescribed limit.								
6. The peak value < average limit, So only show the peak value.								



Temperature:	24.6℃		Relative Humidity:		48%			
Test Voltage:	DC 3.6V							
Test Mode:	802.11 b Mode TX 2437 MHz							
Remark:	Only worse case is reported.							
Horizontal								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	9389.500	46.02	-0.50	45.52	74.00	-28.48	peak	P
2	14234.500	41.09	1.70	42.79	74.00	-31.21	peak	P
Vertical								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12781.000	42.14	1.19	43.33	74.00	-30.67	peak	P
2 *	14795.500	40.55	3.94	44.49	74.00	-29.51	peak	P
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.								
5. No report for the emission which below the prescribed limit.								
6. The peak value < average limit, So only show the peak value.								



Temperature:	24.6℃		Relative Humidity:		48%																												
Test Voltage:	DC 3.6V																																
Test Mode:	802.11 b Mode TX 2462 MHz																																
Remark:	Only worse case is reported.																																
Horizontal																																	
<table><tr><td>No.</td><td>Frequency (MHz)</td><td>Reading (dBuV)</td><td>Factor (dB/m)</td><td>Level (dBuV/m)</td><td>Limit (dBuV/m)</td><td>Margin (dB)</td><td>Detector</td><td>P/F</td></tr><tr><td>1 *</td><td>9466.000</td><td>46.40</td><td>0.35</td><td>46.75</td><td>74.00</td><td>-27.25</td><td>peak</td><td>P</td></tr><tr><td>2</td><td>10817.500</td><td>44.93</td><td>-0.97</td><td>43.96</td><td>74.00</td><td>-30.04</td><td>peak</td><td>P</td></tr></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	9466.000	46.40	0.35	46.75	74.00	-27.25	peak	P	2	10817.500	44.93	-0.97	43.96	74.00	-30.04	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																									
1 *	9466.000	46.40	0.35	46.75	74.00	-27.25	peak	P																									
2	10817.500	44.93	-0.97	43.96	74.00	-30.04	peak	P																									
Vertical																																	
<table><tr><td>No.</td><td>Frequency (MHz)</td><td>Reading (dBuV)</td><td>Factor (dB/m)</td><td>Level (dBuV/m)</td><td>Limit (dBuV/m)</td><td>Margin (dB)</td><td>Detector</td><td>P/F</td></tr><tr><td>1</td><td>10945.000</td><td>43.90</td><td>-0.42</td><td>43.48</td><td>74.00</td><td>-30.52</td><td>peak</td><td>P</td></tr><tr><td>2 *</td><td>14795.500</td><td>41.43</td><td>3.94</td><td>45.37</td><td>74.00</td><td>-28.63</td><td>peak</td><td>P</td></tr></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10945.000	43.90	-0.42	43.48	74.00	-30.52	peak	P	2 *	14795.500	41.43	3.94	45.37	74.00	-28.63	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																									
1	10945.000	43.90	-0.42	43.48	74.00	-30.52	peak	P																									
2 *	14795.500	41.43	3.94	45.37	74.00	-28.63	peak	P																									
Remark:																																	
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)																																	
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)																																	
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)																																	
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.																																	
5. No report for the emission which below the prescribed limit.																																	
6. The peak value < average limit. So only show the peak value.																																	

-----END OF THE REPORT-----

