

EMC Test Report

Radiated Spurious and Harmonic Emissions

Class II Permissive Change to

Part 15.247, Certification, DTS Rules

For the Addition of Two

MaxRad Antenna Model(s): MAXC24503 & BMAXC24505

3 or 5 dB Gain (2400 to 2485 MHz Band)

External Vehicular Magnetic Mount Antenna

Used with IX600 Vehicular Mount

FCC ID: KBCIX600-IWL

WLAN, IEEE 802.11 (b & g)

Model: IX600-IWL with IX600 Vehicle Mount

Prepared on Behalf of

Itronix, Corporation
12825 E. Mirabeau Parkway
Spokane, WA 99216

By

Spectrum Technology, Inc.
209 Dayton Street, Suite 205
Edmonds, WA 98020
425 771-4482

November 7, 2005

Test Report

TABLE OF CONTENTS

Cover Page		1
Table of Contents		2
Test 1	6 dB Bandwidth	refer to OEM test report
Test 2	Conducted Peak RF Power Output Part 15.247(b) & Equivalent Isotropic Radiated Power	refer to OEM test report
Test 3	MPE Calculations	refer to New Exhibit "MPE - 3 & 5 dB gain Ext. MaxRad Ant thru Vehicle Mount"
Test 4	Antenna Conducted Spurious Emissions	refer to OEM test report
Test 4	Radiated Harmonics and Spurious Emissions	3 – 10
Test 4	Field Strength of Fundamental & Restricted Band Edges	11 - 22
Test 6	Peak Power Spectral Density, PPSD	refer to OEM test report
Test 7	AC Conducted RF Spurious Emissions 150 kHz to 30 MHz	N/A Vehicle Mount
	Block Diagram of Test Set up, Equipment List and	refer to New Exhibit Exhibit "Appendix A Test Setup_Photos_Equipment list"

TEST 4: FIELD STRENGTH OF SPURIOUS RADIATED EMISSIONS**FCC ID:** KBCIX600-IWL**Applicant:** Itronix, Corporation**Model:** IX600-IWL – (802.11b @ 11Mb) with IX600 Vehicle Mount & MAXRAD Model: MAXC24503 (3 dB gain ant.)

Minimum Standard Specified: Part 15.247(c)

Authorization Procedure: Part 2.105

Frequency Range Observed: 0 to 25 GHz

Date: 10/28/05

Test Equipment Setup: Refer to block diagram & setup photos in Appendix A

Horn Antenna VerticalNOTE: No emissions measurable at 3 meters. Antenna was moved into **1 meter** - antenna to EUT spacing.

RADIATED HARMONIC AND SPURIOUS EMISSIONS & RESTRICTED BANDS									
Frequency GHz	Max. SA Rdg. dBuV	Ant. Vert. or Horiz.	Peak or Average Detector	Antenna Factor dB @ 1 meter	Cable & filter loss dB	Amp Gain	Corrected Reading dBuV/m	3 m Limit 74 Peak 54 Avg. dBuV	Margin in dB below LIMIT
Fo - 2.412									
4.824	33.00	V	Peak	32.45	3.97	23.2	46.22	74	27.78
4.824	21.68	V	Average	32.45	3.97	23.2	34.90	54	19.10
7.236	34.37	V	Peak	36.35	4.42	25.9	49.24	74	27.76
7.236	24.87	V	Average	36.35	4.42	25.9	39.74	54	14.26
Fo - 2.437									
4.874	32.45	V	Peak	32.60	3.97	23.2	45.82	74	28.18
4.874	21.55	V	Average	32.60	3.97	23.2	34.92	54	19.08
7.311	37.12	V	Peak	36.57	4.42	25.9	52.51	74	21.79
7.311	25.02	V	Average	36.57	4.42	25.9	40.11	54	13.89
Fo - 2.462									
4.924	33.39	V	Peak	33.01	3.97	23.2	47.17	74	26.83
4.924	22.26	V	Average	33.01	3.97	23.2	36.04	54	17.96
7.386	36.36	V	Peak	36.77	4.42	25.9	51.65	74	22.35
7.386	25.91	V	Average	36.77	4.42	25.9	41.20	54	12.80
Harmonic emissions on all three channels (low, mid & high) 4Fo - 10Fo at or below noise floor									
Channel	Frequency in GHz	Harmonics Observed					Limit 74 dBuV/m Peak & 54 dBuV/m Average		
Low Ch.	2.412								
4Fo - 10Fo	9.668 - 24.120	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
Mid Ch.	2.437								
4Fo - 10Fo	9.784 - 24.370	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
High Ch.	2.4620								
4Fo - 10Fo	9.848 - 24.620	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		

TEST 4: FIELD STRENGTH OF SPURIOUS RADIATED EMISSIONS**FCC ID:** KBCIX600-IWL**Applicant:** Itronix, Corporation**Model:** IX600-IWL - (802.11b @ 11Mb) with IX600 Vehicle Mount & MAXRAD Model: MAXC24503 - (3 dB gain ant.)

Minimum Standard Specified: Part 15.247(c)

Authorization Procedure: Part 2.1053

Frequency Range Observed: 0 to 25 GHz

Date: 10/28/05

Test Equipment Setup: Refer to block diagram & setup photos in Appendix A

Horn Antenna HorizontalNOTE: No emissions measurable at 3 meters. Antenna was moved into **1 meter** - antenna to EUT spacing.

RADIATED HARMONIC AND SPURIOUS EMISSIONS & RESTRICTED BANDS									
Frequency GHz	Max. SA Rdg. dBuV	Ant. Vert. or Horiz.	Peak or Average Detector	Antenna Factor dB @ 1 meter	Cable & filter loss dB	Amp Gain	Corrected Reading dBuV/m	3 m Limit 74 Peak 54 Avg. dBuV	Margin in dB below LIMIT
Fo - 2.412									
4.824	33.52	H	Peak	32.45	3.97	23.2	46.72	74	27.28
4.824	20.93	H	Average	32.45	3.97	23.2	34.15	54	19.85
7.236	37.05	H	Peak	36.35	4.42	25.9	51.92	74	22.08
7.236	24.81	H	Average	36.35	4.42	25.9	39.68	54	14.32
Fo - 2.437									
4.874	33.24	H	Peak	32.60	3.97	23.2	46.61	74	27.39
4.874	21.22	H	Average	32.60	3.97	23.2	34.59	54	19.41
7.311	37.69	H	Peak	36.57	4.42	25.9	52.78	74	21.22
7.311	25.00	H	Average	36.57	4.42	25.9	40.09	54	13.91
Fo - 2.462									
4.924	33.74	H	Peak	33.01	3.97	23.2	47.52	74	26.48
4.924	22.03	H	Average	33.01	3.97	23.2	35.81	54	18.19
7.386	37.16	H	Peak	36.77	4.42	25.9	52.45	74	21.55
7.386	25.43	H	Average	36.77	4.42	25.9	40.72	54	13.28
Harmonic emissions on all three channels (low, mid & high) 4Fo - 10Fo at or below noise floor									
Channel	Frequency in GHz	Harmonics Observed					Limit 74 dBuV/m Peak & 54 dBuV/m Average		
Low Ch.	2.412								
4Fo - 10Fo	9.648 - 24.120	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
Mid Ch.	2.437								
4Fo - 10Fo	9.748 - 24.370	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
High Ch.	2.4620								
4Fo - 10Fo	9.848 - 24.620	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		

TEST 4: FIELD STRENGTH OF SPURIOUS RADIATED EMISSIONS**FCC ID:** KBCIX600-IWL**Applicant:** Itronix, Corporation**Model:** IX600-IWL - (802.11b @ 11Mb) with IX600 Vehicle Mount & Model: MAXC24505 - (5 dB gain ant.)

Minimum Standard Specified: Part 15.247(c)

Authorization Procedure: Part 2.105

Frequency Range Observed: 0 to 25 GHz

Date: 10/28/05

Test Equipment Setup: Refer to block diagram & setup photos in Appendix A

Horn Antenna VerticalNOTE: No emissions measurable at 3 meters. Antenna was moved into **1 meter** - antenna to EUT spacing.

RADIATED HARMONIC AND SPURIOUS EMISSIONS & RESTRICTED BANDS									
Frequency GHz	Max. SA Rdg. dBuV	Ant. Vert. or Horiz.	Peak or Average Detector	Antenna Factor dB @ 1 meter	Cable & filter loss dB	Amp Gain	Corrected Reading dBuV/m	3 m Limit 74 Peak 54 Avg. dBuV	Margin in dB below LIMIT
Fo - 2.412									
4.824	33.16	V	Peak	32.45	3.97	23.2	46.38	74	27.62
4.824	20.99	V	Average	32.45	3.97	23.2	34.21	54	19.79
7.236	36.60	V	Peak	36.35	4.42	25.9	51.47	74	22.53
7.236	24.81	V	Average	36.35	4.42	25.9	39.68	54	14.32
Fo - 2.437									
4.874	33.20	V	Peak	32.60	3.97	23.2	46.57	74	27.43
4.874	21.15	V	Average	32.60	3.97	23.2	34.52	54	19.48
7.311	36.90	V	Peak	36.57	4.42	25.9	51.99	74	22.01
7.311	25.09	V	Average	36.57	4.42	25.9	40.18	54	13.82
Fo - 2.462									
4.924	33.90	V	Peak	33.01	3.97	23.2	47.68	74	26.32
4.924	22.32	V	Average	33.01	3.97	23.2	36.10	54	17.90
7.386	37.96	V	Peak	36.77	4.42	25.9	53.25	74	20.75
7.386	25.66	V	Average	36.77	4.42	25.9	40.75	54	13.25
Harmonic emissions on all three channels (low, mid & high) 4Fo - 10Fo at or below noise floor									
Channel	Frequency in GHz	Harmonics Observed					Limit 74 dBuV/m Peak & 54 dBuV/m Average		
Low Ch.	2.412								
4Fo - 10Fo	9.668 - 24.120	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
Mid Ch.	2.437								
4Fo - 10Fo	9.784 - 24.370	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
High Ch.	2.4620								
4Fo - 10Fo	9.848 - 24.620	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		

TEST 4: FIELD STRENGTH OF SPURIOUS RADIATED EMISSIONS**FCC ID:** KBCIX600-IWL**Applicant:** Itronix, Corporation**Model:** IX600-IWL - (802.11b @ 11Mb) with IX600 Vehicle Mount & MAXRAD Model: BMAXC24505 - (5 dB gain ant.)

Minimum Standard Specified: Part 15.247(c)

Authorization Procedure: Part 2.1053

Frequency Range Observed: 0 to 25 GHz

Date: 10/28/05

Test Equipment Setup: Refer to block diagram & setup photos in Appendix A

Horn Antenna HorizontalNOTE: No emissions measurable at 3 meters. Antenna was moved into **1 meter** - antenna to EUT spacing.

RADIATED HARMONIC AND SPURIOUS EMISSIONS & RESTRICTED BANDS									
Frequency GHz	Max. SA Rdg. dBuV	Ant. Vert. or Horiz.	Peak or Average Detector	Antenna Factor dB @ 1 meter	Cable & filter loss dB	Amp Gain	Corrected Reading dBuV/m	3 m Limit 74 Peak 54 Avg. dBuV	Margin in dB below LIMIT
Fo - 2.412									
4.824	32.75	H	Peak	32.45	3.97	23.2	45.97	74	28.03
4.824	21.03	H	Average	32.45	3.97	23.2	34.23	54	19.77
7.236	38.14	H	Peak	36.35	4.42	25.9	53.01	74	20.99
7.236	24.81	H	Average	36.35	4.42	25.9	39.68	54	14.32
Fo - 2.437									
4.874	33.45	H	Peak	32.60	3.97	23.2	46.82	74	27.18
4.874	21.17	H	Average	32.60	3.97	23.2	34.54	54	19.46
7.311	38.33	H	Peak	36.57	4.42	25.9	53.42	74	20.58
7.311	25.51	H	Average	36.57	4.42	25.9	40.60	54	13.40
Fo - 2.462									
4.924	33.37	H	Peak	33.01	3.97	23.2	46.95	74	27.05
4.924	22.11	H	Average	33.01	3.97	23.2	35.89	54	18.11
7.386	37.65	H	Peak	36.77	4.42	25.9	52.94	74	21.06
7.386	25.49	H	Average	36.77	4.42	25.9	40.78	54	13.22
Harmonic emissions on all three channels (low, mid & high) 4Fo - 10Fo at or below noise floor									
Channel	Frequency in GHz	Harmonics Observed					Limit 74 dBuV/m Peak & 54 dBuV/m Average		
Low Ch.	2.412								
4Fo - 10Fo	9.648 - 24.120	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
Mid Ch.	2.437								
4Fo - 10Fo	9.748 - 24.370	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
High Ch.	2.4620								
4Fo - 10Fo	9.848 - 24.620	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		

TEST 4: FIELD STRENGTH OF SPURIOUS RADIATED EMISSIONS**FCC ID:** KBCIX600-IWL**Applicant:** Itronix, Corporation**Model:** IX600-IWL – (802.11g @ 54Mb) with IX600 Vehicle Mount & MAXRAD Model: MAXC24503 (3 dB gain ant.)

Minimum Standard Specified: Part 15.247(c)

Authorization Procedure: Part 2.105

Frequency Range Observed: 0 to 25 GHz

Date: 10/28/05

Test Equipment Setup: Refer to block diagram & setup photos in Appendix A

Horn Antenna VerticalNOTE: No emissions measurable at 3 meters. Antenna was moved into **1 meter** - antenna to EUT spacing.

RADIATED HARMONIC AND SPURIOUS EMISSIONS & RESTRICTED BANDS									
Frequency GHz	Max. SA Rdg. dBuV	Ant. Vert. or Horiz.	Peak or Average Detector	Antenna Factor dB @ 1 meter	Cable & filter loss dB	Amp Gain	Corrected Reading dBuV/m	3 m Limit 74 Peak 54 Avg. dBuV	Margin in dB below LIMIT
Fo - 2.412									
4.824	32.34	V	Peak	32.45	3.97	23.2	46.91	74	27.09
4.824	22.01	V	Average	32.45	3.97	23.2	35.23	54	18.77
7.236	36.18	V	Peak	36.35	4.42	25.9	51.05	74	22.95
7.236	24.92	V	Average	36.35	4.42	25.9	39.79	54	14.21
Fo - 2.437									
4.874	31.31	V	Peak	32.60	3.97	23.2	44.68	74	29.32
4.874	21.07	V	Average	32.60	3.97	23.2	34.44	54	19.56
7.311	35.43	V	Peak	36.57	4.42	25.9	50.52	74	23.48
7.311	24.95	V	Average	36.57	4.42	25.9	40.04	54	13.96
Fo - 2.462									
4.924	34.98	V	Peak	33.01	3.97	23.2	48.76	74	25.24
4.924	22.66	V	Average	33.01	3.97	23.2	36.44	54	17.56
7.386	36.57	V	Peak	36.77	4.42	25.9	51.86	74	22.14
7.386	25.57	V	Average	36.77	4.42	25.9	40.86	54	13.14
Harmonic emissions on all three channels (low, mid & high) 4Fo - 10Fo at or below noise floor									
Channel	Frequency in GHz	Harmonics Observed					Limit 74 dBuV/m Peak & 54 dBuV/m Average		
Low Ch.	2.412								
4Fo - 10Fo	9.668 - 24.120	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
Mid Ch.	2.437								
4Fo - 10Fo	9.784 - 24.370	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
High Ch.	2.4620								
4Fo - 10Fo	9.848 - 24.620	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		

TEST 4: FIELD STRENGTH OF SPURIOUS RADIATED EMISSIONS**FCC ID:** KBCIX600-IWL**Applicant:** Itronix, Corporation**Model:** IX600-IWL - (802.11g @ 54Mb) with IX600 Vehicle Mount & MAXRAD Model: MAXC24503 - (3 dB gain ant.)

Minimum Standard Specified: Part 15.247(c)

Authorization Procedure: Part 2.1053

Frequency Range Observed: 0 to 25 GHz

Date: 10/28/05

Test Equipment Setup: Refer to block diagram & setup photos in Appendix A

Horn Antenna HorizontalNOTE: No emissions measurable at 3 meters. Antenna was moved into **1 meter** - antenna to EUT spacing.

RADIATED HARMONIC AND SPURIOUS EMISSIONS & RESTRICTED BANDS									
Frequency GHz	Max. SA Rdg. dBuV	Ant. Vert. or Horiz.	Peak or Average Detector	Antenna Factor dB @ 1 meter	Cable & filter loss dB	Amp Gain	Corrected Reading dBuV/m	3 m Limit 74 Peak 54 Avg. dBuV	Margin in dB below LIMIT
Fo - 2.412									
4.824	34.61	H	Peak	32.45	3.97	23.2	47.83	74	26.17
4.824	21.99	H	Average	32.45	3.97	23.2	35.21	54	18.79
7.236	37.05	H	Peak	36.35	4.42	25.9	51.92	74	22.08
7.236	24.53	H	Average	36.35	4.42	25.9	39.40	54	14.60
Fo - 2.437									
4.874	33.88	H	Peak	32.60	3.97	23.2	47.25	74	26.75
4.874	21.67	H	Average	32.60	3.97	23.2	35.04	54	18.96
7.311	37.35	H	Peak	36.57	4.42	25.9	52.44	74	21.56
7.311	35.61	H	Average	36.57	4.42	25.9	40.70	54	13.30
Fo - 2.462									
4.924	34.09	H	Peak	33.01	3.97	23.2	47.87	74	26.13
4.924	22.33	H	Average	33.01	3.97	23.2	36.11	54	17.89
7.386	37.36	H	Peak	36.77	4.42	25.9	52.65	74	21.35
7.386	25.71	H	Average	36.77	4.42	25.9	41.00	54	13.00
Harmonic emissions on all three channels (low, mid & high) 4Fo - 10Fo at or below noise floor									
Channel	Frequency in GHz	Harmonics Observed					Limit 74 dBuV/m Peak & 54 dBuV/m Average		
Low Ch.	2.412								
4Fo - 10Fo	9.648 - 24.120	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
Mid Ch.	2.437								
4Fo - 10Fo	9.748 - 24.370	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
High Ch.	2.4620								
4Fo - 10Fo	9.848 - 24.620	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		

TEST 4: FIELD STRENGTH OF SPURIOUS RADIATED EMISSIONS**FCC ID:** KBCIX600-IWL**Applicant:** Itronix, Corporation**Model:** IX600-IWL - (802.11g @ 54Mb) with IX600 Vehicle Mount & Model: BMAXC24505 - (5 dB gain ant.)

Minimum Standard Specified: Part 15.247(c)

Authorization Procedure: Part 2.105

Frequency Range Observed: 0 to 25 GHz

Date: 10/28/05

Test Equipment Setup: Refer to block diagram & setup photos in Appendix A

Horn Antenna VerticalNOTE: No emissions measurable at 3 meters. Antenna was moved into **1 meter** - antenna to EUT spacing.

RADIATED HARMONIC AND SPURIOUS EMISSIONS & RESTRICTED BANDS									
Frequency GHz	Max. SA Rdg. dBuV	Ant. Vert. or Horiz.	Peak or Average Detector	Antenna Factor dB @ 1 meter	Cable & filter loss dB	Amp Gain	Corrected Reading dBuV/m	3 m Limit 74 Peak 54 Avg. dBuV	Margin in dB below LIMIT
Fo - 2.412									
4.824	34.06	V	Peak	32.45	3.97	23.2	47.28	74	26.72
4.824	21.37	V	Average	32.45	3.97	23.2	34.59	54	19.41
7.236	37.11	V	Peak	36.35	4.42	25.9	51.98	74	22.02
7.236	24.90	V	Average	36.35	4.42	25.9	39.77	54	14.23
Fo - 2.437									
4.874	33.41	V	Peak	32.60	3.97	23.2	46.78	74	27.22
4.874	21.54	V	Average	32.60	3.97	23.2	34.91	54	19.09
7.311	37.48	V	Peak	36.57	4.42	25.9	52.57	74	21.43
7.311	25.12	V	Average	36.57	4.42	25.9	40.21	54	13.79
Fo - 2.462									
4.924	33.94	V	Peak	33.01	3.97	23.2	47.72	74	26.28
4.924	22.16	V	Average	33.01	3.97	23.2	35.94	54	18.06
7.386	37.85	V	Peak	36.77	4.42	25.9	53.14	74	20.86
7.386	25.58	V	Average	36.77	4.42	25.9	40.87	54	13.13
Harmonic emissions on all three channels (low, mid & high) 4Fo - 10Fo at or below noise floor									
Channel	Frequency in GHz	Harmonics Observed					Limit 74 dBuV/m Peak & 54 dBuV/m Average		
Low Ch.	2.412								
4Fo - 10Fo	9.668 - 24.120	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
Mid Ch.	2.437								
4Fo - 10Fo	9.784 - 24.370	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
High Ch.	2.4620								
4Fo - 10Fo	9.848 - 24.620	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		

TEST 4: FIELD STRENGTH OF SPURIOUS RADIATED EMISSIONS**FCC ID:** KBCIX600-IWL**Applicant:** Itronix, Corporation**Model:** IX600-IWL - (802.11g @ 54Mb) with IX600 Vehicle Mount & MAXRAD Model: BMAXC24505 - (5 dB gain ant.)

Minimum Standard Specified: Part 15.247(c)

Authorization Procedure: Part 2.1053

Frequency Range Observed: 0 to 25 GHz

Date: 10/28/05

Test Equipment Setup: Refer to block diagram & setup photos in Appendix A

Horn Antenna HorizontalNOTE: No emissions measurable at 3 meters. Antenna was moved into **1 meter** - antenna to EUT spacing.

RADIATED HARMONIC AND SPURIOUS EMISSIONS & RESTRICTED BANDS									
Frequency GHz	Max. SA Rdg. dBuV	Ant. Vert. or Horiz.	Peak or Average Detector	Antenna Factor dB @ 1 meter	Cable & filter loss dB	Amp Gain	Corrected Reading dBuV/m	3 m Limit 74 Peak 54 Avg. dBuV	Margin in dB below LIMIT
Fo - 2.412									
4.824	33.19	H	Peak	32.45	3.97	23.2	46.61	74	27.59
4.824	21.05	H	Average	32.45	3.97	23.2	34.25	54	19.75
7.236	36.28	H	Peak	36.35	4.42	25.9	51.15	74	22.85
7.236	24.94	H	Average	36.35	4.42	25.9	39.81	54	14.19
Fo - 2.437									
4.874	33.08	H	Peak	32.60	3.97	23.2	46.45	74	27.55
4.874	21.18	H	Average	32.60	3.97	23.2	34.55	54	19.45
7.311	36.84	H	Peak	36.57	4.42	25.9	51.93	74	22.07
7.311	24.92	H	Average	36.57	4.42	25.9	40.01	54	13.99
Fo - 2.462									
4.924	33.75	H	Peak	33.01	3.97	23.2	47.53	74	26.47
4.924	22.03	H	Average	33.01	3.97	23.2	35.81	54	18.19
7.386	37.27	H	Peak	36.77	4.42	25.9	52.56	74	21.44
7.386	25.42	H	Average	36.77	4.42	25.9	40.71	54	13.29
Harmonic emissions on all three channels (low, mid & high) 4Fo - 10Fo at or below noise floor									
Channel	Frequency in GHz	Harmonics Observed					Limit 74 dBuV/m Peak & 54 dBuV/m Average		
Low Ch.	2.412								
4Fo - 10Fo	9.648 - 24.120	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
Mid Ch.	2.437								
4Fo - 10Fo	9.748 - 24.370	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
High Ch.	2.4620								
4Fo - 10Fo	9.848 - 24.620	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES**FCC ID:** KBCIX600-IWL**Applicant:** Itronix, Corporation**Model:** IX600-IWL - (802.11b @ 11Mb) with IX600 Vehicle Mount & Model: MAXC24503 - (3 dB gain antenna)

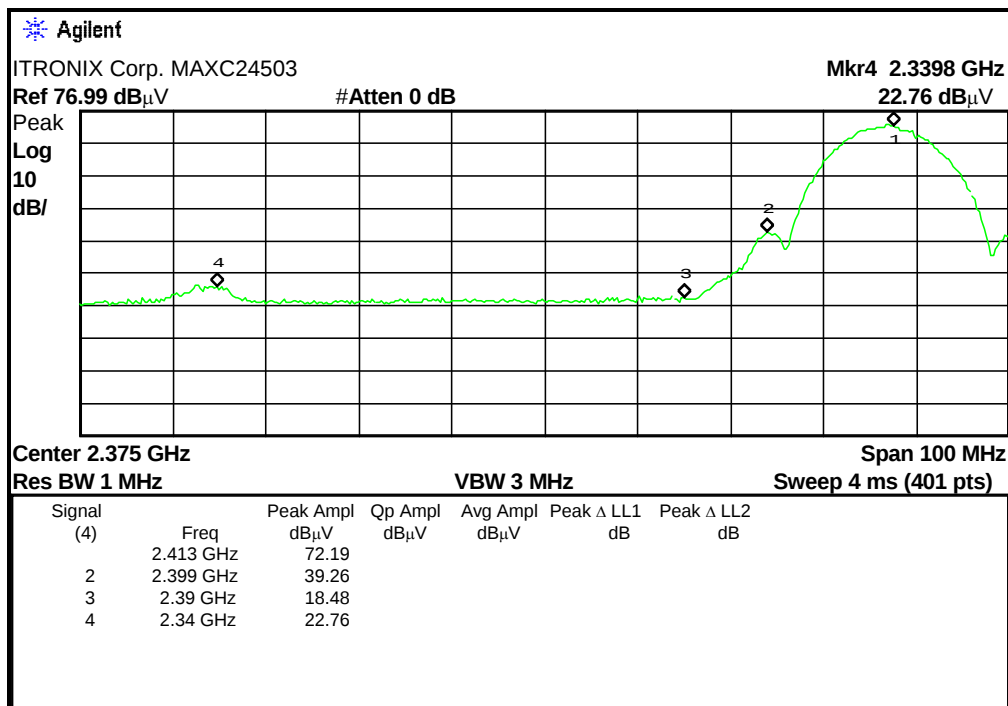
Minimum Standard Specified: Part 15.247(c), 15.205 & 15.209. Radiated emissions, which fall in the restricted bands, as defined in Part 15.205(a), must also comply with the radiated emission limits specified in Part 15.209(a). All others must be < -20dBc.

Spectrum OATS at Fluke Park II

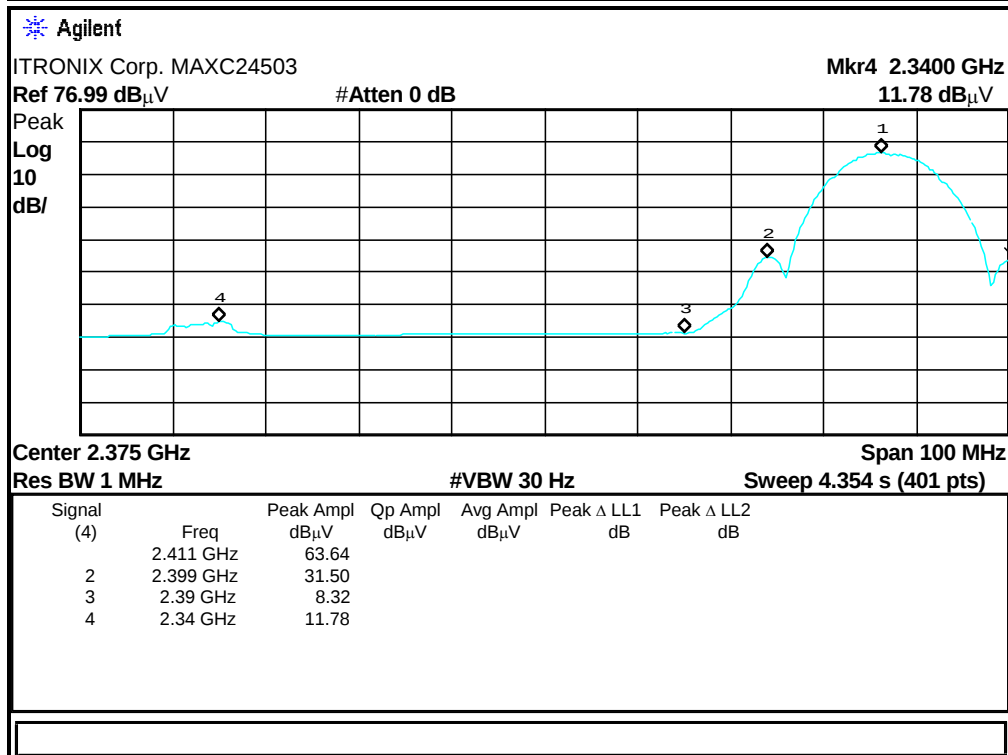
Test Date: 10/28/05

Maximum Field Strength for Low, Mid, High Channels and Band Edges

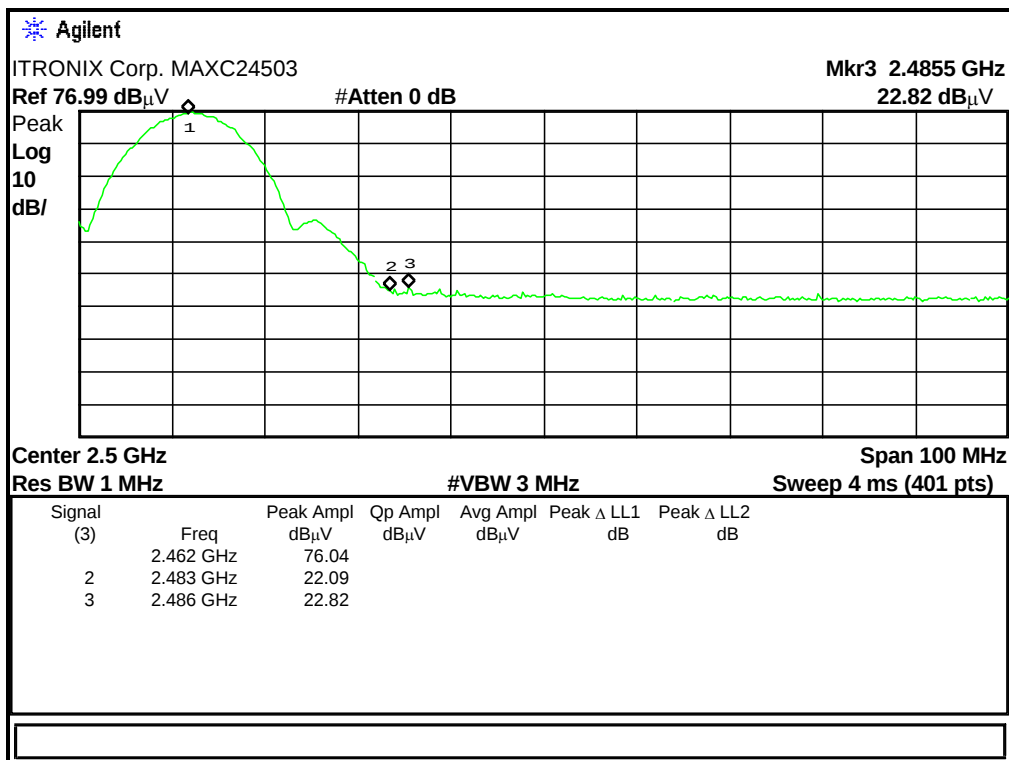
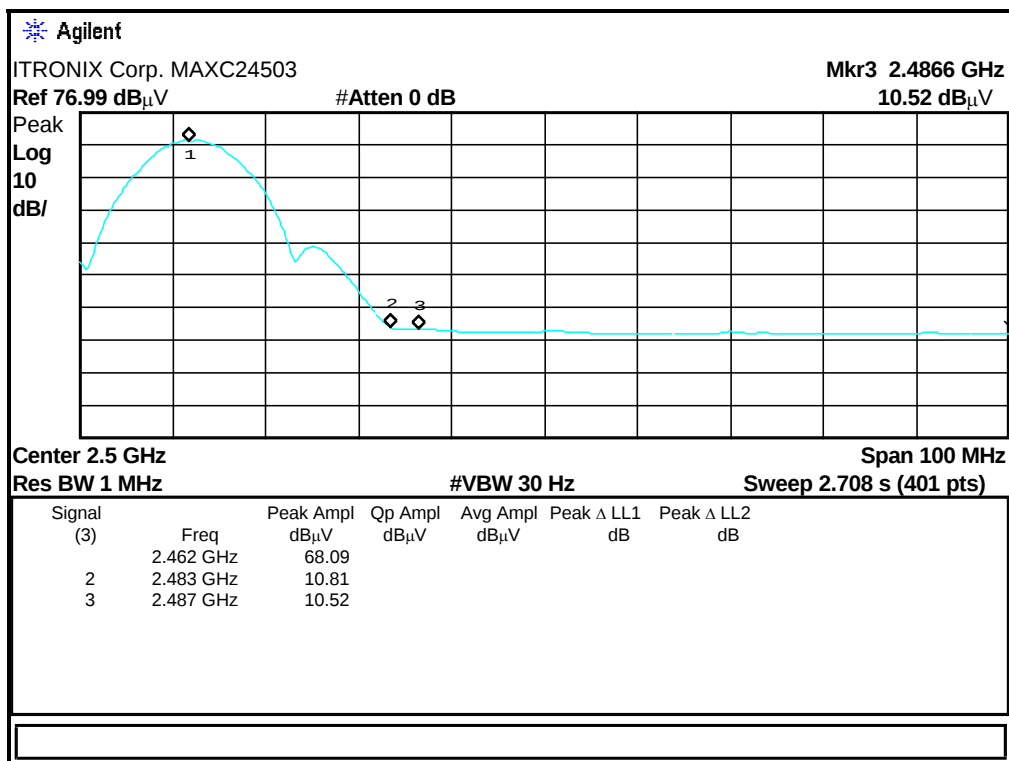
WLAN Channels 1, 6 & 11 Frequency in MHz	Ant. Vert/ Horz	Spectrum Analyzer Reading dBuV	Ant Factor	SA Amp Gain	Cable Loss	dBuV/m @ 3 meters	Spur. Limit	Margin dB
Channel 1 2412.0	V	72.19 PEAK	28.37	inc	2.68	103.24		
Channel 1 2412.0	V	63.64 AVG	28.37	inc	2.68	94.69		
Rest. Band Edge 2390.0	V	18.48 PEAK	28.37	inc	2.68	49.53	74	24.47
Rest. Band Edge 2390.0	V	8.32 AVG	28.37	inc	2.68	39.37	54	14.63
Highest Level 2399.0	V	39.26 PEAK	28.37	inc	2.68	70.31	20 dBc	12.93
Highest Level 2399.0	V	31.50 AVG	28.37	inc	2.68	62.55	20 dBc	12.14
Rest. Band 2340.0	V	22.76 PEAK	28.37	inc	2.68	53.81	74	20.19
Rest. Band 2340.0	V	11.78 AVG	28.37	inc	2.68	42.83	54	11.17
Channel 6 2437.0	V	77.68 PEAK	28.37	inc	2.68	108.73		
Channel 6 2437.0	V	69.76 AVG	28.37	inc	2.68	100.81		
Channel 11 2462.0	V	76.04 PEAK	28.37	inc	2.68	107.09		
Channel 11 2462.0	V	68.09 AVG	28.37	inc	2.68	99.14		
Rest. Band Edge 2483.5	V	22.09 PEAK	28.37	inc	2.68	53.14	74	20.86
Rest. Band Edge 2483.5	V	10.81 AVG	28.37	inc	2.68	41.86	54	12.14
Highest Level 2486.0	V	22.09 PEAK	28.37	inc	2.68	53.87	20 dBc	33.95
Highest Level 2487.0	V	10.52 AVG	28.37	inc	2.68	41.57	20 dBc	37.57
Supporting upper and lower band-edge plots with "worst" case Vertical antenna polarization are on the next 2 pages.								

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES - VERTICAL

PEAK



AVERAGE

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES - VERTICAL**PEAK****AVERAGE**

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES**FCC ID:** KBCIX600-IWL**Applicant:** Itronix, Corporation**Model:** IX600-IWL - (802.11b @ 11Mb) with IX600 Vehicle Mount & Model: BMAXC24505 - (5 dB gain antenna)

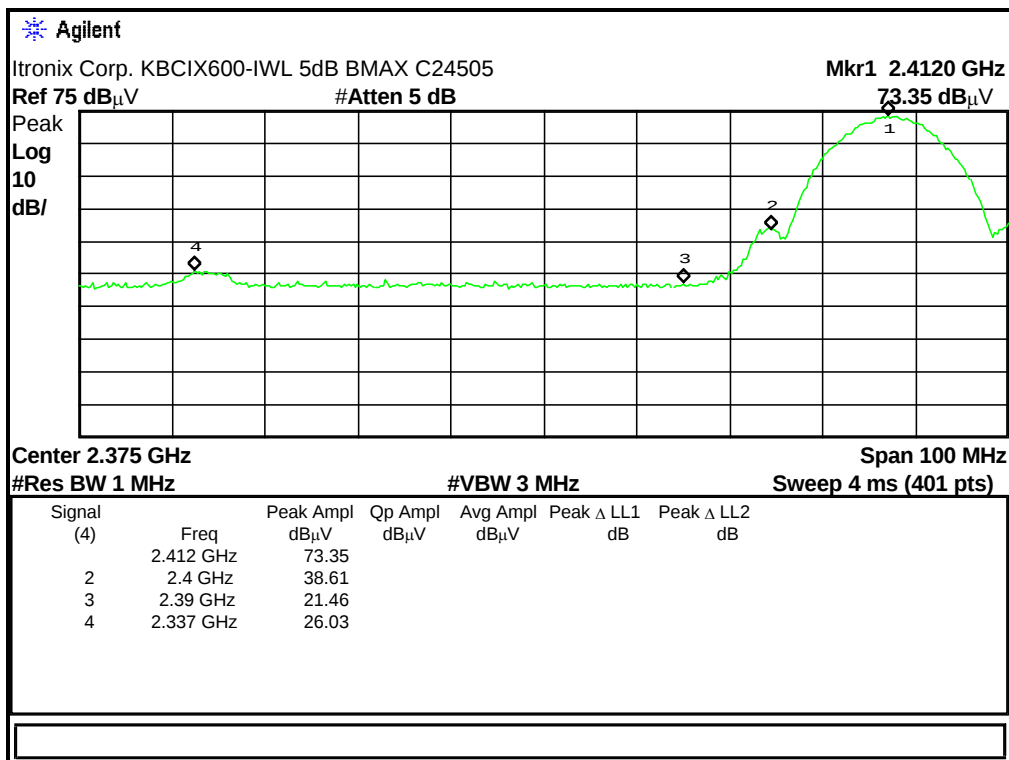
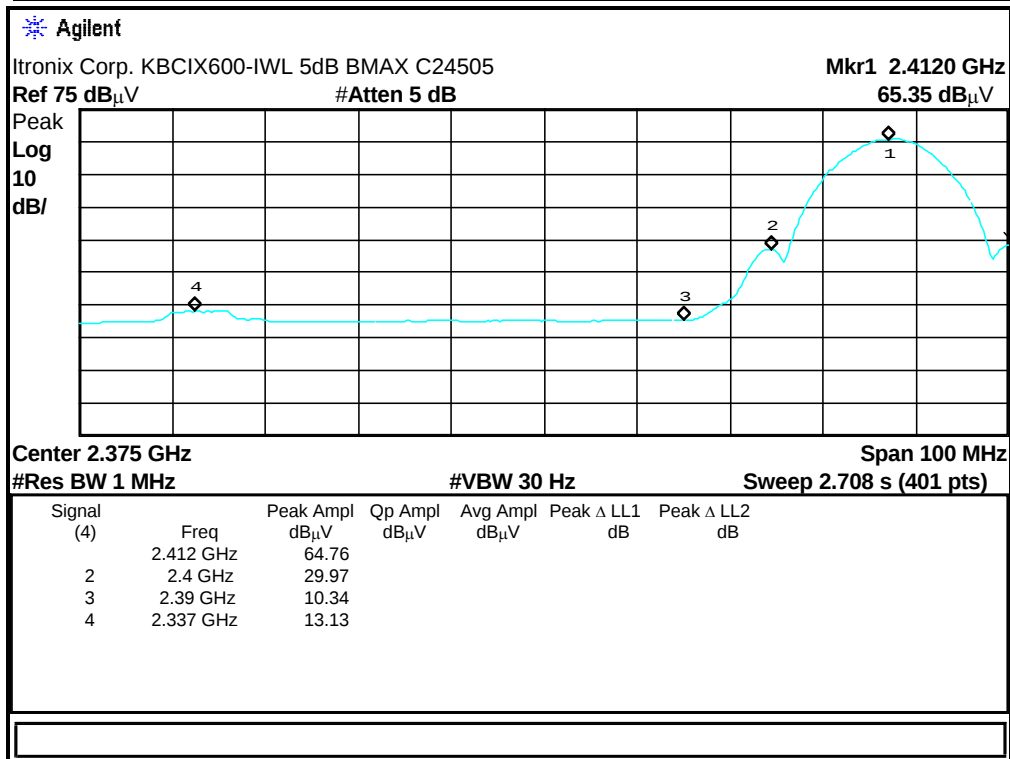
Minimum Standard Specified: Part 15.247(c), 15.205 & 15.209. Radiated emissions, which fall in the restricted bands, as defined in Part 15.205(a), must also comply with the radiated emission limits specified in Part 15.209(a). All others must be < -20dBc.

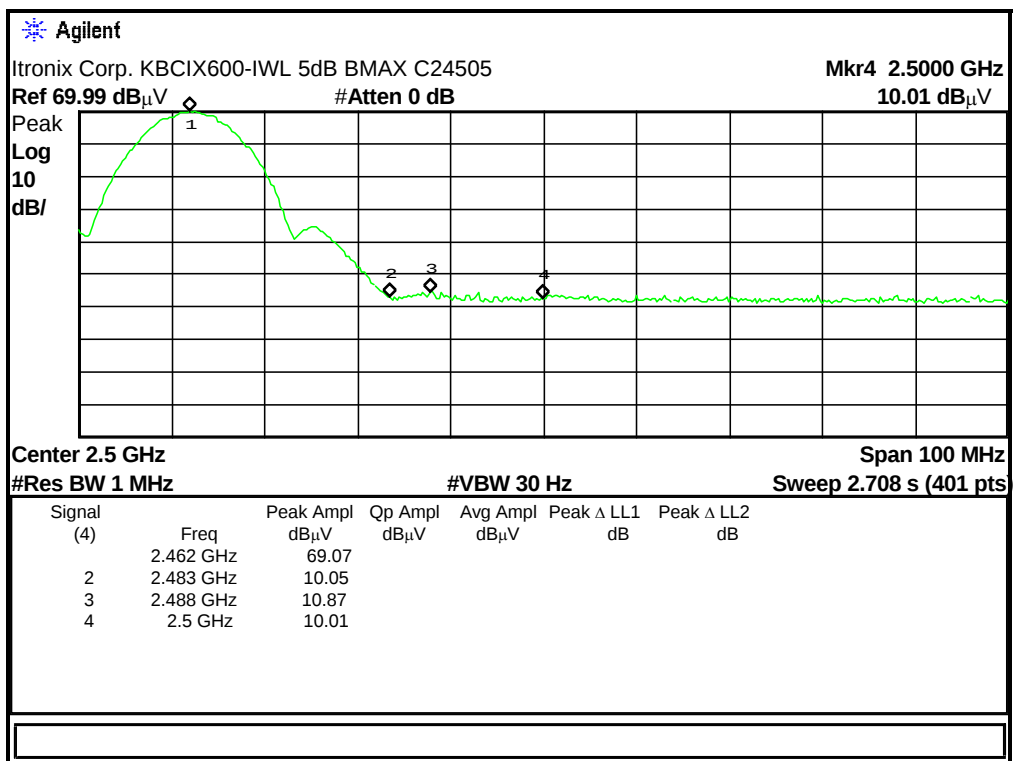
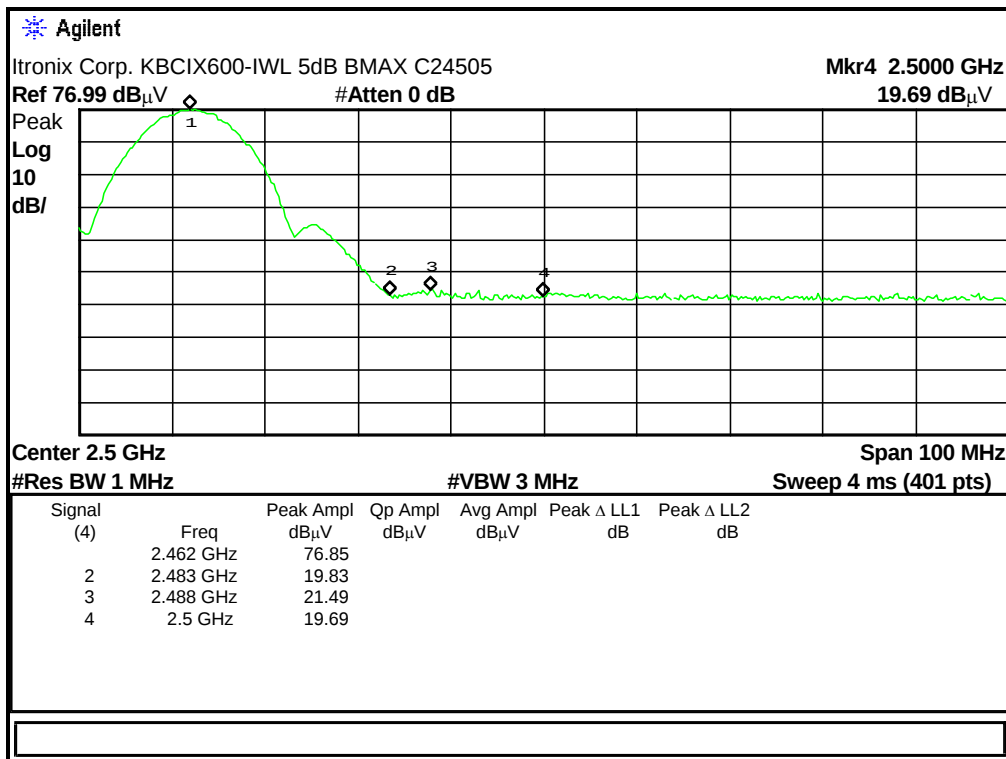
Spectrum OATS at Fluke Park II

Test Date: 10/28/05

Maximum Field Strength for Low, Mid, High Channels and Band Edges

WLAN Channels 1, 6 & 11 Frequency in MHz	Ant. Vert/ Horz	Spectrum Analyzer Reading dBuV	Ant Factor	SA Amp Gain	Cable Loss	dBuV/m @3meters	Spurious Limit dBuV/m or 20 dBc	Margin dB
Channel 1 2412.0	V	73.25 PEAK	28.37	inc	2.68	104.30		
Channel 1 2412.0	V	64.76 AVG	28.37	inc	2.68	95.81		
Rest. Band Edge 2390.0	V	21.46 PEAK	28.37	inc	2.68	52.51	74	21.49
Rest. Band Edge 2390.0	V	10.31 AVG	28.37	inc	2.68	41.39	54	12.61
Highest Level 2400.0	V	38.61 PEAK	28.37	inc	2.68	69.66	20 dBc	14.64
Highest Level 2400.0	V	29.97 AVG	28.37	inc	2.68	61.02	20 dBc	14.79
Restricted Band 2337.0	V	26.03 PEAK	28.37	inc	2.68	57.08	74	16.92
Restricted Band 2337.0	V	13.13 AVG	28.37	inc	2.68	44.18	54	9.82
Channel 6 2437.0	V	77.20 PEAK	28.37	inc	2.68	108.25		
Channel 6 2437.0	V	69.07 AVG	28.37	inc	2.68	100.41		
Channel 11 2462.0	V	76.99 PEAK	28.37	inc	2.68	107.90		
Channel 11 2462.0	V	69.07 AVG	28.37	inc	2.68	100.12		
Rest. Band Edge 2483.5	V	19.83 PEAK	28.37	inc	2.68	50.88	74	23.12
Rest. Band Edge 2483.5	V	10.50 AVG	28.37	inc	2.68	41.55	54	12.45
Restricted Band 2488.0	V	19.69 PEAK	28.37	inc	2.68	50.74	74	23.26
Restricted Band 2488.0	V	10.01 AVG	28.37	inc	2.68	41.06	54	12.94
Highest Lvl Rest. B 2500.0	V	21.49 PEAK	28.37	inc	2.68	52.54	74	21.46
Highest Lvl Rest. B 2500.0	V	10.87 AVG	28.37	inc	2.68	41.92	54	12.08
Supporting upper and lower band-edge plots with "worst" case Vertical antenna polarization are on the next 2 pages.								

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES - VERTICAL**PEAK****AVERAGE**

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES - VERTICAL

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES**FCC ID:** KBCIX600-IWL**Applicant:** Itronix, Corporation**Model:** IX600-IWL - (802.11g @ 54Mb) with IX600 Vehicle Mount & Model: MAXC24503 - (3 dB gain antenna)

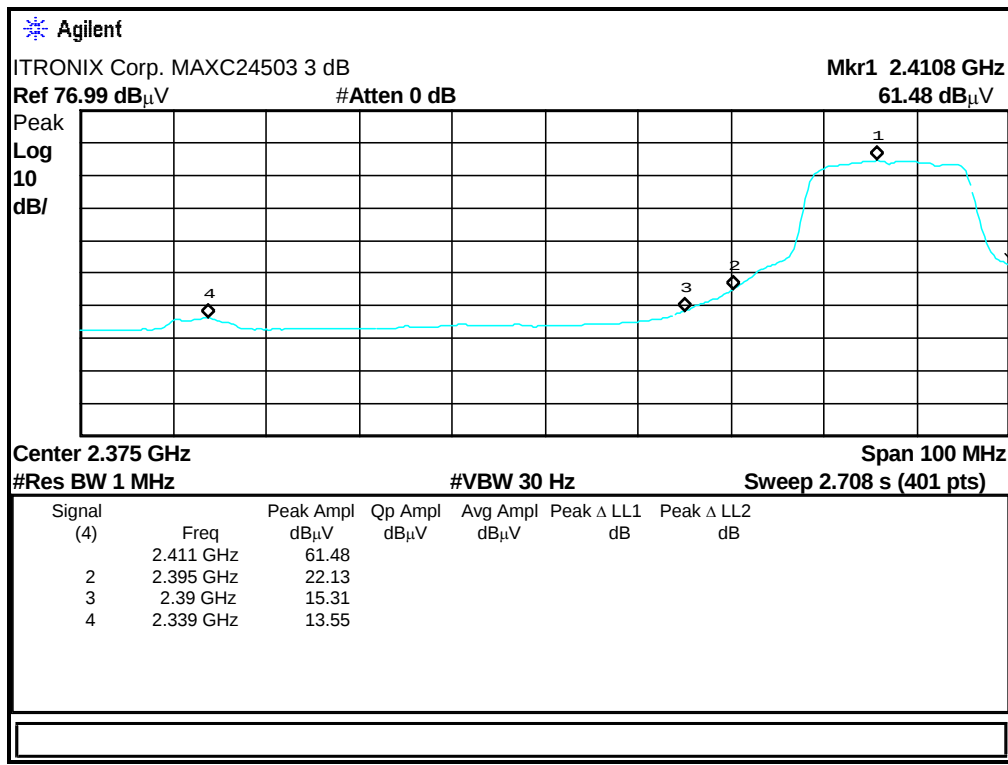
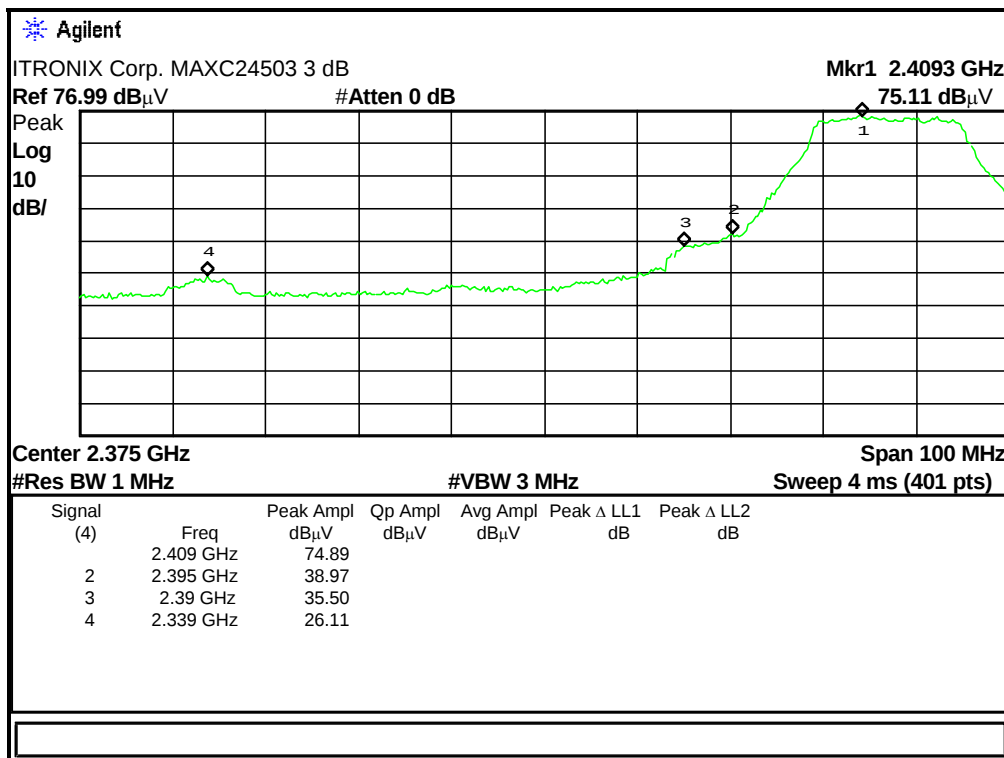
Minimum Standard Specified: Part 15.247(c), 15.205 & 15.209. Radiated emissions, which fall in the restricted bands, as defined in Part 15.205(a), must also comply with the radiated emission limits specified in Part 15.209(a). All others must be < -20dBc.

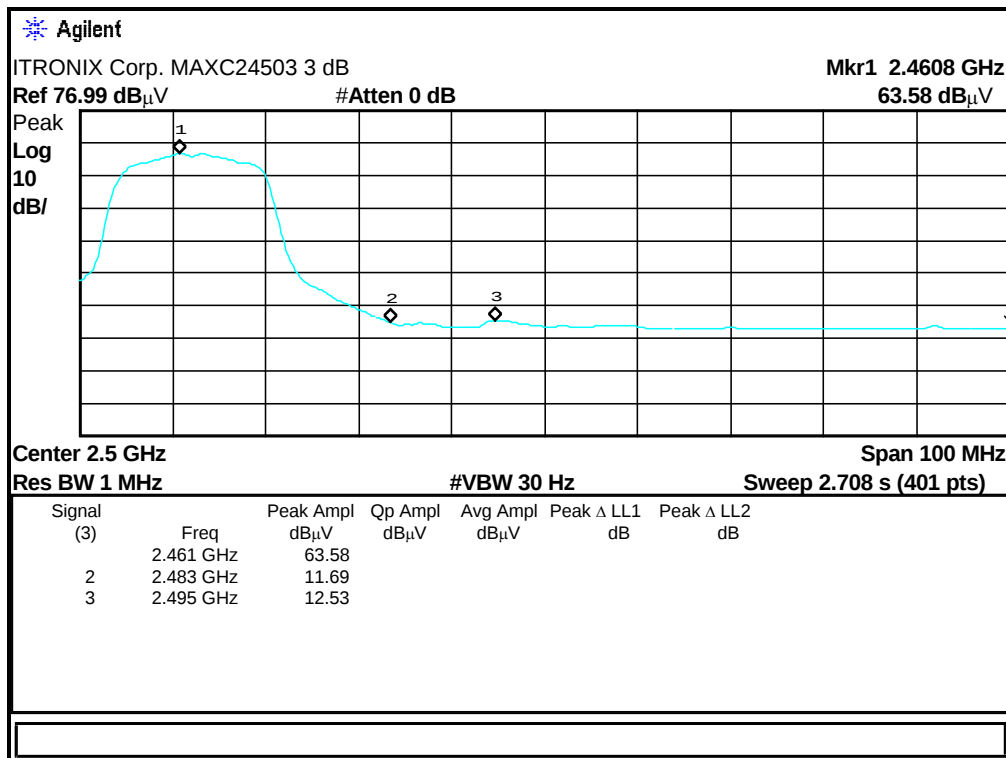
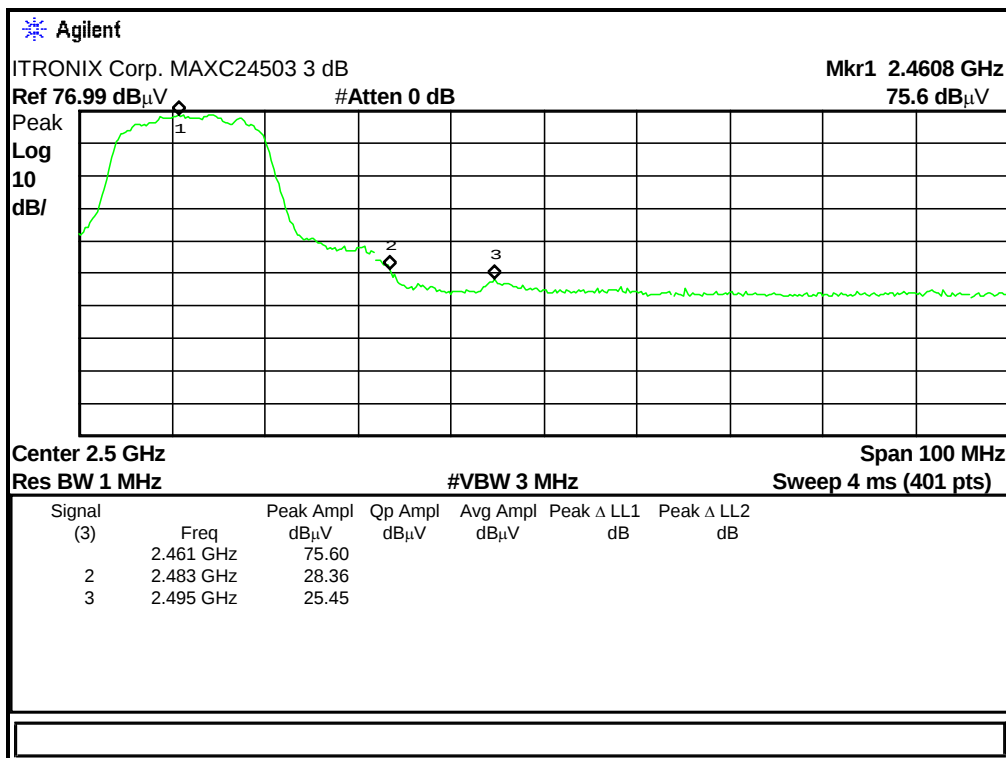
Spectrum OATS at Fluke Park II

Test Date: 10/28/05

Maximum Field Strength for Low, Mid, High Channels and Band Edges

WLAN Channels 1, 6 & 11 Frequency in MHz	Ant. Vert/ Horz	Spectrum Analyzer Reading dBuV	Ant Factor	SA Amp Gain	Cable Loss	dBuV/m @ 3 meters	Spur. Limit	Margin dB
Channel 1 2412.0	V	74.89 PEAK	28.37	inc	2.68	105.94		
Channel 1 2412.0	V	61.48 AVG	28.37	inc	2.68	92.53		
Rest. Band Edge 2390.0	V	35.50 PEAK	28.37	inc	2.68	66.55	74	7.45
Rest. Band Edge 2390.0	V	15.31 AVG	28.37	inc	2.68	46.36	54	7.64
Highest Level 2395.0	V	38.97 PEAK	28.37	inc	2.68	70.02	20 dBc	15.95
Highest Level 2395.0	V	22.13 AVG	28.37	inc	2.68	53.18	20 dBc	19.35
Rest. Band 2339.0	V	26.11 PEAK	28.37	inc	2.68	57.14	74	16.86
Rest. Band 2339.0	V	13.55 AVG	28.37	inc	2.68	44.60	54	9.40
Channel 6 2437.0	V	74.48 PEAK	28.37	inc	2.68	108.53		
Channel 6 2437.0	V	64.25 AVG	28.37	inc	2.68	95.30		
Channel 11 2462.0	V	75.60 PEAK	28.37	inc	2.68	106.65		
Channel 11 2462.0	V	63.58 AVG	28.37	inc	2.68	94.63		
Rest. Band Edge 2483.5	V	28.36 PEAK	28.37	inc	2.68	59.41	74	14.59
Rest. Band Edge 2483.5	V	11.69 AVG	28.37	inc	2.68	42.74	54	11.26
Highest Level 2495.0	V	25.45 PEAK	28.37	inc	2.68	56.50	20 dBc	17.50
Highest Level 2495.0	V	12.53 AVG	28.37	inc	2.68	43.58	20 dBc	10.42
Supporting upper and lower band-edge plots with "worst" case Vertical antenna polarization, are on the next 2 pages.								

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES - VERTICAL

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES - VERTICAL

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES**FCC ID:** KBCIX600-IWL**Applicant:** Itronix, Corporation**Model:** IX600-IWL - (802.11g @ 54Mb) with IX600 Vehicle Mount & Model: BMAXC24505 - (5 dB gain antenna)

Minimum Standard Specified: Part 15.247(c), 15.205 & 15.209. Radiated emissions, which fall in the restricted bands, as defined in Part 15.205(a), must also comply with the radiated emission limits specified in Part 15.209(a). All others must be < -20dBc.

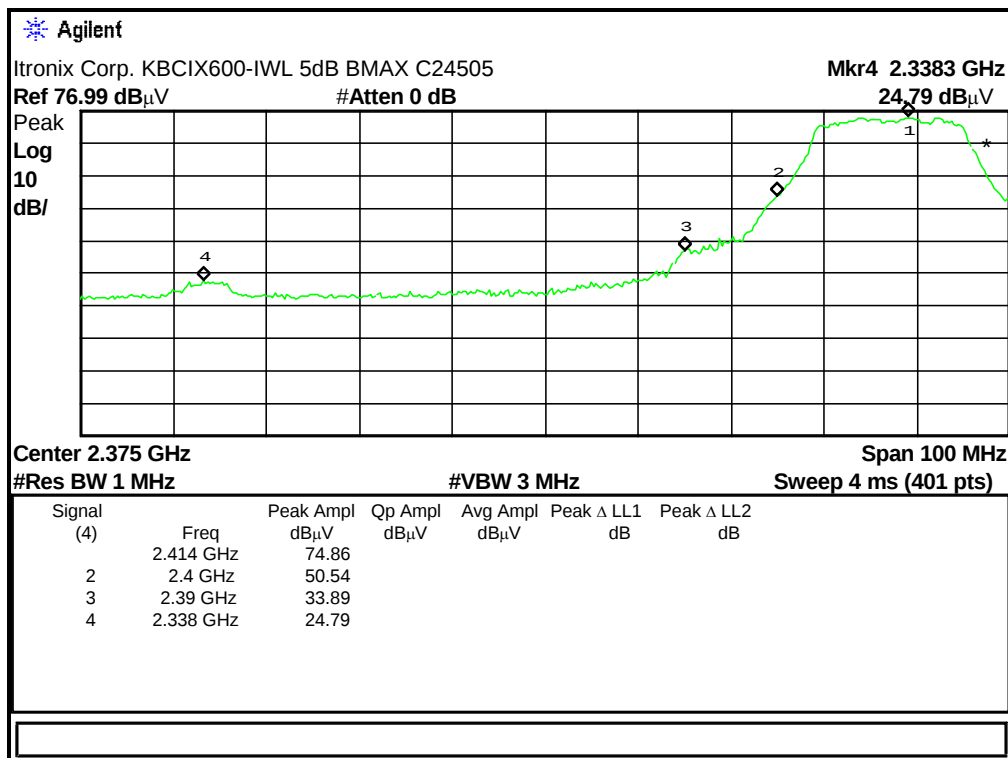
Spectrum OATS at Fluke Park II

Test Date: 10/28/05

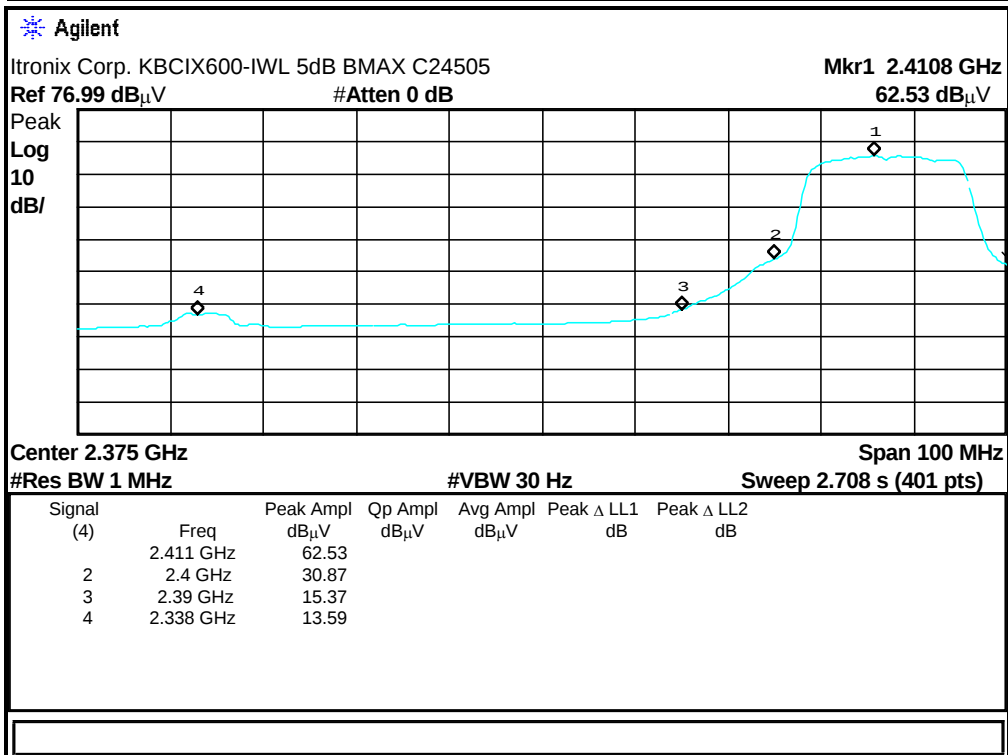
Maximum Field Strength for Low, Mid, High Channels and Band Edges

WLAN Channels 1, 6 & 11 Frequency in MHz	Ant. Vert/ Horz	Spectrum Analyzer Reading dBuV	Ant Factor	SA Amp Gain	Cable Loss	dBuV/m @3meters	Spurious Limit dBuV/m or 20 dBc	Margin dB
Channel 1 2412.0	V	74.86 PEAK	28.37	inc	2.68	105.91		
Channel 1 2412.0	V	62.53 AVG	28.37	inc	2.68	93.58		
Rest. Band Edge 2390.0	V	33.89 PEAK	28.37	inc	2.68	64.94	74	9.06
Rest. Band Edge 2390.0	V	15.37 AVG	28.37	inc	2.68	46.42	54	7.58
Highest Level 2400.0	V	50.54 PEAK	28.37	inc	2.68	81.59	20 dBc	4.32
Highest Level 2400.0	V	30.87 AVG	28.37	inc	2.68	61.92	20 dBc	11.66
Restricted Band 2339.0	V	24.79 PEAK	28.37	inc	2.68	55.84	74	18.16
Restricted Band 2339.0	V	13.59 AVG	28.37	inc	2.68	44.64	54	9.36
Channel 6 2437.0	V	75.80 PEAK	28.37	inc	2.68	106.85		
Channel 6 2437.0	V	63.85 AVG	28.37	inc	2.68	94.90		
Channel 11 2462.0	V	76.72 PEAK	28.37	inc	2.68	107.77		
Channel 11 2462.0	V	64.20 AVG	28.37	inc	2.68	95.25		
Rest. Band Edge 2483.5	V	30.17 PEAK	28.37	inc	2.68	61.22	74	12.78
Rest. Band Edge 2483.5	V	13.48 AVG	28.37	inc	2.68	44.53	54	9.47
Restricted Band 2494.0	V	24.81 PEAK	28.37	inc	2.68	55.86	74	18.14
Restricted Band 2494.0	V	13.05 AVG	28.37	inc	2.68	44.20	54	9.80
Highest Lvl Rest. B 2500.0	V	20.73 PEAK	28.37	inc	2.68	51.78	74	22.22
Highest Lvl Rest. B 2500.0	V	10.64 AVG	28.37	inc	2.68	41.69	54	12.31

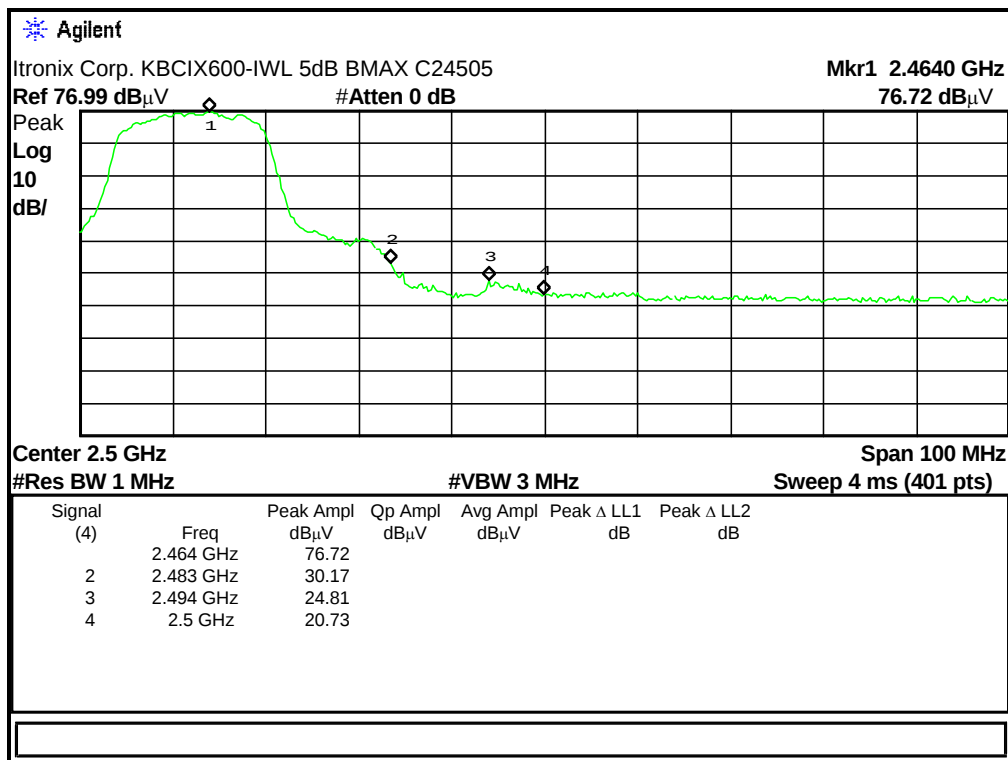
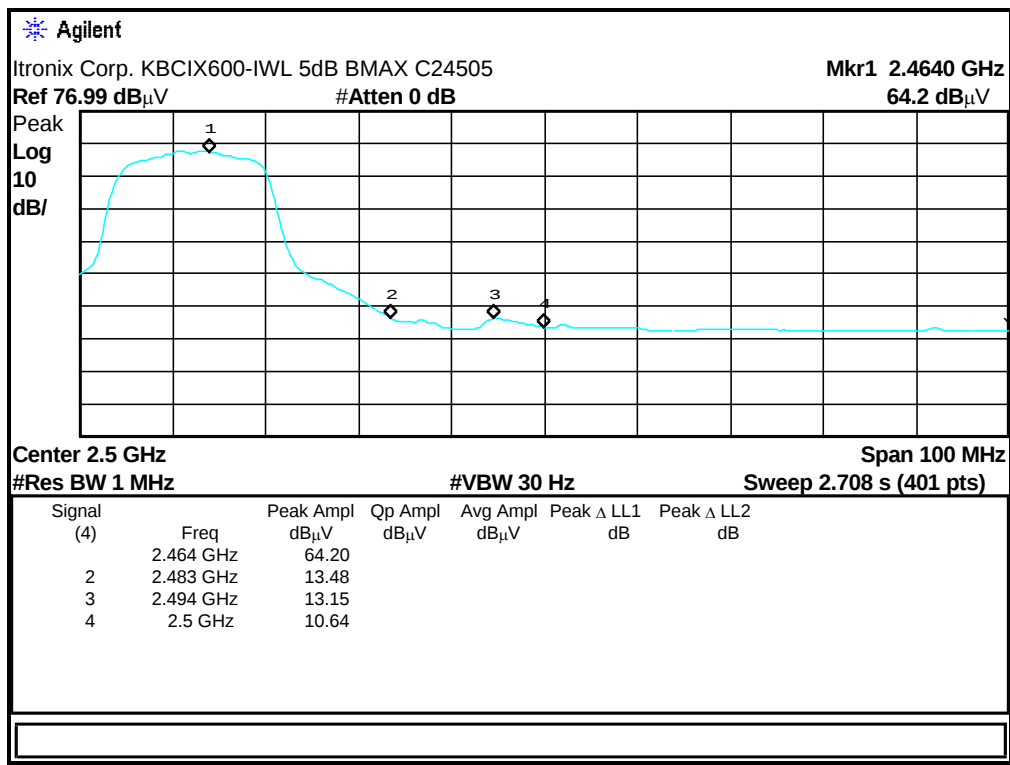
Supporting upper and lower band-edge plots with "worst" case Vertical antenna polarization are on the next 2 pages.

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES - VERTICAL

PEAK



AVERAGE

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES - VERTICAL**PEAK****AVERAGE**