



Product Name: 3-in-1 Combination Antenna

Part Number: MT-4B-AS-3W01

Features:

- 2*WiFi, 1*BT Antenna Combination
- Support WiFi Dual Bands, 2400-2500MHz, 5150-5850MHz
- Support BT Dual Bands, 2400-2500MHz, 5150-5850MHz
- Customizable Cables and Connectors
- RoHS & REACH Compliant

Applications:

- Fleet Management & Telematics
- Vehicle Navigation

3-in-1 Combination Antenna

MODEL: MT-4B-AS-3W01

Preliminary

I. Specifications:

Items			WiFi M Specifications						
Frequencies (MHz)			2400	2450	2500	5150	5350	5750	5850
Efficiency (%)	Free Space	30cm	77.62	79.62	81.28	61.66	57.54	59.57	51.05
		1m	60.95	62.52	63.83	42.56	39.72	40.46	34.67
		2m	43.15	44.26	45.19	25.06	23.39	23.28	19.95
		3m	30.55	31.33	31.99	14.76	13.77	13.40	11.48
		5m	15.31	15.70	16.03	5.12	4.78	4.44	3.80
	With Ground Plane	30cm	71.45	65.01	58.61	50.47	58.34	56.36	45.29
		1m	56.10	51.05	46.03	34.83	40.27	38.28	30.76
		2m	39.72	36.14	32.58	20.51	23.71	22.03	17.70
		3m	28.12	25.59	23.07	12.08	13.96	12.68	10.19
		5m	14.09	12.82	11.56	4.19	4.84	4.20	3.37
Average Gain (dBi)	Free Space	30cm	-1.10	-0.99	-0.90	-2.10	-2.40	-2.25	-2.92
		1m	-2.15	-2.04	-1.95	-3.71	-4.01	-3.93	-4.60
		2m	-3.65	-3.54	-3.45	-6.01	-6.31	-6.33	-7.00
		3m	-5.15	-5.04	-4.95	-8.31	-8.61	-8.73	-9.40
		5m	-8.15	-8.04	-7.95	-12.91	-13.21	-13.53	-14.20
	With Ground Plane	30cm	-1.46	-1.87	-2.32	-2.97	-2.34	-2.49	-3.44
		1m	-2.51	-2.92	-3.37	-4.58	-3.95	-4.17	-5.12
		2m	-4.01	-4.42	-4.87	-6.88	-6.25	-6.57	-7.52
		3m	-5.51	-5.92	-6.37	-9.18	-8.55	-8.97	-9.92
		5m	-8.51	-8.92	-9.37	-13.78	-13.15	-13.77	-14.72

© Unictron Technologies Corp.
All specifications subject to change without notice.

Peak Gain (dBi)	Free Space	30cm	4.80	4.47	5.06	3.27	3.39	4.05	3.82
		1m	3.75	3.42	4.01	1.66	1.78	2.37	2.14
		2m	2.25	1.92	2.51	-0.64	-0.52	-0.03	-0.26
		3m	0.75	0.42	1.01	-2.94	-2.82	-2.43	-2.66
		5m	-2.25	-2.58	-1.99	-7.54	-7.42	-7.23	-7.46
	With Ground Plane	30cm	4.32	4.80	4.54	2.68	4.94	6.05	5.83
		1m	3.27	3.75	3.49	1.07	3.33	4.37	4.15
		2m	1.77	2.25	1.99	-1.23	1.03	1.97	1.75
		3m	0.27	0.75	0.49	-3.53	-1.27	-0.43	-0.65
		5m	-2.73	-2.25	-2.51	-8.13	-5.87	-5.23	-5.45
V.S.W.R			< 2						
Return Loss (dB)			< -10						
Impedance (Ω)			50						
Polarization			Linear						
Cable / Length			H-100 / 2 Meters						
Connector			SMA (Male)						

© Unictron Technologies Corp.
All specifications subject to change without notice.

Items			WiFi A Specifications						
Frequencies (MHz)			2400	2450	2500	5150	5350	5750	5850
Efficiency (%)	Free Space	30cm	75.51	78.89	86.70	72.28	75.34	66.99	58.34
		1m	59.29	61.94	68.08	49.89	52.00	45.50	39.63
		2m	41.98	43.85	48.19	29.38	30.62	26.18	22.80
		3m	29.72	31.05	34.12	17.30	18.03	15.07	13.12
		5m	14.89	15.56	17.10	6.00	6.25	4.99	4.35
	With Ground Plane	30cm	50.82	47.75	60.53	59.57	57.02	59.57	51.88
		1m	39.90	37.50	47.53	41.11	39.36	37.50	35.24
		2m	28.25	26.55	33.65	24.21	23.17	23.28	20.28
		3m	20.00	18.79	23.82	14.26	13.65	13.40	11.67
		5m	10.02	9.42	11.94	4.94	4.73	4.44	3.86

Average Gain (dBi)	Free Space	30cm	-1.22	-1.03	-0.62	-1.41	-1.23	-1.74	-2.34
		1m	-2.27	-2.08	-1.67	-3.02	-2.84	-3.42	-4.02
		2m	-3.77	-3.58	-3.17	-5.32	-5.14	-5.82	-6.42
		3m	-5.27	-5.08	-4.67	-7.62	-7.44	-8.22	-8.82
		5m	-8.27	-8.08	-7.67	-12.22	-12.04	-13.02	-13.62
	With Ground Plane	30cm	-2.94	-3.21	-2.18	-2.25	-2.44	-2.25	-2.85
		1m	-3.99	-4.26	-3.23	-3.86	-4.05	-4.26	-4.53
		2m	-5.49	-5.76	-4.73	-6.16	-6.35	-6.33	-6.93
		3m	-6.99	-7.26	-6.23	-8.46	-8.65	-8.73	-9.33
		5m	-9.99	-10.26	-9.23	-13.06	-13.25	-13.53	-14.13
Peak Gain (dBi)	Free Space	30cm	5.49	5.99	5.82	4.09	6.40	3.06	2.96
		1m	4.44	4.94	4.77	2.48	4.79	1.38	1.28
		2m	2.94	3.44	3.27	0.18	2.49	-1.02	-1.12
		3m	1.44	1.94	1.77	-2.12	0.19	-3.42	-3.52
		5m	-1.56	-1.06	-1.23	-6.72	-4.41	-8.22	-8.32
	With Ground Plane	30cm	3.46	3.77	4.12	4.40	3.95	4.60	4.24
		1m	2.41	2.72	3.07	2.79	2.34	2.92	2.56
		2m	0.91	1.22	1.57	0.49	0.04	0.52	0.16
		3m	-0.59	-0.28	0.07	-1.81	-2.26	-1.88	-2.24
		5m	-3.59	-3.28	-2.93	-6.41	-6.86	-6.68	-7.04
V.S.W.R			< 2						
Return Loss (dB)			< -10						
Impedance (Ω)			50						
Polarization			Linear						
Cable / Length			H-100 / 2 Meters						
Connector			SMA (Male)						

© Unictron Technologies Corp.
All specifications subject to change without notice.

Items			BT Specifications						
Frequencies (MHz)			2400	2450	2500	5150	5350	5750	5850
Efficiency (%)	Free Space	30cm	55.46	57.15	61.52	79.43	61.94	72.78	66.22
		1m	43.55	44.87	48.31	54.83	44.46	49.43	44.98
		2m	30.83	31.77	34.20	32.28	26.18	28.44	25.88
		3m	21.83	22.49	24.21	19.01	15.42	16.37	14.89
		5m	10.94	11.27	12.13	6.59	5.35	5.42	4.93
	With Ground Plane	30cm	41.78	36.81	38.55	80.17	70.47	78.52	69.18
		1m	32.81	28.91	30.27	55.34	48.64	28.91	46.99
		2m	23.23	20.46	21.43	32.58	28.64	30.69	27.04
		3m	16.44	14.49	15.17	19.19	16.87	17.66	15.56
		5m	8.24	7.26	7.60	6.65	5.85	5.85	5.15
Average Gain (dBi)	Free Space	30cm	-2.56	-2.43	-2.11	-1.00	-2.08	-1.38	-1.79
		1m	-3.61	-3.48	-3.16	-2.61	-3.52	-3.06	-3.47
		2m	-5.11	-4.98	-4.66	-4.91	-5.82	-5.46	-5.87
		3m	-6.61	-6.48	-6.16	-7.21	-8.12	-7.86	-8.27
		5m	-9.61	-9.48	-9.16	-11.81	-12.72	-12.66	-13.07
	With Ground Plane	30cm	-3.79	-4.34	-4.14	-0.96	-1.52	-1.05	-1.60
		1m	-4.84	-5.39	-5.19	-2.57	-3.13	-5.39	-3.28
		2m	-6.34	-6.89	-6.69	-4.87	-5.43	-5.13	-5.68
		3m	-7.84	-8.39	-8.19	-7.17	-7.73	-7.53	-8.08
		5m	-10.84	-11.39	-11.19	-11.77	-12.33	-12.33	-12.88
Peak Gain (dBi)	Free Space	30cm	3.22	3.42	4.97	7.04	5.16	6.98	6.06
		1m	2.17	2.37	3.92	5.43	3.55	5.30	4.38
		2m	0.67	0.87	2.42	3.13	1.25	2.90	1.98
		3m	-0.83	-0.63	0.92	0.83	-1.05	0.50	-0.42
		5m	-3.83	-3.63	-2.08	-3.77	-5.65	-4.30	-5.22
	With Ground Plane	30cm	4.09	2.54	2.66	7.02	5.00	5.47	5.30
		1m	3.04	1.49	1.61	5.41	3.39	3.79	3.62
		2m	1.54	-0.01	0.11	3.11	1.09	1.39	1.22
		3m	0.04	-1.51	-1.39	0.81	-1.21	-1.01	-1.18
		5m	-2.96	-4.51	-4.39	-3.79	-5.81	-5.81	-5.98

© Unictron Technologies Corp.
All specifications subject to change without notice.


V.S.W.R	< 2
Return Loss (dB)	< -10
Impedance (Ω)	50
Polarization	Linear
Cable / Length	H-100 / 2 Meters
Connector	SMA (Male)
Mechanical	
Dimension (mm)	ϕ 65.00(D) x 20.35(H)
Casing	PC + TPE
Weigh (g)(including cable)	91
Waterproof Resistant	IP67 / IP69K
Maximum Assembly Torque	40 N-m
Environmental Conditions	
Operation Temperature (°C)	-40 ~ +85
Storage Temperature (°C)	-40 ~ +85
Humidity	95% non-condensing

© Unictron Technologies Corp.
All specifications subject to change without notice.


II. Antenna Technical Parameters:

Free Space


S11 (dB) - WiFi M & WiFi A & BT

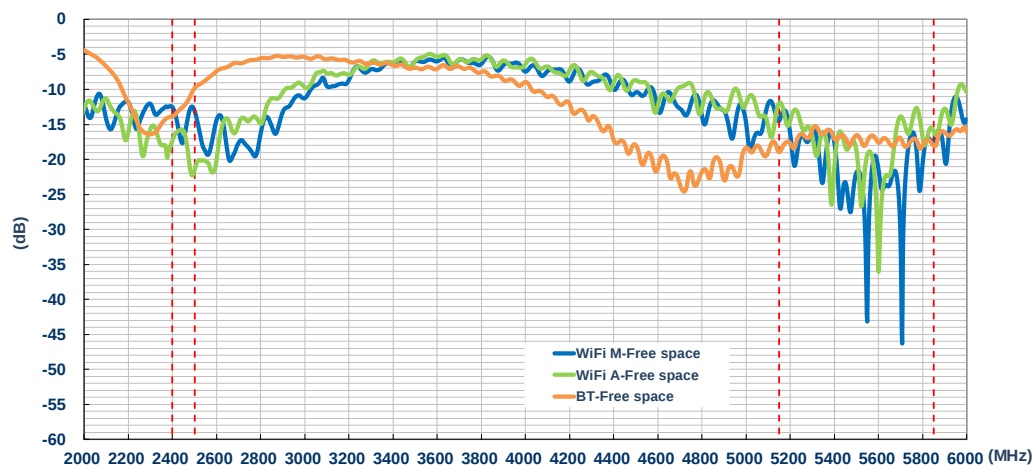

Efficiency (%) - WiFi M

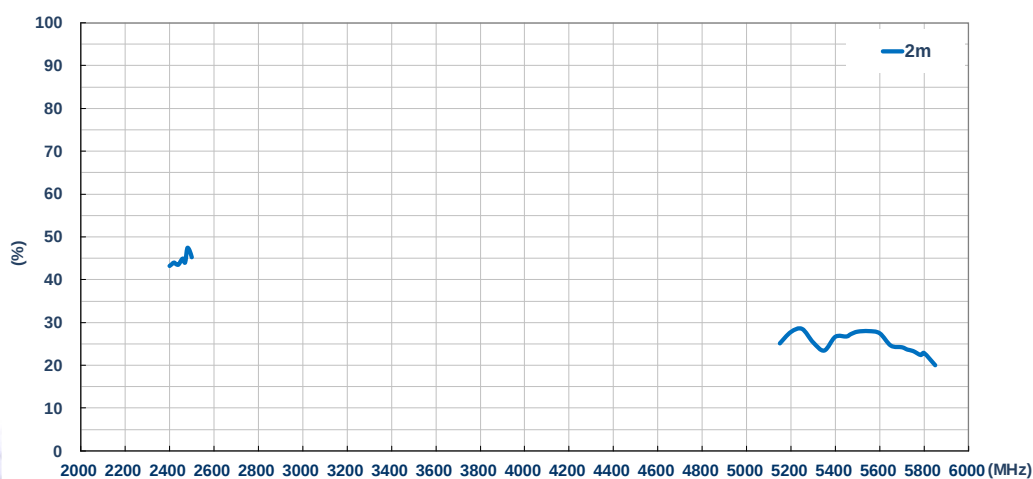


Average Gain (dBi) - WiFi M

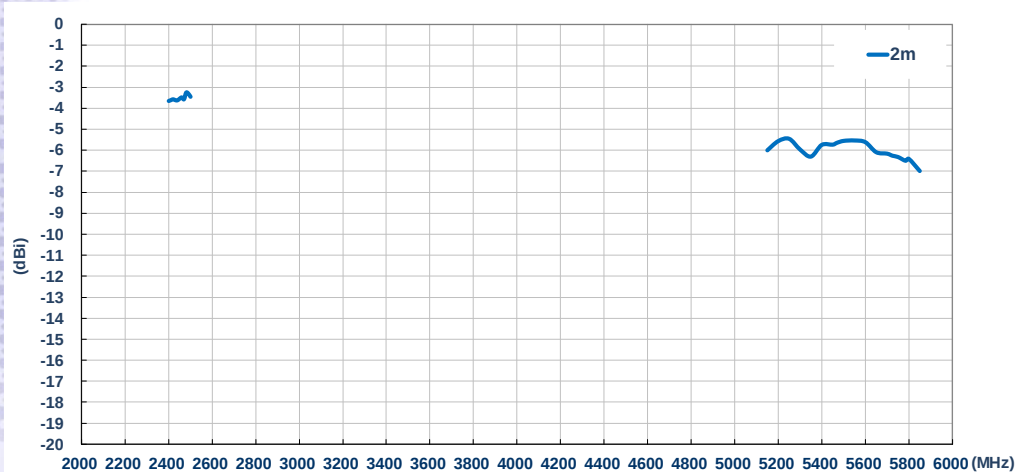


© Unictron Technologies Corp.
All specifications subject to change without notice.


Peak Gain (dBi) – WiFi M

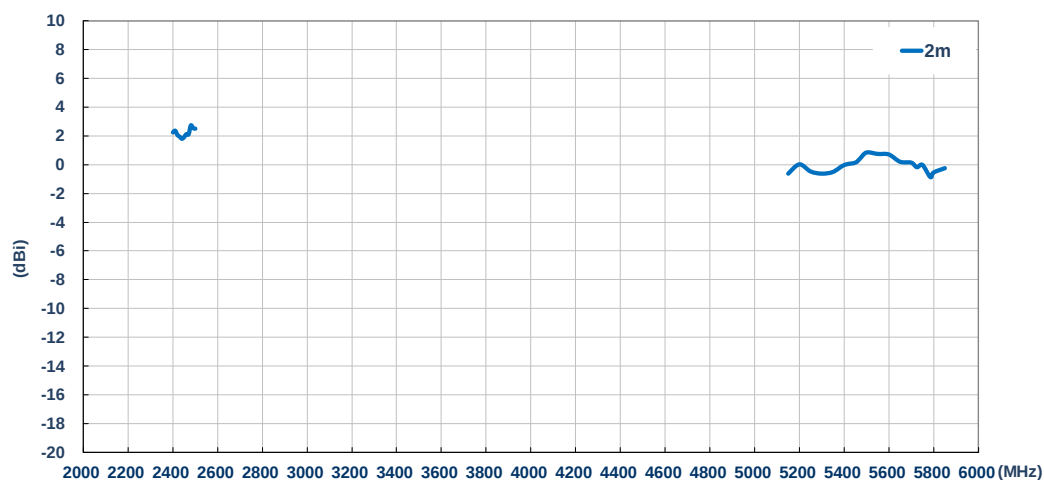

Efficiency (%) – WiFi A

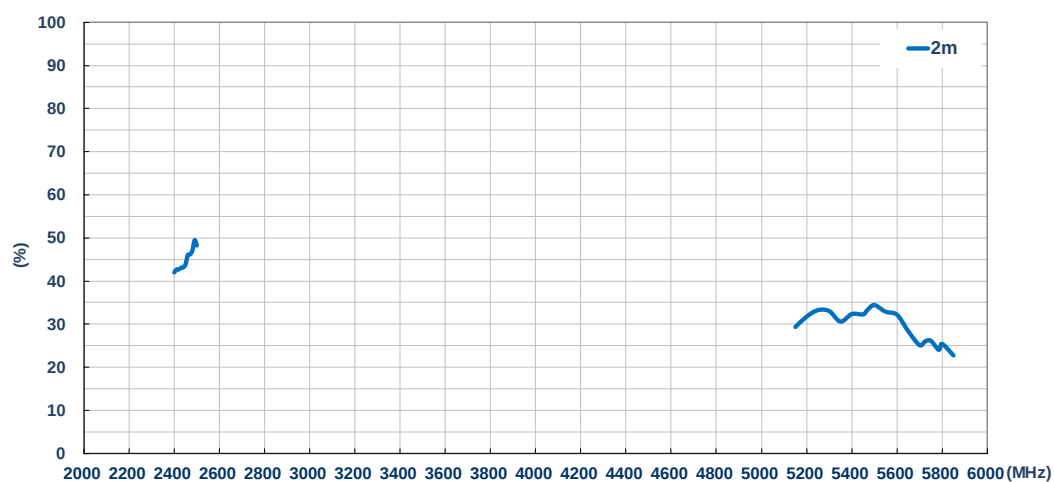


Average Gain (dBi) – WiFi A

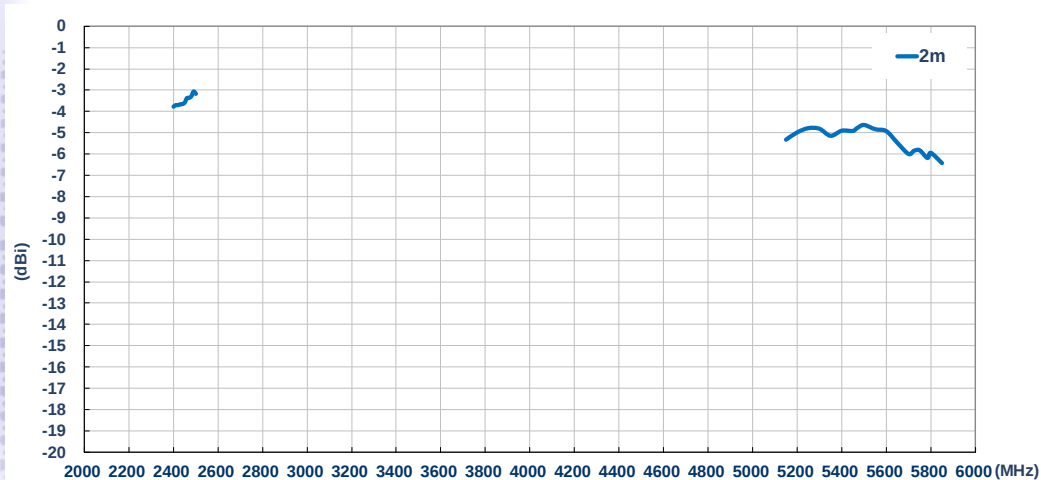


© Unictron Technologies Corp.
All specifications subject to change without notice.


Peak Gain (dBi) – WiFi A

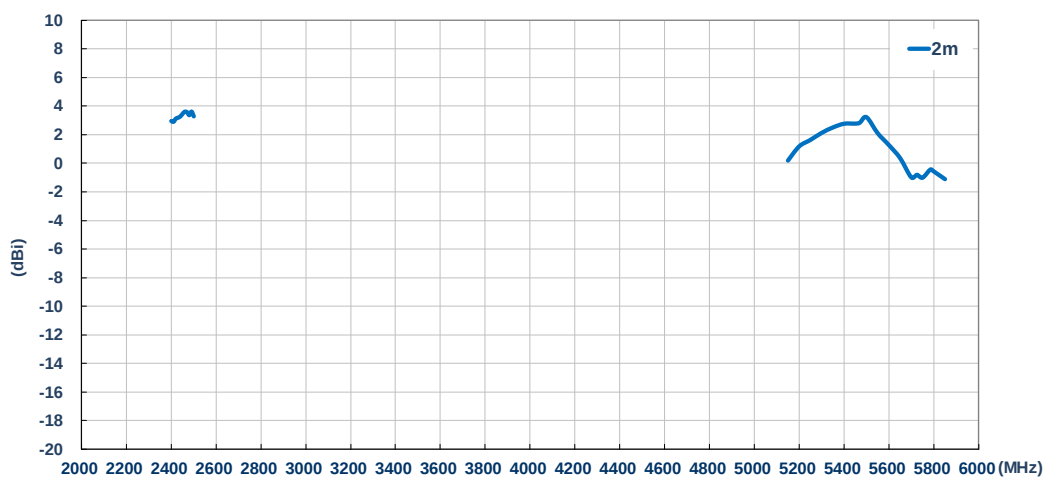

Efficiency (%) – BT

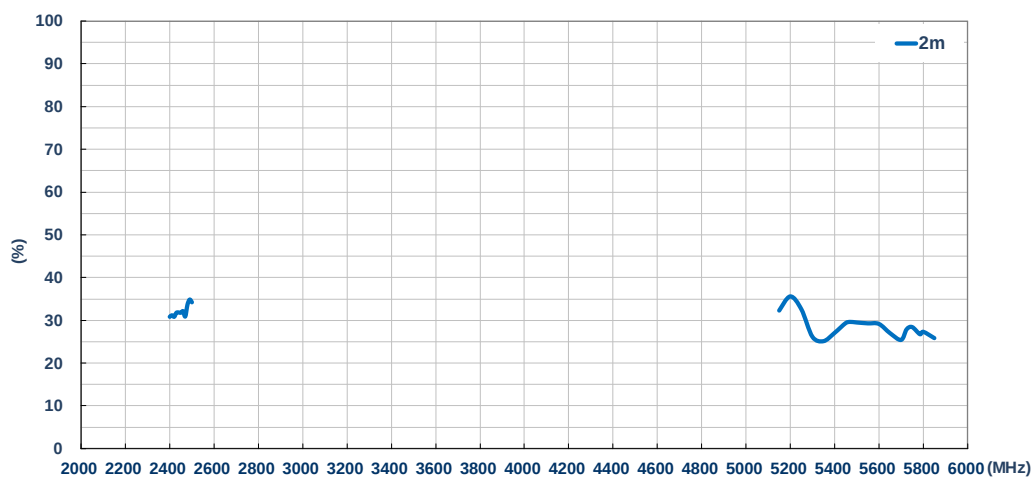


Average Gain (dBi) – BT

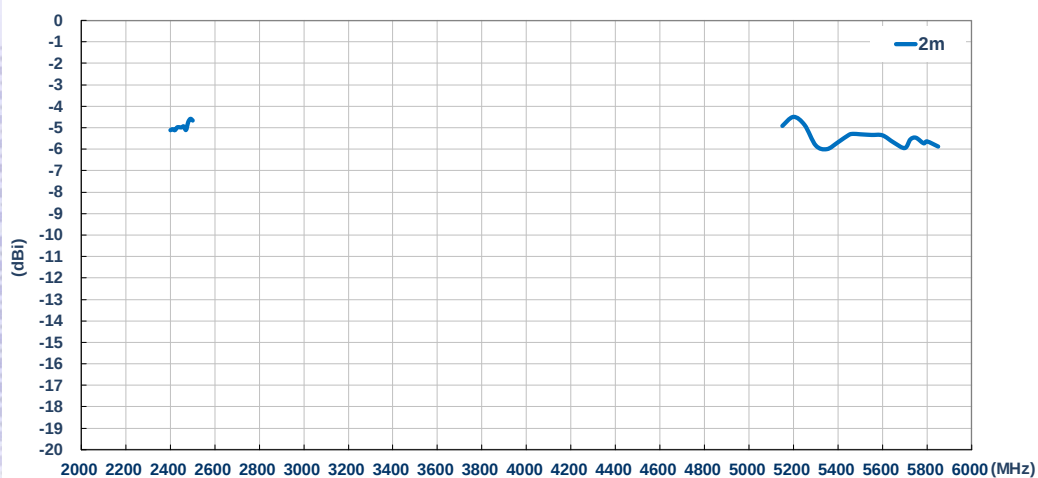

© Unictron Technologies Corp.
All specifications subject to change without notice.


Peak Gain (dBi) – BT

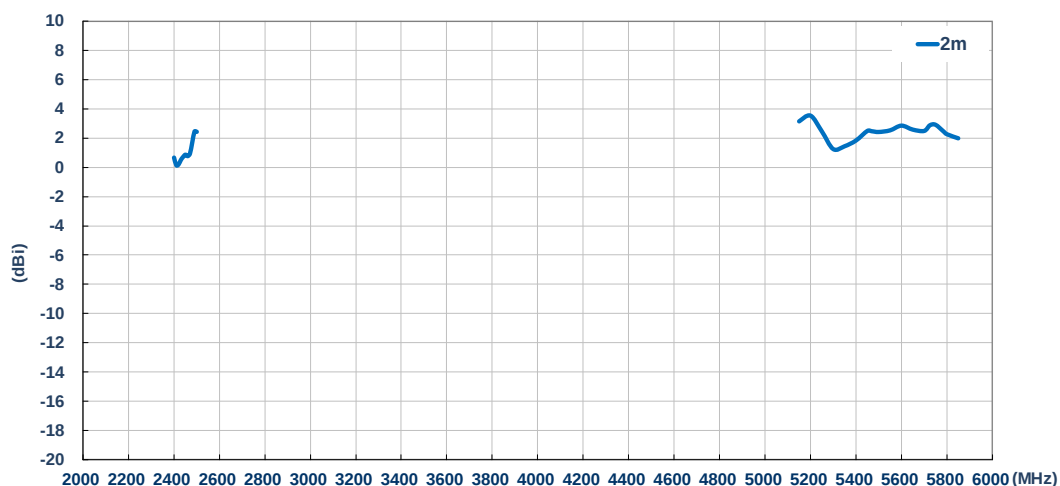


© Unictron Technologies Corp.
All specifications subject to change without notice.

With Ground Plane


S11 (dB) – WiFi M & WiFi A & BT

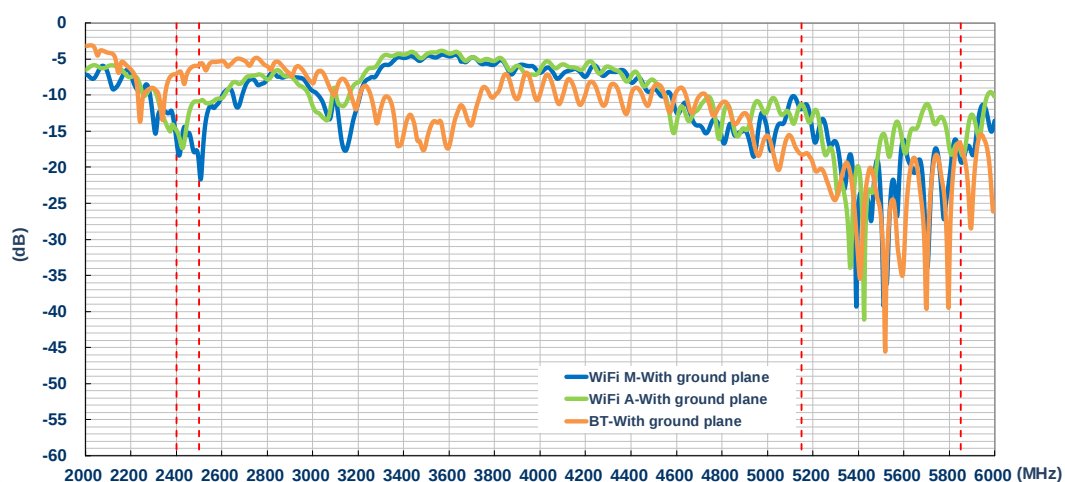

Efficiency (%) – WiFi M

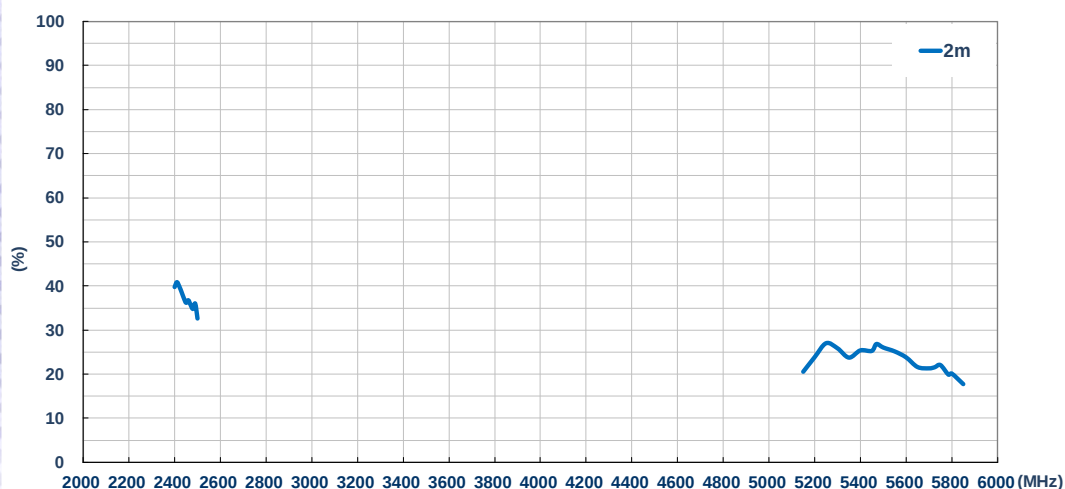


Average Gain (dBi) – WiFi M

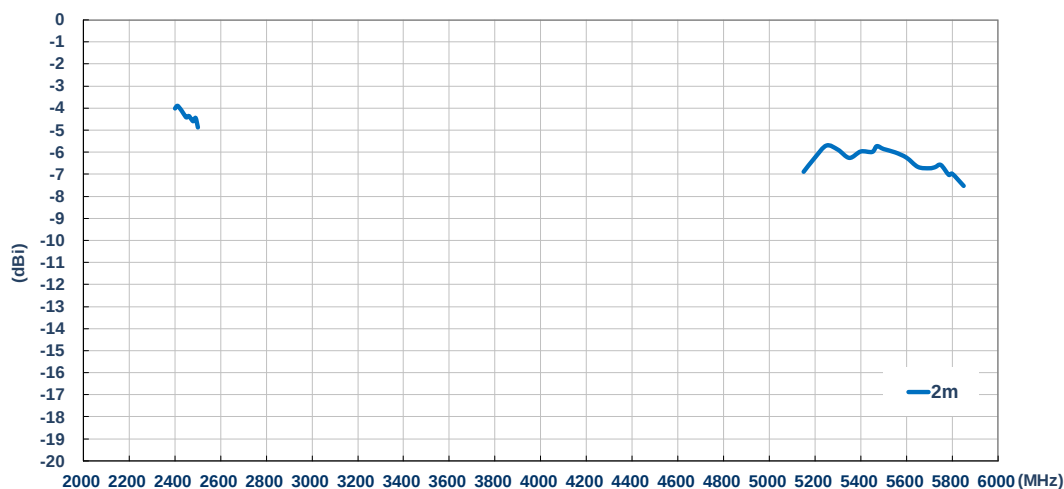


© Unictron Technologies Corp.
All specifications subject to change without notice.


Peak Gain (dBi) – WiFi M

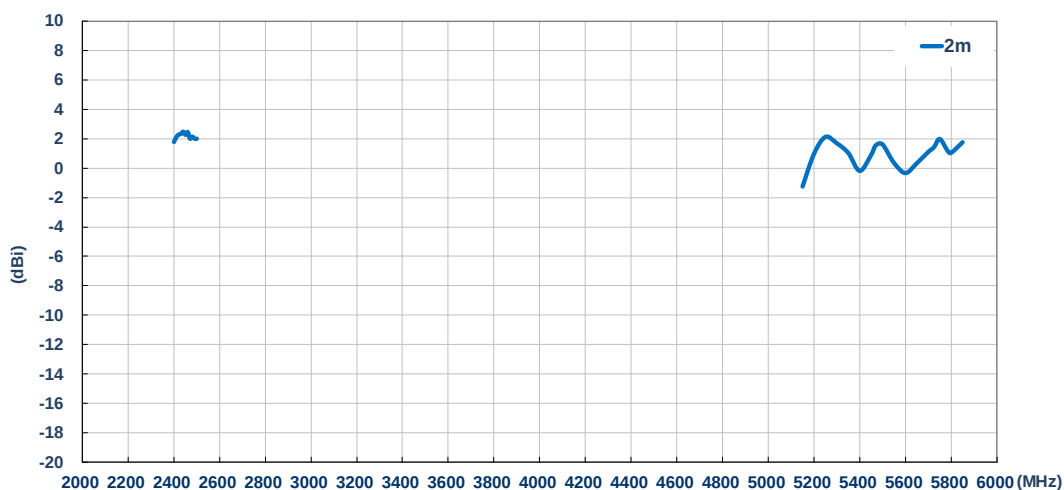


Efficiency (%) – WiFi A

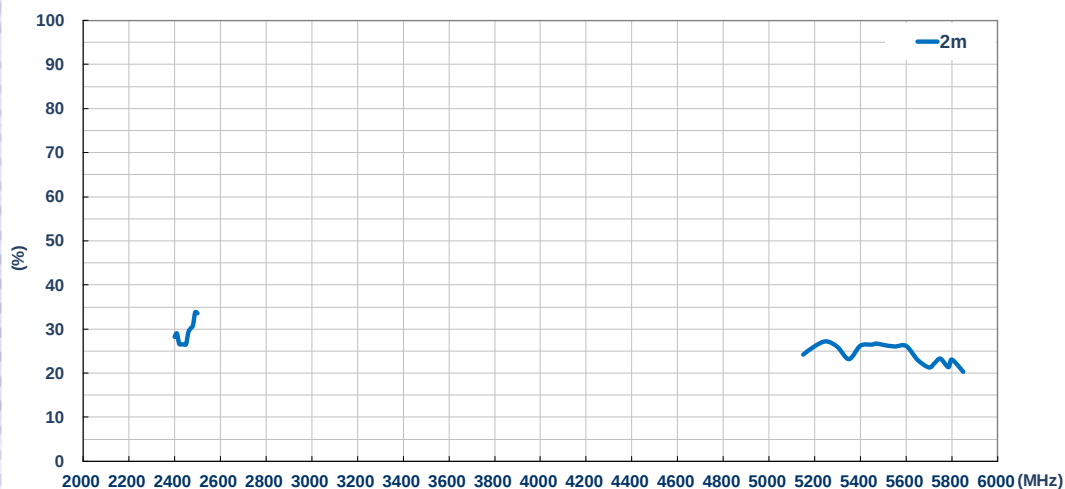


Average Gain (dBi) – WiFi A

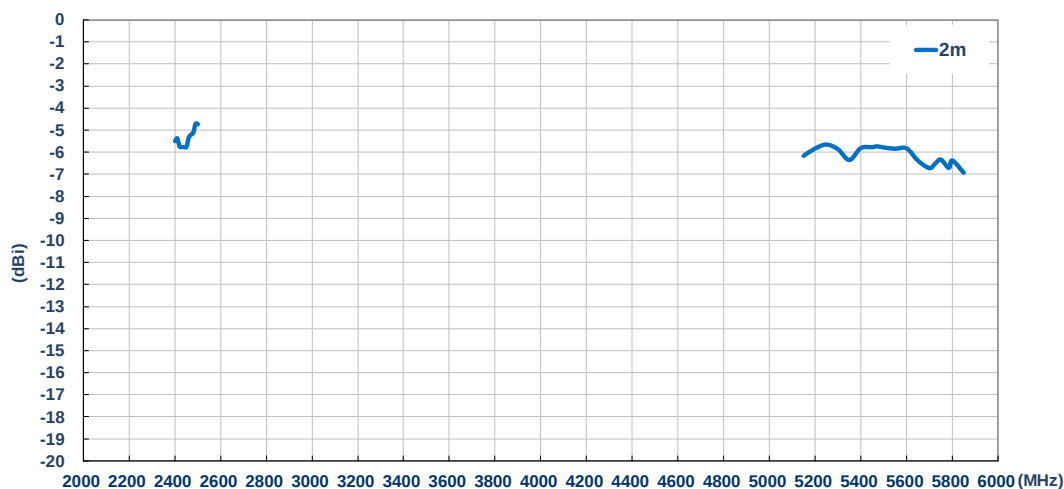

Peak Gain (dBi) – WiFi A

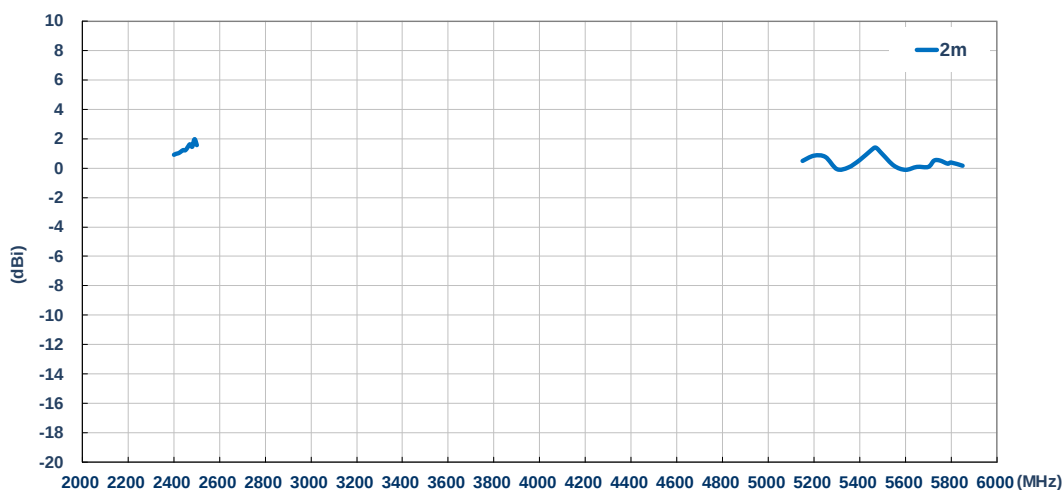


Efficiency (%) – BT

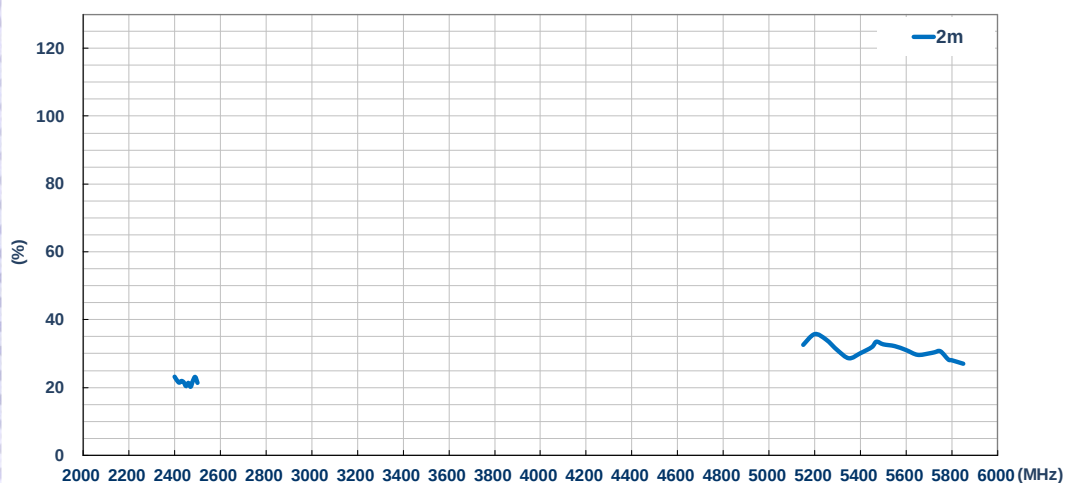


© Unictron Technologies Corp.
All specifications subject to change without notice.

Average Gain (dBi) – BT

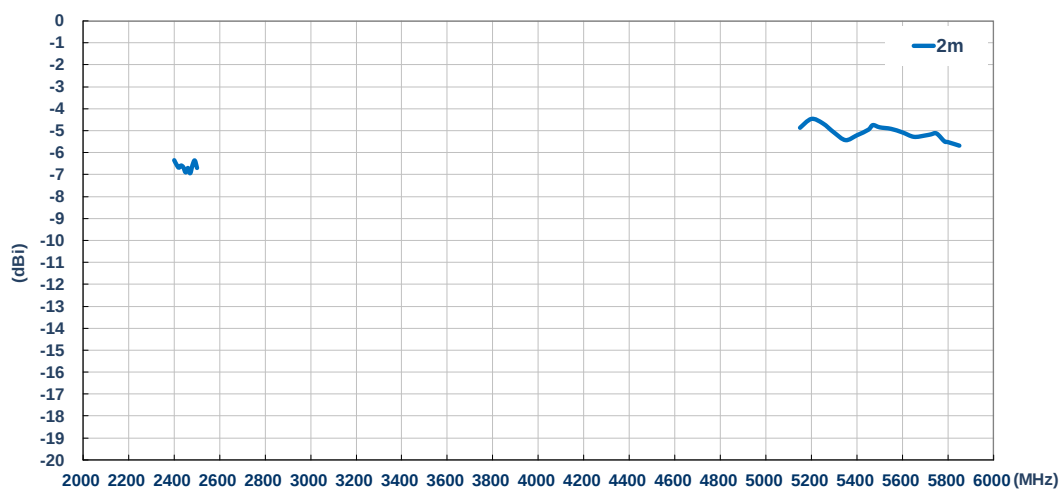

© Unictron Technologies Corp.
All specifications subject to change without notice.


Peak Gain (dBi) – BT

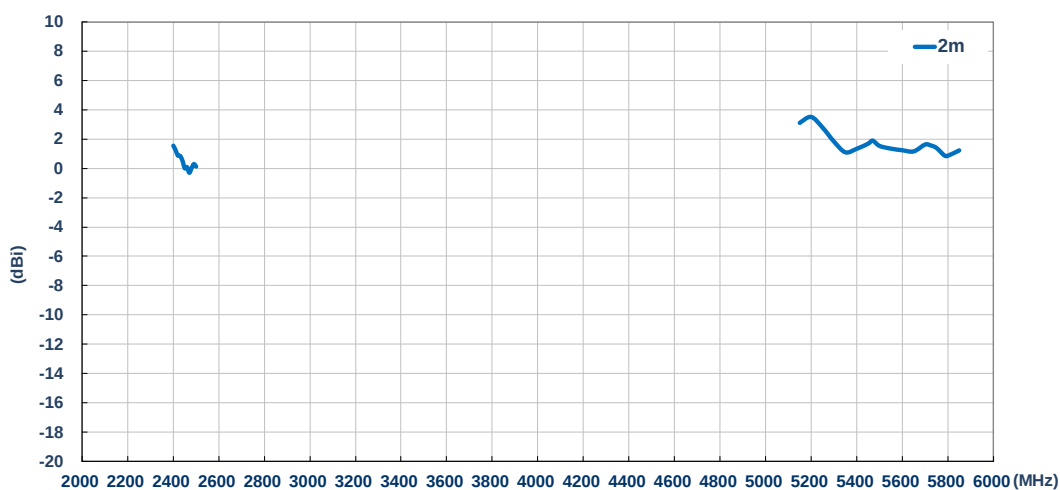


III. Antenna Radiation Pattern Measurement:

The antenna radiation patterns are measured in 3D Anechoic Chamber.
The measurement setup is as show below,

Free Space

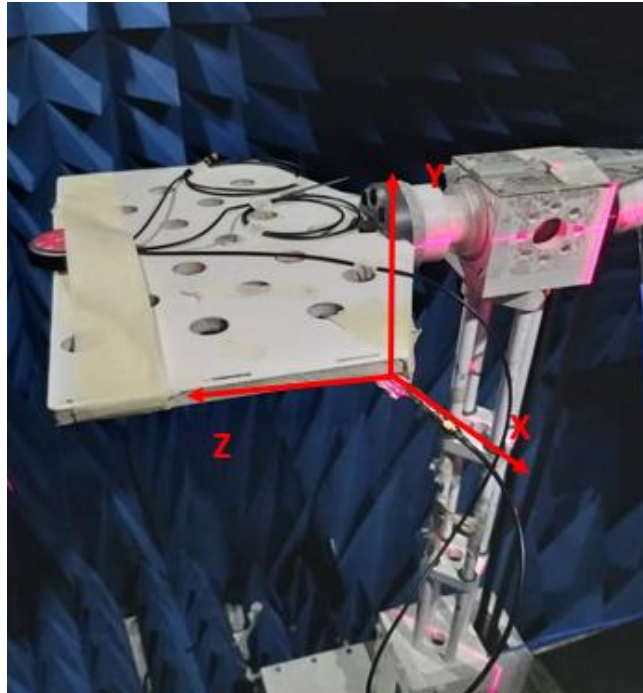



With Ground Plane

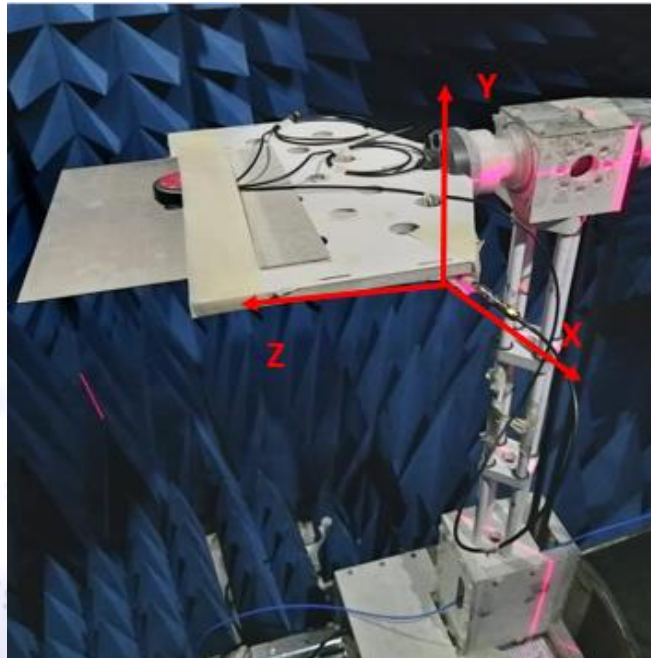



A) 2D Radiation Pattern:

Free Space – WiFi M



X-Y Plane

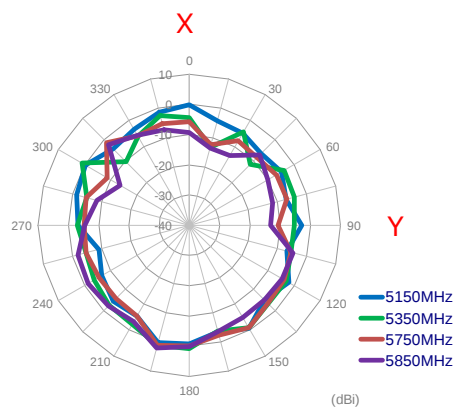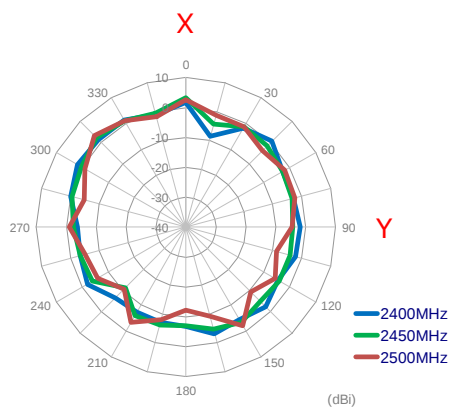

X-Z Plane

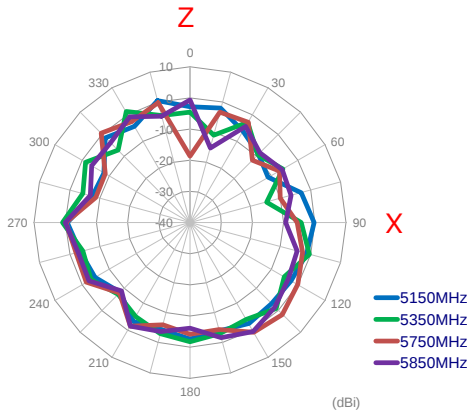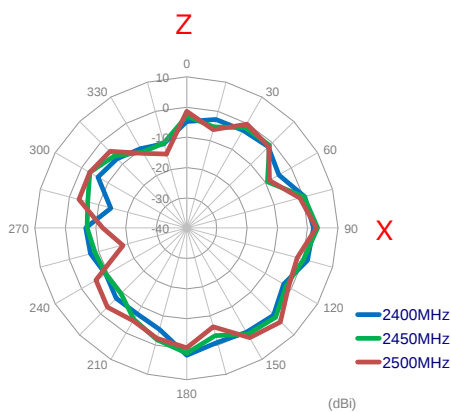



Y-Z Plane

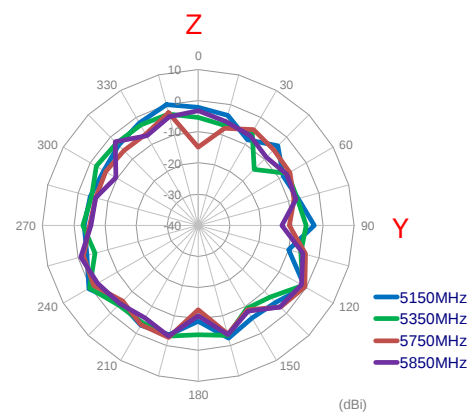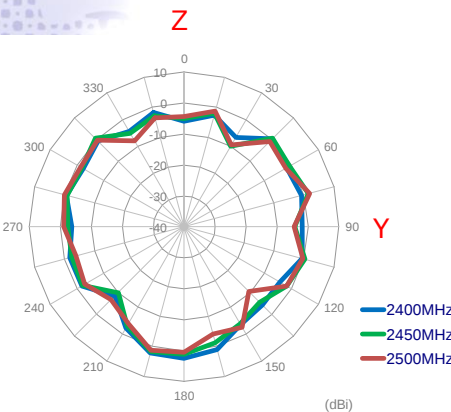



© Unictron Technologies Corp.
All specifications subject to change without notice.

With Ground Plane – WiFi M



X-Y Plane

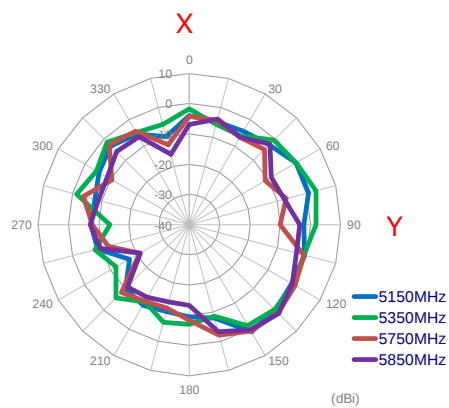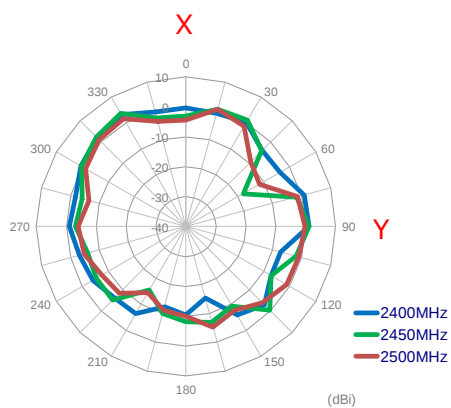

X-Z Plane

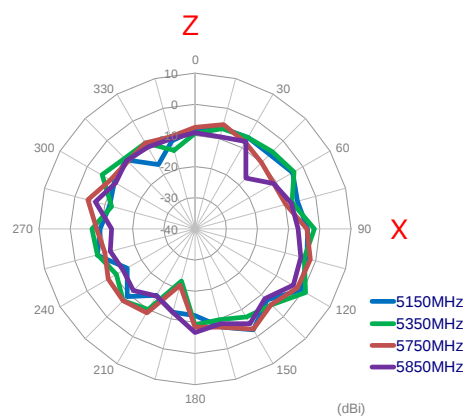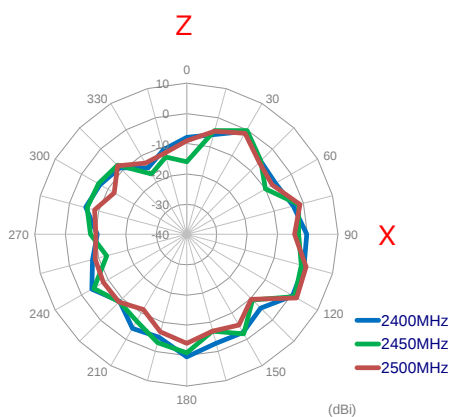



Y-Z Plane

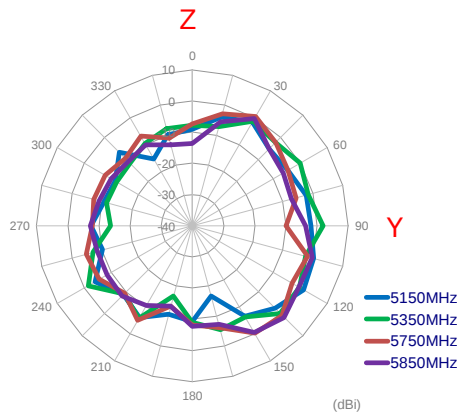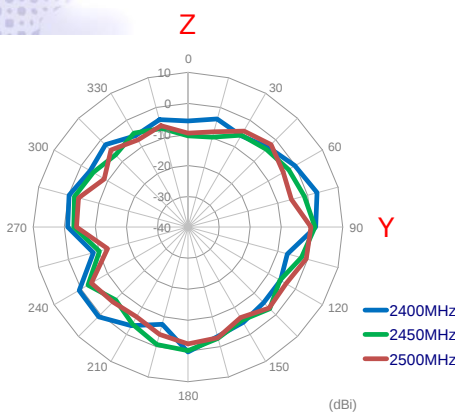



© Unictron Technologies Corp.
All specifications subject to change without notice.

Free Space – WiFi A



X-Y Plane

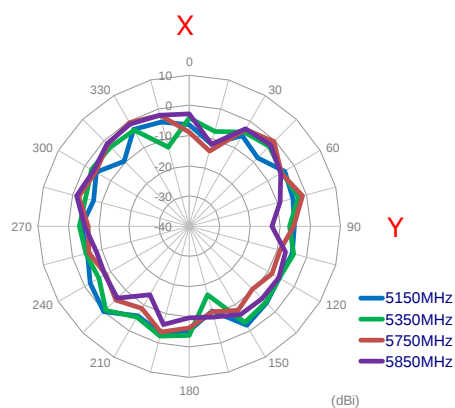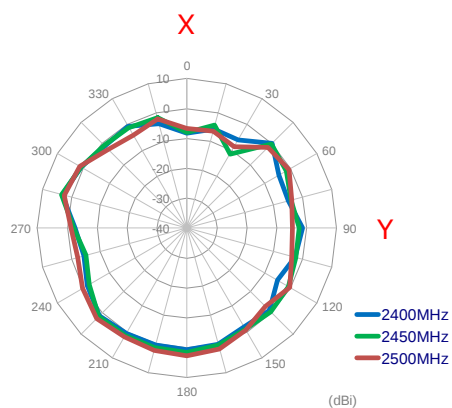

X-Z Plane

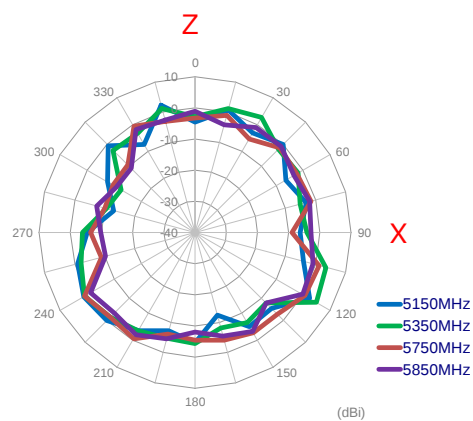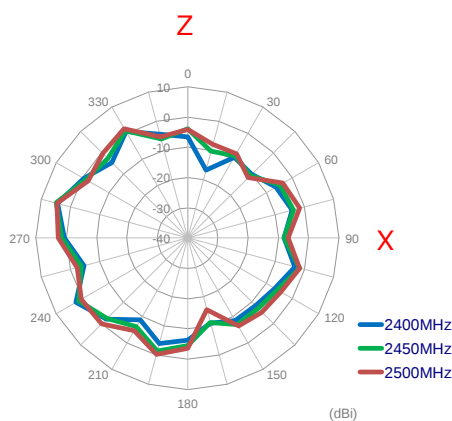



Y-Z Plane

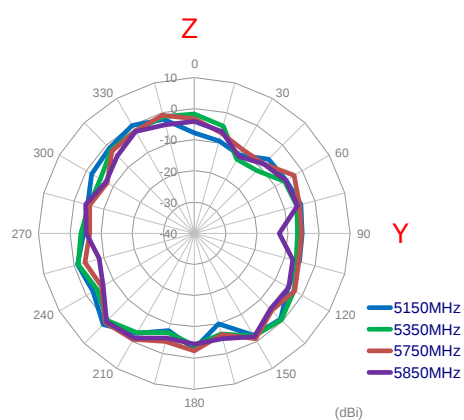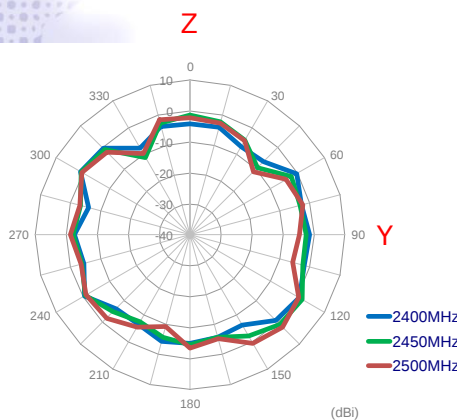



© Unictron Technologies Corp.
All specifications subject to change without notice.

With Ground Plane – WiFi A



X-Y Plane

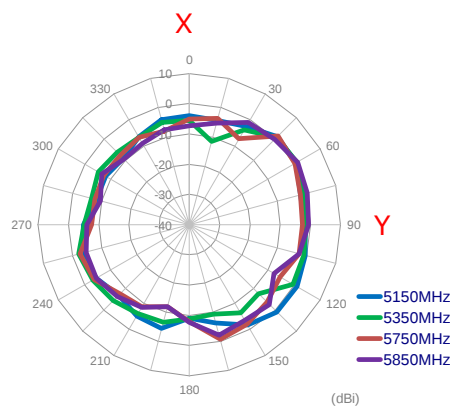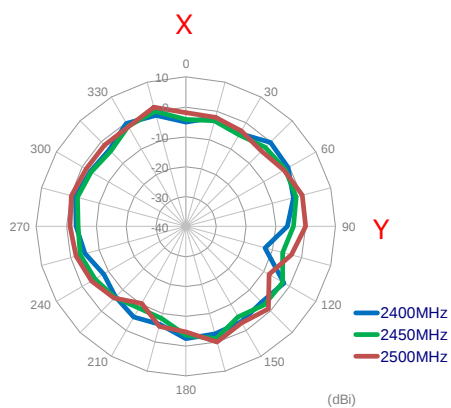

X-Z Plane

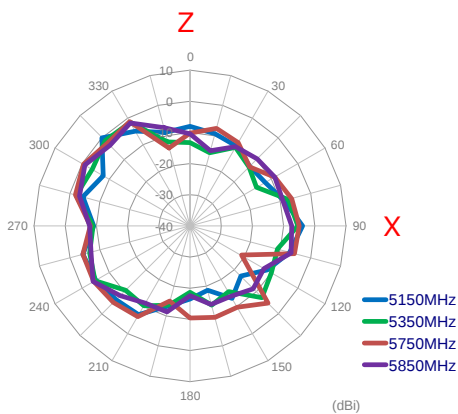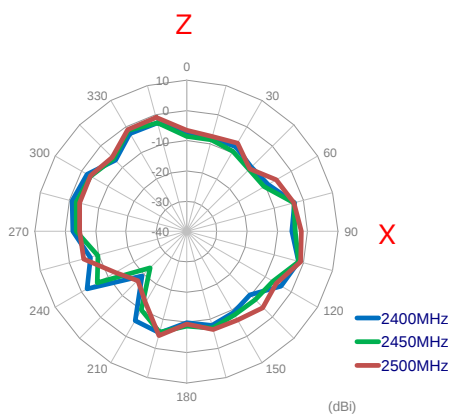



Y-Z Plane

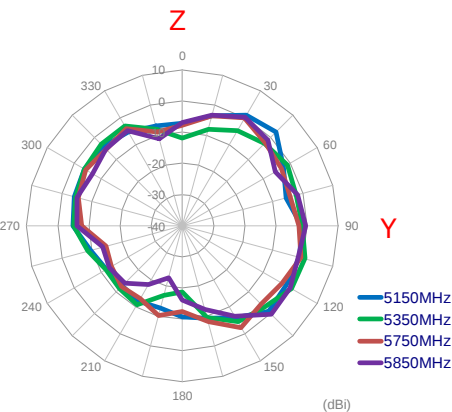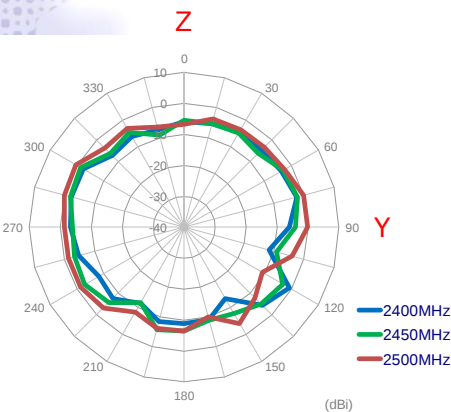



© Unictron Technologies Corp.
All specifications subject to change without notice.

Free Space - BT



X-Y Plane

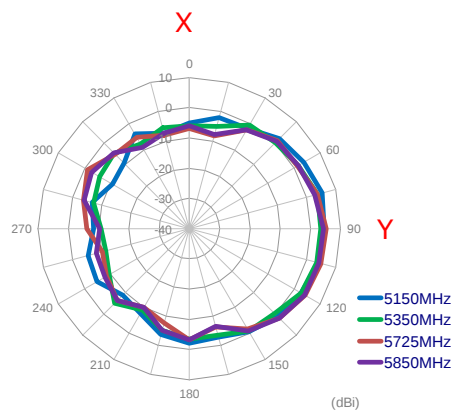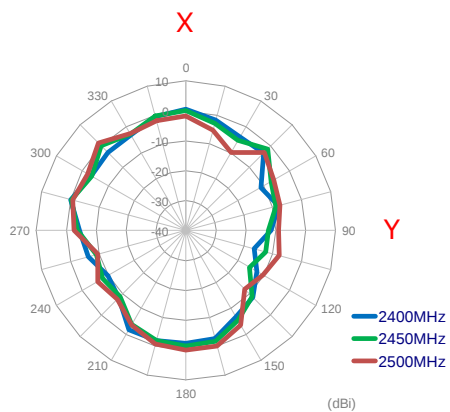

X-Z Plane

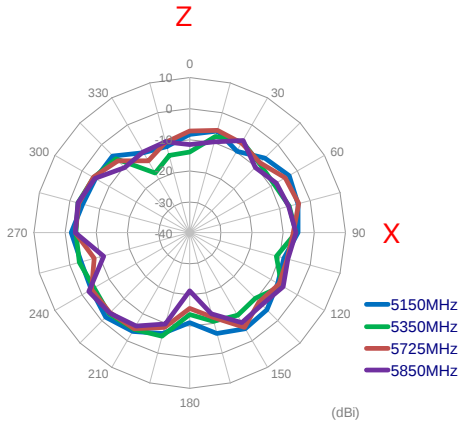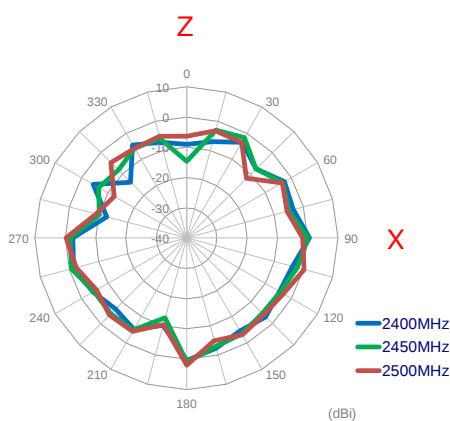



Y-Z Plane

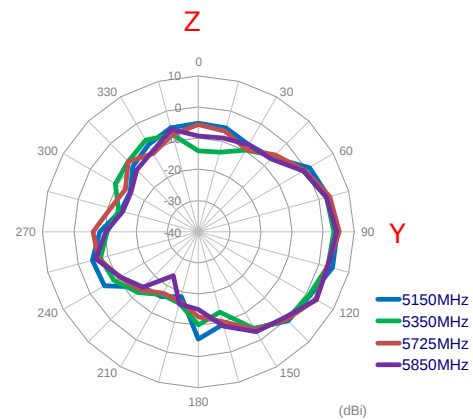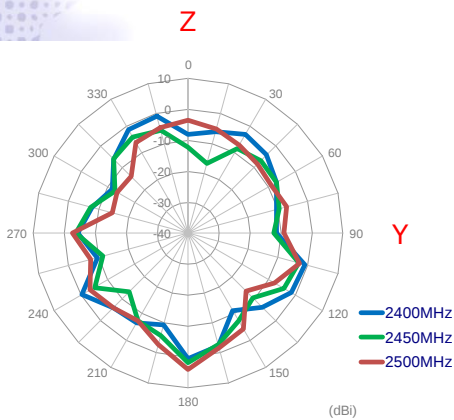



© Unictron Technologies Corp.
All specifications subject to change without notice.

With Ground Plane – BT



X-Y Plane

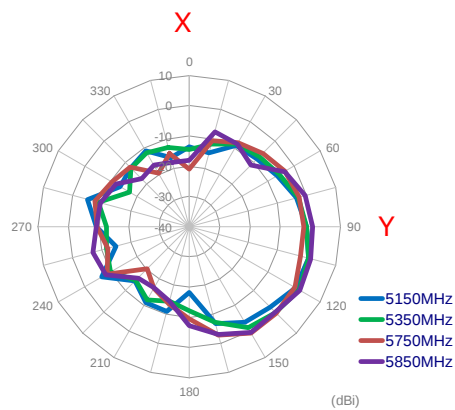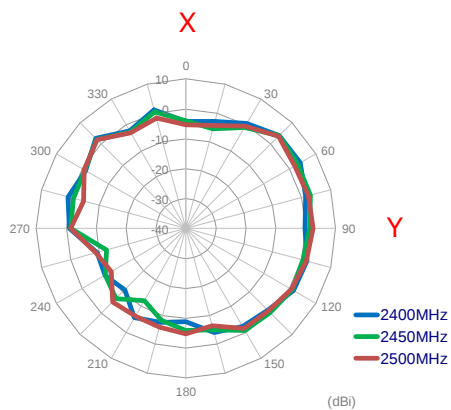

X-Z Plane

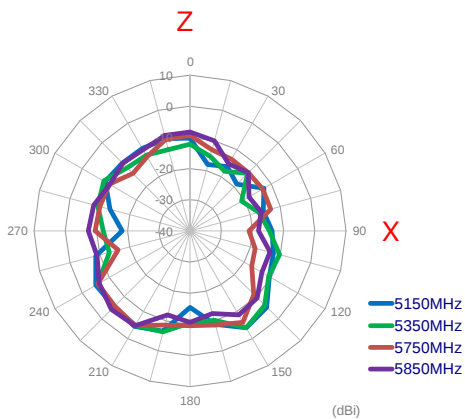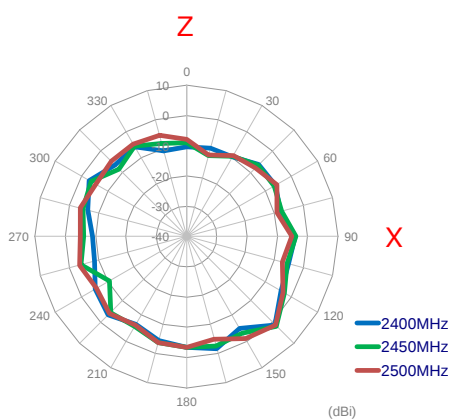

Y-Z Plane

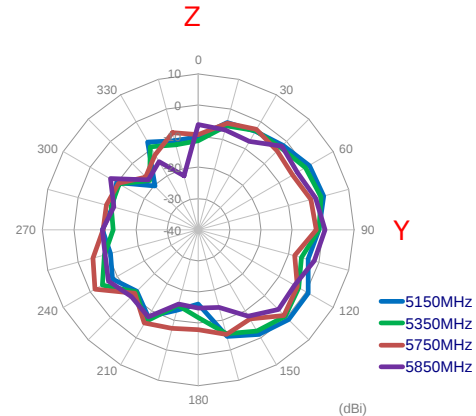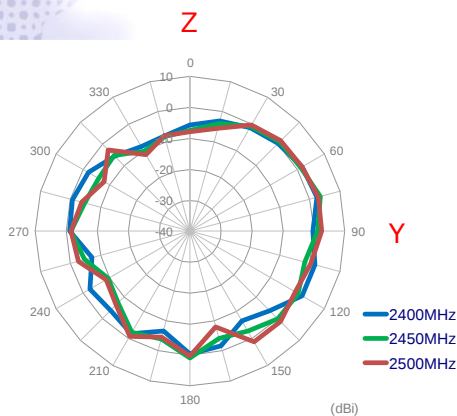


© Unictron Technologies Corp.
All specifications subject to change without notice.


IV. 3D Radiation Pattern:

Free Space - WiFi M


2400MHz

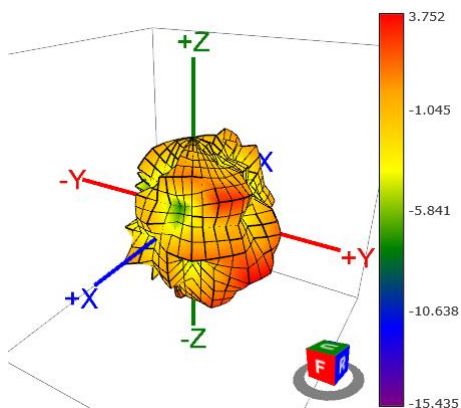


2450MHz

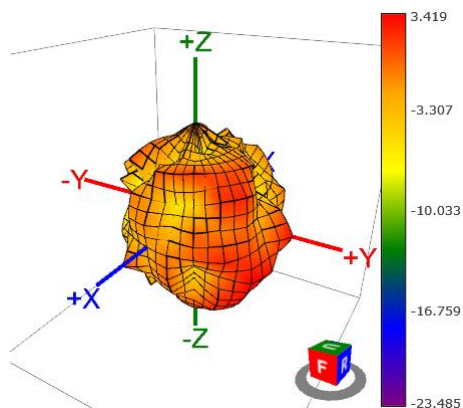


2500MHz

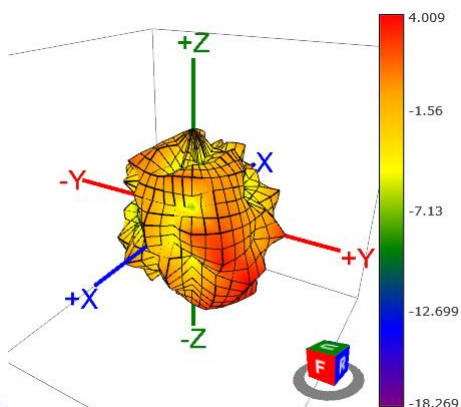


5150MHz

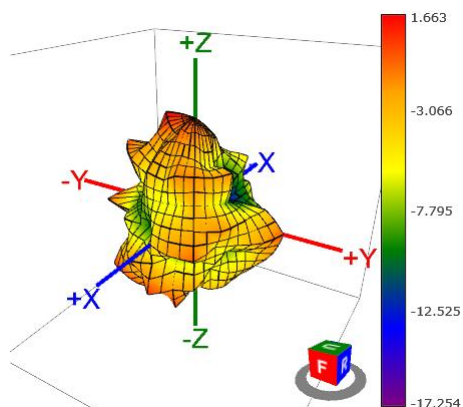

5350MHz

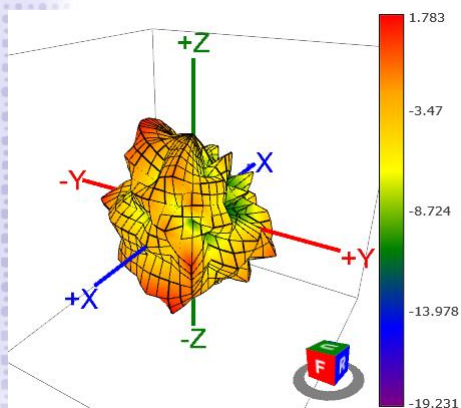


5750MHz

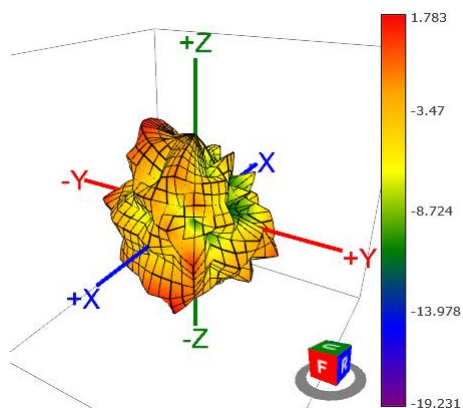


© Unictron Technologies Corp.
All specifications subject to change without notice.

5850MHz

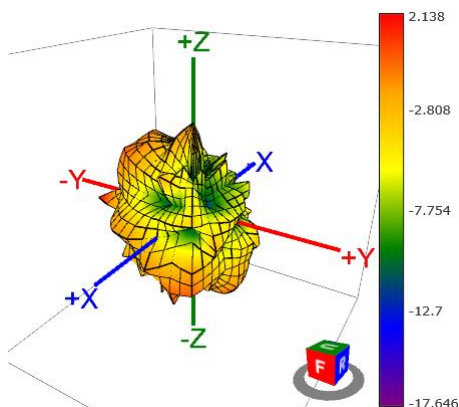


With Ground Plane –WiFi M


2400MHz

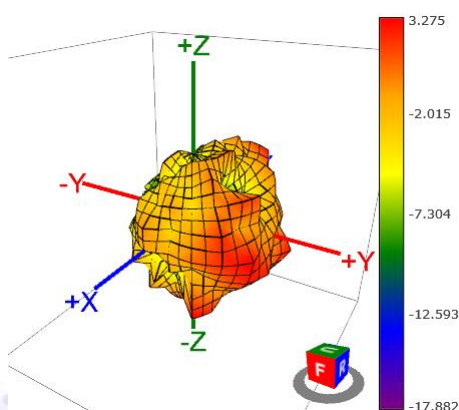


2450MHz

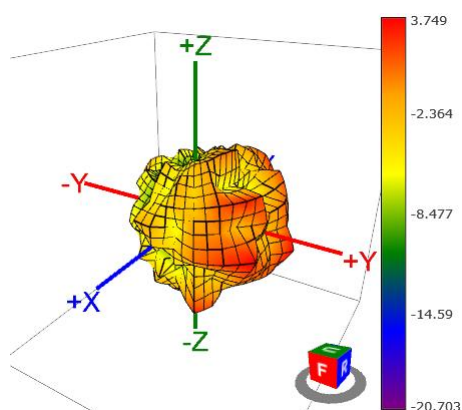


2500MHz

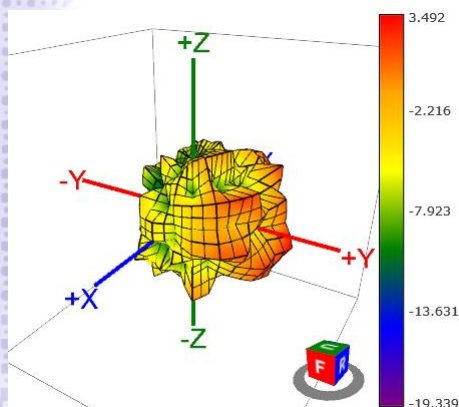


5150MHz

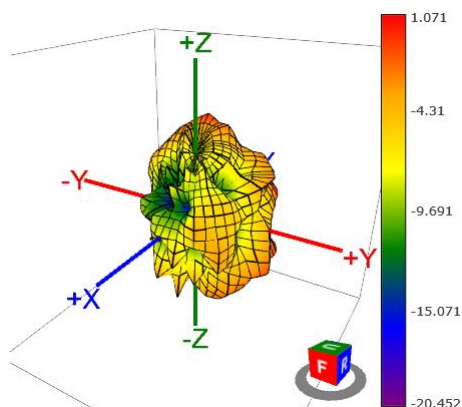


5350MHz

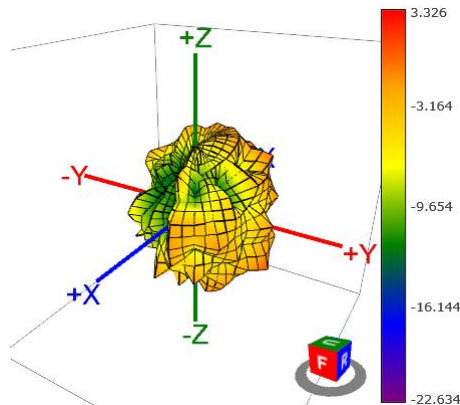

5750MHz

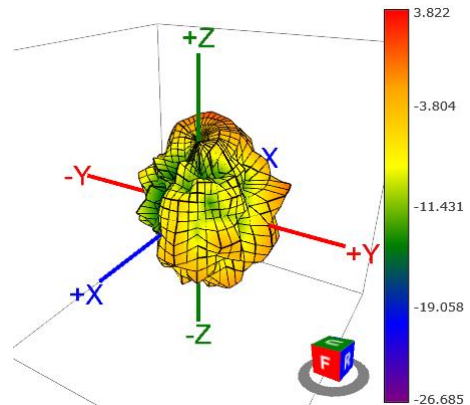


5850MHz

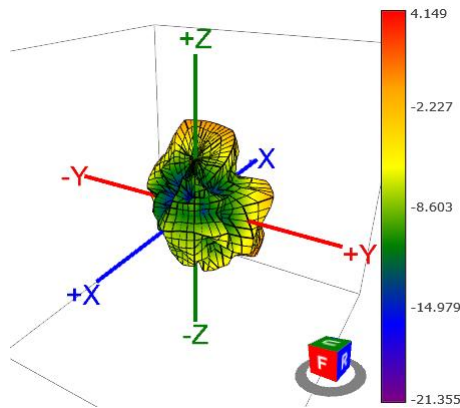


Free Space - WiFi A


2400MHz

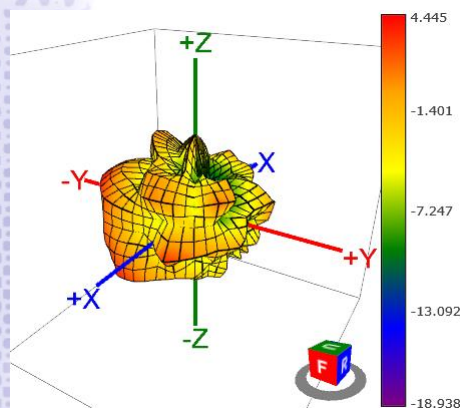


2450MHz

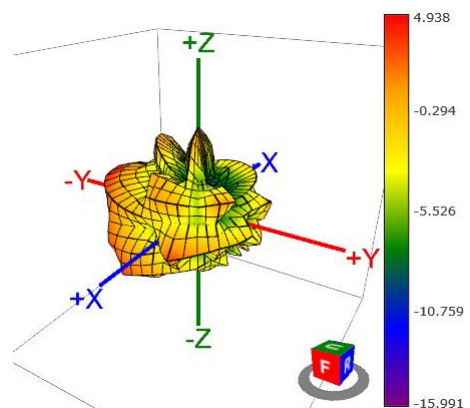


2500MHz

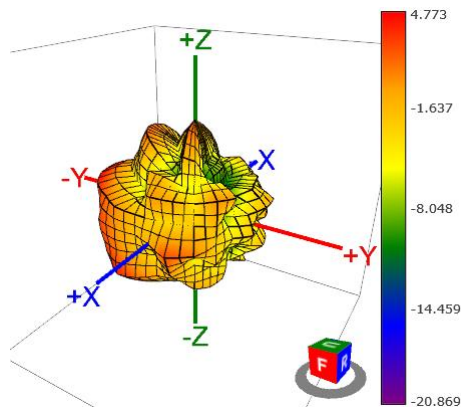


5150MHz

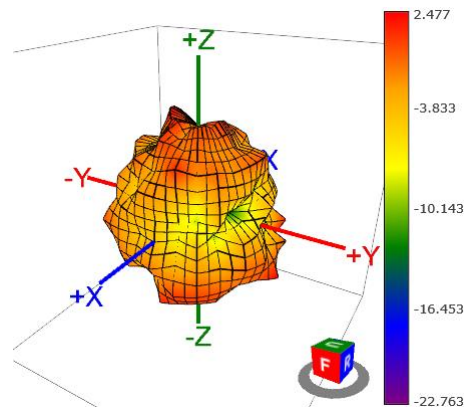


5350MHz

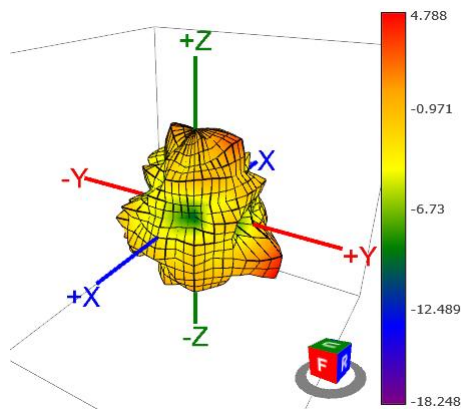

5750MHz

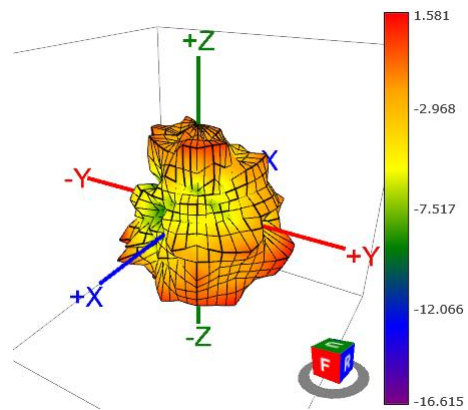


5850MHz

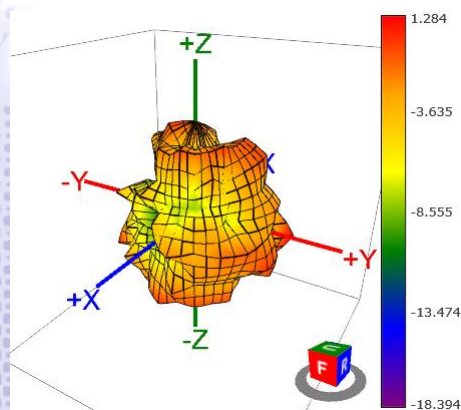


© Unictron Technologies Corp.
All specifications subject to change without notice.

With Ground Plane –WiFi A


2400MHz

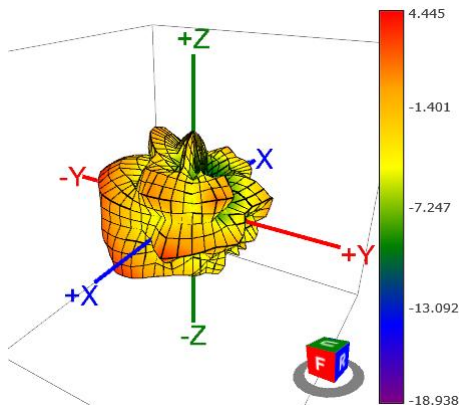


2450MHz

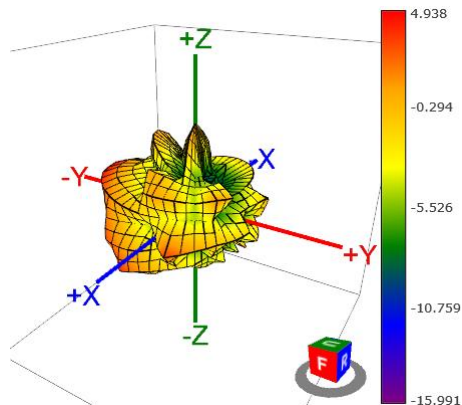


2500MHz

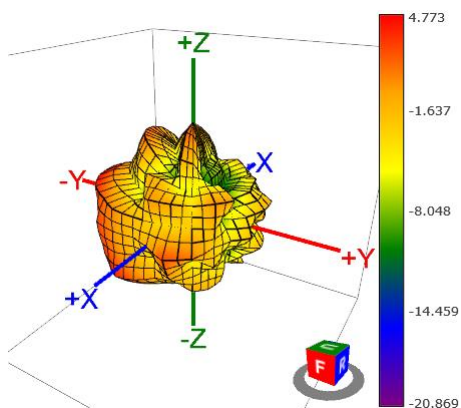


5150MHz

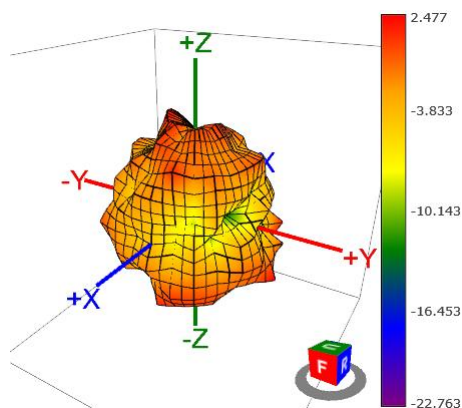

5350MHz

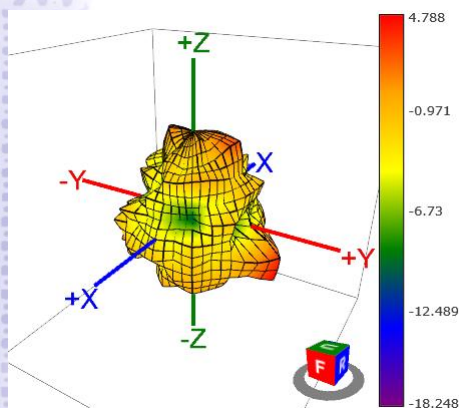


5750MHz

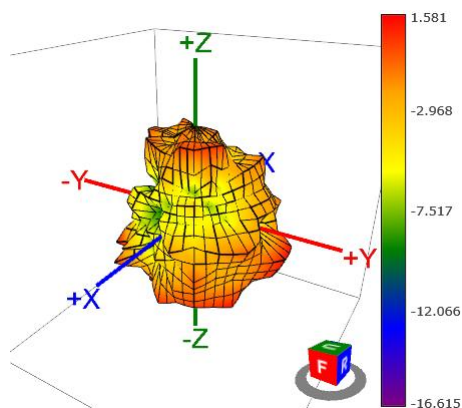


© Unictron Technologies Corp.
All specifications subject to change without notice.

5850MHz

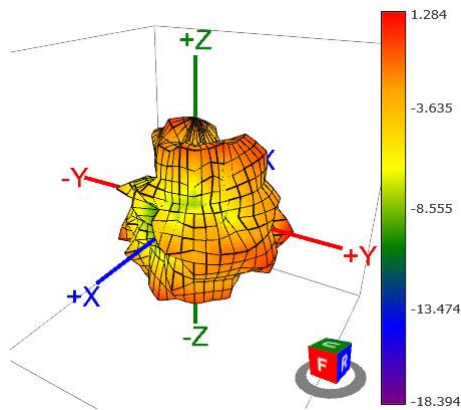


Free Space - BT


2400MHz

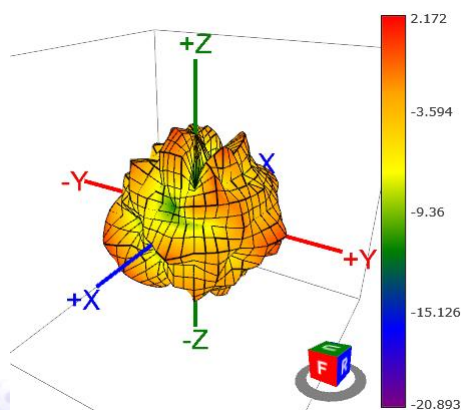


2450MHz

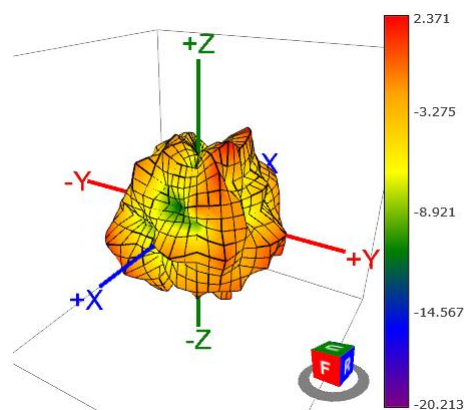


2500MHz

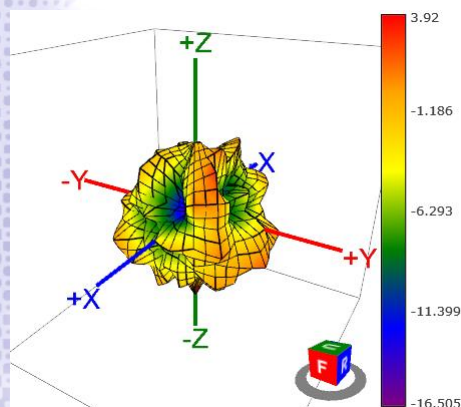


5150MHz

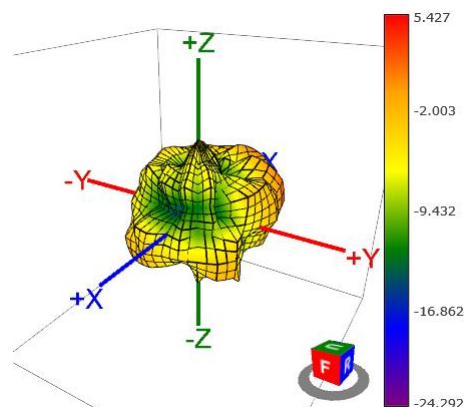


5350MHz

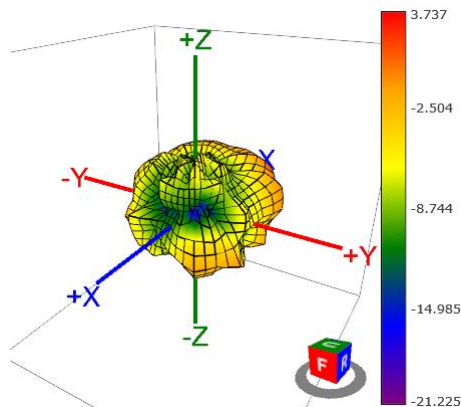

5750MHz

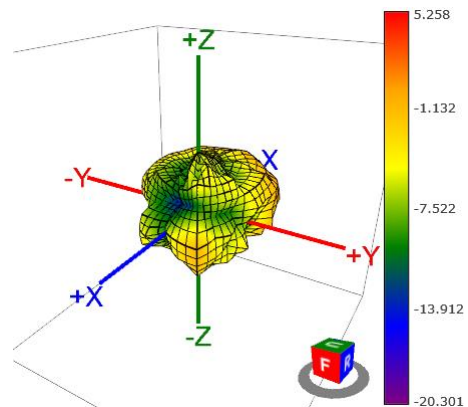


5850MHz

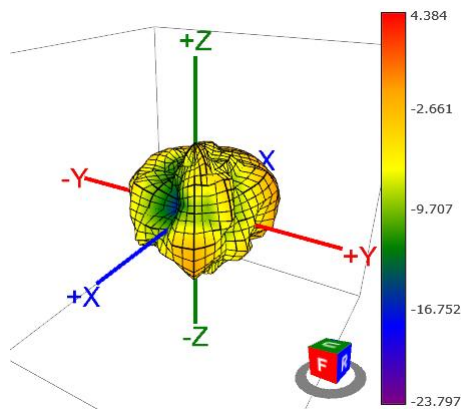


With Ground Plane – BT


2400MHz

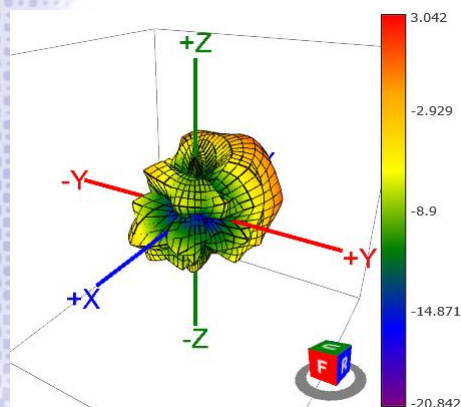


2450MHz

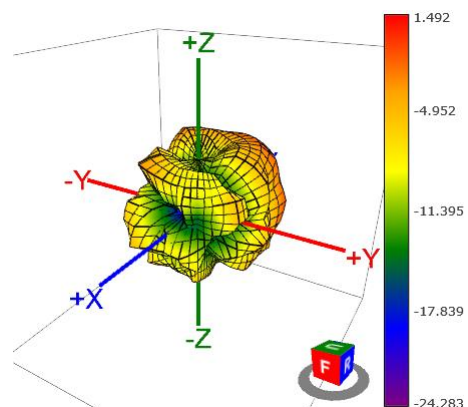


2500MHz

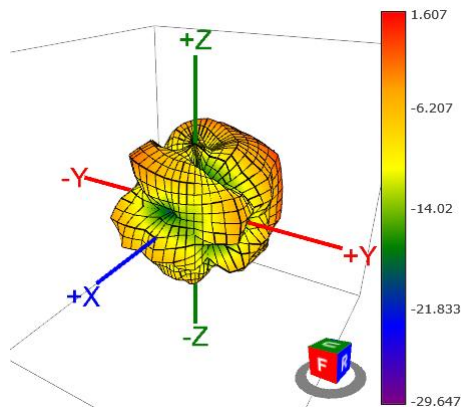


5150MHz

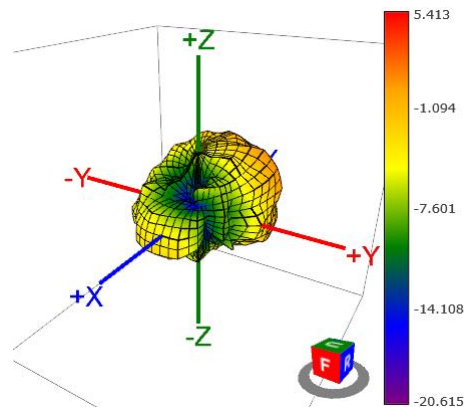


5350MHz

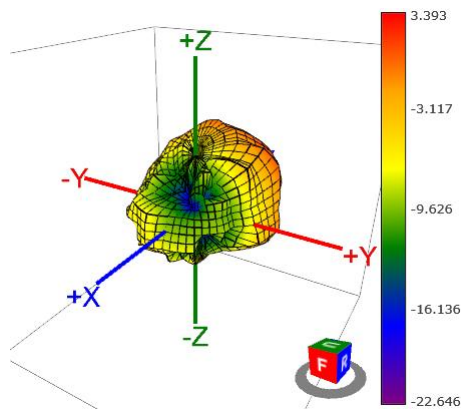

5750MHz

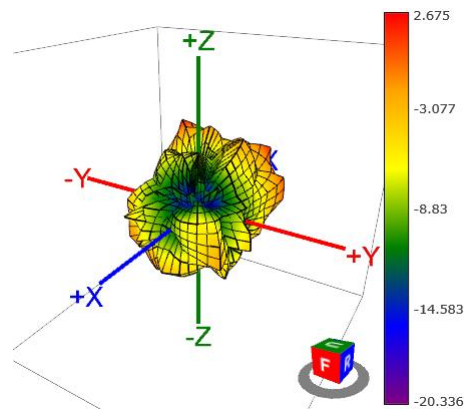


5850MHz

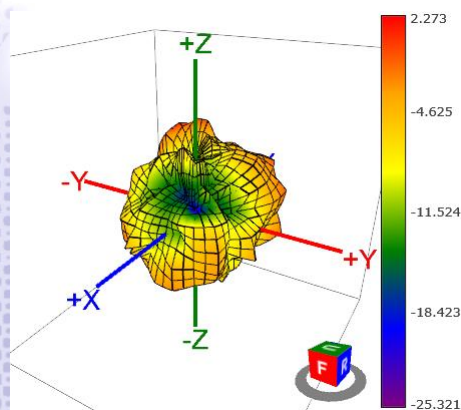

© Unictron Technologies Corp.
All specifications subject to change without notice.

V. Mechanical Drawing (Unit:mm):

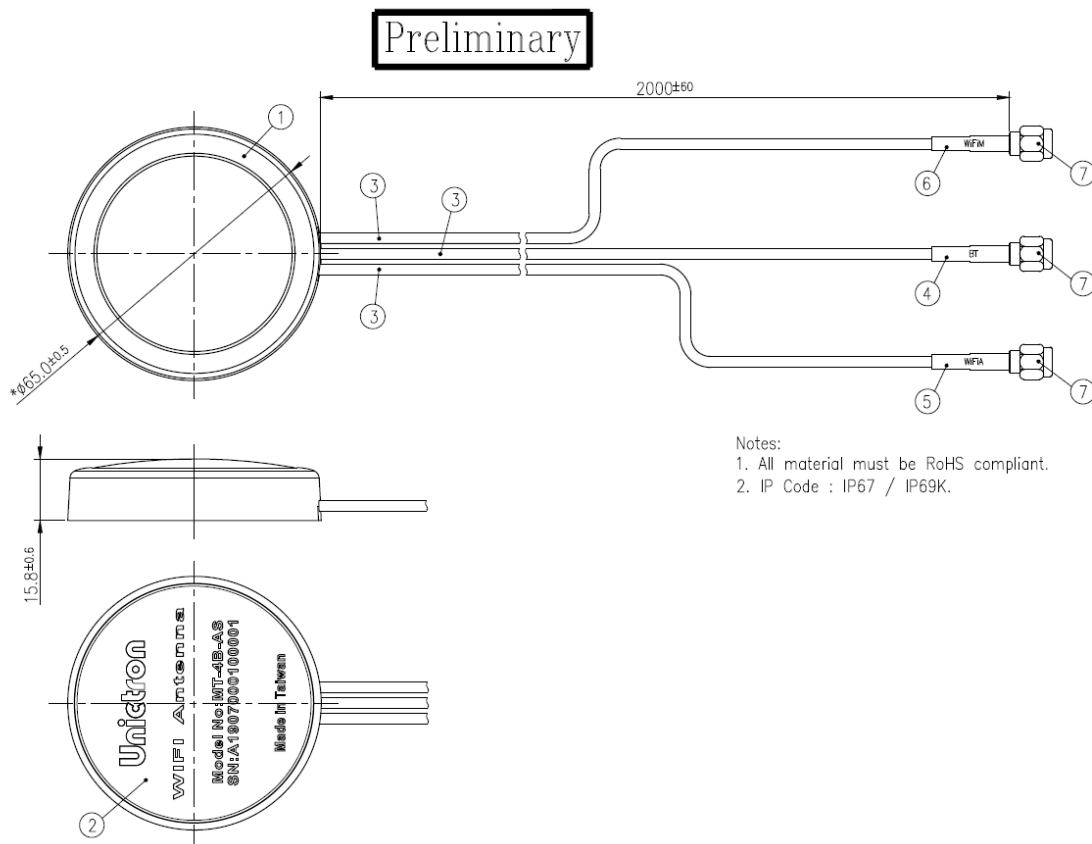

7	SMA(M) Connector	Brass	Au plating	3
6	WiFiM Heat Shrink Tube	CTMS	Yellow	1
5	WiFiA Heat Shrink Tube	CTMS	Yellow	1
4	BT Heat Shrink Tube	CTMS	Yellow	1
3	Cable H-100	PVC	Black	3
2	Label	PET	Silver	1
1	Housing	PC	Black	1
No	NAME	MATERIAL	FINISH	Q'TY


© Unictron Technologies Corp.
All specifications subject to change without notice.

VI. Applications Note:


The antenna performance with different cable lengths is shown below.

Free Space – WiFi M


Efficiency (%)

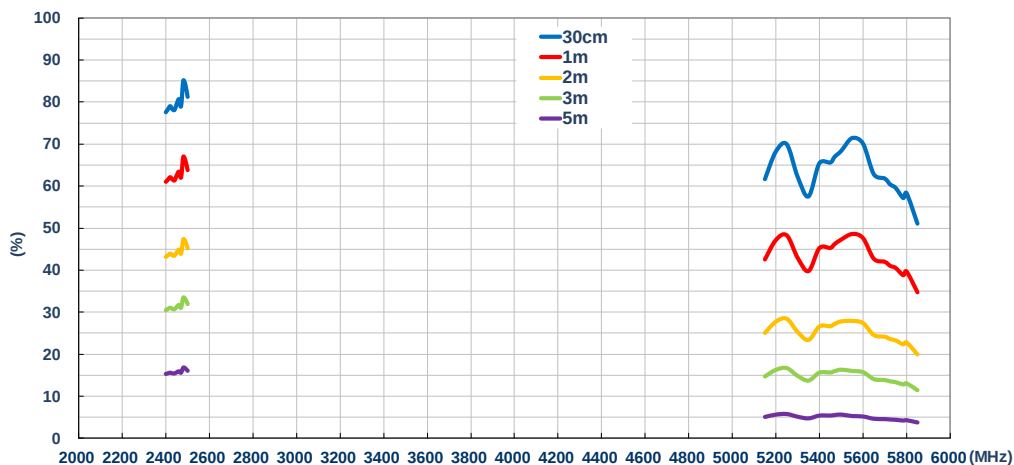

Average Gain (dBi)

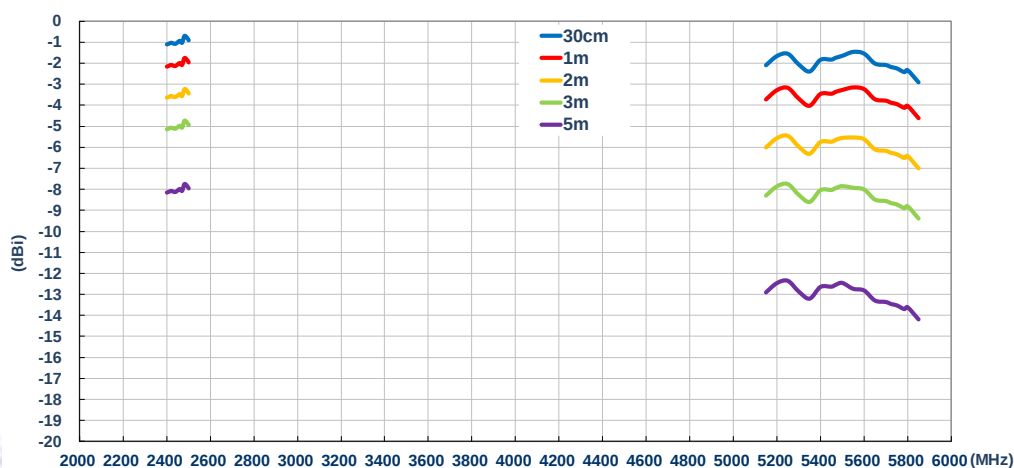


Peak Gain (dBi)

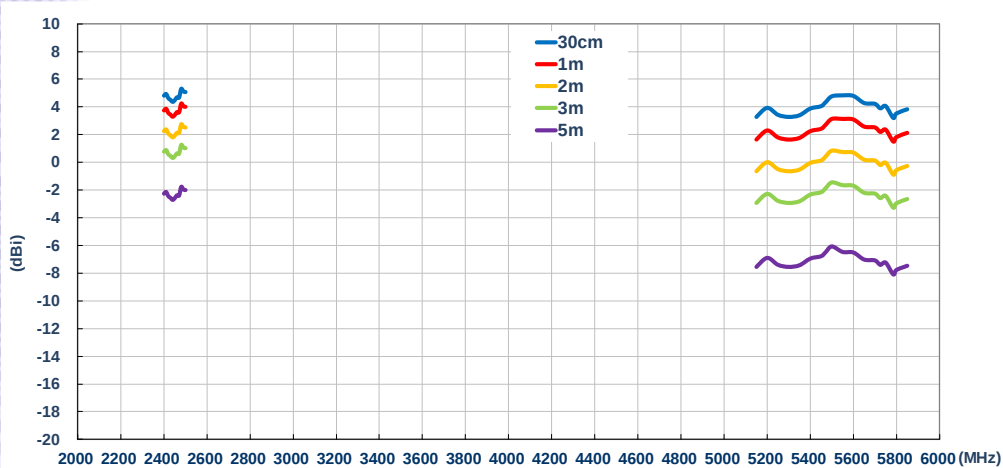


With Ground Plane – WiFi M


Efficiency (%)

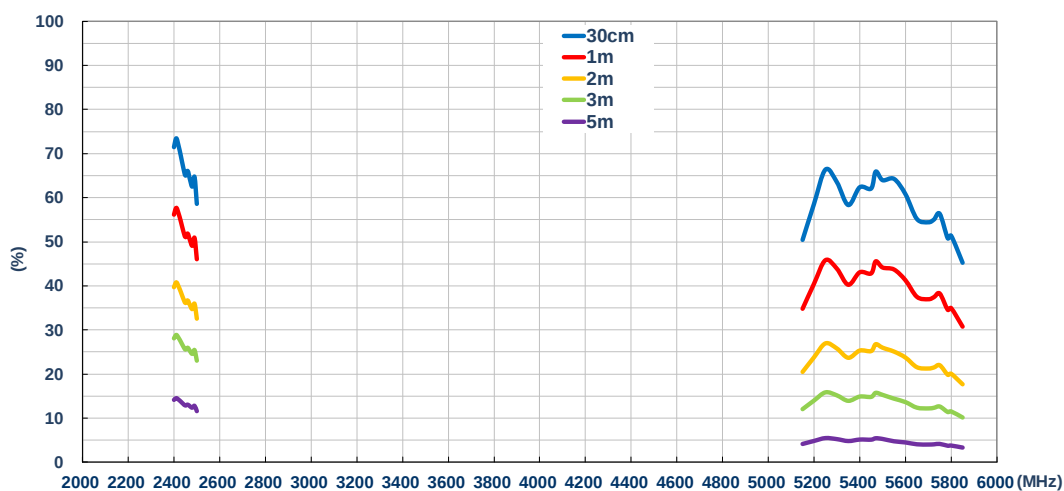

Average Gain (dBi)

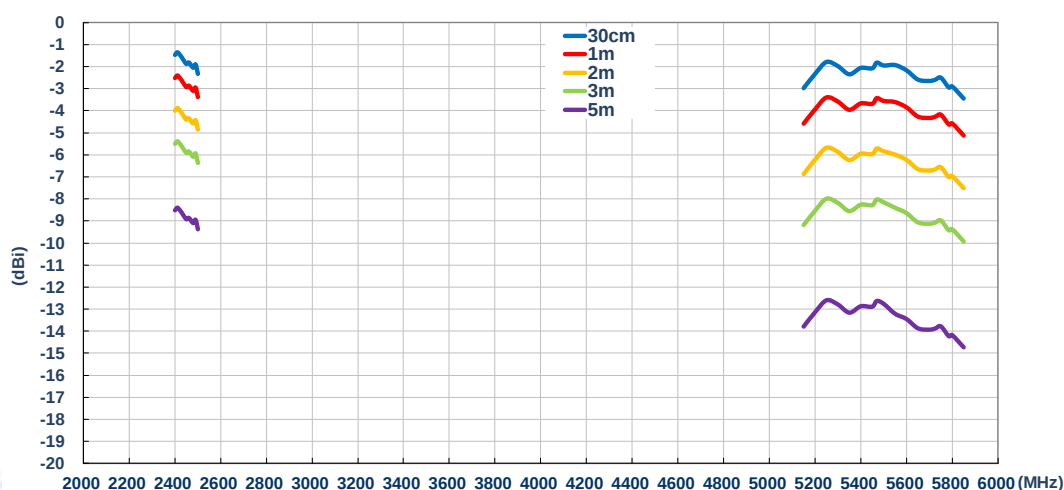


Peak Gain (dBi)

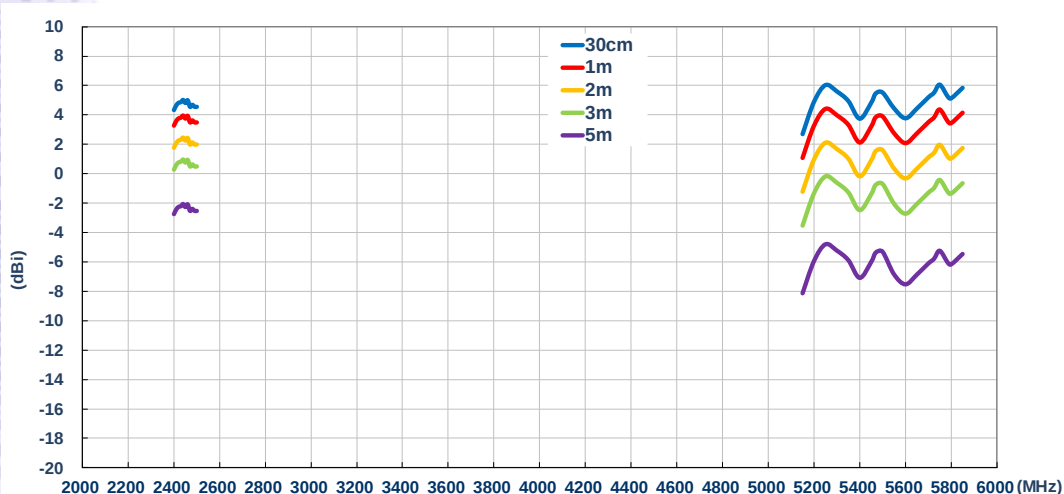


© Unictron Technologies Corp.
All specifications subject to change without notice.

Free Space – WiFi A


Efficiency (%)

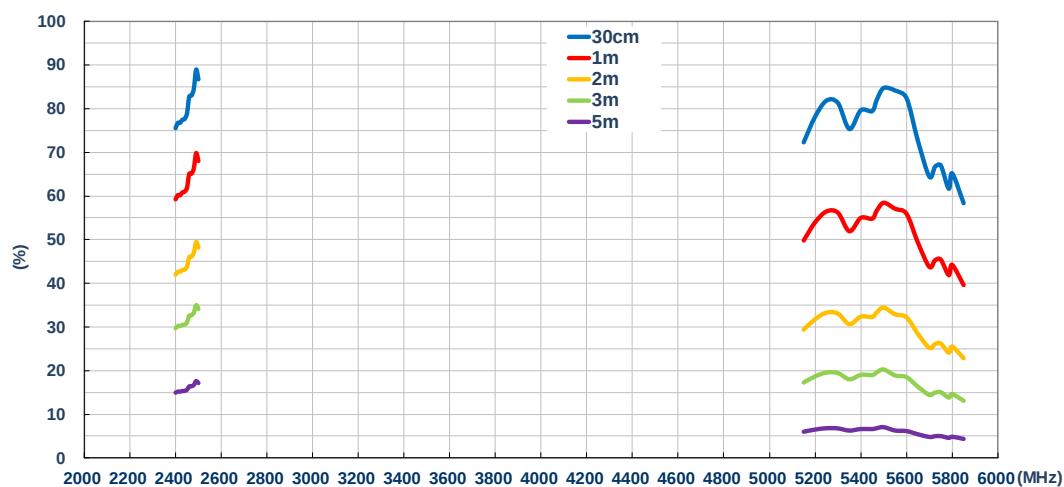

Average Gain (dBi)

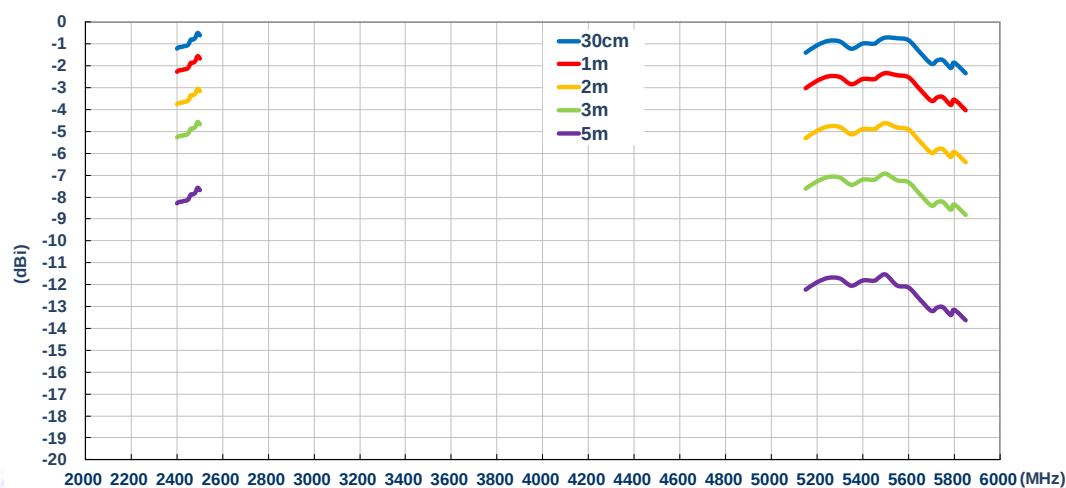


Peak Gain (dBi)

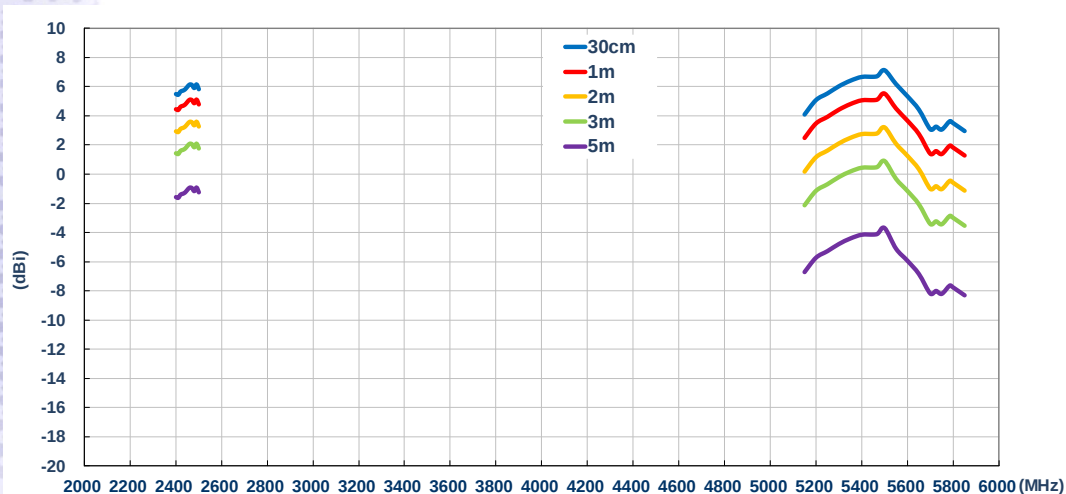


© Unictron Technologies Corp.
All specifications subject to change without notice.

With Ground Plane – WiFi A


Efficiency (%)

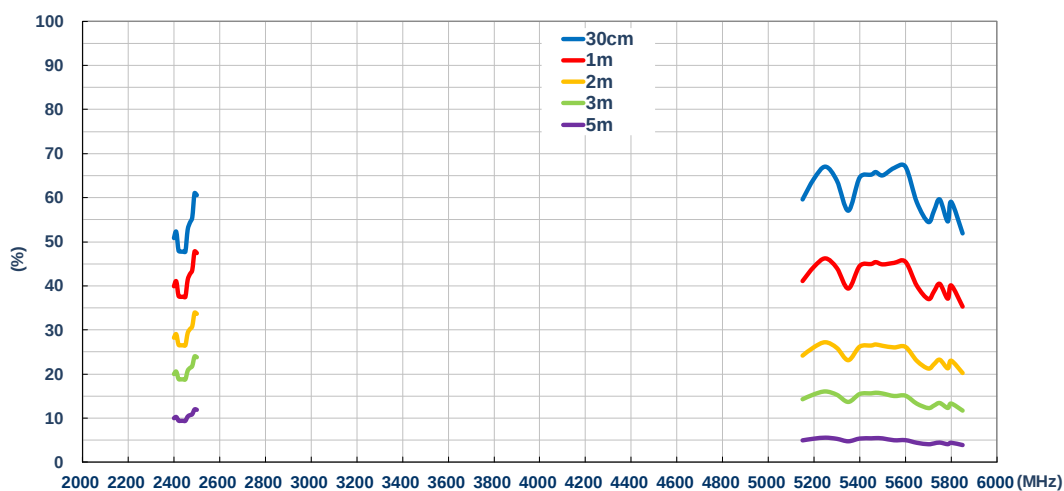

Average Gain (dBi)

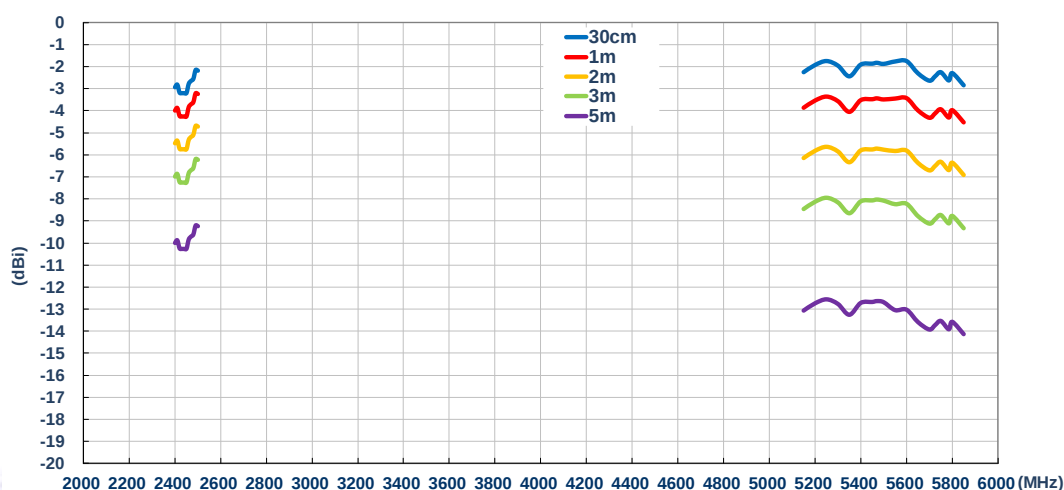


Peak Gain (dBi)

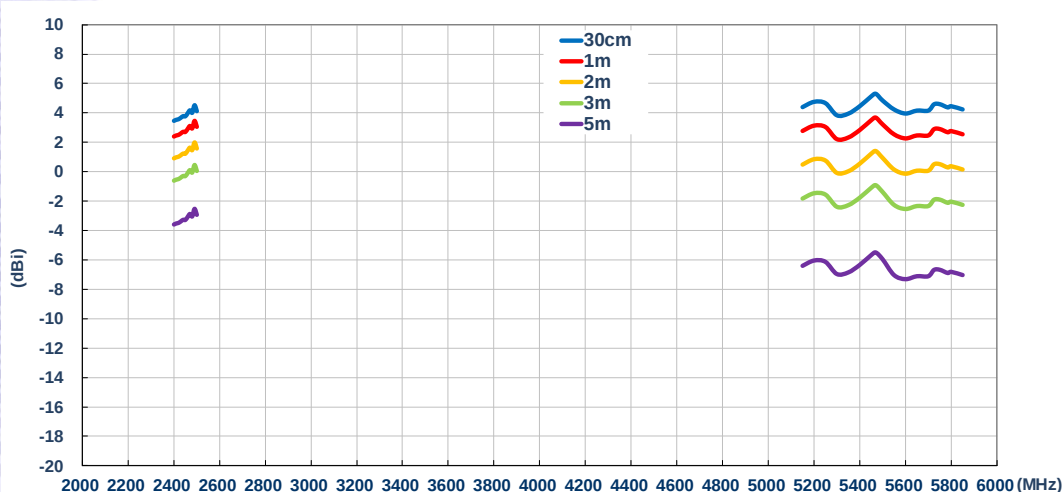


© Unictron Technologies Corp.
All specifications subject to change without notice.

Free Space – BT


Efficiency (%)

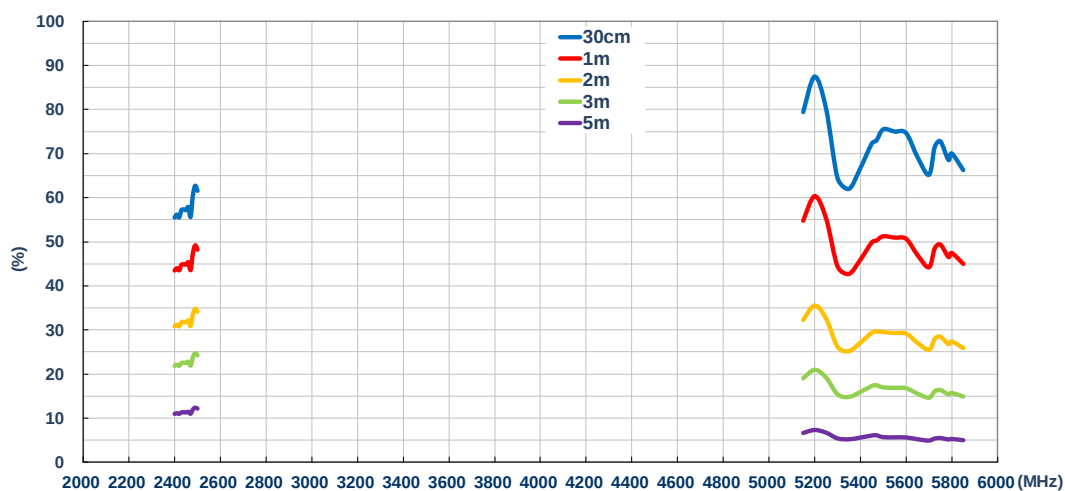

Average Gain (dBi)

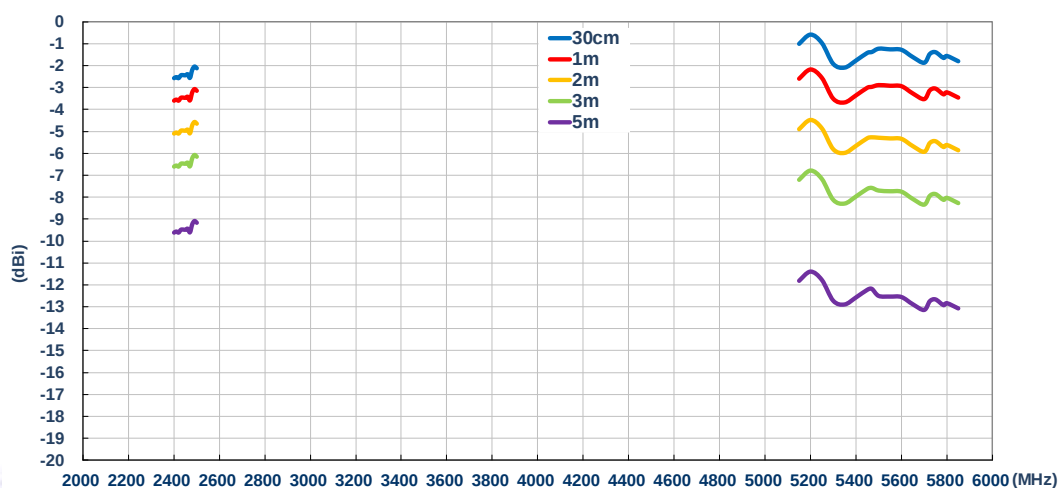


Peak Gain (dBi)

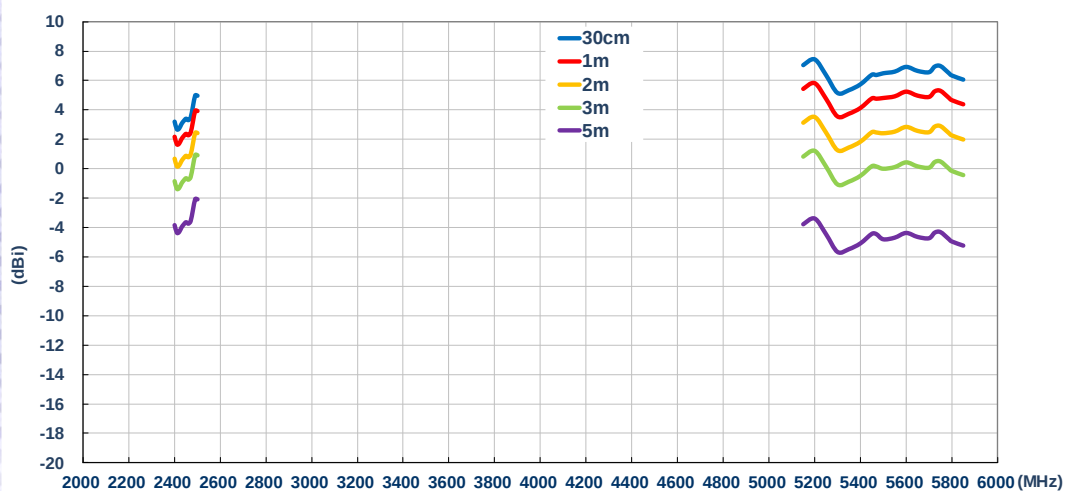


© Unictron Technologies Corp.
All specifications subject to change without notice.

With Ground Plane – BT


Efficiency (%)

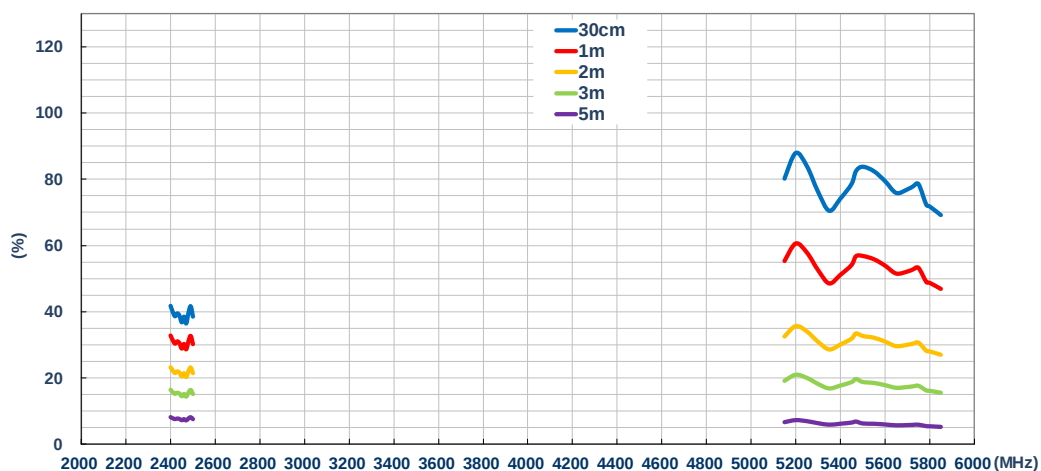

Average Gain (dBi)

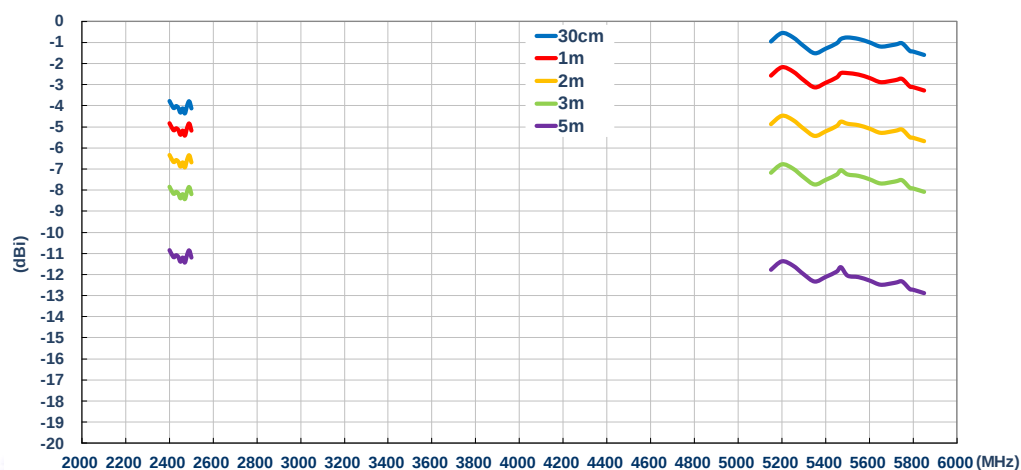

Peak Gain (dBi)

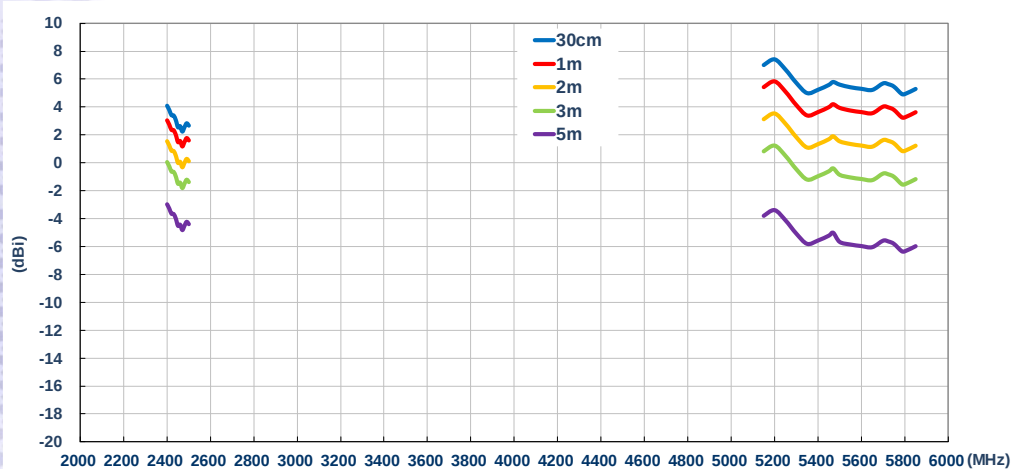

© Unictron Technologies Corp.
All specifications subject to change without notice.