

FCC TEST REPORT

(Part 15, Subpart E)


Applicant:	Qingdao Intelligent & Precise Electronics Co., Ltd.
Address:	No.218, Qianwangang Road, Economic and Technological Development Zone, Qingdao, Shandong Province, China

Manufacturer or Supplier:	Qingdao Intelligent & Precise Electronics Co., Ltd.
Address:	No.218, Qianwangang Road, Economic and Technological Development Zone, Qingdao, Shandong Province, China
Product:	WiFi/BT Module
Brand Name:	Hisense
Model Name:	MWH634B
FCC ID:	2AJVQ-MWH634B
Date of tests:	Feb.13, 2025 ~ Mar.19, 2025

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart E, Section 15.407**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
 Date: Mar.19, 2025	 Date: Mar.19, 2025

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1 SUMMARY OF TEST RESULTS.....	6
1.1 MEASUREMENT UNCERTAINTY	7
2 GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	13
2.3 DUTY CYCLE OF TEST SIGNAL	18
2.4 DESCRIPTION OF SUPPORT UNITS	19
2.4.1 CONFIGURATION OF SYSTEM UNDER TEST	20
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	21
3 TEST TYPES AND RESULTS.....	22
3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	22
3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	22
3.1.2 LIMITS OF UNWANTED EMISSION	22
3.1.3 TEST INSTRUMENTS	23
3.1.4 TEST PROCEDURES	25
3.1.5 DEVIATION FROM TEST STANDARD	25
3.1.6 TEST SETUP	26
3.1.7 EUT OPERATING CONDITION	27
3.1.8 TEST RESULTS	28
3.2 CONDUCTED EMISSION MEASUREMENT	362
3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	362
3.2.2 TEST INSTRUMENTS	362
3.2.3 TEST PROCEDURES	362
3.2.4 DEVIATION FROM TEST STANDARD	363
3.2.5 TEST SETUP	363
3.2.6 EUT OPERATING CONDITIONS	363
3.2.7 TEST RESULTS	363
3.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	364
3.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	364
3.3.2 TEST SETUP	365
3.3.3 TEST INSTRUMENTS	365



3.3.4	TEST PROCEDURE	367
3.3.5	DEVIATION FROM TEST STANDARD	369
3.3.6	EUT OPERATING CONDITIONS	369
3.3.7	TEST RESULTS	369
3.4	MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT	370
3.4.1	LIMITS OF MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT	370
3.4.2	TEST SETUP	370
3.4.3	TEST INSTRUMENTS	370
3.4.4	TEST PROCEDURES	371
3.4.5	DEVIATION FROM TEST STANDARD	371
3.4.6	EUT OPERATING CONDITIONS	371
3.4.7	TEST RESULTS	371
3.5	AUTOMATICALLY DISCONTINUE TRANSMISSION	372
3.5.1	LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	372
3.5.2	TEST INSTRUMENTS	372
3.5.3	TEST RESULT	372
3.6	ANTENNA REQUIREMENTS	373
3.6.1	STANDARD APPLICABLE	373
3.6.2	ANTENNA CONNECTED CONSTRUCTION	373
3.6.3	ANTENNA GAIN	373
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	373
5	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	373
6	APPENDIX A: RLAN	374
	EMISSION BANDWIDTH	374
	TEST RESULT	374
	TEST GRAPHS	382
	OCCUPIED CHANNEL BANDWIDTH	436
	TEST RESULT	436
	TEST GRAPHS	444
	MIN EMISSION BANDWIDTH	495
	TEST RESULT B4	495
	TEST GRAPHS B4	497
	DUTY CYCLE	509
	TEST RESULT	509
	TEST GRAPHS	513
	MAXIMUM CONDUCTED OUTPUT POWER	525



Test Report No.: PSU-NQN2503180111RF03

TEST RESULT	525
MAXIMUM POWER SPECTRAL DENSITY	557
TEST RESULT	557
TEST GRAPHS.....	579



Test Report No.: PSU-NQN2503180111RF03

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-NQN2503180111RF03	Original release	Mar.19, 2025

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E		
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT
15.407(b)(9)	AC Power Conducted Emission	N/A
15.407(b) (1/2/3/4/5)	Radiated Emission & Band Edge Measurement	Compliance
15.407(a/1/2/3)	Maximum conducted output Power	Compliance
15.407(a/1/2/3)	Peak Power Spectral Density	Compliance
15.407(a)(2)(12)	26 dB Bandwidth	Compliance
15.407(e)	6 dB Bandwidth	Compliance
15.203	Antenna Requirement	Compliance

NOTE:

1. Except the data of RSE and Band Edge Measurement, other data please refer to the appendix A and Appendix B.

***Test Lab Information Reference**

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01


The FCC Site Registration No. is 434559; The Designation No. is CN1325.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions (30MHz~1GHz)	±4.98dB
Radiated emissions (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Power Spectral Density	±0.85 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

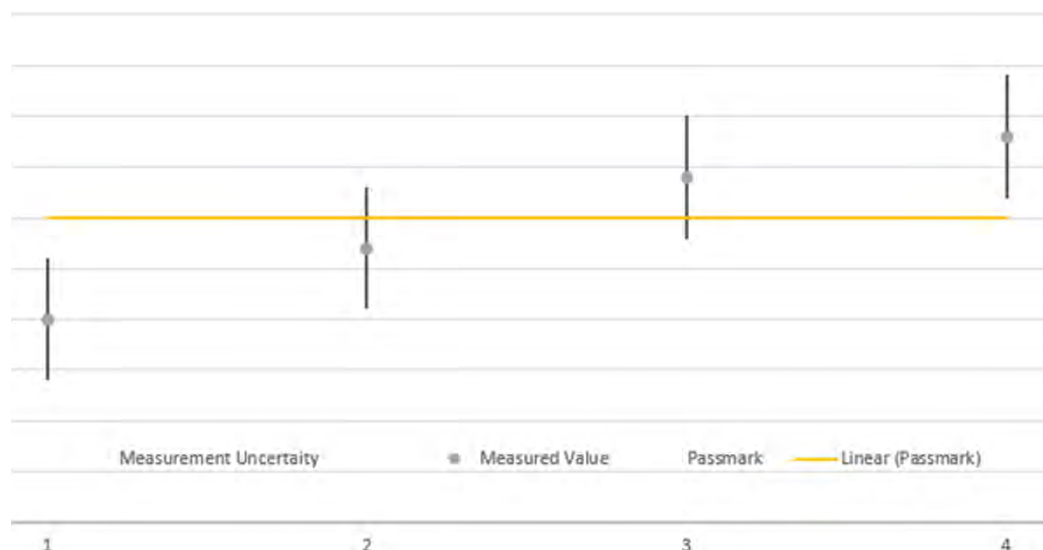

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	WiFi/BT Module
BRAND NAME*	Hisense
MODEL NAME*	MWH634B
NOMINAL VOLTAGE*	3.3Vdc (Battery Supply)
MODULATION *	OFDM, OFDMA
TRANSFER RATE*	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps 802.11ac: up to 866.6Mbps 802.11ax: up to 1201Mbps
OPERATING FREQUENCY*	5180 ~ 5240MHz, 5260 ~ 5320MHz, 5500 ~ 5700MHz, 5745 ~ 5825MHz
NUMBER OF CHANNEL *	5180 ~ 5240MHz: 4 for 802.11a, 802.11n/ac/ax (20MHz) 2 for 802.11n/ac/ax (40MHz) 1 for 802. 802.11ac/ax (80MHz) 5260 ~ 5320MHz: 4 for 802.11a, 802.11n/ac/ax (20MHz) 2 for 802.11n/ac/ax (40MHz) 1 for 802. 802.11ac/ax (80MHz) 5500 ~ 5700MHz: 12 for 802.11a, 802.11n/ac/ax (20MHz) 6 for 802.11n/ac/ax (40MHz) 3 for 802.11ac/ax (80MHz) 5745 ~ 5825MHz: 5 for 802.11a, 802.11n/ac/ax (20MHz) 2 for 802.11n/ac/ax (40MHz) 1 for 802.11ac/ax (80MHz)
MAX. OUTPUT POWER	51.64 mW for 5180 ~ 5240MHz 52.72 mW for 5260 ~ 5320MHz 56.36 mW for 5500 ~ 5700MHz 54.95 mW for 5745 ~ 5825MHz
ANTENNA TYPE*	Inverted F Antenna
ANTENNA GAIN*	ANT 1: 3.42dBi for 5180 ~ 5825MHz ANT 2: 3.25dBi for 5180 ~ 5825MHz
Directional Gain:	For Power/PSD: 3.34dBi(Uncorrelated) for WIFI
Beamforming Directional Gain:	N/A



HW VERSION*	V1.00
SW VERSION*	N/A
I/O PORTS*	Refer to user's manual
CABLE SUPPLIED*	N/A

NOTE:

1. *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitter and two receiver.

MODULATION MODE	TX FUNCTION
802.11a	2TX/2RX
802.11n/802.11ac/ax (20MHz)	2TX/2RX
802.11n/802.11ac/ax (40MHz)	2TX/2RX
802.11ac/ax (80MHz)	2TX/2RX
802.11ax (20MHz RU 26/52/106/242)	2TX/2RX
802.11ax (40MHz RU 26/52/106/242/484)	2TX/2RX
802.11ax (80MHz RU 26/52/106/242/996)	2TX/2RX

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
5. Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.

2.2 DESCRIPTION OF TEST MODES

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n, 802.11ac/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106/242):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n, 802.11ac/ax (40MHz)/ 802.11ax (40MHz RU 26/52/106/242/484):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac/ax (80MHz)/ 802.11ax (80MHz RU 26/52/106/242/484/996):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
42	5210 MHz		

FOR 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11n, 802.11ac/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106/242):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n, 802.11ac/ax (40MHz)/ 802.11ax (40MHz RU 26/52/106/242/484):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
54	5270 MHz	62	5310 MHz

1 channel is provided for 802.11ac/ax (80MHz)/ 802.11ax (80MHz RU 26/52/106/242/996):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
58	5290 MHz		

**FOR 5500 ~ 5700MHz**

12 channels are provided for 802.11a, 802.11n, 802.11ac/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106/242):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
100	5500 MHz	124	5620MHz
104	5520 MHz	128	5640MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz		

6 channels are provided for 802.11n, 802.11ac/ax (40MHz)/ 802.11ax (40MHz RU 26/52/106/242/484):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
102	5510 MHz	126	5630MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz		

3 channel is provided for 802.11ac/ax (80MHz)/ 802.11ax (80MHz RU 26/52/106/242/996):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
106	5530 MHz	122	5610 MHz

FOR 5745 ~ 5825MHz

5 channels are provided for 802.11a, 802.11n, 802.11ac/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106/242):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n, 802.11ac/ax (40MHz)/ 802.11ax (40MHz RU 26/52/106/242/484):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
142	5710 MHz	159	5795 MHz
151	5755 MHz		

1 channel is provided for 802.11ac/ax (80MHz)/ 802.11ax (80MHz RU 26/52/106/242/484/996):

CHANNEL	FREQUENCY
155	5775 MHz

2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	-	Powered by Adapter with wifi(5G) link
B	-	-	-	√	Powered by Battery with wifi(5G) link
C	-	-	-	-	Powered by USB with wifi(5G) link

Where

RE $\geq$ 1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE:

The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

NOTE: “-” means no effect

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
A	802.11a	5745-5825	142 to 159	159	OFDM	MCS0

**RADIATED EMISSION TEST (ABOVE 1GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
A	802.11n/ac/ax (20MHz)/ 802.11ax (20MHz RU26/52/106/242)		36 to 48	36, 40, 48	OFDM, OFDMA	MCS0
A	802.11n/ac/ax (40MHz)/ 802.11ax (40MHz RU26/52/106/242/484)		38 to 46	38, 46	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)/ 802.11ax (80MHz RU26/52/106/242/484/9 96)		42	42	OFDM, OFDMA	MCS0
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	6.0
A	802.11n/ac/ax (20MHz)/ 802.11ax (20MHz RU26/52/106/242)		52 to 64	52, 60, 64	OFDM, OFDMA	MCS0
A	802.11n/ac/ax (40MHz)/ 802.11ax (40MHz RU26/52/106/242/484)		54 to 62	54, 62	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)/ 802.11ax (80MHz RU26/52/106/242/484/9 96)		58	58	OFDM, OFDMA	MCS0
A	802.11a	5500-5700	100 to 144	100, 116, 140	OFDM	6.0
A	802.11n/ac/ax (20MHz)/ 802.11ax (20MHz RU26/52/106/242)		100 to 144	100, 116, 140	OFDM, OFDMA	MCS0
A	802.11n/ac/ax (40MHz)/ 802.11ax (40MHz RU26/52/106/242/484)		102 to 142	102, 110, 134	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)/ 802.11ax (80MHz RU26/52/106/242/484/9 96)		106 to 138	106	OFDM, OFDMA	MCS0
A	802.11a	5745-5825	144 to 165	144,149, 157,165	OFDM	6.0
A	802.11n/ac/ax (20MHz)/ 802.11ax (20MHz RU26/52/106/242)		144 to 165	144,149, 157,165	OFDM, OFDMA	MCS0
A	802.11n/ac/ax (40MHz)/ 802.11ax (40MHz RU26/52/106/242/484)		142 to 159	142,151, 159	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)/ 802.11ax (80MHz RU26/52/106/242/484/9 96)		138 to 155	138,155	OFDM, OFDMA	MCS0

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
A	802.11a	5745-5825	142 to 159	159	OFDM	MCS0

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.



EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
A	802.11n/ac/ax (20MHz)/ 802.11ax (20MHz RU26/52/106/242)		36 to 48	36, 40, 48	OFDM, OFDMA	MCS0
A	802.11n/ac/ax (40MHz)/ 802.11ax (40MHz RU26/52/106/242/484)		38 to 46	38, 46	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)/ 802.11ax (80MHz RU26/52/106/242/484/9 96)		42	42	OFDM, OFDMA	MCS0
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	6.0
A	802.11n/ac/ax (20MHz)/ 802.11ax (20MHz RU26/52/106/242)		52 to 64	52, 60, 64	OFDM, OFDMA	MCS0
A	802.11n/ac/ax (40MHz)/ 802.11ax (40MHz RU26/52/106/242/484)		54 to 62	54, 62	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)/ 802.11ax (80MHz RU26/52/106/242/484/9 96)		58	58	OFDM, OFDMA	MCS0
A	802.11a	5500-5700	100 to 144	100, 116, 140	OFDM	6.0
A	802.11n/ac/ax (20MHz)/ 802.11ax (20MHz RU26/52/106/242)		100 to 144	100, 116, 140	OFDM, OFDMA	MCS0
A	802.11n/ac/ax (40MHz)/ 802.11ax (40MHz RU26/52/106/242/484)		102 to 142	102, 110, 134	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)/ 802.11ax (80MHz RU26/52/106/242/484/9 96)		106 to 138	106	OFDM, OFDMA	MCS0
A	802.11a	5745-5825	144 to 165	144, 149, 157,165	OFDM	6.0
A	802.11n/ac/ax (20MHz)/ 802.11ax (20MHz RU26/52/106/242)		144 to 165	144, 149, 157,165	OFDM, OFDMA	MCS0
A	802.11n/ac/ax (40MHz)/ 802.11ax (40MHz RU26/52/106/242/484)		142 to 159	142, 151, 159	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)/ 802.11ax (80MHz RU26/52/106/242/484/9 96)		138,155	138, 155	OFDM, OFDMA	MCS0

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATIO N	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
A	802.11n/ac/ax (20MHz)/ 802.11ax (20MHz RU26/52/106/242)		36 to 48	36, 40, 48	OFDM, OFDMA	MCS0
A	802.11n/ac/ax (40MHz)/ 802.11ax (40MHz RU26/52/106/242/484)		38 to 46	38, 46	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)/ 802.11ax (80MHz RU26/52/106/242/484/9 96)		42	42	OFDM, OFDMA	MCS0
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	6.0
A	802.11n/ac/ax (20MHz)/ 802.11ax (20MHz RU26/52/106/242)		52 to 64	52, 60, 64	OFDM, OFDMA	MCS0
A	802.11n/ac/ax (40MHz)/ 802.11ax (40MHz RU26/52/106/242/484)		54 to 62	54, 62	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)/ 802.11ax (80MHz RU26/52/106/242/484/9 96)		58	58	OFDM, OFDMA	MCS0
A	802.11a	5500-5700	100 to 144	100, 116, 140	OFDM	6.0
A	802.11n/ac/ax (20MHz)/ 802.11ax (20MHz RU26/52/106/242)		100 to 144	100, 116, 140	OFDM, OFDMA	MCS0
A	802.11n/ac/ax (40MHz)/ 802.11ax (40MHz RU26/52/106/242/484)		102 to 142	102, 110, 134	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)/ 802.11ax (80MHz RU26/52/106/242/484/9 96)		106 to 138	106	OFDM, OFDMA	MCS0
A	802.11a	5745-5825	144 to 165	144, 149, 157,165	OFDM	6.0
A	802.11n/ac/ax (20MHz)/ 802.11ax (20MHz RU26/52/106/242)		144 to 165	144, 149, 157,165	OFDM, OFDMA	MCS0



A	802.11n/ac/ax (40MHz)/ 802.11ax (40MHz RU26/52/106/242/484)		142 to 159	142, 151, 159	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)/ 802.11ax (80MHz RU26/52/106/242/484/9 96)		138,155	138, 155	OFDM, OFDMA	MCS0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	23deg. C, 70%RH	DC 3.3V By Battery Supply	Hanwen Xu
RE≥1G	23deg. C, 70%RH	DC 3.3V By Battery Supply	Hanwen Xu
PLC	25deg. C, 52%RH	DC 3.3V By Battery Supply	Hanwen Xu
APCM	25deg. C, 60%RH	DC 3.6V By Battery Supply	Hanwen Xu

2.3 DUTY CYCLE OF TEST SIGNAL

Please Refer to Appendix A/B Of this test report.




2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Laptop	Lenovo	Thinkpad E14	SL10W47313	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m
2	AC Line: Unshielded, Detachable 1.5m
3	AC Line: Unshielded, Detachable 1.5m
4	DC Line: Unshielded, Detachable 1.0m

2.4.1 CONFIGURATION OF SYSTEM UNDER TEST

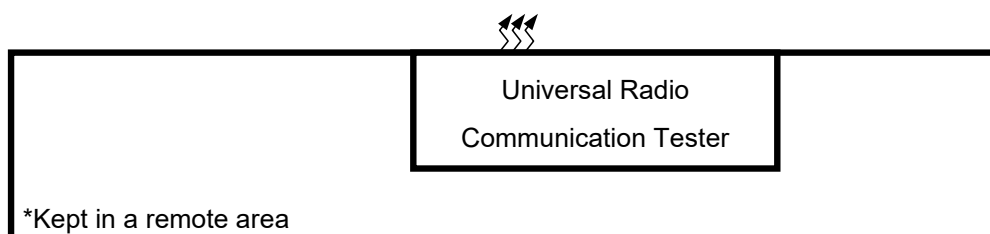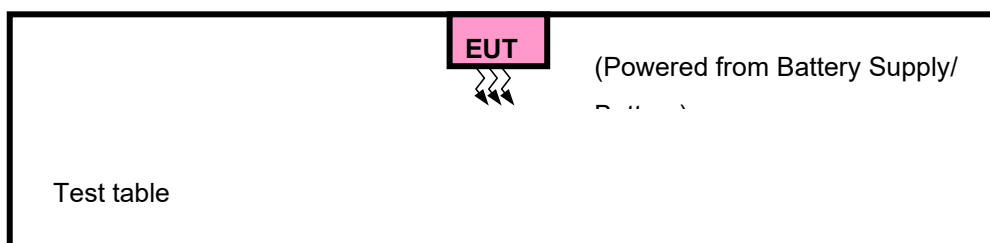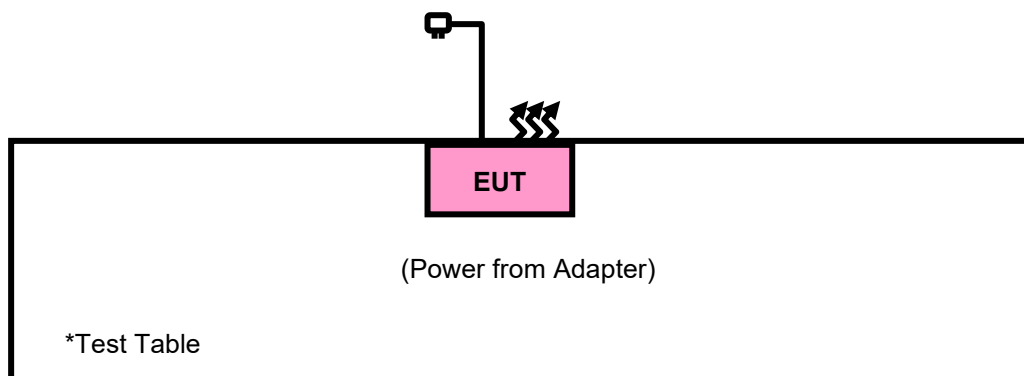

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

ANSI C63.10-2020

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

3 TEST TYPES AND RESULTS

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

3.1.2 LIMITS OF UNWANTED EMISSION

RESTRICTED BANDS	APPLICABLE TO	LIMIT	
	789033 D02 General UNII Test Procedures New Rules v02r01	FIELD STRENGTH AT 3m (dBµV/m)	
		PK : 74	AV : 54
OUT OF THE RESTRICTED BANDS	APPLICABLE TO	EIRP LIMIT (dBm/MHz)	EQUIVALENT FIELD STRENGTH AT 3m (dBµV/m)
	15.407(b)(1)	PK : -27	PK : 68.2
	15.407(b)(2)		
	15.407(b)(3)		
	15.407(b)(4)	See note 2 (FCC 16-24)	

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts).}$$

2. All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

3.1.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,23	Aug.29,25
Pre-Amplifier	R&S	SCU08F1	101028	Jan.22,24	Jan.21,26
Signal Generator	R&S	SMB100A	182185	Mar.29,24	Mar.28,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESW44	101973	Mar.28,24	Mar.27,26
Bilog Antenna	SCHWARZBEC K	VULB 9163	1264	Dec.26,23	Dec.25,25
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,23	Aug.21,25
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Jul.15,24	Jul.14,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,23	Aug.21,25
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,23	Feb.22,25
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.22,25	Feb.21,27
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.19,24	Jun.18,26
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	N/A	N/A
DC Source	HYELEC	HY3010B	551016	Aug.31,23	Aug.30,25
Hygrothermograph	DELI	20210528	SZ014	Sep.06,23	Sep.05,25
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A

**Test Report No.: PSU-NQN2503180111RF03**

TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.27,24	Apr.26,25
CABLE	R&S	W12.14	N/A	Apr.27,24	Apr.26,25

- NOTE:**
1. The calibration interval of the above test instruments is 12 /24/ 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.
 3. The FCC Site Registration No. is 434559; The Designation No. is CN1325.

3.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

3.1.5 DEVIATION FROM TEST STANDARD


No deviation.

3.1.6 TEST SETUP

<Frequency Range 9KHz~30MHz >

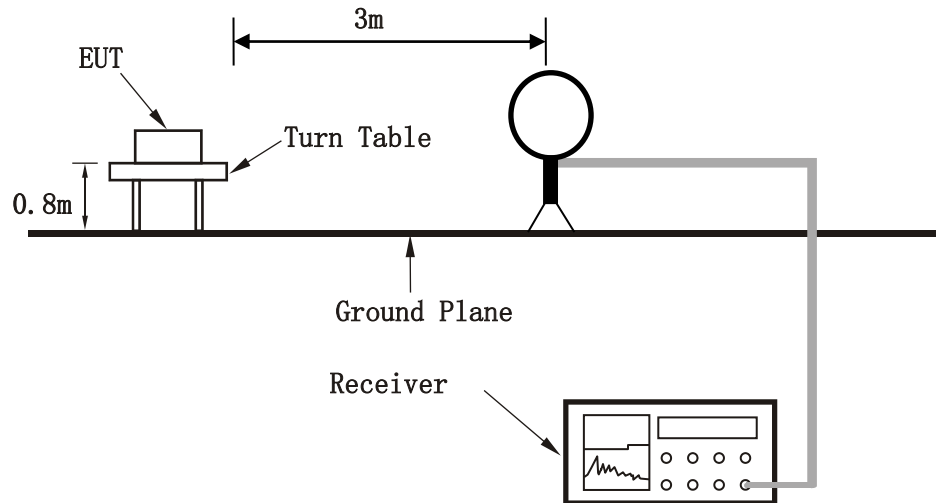


< Frequency Range 30MHz~1GHz >

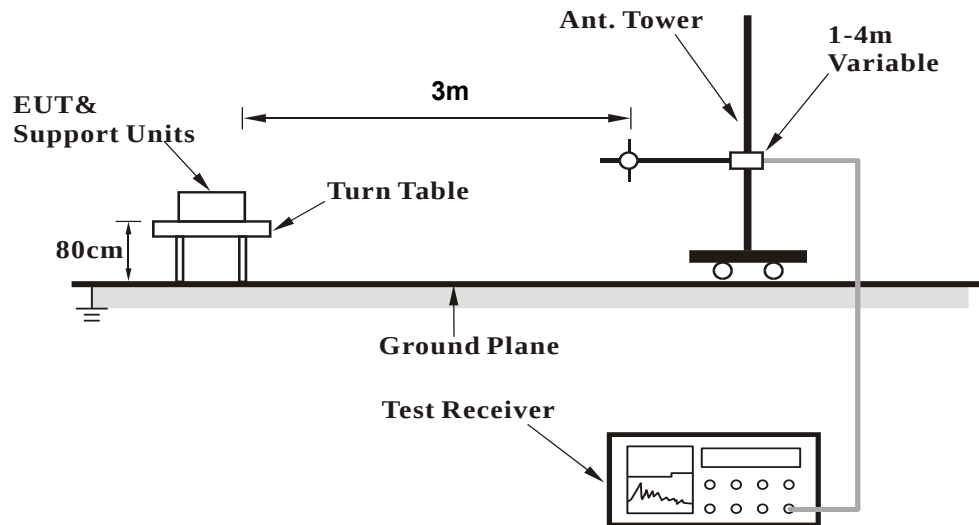



<Frequency Range above 1GHz>

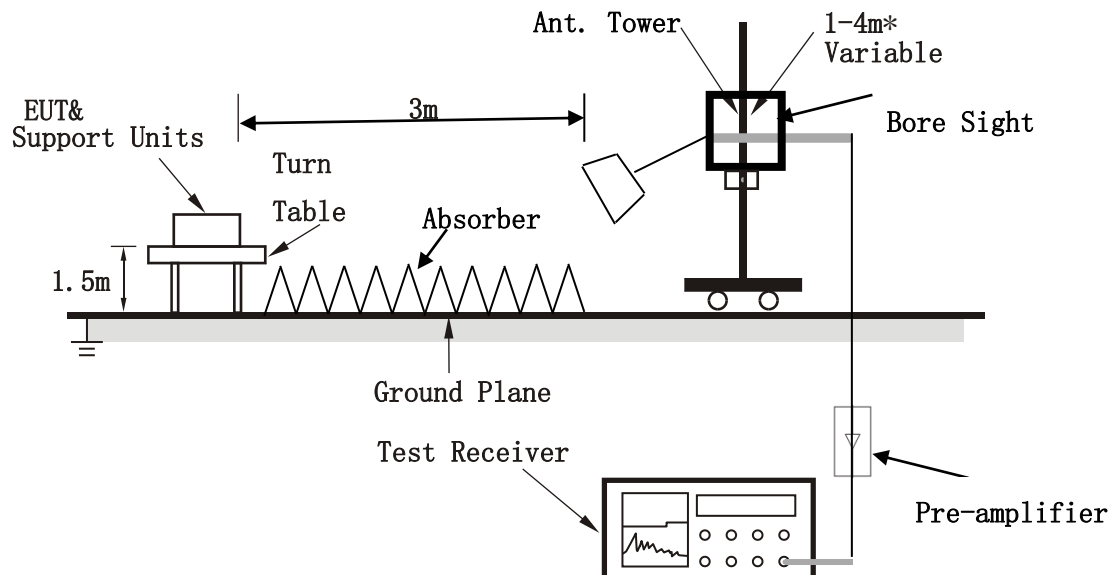

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.7 EUT OPERATING CONDITION

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.




3.1.8 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Radiated Emission Band Edge for WIFI

20M

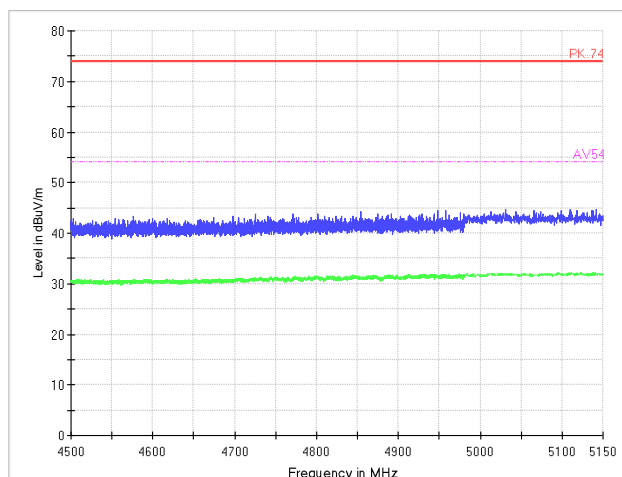


Radiated Emission Band Edge

Channel No.:36

Test Mode: 802.11a

Polarization: V

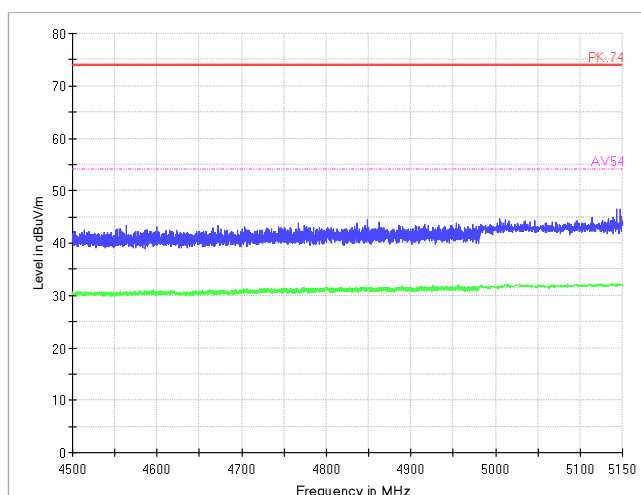


Radiated Emission Band Edge

Channel No.:36

Test Mode: 802.11a

Polarization: H

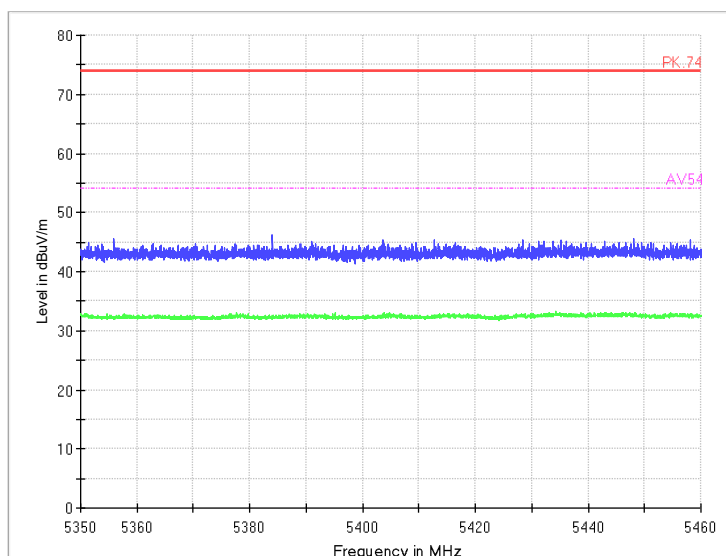


Radiated Emission Band Edge

Channel No.:64

Test Mode: 802.11a

Polarization: V

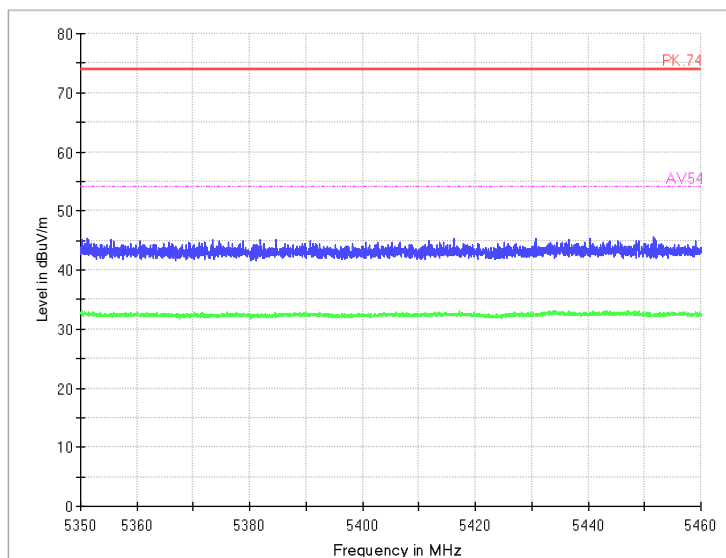


Radiated Emission Band Edge

Channel No.:64

Test Mode: 802.11a

Polarization: H

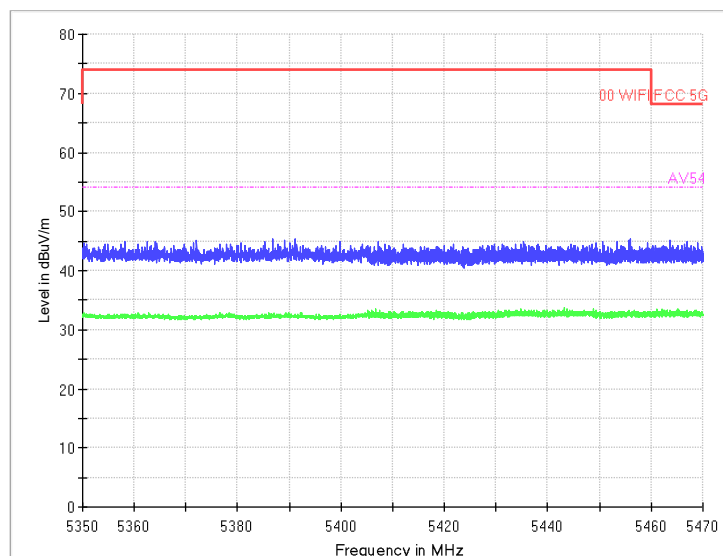


Radiated Emission Band Edge

Channel No.:100

Test Mode: 802.11a

Polarization: V

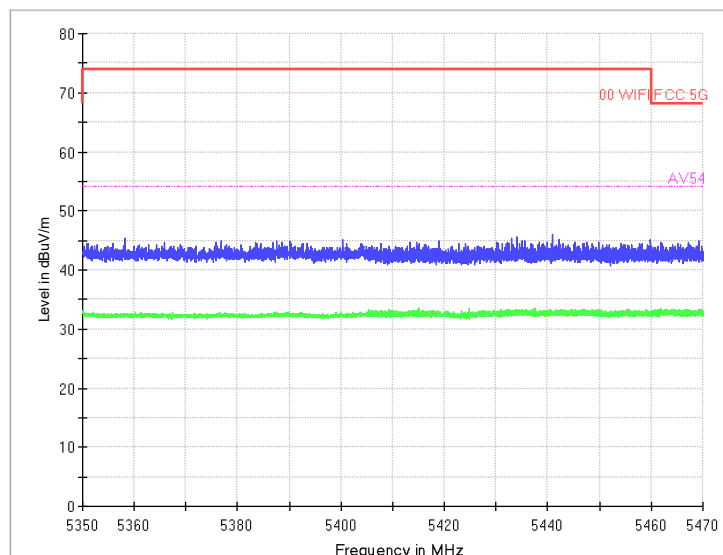


Radiated Emission Band Edge

Channel No.:100

Test Mode: 802.11a

Polarization: H

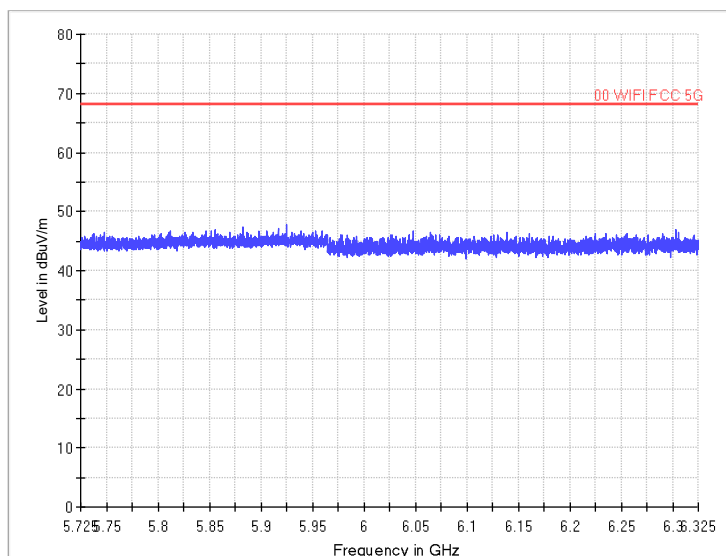


Radiated Emission Band Edge

Channel No.:140

Test Mode: 802.11a

Polarization: V

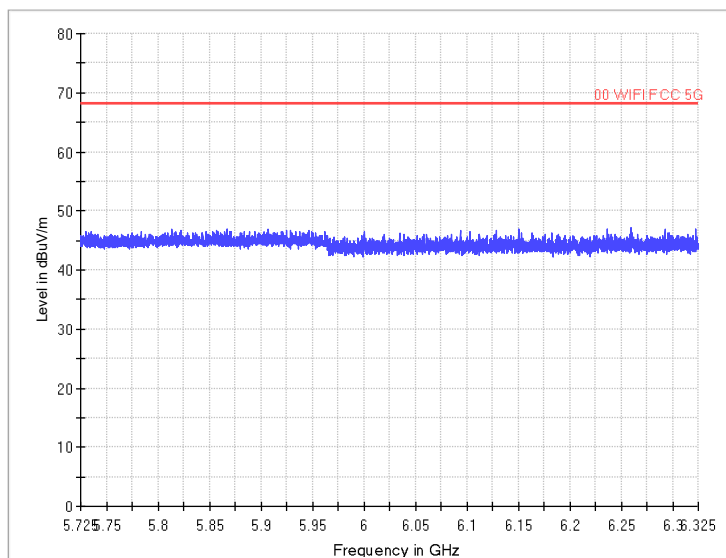


Radiated Emission Band Edge

Channel No.:140

Test Mode: 802.11a

Polarization: H

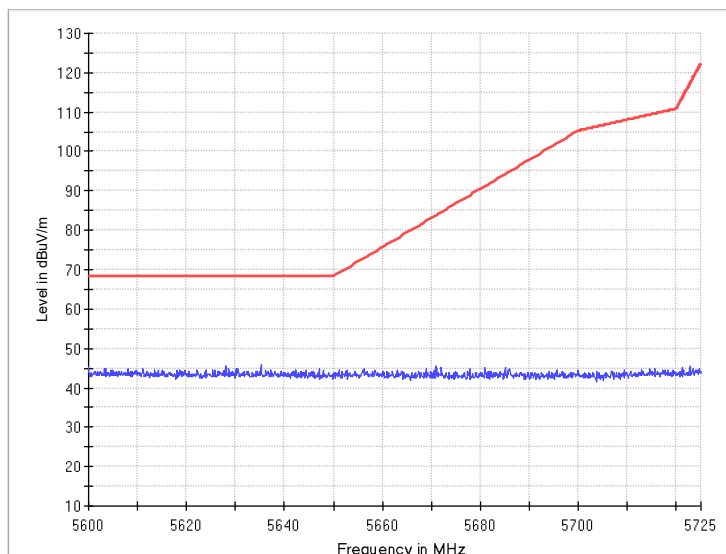


Radiated Emission Band Edge

Channel No.:149

Test Mode: 802.11a

Polarization: V

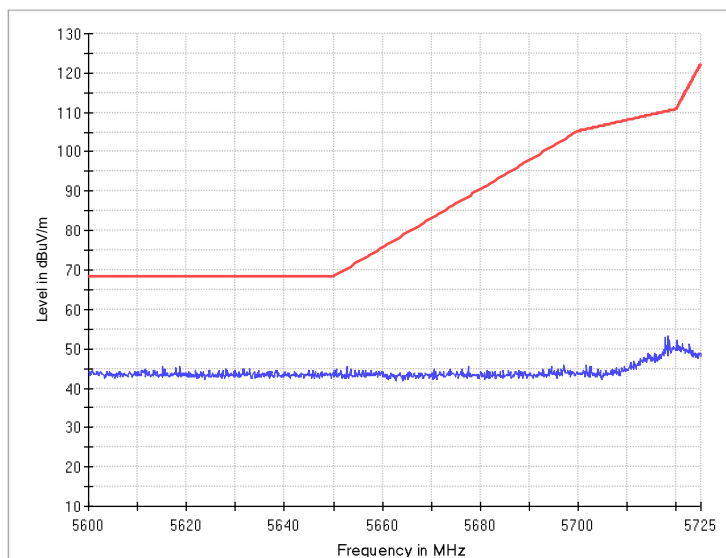


Radiated Emission Band Edge

Channel No.:149

Test Mode: 802.11a

Polarization: H

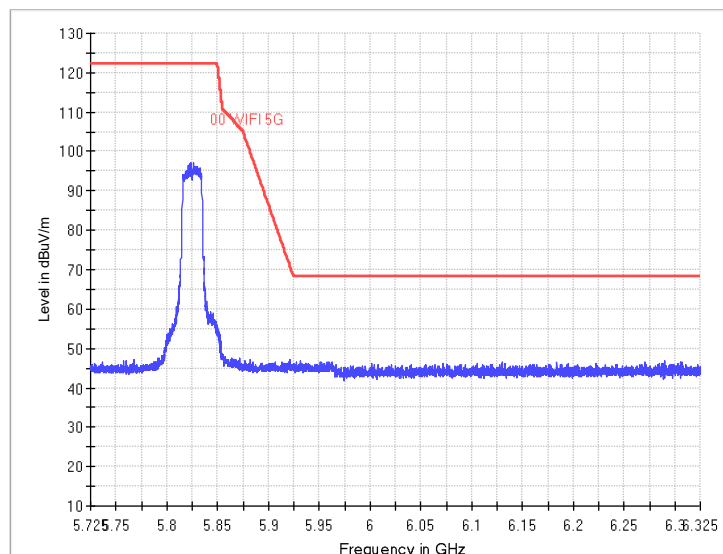


Radiated Emission Band Edge

Channel No.:165

Test Mode: 802.11a

Polarization: V

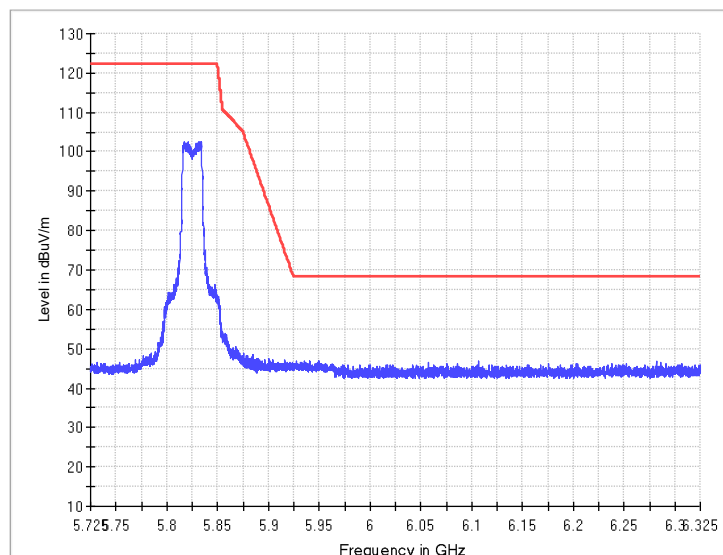


Radiated Emission Band Edge

Channel No.:165

Test Mode: 802.11a

Polarization: H

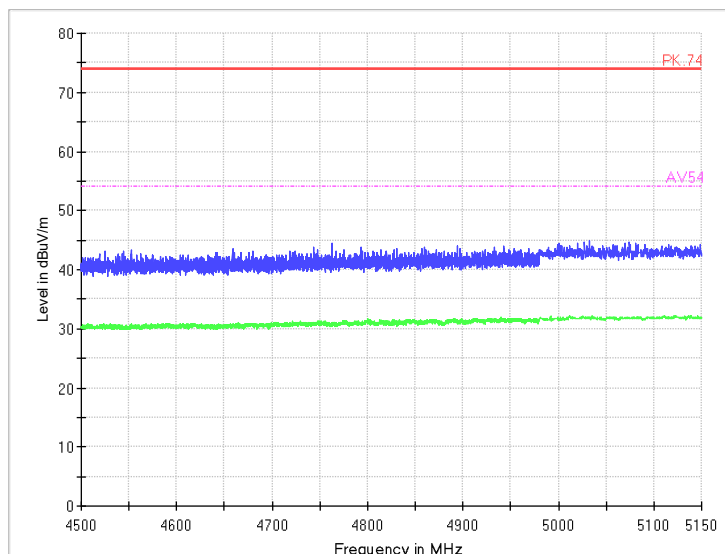


Radiated Emission Band Edge

Channel No.:36

Test Mode: 802.11n

Polarization: V

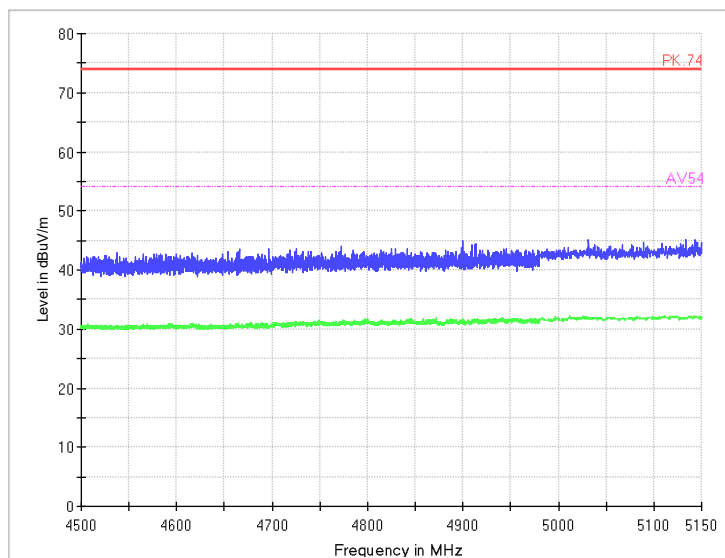


Radiated Emission Band Edge

Channel No.:36

Test Mode: 802.11n

Polarization: H

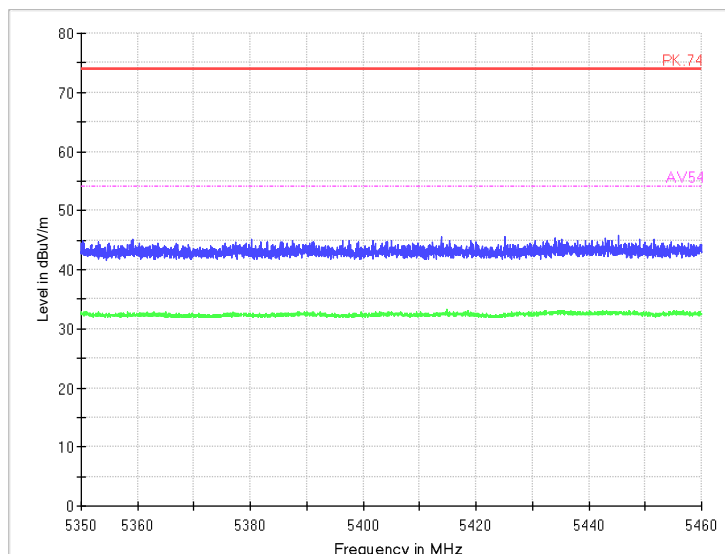


Radiated Emission Band Edge

Channel No.:64

Test Mode: 802.11n

Polarization: V

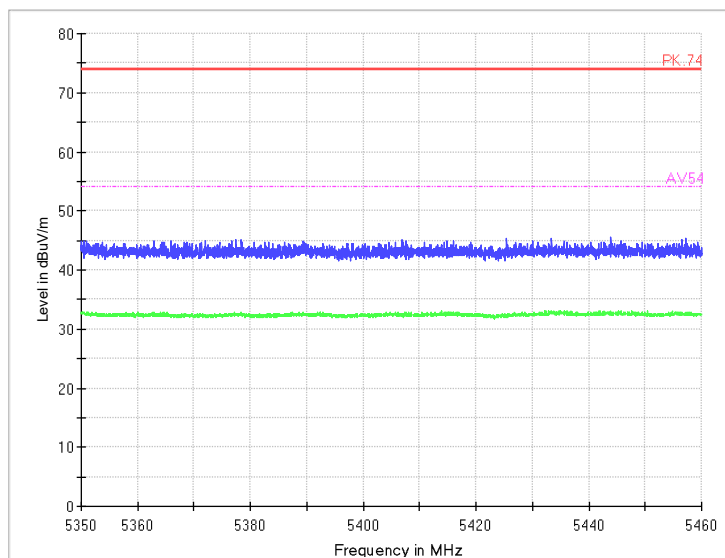


Radiated Emission Band Edge

Channel No.:64

Test Mode: 802.11n

Polarization: H

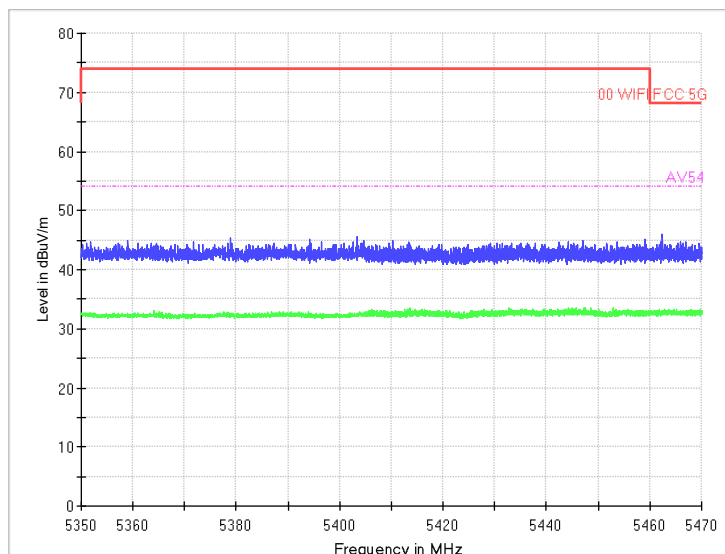


Radiated Emission Band Edge

Channel No.:100

Test Mode: 802.11n

Polarization: V

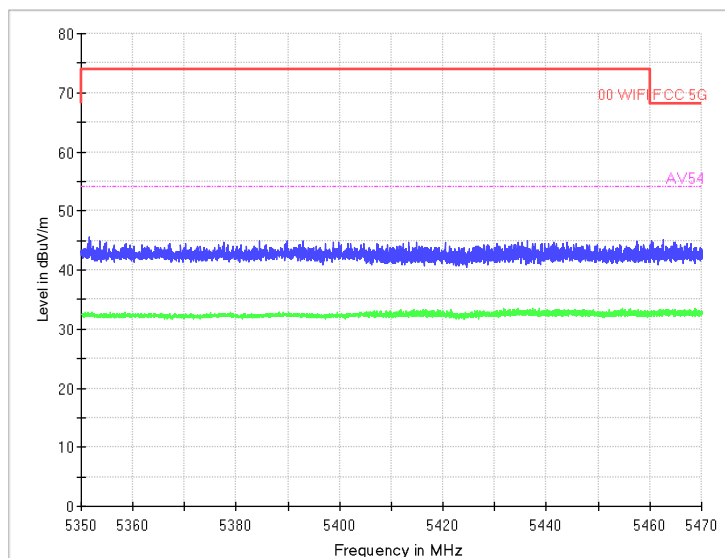


Radiated Emission Band Edge

Channel No.:100

Test Mode: 802.11n

Polarization: H

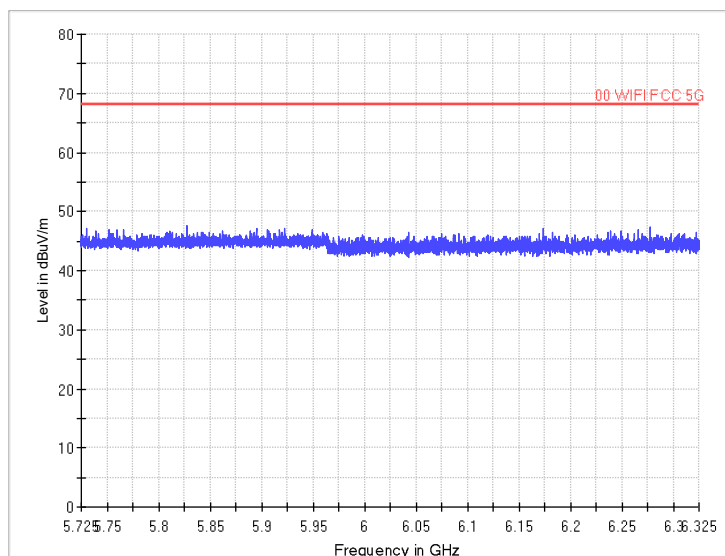


Radiated Emission Band Edge

Channel No.:140

Test Mode: 802.11n

Polarization: V

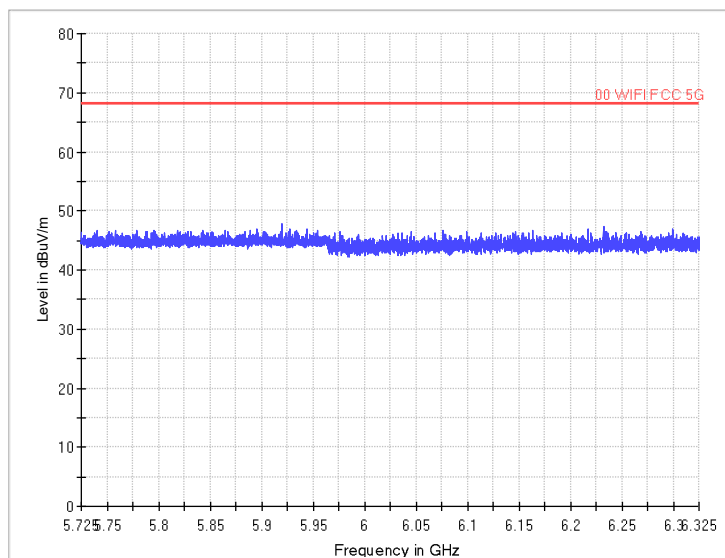


Radiated Emission Band Edge

Channel No.:140

Test Mode: 802.11n

Polarization: H

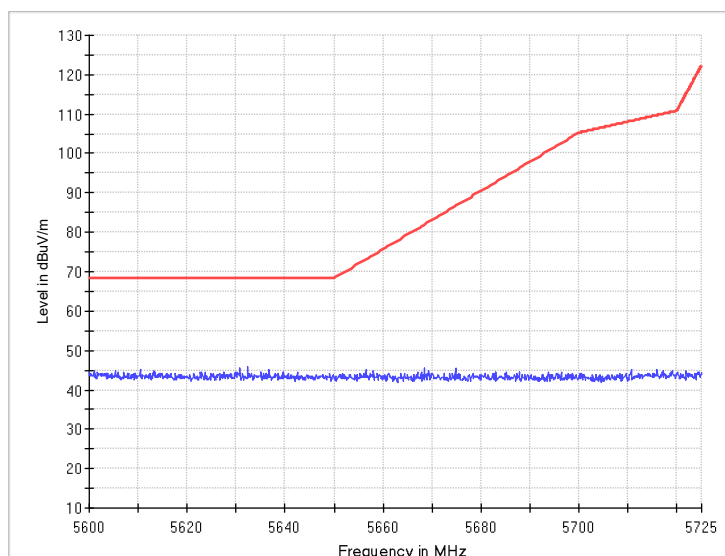


Radiated Emission Band Edge

Channel No.:149

Test Mode: 802.11n

Polarization: V

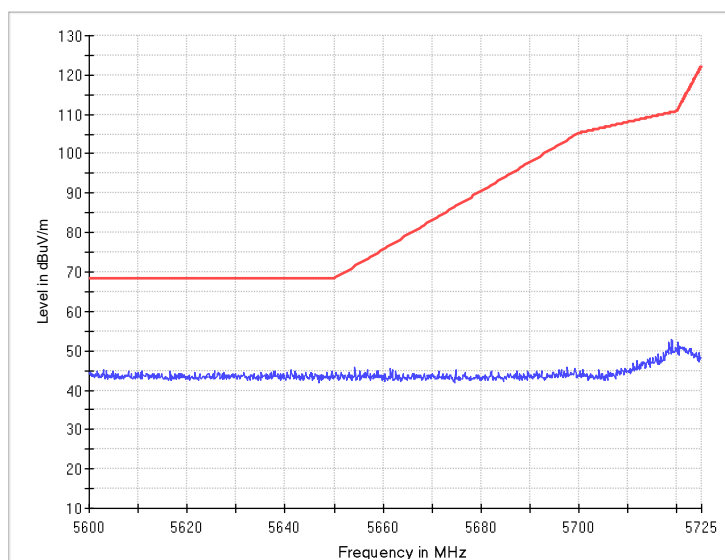


Radiated Emission Band Edge

Channel No.:149

Test Mode: 802.11n

Polarization: H

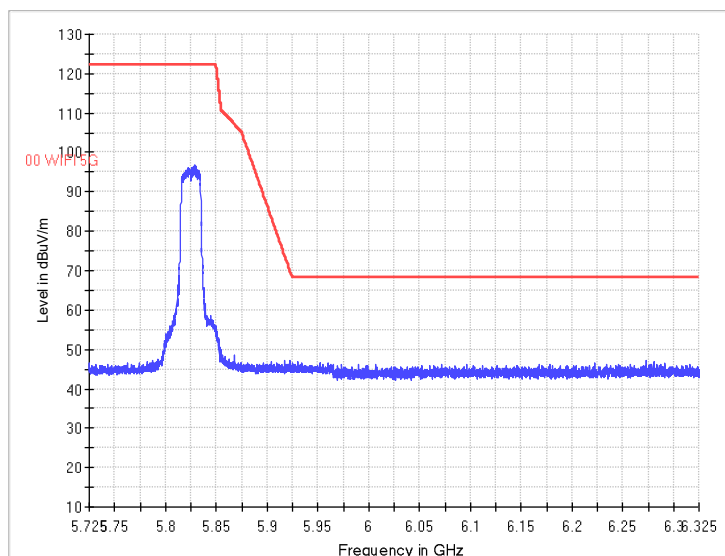


Radiated Emission Band Edge

Channel No.:165

Test Mode: 802.11n

Polarization: V

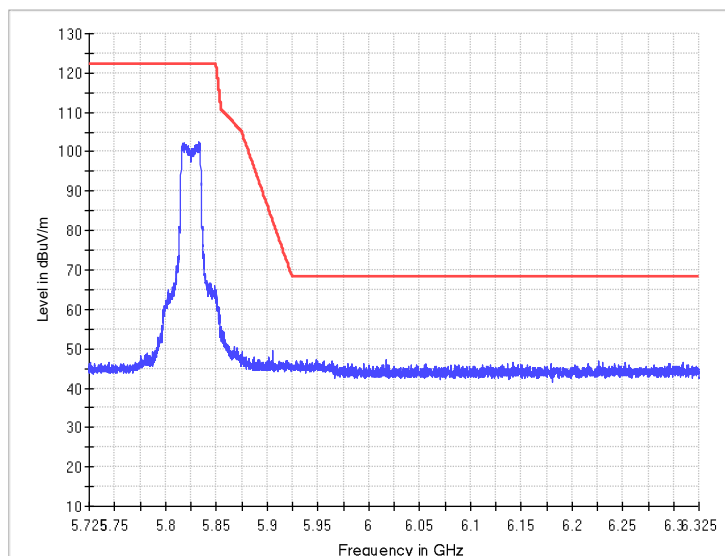


Radiated Emission Band Edge

Channel No.:165

Test Mode: 802.11n

Polarization: H

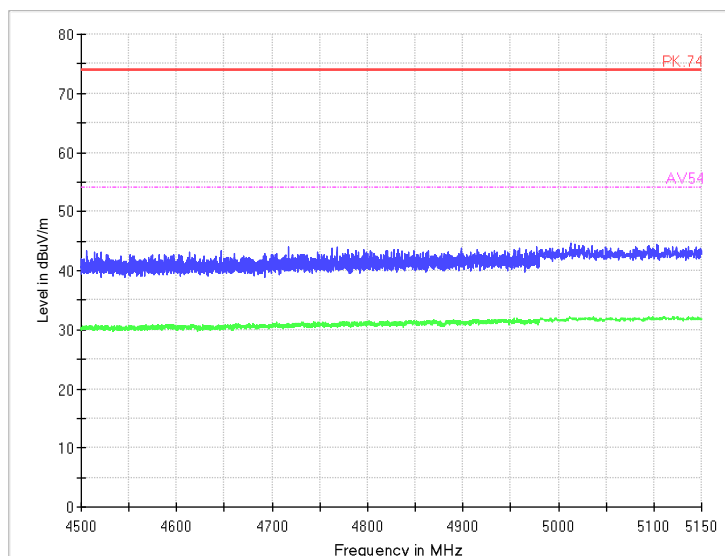


Radiated Emission Band Edge

Channel No.:36

Test Mode: 802.11ac

Polarization: V

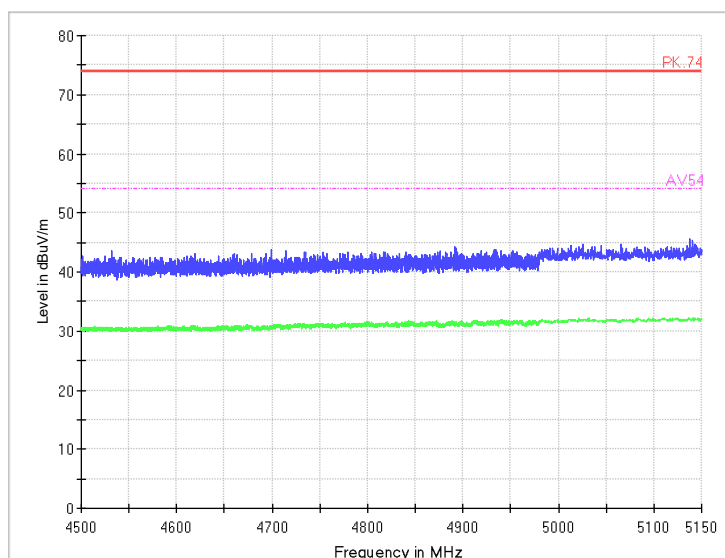


Radiated Emission Band Edge

Channel No.:36

Test Mode: 802.11ac

Polarization: H

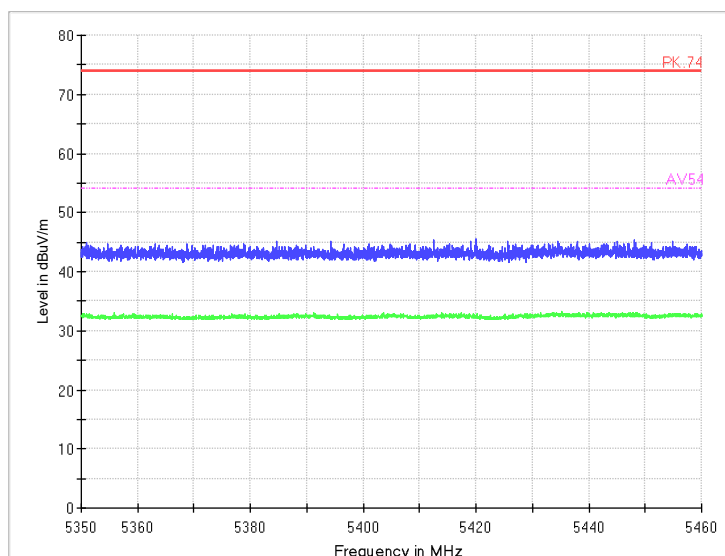


Radiated Emission Band Edge

Channel No.:64

Test Mode: 802.11ac

Polarization: V

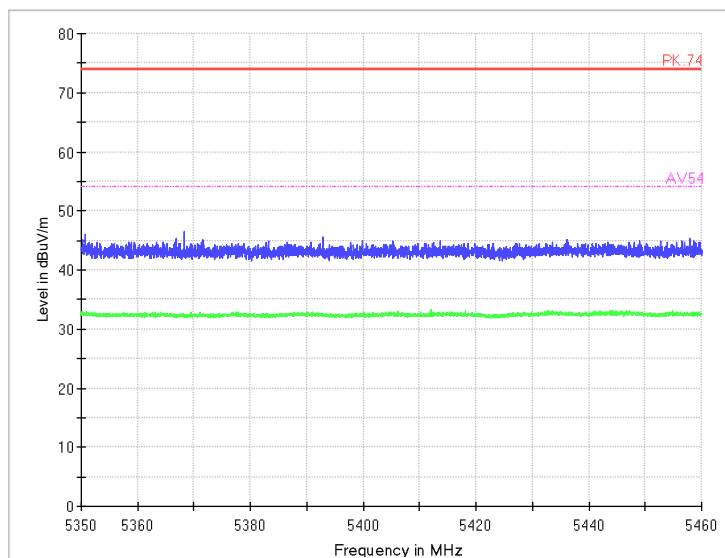


Radiated Emission Band Edge

Channel No.:64

Test Mode: 802.11ac

Polarization: H

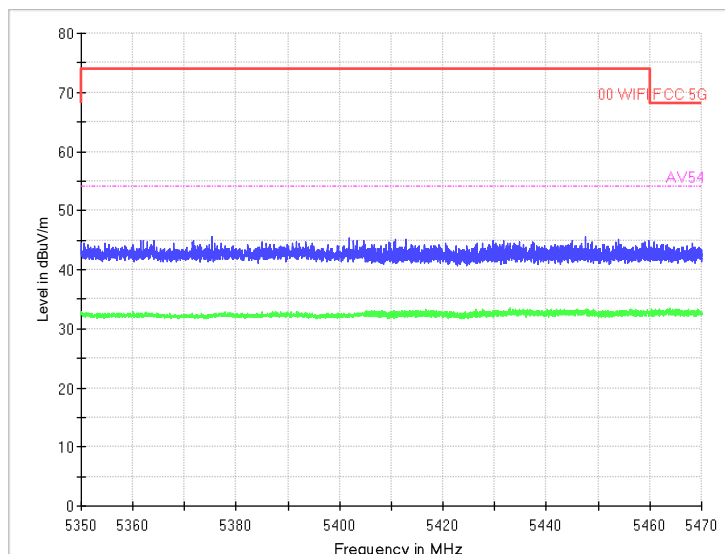


Radiated Emission Band Edge

Channel No.:100

Test Mode: 802.11ac

Polarization: V

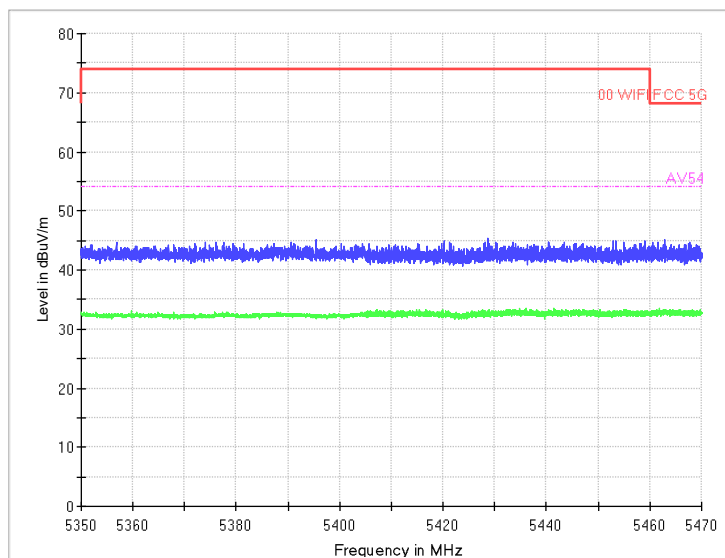


Radiated Emission Band Edge

Channel No.:100

Test Mode: 802.11ac

Polarization: H

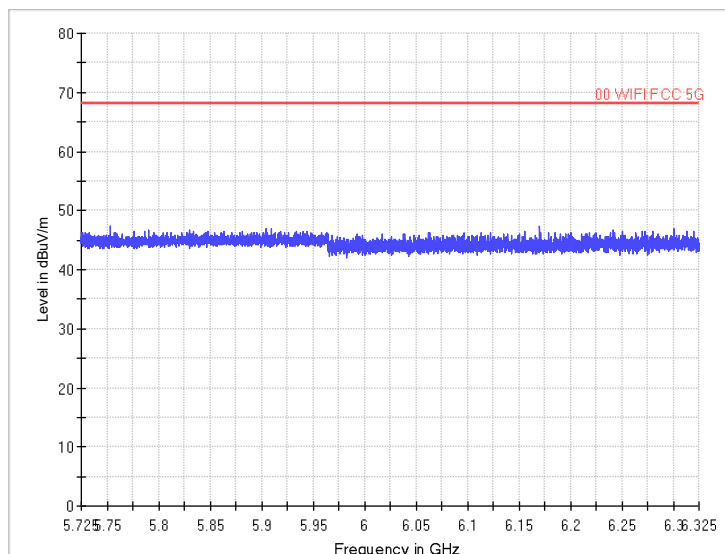


Radiated Emission Band Edge

Channel No.:140

Test Mode: 802.11ac

Polarization: V

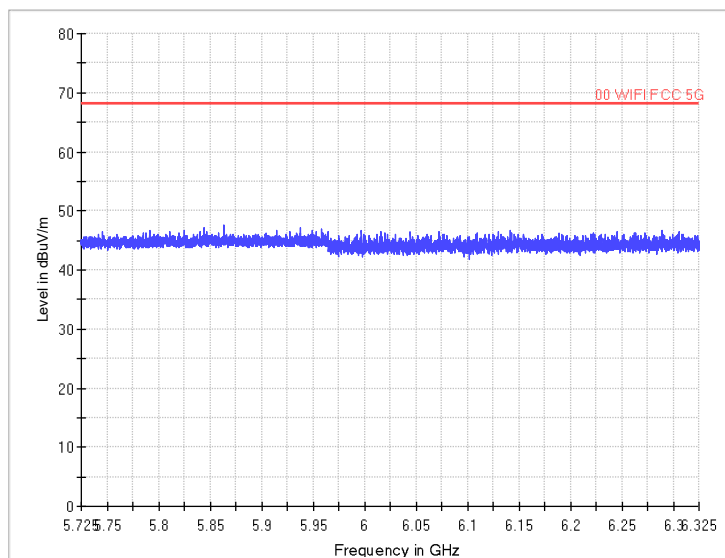


Radiated Emission Band Edge

Channel No.:140

Test Mode: 802.11ac

Polarization: H

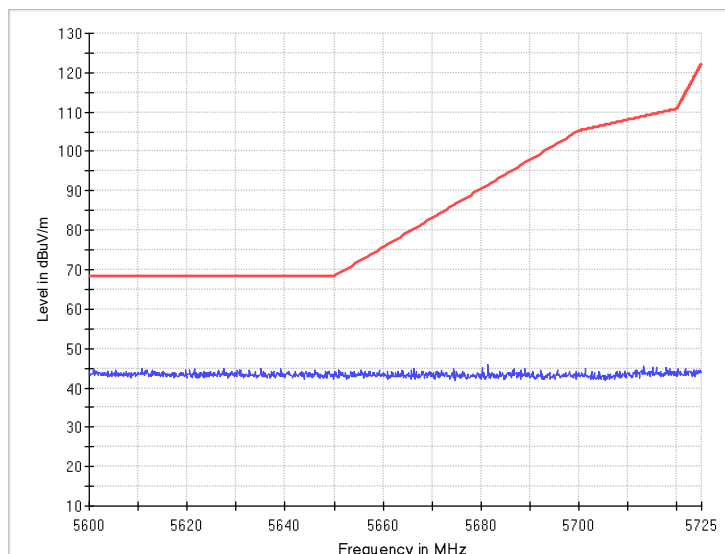


Radiated Emission Band Edge

Channel No.:149

Test Mode: 802.11ac

Polarization: V

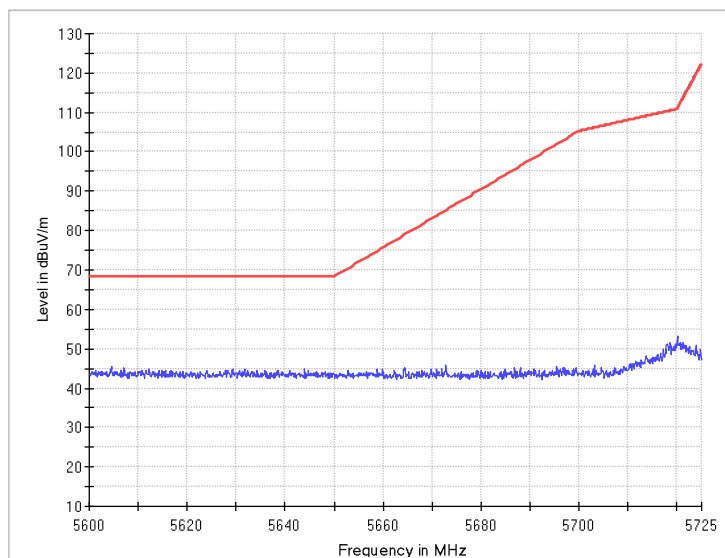


Radiated Emission Band Edge

Channel No.:149

Test Mode: 802.11ac

Polarization: H

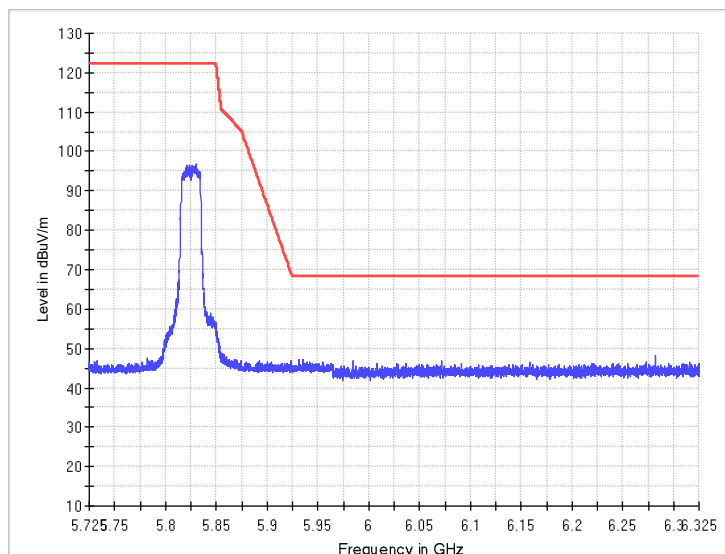


Radiated Emission Band Edge

Channel No.:165

Test Mode: 802.11ac

Polarization: V

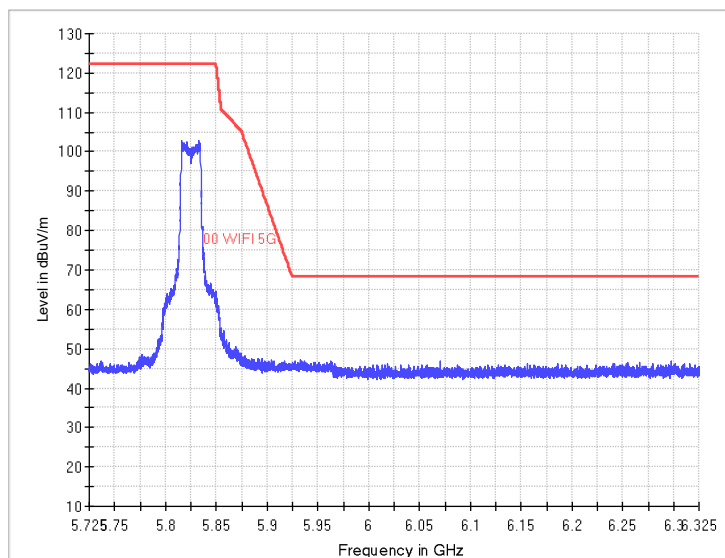


Radiated Emission Band Edge

Channel No.:165

Test Mode: 802.11ac

Polarization: H

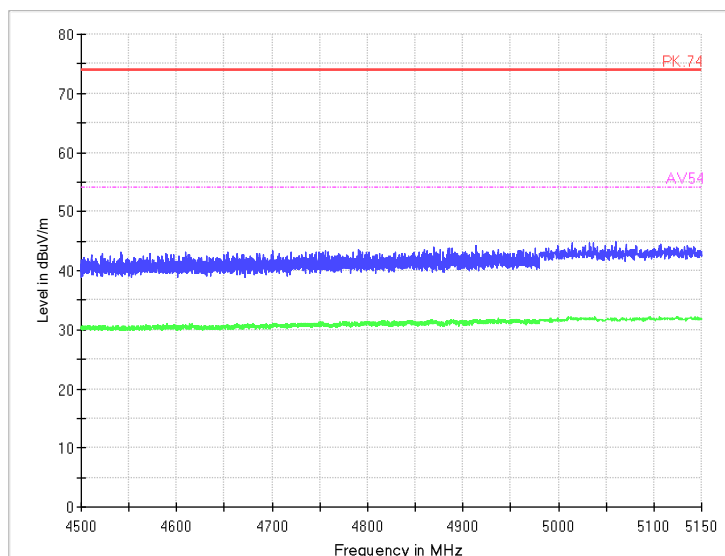


Radiated Emission Band Edge

Channel No.:36

Test Mode: 802.11ax

Polarization: V

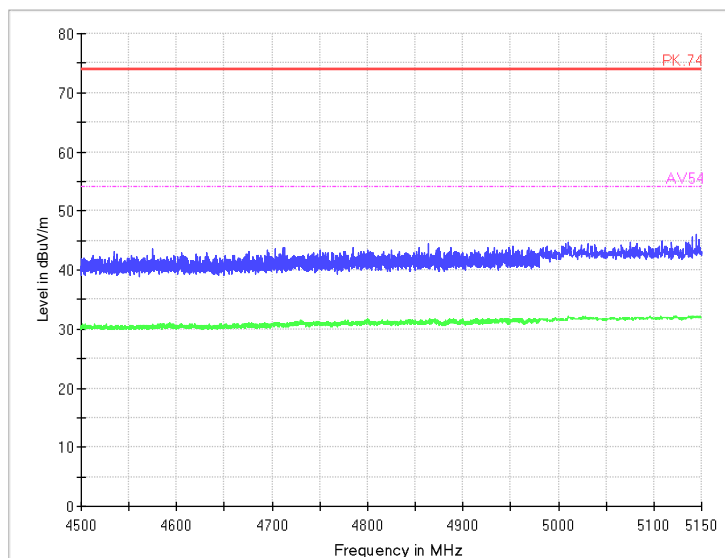


Radiated Emission Band Edge

Channel No.:36

Test Mode: 802.11ax

Polarization: H

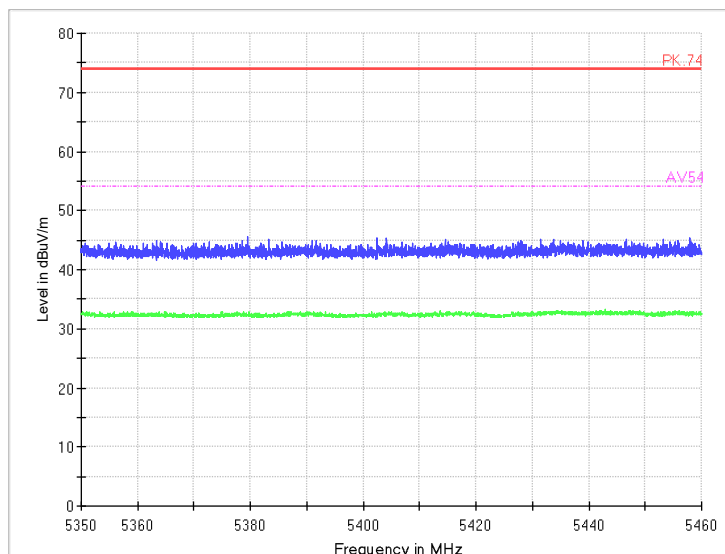


Radiated Emission Band Edge

Channel No.:64

Test Mode: 802.11ax

Polarization: V

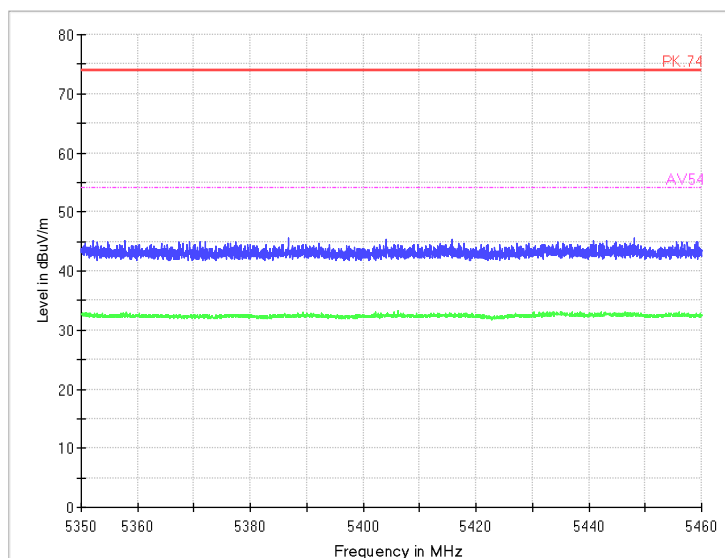


Radiated Emission Band Edge

Channel No.:64

Test Mode: 802.11ax

Polarization: H

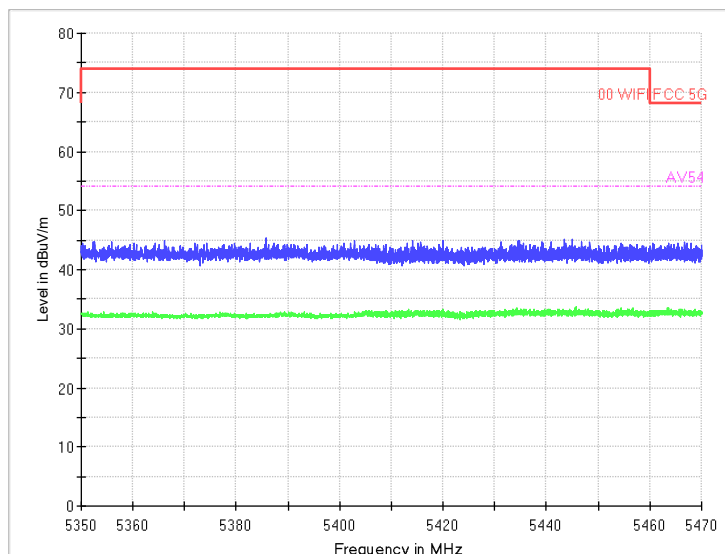


Radiated Emission Band Edge

Channel No.:100

Test Mode: 802.11ax

Polarization: V

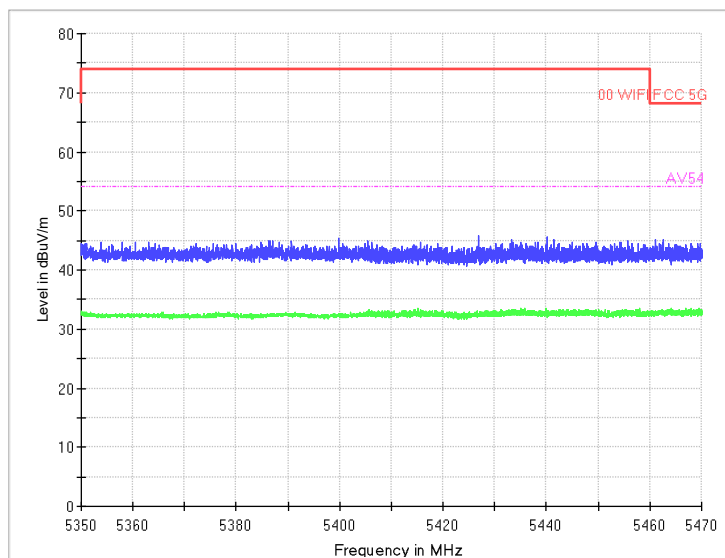


Radiated Emission Band Edge

Channel No.:100

Test Mode: 802.11ax

Polarization: H

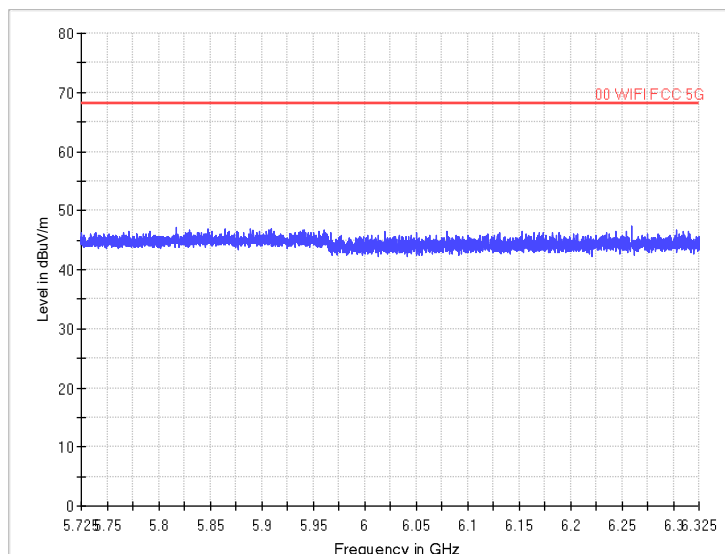


Radiated Emission Band Edge

Channel No.:140

Test Mode: 802.11ax

Polarization: V

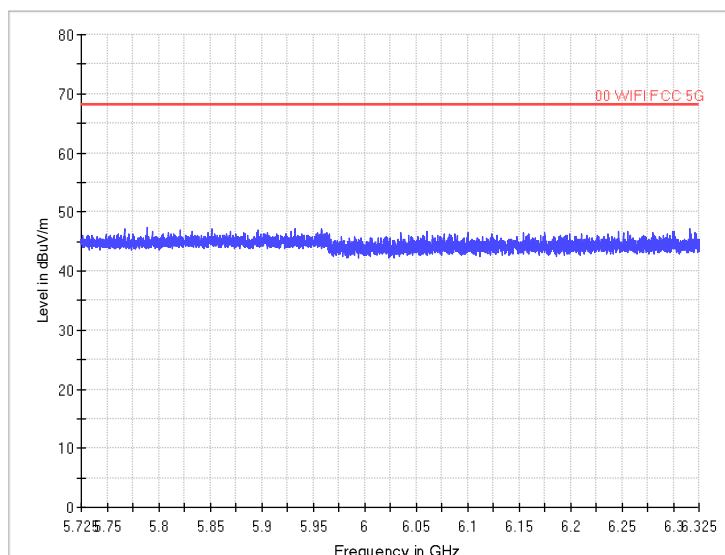


Radiated Emission Band Edge

Channel No.:140

Test Mode: 802.11ax

Polarization: H

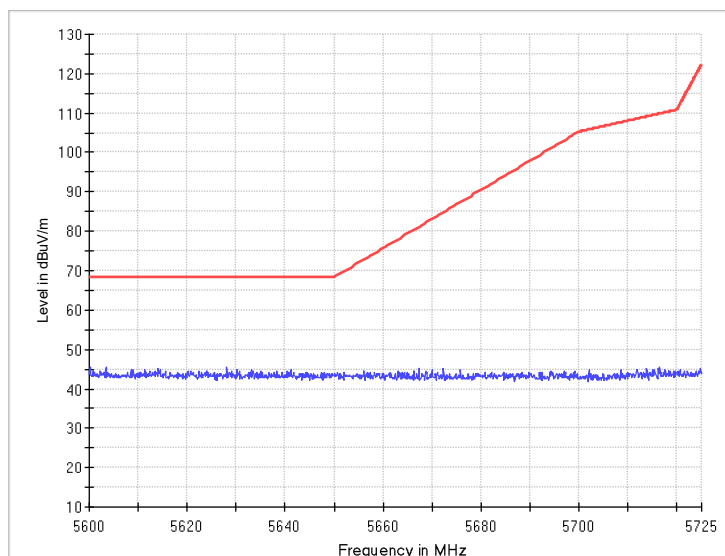


Radiated Emission Band Edge

Channel No.:149

Test Mode: 802.11ax

Polarization: V

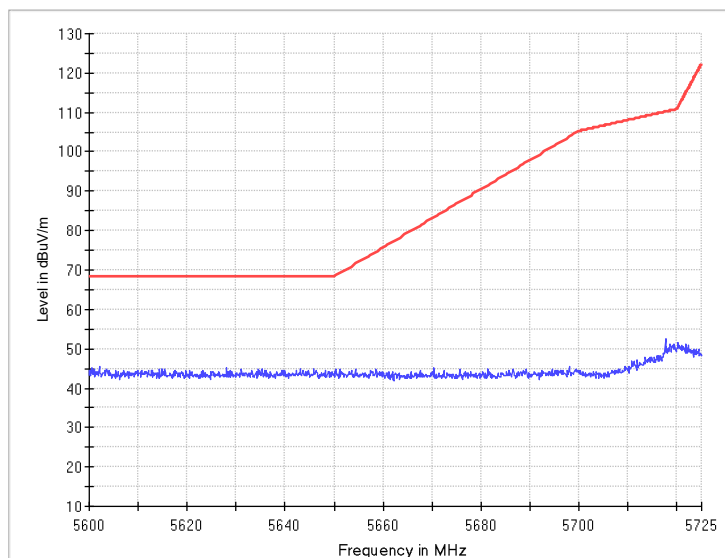


Radiated Emission Band Edge

Channel No.:149

Test Mode: 802.11ax

Polarization: H

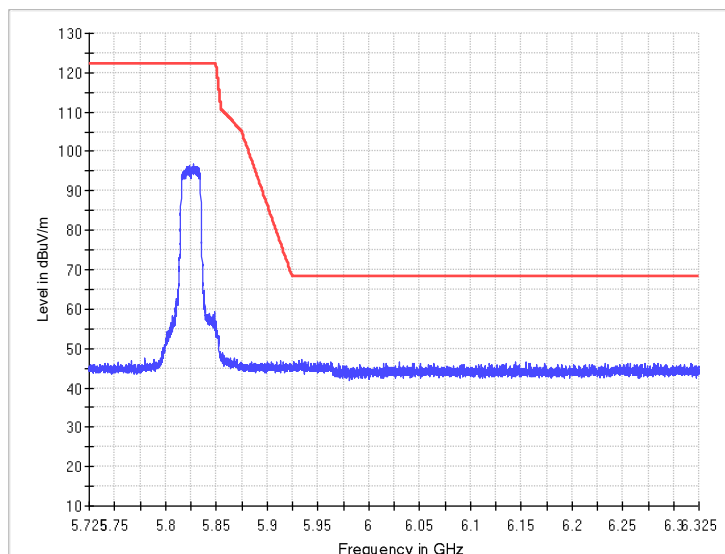


Radiated Emission Band Edge

Channel No.:165

Test Mode: 802.11ax

Polarization: V

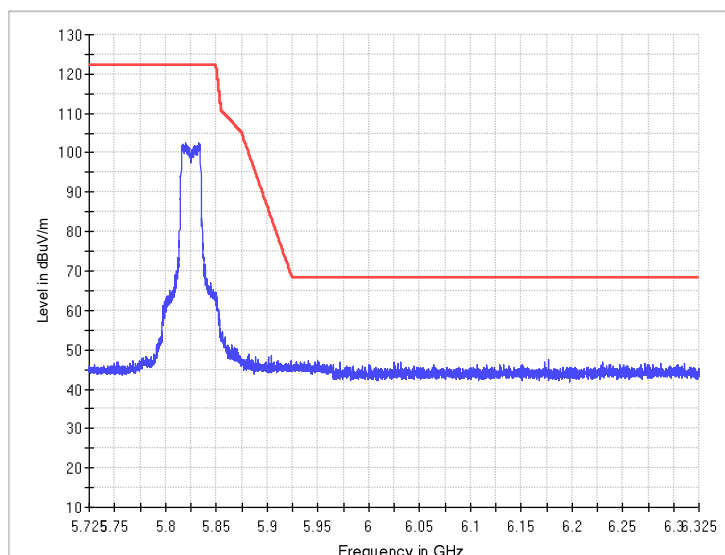

Radiated Emission Band Edge

Channel No.:165


Test Mode: 802.11ax

Polarization: H



20M

Partial RU (Tone26)

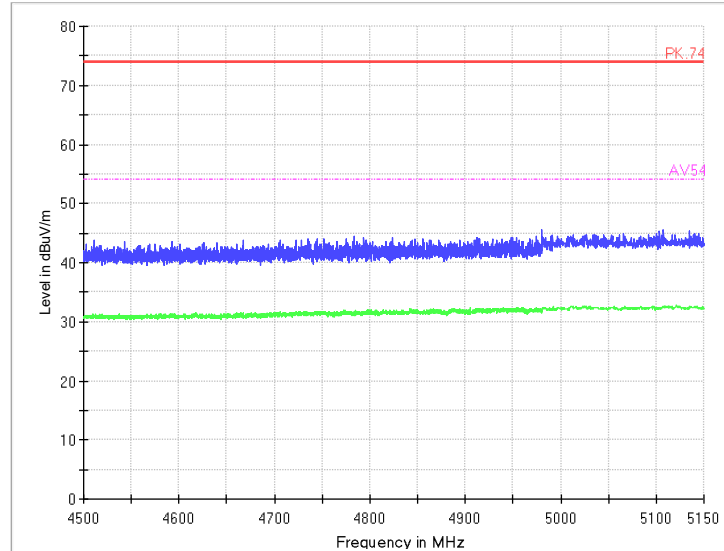


Radiated Emission Band Edge

Channel No.:36

Test Mode: 802.11ax

Polarization: V

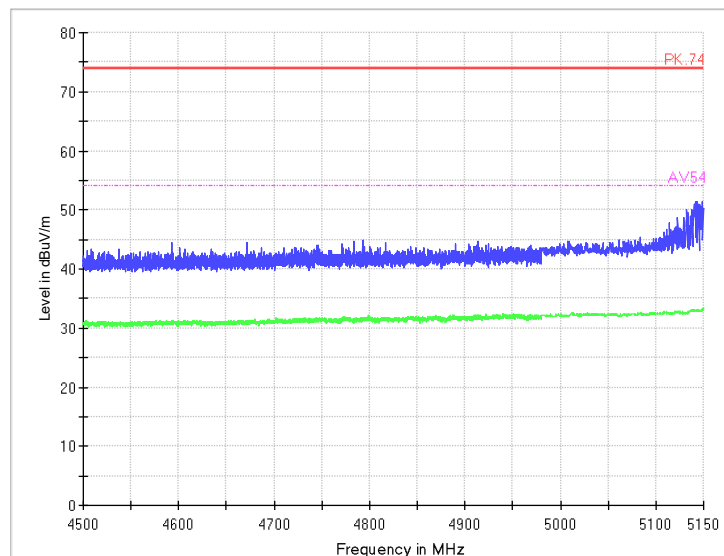


Radiated Emission Band Edge

Channel No.:36

Test Mode: 802.11ax

Polarization: H

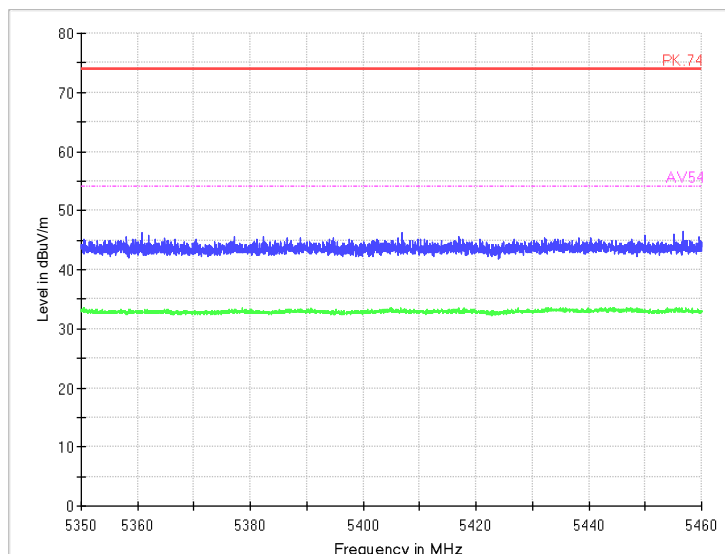


Radiated Emission Band Edge

Channel No.:64

Test Mode: 802.11ax

Polarization: V

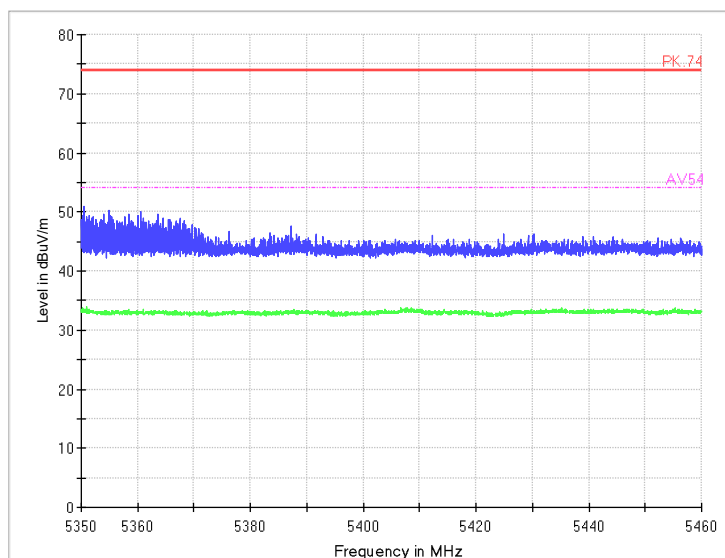


Radiated Emission Band Edge

Channel No.:64

Test Mode: 802.11ax

Polarization: H

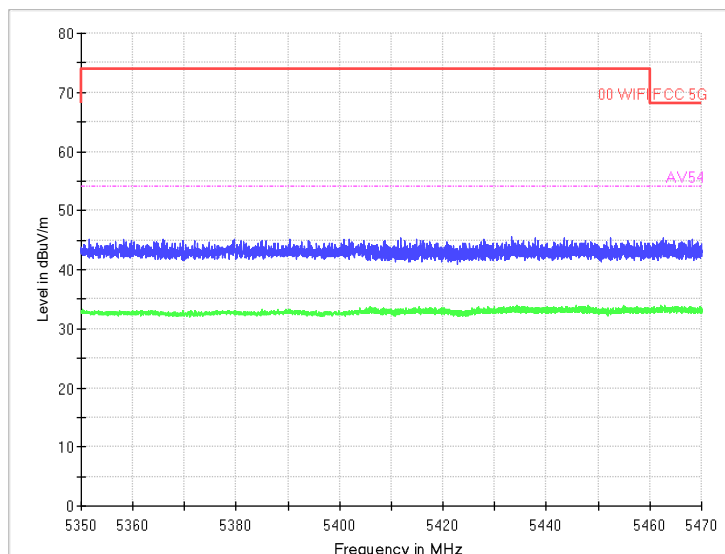


Radiated Emission Band Edge

Channel No.:100

Test Mode: 802.11ax

Polarization: V

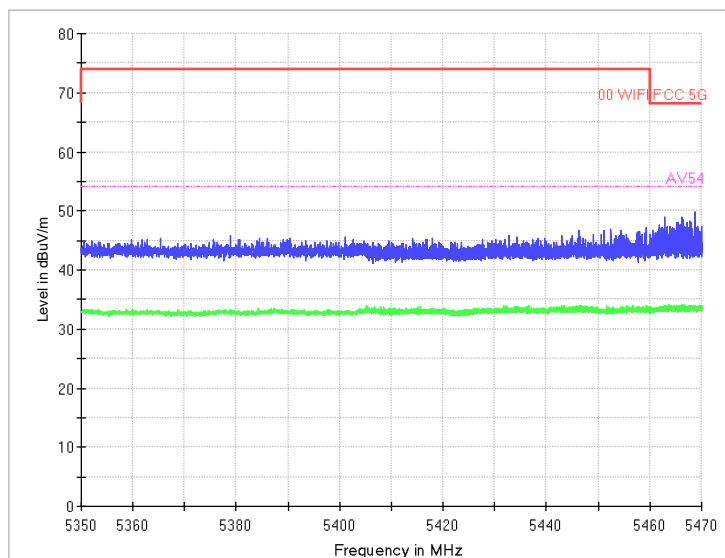


Radiated Emission Band Edge

Channel No.:100

Test Mode: 802.11ax

Polarization: H

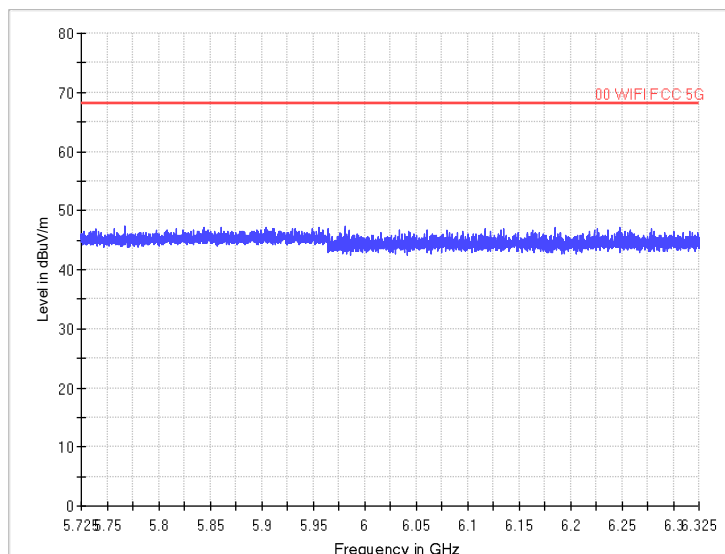


Radiated Emission Band Edge

Channel No.:140

Test Mode: 802.11ax

Polarization: V

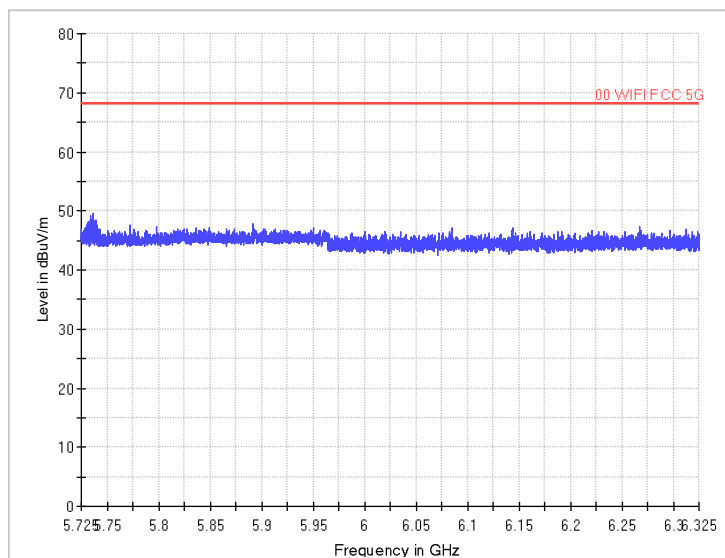


Radiated Emission Band Edge

Channel No.:140

Test Mode: 802.11ax

Polarization: H

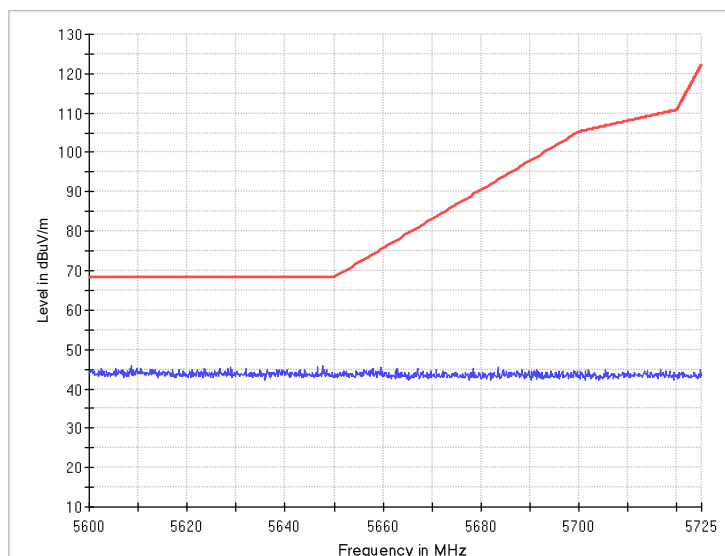


Radiated Emission Band Edge

Channel No.:149

Test Mode: 802.11ax

Polarization: V

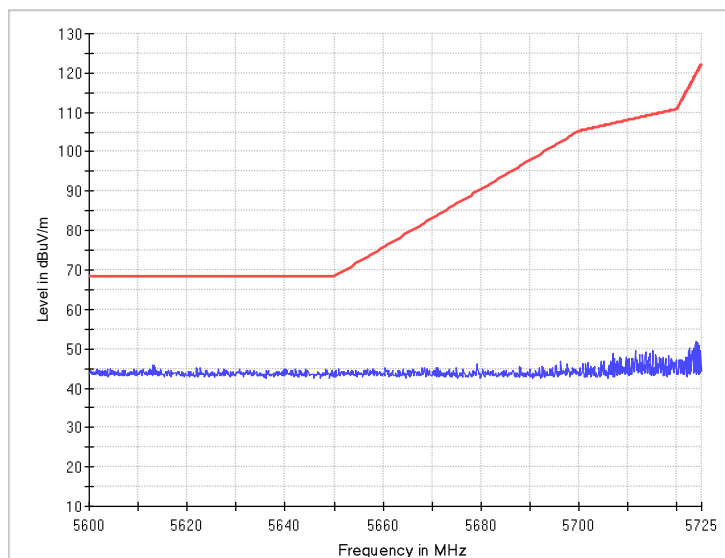


Radiated Emission Band Edge

Channel No.:149

Test Mode: 802.11ax

Polarization: H

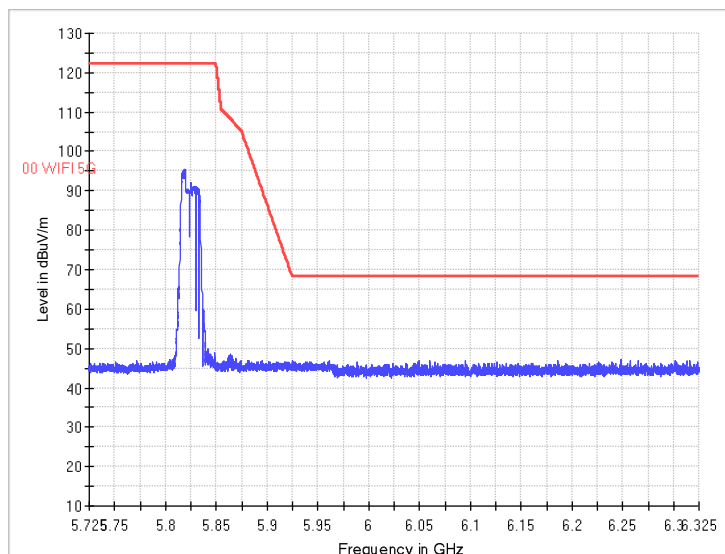


Radiated Emission Band Edge

Channel No.:165

Test Mode: 802.11ax

Polarization: V

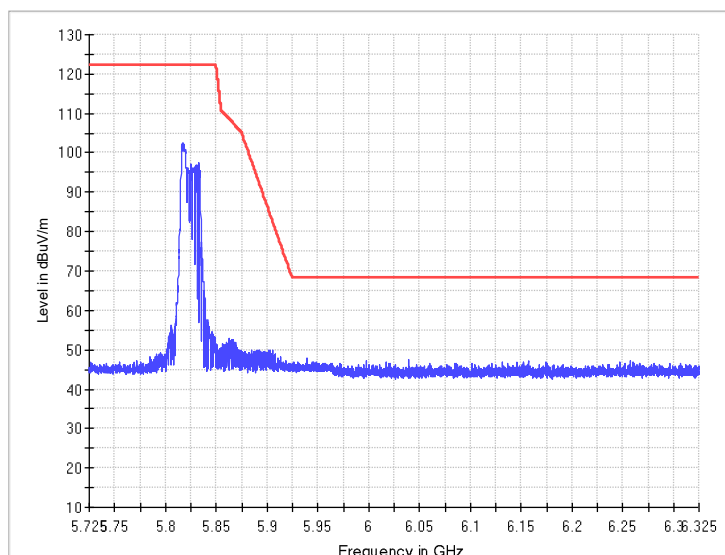


Radiated Emission Band Edge

Channel No.:165

Test Mode: 802.11ax

Polarization: H

40M

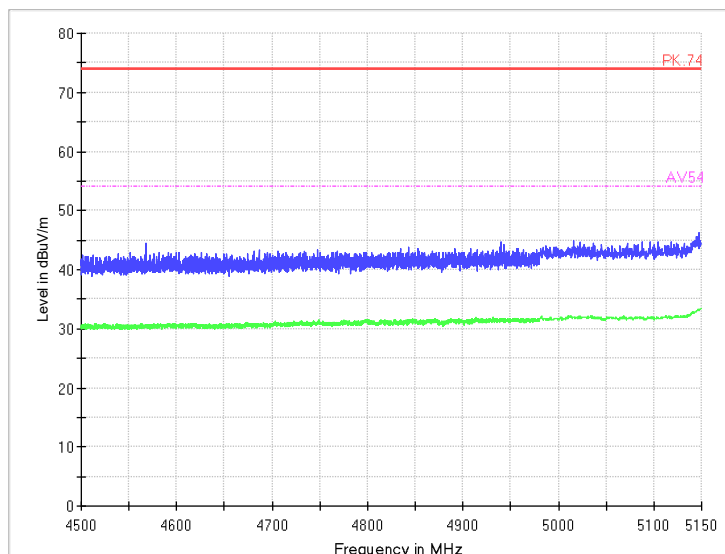


Radiated Emission Band Edge

Channel No.:38

Test Mode: 802.11n

Polarization: V

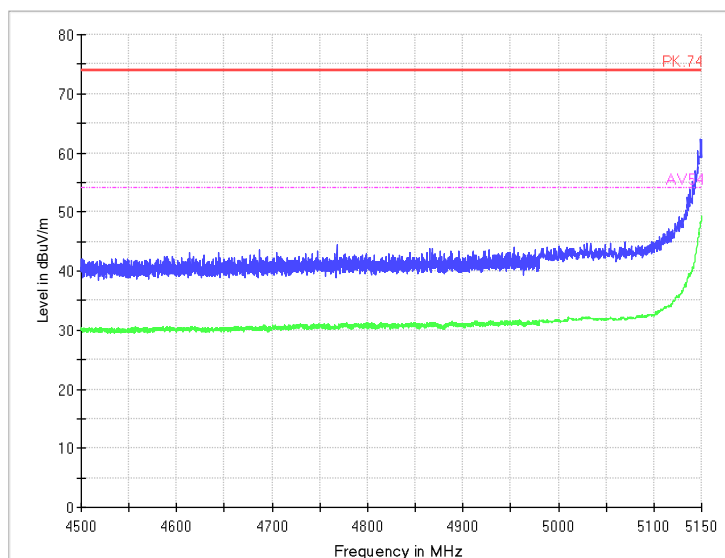


Radiated Emission Band Edge

Channel No.:38

Test Mode: 802.11n

Polarization: H

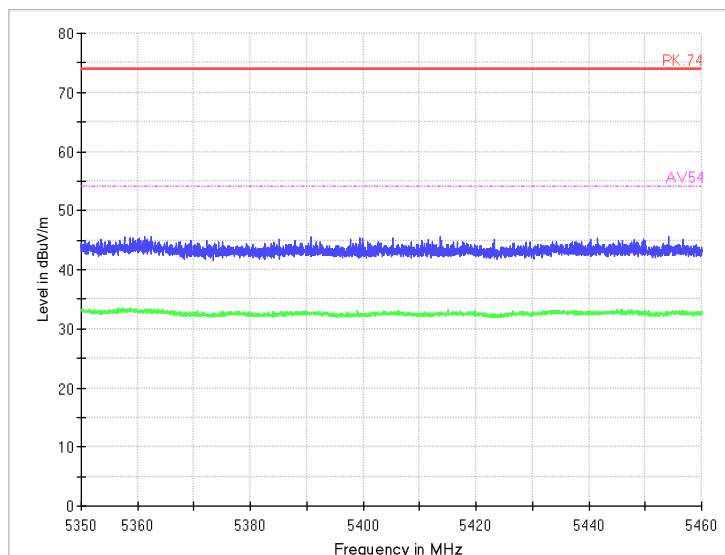


Radiated Emission Band Edge

Channel No.:62

Test Mode: 802.11n

Polarization: V

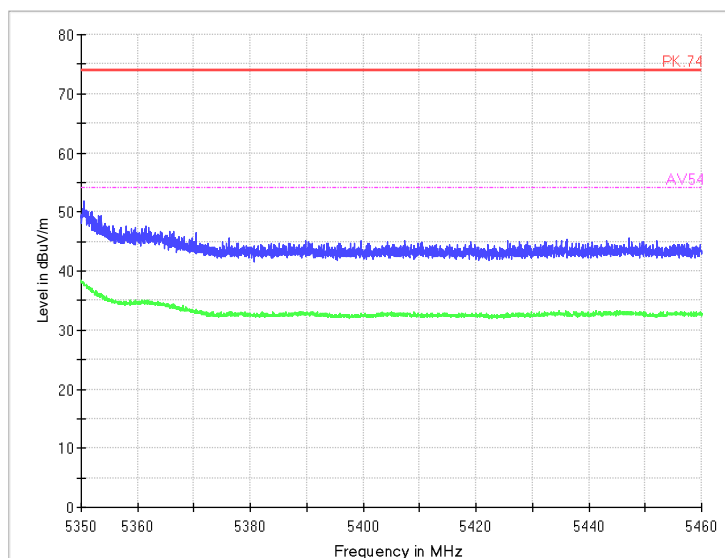


Radiated Emission Band Edge

Channel No.:62

Test Mode: 802.11n

Polarization: H

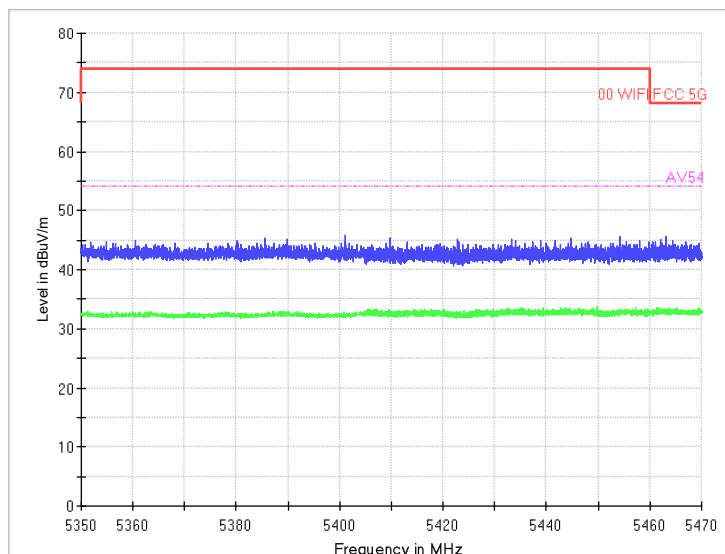


Radiated Emission Band Edge

Channel No.:102

Test Mode: 802.11n

Polarization: V

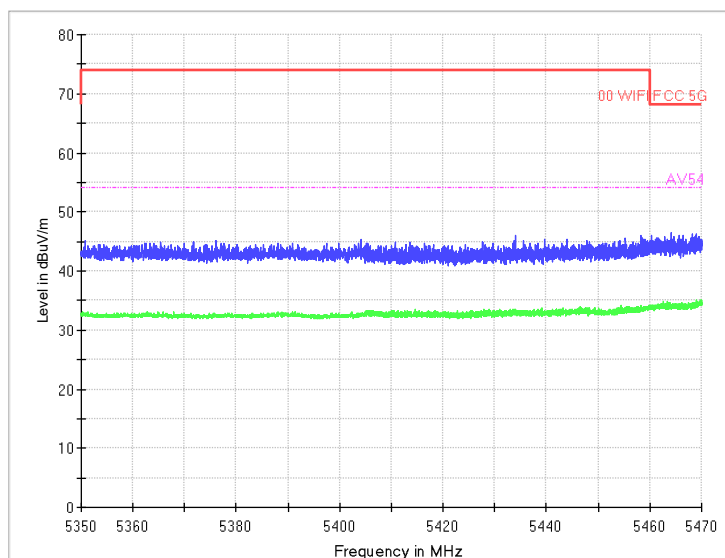


Radiated Emission Band Edge

Channel No.:102

Test Mode: 802.11n

Polarization: H

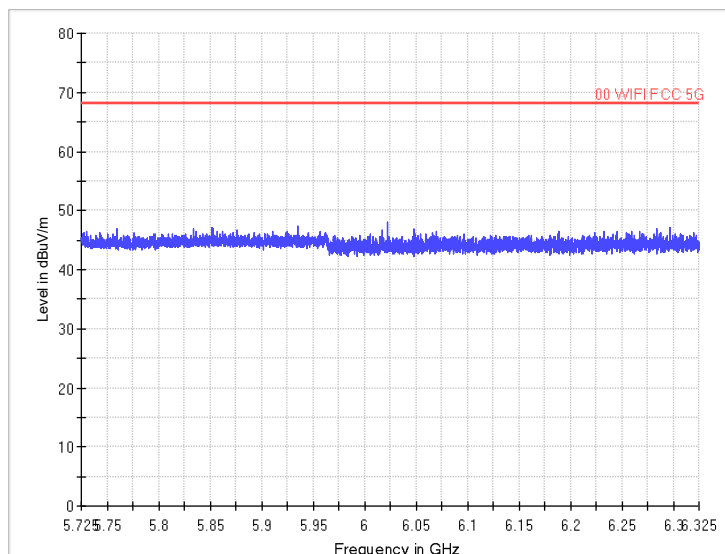


Radiated Emission Band Edge

Channel No.:134

Test Mode: 802.11n

Polarization: V

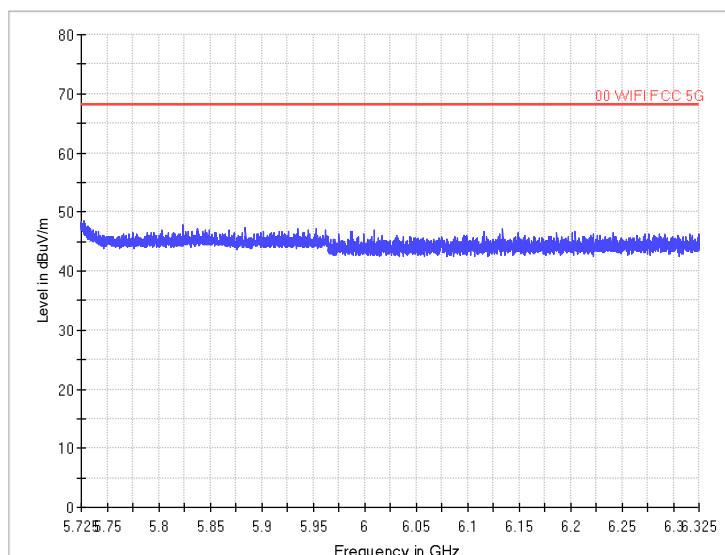


Radiated Emission Band Edge

Channel No.:134

Test Mode: 802.11n

Polarization: H

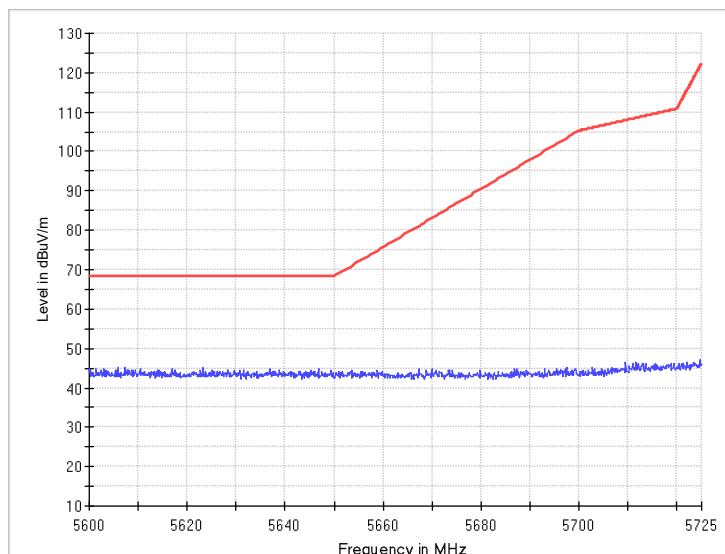


Radiated Emission Band Edge

Channel No.:151

Test Mode: 802.11n

Polarization: V

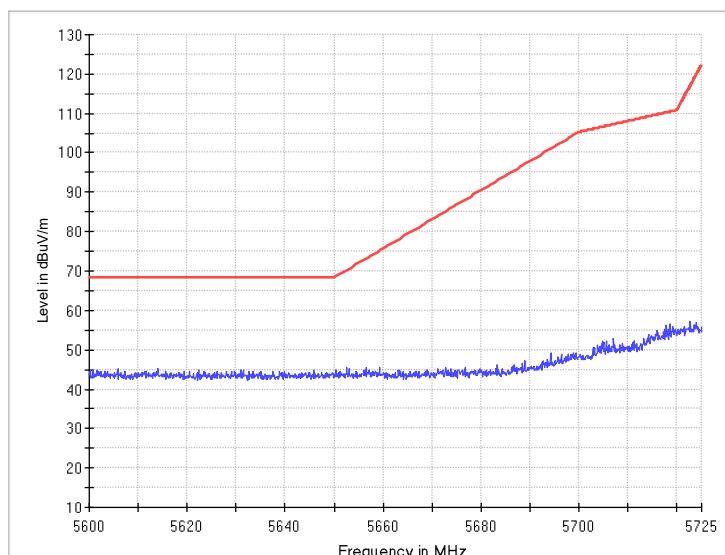


Radiated Emission Band Edge

Channel No.:151

Test Mode: 802.11n

Polarization: H

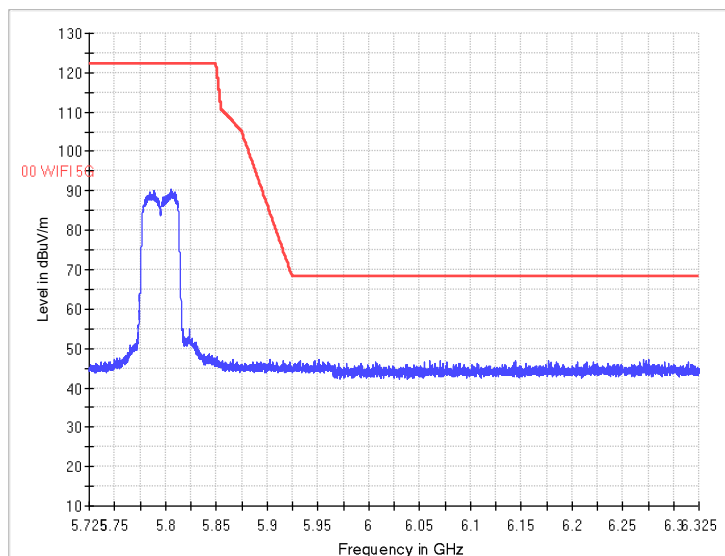


Radiated Emission Band Edge

Channel No.:159

Test Mode: 802.11n

Polarization: V

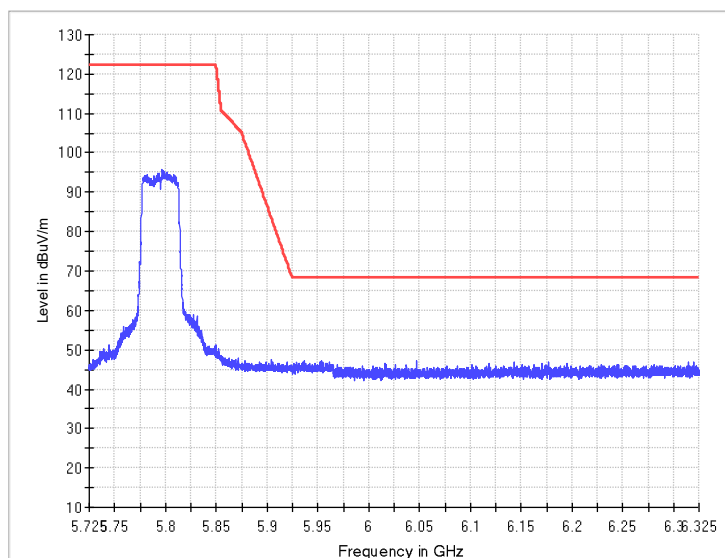


Radiated Emission Band Edge

Channel No.:159

Test Mode: 802.11n

Polarization: H

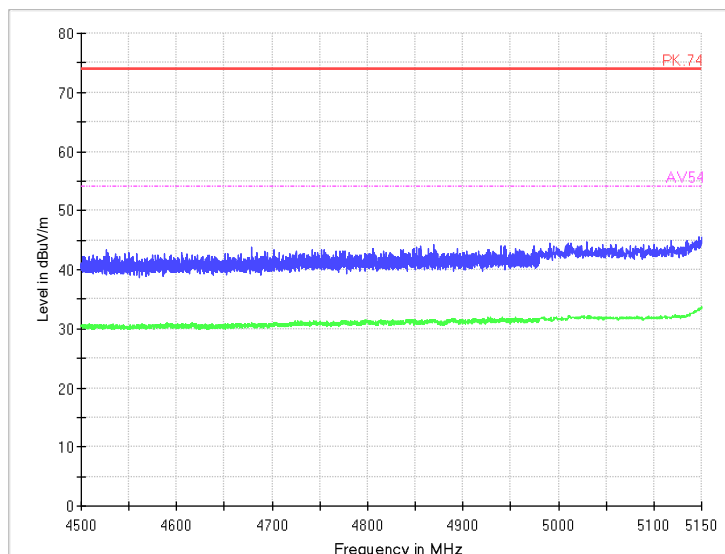


Radiated Emission Band Edge

Channel No.:38

Test Mode: 802.11ac

Polarization: V

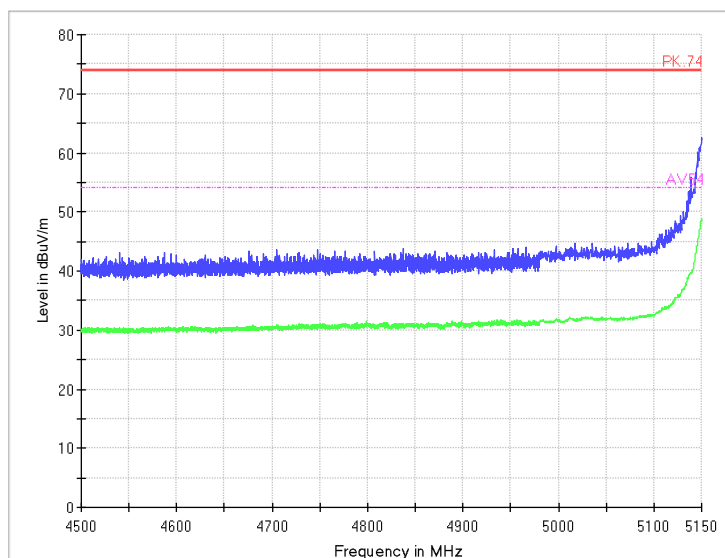


Radiated Emission Band Edge

Channel No.:38

Test Mode: 802.11ac

Polarization: H

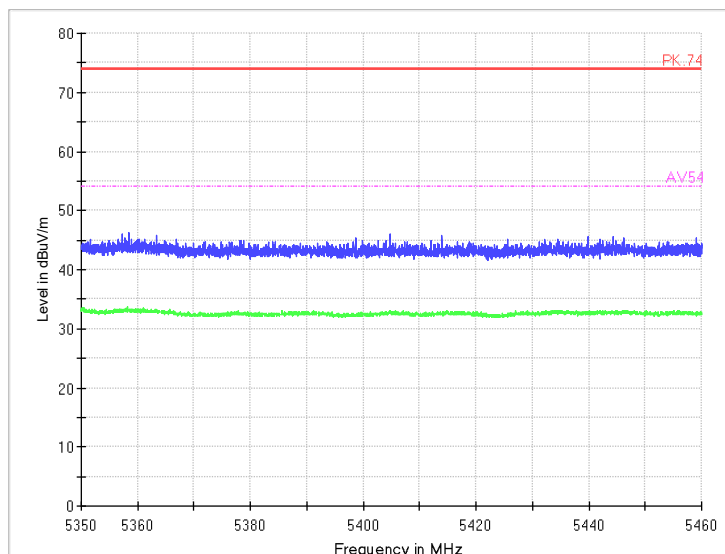


Radiated Emission Band Edge

Channel No.:62

Test Mode: 802.11ac

Polarization: V

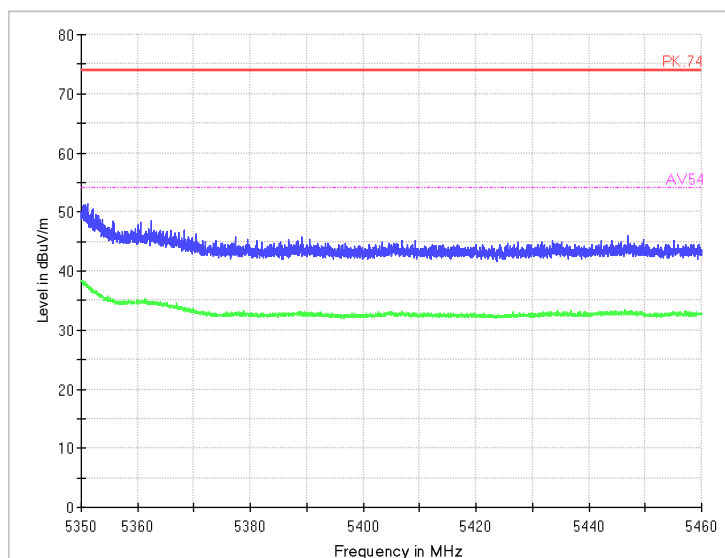


Radiated Emission Band Edge

Channel No.:62

Test Mode: 802.11ac

Polarization: H

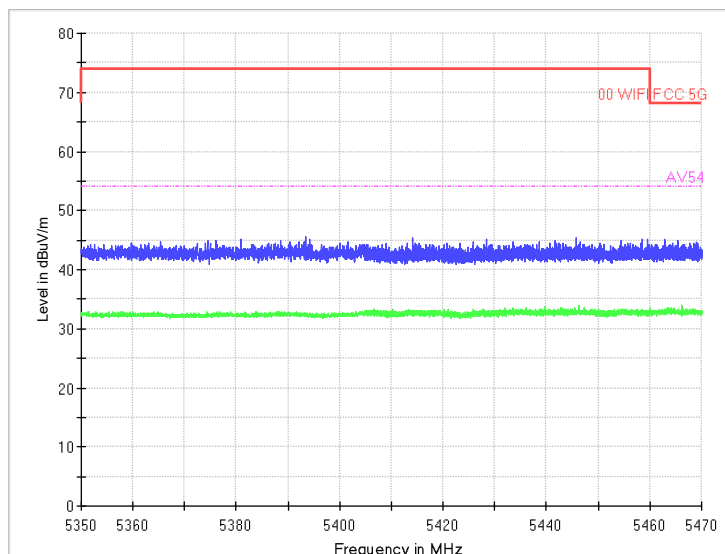


Radiated Emission Band Edge

Channel No.:102

Test Mode: 802.11ac

Polarization: V

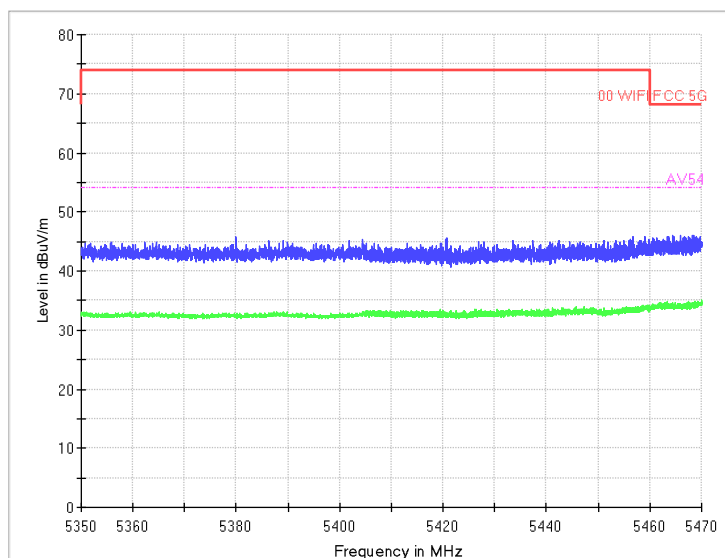


Radiated Emission Band Edge

Channel No.:102

Test Mode: 802.11ac

Polarization: H

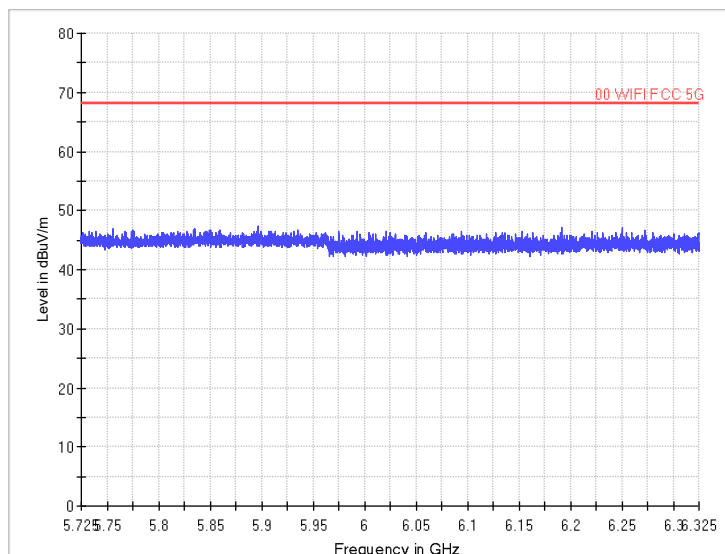


Radiated Emission Band Edge

Channel No.:134

Test Mode: 802.11ac

Polarization: V

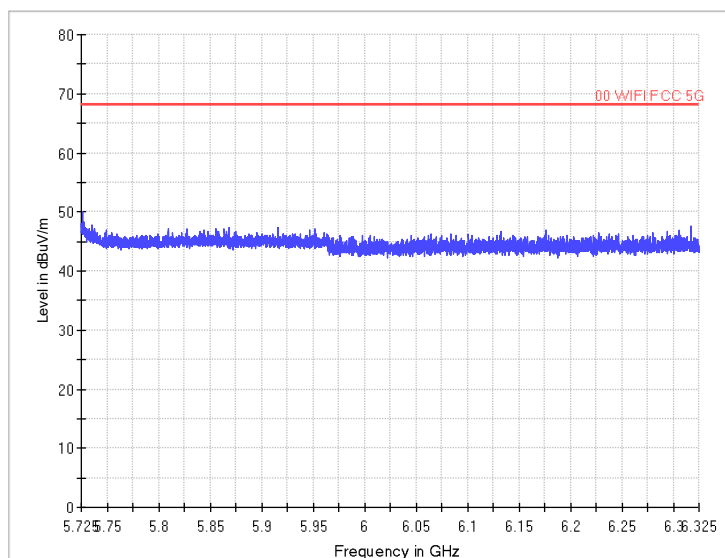


Radiated Emission Band Edge

Channel No.:134

Test Mode: 802.11ac

Polarization: H

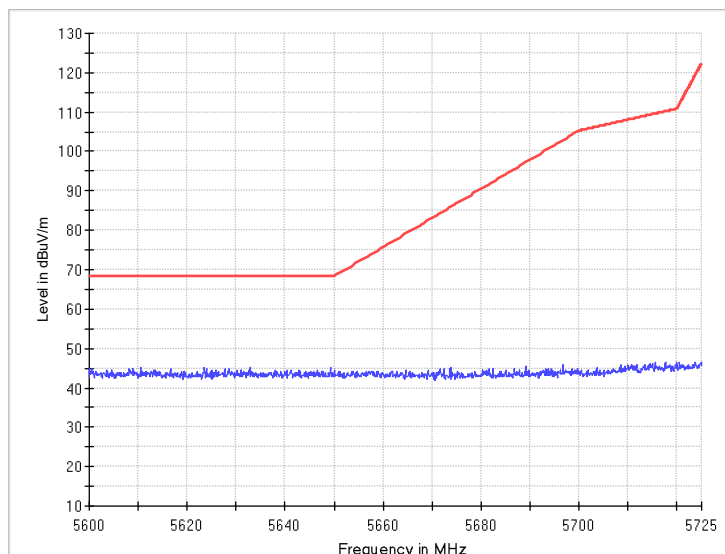


Radiated Emission Band Edge

Channel No.:151

Test Mode: 802.11ac

Polarization: V

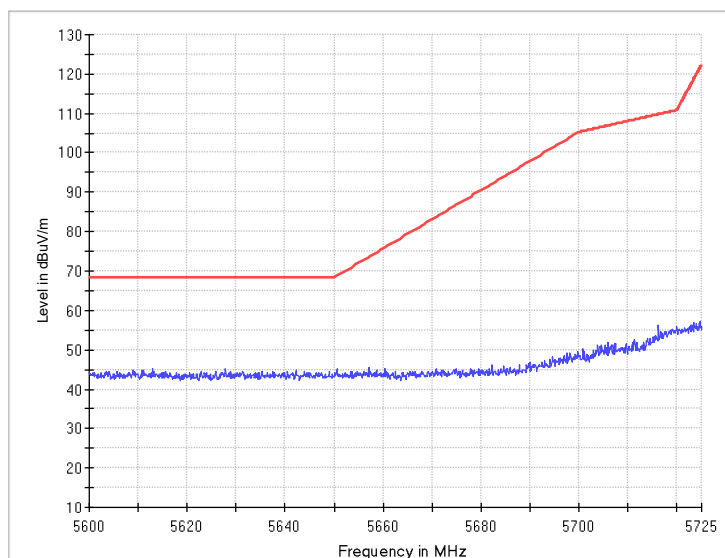


Radiated Emission Band Edge

Channel No.:151

Test Mode: 802.11ac

Polarization: H

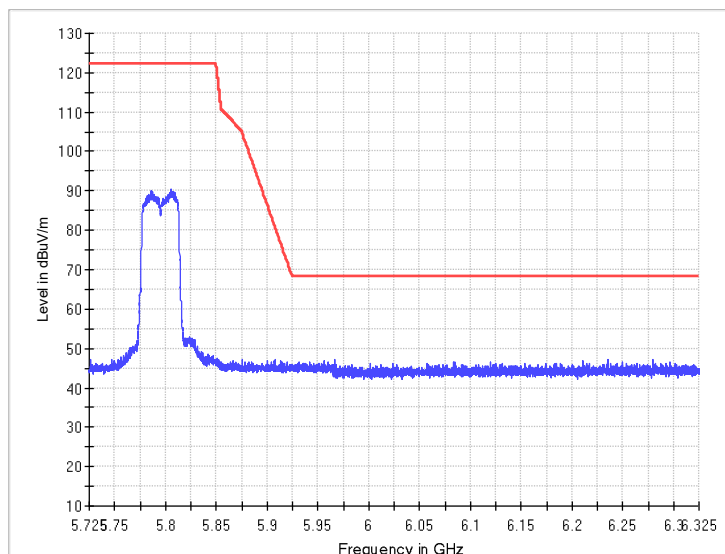


Radiated Emission Band Edge

Channel No.:159

Test Mode: 802.11ac

Polarization: V

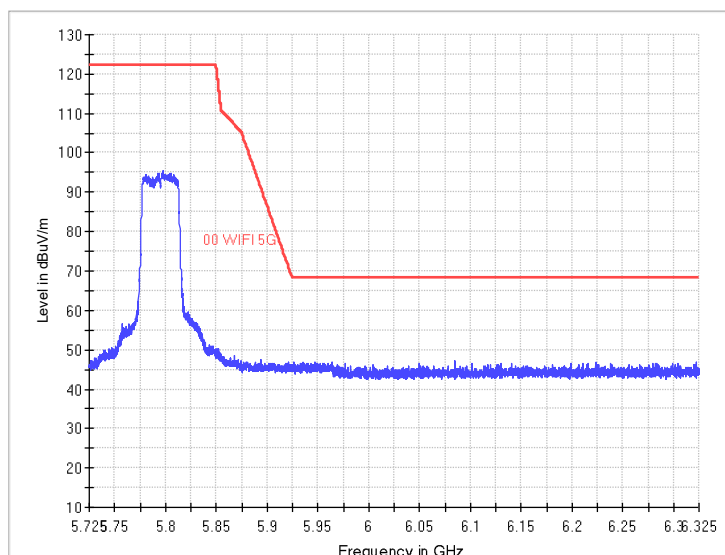


Radiated Emission Band Edge

Channel No.:159

Test Mode: 802.11ac

Polarization: H

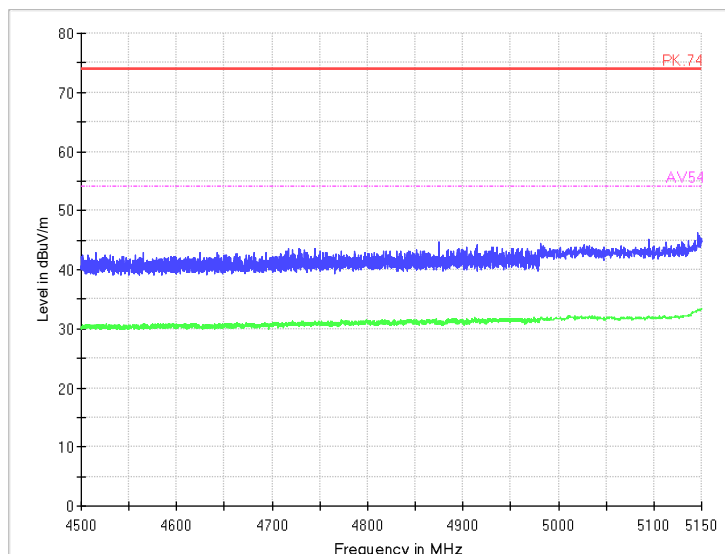


Radiated Emission Band Edge

Channel No.:38

Test Mode: 802.11ax

Polarization: V

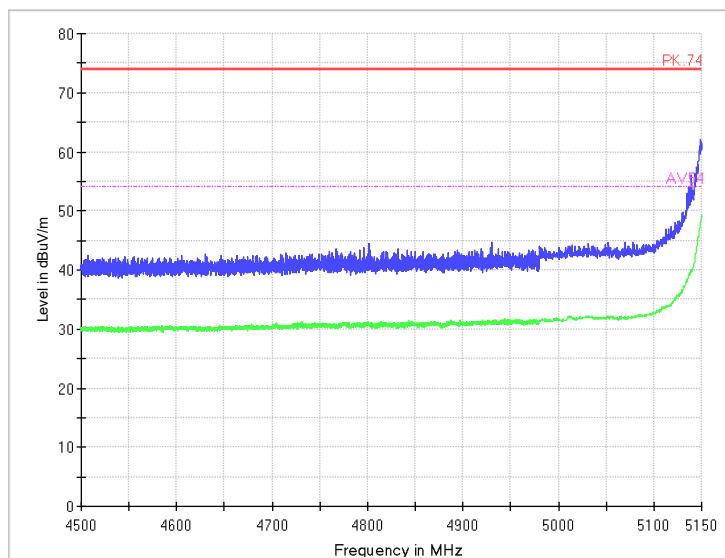


Radiated Emission Band Edge

Channel No.:38

Test Mode: 802.11ax

Polarization: H

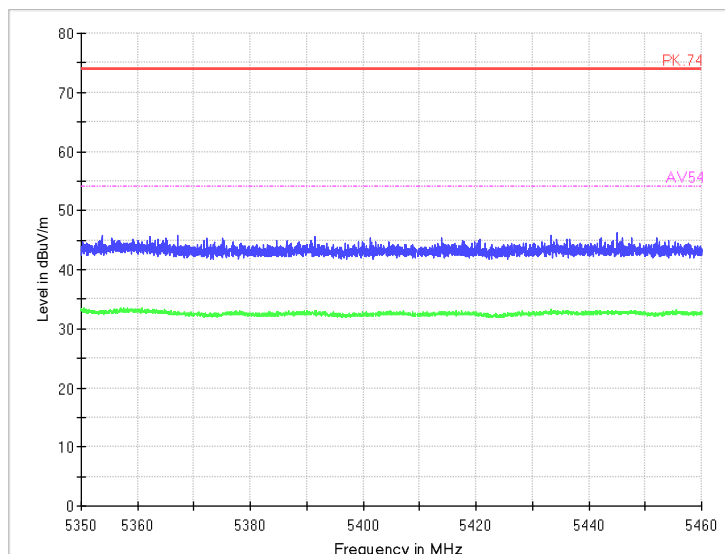


Radiated Emission Band Edge

Channel No.:62

Test Mode: 802.11ax

Polarization: V

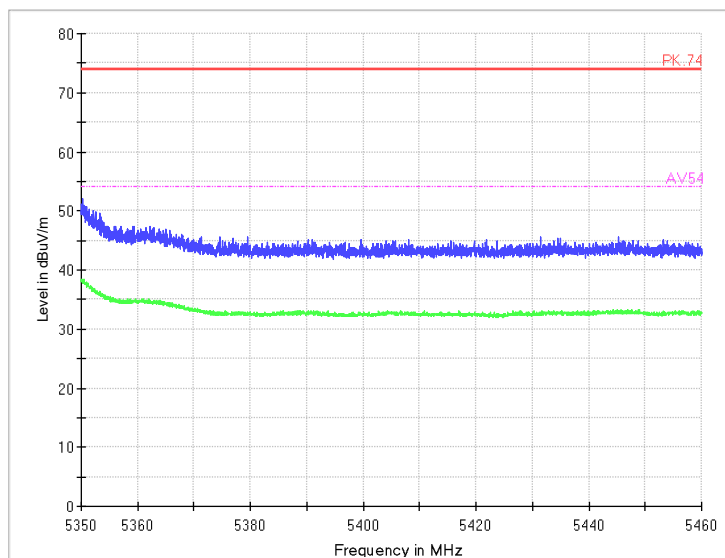


Radiated Emission Band Edge

Channel No.:62

Test Mode: 802.11ax

Polarization: H

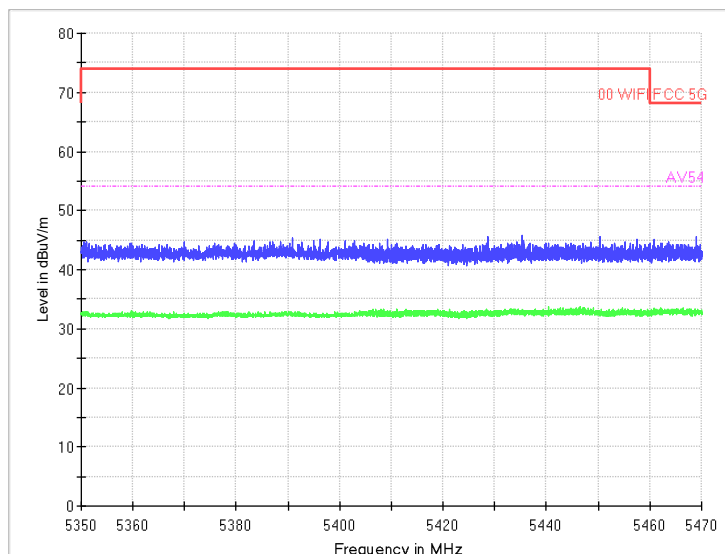


Radiated Emission Band Edge

Channel No.:102

Test Mode: 802.11ax

Polarization: V

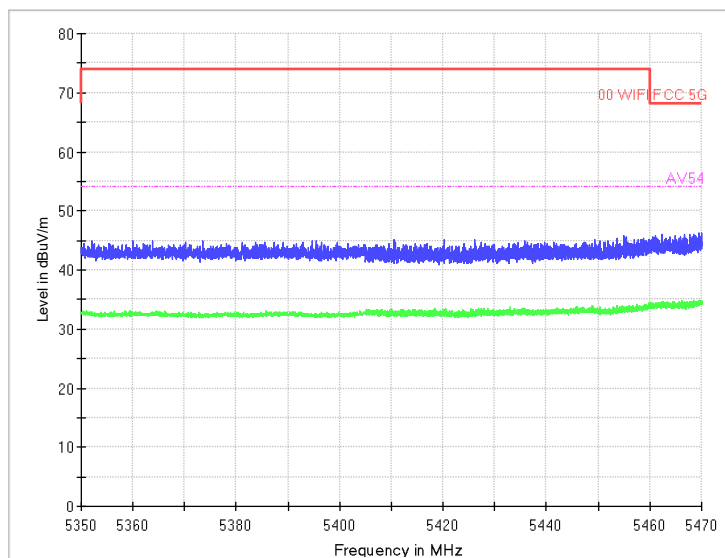


Radiated Emission Band Edge

Channel No.:102

Test Mode: 802.11ax

Polarization: H

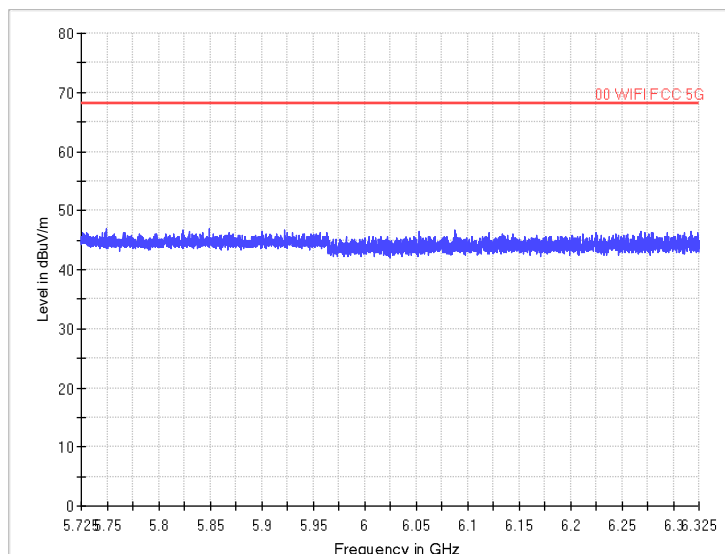


Radiated Emission Band Edge

Channel No.:134

Test Mode: 802.11ax

Polarization: V

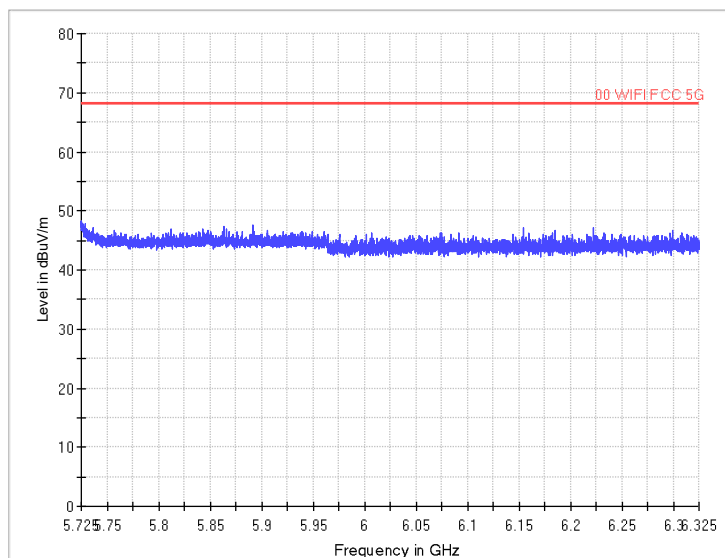


Radiated Emission Band Edge

Channel No.:134

Test Mode: 802.11ax

Polarization: H

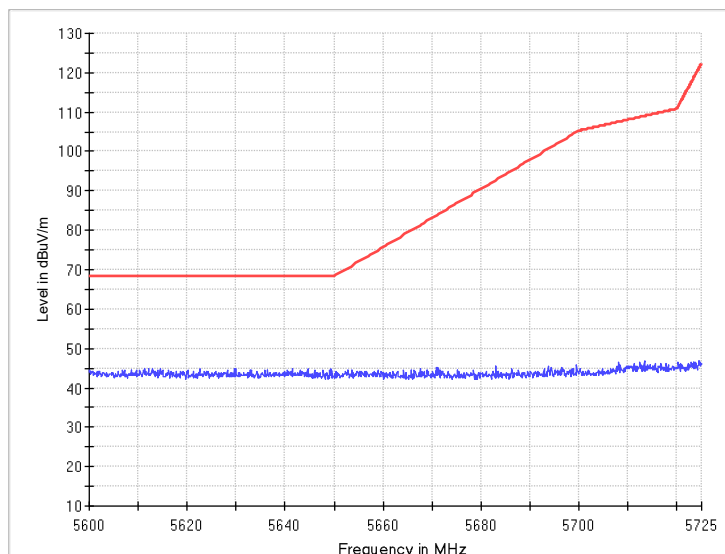


Radiated Emission Band Edge

Channel No.:151

Test Mode: 802.11ax

Polarization: V

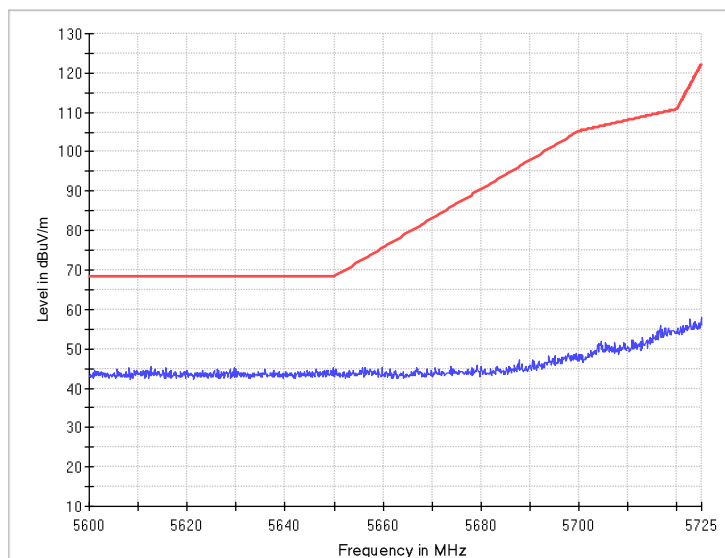


Radiated Emission Band Edge

Channel No.:151

Test Mode: 802.11ax

Polarization: H

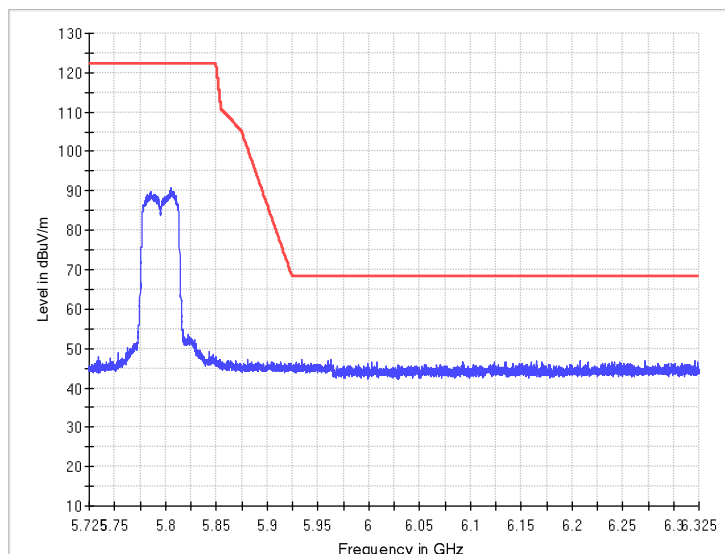


Radiated Emission Band Edge

Channel No.:159

Test Mode: 802.11ax

Polarization: V

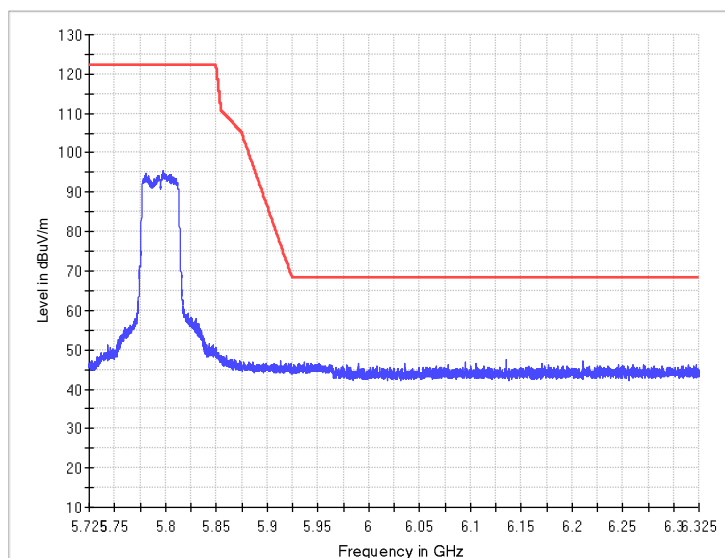

Radiated Emission Band Edge

Channel No.:159


Test Mode: 802.11ax

Polarization: H



40M

Partial RU (Tone26)

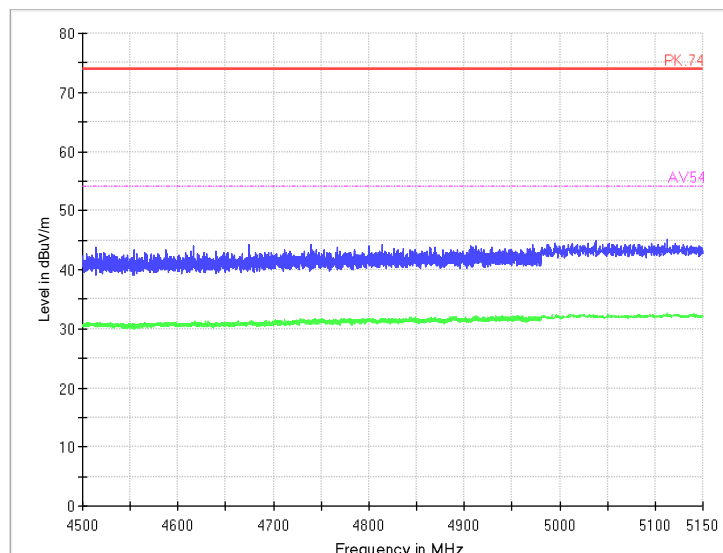


Radiated Emission Band Edge

Channel No.:38

Test Mode: 802.11ax

Polarization: V

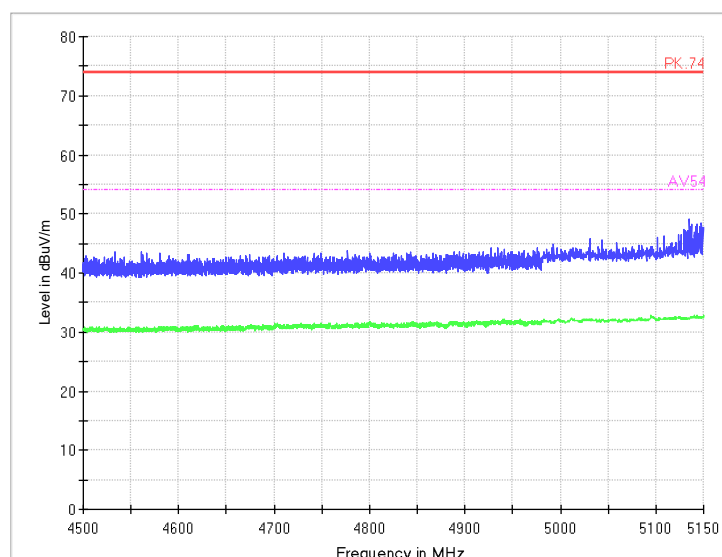


Radiated Emission Band Edge

Channel No.:38

Test Mode: 802.11ax

Polarization: H

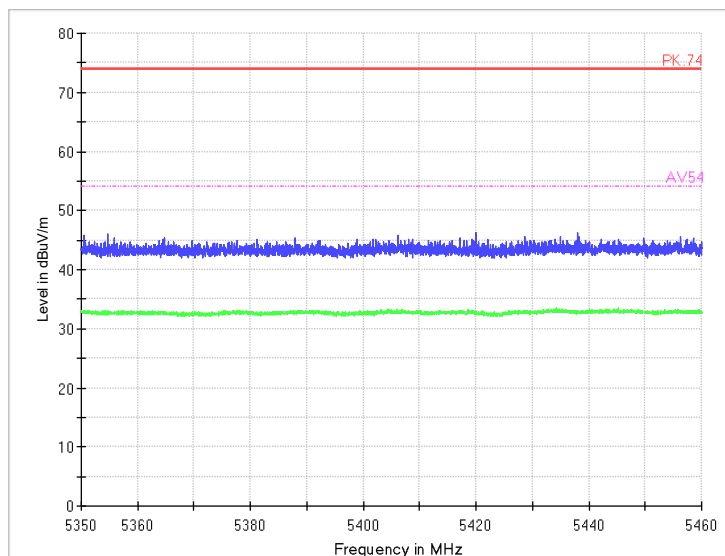


Radiated Emission Band Edge

Channel No.:62

Test Mode: 802.11ax

Polarization: V

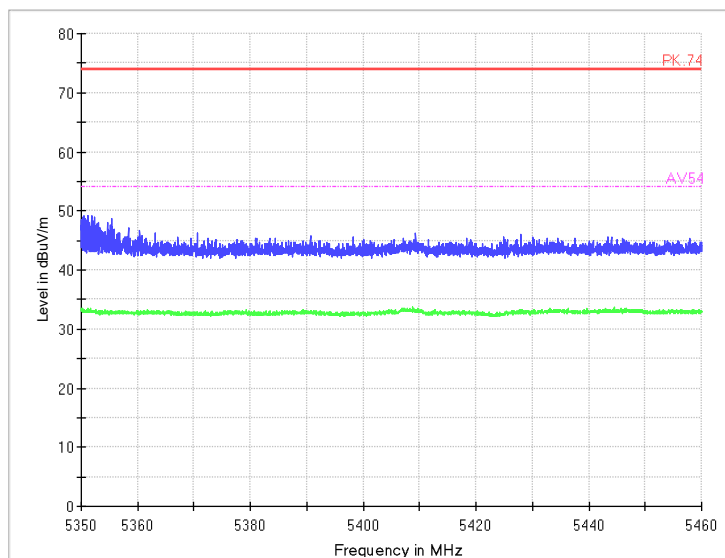


Radiated Emission Band Edge

Channel No.:62

Test Mode: 802.11ax

Polarization: H

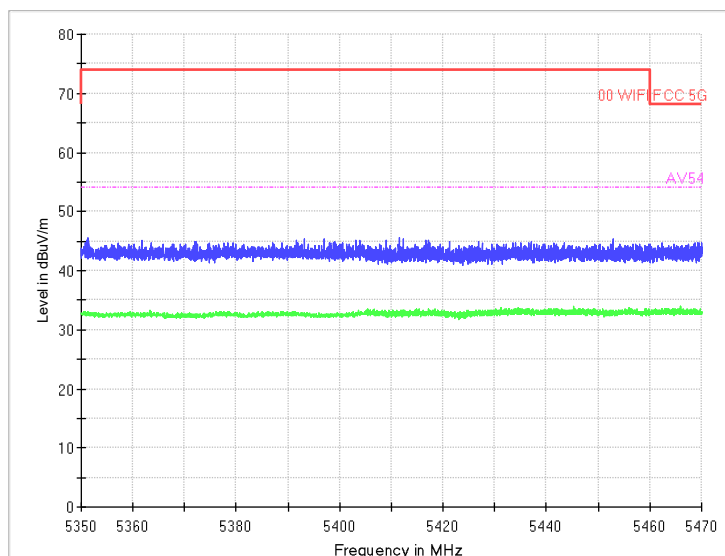


Radiated Emission Band Edge

Channel No.:102

Test Mode: 802.11ax

Polarization: V

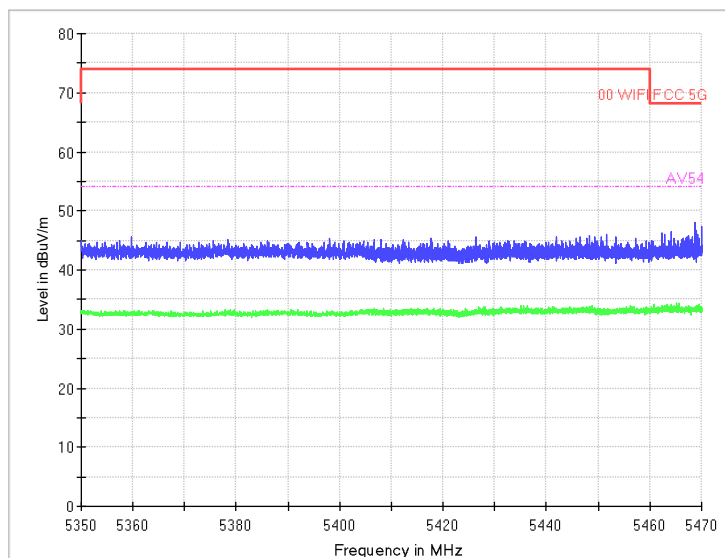


Radiated Emission Band Edge

Channel No.:102

Test Mode: 802.11ax

Polarization: H

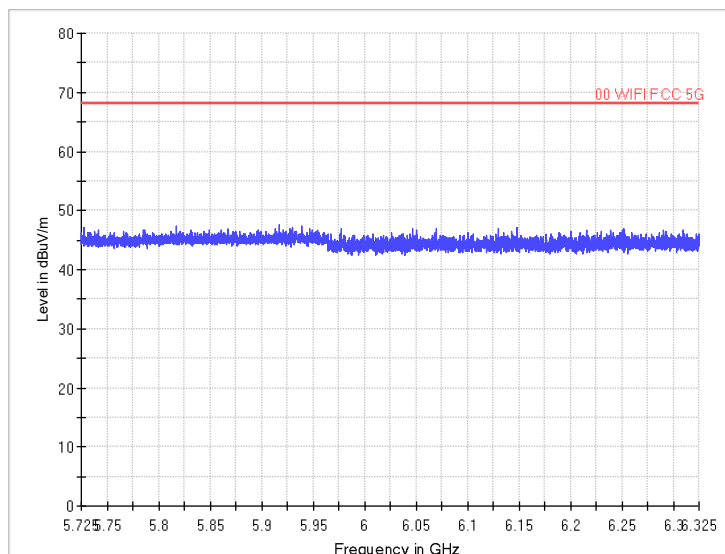


Radiated Emission Band Edge

Channel No.:134

Test Mode: 802.11ax

Polarization: V

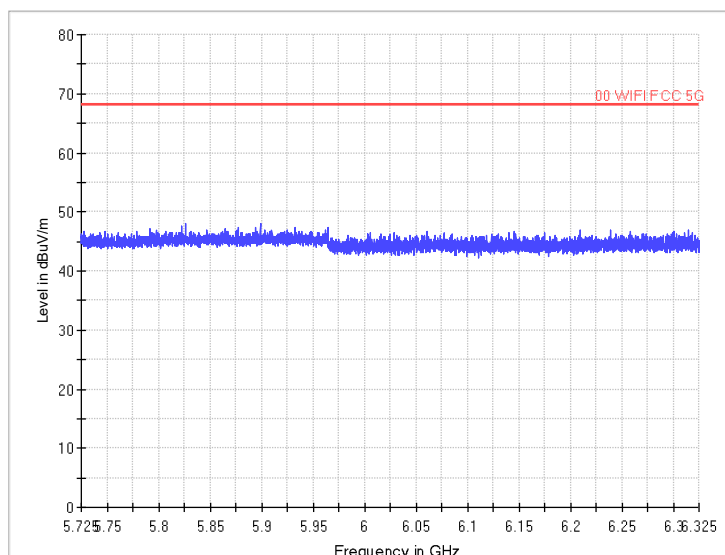


Radiated Emission Band Edge

Channel No.:134

Test Mode: 802.11ax

Polarization: H

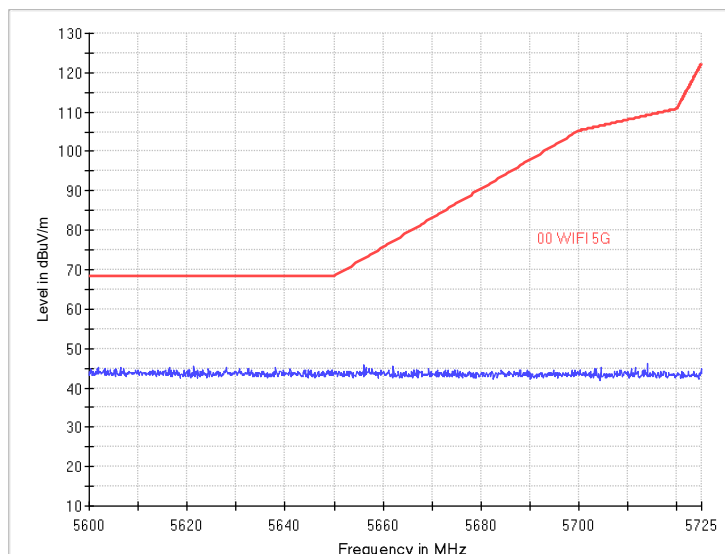


Radiated Emission Band Edge

Channel No.:151

Test Mode: 802.11ax

Polarization: V

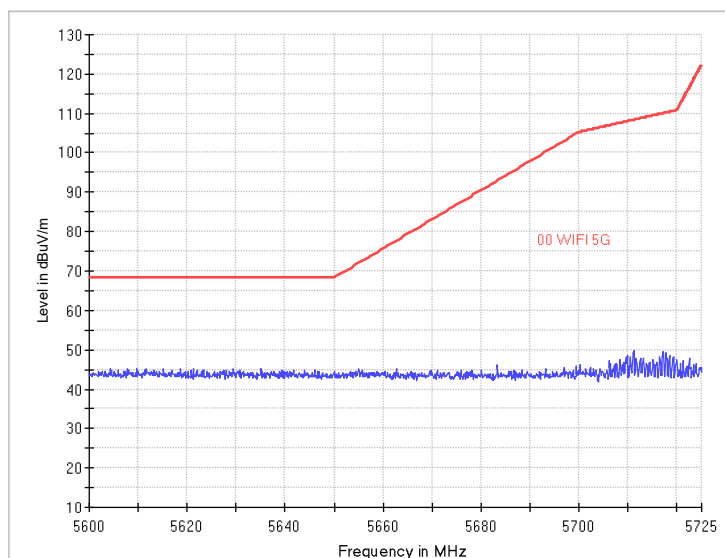


Radiated Emission Band Edge

Channel No.:151

Test Mode: 802.11ax

Polarization: H

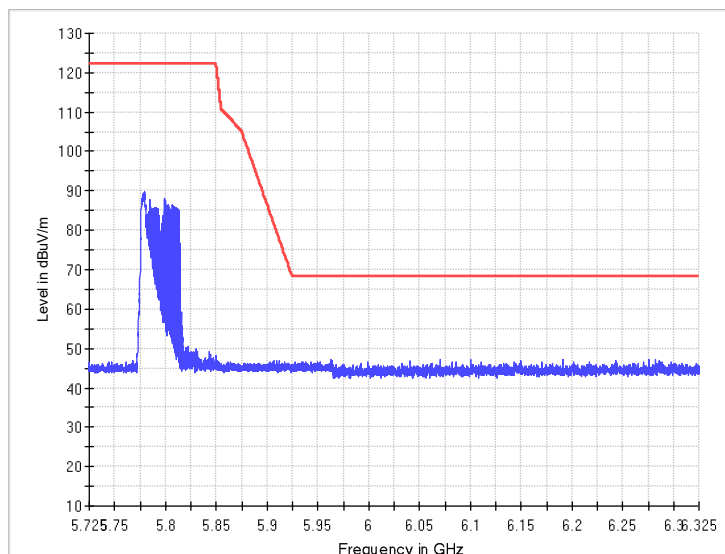


Radiated Emission Band Edge

Channel No.:159

Test Mode: 802.11ax

Polarization: V

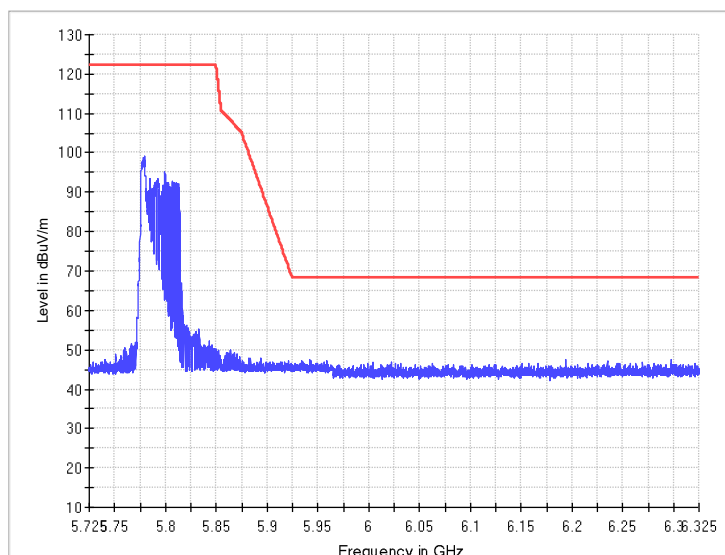


Radiated Emission Band Edge

Channel No.:159

Test Mode: 802.11ax

Polarization: H

80M

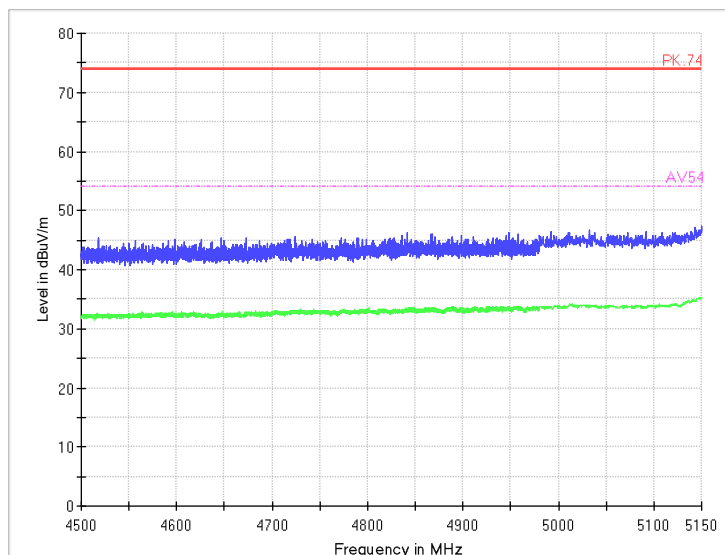


Radiated Emission Band Edge

Channel No.:42

Test Mode: 802.11ac

Polarization: V

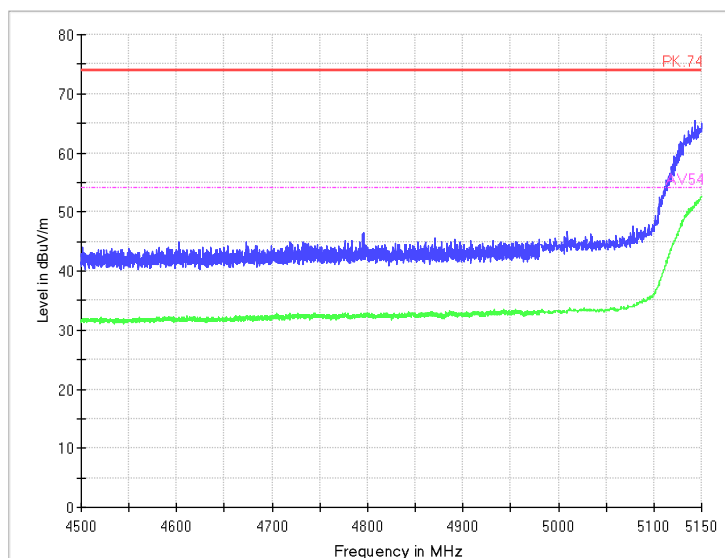


Radiated Emission Band Edge

Channel No.:42

Test Mode: 802.11ac

Polarization: H

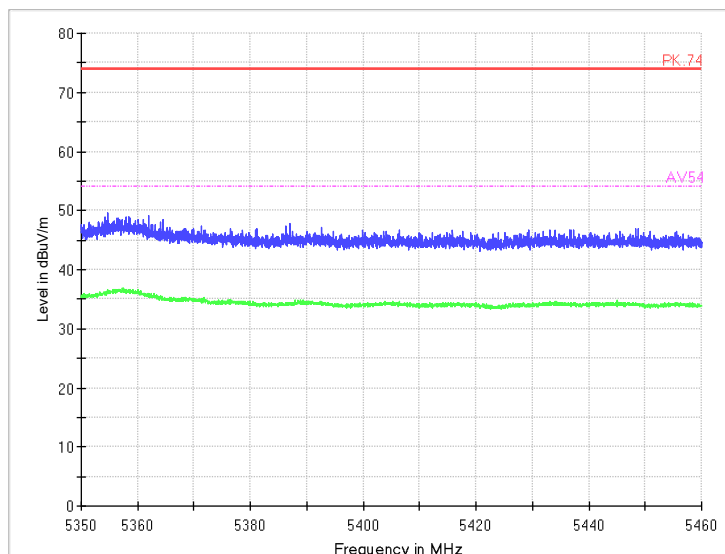


Radiated Emission Band Edge

Channel No.:58

Test Mode: 802.11ac

Polarization: V

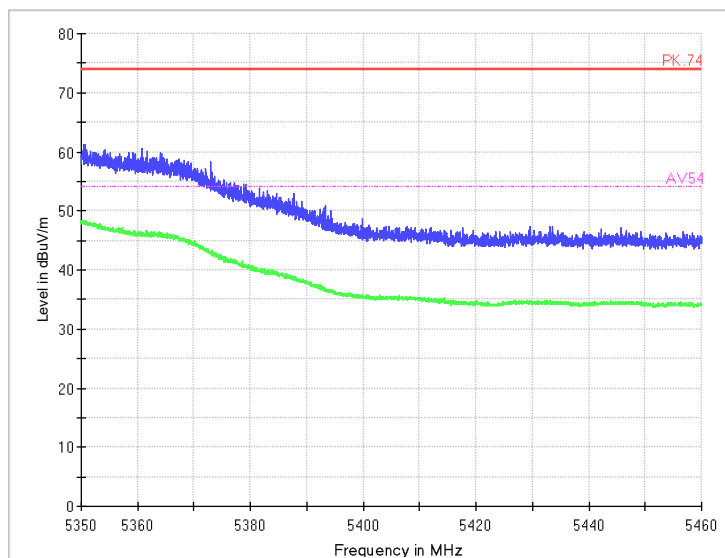


Radiated Emission Band Edge

Channel No.:58

Test Mode: 802.11ac

Polarization: H

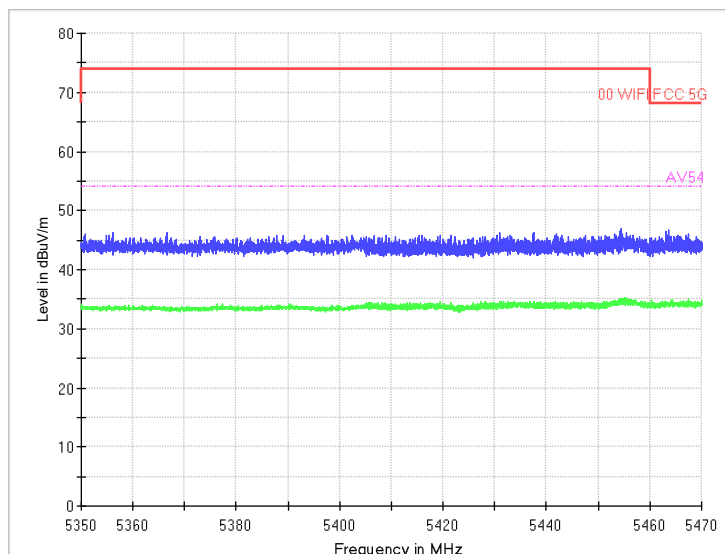


Radiated Emission Band Edge

Channel No.:106

Test Mode: 802.11ac

Polarization: V

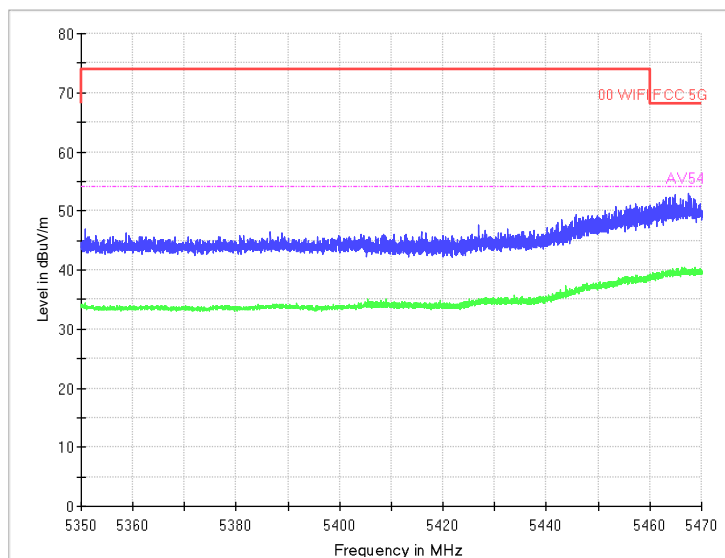


Radiated Emission Band Edge

Channel No.:106

Test Mode: 802.11ac

Polarization: H

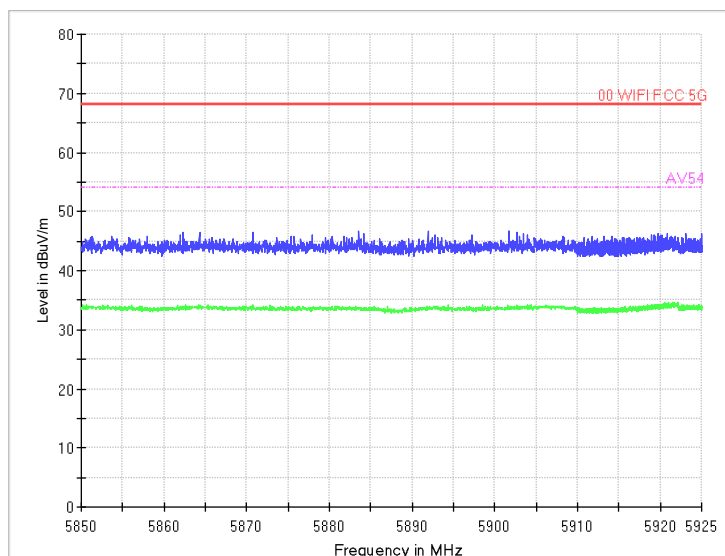


Radiated Emission Band Edge

Channel No.:138

Test Mode: 802.11ac

Polarization: V

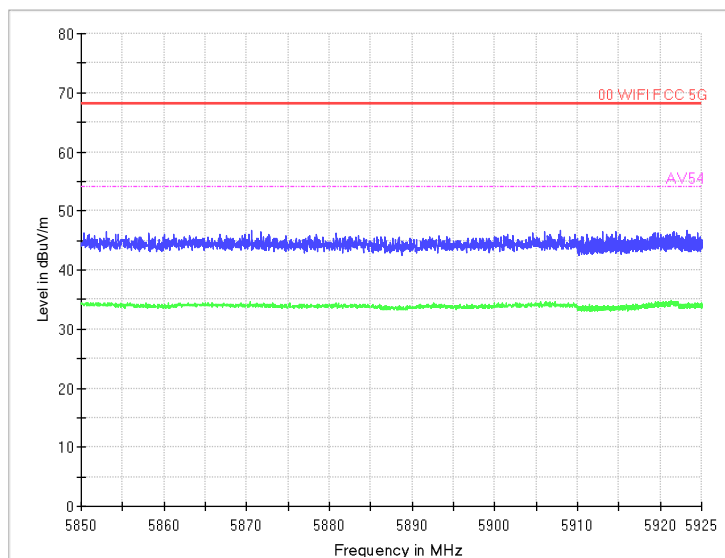


Radiated Emission Band Edge

Channel No.:138

Test Mode: 802.11ac

Polarization: H

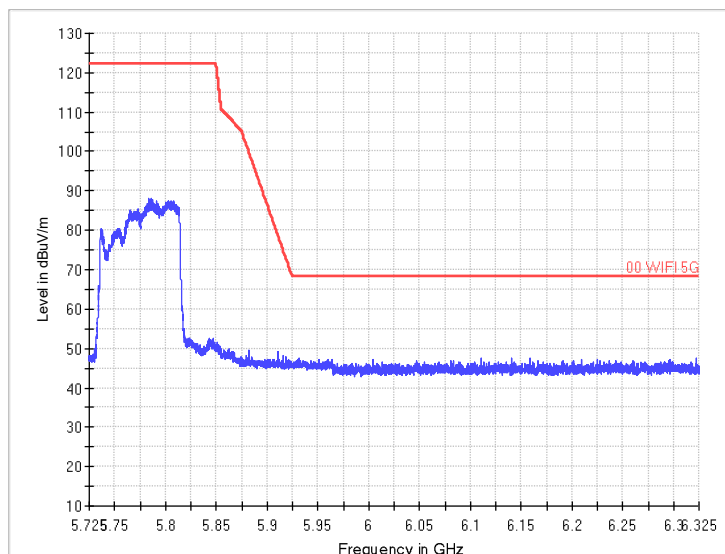


Radiated Emission Band Edge

Channel No.:155

Test Mode: 802.11ac

Polarization: V

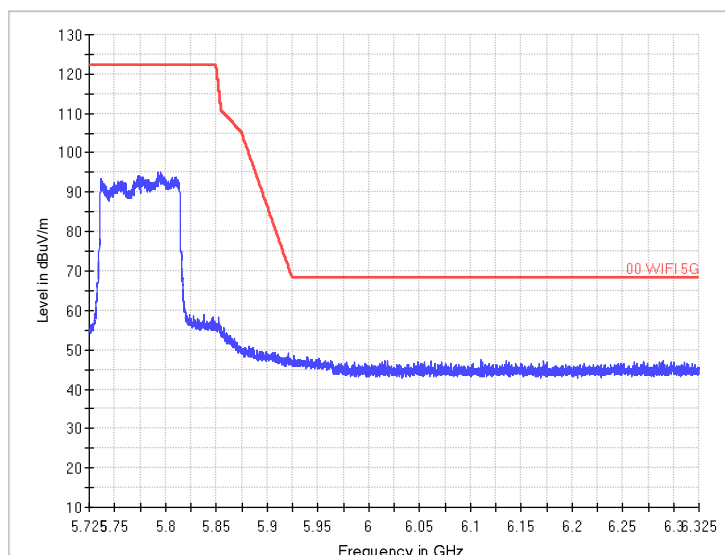


Radiated Emission Band Edge

Channel No.:155

Test Mode: 802.11ac

Polarization: H

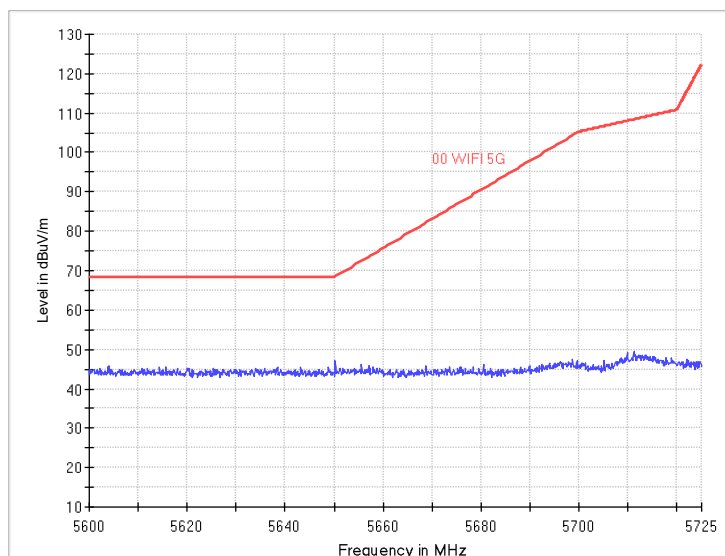


Radiated Emission Band Edge

Channel No.:155

Test Mode: 802.11ac

Polarization: V

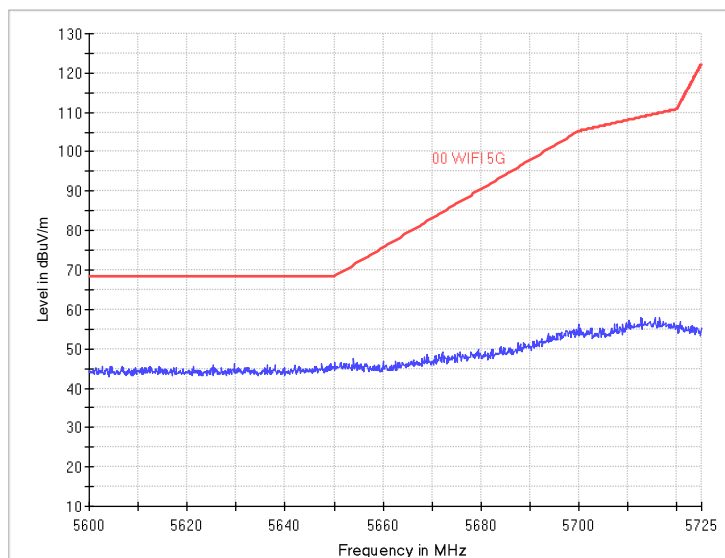


Radiated Emission Band Edge

Channel No.:155

Test Mode: 802.11ac

Polarization: H

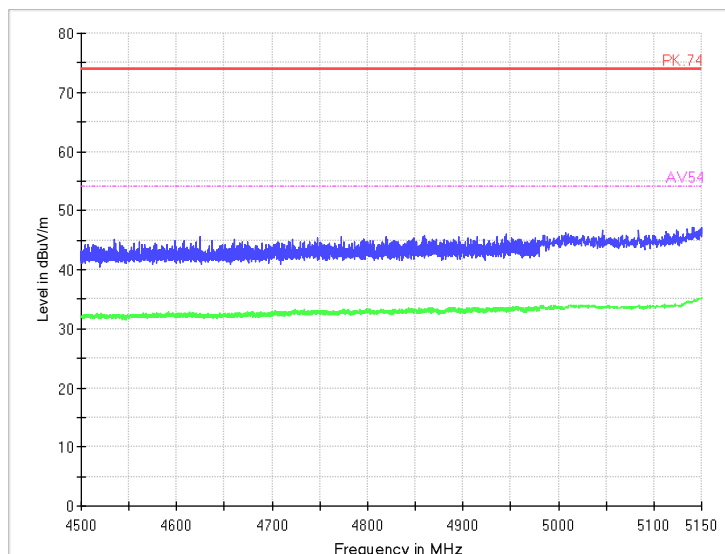


Radiated Emission Band Edge

Channel No.:42

Test Mode: 802.11ax

Polarization: V

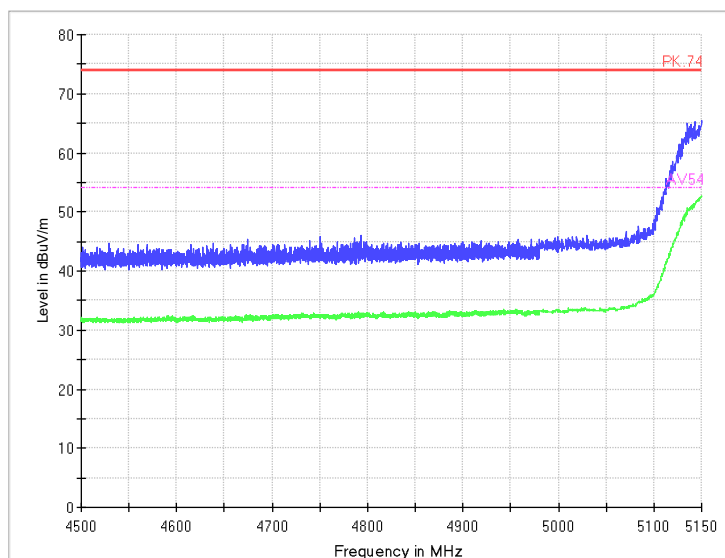


Radiated Emission Band Edge

Channel No.:42

Test Mode: 802.11ax

Polarization: H

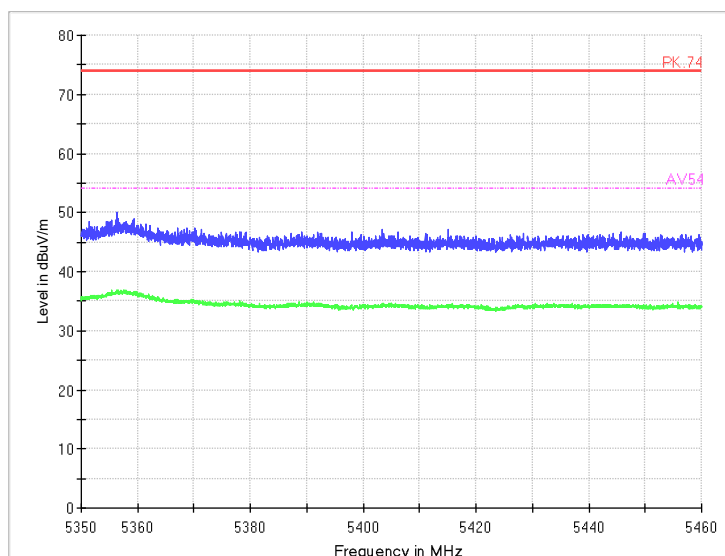


Radiated Emission Band Edge

Channel No.:58

Test Mode: 802.11ax

Polarization: V

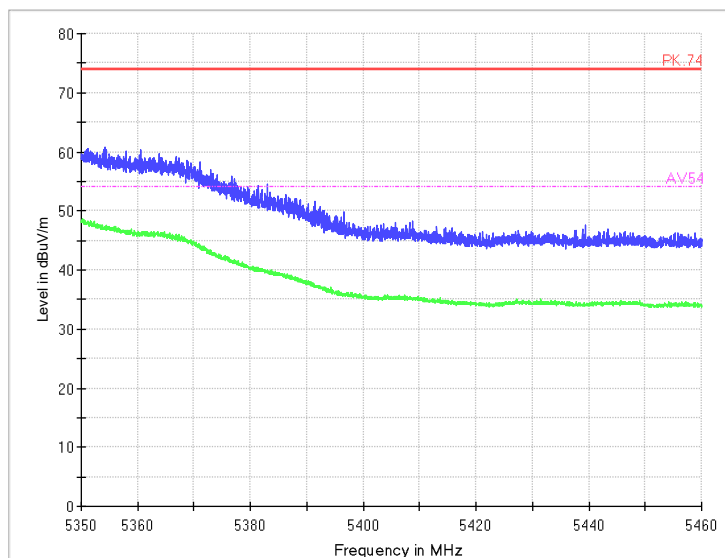


Radiated Emission Band Edge

Channel No.:58

Test Mode: 802.11ax

Polarization: H

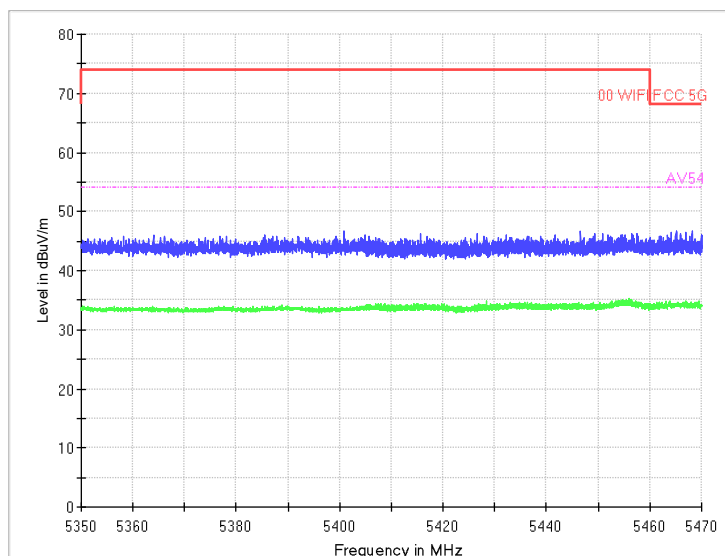


Radiated Emission Band Edge

Channel No.:106

Test Mode: 802.11ax

Polarization: V

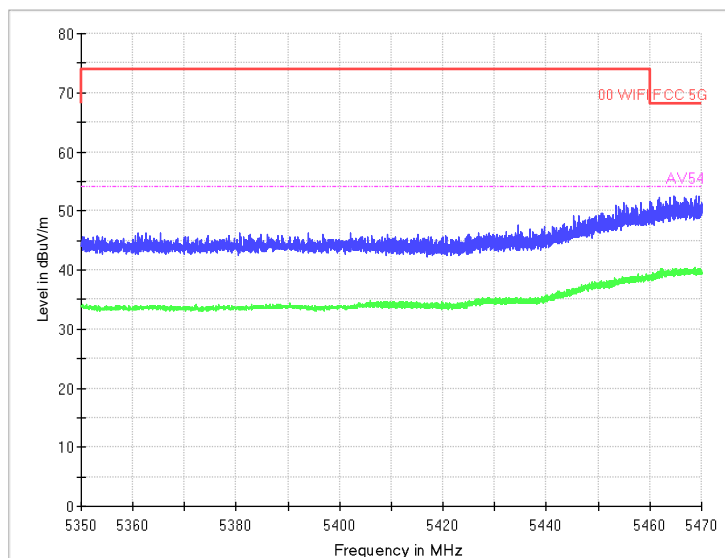


Radiated Emission Band Edge

Channel No.:106

Test Mode: 802.11ax

Polarization: H

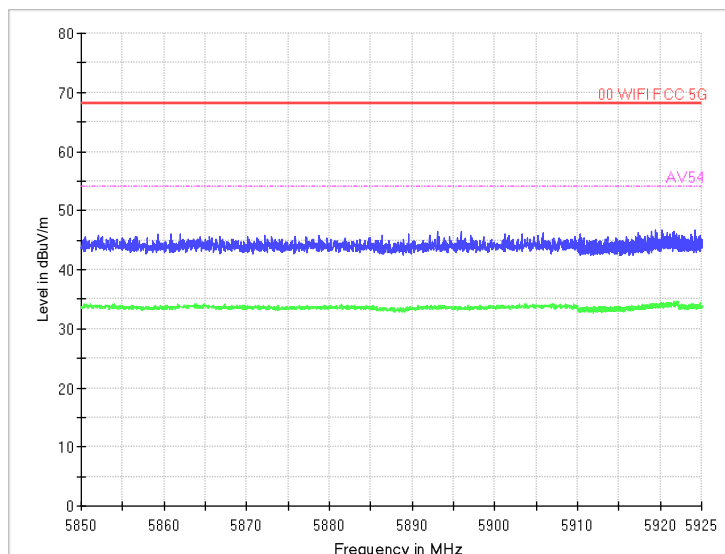


Radiated Emission Band Edge

Channel No.:138

Test Mode: 802.11ax

Polarization: V

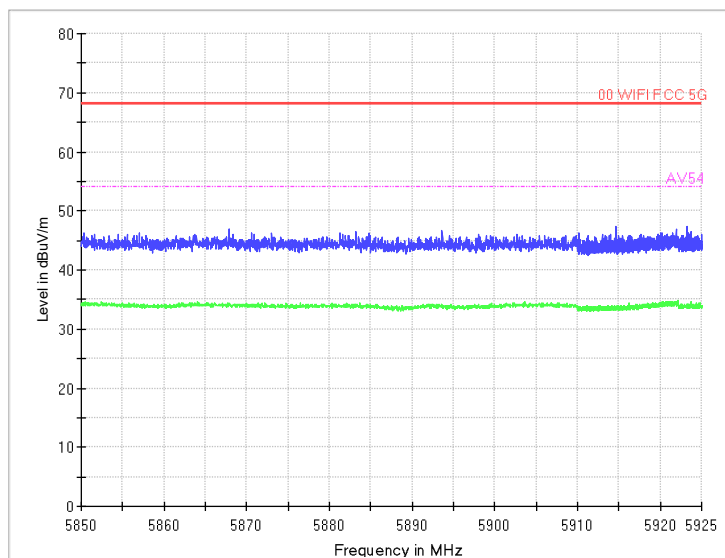


Radiated Emission Band Edge

Channel No.:138

Test Mode: 802.11ax

Polarization: H

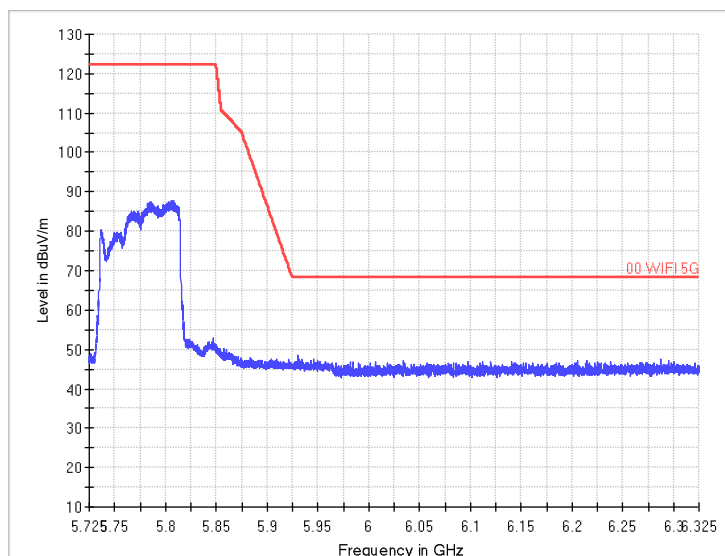


Radiated Emission Band Edge

Channel No.:155

Test Mode: 802.11ax

Polarization: V

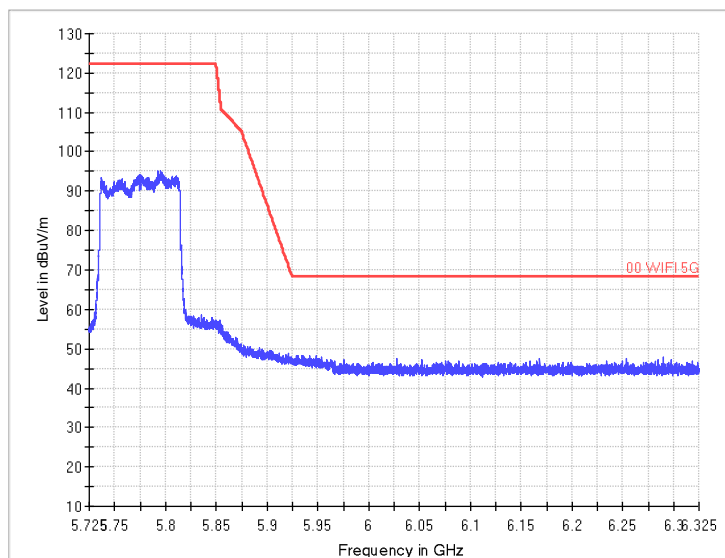


Radiated Emission Band Edge

Channel No.:155

Test Mode: 802.11ax

Polarization: H

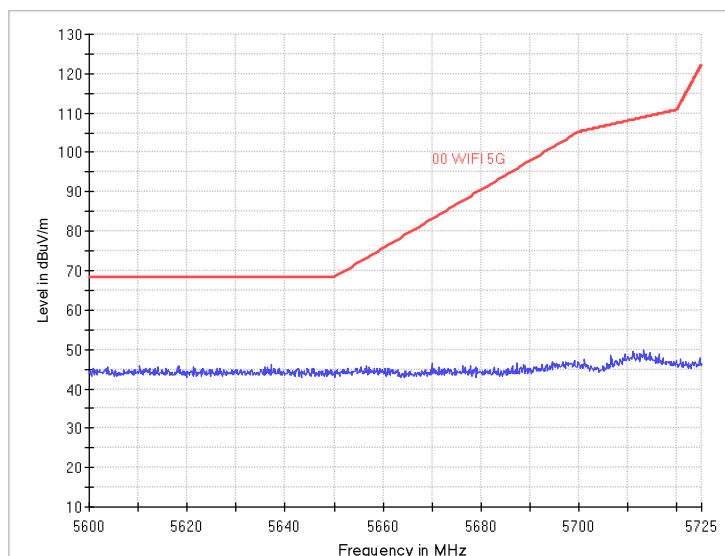


Radiated Emission Band Edge

Channel No.:155

Test Mode: 802.11ax

Polarization: V

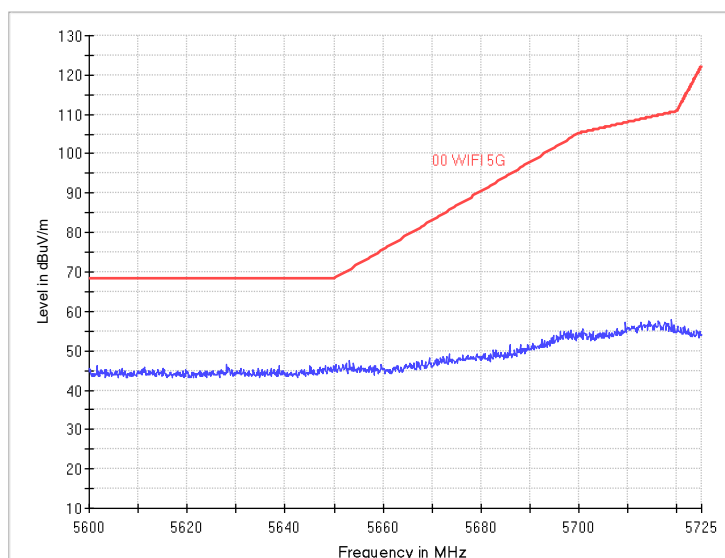

Radiated Emission Band Edge

Channel No.:155


Test Mode: 802.11ax

Polarization: H



80M

Partial RU (Tone26)

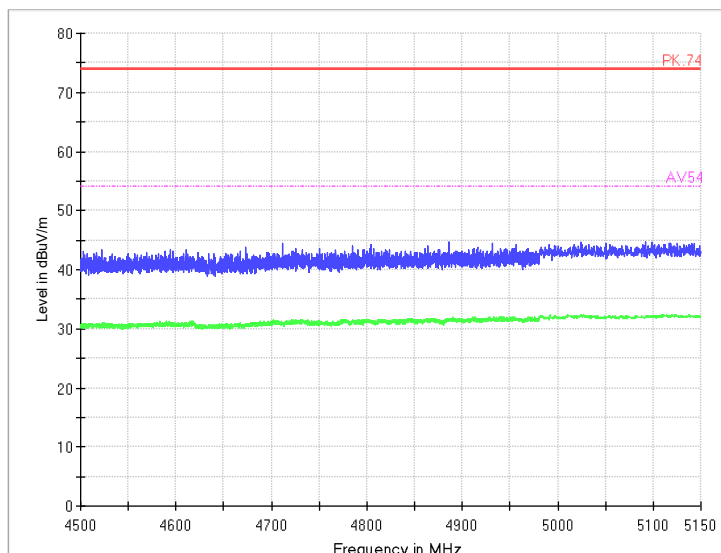


Radiated Emission Band Edge

Channel No.:42

Test Mode: 802.11ax

Polarization: V

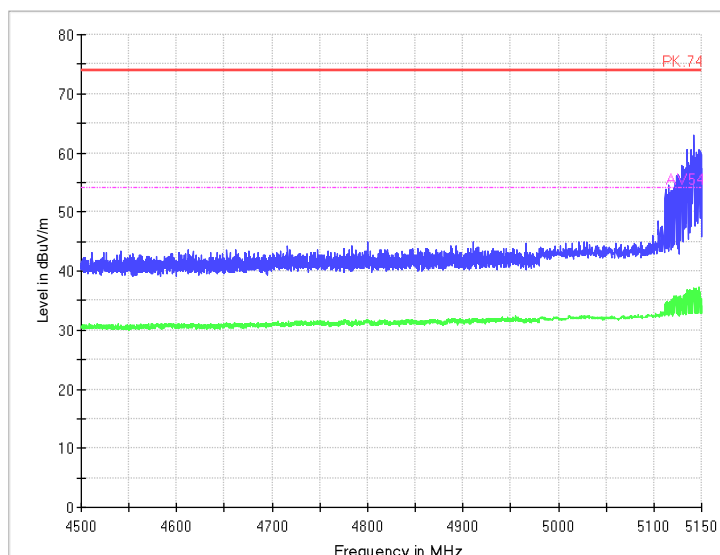


Radiated Emission Band Edge

Channel No.:42

Test Mode: 802.11ax

Polarization: H

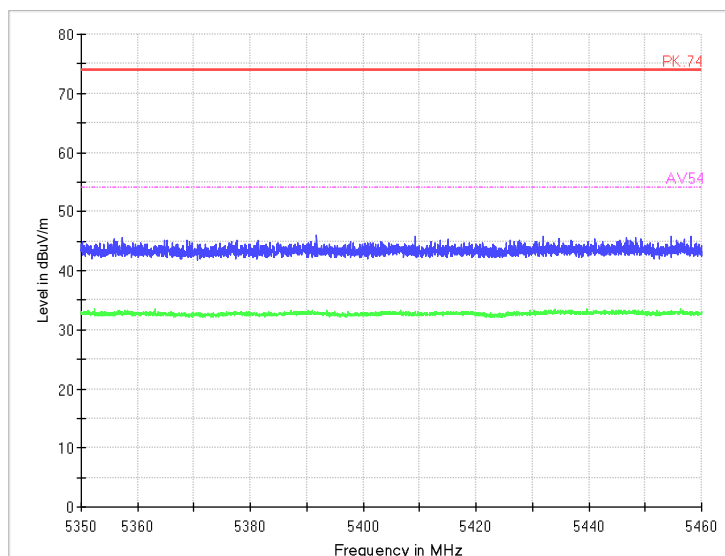


Radiated Emission Band Edge

Channel No.:58

Test Mode: 802.11ax

Polarization: V

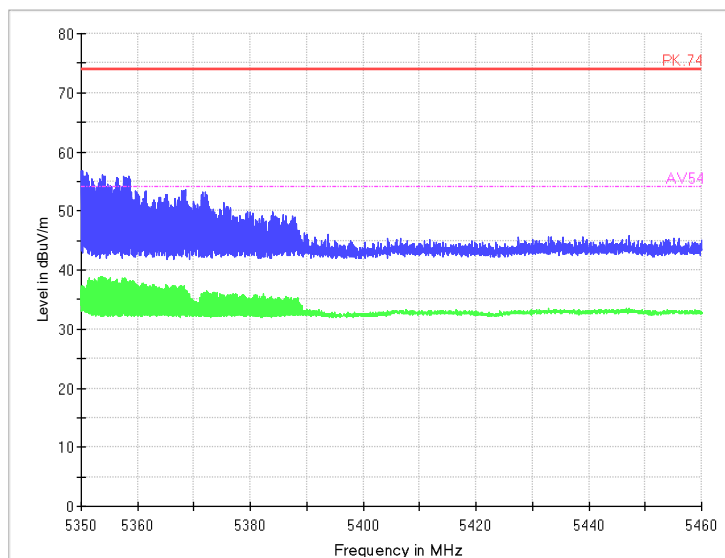


Radiated Emission Band Edge

Channel No.:58

Test Mode: 802.11ax

Polarization: H

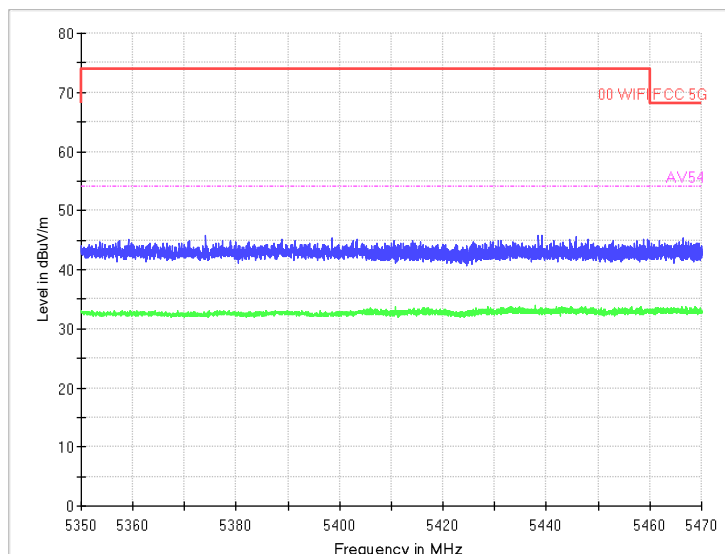


Radiated Emission Band Edge

Channel No.:106

Test Mode: 802.11ax

Polarization: V

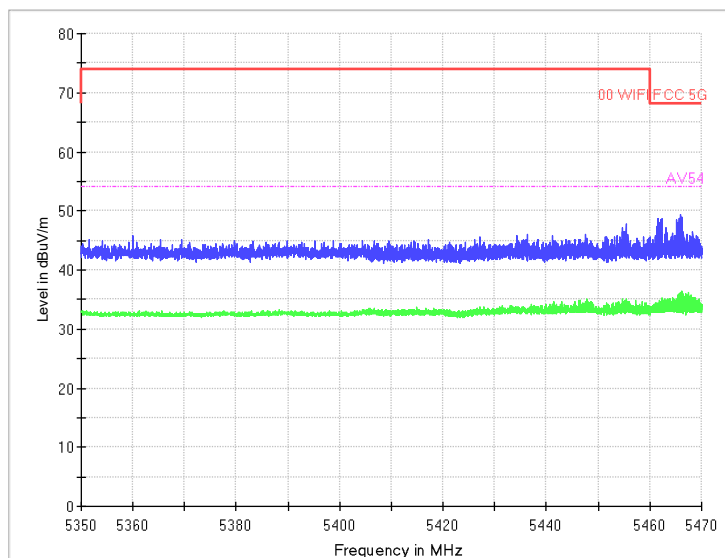


Radiated Emission Band Edge

Channel No.:106

Test Mode: 802.11ax

Polarization: H

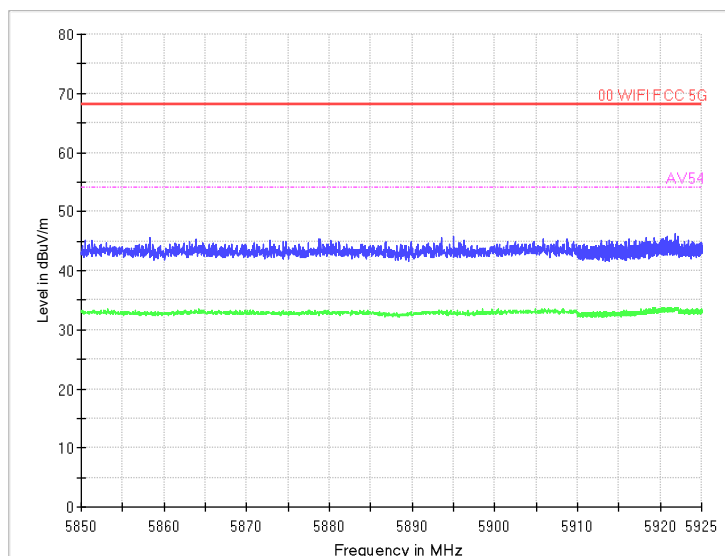


Radiated Emission Band Edge

Channel No.:138

Test Mode: 802.11ax

Polarization: V

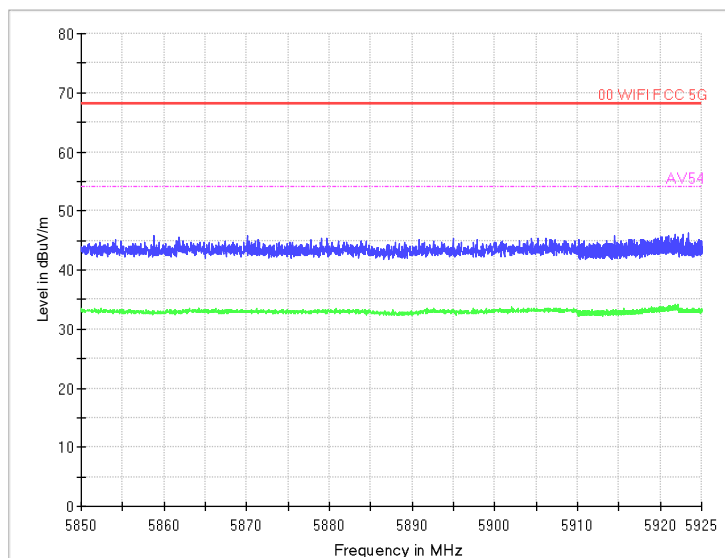


Radiated Emission Band Edge

Channel No.:138

Test Mode: 802.11ax

Polarization: H

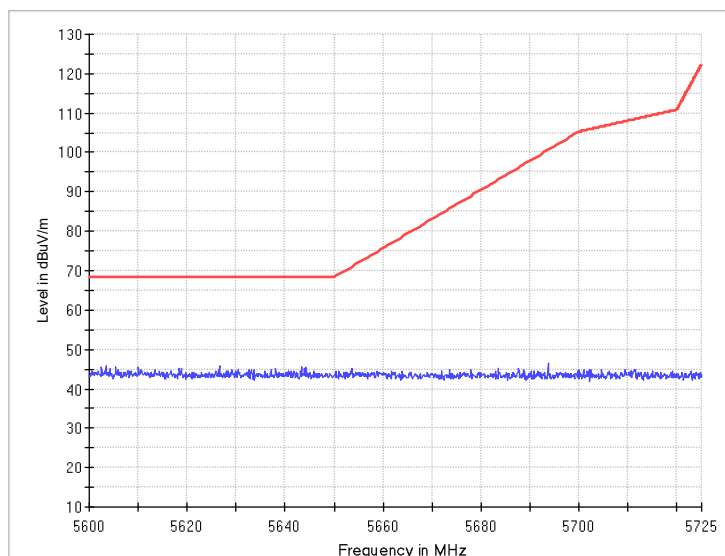


Radiated Emission Band Edge

Channel No.:155

Test Mode: 802.11ax

Polarization: V

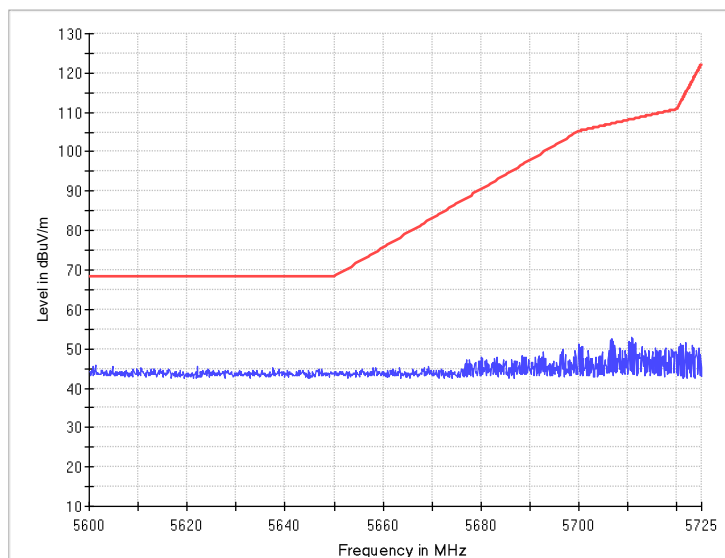


Radiated Emission Band Edge

Channel No.:155

Test Mode: 802.11ax

Polarization: H

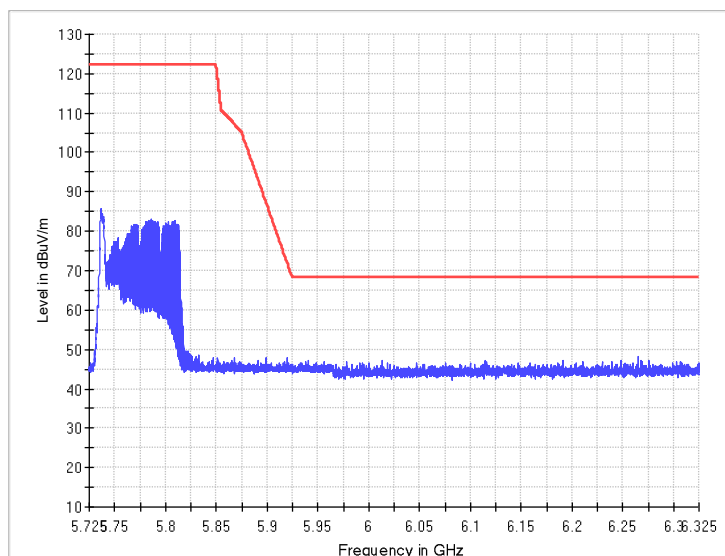


Radiated Emission Band Edge

Channel No.:155

Test Mode: 802.11ax

Polarization: V

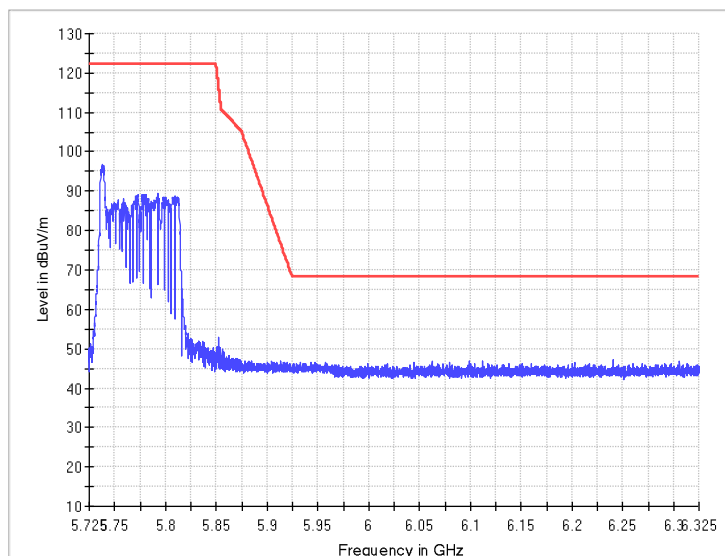

Radiated Emission Band Edge

Channel No.:155

Test Mode: 802.11ax

Polarization: H

**Radiated Emission for WIFI**

After comparison, the worst case attitude is EUT lay down.

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation: $(6.48 \text{ dB}\mu\text{V/m}) = (25.68 \text{ dB}\mu\text{V}) + (-19.2 \text{ dB/m})$, the corresponding frequency is 31.843 MHz.

For 802.11a Channel No.: 36

Frequency(MHz)	Result(dBuV/m)	ARpl(dB)	Pmea(dBuV/m)	Polarity	Limit(dBuV/m)	Margin(dB)
31.843	6.48	-19.2	25.68	Vertical	40	33.52
63.659	5.58	-17.2	22.78	Vertical	40	34.42
123.896	9.7	-19.6	29.3	Vertical	43.5	33.8
199.9925	13.95	-16.6	30.55	Vertical	43.5	29.55
436.333	19.83	-10.4	30.23	Vertical	46	26.17
894.949	16.86	-2.5	19.36	Vertical	46	29.14

For 802.11n(HT20) Channel No.: 36

Frequency(MHz)	Result(dBuV/m)	ARpl(dB)	Pmea(dBuV/m)	Polarity	Limit(dBuV/m)	Margin(dB)
30.2425	13.79	-18.8	32.59	Vertical	40	26.21
59.6335	12.47	-16.3	28.77	Vertical	40	27.53
99.743	8.34	-17.3	25.64	Vertical	43.5	35.16
199.9925	15.34	-16.6	31.94	Vertical	43.5	28.16
436.333	21.1	-10.4	31.5	Vertical	46	24.9
906.7345	18.02	-2.4	20.42	Vertical	46	27.98

For 802.11ac(VHT20) Channel No.: 36

Frequency(MHz)	Result(dBuV/m)	ARpl(dB)	Pmea(dBuV/m)	Polarity	Limit(dBuV/m)	Margin(dB)
31.0185	14.44	-19.1	33.54	Vertical	40	25.56
60.4095	12.39	-16.4	28.79	Vertical	40	27.61
123.508	10.1	-19.6	29.7	Vertical	43.5	33.4
199.9925	16.2	-16.6	32.8	Vertical	43.5	27.3



436.333	21.21	-10.4	31.61	Vertical	46	24.79
930.8875	18.5	-1.6	20.1	Vertical	46	27.5

For 802.11ax(HE20)Channel No.:36

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.2125	11.12	-19.1	30.22	Vertical	40	28.88
62.2525	7.85	-16.9	24.75	Vertical	40	32.15
142.52	5.23	-20.7	25.93	Vertical	43.5	38.27
195.482	8.27	-16.7	24.97	Vertical	43.5	35.23
436.333	20.41	-10.4	30.81	Vertical	46	25.59
913.961	17.65	-2	19.65	Vertical	46	28.35

For 802.11aChannel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
52.213	13.35	-15.4	28.75	Vertical	40	26.65
58.033	12.68	-16	28.68	Vertical	40	27.32
120.9375	9.11	-19.1	28.21	Vertical	43.5	34.39
199.9925	15.53	-16.6	32.13	Vertical	43.5	27.97
436.333	21.4	-10.4	31.8	Vertical	46	24.6
930.1115	18.57	-1.6	20.17	Vertical	46	27.43

For 802.11n(HT20)Channel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.8915	13.96	-19.2	33.16	Vertical	40	26.04
58.906	13.18	-16.2	29.38	Vertical	40	26.82
101.78	9.17	-17.1	26.27	Vertical	43.5	34.33
199.9925	15.46	-16.6	32.06	Vertical	43.5	28.04
436.3815	22.23	-10.4	32.63	Vertical	46	23.77
846.158	17.28	-3.3	20.58	Vertical	46	28.72

For 802.11ac(VHT20)Channel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
----------------	----------------	--------------	------------------	----------	-------------------	----------------



47.9935	9.43	-15.5	24.93	Vertical	40	30.57
60.4095	12.31	-16.4	28.71	Vertical	40	27.69
104.9325	8.82	-17	25.82	Vertical	43.5	34.68
199.9925	15.38	-16.6	31.98	Vertical	43.5	28.12
436.333	21.22	-10.4	31.62	Vertical	46	24.78
904.164	17.99	-2.5	20.49	Vertical	46	28.01

For 802.11ax(HE20)Channel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.582	12.99	-18.9	31.89	Vertical	40	27.01
58.227	13.27	-16	29.27	Vertical	40	26.73
143.2475	6.53	-20.7	27.23	Vertical	43.5	36.97
197.422	9.48	-16.5	25.98	Vertical	43.5	34.02
436.333	21.21	-10.4	31.61	Vertical	46	24.79
927.735	18.33	-1.7	20.03	Vertical	46	27.67

For 802.11aChannel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.485	11.79	-18.9	30.69	Vertical	40	28.21
58.13	11.6	-16	27.6	Vertical	40	28.4
122.0045	8.13	-19.3	27.43	Vertical	43.5	35.37
237.774	7.95	-15.8	23.75	Vertical	46	38.05
436.333	19.68	-10.4	30.08	Vertical	46	26.32
831.2685	16.43	-3.3	19.73	Vertical	46	29.57

For 802.11n(HT20)Channel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.194	13.06	-18.8	31.86	Vertical	40	26.94
60.5065	11.25	-16.4	27.65	Vertical	40	28.75
125.3025	10.61	-19.8	30.41	Vertical	43.5	32.89
199.9925	15.22	-16.6	31.82	Vertical	43.5	28.28
436.3815	21.97	-10.4	32.37	Vertical	46	24.03
874.676	17.77	-2.3	20.07	Vertical	46	28.23



For 802.11ac(VHT20)Channel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.2125	13.67	-19.1	32.77	Vertical	40	26.33
57.451	12.58	-15.9	28.48	Vertical	40	27.42
162.405	8.65	-19.9	28.55	Vertical	43.5	34.85
199.9925	15.34	-16.6	31.94	Vertical	43.5	28.16
436.3815	22.13	-10.4	32.53	Vertical	46	23.87
921.139	18.46	-1.7	20.16	Vertical	46	27.54

For 802.11ax(HE20)Channel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
52.9405	12.65	-15.4	28.05	Vertical	40	27.35
62.689	10.27	-17	27.27	Vertical	40	29.73
121.7135	9.5	-19.2	28.7	Vertical	43.5	34
199.9925	15.94	-16.6	32.54	Vertical	43.5	27.56
436.333	21.22	-10.4	31.62	Vertical	46	24.78
696.002	20.93	-5.6	26.53	Vertical	46	25.07

For 802.11n(HT40)Channel No.:38

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
52.31	11.93	-15.4	27.33	Vertical	40	28.07
58.906	11.48	-16.2	27.68	Vertical	40	28.52
123.1685	9.98	-19.5	29.48	Vertical	43.5	33.52
199.9925	14.01	-16.6	30.61	Vertical	43.5	29.49
436.333	19.69	-10.4	30.09	Vertical	46	26.31
936.0285	18.36	-1.8	20.16	Vertical	46	27.64

For 802.11ac(VHT40)Channel No.:38

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.067	14.68	-19.1	33.78	Vertical	40	25.32



59.585	12.71	-16.3	29.01	Vertical	40	27.29
165.9455	7.91	-19.8	27.71	Vertical	43.5	35.59
199.9925	15.59	-16.6	32.19	Vertical	43.5	27.91
436.333	21.28	-10.4	31.68	Vertical	46	24.72
903.776	17.98	-2.5	20.48	Vertical	46	28.02

For 802.11ax(HE40)Channel No.:38

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.843	14.71	-19.2	33.91	Vertical	40	25.29
61.0885	12.51	-16.5	29.01	Vertical	40	27.49
99.5975	8.15	-17.3	25.45	Vertical	43.5	35.35
199.2165	9.58	-16.5	26.08	Vertical	43.5	33.92
436.333	21.33	-10.4	31.73	Vertical	46	24.67
937.338	18.35	-1.8	20.15	Vertical	46	27.65

For 802.11n(HT40)Channel No.:46

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
52.407	12.72	-15.4	28.12	Vertical	40	27.28
60.9915	12.7	-16.5	29.2	Vertical	40	27.3
155.421	8.03	-20.3	28.33	Vertical	43.5	35.47
195.0455	11.59	-16.8	28.39	Vertical	43.5	31.91
436.3815	22.41	-10.4	32.81	Vertical	46	23.59
916.095	18.27	-1.9	20.17	Vertical	46	27.73

For 802.11ac(VHT40)Channel No.:46

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
53.086	12.57	-15.5	28.07	Vertical	40	27.43
62.01	10.27	-16.8	27.07	Vertical	40	29.73
124.478	10.87	-19.7	30.57	Vertical	43.5	32.63
199.9925	15.73	-16.6	32.33	Vertical	43.5	27.77
436.3815	22.36	-10.4	32.76	Vertical	46	23.64
934.8645	18.25	-1.8	20.05	Vertical	46	27.75



For 802.11ax(HE40)Channel No.:46

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.8915	12.14	-19.2	31.34	Vertical	40	27.86
61.7675	10.49	-16.8	27.29	Vertical	40	29.51
124.7205	10.23	-19.7	29.93	Vertical	43.5	33.27
199.9925	15.51	-16.6	32.11	Vertical	43.5	27.99
436.3815	21.54	-10.4	31.94	Vertical	46	24.46
829.668	17.12	-3.3	20.42	Vertical	46	28.89

For 802.11ac(VHT80)Channel No.:42

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.1155	11.87	-19.1	30.97	Vertical	40	28.13
58.8575	10.26	-16.2	26.46	Vertical	40	29.74
124.769	9.5	-19.7	29.2	Vertical	43.5	34
199.9925	13.34	-16.6	29.94	Vertical	43.5	30.16
436.3815	19.82	-10.4	30.22	Vertical	46	26.18
791.9835	19.05	-3.8	22.85	Vertical	46	26.95

For 802.11ax(HE80)Channel No.:42

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.5035	10.04	-19.2	29.24	Vertical	40	29.96
57.16	9.45	-15.9	25.35	Vertical	40	30.55
97.1725	8.77	-17.7	26.47	Vertical	43.5	34.73
199.9925	15.58	-16.6	32.18	Vertical	43.5	27.92
436.333	21.19	-10.4	31.59	Vertical	46	24.81
830.2985	17.6	-3.3	20.9	Vertical	46	28.4

For 802.11aChannel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.2425	14.69	-18.8	33.49	Vertical	40	25.31
59.197	10.1	-16.2	26.3	Vertical	40	29.9



152.6565	8.23	-20.6	28.83	Vertical	43.5	35.27
199.9925	16.22	-16.6	32.82	Vertical	43.5	27.28
436.3815	22.43	-10.4	32.83	Vertical	46	23.57
890.7295	17.78	-2.5	20.28	Vertical	46	28.22

For 802.11n(HT20)Channel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.94	14.11	-19.3	33.41	Vertical	40	25.89
59.585	12.77	-16.3	29.07	Vertical	40	27.23
156.585	8.02	-20.3	28.32	Vertical	43.5	35.48
194.415	12.19	-16.9	29.09	Vertical	43.5	31.31
436.333	21.57	-10.4	31.97	Vertical	46	24.43
830.056	17.81	-3.3	21.11	Vertical	46	28.19

For 802.11ac(VHT20)Channel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.485	14.86	-18.9	33.76	Vertical	40	25.14
94.408	11.22	-18.2	29.42	Vertical	43.5	32.28
149.407	10.32	-20.7	31.02	Vertical	43.5	33.18
199.9925	15.88	-16.6	32.48	Vertical	43.5	27.62
436.333	21.62	-10.4	32.02	Vertical	46	24.38
744.017	20.46	-4.2	24.66	Vertical	46	25.54

For 802.11ax(HE20)Channel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.194	14.41	-18.8	33.21	Vertical	40	25.59
57.257	10.2	-15.9	26.1	Vertical	40	29.8
126.4665	8.54	-20	28.54	Vertical	43.5	34.96
199.9925	16.59	-16.6	33.19	Vertical	43.5	26.91
436.333	21.58	-10.4	31.98	Vertical	46	24.42
918.8595	18.2	-1.8	20	Vertical	46	27.8



For 802.11aChannel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.2425	15	-18.8	33.8	Vertical	40	25
62.301	10.54	-16.9	27.44	Vertical	40	29.46
99.0155	8.47	-17.4	25.87	Vertical	43.5	35.03
199.9925	15.87	-16.6	32.47	Vertical	43.5	27.63
436.3815	22.48	-10.4	32.88	Vertical	46	23.52
869.3895	17.79	-2.4	20.19	Vertical	46	28.21

For 802.11n(HT20)Channel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.2125	14.4	-19.1	33.5	Vertical	40	25.6
60.2155	11.31	-16.4	27.71	Vertical	40	28.69
119.9675	9.34	-19	28.34	Vertical	43.5	34.16
199.9925	15.71	-16.6	32.31	Vertical	43.5	27.79
436.333	21.52	-10.4	31.92	Vertical	46	24.48
872.736	20.73	-2.4	23.13	Vertical	46	25.27

For 802.11ac(VHT20)Channel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
33.3465	11.47	-19.1	30.57	Vertical	40	28.53
59.6335	12.84	-16.3	29.14	Vertical	40	27.16
121.9075	11.41	-19.3	30.71	Vertical	43.5	32.09
199.9925	15.69	-16.6	32.29	Vertical	43.5	27.81
436.333	21.48	-10.4	31.88	Vertical	46	24.52
925.4555	18.15	-1.7	19.85	Vertical	46	27.85

For 802.11ax(HE20)Channel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.649	9.96	-19.2	29.16	Vertical	40	30.04
60.3125	10.6	-16.4	27	Vertical	40	29.4
122.3925	8.72	-19.4	28.12	Vertical	43.5	34.78



194.415	9.57	-16.9	26.47	Vertical	43.5	33.93
436.3815	21.26	-10.4	31.66	Vertical	46	24.74
936.0285	18.38	-1.8	20.18	Vertical	46	27.62

For 802.11aChannel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.067	15.11	-19.1	34.21	Vertical	40	24.89
58.033	12.78	-16	28.78	Vertical	40	27.22
123.2655	12.46	-19.5	31.96	Vertical	43.5	31.04
199.9925	15.69	-16.6	32.29	Vertical	43.5	27.81
436.333	21.51	-10.4	31.91	Vertical	46	24.49
831.3655	17.7	-3.3	21	Vertical	46	28.3

For 802.11n(HT20)Channel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.291	15.68	-18.8	34.48	Vertical	40	24.32
58.7605	12.13	-16.2	28.33	Vertical	40	27.87
122.2955	9.87	-19.4	29.27	Vertical	43.5	33.63
199.9925	16.62	-16.6	33.22	Vertical	43.5	26.88
436.333	21.51	-10.4	31.91	Vertical	46	24.5
832.9175	17.67	-3.3	20.97	Vertical	46	28.33

For 802.11ac(VHT20)Channel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.3395	15.75	-18.8	34.55	Vertical	40	24.25
58.906	13.46	-16.2	29.66	Vertical	40	26.54
123.799	10.03	-19.6	29.63	Vertical	43.5	33.47
199.9925	16.2	-16.6	32.8	Vertical	43.5	27.3
436.333	21.64	-10.4	32.04	Vertical	46	24.36
879.3805	17.88	-2.3	20.18	Vertical	46	28.12

For 802.11ax(HE20)Channel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl	Pmea	Polarity	Limit	Margin
----------------	----------------	------	------	----------	-------	--------



		(dB)	(dBuV/m)		(dBuV/m)	(dB)
30.4365	16.73	-18.9	35.63	Vertical	40	23.27
60.943	11.82	-16.5	28.32	Vertical	40	28.18
99.743	10.18	-17.3	27.48	Vertical	43.5	33.32
199.944	12.88	-16.6	29.48	Vertical	43.5	30.62
436.3815	22.55	-10.4	32.95	Vertical	46	23.45
830.347	17.8	-3.3	21.1	Vertical	46	28.2

For 802.11n(HT40)Channel No.:54

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
52.2615	13.41	-15.4	28.81	Vertical	40	26.59
58.227	13.19	-16	29.19	Vertical	40	26.81
124.478	10.73	-19.7	30.43	Vertical	43.5	32.77
199.9925	16.55	-16.6	33.15	Vertical	43.5	26.95
436.333	21.42	-10.4	31.82	Vertical	46	24.58
930.354	18.37	-1.6	19.97	Vertical	46	27.63

For 802.11ac(VHT40)Channel No.:54

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.0485	12.95	-18.7	31.65	Vertical	40	27.05
60.264	12.23	-16.4	28.63	Vertical	40	27.77
123.314	12.52	-19.5	32.02	Vertical	43.5	30.98
199.9925	15.7	-16.6	32.3	Vertical	43.5	27.8
436.333	21.54	-10.4	31.94	Vertical	46	24.46
936.4165	18.22	-1.8	20.02	Vertical	46	27.78

For 802.11ax(HE40)Channel No.:54

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.2125	14.41	-19.1	33.51	Vertical	40	25.59
54.929	8.97	-15.6	24.57	Vertical	40	31.03



122.4895	11.6	-19.4	31	Vertical	43.5	31.9
199.9925	15.68	-16.6	32.28	Vertical	43.5	27.82
436.333	21.51	-10.4	31.91	Vertical	46	24.49
865.655	17.83	-2.4	20.23	Vertical	46	28.17

For 802.11n(HT40)Channel No.:62

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.291	15.76	-18.8	34.56	Vertical	40	24.24
60.4095	12.69	-16.4	29.09	Vertical	40	27.31
124.478	10.86	-19.7	30.56	Vertical	43.5	32.64
193.1055	7.91	-17.2	25.11	Vertical	43.5	35.59
436.333	21.54	-10.4	31.94	Vertical	46	24.47
750.031	18.85	-4.2	23.05	Vertical	46	27.15

For 802.11ac(VHT40)Channel No.:62

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.164	14.99	-19.1	34.09	Vertical	40	25.01
61.8645	12.01	-16.8	28.81	Vertical	40	27.99
121.471	9.77	-19.2	28.97	Vertical	43.5	33.73
199.9925	15.72	-16.6	32.32	Vertical	43.5	27.78
436.333	21.54	-10.4	31.94	Vertical	46	24.46
916.3375	18.25	-1.9	20.15	Vertical	46	27.75

For 802.11ax(HE40)Channel No.:62

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
52.31	13.75	-15.4	29.15	Vertical	40	26.25
59.197	9.92	-16.2	26.12	Vertical	40	30.08
121.8105	11.53	-19.3	30.83	Vertical	43.5	31.97
209.1105	8	-17.2	25.2	Vertical	43.5	35.5
436.333	21.5	-10.4	31.9	Vertical	46	24.5
888.2075	17.8	-2.4	20.2	Vertical	46	28.2



For 802.11ac(VHT80)Channel No.:58

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.6305	12.16	-19	31.16	Vertical	40	27.84
57.451	12.81	-15.9	28.71	Vertical	40	27.19
96.736	9.49	-17.8	27.29	Vertical	43.5	34.01
197.5675	9.88	-16.5	26.38	Vertical	43.5	33.62
436.333	22.24	-10.4	32.64	Vertical	46	23.76
938.696	18.36	-1.8	20.16	Vertical	46	27.64

For 802.11ax(HE80)Channel No.:58

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.291	15.38	-18.8	34.18	Vertical	40	24.62
59.003	12.39	-16.2	28.59	Vertical	40	27.61
157.458	7.34	-20.3	27.64	Vertical	43.5	36.16
201.8355	8.59	-16.8	25.39	Vertical	43.5	34.91
436.333	21.61	-10.4	32.01	Vertical	46	24.39
744.017	20.37	-4.2	24.57	Vertical	46	25.63

For 802.11aChannel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.291	16.25	-18.8	35.05	Vertical	40	23.75
60.3125	13.59	-16.4	29.99	Vertical	40	26.41
123.9445	12.85	-19.6	32.45	Vertical	43.5	30.65
199.9925	16.83	-16.6	33.43	Vertical	43.5	26.67
436.333	22.68	-10.4	33.08	Vertical	46	23.32
885.54	17.82	-2.4	20.22	Vertical	46	28.18

For 802.11n(HT20)Channel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
53.0375	13.58	-15.4	28.98	Vertical	40	26.42
59.585	13.56	-16.3	29.86	Vertical	40	26.44



98.9185	9.26	-17.4	26.66	Vertical	43.5	34.24
199.9925	16.11	-16.6	32.71	Vertical	43.5	27.39
436.3815	22.88	-10.4	33.28	Vertical	46	23.12
920.0235	18.32	-1.7	20.02	Vertical	46	27.68

For 802.11ac(VHT20)Channel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.2425	15.22	-18.8	34.02	Vertical	40	24.78
58.8575	13.54	-16.2	29.74	Vertical	40	26.46
165.121	5.94	-19.8	25.74	Vertical	43.5	37.56
197.81	12.86	-16.5	29.36	Vertical	43.5	30.64
436.333	21.6	-10.4	32	Vertical	46	24.4
832.578	17.9	-3.3	21.2	Vertical	46	28.1

For 802.11ax(HE20)Channel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.8915	14.85	-19.2	34.05	Vertical	40	25.15
62.495	12.02	-17	29.02	Vertical	40	27.98
123.993	12.6	-19.6	32.2	Vertical	43.5	30.9
199.9925	15.74	-16.6	32.34	Vertical	43.5	27.76
436.333	21.75	-10.4	32.15	Vertical	46	24.25
929.2385	18.23	-1.6	19.83	Vertical	46	27.77

For 802.11aChannel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.843	15.2	-19.2	34.4	Vertical	40	24.8
60.5065	11.76	-16.4	28.16	Vertical	40	28.24
124.9145	11.21	-19.8	31.01	Vertical	43.5	32.29
199.944	12.85	-16.6	29.45	Vertical	43.5	30.65
436.3815	22.62	-10.4	33.02	Vertical	46	23.38
938.017	18.27	-1.8	20.07	Vertical	46	27.73



For 802.11n(HT20)Channel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
33.1525	11.26	-19.1	30.36	Vertical	40	28.74
59.6335	13.08	-16.3	29.38	Vertical	40	26.92
96.5905	10.73	-17.8	28.53	Vertical	43.5	32.77
199.9925	16.01	-16.6	32.61	Vertical	43.5	27.49
436.333	21.61	-10.4	32.01	Vertical	46	24.39
830.2985	17.9	-3.3	21.2	Vertical	46	28.1

For 802.11ac(VHT20)Channel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.067	15.54	-19.1	34.64	Vertical	40	24.46
61.137	12.73	-16.5	29.23	Vertical	40	27.27
121.8105	11.61	-19.3	30.91	Vertical	43.5	31.89
199.9925	15.79	-16.6	32.39	Vertical	43.5	27.71
436.333	21.61	-10.4	32.01	Vertical	46	24.39
936.9015	18.27	-1.8	20.07	Vertical	46	27.73

For 802.11ax(HE20)Channel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.6975	14.13	-19.2	33.33	Vertical	40	25.87
59.488	12.36	-16.3	28.66	Vertical	40	27.64
124.0415	13	-19.6	32.6	Vertical	43.5	30.5
199.944	12.98	-16.6	29.58	Vertical	43.5	30.52
436.3815	22.51	-10.4	32.91	Vertical	46	23.49
833.354	17.69	-3.4	21.09	Vertical	46	28.31

For 802.11aChannel No.:140

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.843	15.57	-19.2	34.77	Vertical	40	24.43
60.8945	10.79	-16.5	27.29	Vertical	40	29.21



149.504	10.53	-20.7	31.23	Vertical	43.5	32.97
199.9925	15.78	-16.6	32.38	Vertical	43.5	27.72
436.3815	22.48	-10.4	32.88	Vertical	46	23.52
830.0075	18.05	-3.3	21.35	Vertical	46	27.95

For 802.11n(HT20)Channel No.:140

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
39.7485	11.56	-17	28.56	Vertical	40	28.44
93.923	11.63	-18.4	30.03	Vertical	43.5	31.87
122.6835	11.09	-19.4	30.49	Vertical	43.5	32.41
199.9925	15.79	-16.6	32.39	Vertical	43.5	27.71
436.333	21.55	-10.4	31.95	Vertical	46	24.45
886.413	17.82	-2.4	20.22	Vertical	46	28.18

For 802.11ac(VHT20)Channel No.:140

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.6975	13.96	-19.2	33.16	Vertical	40	26.04
57.4025	12.67	-15.9	28.57	Vertical	40	27.33
125.0115	10.62	-19.8	30.42	Vertical	43.5	32.88
199.75	10.7	-16.6	27.3	Vertical	43.5	32.8
436.333	21.51	-10.4	31.91	Vertical	46	24.49
959.5025	17.84	-2	19.84	Vertical	46	28.16

For 802.11ax(HE20)Channel No.:140

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.649	12.8	-19.2	32	Vertical	40	27.2
60.2155	11.42	-16.4	27.82	Vertical	40	28.58
122.053	10.18	-19.3	29.48	Vertical	43.5	33.32
199.9925	15.81	-16.6	32.41	Vertical	43.5	27.69
436.333	21.55	-10.4	31.95	Vertical	46	24.45
890.196	17.72	-2.5	20.22	Vertical	46	28.28



For 802.11n(HT40)Channel No.:102

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
40.0395	11.14	-16.9	28.04	Vertical	40	28.86
58.1785	13.66	-16	29.66	Vertical	40	26.34
121.859	11.49	-19.3	30.79	Vertical	43.5	32.01
199.9925	15.73	-16.6	32.33	Vertical	43.5	27.77
436.333	21.48	-10.4	31.88	Vertical	46	24.52
829.668	18.3	-3.3	21.6	Vertical	46	27.7

For 802.11ac(VHT40)Channel No.:102

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.1155	15.31	-19.1	34.41	Vertical	40	24.69
59.488	12.05	-16.3	28.35	Vertical	40	27.95
96.5905	11.48	-17.8	29.28	Vertical	43.5	32.02
199.9925	15.76	-16.6	32.36	Vertical	43.5	27.74
436.333	21.53	-10.4	31.93	Vertical	46	24.47
869.9715	17.86	-2.4	20.26	Vertical	46	28.14

For 802.11ax(HE40)Channel No.:102

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.291	15.82	-18.8	34.62	Vertical	40	24.18
58.9545	12.99	-16.2	29.19	Vertical	40	27.01
101.1495	11.51	-17.1	28.61	Vertical	43.5	31.99
195.967	9.85	-16.6	26.45	Vertical	43.5	33.65
436.333	21.54	-10.4	31.94	Vertical	46	24.46
791.9835	20.9	-3.8	24.7	Vertical	46	25.1

For 802.11n(HT40)Channel No.:118

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.2425	15.01	-18.8	33.81	Vertical	40	24.99
59.197	9.85	-16.2	26.05	Vertical	40	30.15
123.702	9.77	-19.6	29.37	Vertical	43.5	33.73