Universal Remote Key User Manual

Overview:


Xhorse universal remote key is suitable for vehicle and garage door which contains the Xhorse receiver.

Button Description:



Change battery:

First use or when the battery runs out need to change new battery, following steps:

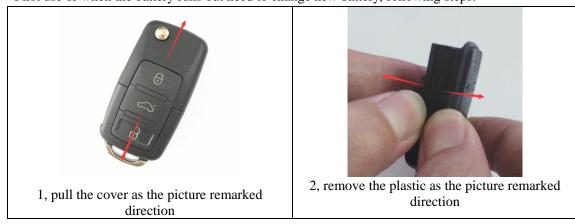



3, take the battery out and replace new one (Notes:the battery type is 2032 with 3 voltage,ensure the positive and negative of battery is correct)

4, install the key same as before

While holding the lock and unlock key, the radio frequency of the remote control can be switched between 433.92MHz and 315MHz so to change to control the vehicle and garage door, as shown in the figure below;



Pairing method:

1)Pairing with vehicle: Referring to the corresponding vehicle models to match.

2) Pairing with garage door: Press the "learn" button of receiver for 2-3 seconds, then you can see the receiver led light on, press your remote 4-5 time, after that, the receiver led light will continuous flashing, when it off, pairing successes. If failed to match the receiver, please repeat the above method.

If you want to control both vehicle and garage, please separate the frequency.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -- Reorient or relocate the receiving antenna.
- -- Increase the separation between the equipment and receiver.
- -- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -- Consult the dealer or an experienced radio/TV technician for help.