



# **RADIO TEST REPORT**

**FCC ID: XN6-S2120W**

**IC: 8819A-S2120W**

**Product :** 21"2.0 Sound Stand

**Trade Name :** VIZIO

**Model Name :** S2120w-E0

**Serial Model :** S2120w-E0D

**Report No. :** NTEK-2014NT0704059F2

## **Prepared for**

Zylux Acoustic Corporation

3F,22,Lane 35,Jihu Road,Taipei NeiHu Technology Park,114 Taipei  
Taiwan-R.O.C

## **Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street  
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website: [www.ntek.org.cn](http://www.ntek.org.cn)

## TEST RESULT CERTIFICATION

**Applicant's name** ..... Zylux Acoustic Corporation

Address ..... 3F,22,Lane 35,Jihu Road,Taipei NeiHu Technology Park,  
114 Taipei Taiwan-R.O.C

**Manufacture's Name**... Zhao Yang Electronic(Shenzhen)Co., Ltd.

Address ..... Sec.A, 4F, Building 1&2, De Yong Jia Ind. Park, GuangQiao Rd. Yu Lv  
Com., GongMing St. 518100 Guang Ming New Distr., Shenzhen, China

### Product description

Product name ..... 21"2.0 Sound Stand

Model and/or type ..... S2120w-E0  
reference .....

Serial Model ..... S2120w-E0D

**Standards** ..... FCC Part15.247, 01 Oct. 2013  
IC RSS-210,Issue 8, December 2010

Test procedure ..... ANSI C63.4-2003  
RSS-Gen Rules and KDB 558074 D01 DTS Meas Guidance v03r02

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements/ the Industry Canada requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

**Date of Test** .....

Date (s) of performance of tests ..... 07Jul. 2014 ~23 Jul. 2014

Date of Issue ..... 23 Jul. 2014

Test Result..... **Pass**

Testing Engineer : Kyle Xu  
(Kyle Xu)

Technical Manager : Brown Lu  
(Brown Lu)

Authorized Signatory : Bill Yao  
(Bill Yao)

**Table of Contents**

	<b>Page</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2 . GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
<b>3 . EMC EMISSION TEST</b>	<b>13</b>
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	18
3.2.1 RADIATED EMISSION LIMITS	19
3.2.2 TEST PROCEDURE	20
3.2.3 DEVIATION FROM TEST STANDARD	20
3.2.4 TEST SETUP	21
3.2.5 EUT OPERATING CONDITIONS	22
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	23
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	24
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	25
<b>4 . POWER SPECTRAL DENSITY TEST</b>	<b>29</b>
4.1 APPLIED PROCEDURES / LIMIT	29
4.1.1 TEST PROCEDURE	29
4.1.2 DEVIATION FROM STANDARD	29
4.1.3 TEST SETUP	29
4.1.4 EUT OPERATION CONDITIONS	29
4.1.5 TEST RESULTS	30
<b>5 . BANDWIDTH TEST</b>	<b>32</b>
5.1 APPLIED PROCEDURES / LIMIT	32
5.1.1 TEST PROCEDURE	32

<b>Table of Contents</b>	<b>Page</b>
5.1.2 EUT OPERATION CONDITIONS	32
5.1.3 TEST RESULTS	33
<b>6 . PEAK OUTPUT POWER TEST</b>	<b>35</b>
6.1 APPLIED PROCEDURES / LIMIT	35
6.1.1 TEST PROCEDURE	35
6.1.2 DEVIATION FROM STANDARD	35
6.1.3 TEST SETUP	35
6.1.4 EUT OPERATION CONDITIONS	35
6.1.5 TEST RESULTS	36
<b>7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE</b>	<b>37</b>
7.1 DEVIATION FROM STANDARD	37
7.2 TEST SETUP	37
7.3 EUT OPERATION CONDITIONS	37
7.4 TEST RESULTS	38
<b>8 . ANTENNA REQUIREMENT</b>	<b>40</b>
8.1 STANDARD REQUIREMENT	40
8.2 EUT ANTENNA	40
<b>9 . EUT TEST PHOTO</b>	<b>41</b>
<b>APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C/ RSS-210 & RSS-Gen Rules			
Standard Section	Test Item	Judgment	Remark
15.207/ RSS-Gen §7.2.4	Conducted Emission	PASS	
15.247 (a)(2)/ RSS-Gen§4.6.1&RSS-210§A8.2 (a)	99% Occupied Bandwidth & 6dB Bandwidth	PASS	
15.247 (b)/ RSS-210 §A8.4 (4)	Peak Output Power	PASS	
15.247 (c)/ RSS-210 §2.2, §A8.5	Radiated Spurious Emission	PASS	
15.247 (d)/ RSS-210 §A8.2 (b)	Power Spectral Density	PASS	
15.205/ RSS-210 §2.2, §A8.5	Band Edge Emission	PASS	
15.203/ RSS-Gen §7.1.2	Antenna Requirement	PASS	

### NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

## 1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	21"2.0 Sound Stand	
Trade Name	<b>VIZIO</b>	
Model Name	S2120w-E0	
Serial Model	S2120w-E0D	
Model Difference	All the model are the same circuit and RF module,except the model name.	
Product Description	The EUT is a 21"2.0 sound stand	
	Operation Frequency:	2402~2480MHz
	Modulation Type:	GFSK
	Number Of Channel	40CH
	Antenna Designation:	Please see Note 3.
	Output Power(Conducted):	8.996dBm
	Antenna Gain (dBi)	1.0dbi
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Ratings	AC 120V,60Hz	
Adapter	Adapter 1: Mode: SW02G-1200125W2 Input: 100-240V~, 50/60Hz, 0.5A Max Output: 12V $\overline{\text{---}}$ , 1.25A	
	Adapter 2: Mode: S018AY1200125 Input: 100-240V~, 50/60Hz, 0.5A Max Output: 12V $\overline{\text{---}}$ , 1.25A	
Battery	N/A	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel	Frequency (MHz)
00	2402
01	2404
.....	.....
.....	.....
.....	...
.....	.....
38	2478
39	2480

3.

Table for Filed Antenna

Ant .	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	PCB Antenna	N/A	1.0	BT Antenna



## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39
Mode 4	Keeping TX mode


For Conducted Emission	
Final Test Mode	Description
Mode 4	Keeping TX mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39
Mode 4	Keeping TX mode

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

## 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



## 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	21"2.0 sound stand	VIZIO	S2120w-E0	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2014.07.06	2015.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2014.06.07	2015.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2014.07.06	2015.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.06.07	2015.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2014.06.07	2015.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2014.07.06	2015.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2014.07.06	2015.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2013.12.22	2014.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2014.06.08	2015.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2014.07.06	2015.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2014.07.06	2015.07.05	1 year

### Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2014.06.06	2015.06.05	1 year
2	LISN	R&S	ENV216	101313	2013.08.24	2014.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2013.08.24	2014.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.06.07	2015.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.06.07	2015.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2014.06.08	2015.06.07	1 year

1	Attenuation	MCE	24-10-34	BN9258	2014.06.08	2015.06.07	1 year
---	-------------	-----	----------	--------	------------	------------	--------

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC/ RSS-210
0.50 -5.0	73.00	60.00	56.00	46.00	FCC/ RSS-210
5.0 -30.0	73.00	60.00	60.00	50.00	FCC/ RSS-210

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


### 3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

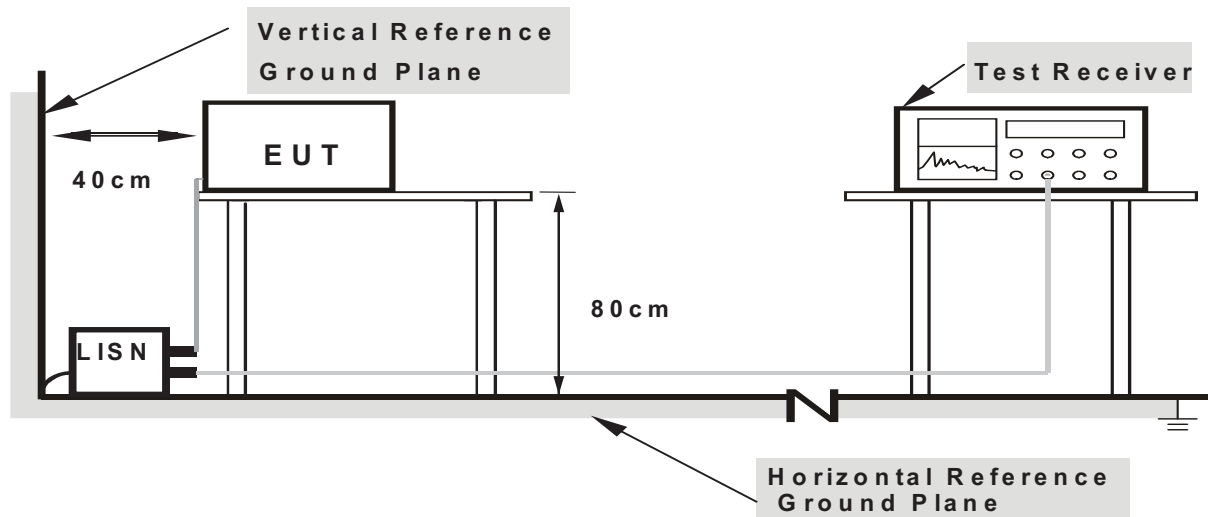

**Note:** 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


### 3.1.6 TEST RESULTS

EUT :	21"2.0 sound stand	Model Name. :	S2120w-E0
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 4(Adapter 1)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
0.1620	33.31	9.60	42.91	65.36	-22.45	QP
0.1620	20.94	9.60	30.54	55.36	-24.82	AVG
0.3860	25.48	9.50	34.98	58.15	-23.17	QP
0.3860	24.57	9.50	34.07	48.15	-14.08	AVG
0.4380	22.87	9.51	32.38	57.10	-24.72	QP
0.4380	18.62	9.51	28.13	47.10	-18.97	AVG
1.1539	19.76	9.53	29.29	56.00	-26.71	QP
1.1539	15.54	9.53	25.07	46.00	-20.93	AVG
2.3060	23.31	9.55	32.86	56.00	-23.14	QP
2.3060	14.31	9.55	23.86	46.00	-22.14	AVG
4.6099	20.33	9.60	29.93	56.00	-26.07	QP
4.6099	11.81	9.60	21.41	46.00	-24.59	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

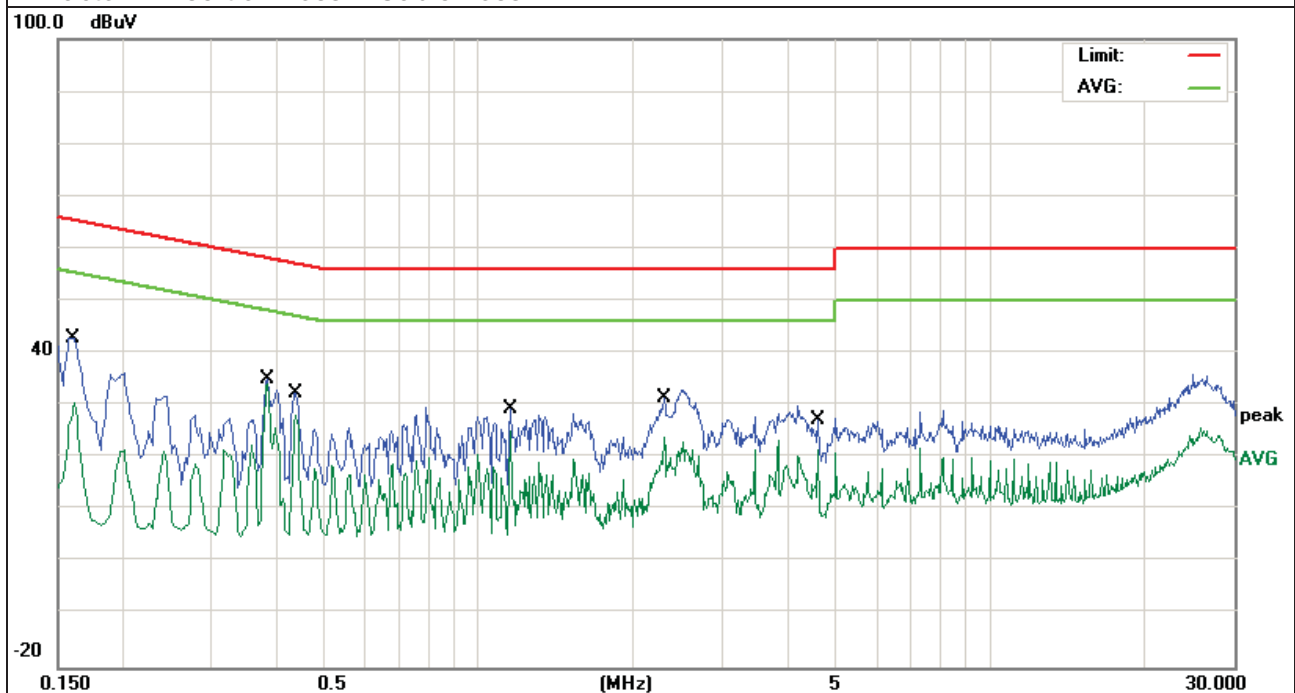


EUT :	21"2.0 sound stand	Model Name. :	S2120w-E0
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 4(Adapter 1)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
0.1580	33.27	9.63	42.90	65.56	-22.66	QP
0.1580	18.89	9.63	28.52	55.56	-27.04	AVG
0.3860	25.72	9.52	35.24	58.15	-22.91	QP
0.3860	23.98	9.52	33.50	48.15	-14.65	AVG
0.4380	22.46	9.52	31.98	57.10	-25.12	QP
0.4380	17.32	9.52	26.84	47.10	-20.26	AVG
1.1539	19.74	9.55	29.29	56.00	-26.71	QP
1.1539	13.93	9.55	23.48	46.00	-22.52	AVG
2.3060	22.79	9.57	32.36	56.00	-23.64	QP
2.3060	16.50	9.57	26.07	46.00	-19.93	AVG
4.6099	22.99	9.60	32.59	56.00	-23.41	QP
4.6099	17.53	9.60	27.13	46.00	-18.87	AVG

**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

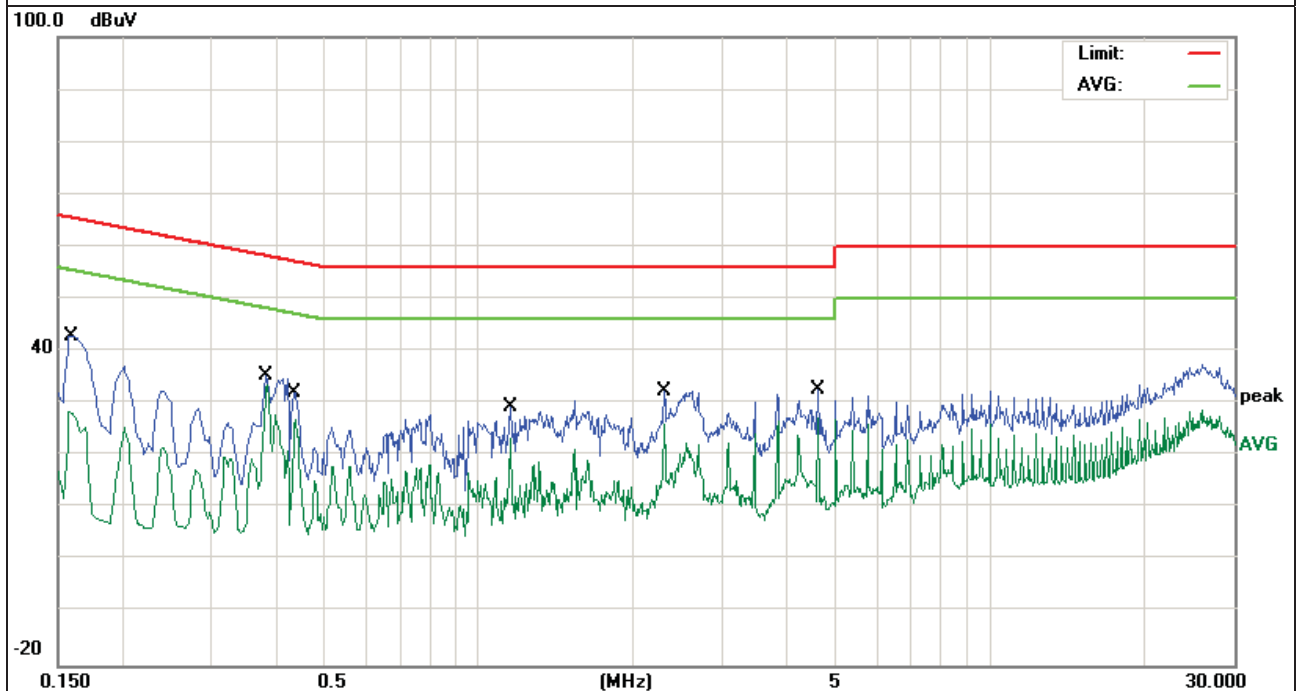




EUT :	21"2.0 sound stand	Model Name. :	S2120w-E0
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 4(Adapter 2)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
0.1620	46.22	9.60	55.82	65.36	-9.54	QP
0.1620	22.30	9.60	31.90	55.36	-23.46	AVG
0.2099	41.79	9.49	51.28	63.21	-11.93	QP
0.2099	15.01	9.49	24.50	53.21	-28.71	AVG
0.2700	34.49	9.49	43.98	61.12	-17.14	QP
0.2700	10.59	9.49	20.08	51.12	-31.04	AVG
4.6097	24.23	9.60	33.83	56.00	-22.17	QP
4.6097	11.10	9.60	20.70	46.00	-25.30	AVG
8.8338	29.53	9.70	39.23	60.00	-20.77	QP
8.8338	13.66	9.70	23.36	50.00	-26.64	AVG
12.1059	29.87	9.77	39.64	60.00	-20.36	QP
12.1059	15.61	9.77	25.38	50.00	-24.62	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

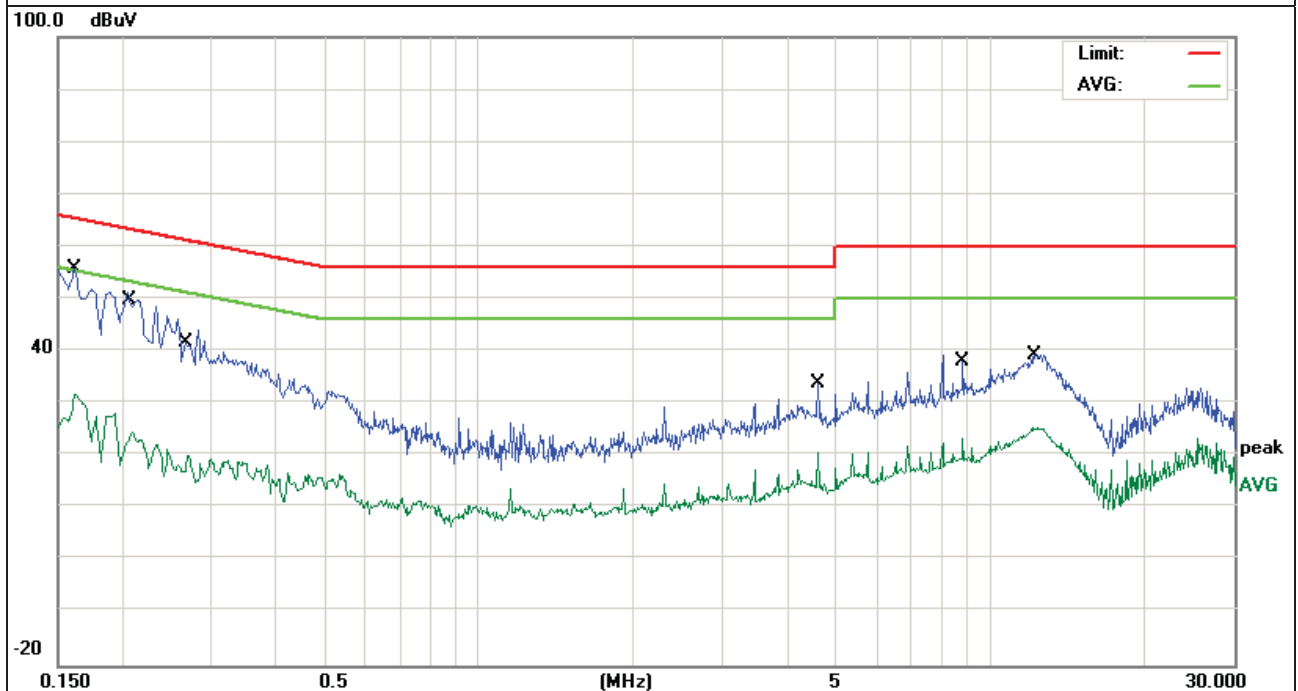


EUT :	21"2.0 sound stand	Model Name. :	S2120w-E0
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 4(Adapter 2)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
0.1700	43.08	9.59	52.67	64.96	-12.29	QP
0.1700	21.90	9.59	31.49	54.96	-23.47	AVG
0.2058	42.28	9.50	51.78	63.37	-11.59	QP
0.2058	17.87	9.50	27.37	53.37	-26.00	AVG
0.2500	38.72	9.50	48.22	61.75	-13.53	QP
0.2500	13.84	9.50	23.34	51.75	-28.41	AVG
4.6097	23.22	9.60	32.82	56.00	-23.18	QP
4.6097	11.31	9.60	20.91	46.00	-25.09	AVG
8.0656	28.82	9.70	38.52	60.00	-21.48	QP
8.0656	14.64	9.70	24.34	50.00	-25.66	AVG
12.5496	29.73	9.79	39.52	60.00	-20.48	QP
12.5496	15.84	9.79	25.63	50.00	-24.37	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

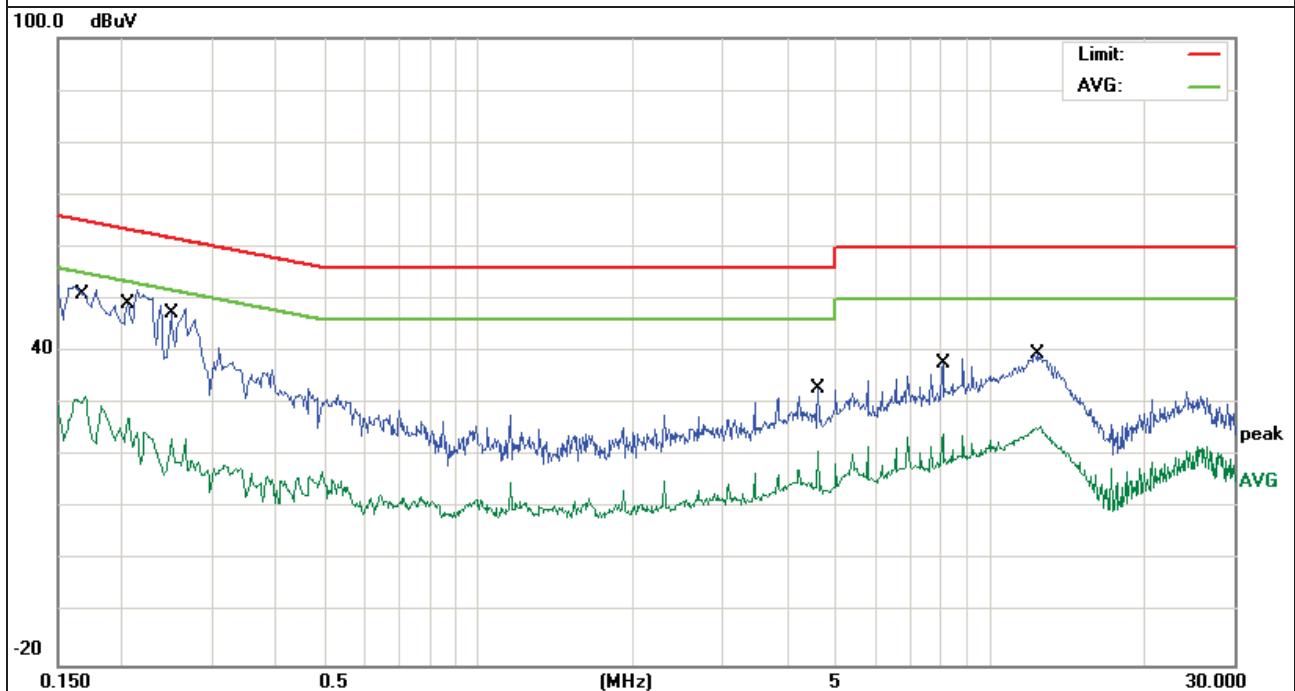

### 3.2 RADIATED EMISSION MEASUREMENT

### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a)/ RSS-210 §2.2& A8.5, then the 15.209(a)/ RSS-210 & A8.5 limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C/ RSS-Gen.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average , PEAK DETECTOR IS USED FOR BOTH

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**3.2.2 TEST PROCEDURE**

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested  
and performed pretest to three orthogonal axis. The worst case emissions were reported

**3.2.3 DEVIATION FROM TEST STANDARD**


No deviation

### 3.2.4 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

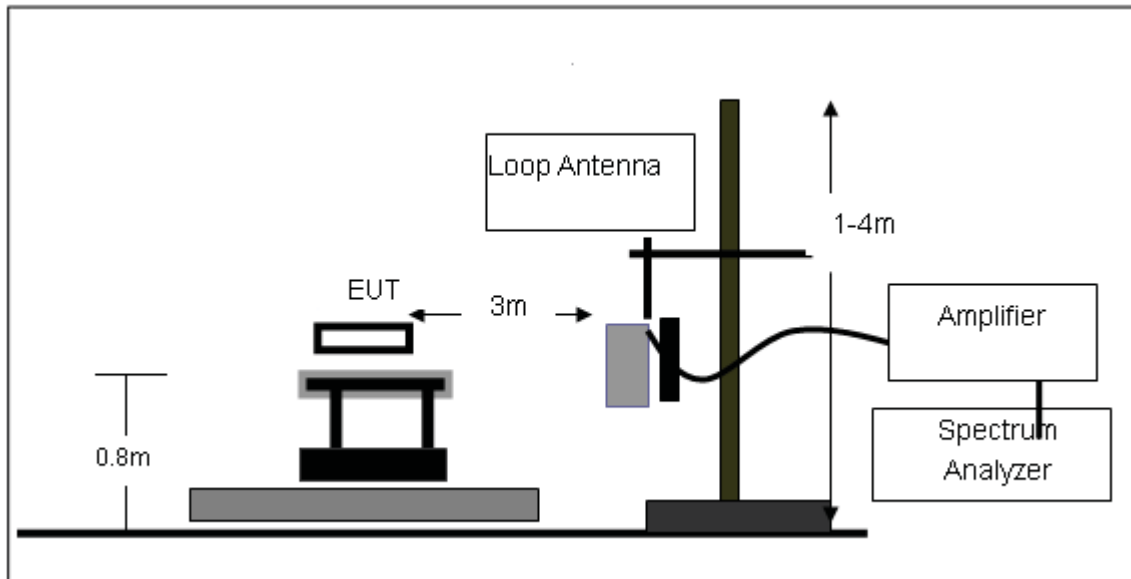

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

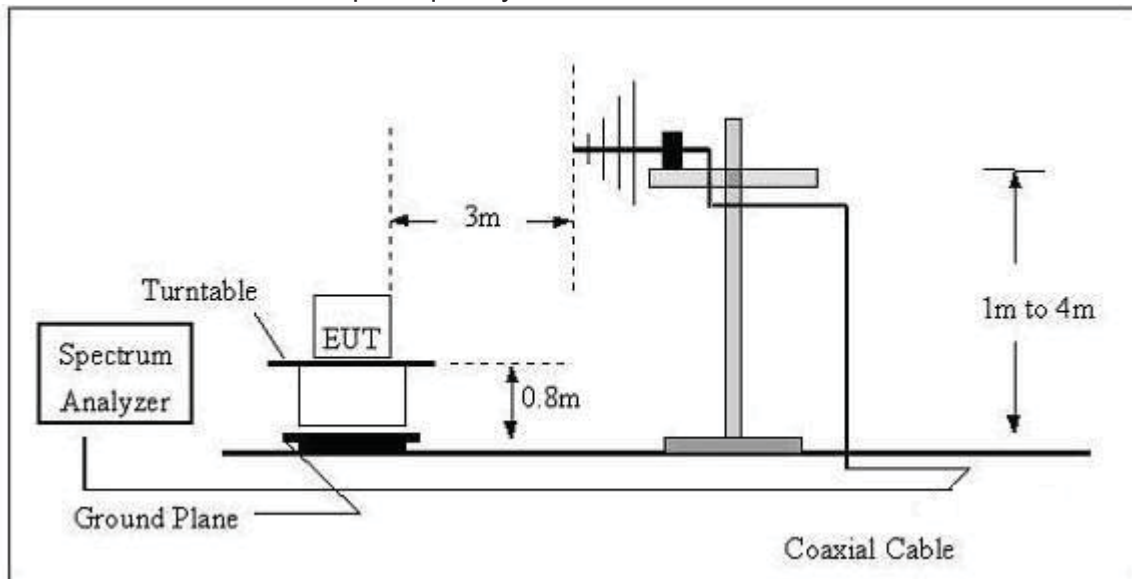

## (C) Radiated Emission Test-Up Frequency Above 1GHz

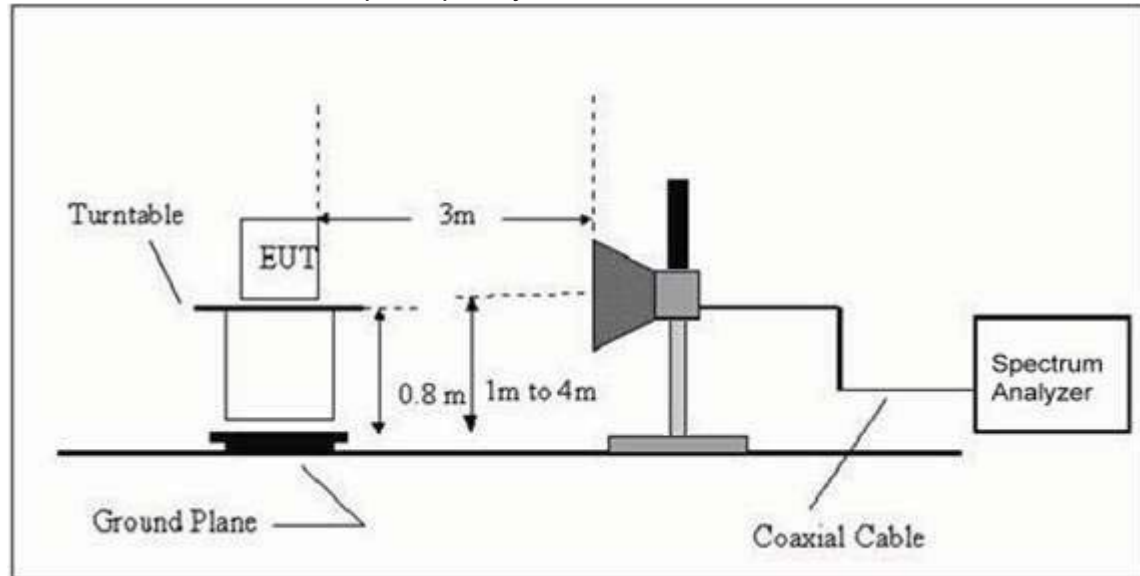**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT:	21"2.0 sound stand	Model Name. :	S2120w-E0
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/50Hz
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

#### NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

### 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	21"2.0 sound stand	Model Name :	S2120w-E0
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX(Adapter 1)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	33.9174	16.52	17.28	33.80	40.00	-6.20	QP
V	74.9191	21.15	5.70	26.85	40.00	-13.15	QP
V	137.9028	15.04	11.51	26.55	43.50	-16.95	QP
V	202.1005	18.75	10.92	29.67	43.50	-13.83	QP
V	269.4284	13.22	13.81	27.03	46.00	-18.97	QP
V	489.0269	9.15	20.07	29.22	46.00	-16.78	QP
H	33.5624	8.04	17.48	25.52	40.00	-14.48	QP
H	78.6888	22.82	5.81	28.63	40.00	-11.37	QP
H	124.5690	20.87	12.01	32.88	43.50	-10.62	QP
H	215.2678	26.00	11.82	37.82	43.50	-5.68	QP
H	278.0668	22.88	13.90	36.78	46.00	-9.22	QP
H	420.5803	12.88	18.72	31.60	46.00	-14.40	QP

#### Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

EUT :	21"2.0 sound stand	Model Name :	S2120w-E0
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX(Adapter 2)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	30.1051	11.68	19.37	31.05	40.00	-8.95	QP
V	38.2120	15.92	14.66	30.58	40.00	-9.42	QP
V	51.4806	17.18	10.27	27.45	40.00	-12.55	QP
V	79.2425	21.63	5.83	27.46	40.00	-12.54	QP
V	188.4122	24.20	10.69	34.89	43.50	-8.61	QP
V	284.9766	12.37	13.98	26.35	46.00	-19.65	QP
H	79.2425	25.60	5.83	31.43	40.00	-8.57	QP
H	124.5690	21.48	12.01	33.49	43.50	-10.01	QP
H	183.8437	25.47	10.65	36.12	43.50	-7.38	QP
H	215.2675	26.22	11.82	38.04	43.50	-5.46	QP
H	289.0020	19.98	14.02	34.00	46.00	-12.00	QP
H	420.5803	12.62	18.72	31.34	46.00	-14.66	QP

#### Remark:



Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit





### 3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark	Polar (H/V)
Low Channel (2402 MHz)-Above 1G							
4804.000	67.98	-3.64	64.34	74	-9.66	Pk	Vertical
4804.000	54.23	-3.64	50.59	54	-3.41	AV	Vertical
7206.000	57.12	-0.95	56.17	74	-17.83	Pk	Vertical
7206.000	43.56	-0.95	42.61	54	-11.39	AV	Vertical
4804.000	64.22	-3.64	60.58	74	-13.42	Pk	Horizontal
4804.000	51.52	-3.64	47.88	54	-6.12	AV	Horizontal
7206.000	41.89	-0.96	40.93	74	-33.07	Pk	Horizontal
7206.000	41.35	-0.96	40.39	54	-13.61	AV	Horizontal
Mid Channel (2440 MHz)-Above 1G							
4880.000	65.87	-3.67	62.20	74	-11.80	Pk	Vertical
4880.000	52.76	-3.67	49.09	54	-4.91	AV	Vertical
7320.000	59.59	-0.82	58.77	74	-15.23	Pk	Vertical
7320.000	46.13	-0.82	45.31	54	-8.69	AV	Vertical
4880.000	63.56	-3.67	59.89	74	-14.11	Pk	Horizontal
4880.000	44.76	-3.67	41.09	54	-12.91	AV	Horizontal
7320.000	55.43	-0.82	54.61	74	-19.39	Pk	Horizontal
7320.000	42.14	-0.82	41.32	54	-12.68	AV	Horizontal
High Channel (2480MHz)- Above 1G							
4960.000	64.04	-3.59	60.45	74	-13.55	Pk	Vertical
4960.000	49.19	-3.59	45.6	54	-8.4	AV	Vertical
7440.000	50.97	-0.68	50.29	74	-23.71	Pk	Vertical
7440.000	41.23	-0.68	40.55	54	-13.45	AV	Vertical
4960.000	62.34	-3.59	58.75	74	-15.25	Pk	Horizontal
4960.000	43.67	-3.59	40.08	54	-13.92	AV	Horizontal
7440.000	50.42	-0.68	49.74	74	-24.26	Pk	Horizontal
7440.000	40.41	-0.68	39.73	54	-14.27	AV	Horizontal



# Conducted Spurious Emissions at Antenna Port: Low Channel

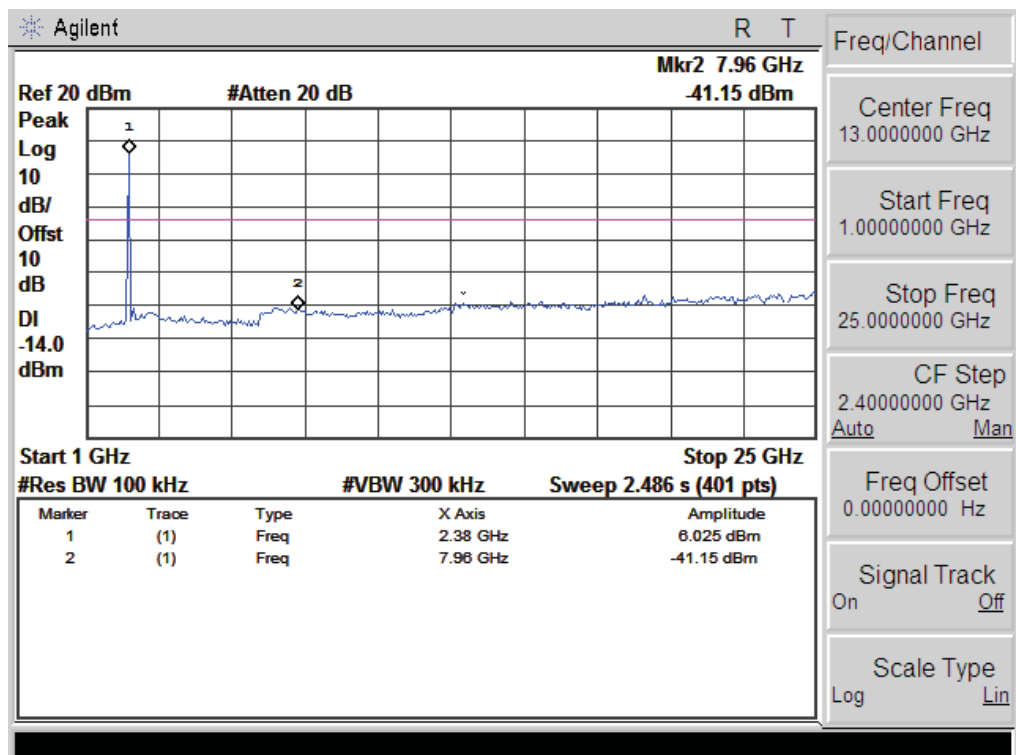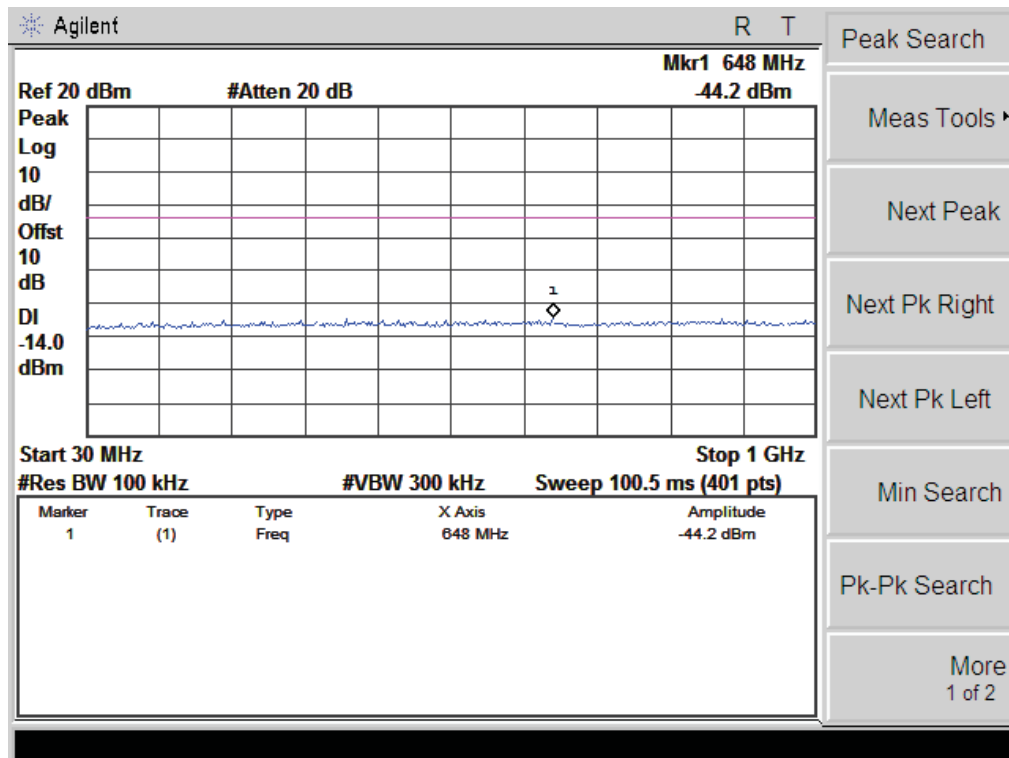

### Middle Channel

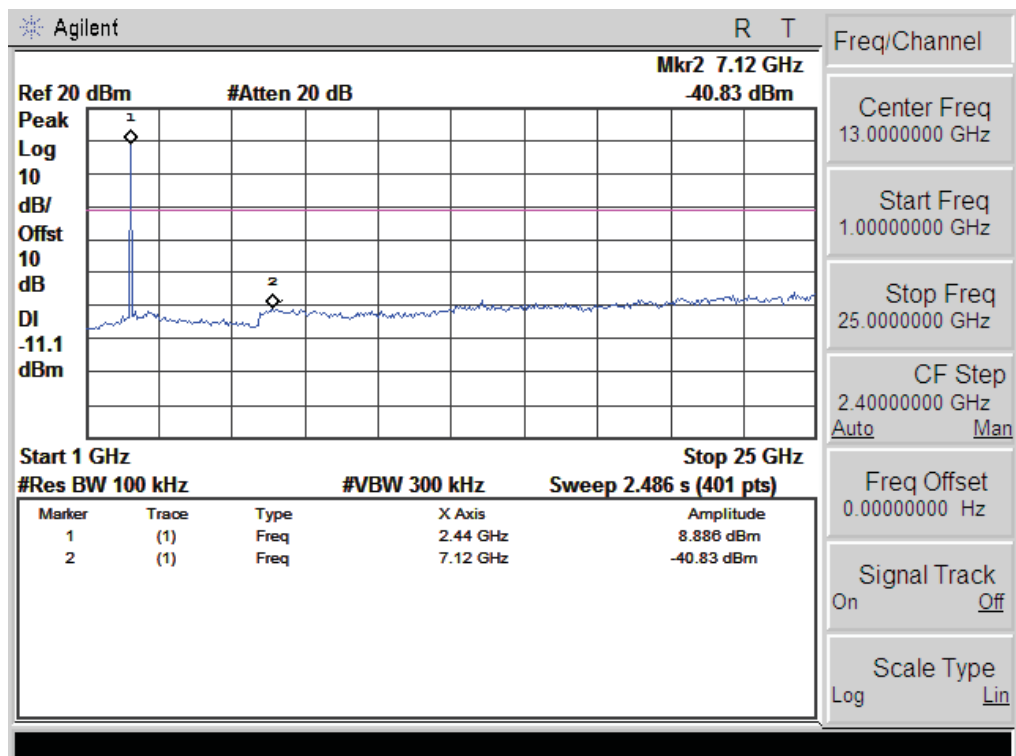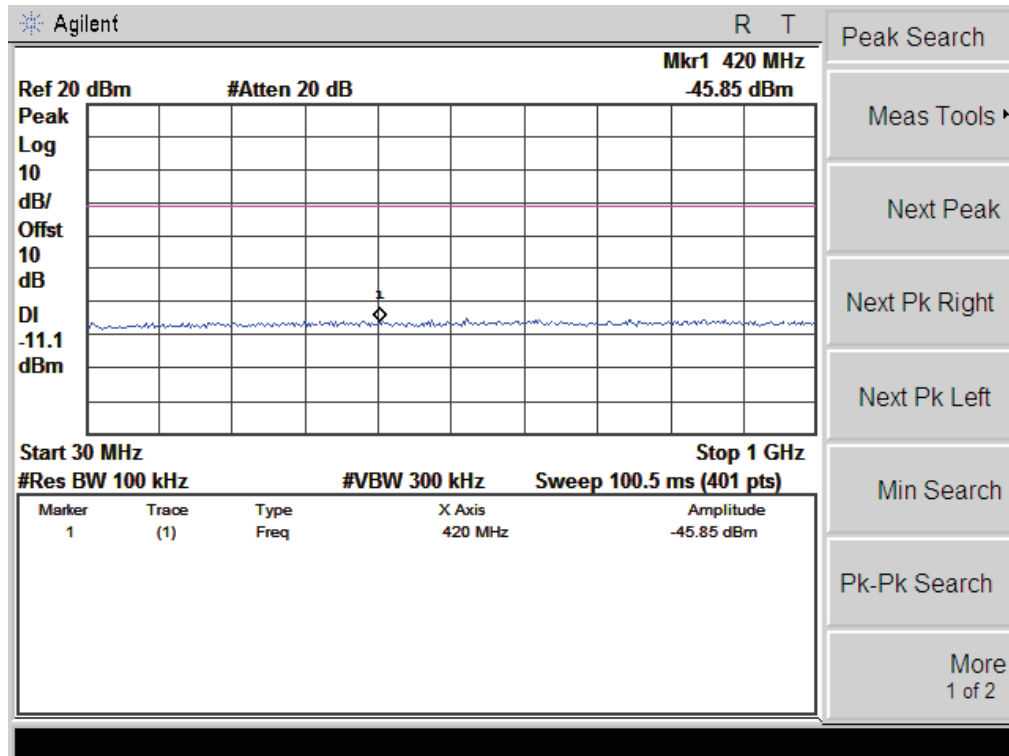

# High Channel

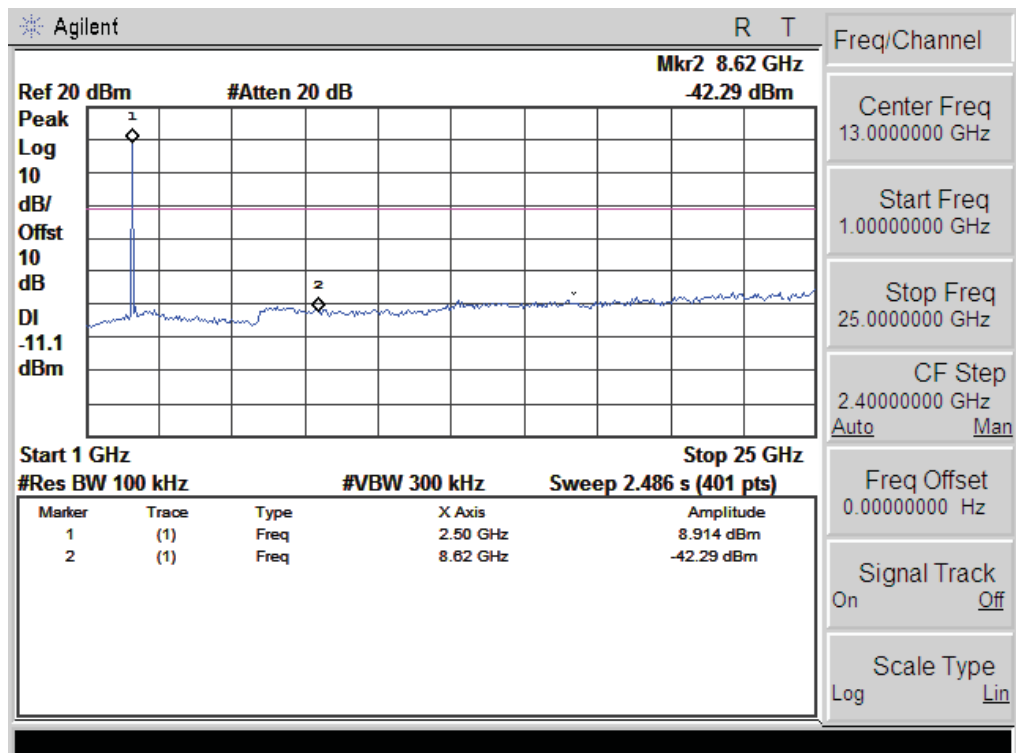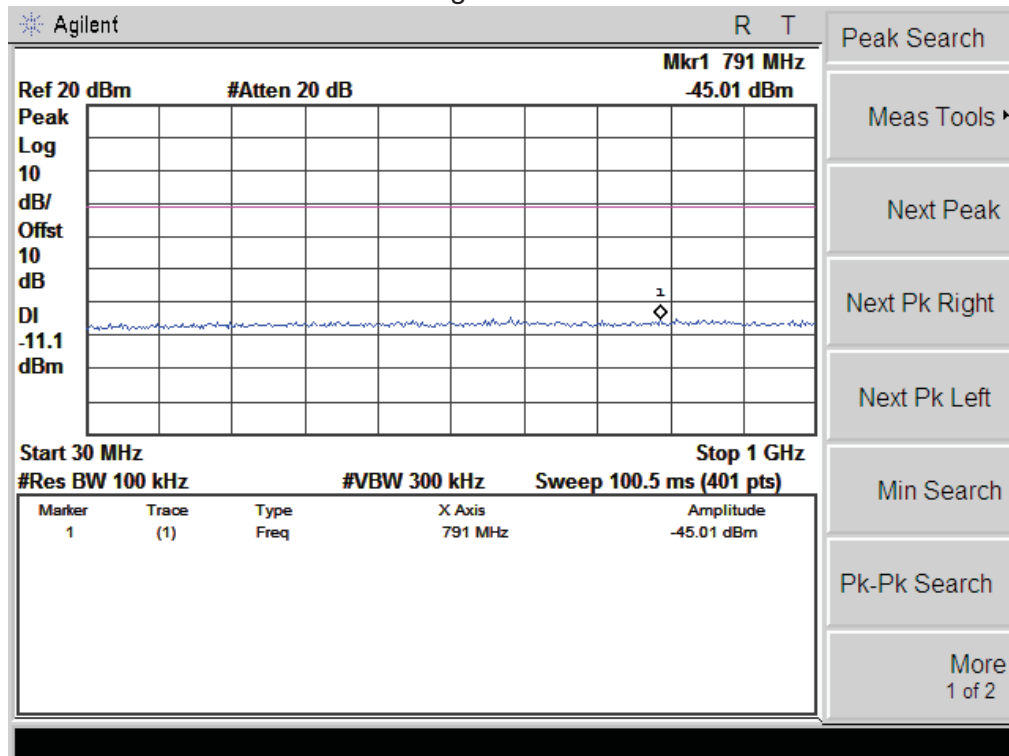

## 4. POWER SPECTRAL DENSITY TEST

### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C/ RSS-210				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247/ RSS-210§A8. 2 (b)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


#### 4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW  $\geq 3$  kHz.
4. Set the VBW  $\geq 3 \times$  RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### 4.1.2 DEVIATION FROM STANDARD

No deviation.

#### 4.1.3 TEST SETUP

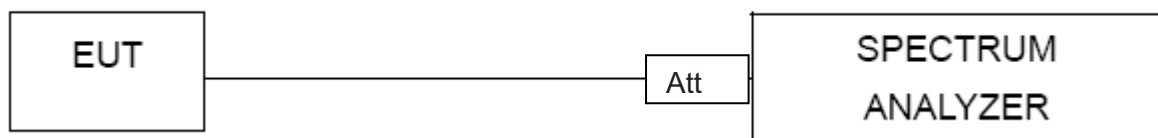


#### 4.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.1.5 TEST RESULTS

EUT :	21"2.0 sound stand	Model Name :	S2120w-E0
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	AC 120V/50Hz
Test Mode :	TX Mode /CH00, CH19, CH39		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2402 MHz	-7.816	8	PASS
2440 MHz	-5.749	8	PASS
2480 MHz	-6.158	8	PASS

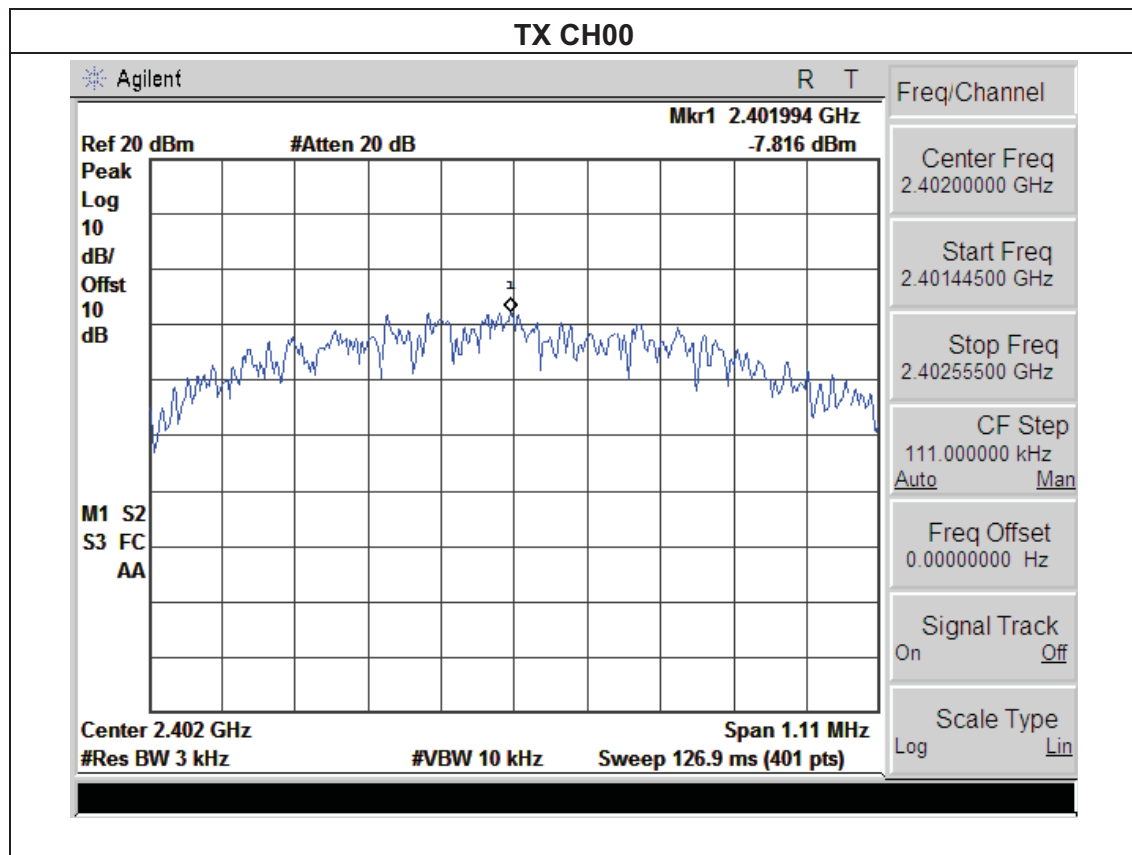

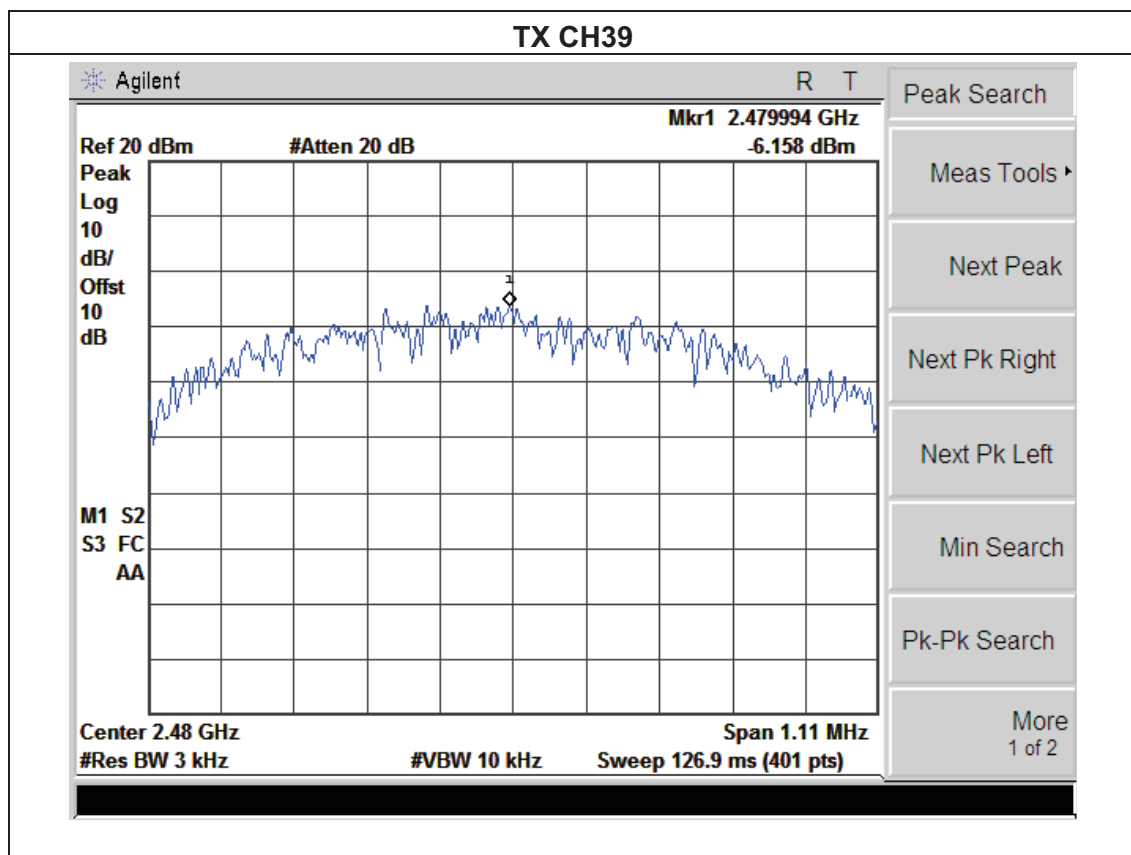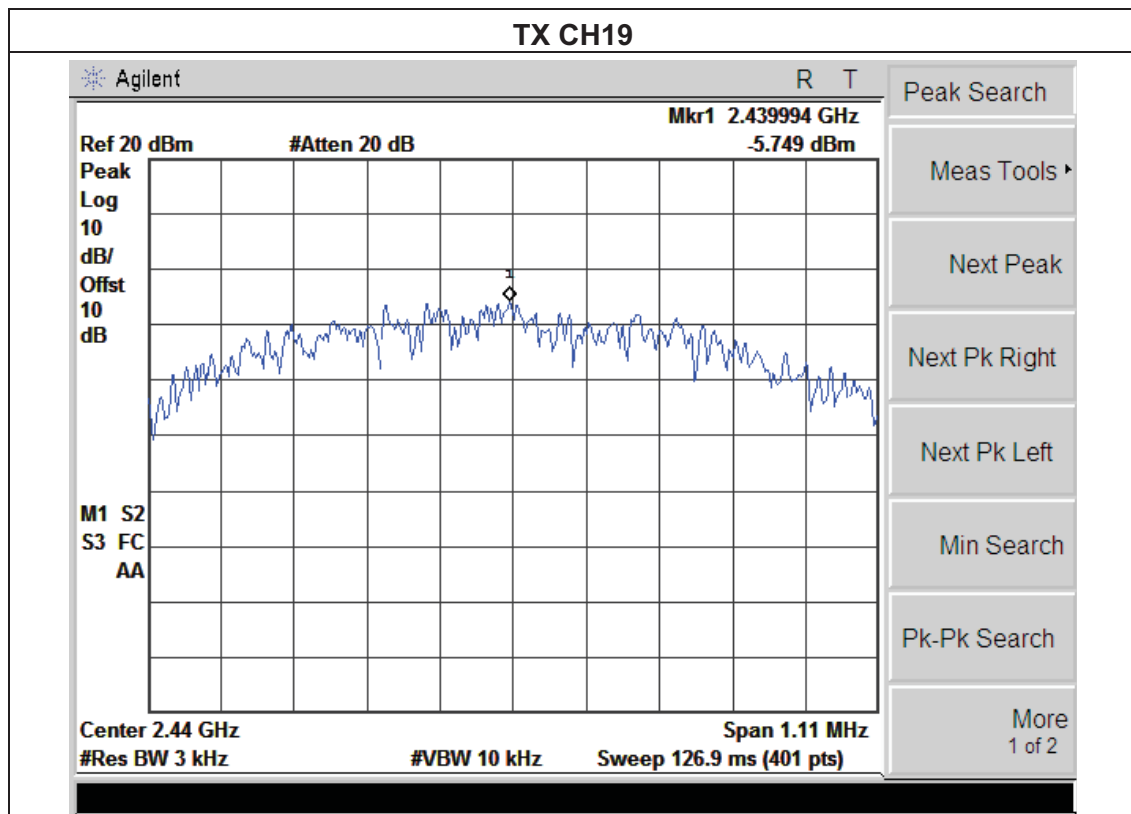

## 5. BANDWIDTH TEST


### 5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C/ RSS-210				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)/ RSS-Gen§4.6 .1&RSS-210§ A8.2 (a)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

#### 5.1.1 TEST PROCEDURE

According to KDB 558074 D01 DTS Meas Guidance v03r01

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

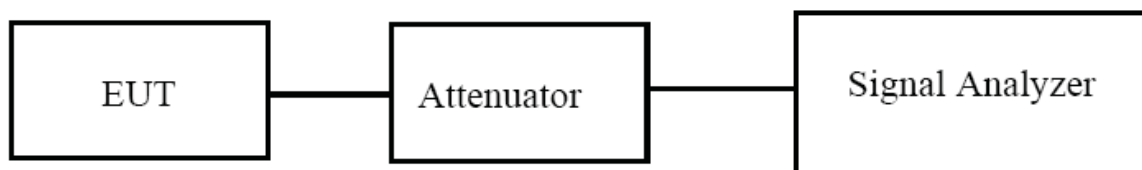

#### 5.1.2 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




### 5.1.3 TEST RESULTS

EUT :	21"2.0 sound stand	Model Name :	S2120w-E0
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	AC 120V/50Hz
Test Mode :	TX Mode /CH00, CH19, CH39		


Channel	Frequency (MHz)	6dB bandwidth (kHz)	99% Bandwidth (MHz)	Limit (kHz)	Result
Low	2402	737.065	1.052	500	Pass
Middle	2440	737.149	1.048	500	Pass
High	2480	735.576	1.048	500	Pass

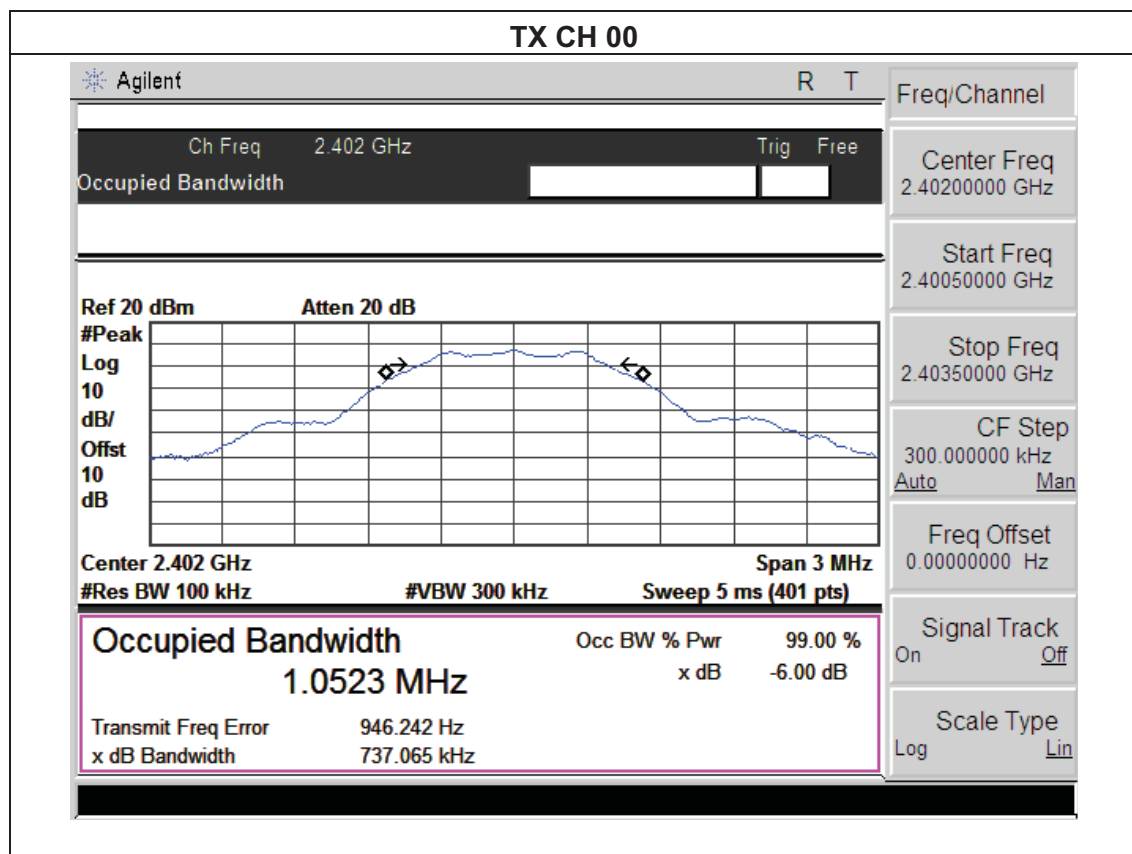

### TX CH 19

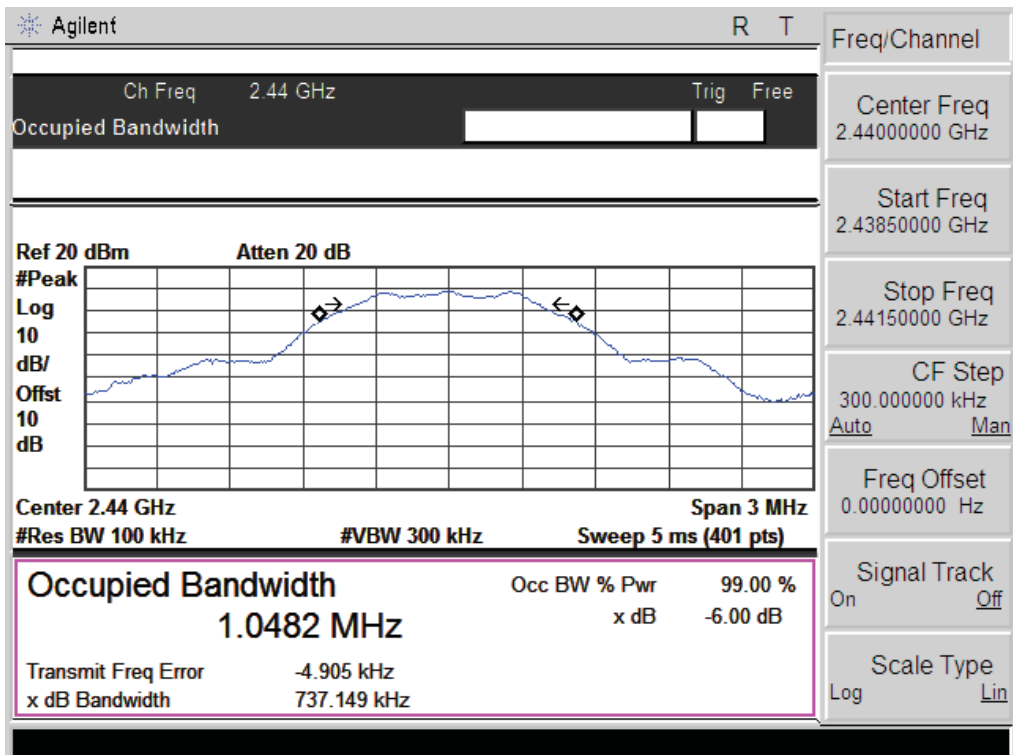

### TX CH 39

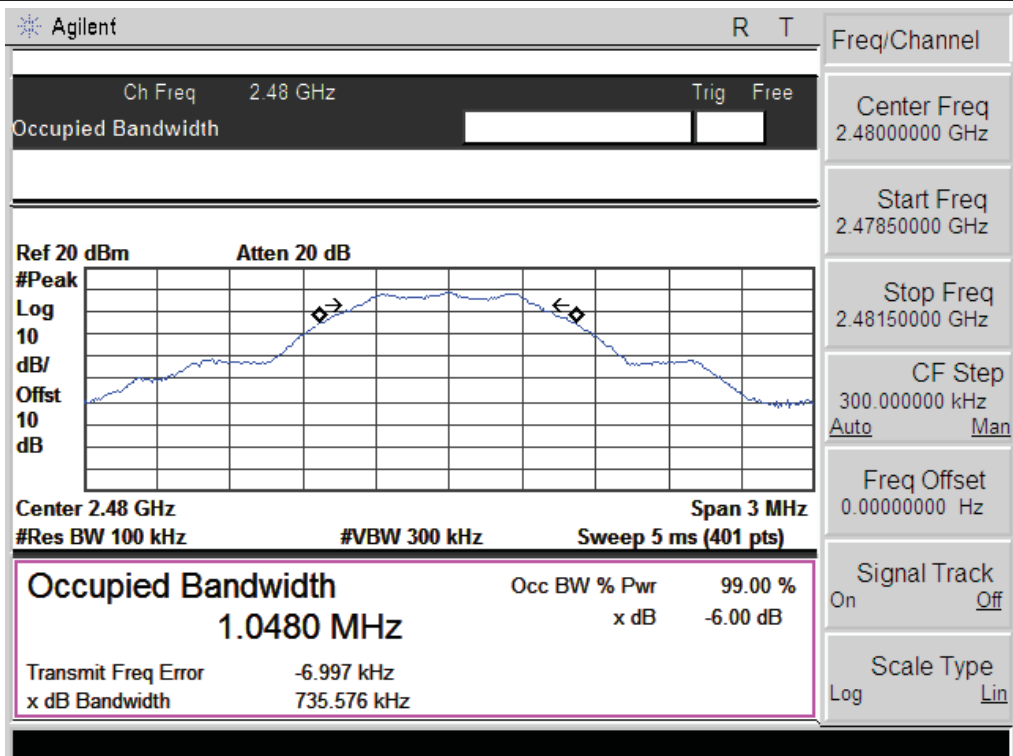

## 6. MAX CONDUCTED OUTPUT POWER TEST

### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C/ RSS-210				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)/ RSS-210 §A8.4 (4)	Max Conducted output power	1 watt or 30dBm	2400-2483.5	PASS

#### 6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP



#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 6.1.5 TEST RESULTS

EUT :	21"2.0 sound stand	Model Name :	S2120w-E0
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC 120V/50Hz
Test Mode :	TX Mode		

Test Channe	Frequency	Maximum Conducted Output Power	LIMIT
	(MHz)	(dBm)	dBm
CH00	2402	7.236	30
CH19	2440	8.996	30
CH39	2480	8.764	30

## 7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

### APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


### TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

### 7.1 DEVIATION FROM STANDARD

No deviation.

### 7.2 TEST SETUP

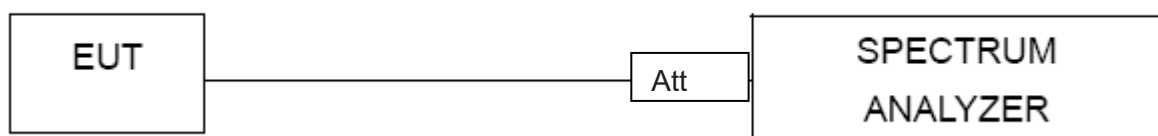

### 7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 7.4 TEST RESULTS

EUT :	21"2.0 sound stand	Model Name :	S2120w-E0
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	AC 120V/50Hz


Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
Left-band	56.41	30	Pass
Right-band	61.89	30	Pass

### Radiated band edge:


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark	Comment
2390	58.24	-13.06	45.18	74	-28.82	peak	Vertical
2390	61.45	-13.06	48.39	74	-25.61	peak	Horizontal
2483.5	57.09	-12.78	44.31	74	-29.69	peak	Vertical
2483.5	56.11	-12.78	43.33	74	-30.67	peak	Horizontal

Note: Test method to see chapter 3.2 . When PK value is lower than the Average value limit, average not record.

### Band Edge, Left Side

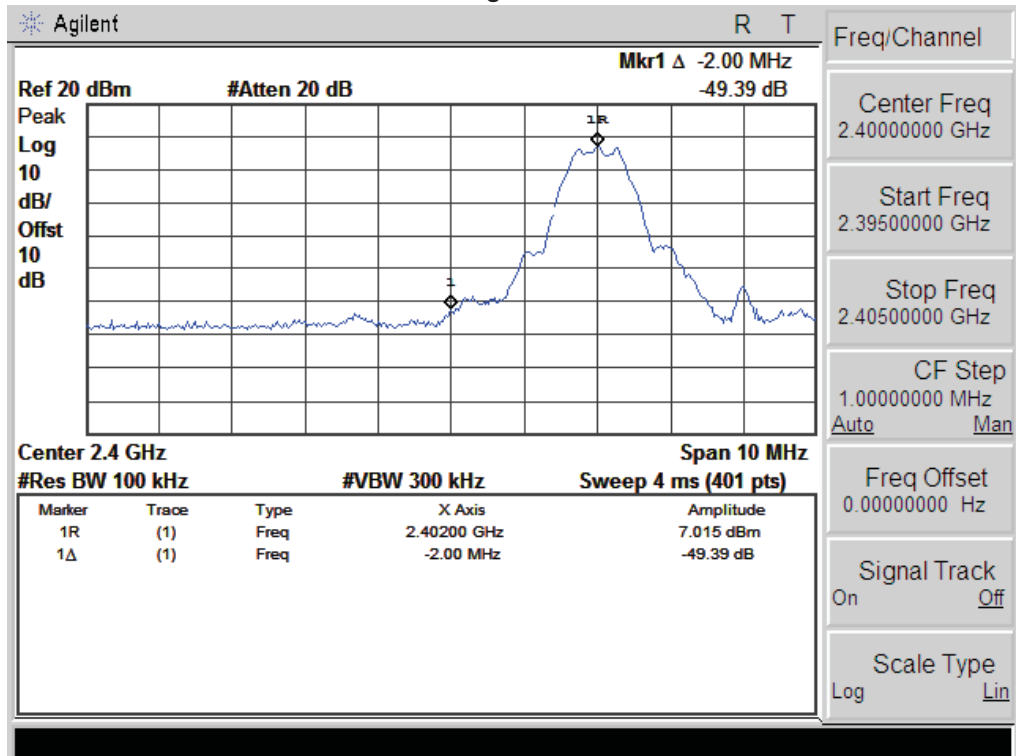

### Band Edge, Right Side

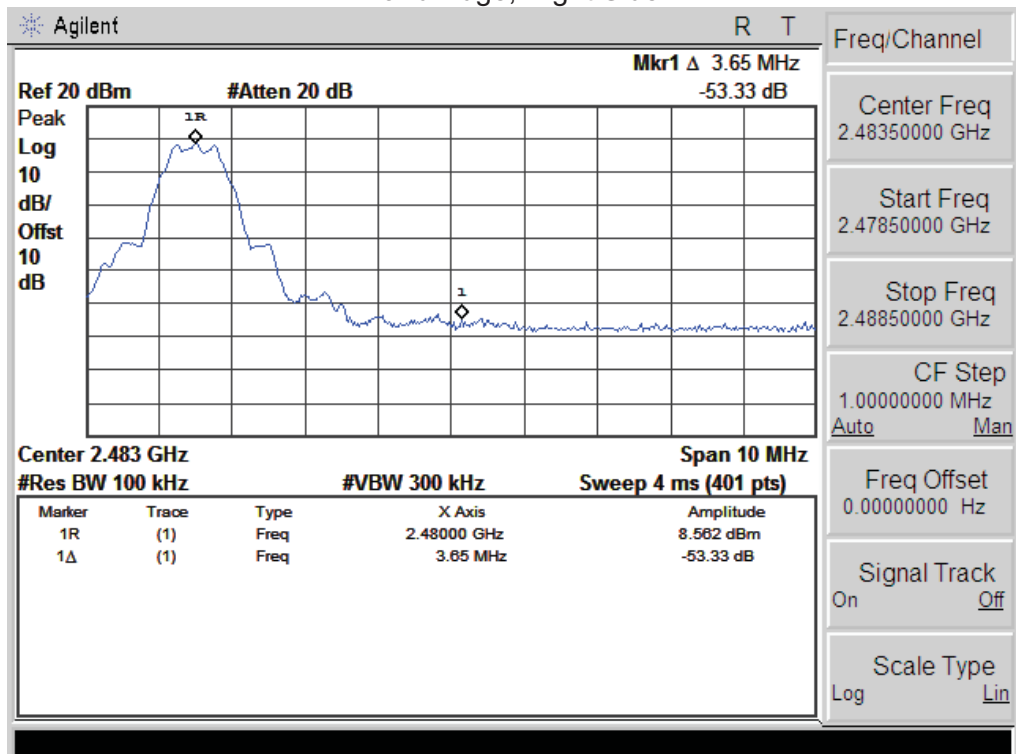

## **8. ANTENNA REQUIREMENT**

### **8.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.



### **8.2 EUT ANTENNA**

The EUT antenna is PCB antenna. It comply with the standard requirement.



## 9. EUT TEST PHOTO

### Radiated Measurement Photos

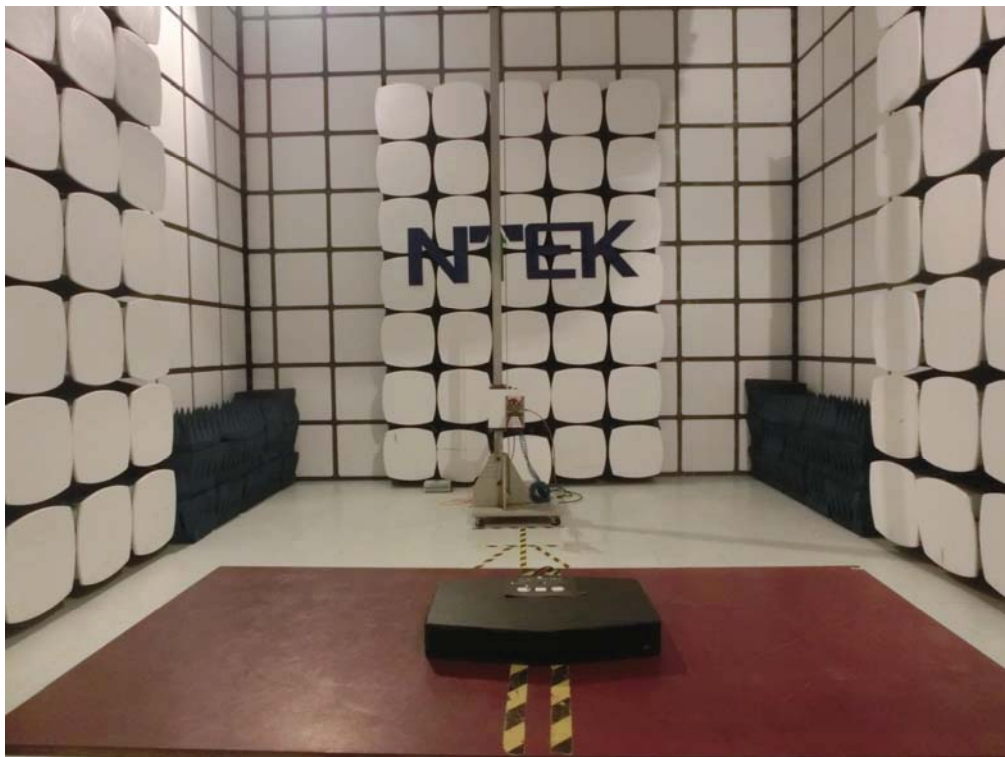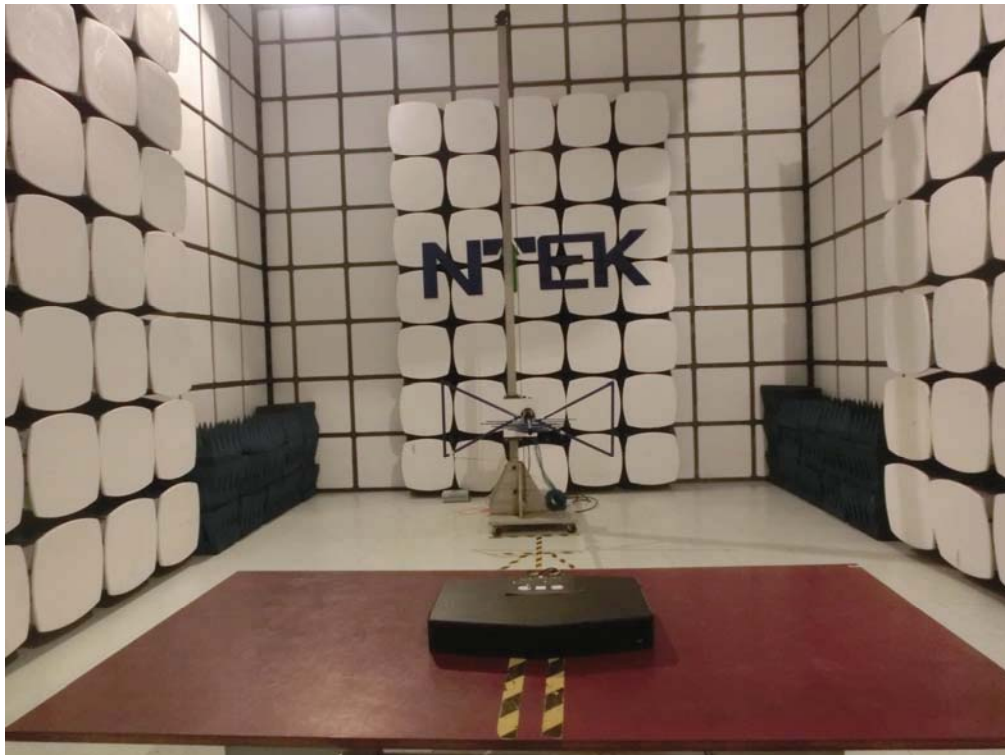

**Conducted Measurement Photos**