

Project No: TM-2201000472P
Report No.: TMWK2201000419KR

FCC ID: LDKHS7222538
IC: 2461N-HS7222538

Page: 1 / 70
Rev.: 00

RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART C

INDUSTRY CANADA RSS-247


Test Standard	FCC Part 15.247 RSS-247 issue 2 and RSS-GEN issue 5
Product name	Cisco Headset 720
Brand Name	Cisco
Model No.	HS-WL-722, HS-WL-721
Test Result	Pass
Statements of Conformity	Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory)

Approved by:

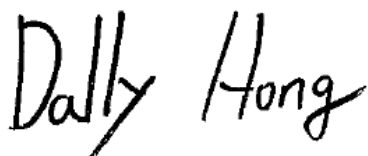

Dally Hong
Sr. Engineer

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	July 1, 2022	Initial Issue	ALL	Doris Chu

Table of contents

1.	GENERAL INFORMATION	4
1.1	EUT INFORMATION	4
1.2	EUT CHANNEL INFORMATION	6
1.3	ANTENNA INFORMATION	6
1.4	MEASUREMENT UNCERTAINTY.....	7
1.5	FACILITIES AND TEST LOCATION	8
1.6	INSTRUMENT CALIBRATION.....	8
1.7	SUPPORT AND EUT ACCESSORIES EQUIPMENT	10
1.8	TEST METHODOLOGY AND APPLIED STANDARDS	10
2.	TEST SUMMARY	11
3.	DESCRIPTION OF TEST MODES.....	12
3.1	THE WORST MODE OF OPERATING CONDITION	12
3.2	THE WORST MODE OF MEASUREMENT	13
3.3	EUT DUTY CYCLE	15
4.	TEST RESULT	16
4.1	AC POWER LINE CONDUCTED EMISSION	16
4.2	6DB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)	21
4.3	OUTPUT POWER MEASUREMENT	27
4.4	POWER SPECTRAL DENSITY.....	31
4.5	CONDUCTED BAND EDGE AND SPURIOUS EMISSION	35
4.6	RADIATION BANDEDGE AND SPURIOUS EMISSION	42
APPENDIX 1 - PHOTOGRAPHS OF EUT		

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	For FCC: Cisco Systems Inc 125 West Tasman Drive San Jose, CA 95134-1706 United States For IC: Cisco Systems Inc. 125 West Tasman Dr. Bldg. P San Jose CA 95134 United States Of America (Excluding The States Of Alaska)
Manufacturer	For FCC: Cisco Systems Inc 125 West Tasman Drive San Jose, CA 95134-1706 United States For IC: Cisco Systems Inc. 125 West Tasman Dr. Bldg. P San Jose CA 95134 United States Of America (Excluding The States Of Alaska)
Factory	1. Merry Electronics (Huizhou) Co., Ltd. JINSHAN INDUSTRIAL PARK, QINGXI, LONGMEN TOWN, HUIZHOU CITY, GUANGDONG PROVINCE, CHINA 2. Merry & Luxshare (Viet nam) Co., Ltd. No. 6, DEMOCRACY ROAD, NGHE AN VSIP INDUSTRIAL PARK, HUNG TAY COMMUNE, HUNG NGUYEN DISTRICT, NGHE AN PROVINCE
Equipment	Cisco Headset 720
Model No.	HS-WL-722, HS-WL-721
Model Discrepancy	Basic model HS-WL-722: Wireless Dual On-Ear Headset Multi model HS-W-721 : Wireless Mono On-Ear Headset (One Speaker connected only) Difference in earphone number and accompany circuit board, electronic components, wire and indicator LED only for the extra earphone.
Trade Name	Cisco
Received Date	January 25, 2022
Date of Test	January 27 ~ February 17, 2022

Power Supply	1. Power via USB cable. 2. Power from Battery. Rating: 5Vdc, 1.85Wh
HW Version	HDT606-MAIN-R2-20211015
SW Version	1-8-m-168
EUT Serial #	EMC255000AB

Remark:

1. For more details, please refer to the User's manual of the EUT.
2. Disclaimer: Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.
3. Disclaimer: Variant information between/among model numbers / trademarks are provided by the applicant, test results of this report are applicable to the sample EUT received of main test model name.)

1.2 EUT CHANNEL INFORMATION

Frequency Range	2402MHz-2480MHz
Modulation Type	GFSK for BLE 1 Mbps & BLE 2 Mbps
Number of channels	40 Channels

Remark:

Refer as ANSI C63.10: 2013 clause 5.6.1 Table 4 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
<input type="checkbox"/> 1 MHz or less	1	Middle
<input type="checkbox"/> 1 MHz to 10 MHz	2	1 near top and 1 near bottom
<input checked="" type="checkbox"/> More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

1.3 ANTENNA INFORMATION

Antenna Type	<input checked="" type="checkbox"/> Monopole <input type="checkbox"/> PCB <input type="checkbox"/> Dipole <input type="checkbox"/> Coils
Antenna Gain	Gain :5.01 dBi

Remark:

1.The antenna(s) of the EUT are permanently attached and there are no provisions for connection to an external antenna. So the EUT complies with the requirements of §15.203 and RSS-Gen 6.8.

1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 9K~30M	+/- 2.25
3M Semi Anechoic Chamber / 30M~1G (Horizontally)	+/- 3.91
3M Semi Anechoic Chamber / 30M~1G (Vertically)	+/- 4.57
3M Semi Anechoic Chamber / 1G~6G	+/- 5.20
3M Semi Anechoic Chamber / 6G~18G	+/- 5.18
3M Semi Anechoic Chamber / 18G~40G	+/- 3.68

Remark:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan. (R.O.C.)

CAB identifier: TW1309

Test site	Test Engineer	Remark
AC Conduction Room	Jack Chen	-
Radiation	Ray Li, Tony Chao	-
RF Conducted	Marco Chan	-

Remark: The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC public Access Link (PAL) database, FCC Registration No. :444940, the FCC Designation No.:TW1309

1.6 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Signal Analyzer	KEYSIGHT	N9010B	MY59071573	05/25/2021	05/24/2022
Power Meter	Anritsu	ML2496A	2136002	12/06/2021	12/05/2022
Power Sensor	Anritsu	MA2411B	1911386	08/19/2021	08/18/2022
Power Sensor	Anritsu	MA2411B	1911387	08/19/2021	08/18/2022
Software	Radio Test Software Ver. 21				

Conducted Emission Room					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
CABLE	EMCI	CFD300-NL	CERF	06/28/2021	06/27/2022
EMI Test Receiver	R&S	ESCI	100064	07/05/2021	07/04/2022
LISN	SCHWARZBECK	NSLK 8127	8127-01068	01/17/2022	01/16/2023
Software	EZ-EMC(CCS-3A1-CE)				

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	Serial Number	Cal Date	Cal Due
Band Reject Filters	MICRO TRONICS	BRM 50702	112	11/23/2021	11/22/2022
Bilog Antenna	Sunol Sciences	JB3	A030105	07/19/2021	07/18/2022
Coaxial Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/24/2021	02/23/2022
Coaxial Cable	EMCI	EMC105	190914+1111	09/17/2021	09/16/2022
Coaxial Cable	Woken	J-1099	201709090004	12/21/2021	12/20/2022
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	12/28/2021	12/27/2022
Horn Antenna	ETS LINDGREN	3116	00026370	11/30/2021	11/29/2022
Horn Antenna	ETS LINDGREN	3117	00055165	07/29/2021	07/28/2022
K Type Cable	Huber+Suhner	SUCOFLEX 102	29406/2	12/05/2021	12/04/2022
Loop Ant	COM-POWER	AL-130	121051	04/07/2021	04/06/2022
Pre-Amplifier	EMEC	EM330	060609	02/24/2021	02/23/2022
Pre-Amplifier	HP	8449B	3008A00965	12/24/2021	12/23/2022
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	12/06/2021	12/05/2022
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 6.11-20180413				

Remark: Each piece of equipment is scheduled for calibration once a year.

1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
1.	Charging Stand	Cisco	HS-WL-720-DSKCH	(PID) HS-WL-720-DSKCH-A	N/A

Support Equipment						
No.	Equipment	Brand	Model	Series No.	FCC ID	IC
1	NB(G)	Lenovo	IBM 1951	N/A	CJ6UPA3489WL	N/A
2	NB(J)	TOSHIBA	PT345T-00L002	N/A	PD97260H	1000M-7260H

1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247, RSS-247 Issue 2 and RSS-GEN Issue 5

2. TEST SUMMARY

FCC Standard Section	IC Standard Section	Report Section	Test Item	Result
15.203	RSS-Gen 6.8	1.3	Antenna Requirement	Pass
15.207(a)	RSS-GEN 8.8	4.1	AC Conducted Emission	Pass
15.247(a)(2)	RSS-247(5.2)(a)	4.2	6 dB Bandwidth	Pass
-	RSS-GEN 6.7	4.2	Occupied Bandwidth (99%)	Pass
15.247(b)(3)	RSS-247(5.4)(d)	4.3	Output Power Measurement	Pass
15.247(e)	RSS-247(5.2)(b)	4.4	Power Spectral Density	Pass
15.247(d)	RSS-247(5.5)	4.5	Conducted Band Edge	Pass
15.247(d)	RSS-247(5.5)	4.5	Conducted Spurious Emission	Pass
15.247(d)	RSS-GEN 8.9, 8.10	4.6	Radiation Band Edge	Pass
15.247(d)	RSS-GEN 8.9, 8.10	4.6	Radiation Spurious Emission	Pass

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	BLE Mode (1Mbps) BLE Mode (2Mbps)
Test Channel Frequencies	1.Lowest Channel : 2402MHz 2.Middle Channel : 2442MHz 3.Highest Channel : 2480MHz

Remark:

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Power supply Mode	HS-WL-722 (Stereo) Mode 1: EUT power by DC5V(TypeA To TypeC) Mode 2: EUT power by Charging stand(TypeA To TypeC)
	HS-WL-721(Mono) Mode 3: EUT power by DC5V(TypeA To TypeC) Mode 4: EUT power by Charging stand(TypeA To TypeC)
Worst Mode	<input type="checkbox"/> Mode 1 <input checked="" type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Radiated Emission Above 1G
Power supply Mode	HS-WL-722 (Stereo) Mode 1: EUT power by DC5V(TypeA To TypeC) Mode 2: EUT power by Charging stand(TypeA To TypeC) HS-WL-721(Mono) Mode 3: EUT power by DC5V(TypeA To TypeC) Mode 4: EUT power by Charging stand(TypeA To TypeC)
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
Worst Position	<input type="checkbox"/> Placed in fixed position. <input checked="" type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	HS-WL-722 (Stereo) Mode 1: EUT power by DC5V(TypeA To TypeC) Mode 2: EUT power by Charging stand(TypeA To TypeC) HS-WL-721(Mono) Mode 3: EUT power by DC5V(TypeA To TypeC) Mode 4: EUT power by Charging stand(TypeA To TypeC)
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z and two polarity, for radiated measurement. The worst case(X-Plane) were recorded in this report
3. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.

Report No.: TMWK2201000419KR

3.3 EUT DUTY CYCLE

Temperature: 22.4°C

Humidity: 62% RH

Tested by: Marco Chan

Test date: January 27, 2022

Duty Cycle				
Configuration	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW Setting (kHz)
BLE-1Mbps	63.20	1.99	2.53	3.00
BLE-2Mbps	34.40	4.63	4.65	5.00



4. TEST RESULT

4.1 AC POWER LINE CONDUCTED EMISSION

4.1.1 Test Limit

According to §15.207(a) and RSS-GEN section 8.8,

Frequency Range (MHz)	Limits(dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

4.1.2 Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 6.2,

1. The EUT was placed above horizontal ground plane and 0.4m above vertical ground plane
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

4.1.3 Test Setup

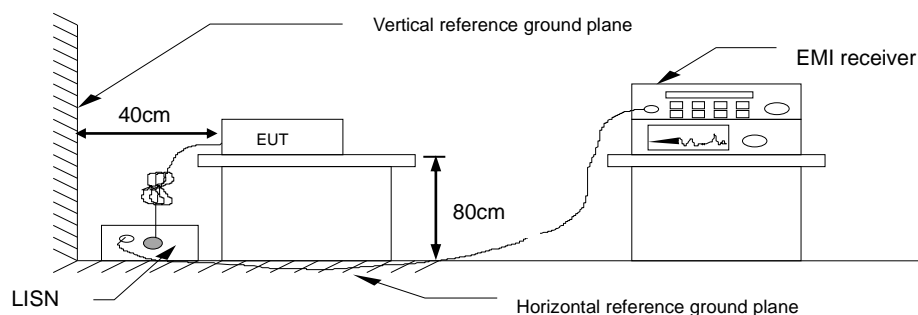


4.1.4 Test Result

PASS

Test Data


Test Mode:	Mode 3	Temp/Hum	21.7(°C)/ 55%RH
Phase:	Line	Test Date	February 17, 2022
Configuration	BLE-1Mbps	Test Engineer	Jack Chen

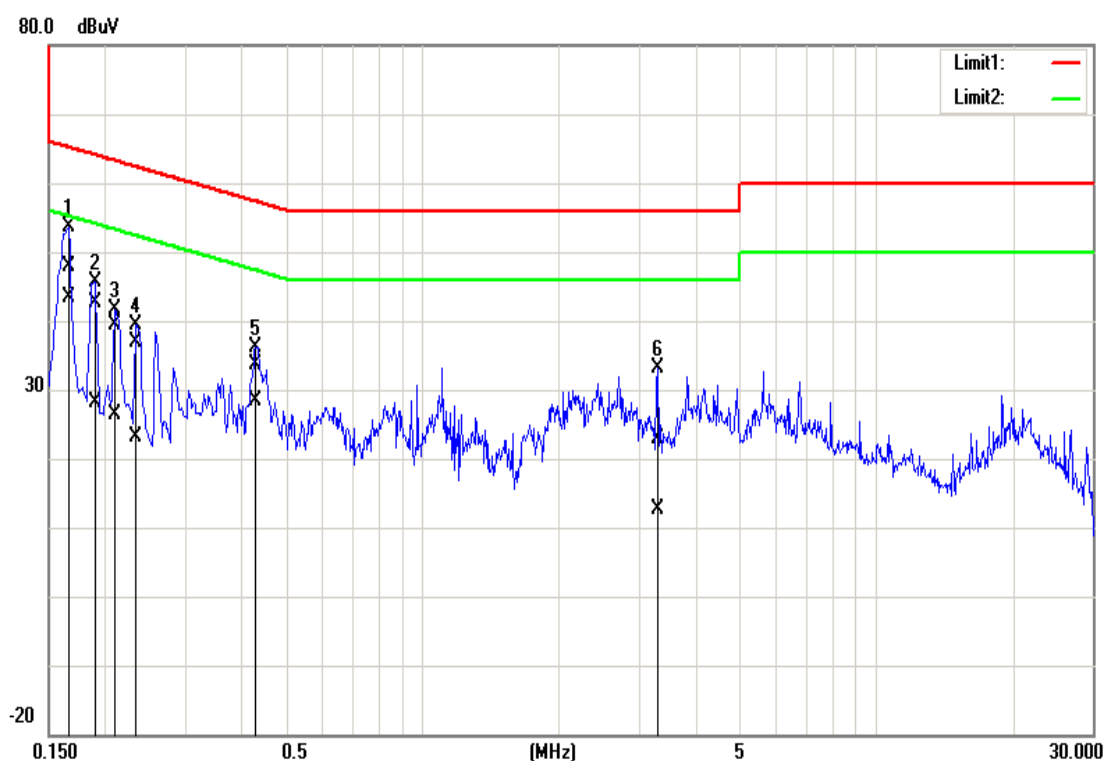

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1660	47.82	43.24	0.08	47.90	43.32	65.16	55.16	-17.26	-11.84	Pass
0.1900	42.44	28.07	0.09	42.53	28.16	64.04	54.04	-21.51	-25.88	Pass
0.2100	39.31	26.24	0.09	39.40	26.33	63.21	53.21	-23.81	-26.88	Pass
0.2340	36.67	23.01	0.09	36.76	23.10	62.31	52.31	-25.55	-29.21	Pass
0.4300	33.57	28.35	0.10	33.67	28.45	57.25	47.25	-23.58	-18.80	Pass
3.3020	22.62	12.41	0.18	22.80	12.59	56.00	46.00	-33.20	-33.41	Pass

Note: Correction factor = LISN loss + Cable loss.


Test Mode:	Mode 3	Temp/Hum	21.7(°C)/ 55%RH
Phase:	Neutral	Test Date	February 17, 2022
Configuration	BLE-1Mbps	Test Engineer	Jack Chen

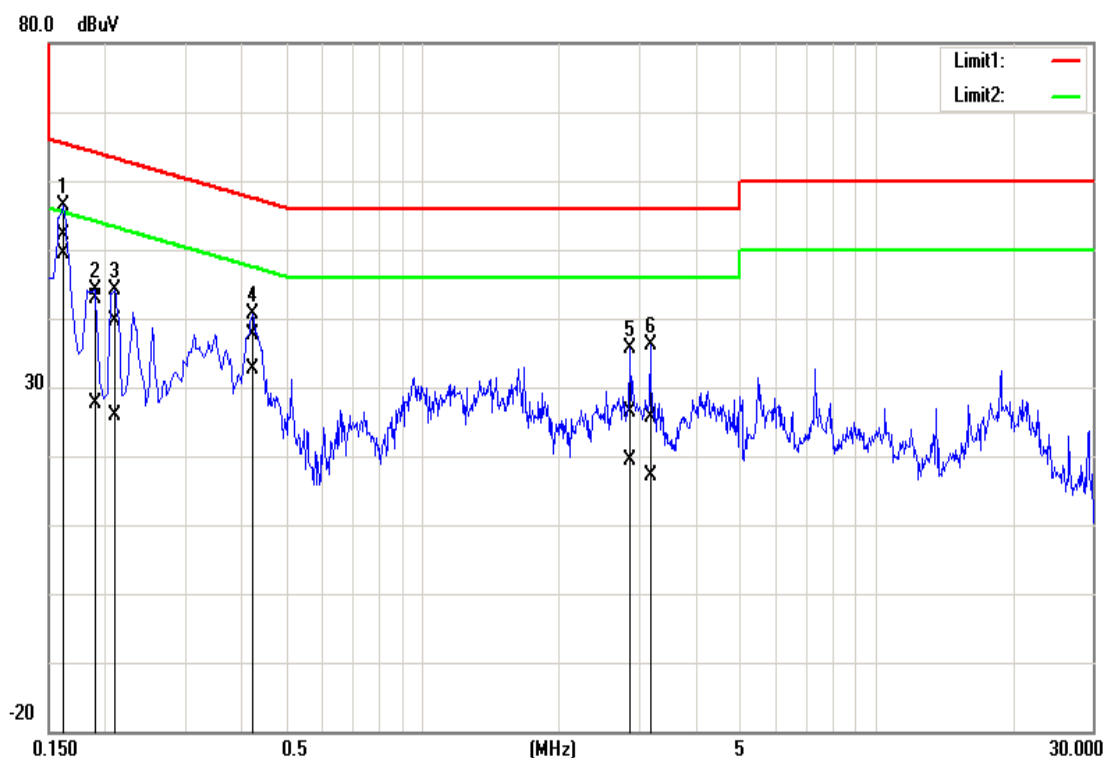

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1620	52.07	49.37	0.09	52.16	49.46	65.36	55.36	-13.20	-5.90	Pass
0.1900	42.89	27.46	0.09	42.98	27.55	64.04	54.04	-21.06	-26.49	Pass
0.2100	39.62	25.80	0.09	39.71	25.89	63.21	53.21	-23.50	-27.32	Pass
0.4220	37.53	32.57	0.10	37.63	32.67	57.41	47.41	-19.78	-14.74	Pass
2.8740	26.32	19.25	0.18	26.50	19.43	56.00	46.00	-29.50	-26.57	Pass
3.1860	25.50	16.94	0.18	25.68	17.12	56.00	46.00	-30.32	-28.88	Pass

Note: Correction factor = LISN loss + Cable loss.


Test Mode:	Mode 3	Temp/Hum	21.7(°C)/ 55%RH
Phase:	Line	Test Date	February 17, 2022
Configuration	BLE-2Mbps	Test Engineer	Jack Chen

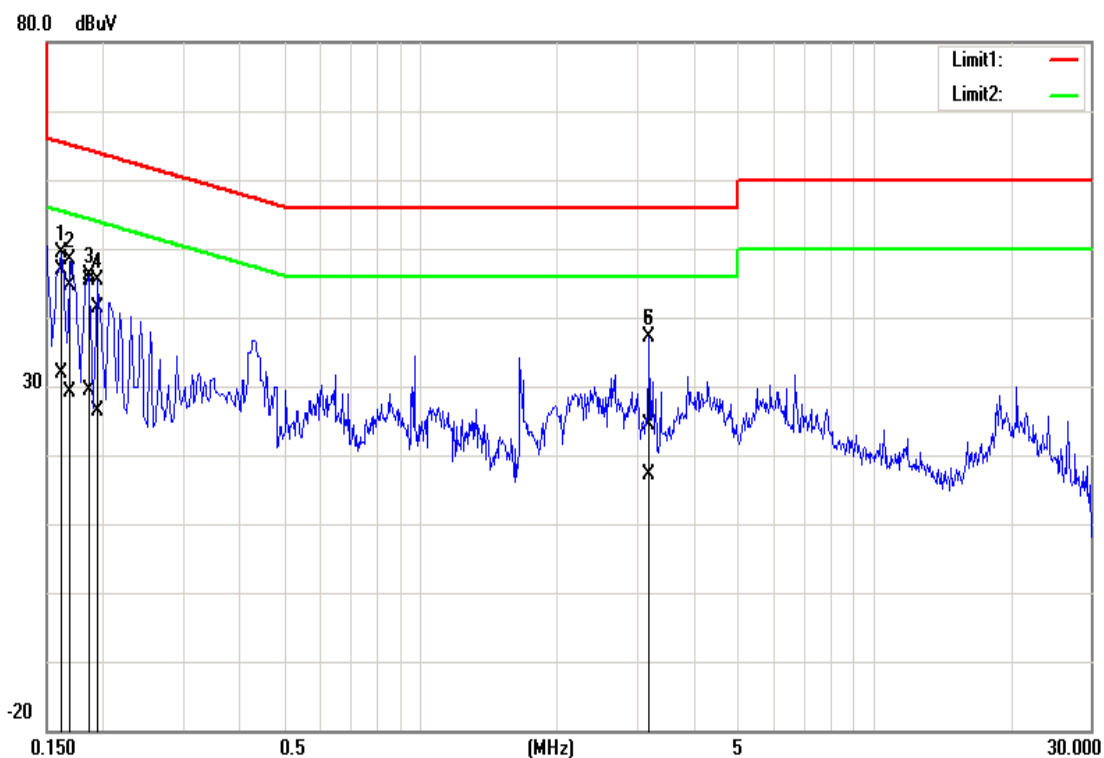

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1620	46.86	31.84	0.08	46.94	31.92	65.36	55.36	-18.42	-23.44	Pass
0.1700	44.56	29.14	0.08	44.64	29.22	64.96	54.96	-20.32	-25.74	Pass
0.1860	45.36	29.23	0.09	45.45	29.32	64.21	54.21	-18.76	-24.89	Pass
0.1940	41.34	26.27	0.09	41.43	26.36	63.86	53.86	-22.43	-27.50	Pass
3.1900	24.08	17.06	0.18	24.26	17.24	56.00	46.00	-31.74	-28.76	Pass
3.1900	24.08	17.06	0.18	24.26	17.24	56.00	46.00	-31.74	-28.76	Pass

Note: Correction factor = LISN loss + Cable loss.

Test Mode:	Mode 3	Temp/Hum	21.7(°C)/ 55%RH
Phase:	Neutral	Test Date	February 17, 2022
Configuration	BLE-2Mbps	Test Engineer	Jack Chen

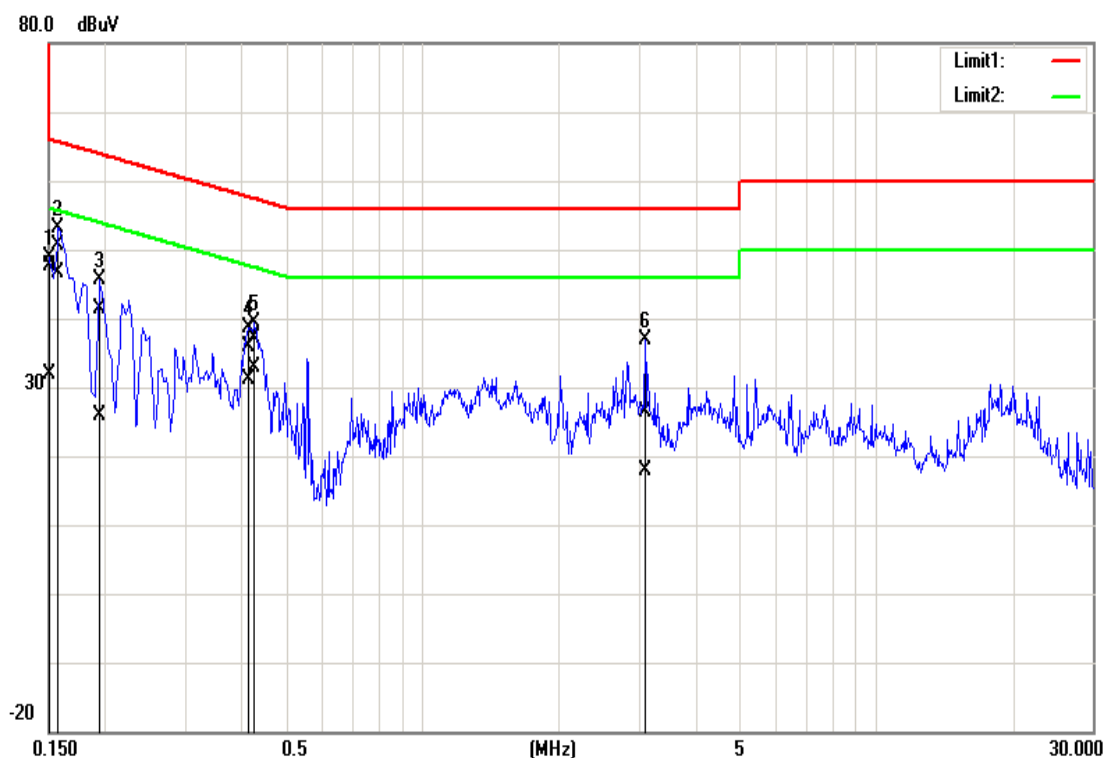

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1500	47.58	31.86	0.09	47.67	31.95	66.00	56.00	-18.33	-24.05	Pass
0.1580	50.42	46.66	0.09	50.51	46.75	65.57	55.57	-15.06	-8.82	Pass
0.1940	41.19	25.87	0.09	41.28	25.96	63.86	53.86	-22.58	-27.90	Pass
0.4140	35.70	30.95	0.10	35.80	31.05	57.57	47.57	-21.77	-16.52	Pass
0.4260	37.12	32.69	0.10	37.22	32.79	57.33	47.33	-20.11	-14.54	Pass
3.0980	26.31	17.64	0.18	26.49	17.82	56.00	46.00	-29.51	-28.18	Pass

Note: Correction factor = LISN loss + Cable loss.

Report No.: TMWK2201000419KR

4.2 6dB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)

4.2.1 Test Limit

According to §15.247(a)(2) and RSS-247 section 5.2(a)

6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------


Occupied Bandwidth(99%) : For reporting purposes only.

4.2.2 Test Procedure

Test method Refer as ANSI C63.10: 2013,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT.
3. SA set RBW = 100KHz, VBW = 300KHz and Detector = Peak, to measurement 6dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

4.2.3 Test Setup

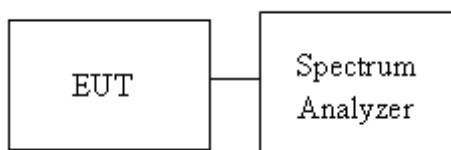

4.2.4 Test Result

Temperature: 22.4°C

Humidity: 62% RH

Tested by: Marco Chan


Test date: January 27, 2022

Test mode: BLE-1Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	OBW (99%) (MHz)	6dB BW (MHz)	6dB limit (kHz)
Low	2402	1.0345	0.7250	≥500
Mid	2442	1.0330	0.7187	
High	2480	1.0313	0.7162	

Test mode: BLE-2Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	OBW (99%) (MHz)	6dB BW (MHz)	6dB limit (kHz)
Low	2402	2.0437	1.263	≥500
Mid	2442	2.0440	1.265	
High	2480	2.0416	1.260	

Test Data


6dB BANDWIDTH

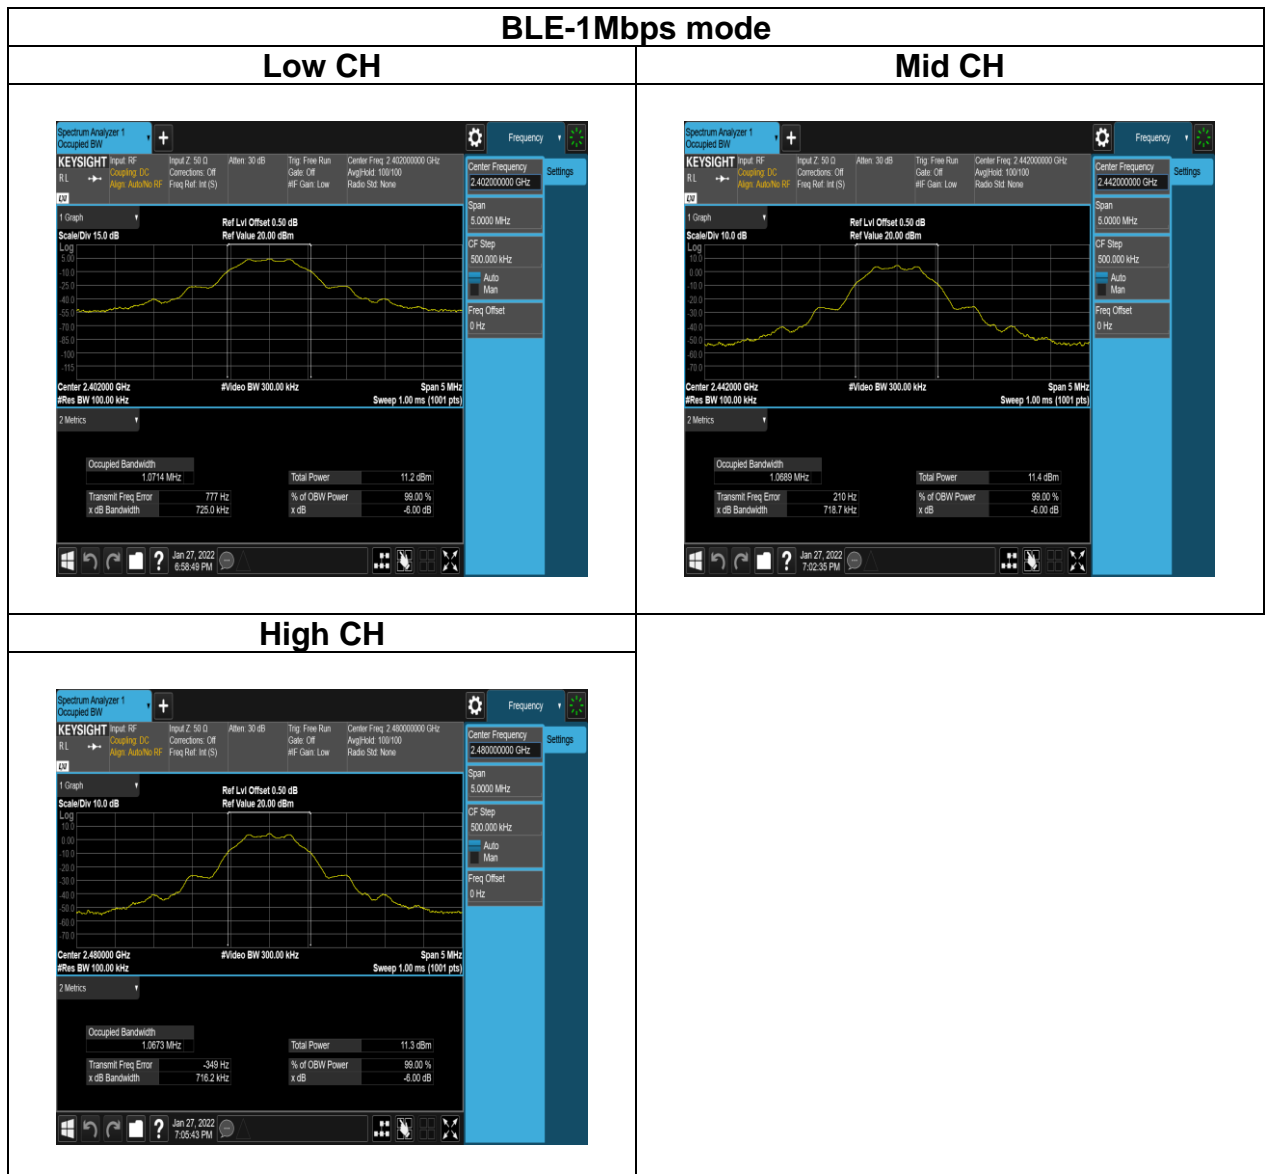




Report No.: TMWK2201000419KR


Page: 24 / 70
Rev.: 00

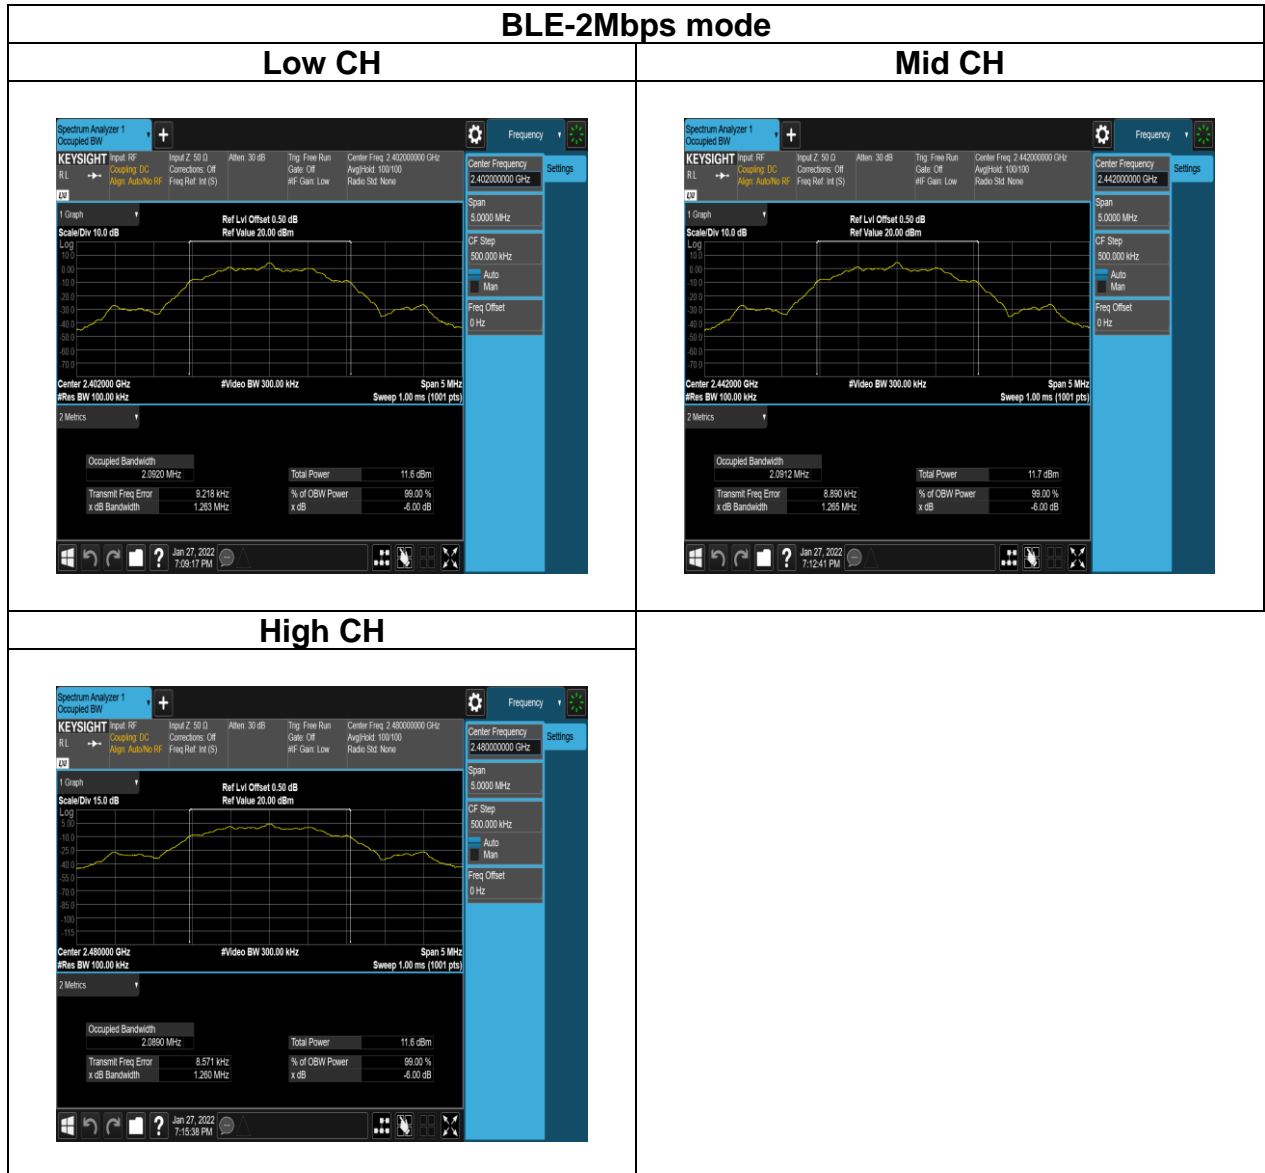

Test Data

BANDWIDTH (99%)

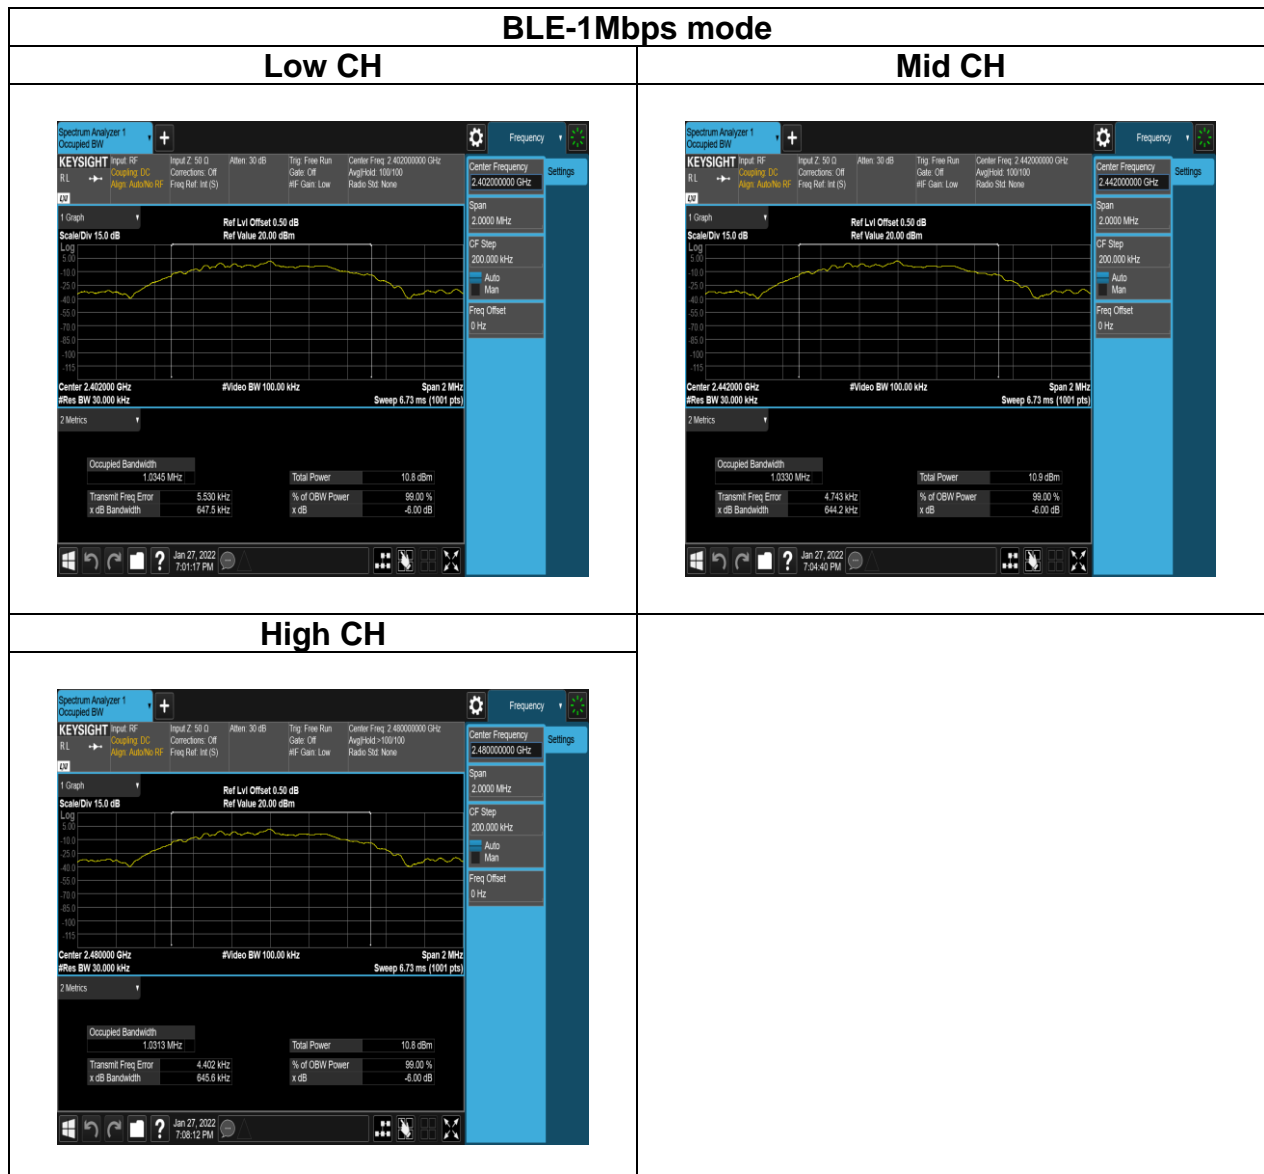

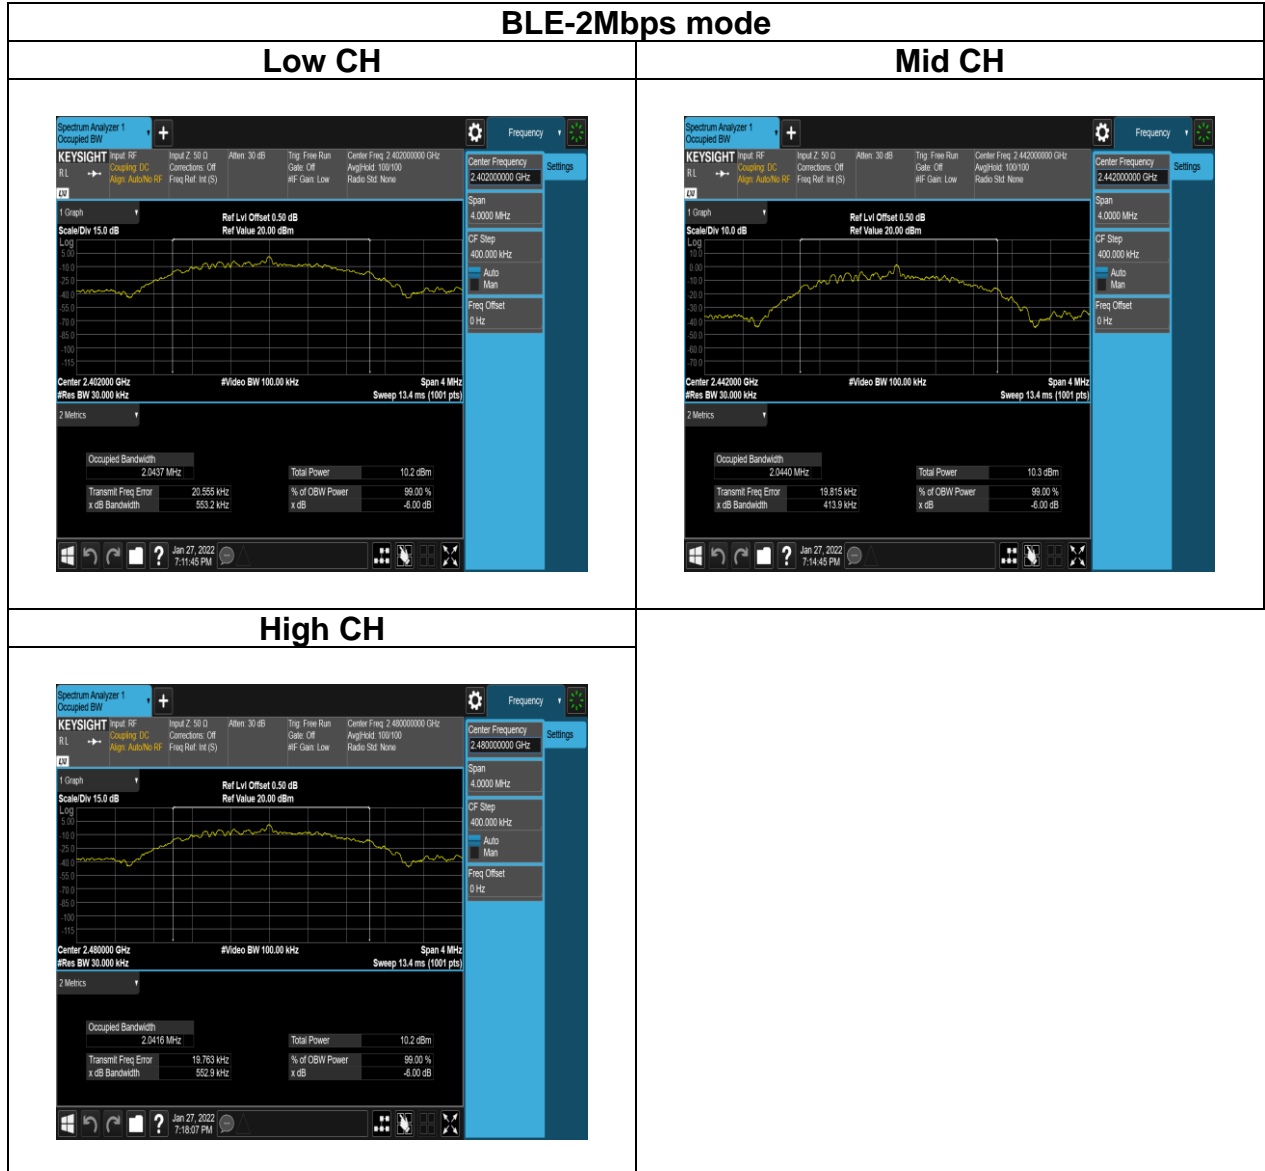

4.3 OUTPUT POWER MEASUREMENT

4.3.1 Test Limit

According to §15.247(b)(3) and RSS-247 section 5.4(d)

Peak output power :

FCC

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement,

IC

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e), base on the use of antennas with directional gain not exceed 6 dBi If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 30dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi [Limit = 30 – (DG – 6)] <input type="checkbox"/> Point-to-point operation
-------	---


Average output power : For reporting purposes only.

4.3.2 Test Procedure

Test method Refer as ANSI C63.10:2013.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

4.3.3 Test Setup

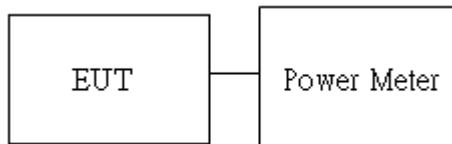

Report No.: TMWK2201000419KR

4.3.4 Test Result

Temperature: 22.4°C

Humidity: 62% RH

Tested by: Marco Chan

Test date: January 27, 2022

Peak output power :

BLE 1M mode:

CH	Frequency (MHz)	Power set	Peak Power Output (dBm)	Required Limit (dBm)
Low	2402	default	4.54	30
Mid	2442	default	4.59	30
High	2480	default	4.57	30

BLE 2M mode:

CH	Frequency (MHz)	Power set	Peak Power Output (dBm)	Required Limit (dBm)
Low	2402	default	4.58	30
Mid	2442	default	4.60	30
High	2480	default	4.56	30

Average output power :

BLE 1M mode:

CH	Frequency (MHz)	Power set	Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit (dBm)
Low	2402	default	3.98	30
Mid	2442	default	3.97	30
High	2480	default	3.95	30

BLE 2M mode:

CH	Frequency (MHz)	Power set	Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit (dBm)
Low	2402	default	3.99	30
Mid	2442	default	3.97	30
High	2480	default	3.98	30

EIRP power :

EIRP BLE 1M mode

CH	Frequency (MHz)	Power set	Max. Avg. Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit
Low	2402	default	3.98	3.32	7.30	4W= 36 dBm
Mid	2442	default	3.97	3.32	7.29	4W= 36 dBm
High	2480	default	3.95	3.32	7.27	4W= 36 dBm

EIRP BLE 2M mode

CH	Frequency (MHz)	Power set	Max. Avg. Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit
Low	2402	default	3.99	3.32	7.31	4W= 36 dBm
Mid	2442	default	3.97	3.32	7.29	4W= 36 dBm
High	2480	default	3.98	3.32	7.30	4W= 36 dBm

4.4 POWER SPECTRAL DENSITY

4.4.1 Test Limit

According to §15.247(e) and RSS-247 section 5.2(b)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 8dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi [Limit = 8 – (DG – 6)] <input type="checkbox"/> Point-to-point operation :
-------	---

4.4.2 Test Procedure

Test method Refer as ANSI C63.10:2013.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 10kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss and Duty Factor were compensated to the results for each measurement by SA.
5. Mark the maximum level.
6. Measure and record the result of power spectral density. in the test report.

4.4.3 Test Setup



4.4.4 Test Result

Temperature: 22.4°C

Humidity: 62% RH

Tested by: Marco Chan

Test date: January 27, 2022

BLE 1M mode

Frequency (MHz)	RF Power Density (dBm/3kHz)	Maximum Limit (dBm/3kHz)	Result
2402	-10.66	8	PASS
2442	-10.47	8	PASS
2480	-10.60	8	PASS


BLE 2M mode

Frequency (MHz)	RF Power Density (dBm/3kHz)	Maximum Limit (dBm/3kHz)	Result
2402	-13.33	8	PASS
2442	-13.19	8	PASS
2480	-13.18	8	PASS




Report No.: TMWK2201000419KR

Test Data

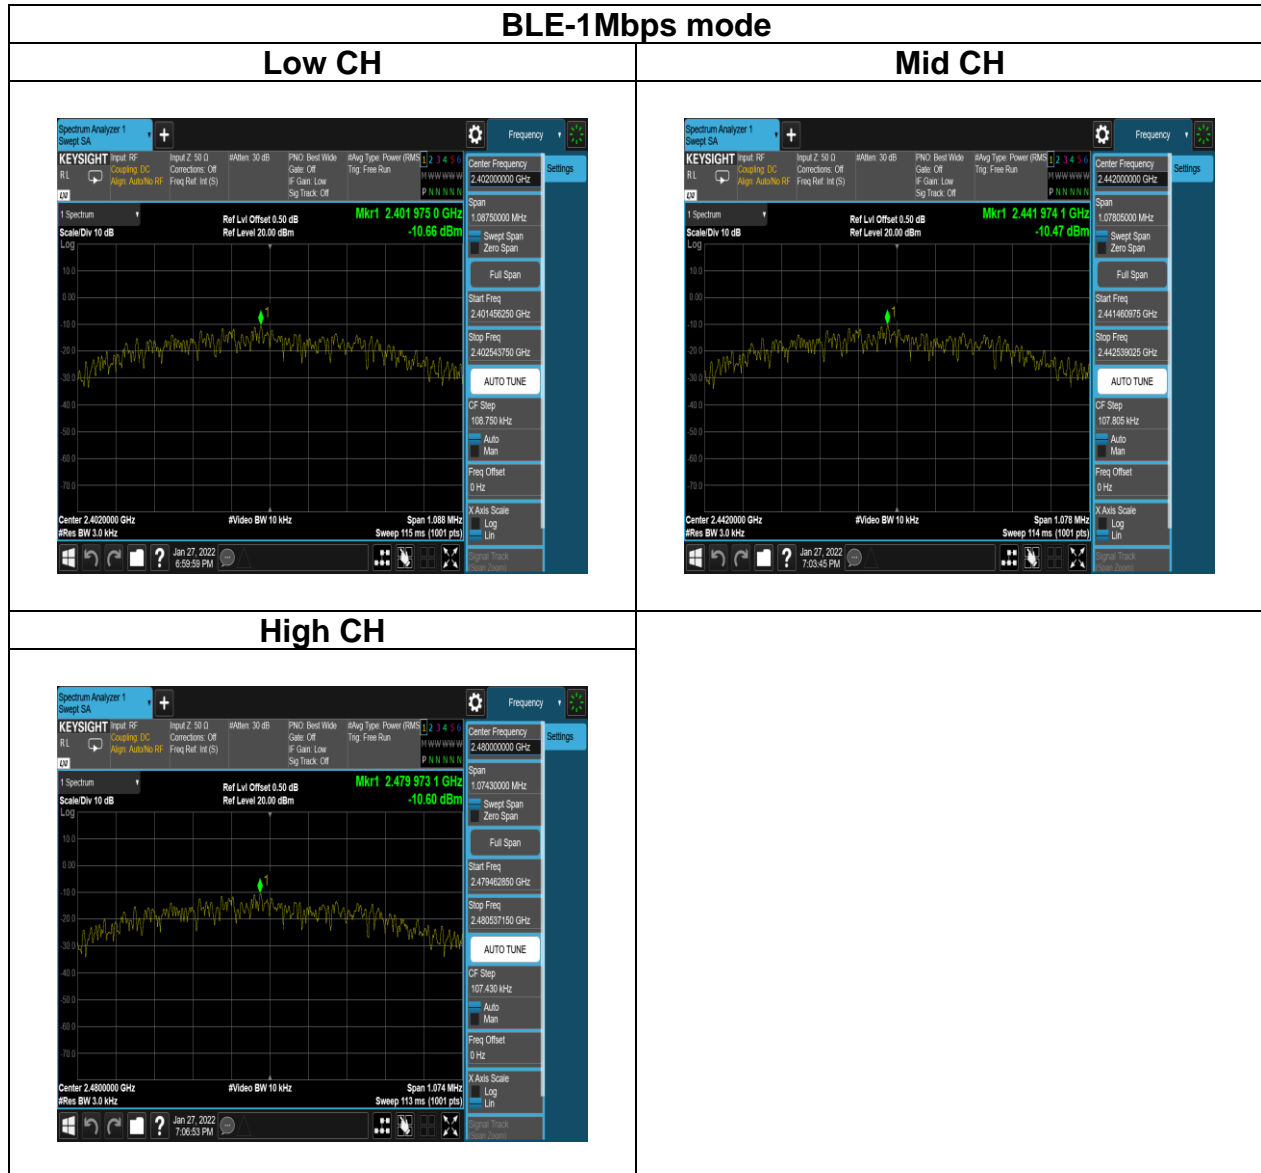


BLE-2Mbps mode


Low CH

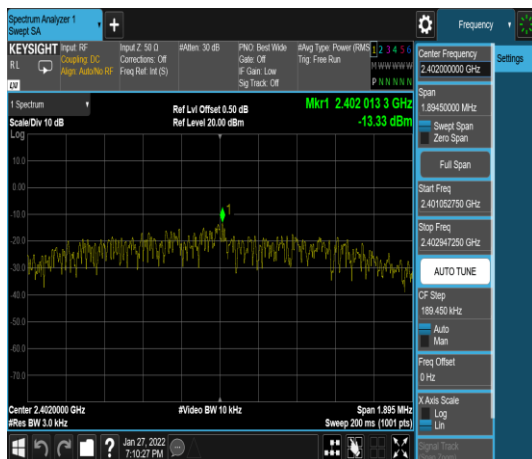

Mid CH

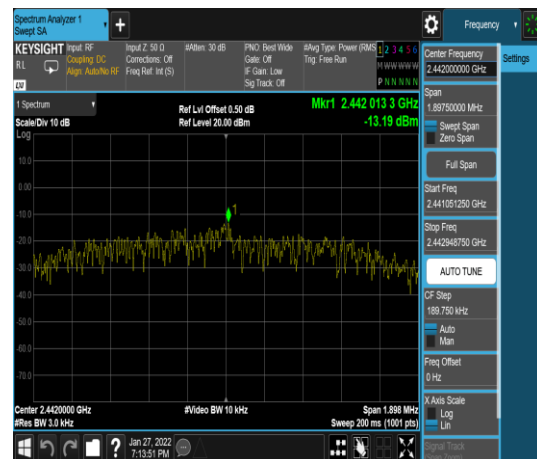

High CH

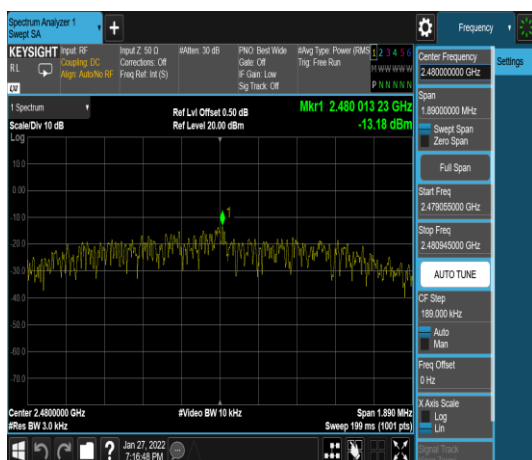

4.5 CONDUCTED BAND EDGE AND SPURIOUS EMISSION

4.5.1 Test Limit

According to §15.247(d) and RSS-247 section 5.5

FCC: In any 100 kHz bandwidth outside the authorized frequency band,

Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


IC: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

4.5.2 Test Procedure

Test method Refer as ANSI C63.10:2013.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

4.5.3 Test Setup

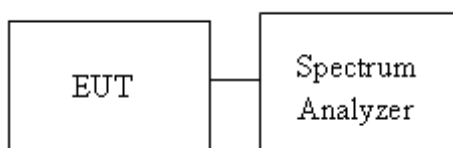

Report No.: TMWK2201000419KR

4.5.4 Test Result


Test Data


Temperature: 22.4°C


Humidity: 62% RH

Tested by: Marco Chan

Test date: January 27, 2022

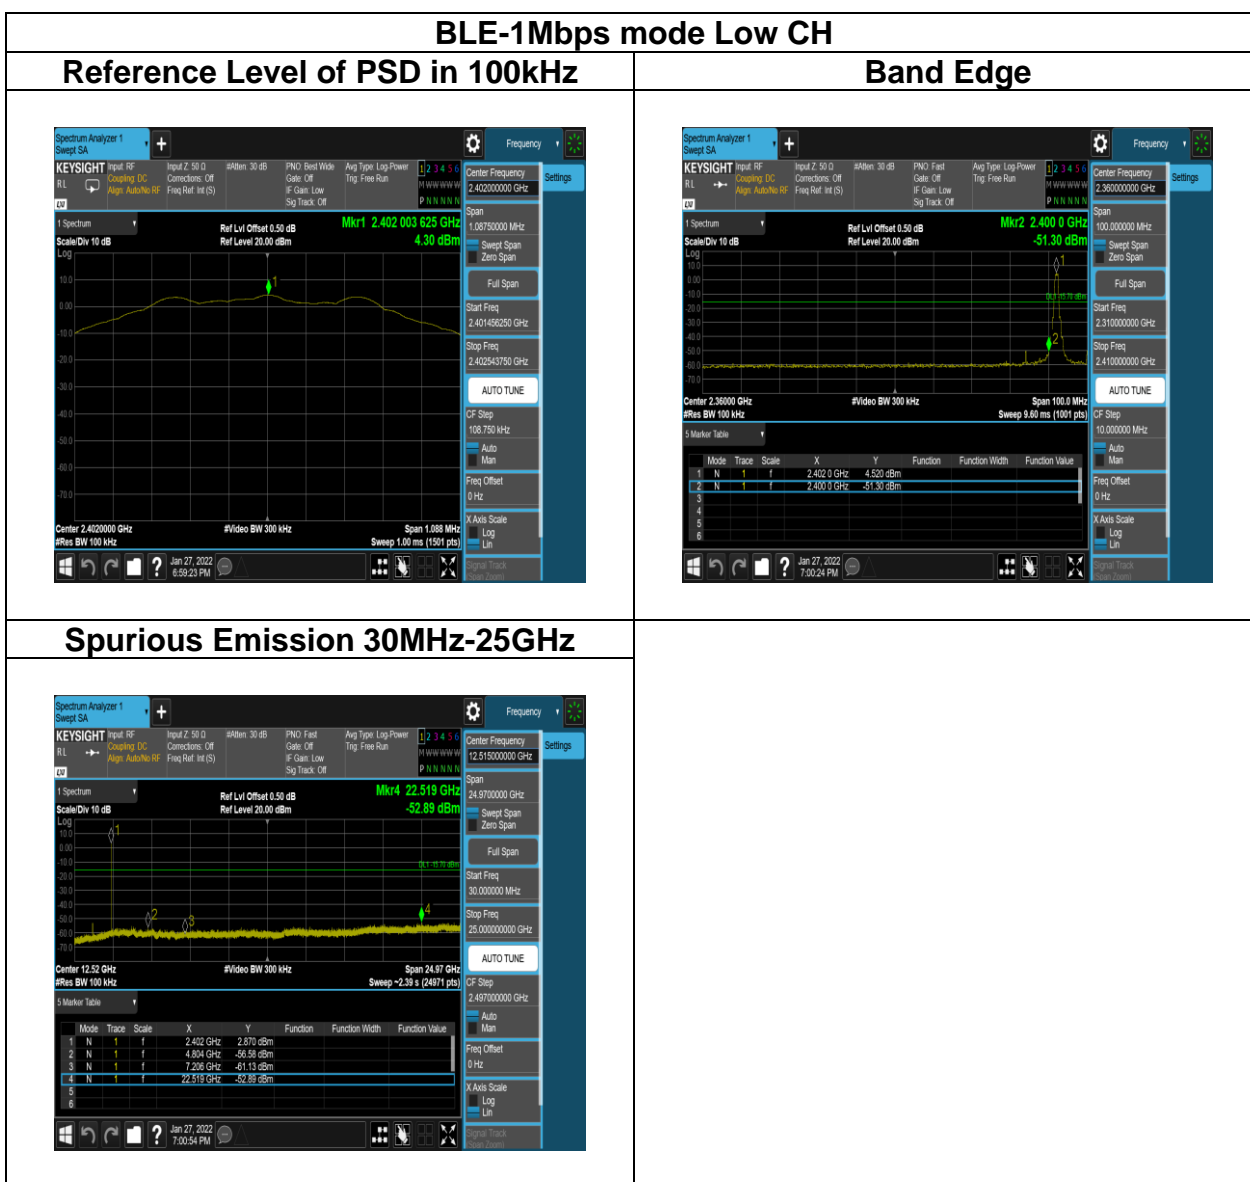


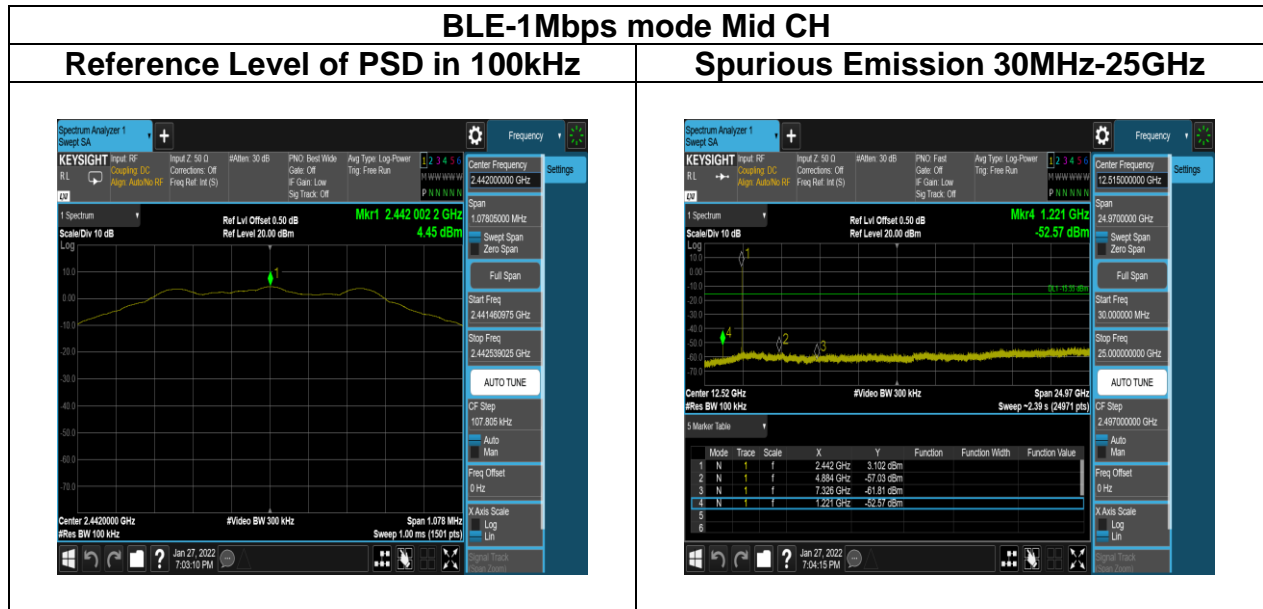

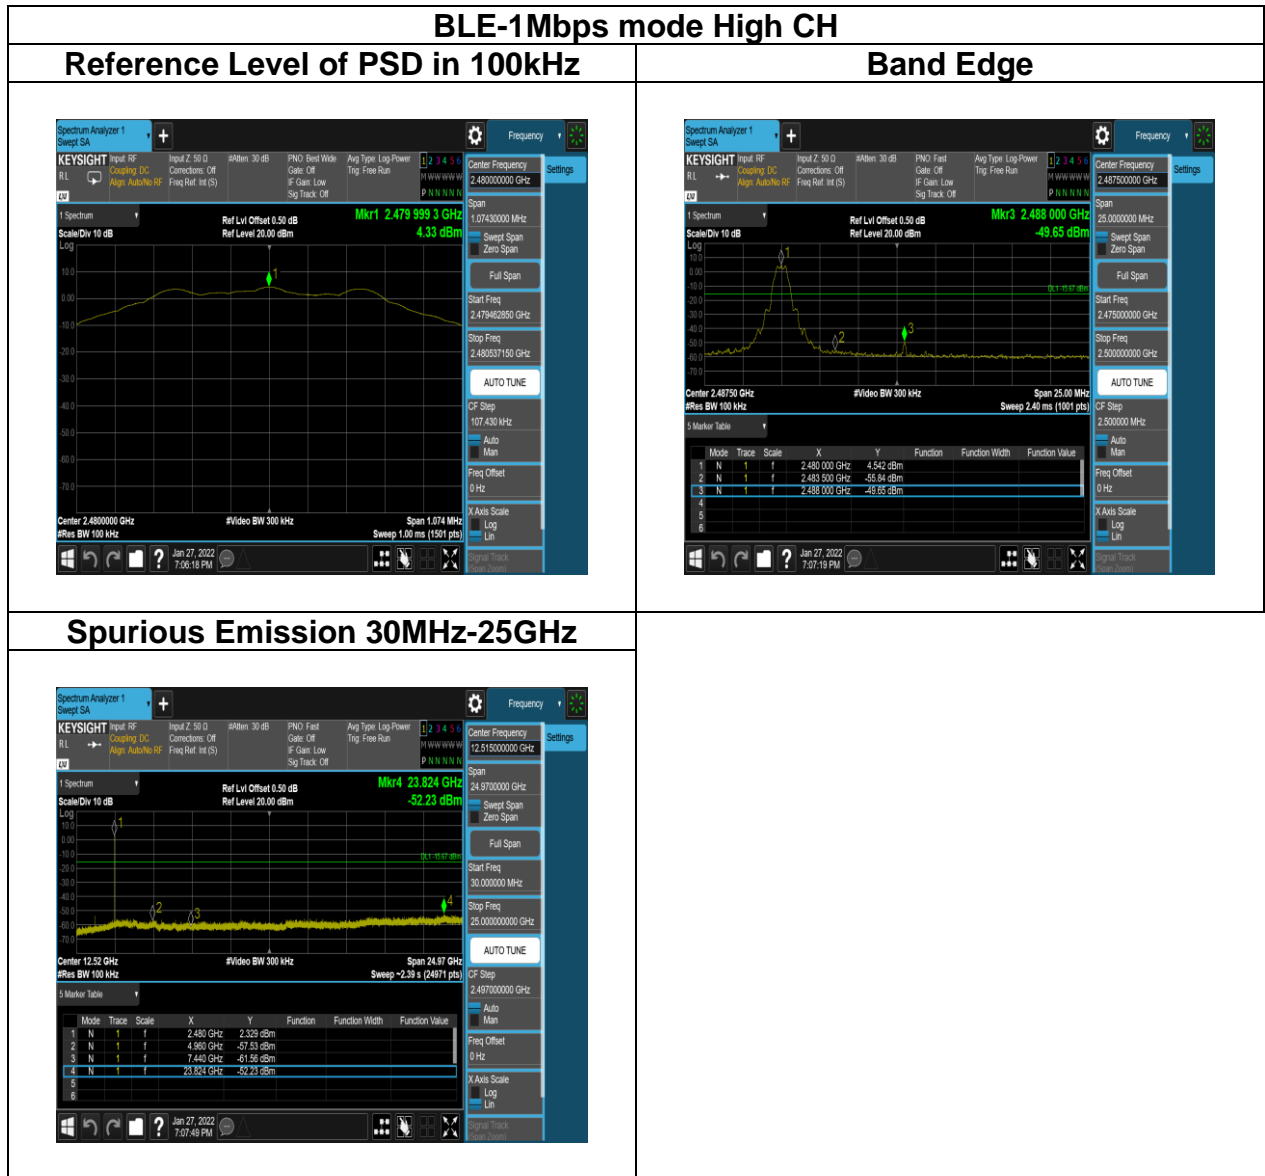


BLE-2Mbps mode Low CH


Reference Level of PSD in 100kHz

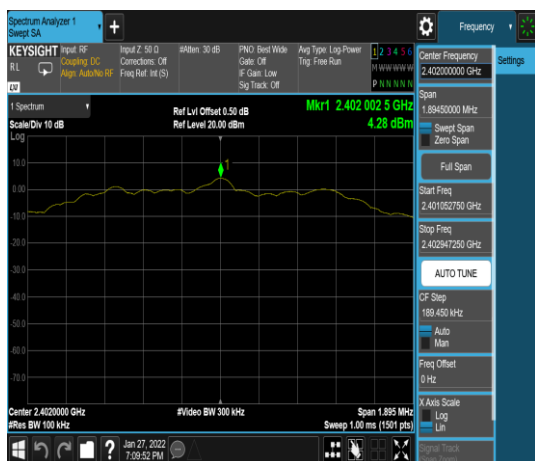


Band Edge

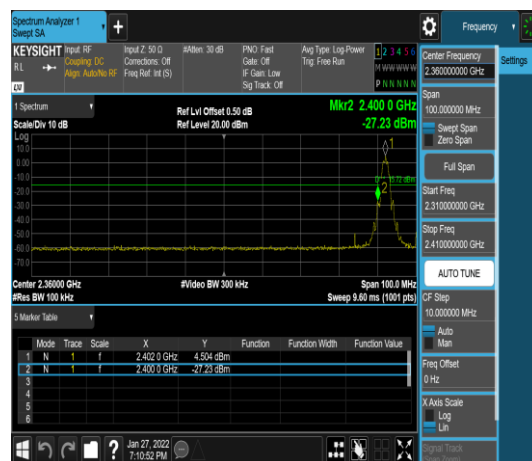

Spurious Emission 30MHz-25GHz

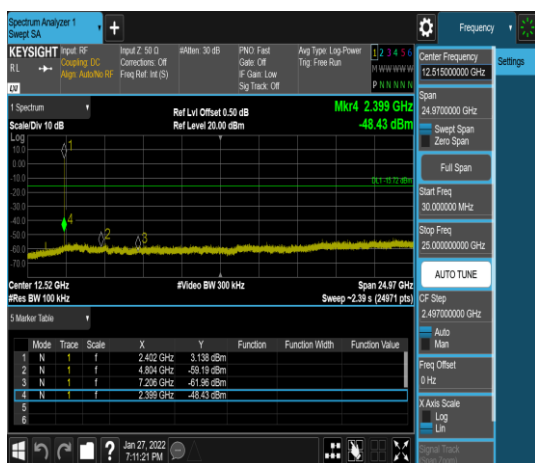

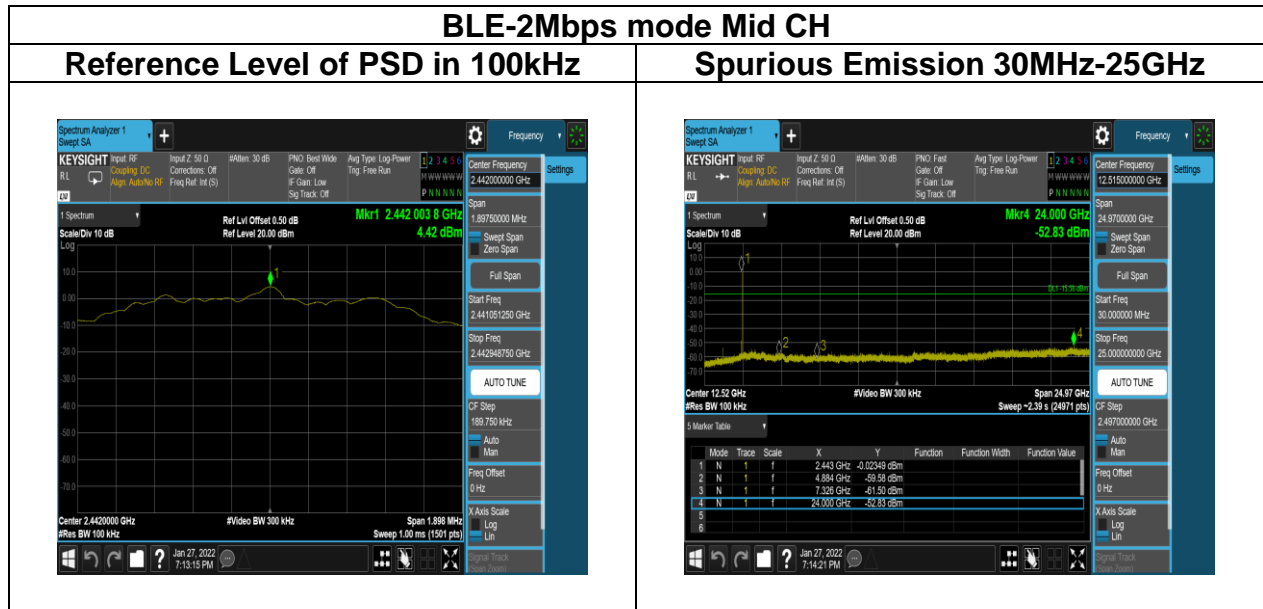



4.6 RADIATION BANDEDGE AND SPURIOUS EMISSION

4.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

IC according to RSS-247 section 5.5, RSS-Gen, Section 8.9 and 8.10

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

IC according to RSS-247 section 5.5, RSS-Gen, Section 8.9 and 8.10

RSS-Gen Table 3 and Table 5 – General Field Strength Limits for Transmitters and Receivers at Frequencies Above 30 MHz (Note)

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Note: Measurements for compliance with the limits in table 3 may be performed at distances other than 3 metres, in accordance with Section 6.6.

RSS-Gen Table 6: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)

Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement Distance (m)
9-490 kHz ^{Note}	6.37/F (F in kHz)	300
490-1,705 kHz	63.7/F (F in kHz)	30
1.705-30 MHz	0.08	30

Note: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

4.6.2 Test Procedure

Test method Refer as ANSI C63.10:2013.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10: 2013, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 9KHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

Remark:

1. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
2. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

3. The SA setting following :

- (1) Below 1G : RBW = 100kHz, VBW \geq 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
- (2) Above 1G :
 - (2.1) For Peak measurement : RBW = 1MHz, VBW \geq 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2.2) For Average measurement : RBW = 1MHz, VBW
 - *If Duty Cycle \geq 98%, VBW=10Hz.
 - *If Duty Cycle < 98%, VBW=1/T.


4. Data result

Actual FS=Spectrum Reading Level+Factor


Margin=Actual FS- Limit

4.6.3 Test Setup


9kHz ~ 30MHz

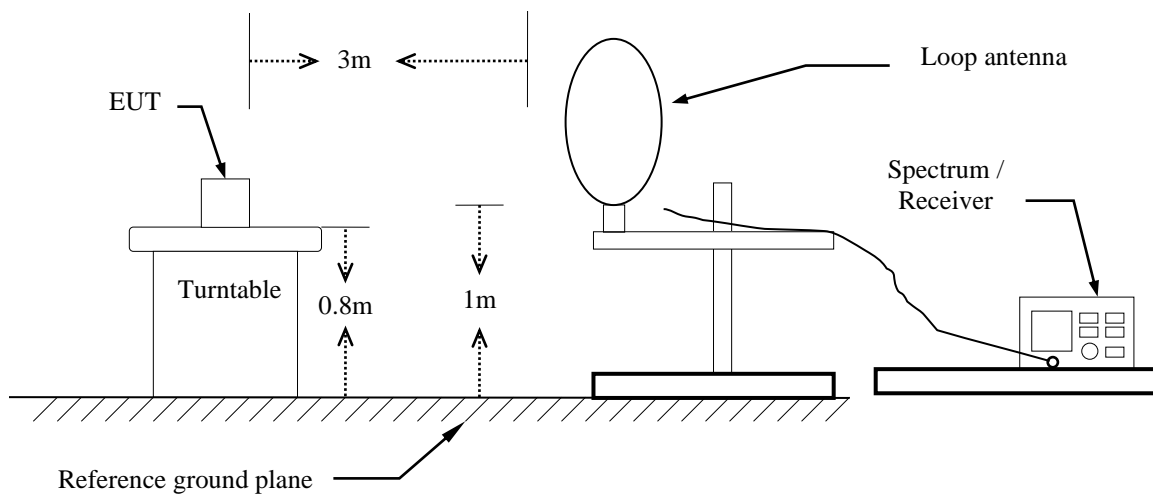

30MHz ~ 1GHz

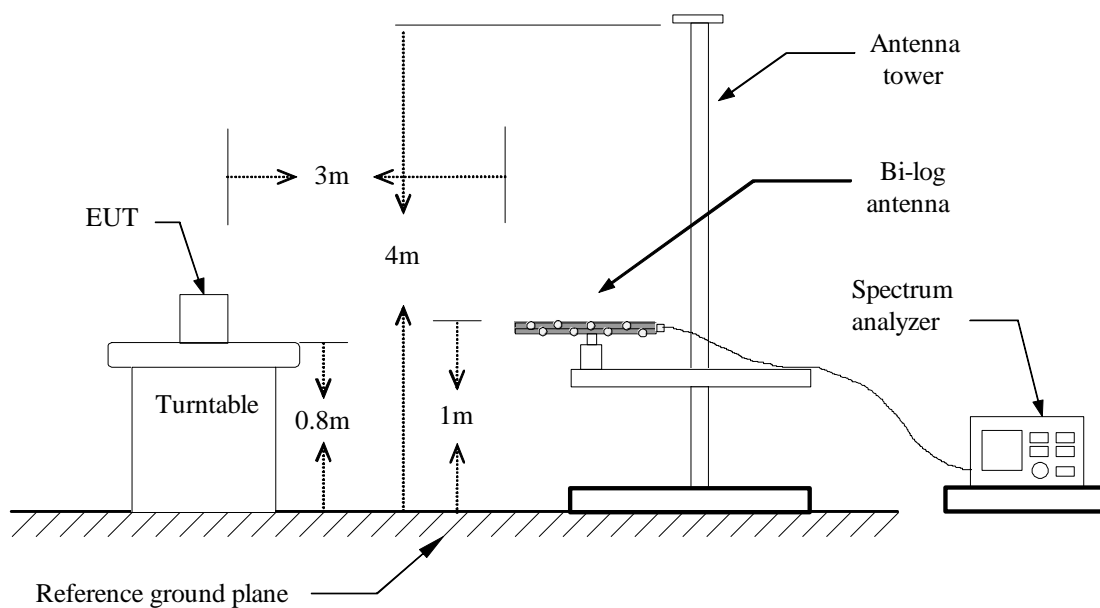


Above 1 GHz

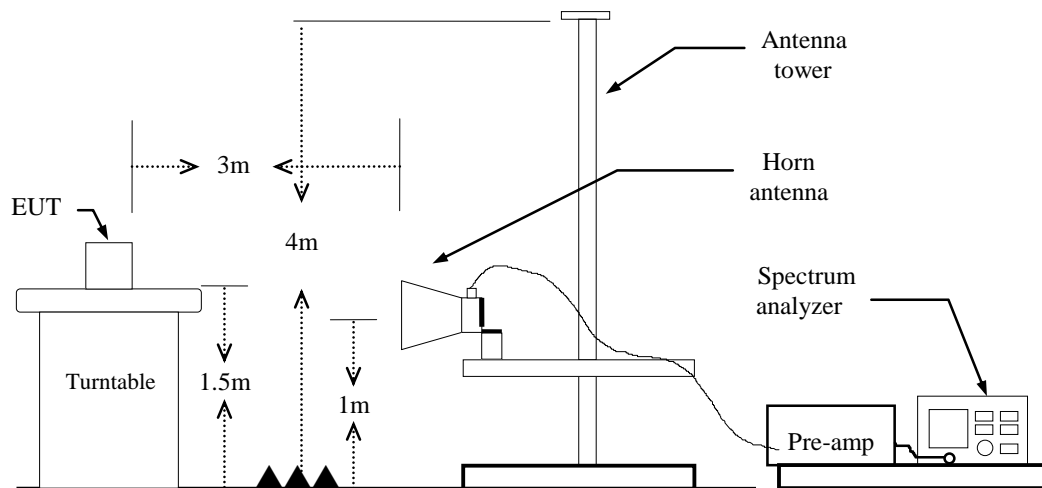

4.6.4 Test Result


Band Edge Test Data

Test Mode:	BLE-1Mbps Low CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Band Edge	Test Date	February 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

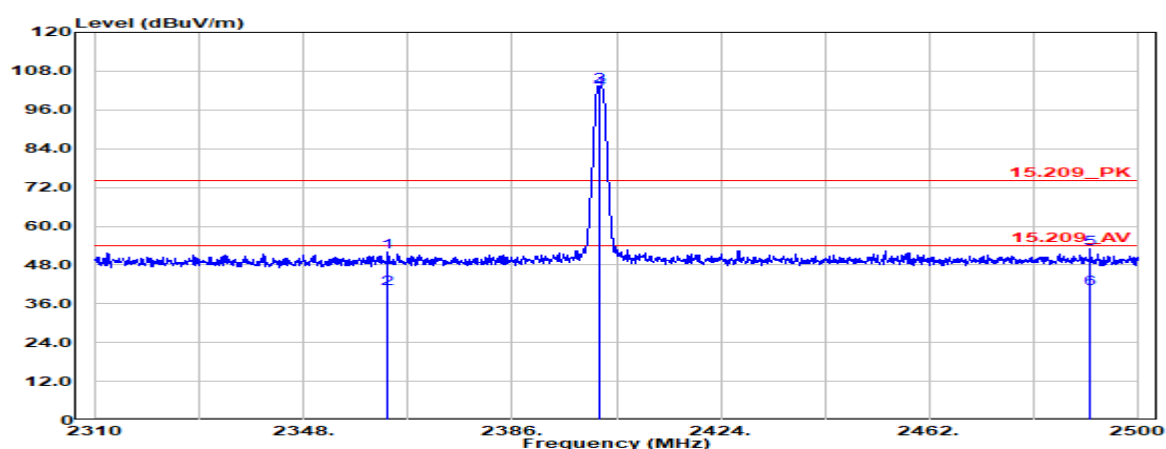


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2363.30	Peak	39.79	12.35	52.14	74.00	-21.86
2363.30	Average	28.35	12.35	40.69	54.00	-13.31
2402.00	Peak	90.96	12.54	103.51	-	-
2402.00	Average	90.00	12.54	102.54	-	-
2491.45	Peak	40.01	13.13	53.14	74.00	-20.86
2491.45	Average	27.65	13.13	40.78	54.00	-13.22

Test Mode:	BLE-1Mbps Low CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Band Edge	Test Date	February 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

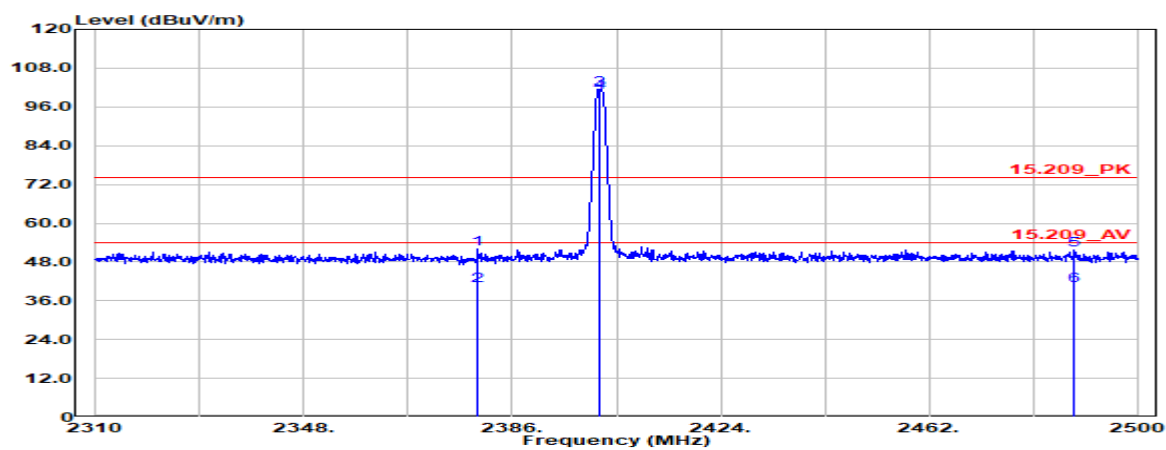


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2379.64	Peak	39.48	12.43	51.91	74.00	-22.09
2379.64	Average	28.23	12.43	40.66	54.00	-13.34
2402.00	Peak	88.87	12.54	101.41	-	-
2402.00	Average	87.91	12.54	100.45	-	-
2488.60	Peak	38.48	13.11	51.59	74.00	-22.41
2488.60	Average	27.46	13.11	40.57	54.00	-13.43

Test Mode:	BLE-1Mbps High CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Band Edge	Test Date	February 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

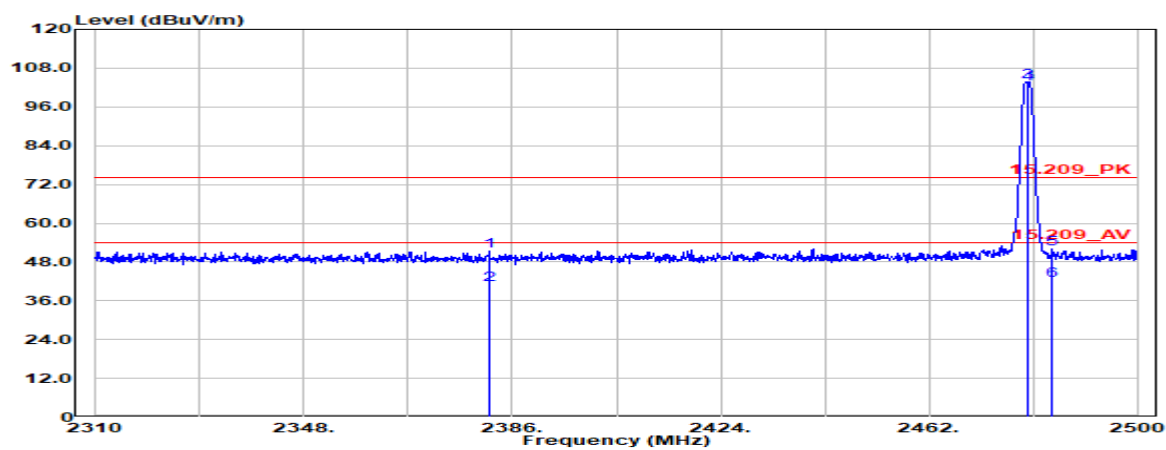


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2381.82	Peak	38.82	12.44	51.26	74.00	-22.74
2381.82	Average	28.56	12.44	41.00	54.00	-13.00
2480.00	Peak	90.77	13.05	103.82	-	-
2480.00	Average	90.04	13.05	103.09	-	-
2484.52	Peak	38.90	13.08	51.98	74.00	-22.02
2484.52	Average	29.27	13.08	42.36	54.00	-11.64

Test Mode:	BLE-1Mbps High CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Band Edge	Test Date	February 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

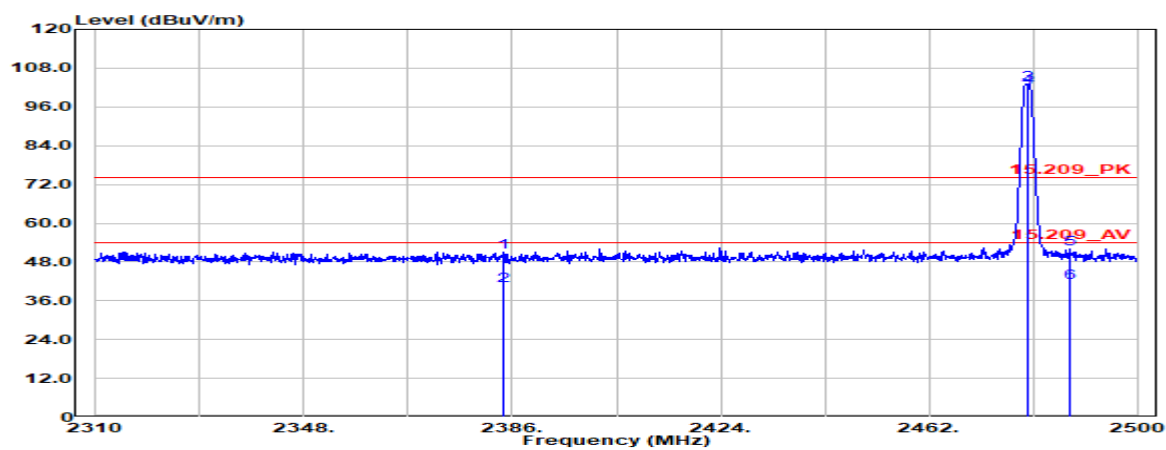


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2384.39	Peak	38.55	12.45	51.00	74.00	-23.00
2384.39	Average	28.11	12.45	40.56	54.00	-13.44
2480.00	Peak	90.14	13.05	103.20	-	-
2480.00	Average	89.17	13.05	102.23	-	-
2487.65	Peak	38.91	13.11	52.02	74.00	-21.98
2487.65	Average	28.60	13.11	41.71	54.00	-12.29

Test Mode:	BLE-2Mbps Low CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Band Edge	Test Date	February 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

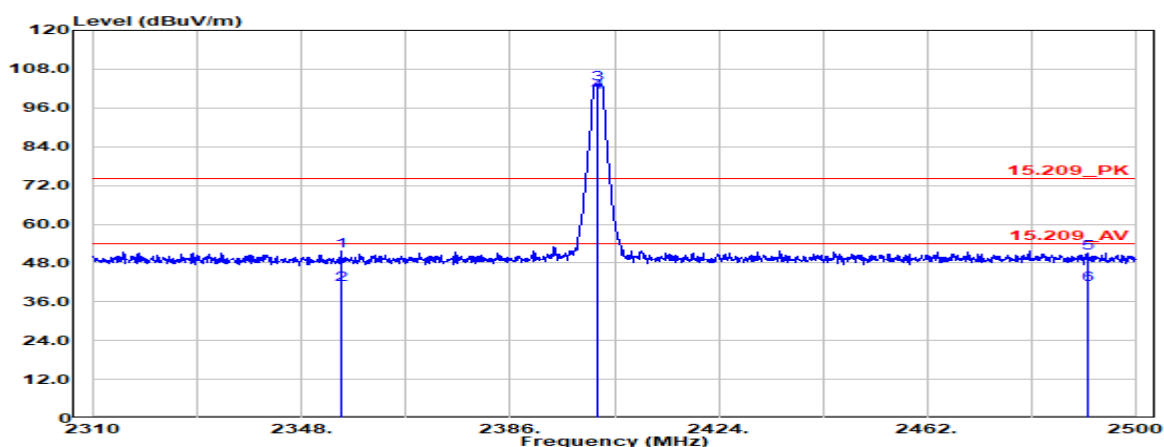


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
2355.13	Peak	39.34	12.31	51.65	74.00	-22.35
2355.13	Average	29.06	12.31	41.37	54.00	-12.63
2402.00	Peak	91.03	12.54	103.58	-	-
2402.00	Average	88.24	12.54	100.79	-	-
2491.26	Peak	37.87	13.13	51.00	74.00	-23.00
2491.26	Average	28.03	13.13	41.16	54.00	-12.84

Test Mode:	BLE-2Mbps Low CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Band Edge	Test Date	February 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

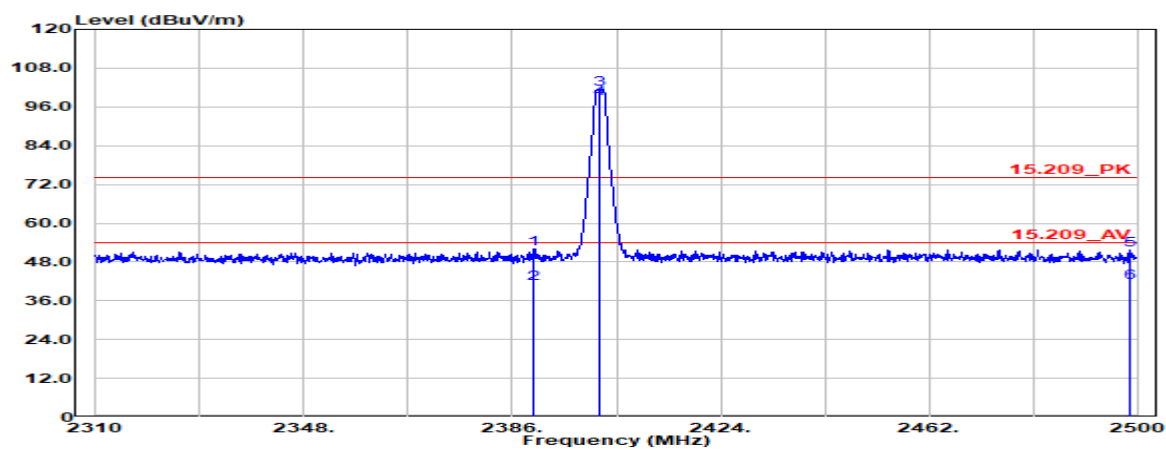


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2389.99	Peak	39.41	12.48	51.89	74.00	-22.11
2389.99	Average	28.66	12.48	41.14	54.00	-12.86
2402.00	Peak	88.94	12.54	101.48	-	-
2402.00	Average	86.14	12.54	98.68	-	-
2498.58	Peak	38.64	13.18	51.82	74.00	-22.18
2498.58	Average	28.32	13.18	41.51	54.00	-12.49

Test Mode:	BLE-2Mbps High CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Band Edge	Test Date	February 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

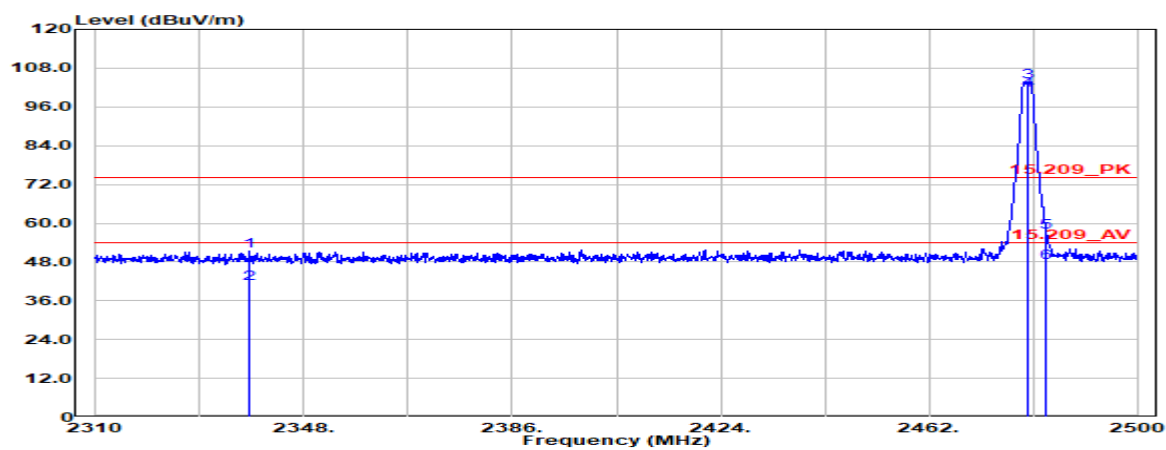

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2338.03	Peak	39.06	12.26	51.32	74.00	-22.68
2338.03	Average	28.99	12.26	41.25	54.00	-12.75
2480.00	Peak	90.80	13.05	103.86	-	-
2480.00	Average	88.00	13.05	101.05	-	-
2483.50	Peak	44.03	13.08	57.11	74.00	-16.89
2483.50	Average	34.81	13.08	47.89	54.00	-6.11


Test Mode:	BLE-2Mbps High CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Band Edge	Test Date	February 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

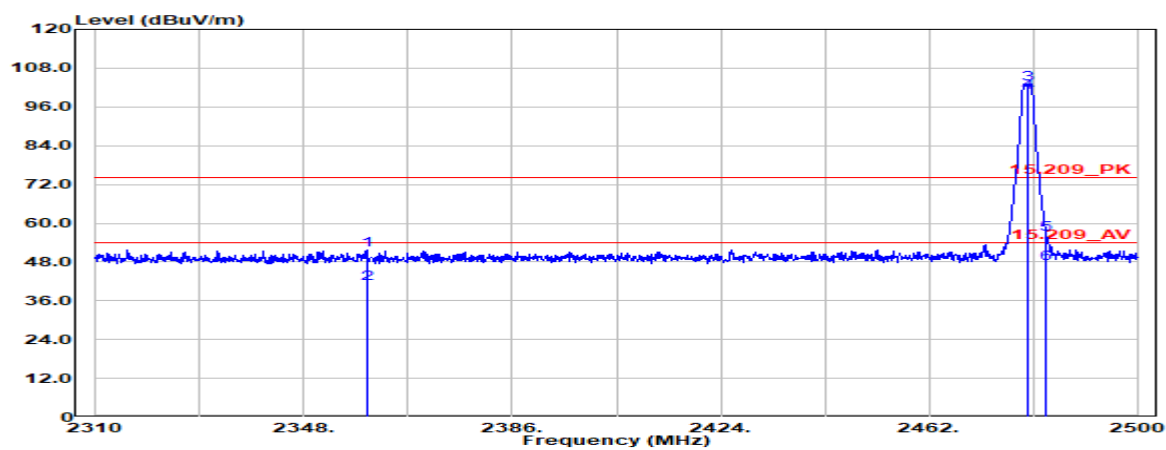

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2359.40	Peak	39.43	12.33	51.76	74.00	-22.24
2359.40	Average	29.07	12.33	41.40	54.00	-12.60
2480.00	Peak	90.08	13.05	103.14	-	-
2480.00	Average	87.34	13.05	100.39	-	-
2483.50	Peak	43.43	13.08	56.51	74.00	-17.49
2483.50	Average	34.52	13.08	47.60	54.00	-6.40

Below 1G Test Data


Test Mode:	BLE-1Mbps Mode	Temp/Hum	21.1(°C)/ 57%RH
Test Item	30MHz-1GHz	Test Date	February 16, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

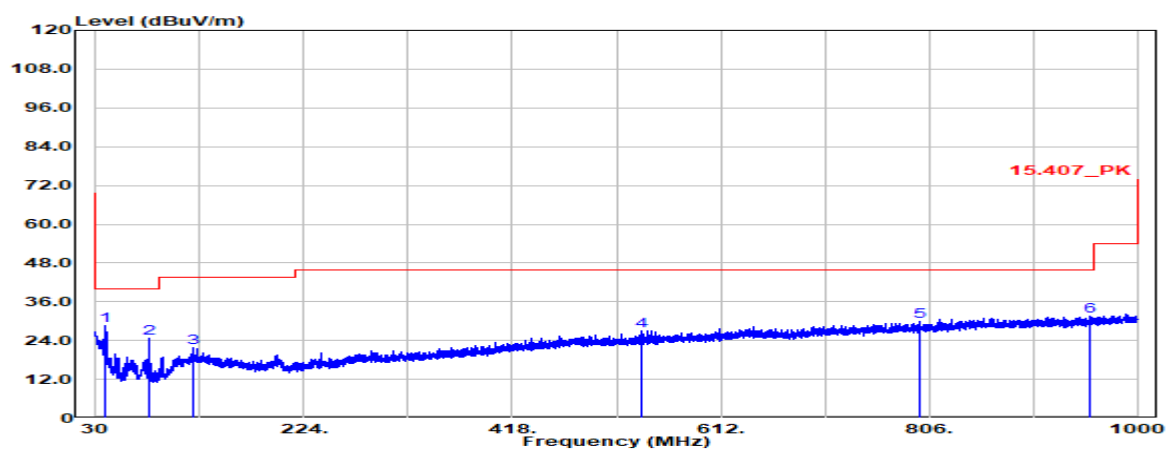

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
39.09	Peak	37.72	-9.11	28.60	40.00	-11.40
79.96	Peak	40.50	-15.63	24.87	40.00	-15.13
120.09	Peak	31.12	-9.18	21.94	43.50	-21.56
538.04	Peak	29.79	-2.76	27.02	46.00	-18.98
797.15	Peak	28.39	1.44	29.83	46.00	-16.17
955.62	Peak	27.72	3.80	31.53	46.00	-14.47

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Test Mode:	BLE-1Mbps Mode	Temp/Hum	21.1(°C)/ 57%RH
Test Item	30MHz-1GHz	Test Date	February 16, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

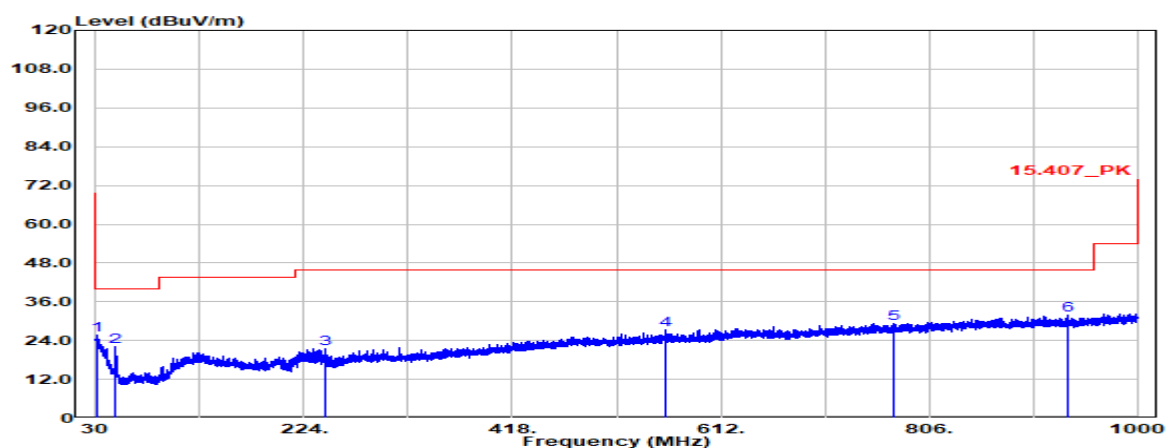


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
30.73	Peak	28.60	-2.96	25.64	40.00	-14.36
48.67	Peak	36.79	-14.75	22.04	40.00	-17.96
243.89	Peak	32.20	-10.66	21.54	46.00	-24.46
561.08	Peak	29.83	-2.43	27.40	46.00	-18.60
773.14	Peak	28.24	1.13	29.37	46.00	-16.63
935.37	Peak	28.41	3.42	31.82	46.00	-14.18

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Report No.: TMWK2201000419KR


Test Mode:	BLE-2Mbps Mode	Temp/Hum	21.1(°C)/ 57%RH
Test Item	30MHz-1GHz	Test Date	February 16, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

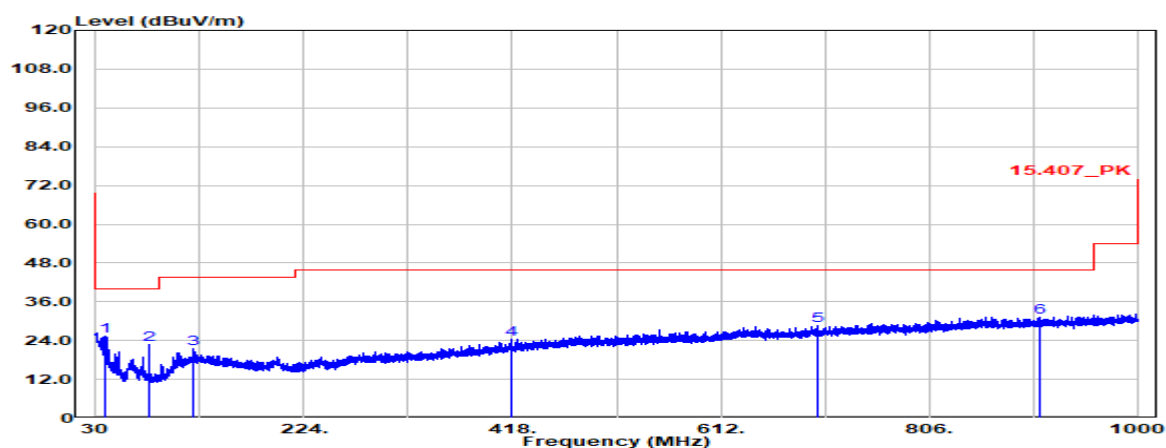

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
39.09	Peak	34.46	-9.11	25.34	40.00	-14.66
79.96	Peak	38.26	-15.63	22.64	40.00	-17.36
119.97	Peak	30.56	-9.18	21.38	43.50	-22.12
417.15	Peak	29.74	-5.33	24.41	46.00	-21.59
701.97	Peak	28.64	0.11	28.74	46.00	-17.26
909.06	Peak	28.10	3.28	31.38	46.00	-14.62

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Test Mode:	BLE-2Mbps Mode	Temp/Hum	21.1(°C)/ 57%RH
Test Item	30MHz-1GHz	Test Date	February 16, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

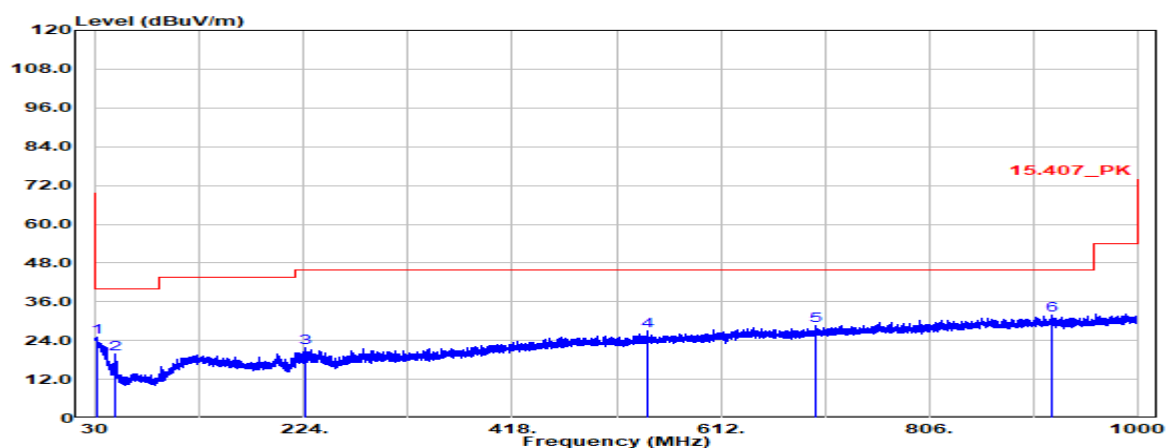


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
30.49	Peak	27.94	-2.82	25.12	40.00	-14.88
48.67	Peak	34.60	-14.75	19.85	40.00	-20.15
225.70	Peak	33.49	-11.62	21.87	46.00	-24.13
543.98	Peak	29.63	-2.77	26.86	46.00	-19.14
701.24	Peak	28.58	0.09	28.67	46.00	-17.33
920.46	Peak	28.50	3.32	31.82	46.00	-14.18

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Above 1G Test Data

Test Mode:	BLE-1Mbps Low CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Harmonic	Test Date	February 16, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

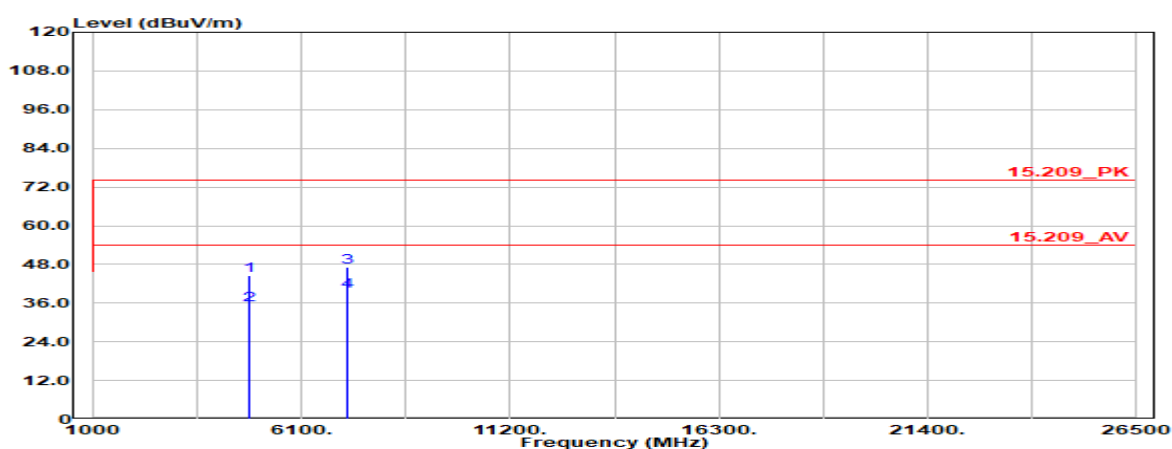


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4804.00	Peak	35.19	9.46	44.65	74.00	-29.35
4804.00	Average	25.87	9.46	35.33	54.00	-18.67
7206.00	Peak	33.73	13.51	47.24	74.00	-26.76
7206.00	Average	26.25	13.51	39.76	54.00	-14.24
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps Low CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Harmonic	Test Date	February 16, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

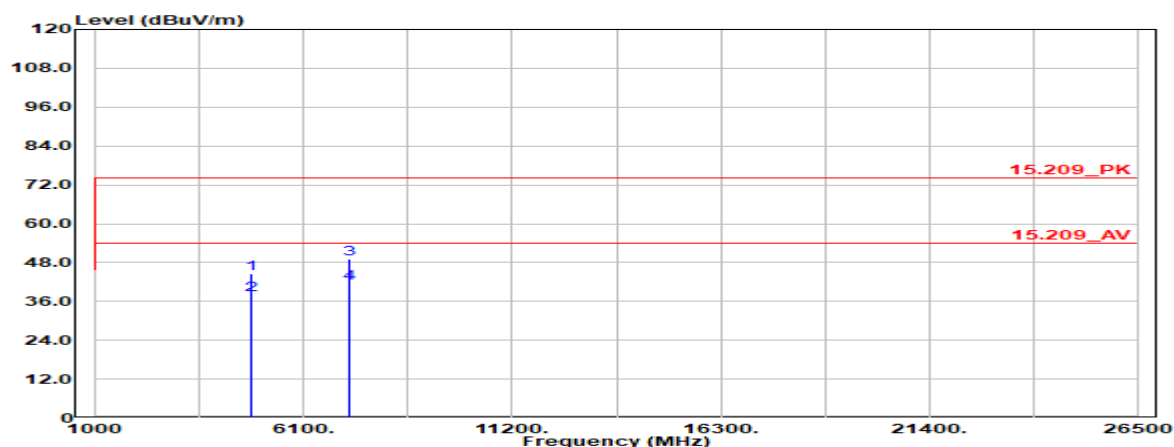


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4804.00	Peak	35.20	9.46	44.67	74.00	-29.33
4804.00	Average	28.72	9.46	38.18	54.00	-15.82
7206.00	Peak	35.65	13.51	49.16	74.00	-24.84
7206.00	Average	28.10	13.51	41.61	54.00	-12.39
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps Mid CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Harmonic	Test Date	February 16, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

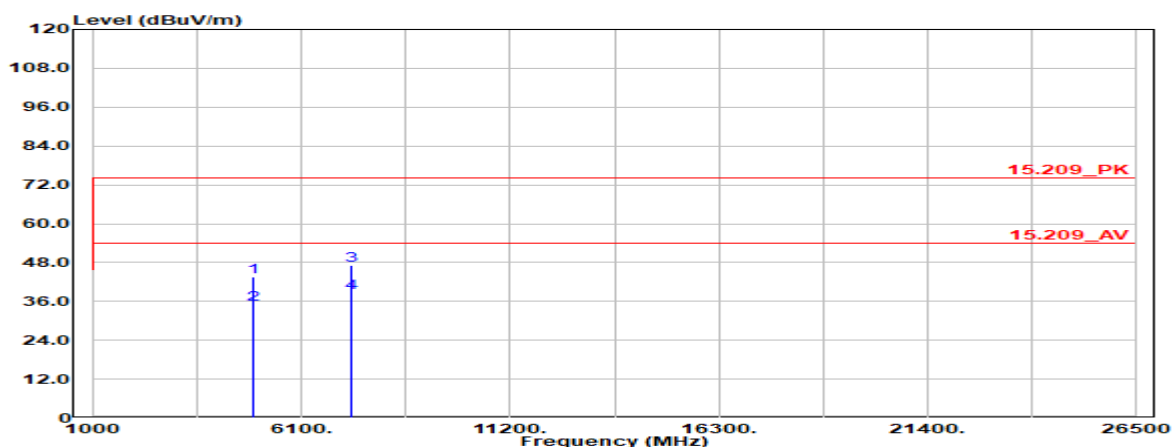


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4884.00	Peak	34.13	9.59	43.72	74.00	-30.28
4884.00	Average	25.48	9.59	35.07	54.00	-18.93
7326.00	Peak	33.79	13.24	47.03	74.00	-26.97
7326.00	Average	25.31	13.24	38.55	54.00	-15.45
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps Mid CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Harmonic	Test Date	February 16, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

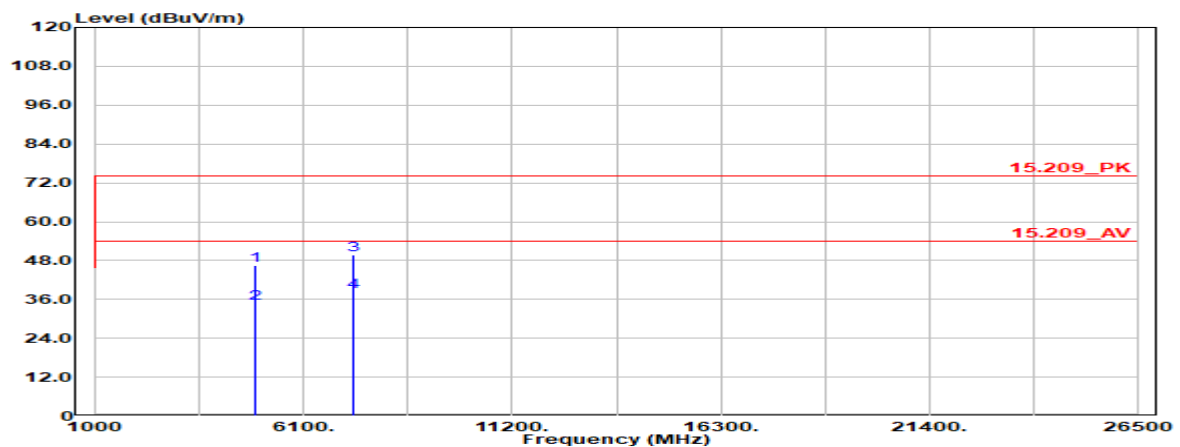


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4884.00	Peak	36.88	9.59	46.47	74.00	-27.53
4884.00	Average	25.32	9.59	34.91	54.00	-19.09
7326.00	Peak	36.40	13.24	49.64	74.00	-24.36
7326.00	Average	25.13	13.24	38.37	54.00	-15.63
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps High CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Harmonic	Test Date	February 16, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

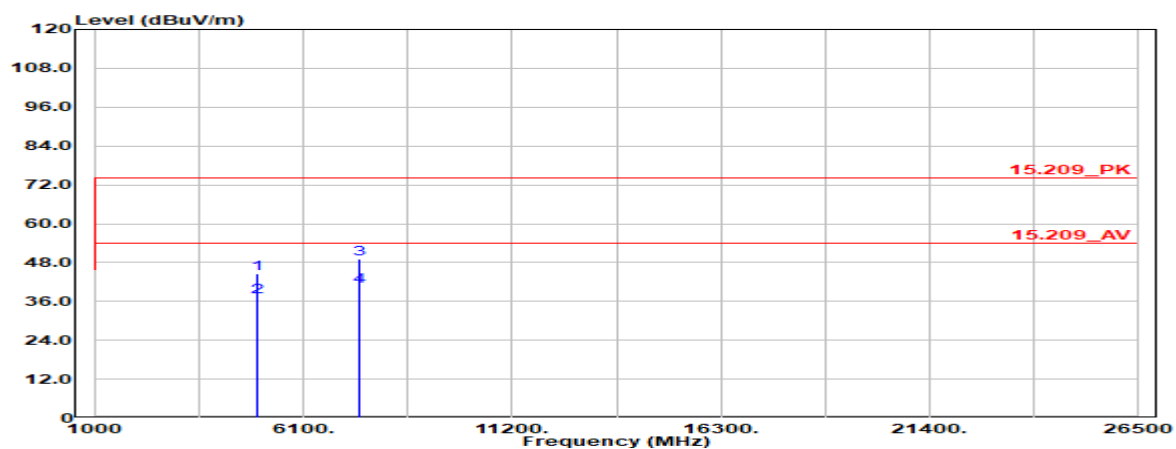


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4960.00	Peak	34.96	9.71	44.67	74.00	-29.33
4960.00	Average	27.60	9.71	37.31	54.00	-16.69
7440.00	Peak	35.41	13.54	48.95	74.00	-25.05
7440.00	Average	27.15	13.54	40.69	54.00	-13.31
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps High CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Harmonic	Test Date	February 16, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

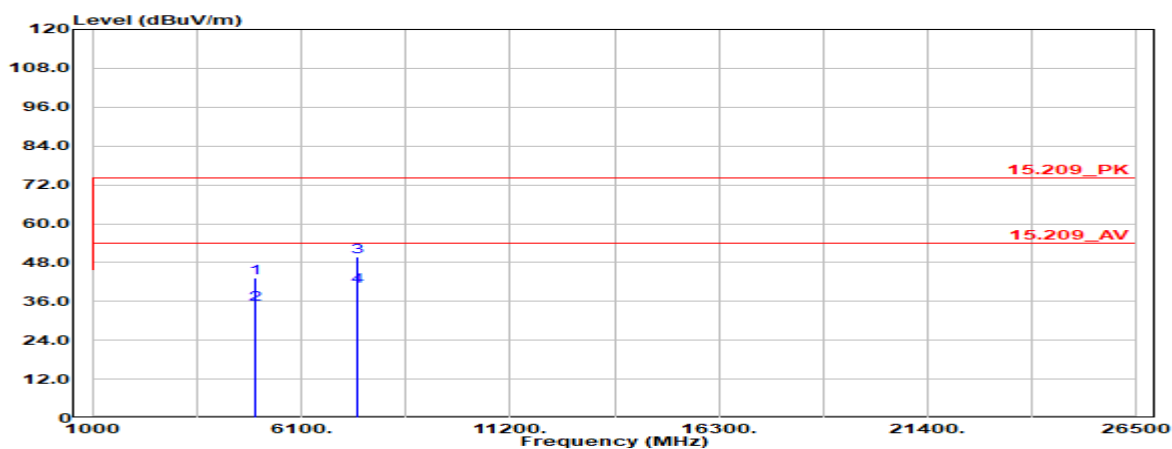


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4960.00	Peak	33.50	9.71	43.21	74.00	-30.79
4960.00	Average	25.43	9.71	35.14	54.00	-18.86
7440.00	Peak	36.17	13.54	49.71	74.00	-24.29
7440.00	Average	26.99	13.54	40.53	54.00	-13.47
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-2Mbps Low CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Harmonic	Test Date	February 16, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

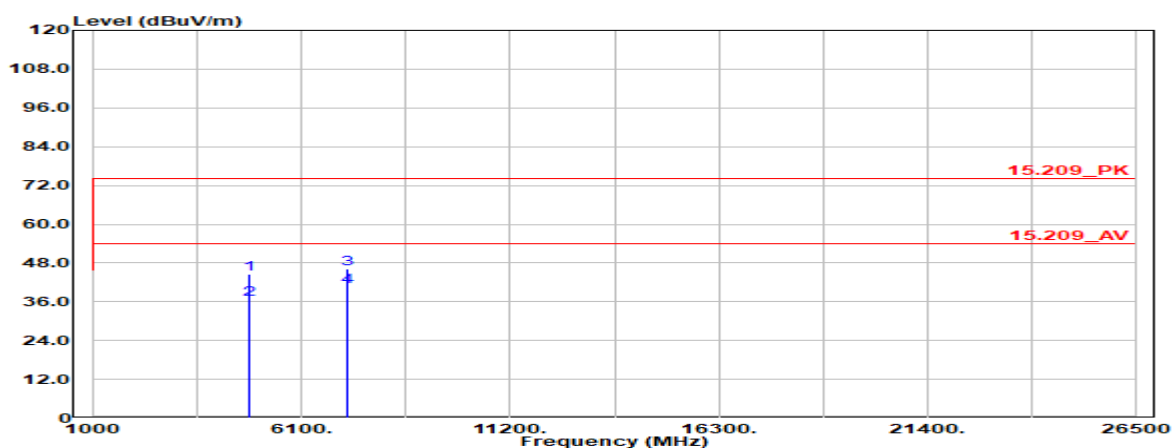


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4804.00	Peak	35.14	9.46	44.61	74.00	-29.39
4804.00	Average	27.21	9.46	36.67	54.00	-17.33
7206.00	Peak	32.61	13.51	46.12	74.00	-27.88
7206.00	Average	27.16	13.51	40.67	54.00	-13.33
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-2Mbps Low CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Harmonic	Test Date	February 16, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

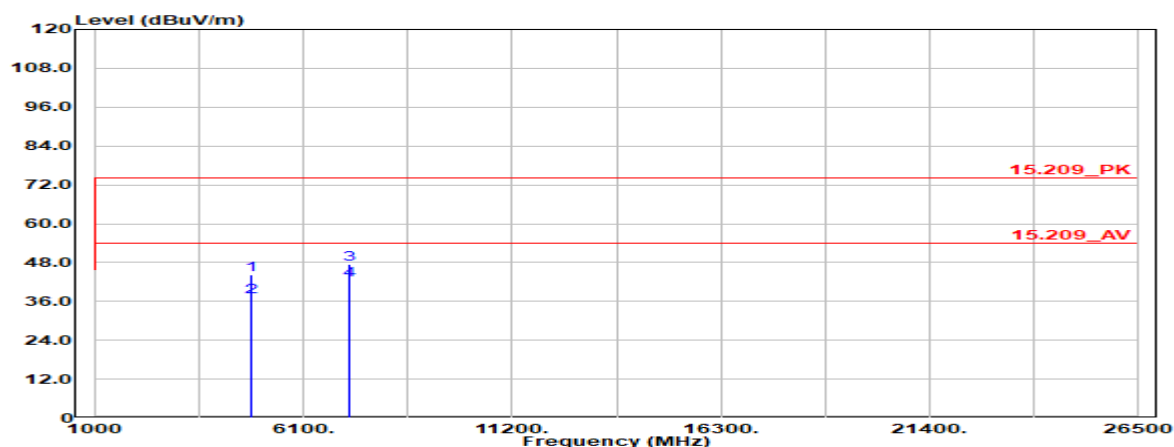


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4804.00	Peak	34.83	9.46	44.30	74.00	-29.70
4804.00	Average	27.86	9.46	37.32	54.00	-16.68
7206.00	Peak	33.86	13.51	47.37	74.00	-26.63
7206.00	Average	28.95	13.51	42.46	54.00	-11.54
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-2Mbps Mid CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Harmonic	Test Date	February 16, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

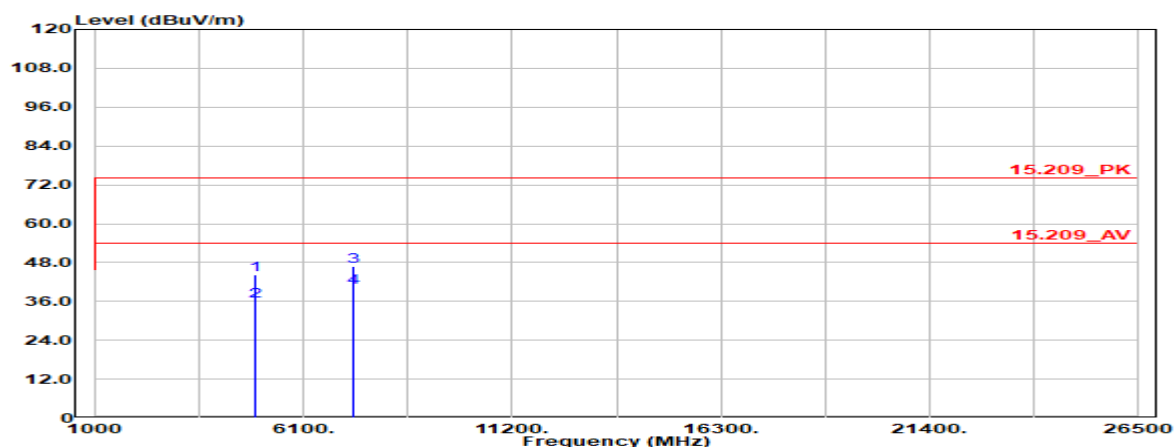


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4884.00	Peak	34.77	9.59	44.36	74.00	-29.64
4884.00	Average	26.56	9.59	36.15	54.00	-17.85
7326.00	Peak	33.53	13.24	46.77	74.00	-27.23
7326.00	Average	27.17	13.24	40.41	54.00	-13.59
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-2Mbps Mid CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Harmonic	Test Date	February 16, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

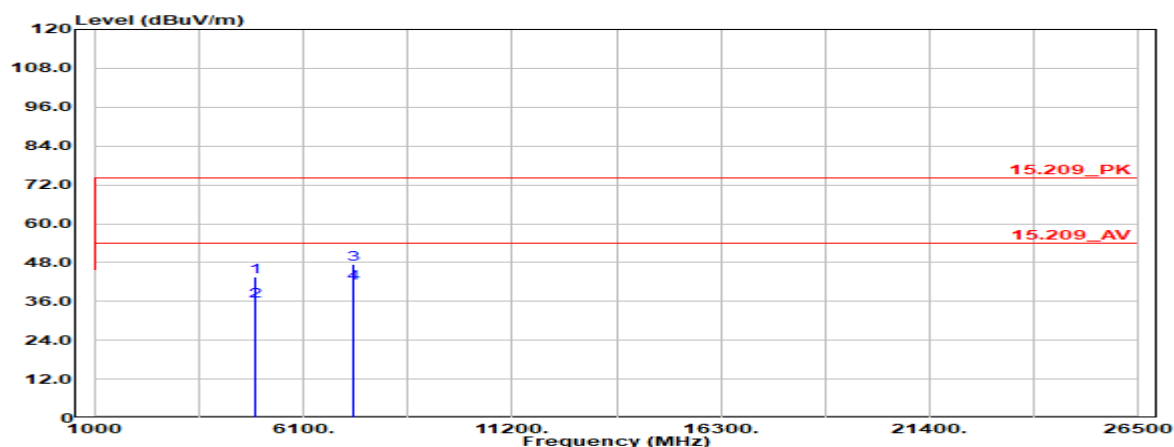


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4884.00	Peak	33.87	9.59	43.46	74.00	-30.54
4884.00	Average	26.67	9.59	36.26	54.00	-17.74
7326.00	Peak	34.15	13.24	47.39	74.00	-26.61
7326.00	Average	28.34	13.24	41.58	54.00	-12.42
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-2Mbps High CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Harmonic	Test Date	February 16, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

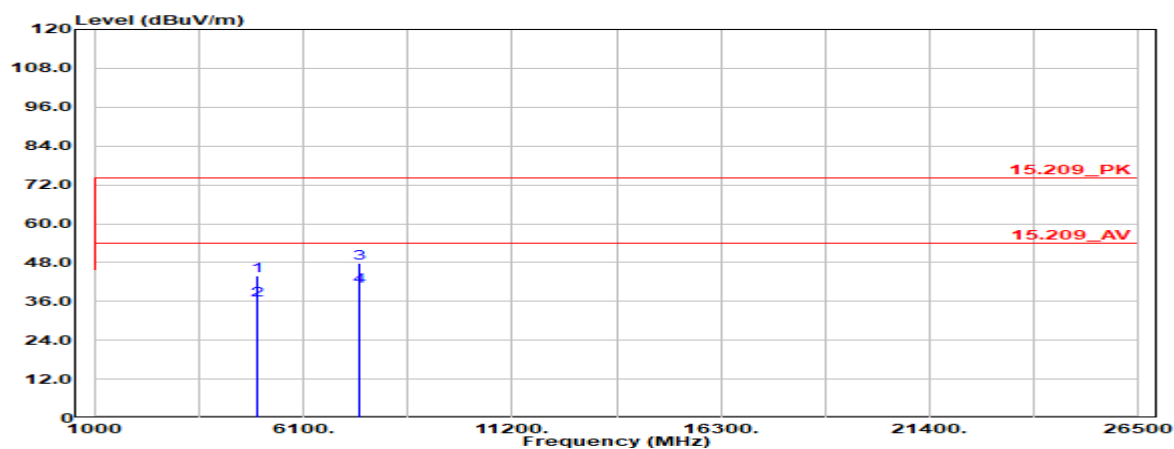


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4960.00	Peak	34.33	9.71	44.04	74.00	-29.96
4960.00	Average	26.78	9.71	36.49	54.00	-17.51
7440.00	Peak	34.42	13.54	47.96	74.00	-26.04
7440.00	Average	27.10	13.54	40.64	54.00	-13.36
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-2Mbps High CH	Temp/Hum	21.1(°C)/ 57%RH
Test Item	Harmonic	Test Date	February 16, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

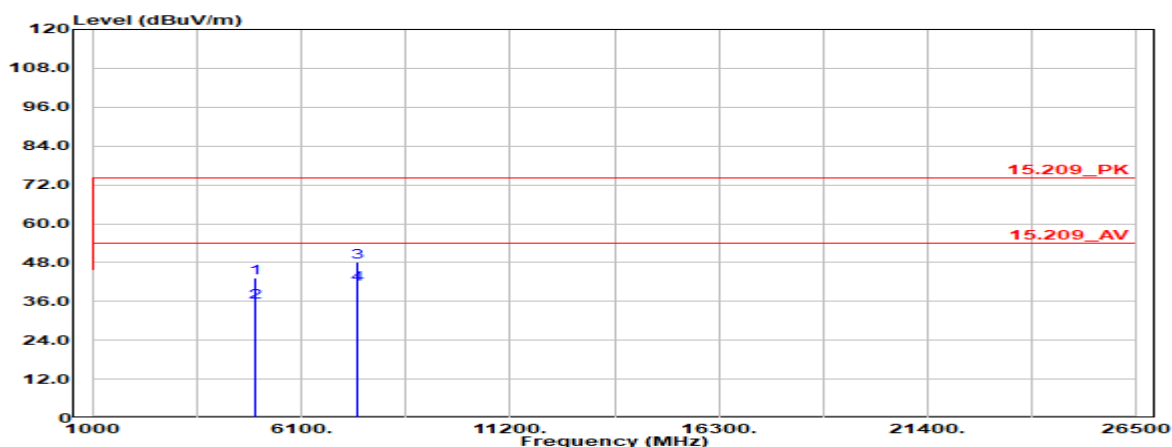

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4960.00	Peak	33.63	9.71	43.33	74.00	-30.67
4960.00	Average	25.97	9.71	35.68	54.00	-18.32
7440.00	Peak	34.44	13.54	47.98	74.00	-26.02
7440.00	Average	27.69	13.54	41.23	54.00	-12.77
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

--End of Test Report--