



CFR 47 FCC PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

WIFI+BT Module

MODEL NUMBER: DCT85N2001

FCC ID: 2AC23-DCT85

REPORT NUMBER: 4790014851.2-3

ISSUE DATE: September 22, 2021

Prepared for

**Hui Zhou Gaoshengda Technology Co.,LTD
NO.75 Zhongkai Development Area, Huizhou, Guangdong China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	09/22/2021	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6dB Bandwidth	FCC Part 15.247 (a) (2)	Pass
2	Conducted Output Power	FCC Part 15.247 (b) (3)	Pass
3	Power Spectral Density	FCC Part 15.247 (e)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d)	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205	Pass
6	Conducted Emission Test for AC Power Port	FCC Part 15.207	Pass
7	Antenna Requirement	FCC Part 15.203	Pass
<p>Note:</p> <p>1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.</p> <p>2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C > when <Accuracy Method> decision rule is applied.</p>			



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. CHANNEL LIST	9
5.3. MAXIMUM OUTPUT POWER	10
5.4. TEST CHANNEL CONFIGURATION	10
5.5. THE WORSE CASE POWER SETTING PARAMETER	10
5.6. THE WORSE CASE CONFIGURATIONS	11
5.7. DESCRIPTION OF AVAILABLE ANTENNAS	12
5.8. DESCRIPTION OF TEST SETUP	13
6. MEASURING INSTRUMENT AND SOFTWARE USED	14
7. ANTENNA PORT TEST RESULTS	16
7.1. ON TIME AND DUTY CYCLE	16
7.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH	17
7.3. CONDUCTED OUTPUT POWER	19
7.4. POWER SPECTRAL DENSITY	20
7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	22
8. RADIATED TEST RESULTS	24
8.1. RESTRICTED BANDEDGE	30
8.1.1. 802.11b SISO MODE	30
8.1.2. 802.11g SISO MODE	33
8.1.3. 802.11n HT20 MIMO MODE	37
8.1.4. 802.11n HT40 MIMO MODE	41
8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)	45
8.2.1. 802.11b SISO MODE	45
8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)	51
8.3.1. 802.11b SISO MODE	51
8.3.2. 802.11g SISO MODE	57
8.3.3. 802.11n HT20 MIMO MODE	63
8.3.4. 802.11n HT40 MIMO MODE	69



8.5.	SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)	75
8.5.1.	802.11b SISO MODE.....	75
8.6.	SPURIOUS EMISSIONS (30 MHz ~ 1 GHz).....	77
8.6.1.	802.11b SISO MODE.....	77
8.7.	SPURIOUS EMISSIONS BELOW 30 MHz	79
8.7.1.	802.11b SISO MODE.....	79
9.	AC POWER LINE CONDUCTED EMISSIONS	82
9.1.1.	802.11b SISO MODE.....	83
10.	ANTENNA REQUIREMENTS	85
11.	Appendix.....	86
11.1.	Appendix A: DTS Bandwidth	86
11.1.1.	Test Result.....	86
11.1.2.	Test Graphs	87
11.2.	Appendix B: Occupied Channel Bandwidth	95
11.2.1.	Test Result.....	95
11.2.2.	Test Graphs	96
11.3.	Appendix C: Maximum conducted output power.....	104
11.3.1.	Test Result.....	104
11.4.	Appendix D: Maximum power spectral density	105
11.4.1.	Test Result.....	105
11.4.2.	Test Graphs	106
11.5.	Appendix E: Band edge measurements	112
11.5.1.	Test Result.....	112
11.5.2.	Test Graphs	113
11.6.	Appendix F: Conducted Spurious Emission.....	117
11.6.1.	Test Result.....	117
11.6.2.	Test Graphs	119
11.7.	Appendix G: Duty Cycle	137
11.7.1.	Test Result.....	137
11.7.2.	Test Graphs	138



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
Address: NO.75 Zhongkai Development Area, Huizhou, Guangdong China

Manufacturer Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
Address: NO.75 Zhongkai Development Area, Huizhou, Guangdong China

EUT Information

EUT Name: WIFI+BT Module
Model: DCT85N2001
Brand: GSD
Sample Received Date: July 20, 2021
Sample Status: Normal
Sample ID: 4056488
Date of Tested: July 22, 2021~ September 16, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS

Prepared By:

Kebo Zhang
Project Engineer

Checked By:

Shawn Wen
Laboratory Leader

Approved By:

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15 and ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	WIFI+BT Module
Model Name	DCT85N2001
Radio Technology	IEEE802.11b/g/n HT20/n HT40
Operation frequency	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz
Modulation	IEEE 802.11b: DSSS(CCK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Power Supply	DC 3.3 V
Note	<p>The product has four kinds of constructions:</p> <ol style="list-style-type: none"> 1. Module with a shielding cover and DC TO DC component package DFN-6. 2. Module without a shielding cover and DC TO DC component package DFN-6. 3. Module with a shielding cover and DC TO DC component package SOT23-5. 4. Module without a shielding cover and DC TO DC component package SOT23-5. <p>Constructions 1&2&3&4 have the same RF technical construction including circuit diagram, PCB Layout, components and component layout. The only difference lies in the different DC TO DC components and the with and without shielding cover.</p>

5.2. CHANNEL LIST

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List for 802.11n (40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/



5.3. MAXIMUM OUTPUT POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)	Maximum AVG EIRP (dBm)
b	2412 ~ 2462	1-11[11]	16.77	18.77
g	2412 ~ 2462	1-11[11]	15.75	17.75
n HT20	2412 ~ 2462	1-11[11]	16.17	18.17
n HT40	2422 ~ 2452	3-9[7]	12.75	14.75

5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
g	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		DutApiMimoBt					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1	16	16	16	/		
	2	16	16	16			
802.11g	1	15	15	15			
	2	15	15	15			
802.11n HT20	1	13	13	13			
	2	13	13	13			
802.11n HT40	1	/			11	11	10
	2	/			11	11	10

5.6. THE WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

802.11b/g only support SISO mode.

802.11 n HT20/HT40 support SISO and MIMO mode.

802.11b/g SISO mode, Antenna 1 and Antenna 2 has the same power setting, so only Antenna 1 worst case test data were recorded in the report.

802.11n SISO mode and MIMO mode have the same power setting, so only the worst case power mode(MIMO) will be record in the report.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 0 and Core 1 correspond to antenna 1 and antenna 2 respectively.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Conducted output power, power spectral density tests separately on each port with all supported SISO & MIMO port combinations.

The EUT support Cyclic Shift Diversity(CDD), Space Time Coding(STBC), Spatial Division Multiplexing(SDM) modes. They use the same conducted power per chain in any given mode, CDD mode have the maximum power setting, so we only chose the worst case mode CDD for final testing.

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	PIFA	2
2	2412-2462	PIFA	2

The EUT support Cyclic Shift Diversity(CDD) mode.

MIMO output power port and MIMO PSD port summing was performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 2 \text{ dBi}$

G_{ANT} : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 5 \text{ dBi}$

Array Gain = $10 \log(N_{ANT}/N_{SS}) \text{ dB}$.

N_{ANT} : number of transmit antennas

N_{SS} : number of spatial streams, The worst case directional gain will occur when $N_{SS} = 1$

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11g	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
Note: 1.BT&WLAN 2.4G, BT & WLAN 5G, WLAN 2.4G & WLAN 5G can't transmit simultaneously. (declared by client)		

Note: The value of the antenna gain was declared by customer.

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	E42-80	R303U5AG
2	AC/DC adapter	/	HNBM050200WC	Input: AC 100-240 V, 50/60 Hz, 0.35A Output: DC 5.0 V, 5000 mA

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
/	/	/	/	/	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in an engineer mode with software through a laptop.

SETUP DIAGRAM FOR TESTS

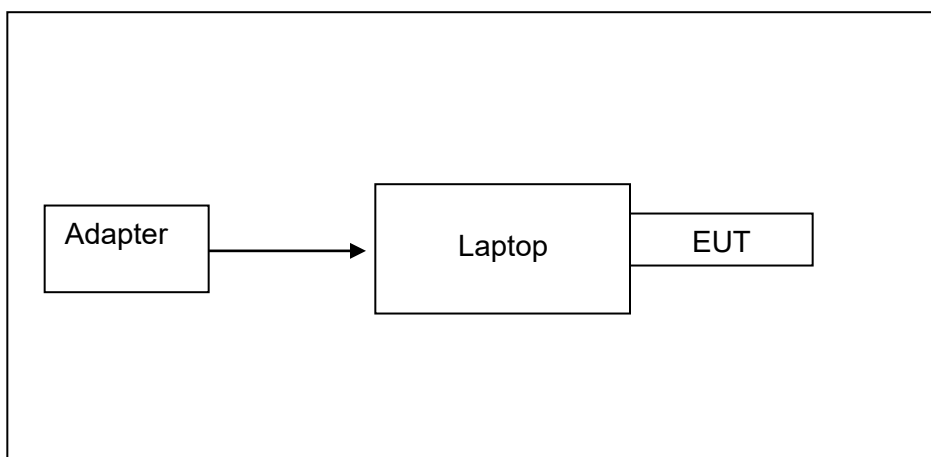



6. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Nov. 12, 2020	Nov. 11, 2021
Two-Line V-Network	R&S	ENV216	101983	Nov. 12, 2020	Nov. 11, 2021
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Nov. 12, 2020	Nov. 11, 2021
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Nov. 12, 2020	Nov. 11, 2021
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	April 24, 2020	April 23, 2023
Preamplifier	HP	8447D	2944A09099	Nov. 12, 2020	Nov. 11, 2021
EMI Measurement Receiver	R&S	ESR26	101377	Nov. 12, 2020	Nov. 11, 2021
Horn Antenna	TDK	HRN-0118	130940	Jul. 20, 2021	Jul. 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Nov. 20, 2020	Nov. 19, 2021
Horn Antenna	Schwarzbeck	BBHA9170	#697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Nov. 12, 2020	Nov. 11, 2021
Preamplifier	TDK	PA-02-3	TRS-308-00002	Nov. 12, 2020	Nov. 11, 2021
Loop antenna	Schwarzbeck	1519B	00008	Jan.17, 2019	Jan.17,2022
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Nov. 12, 2020	Nov. 11, 2021
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Nov. 20, 2020	Nov. 19, 2021
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Nov. 12, 2020	Nov. 11, 2021
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Nov. 12, 2020	Nov. 11, 2021



Software			
Description	Manufacturer	Name	Version
Test Software for Radiated Emissions	Farad	EZ-EMC	Ver. UL-3A1

Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Nov.20,2020	Nov.19,2021
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Nov.20,2020	Nov.19,2021
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Nov.20,2020	Nov.19,2021
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Nov.20,2020	Nov.19,2021
DC power supply	Keysight	E3642A	MY55159130	Nov.24,2020	Nov.23,2021
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		2.6.77.0518	

Other Instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Dual Channel Power Meter	Keysight	N1912A	MY55416024	Nov. 20, 2020	Nov. 19, 2021
Power Sensor	Keysight	USB Wideband Power Sensor	MY5100022	Nov. 20, 2020	Nov. 19, 2021



7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP

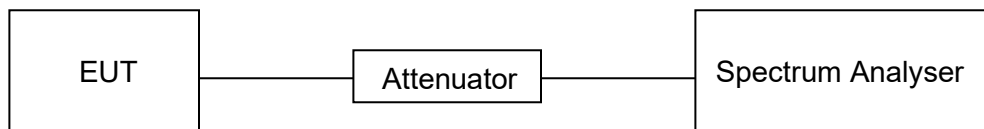

TEST ENVIRONMENT

Temperature	26 °C	Relative Humidity	60.1 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS

Please refer to appendix G.

7.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
C63.10 Clause 6.9.3	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

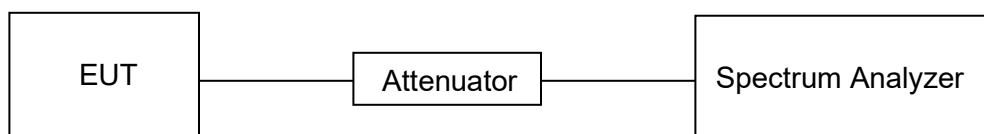

**TEST ENVIRONMENT**

Temperature	26 °C	Relative Humidity	60.1 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS

Please refer to appendix A & B.



7.3. CONDUCTED OUTPUT POWER


LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).
Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

TEST SETUP



TEST ENVIRONMENT

Temperature	26 °C	Relative Humidity	60.1 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS

Please refer to appendix C.

7.4. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm/3 kHz	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.10.8

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	PEAK
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 1/T$
Span	1.5 x DTS bandwidth
Number of points in sweep	$\geq [2 \times \text{span} / \text{RBW}]$.
Trace	Max hold
Sweep time	Auto couple

- 1) Allow max hold to run for at least 60 s or longer as needed to allow the trace to stabilize.
- 2) Use the peak marker function to determine the maximum PSD level.
- 3) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

TEST SETUP



**TEST ENVIRONMENT**

Temperature	26 °C	Relative Humidity	60.1 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS

Please refer to appendix D.



7.5. CONDUCTED BANDEGE AND SPURIOUS EMISSIONS

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

TEST SETUP

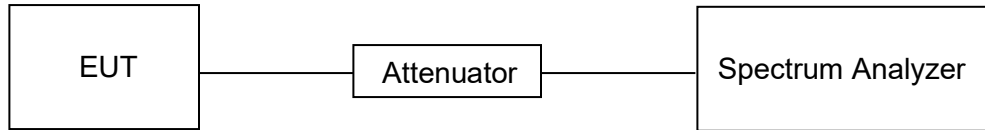**TEST ENVIRONMENT**

Temperature	26 °C	Relative Humidity	60.1 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS

Please refer to appendix E & F.



8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30



FCC Restricted bands of operation refer to FCC §15.205 (a):


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30 MHz

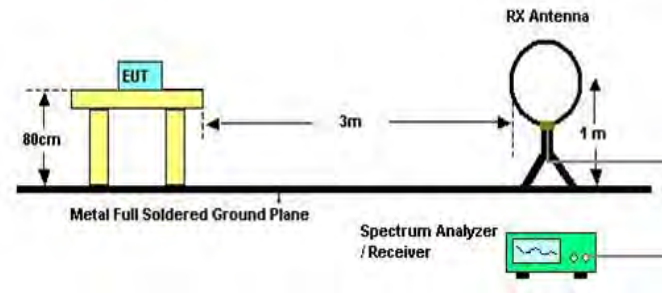


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

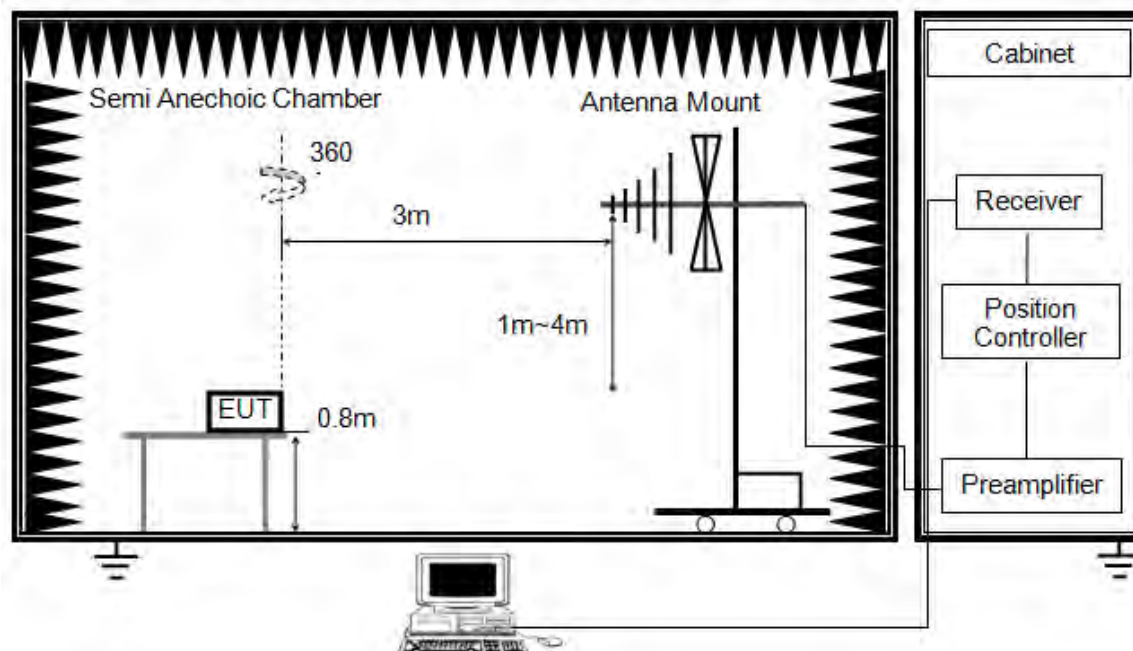


The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

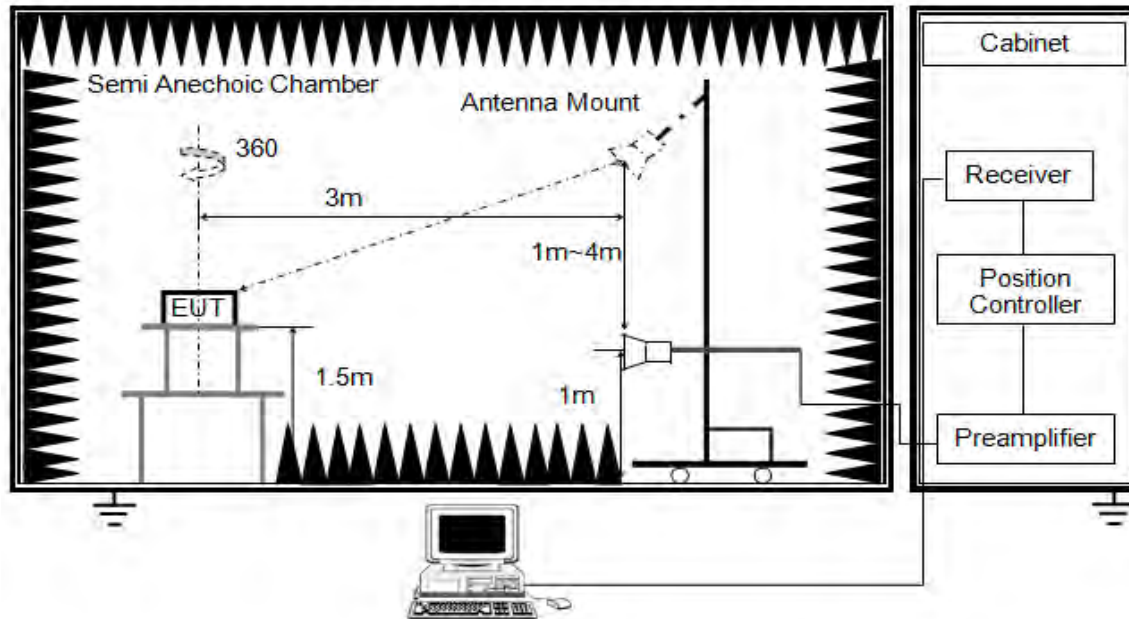


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

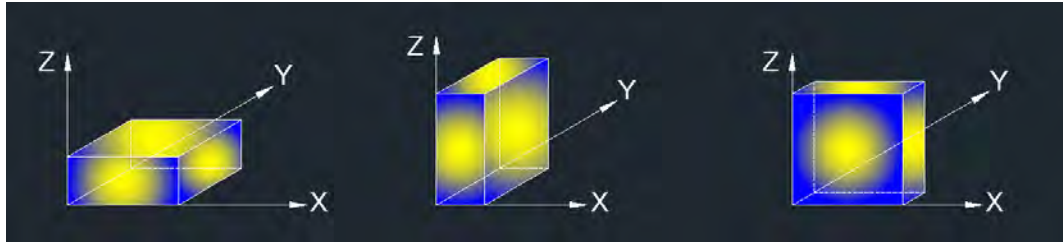

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

TEST ENVIRONMENT

Temperature	25.2 °C	Relative Humidity	45.5 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS


8.1. RESTRICTED BANDEDGE

8.1.1. 802.11b SISO MODE

ANTENNA 1 TEST RESULTS (WORST CASE)

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

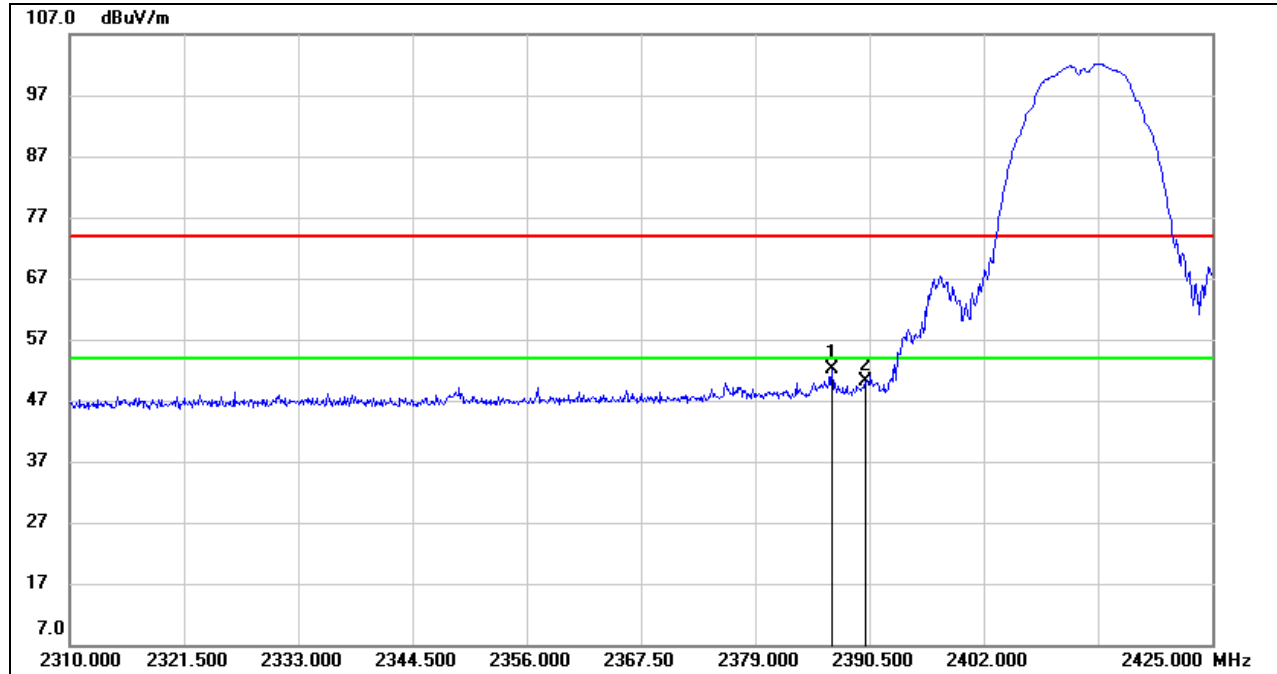


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.705	18.82	33.33	52.15	74.00	-21.85	peak
2	2390.000	16.76	33.35	50.11	74.00	-23.89	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

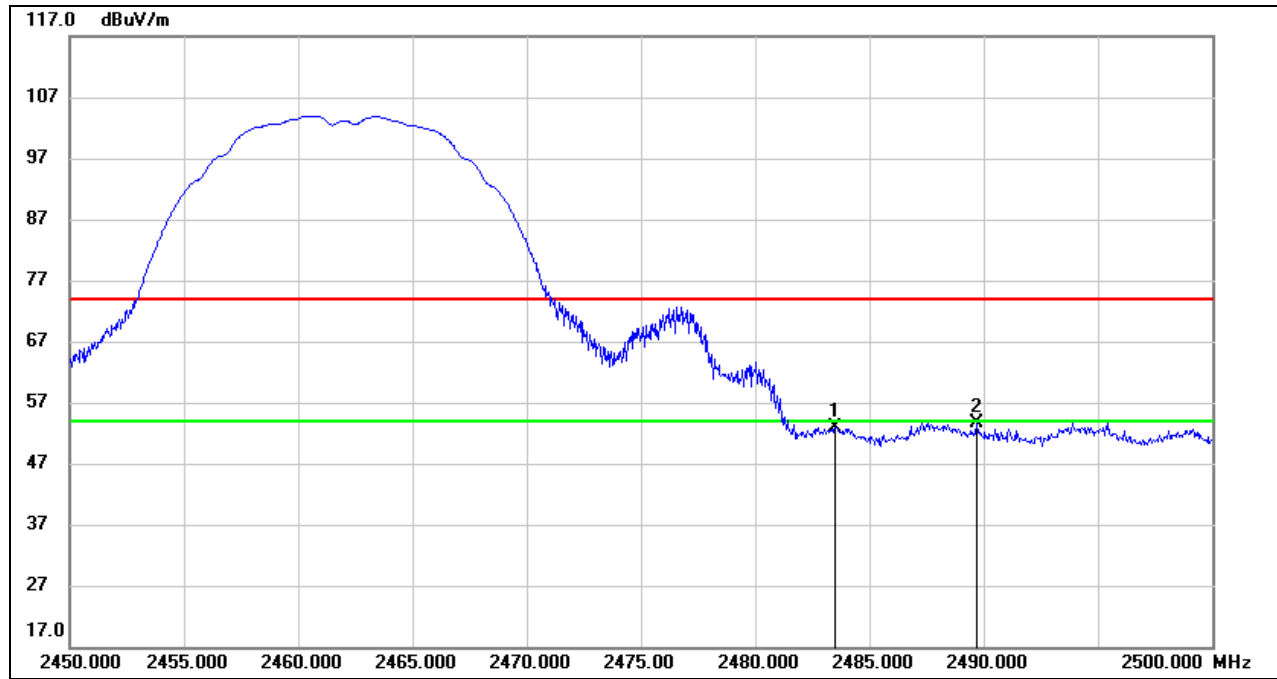**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.05	33.71	52.76	74.00	-21.24	peak
2	2489.700	19.98	33.72	53.70	74.00	-20.30	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

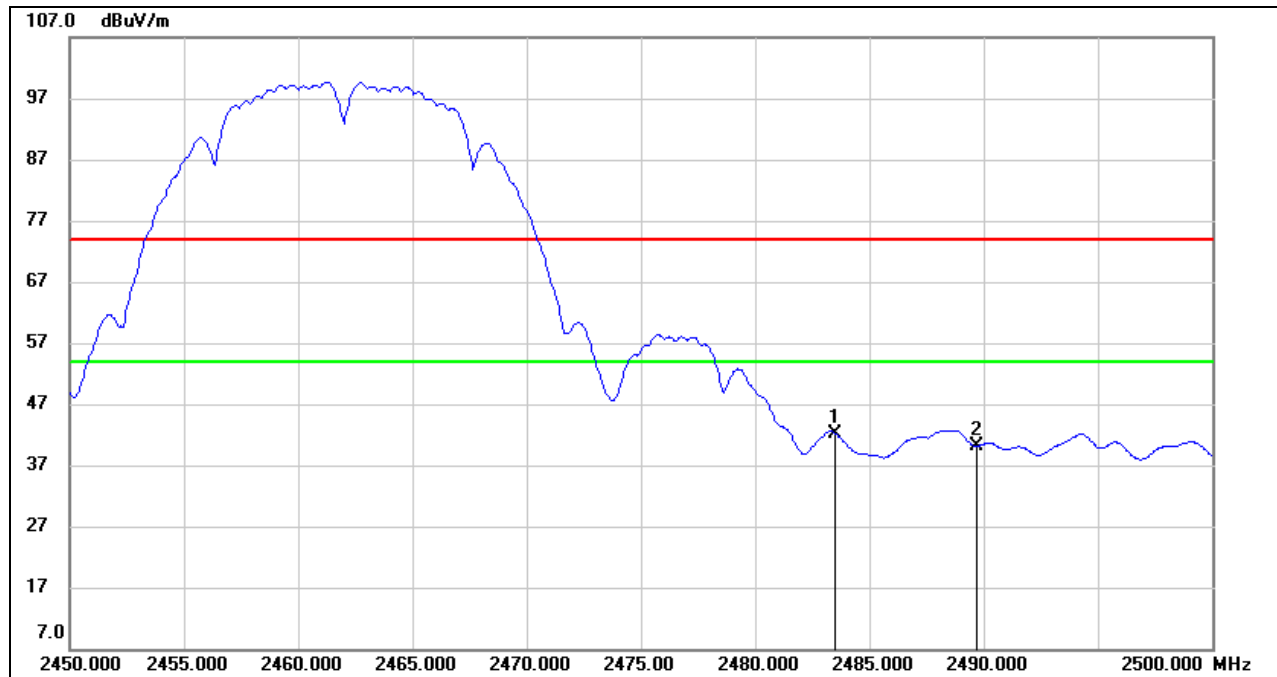

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	8.48	33.71	42.19	54.00	-11.81	AVG
2	2489.700	6.38	33.72	40.10	54.00	-13.90	AVG


Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.

Note: Both antennas have been tested, only the worst data was recorded in the report.

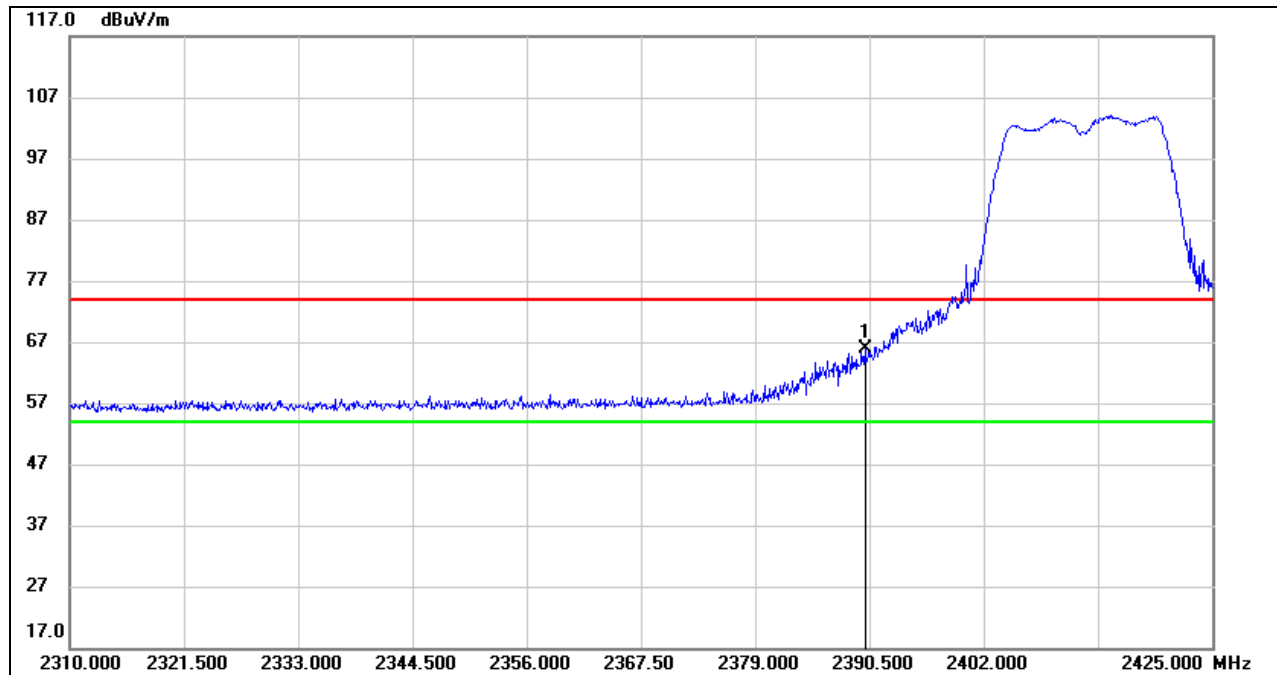**8.1.2. 802.11g SISO MODE****ANTENNA 1 TEST RESULTS (WORST CASE)****RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	32.43	33.35	65.78	74.00	-8.22	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.


3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

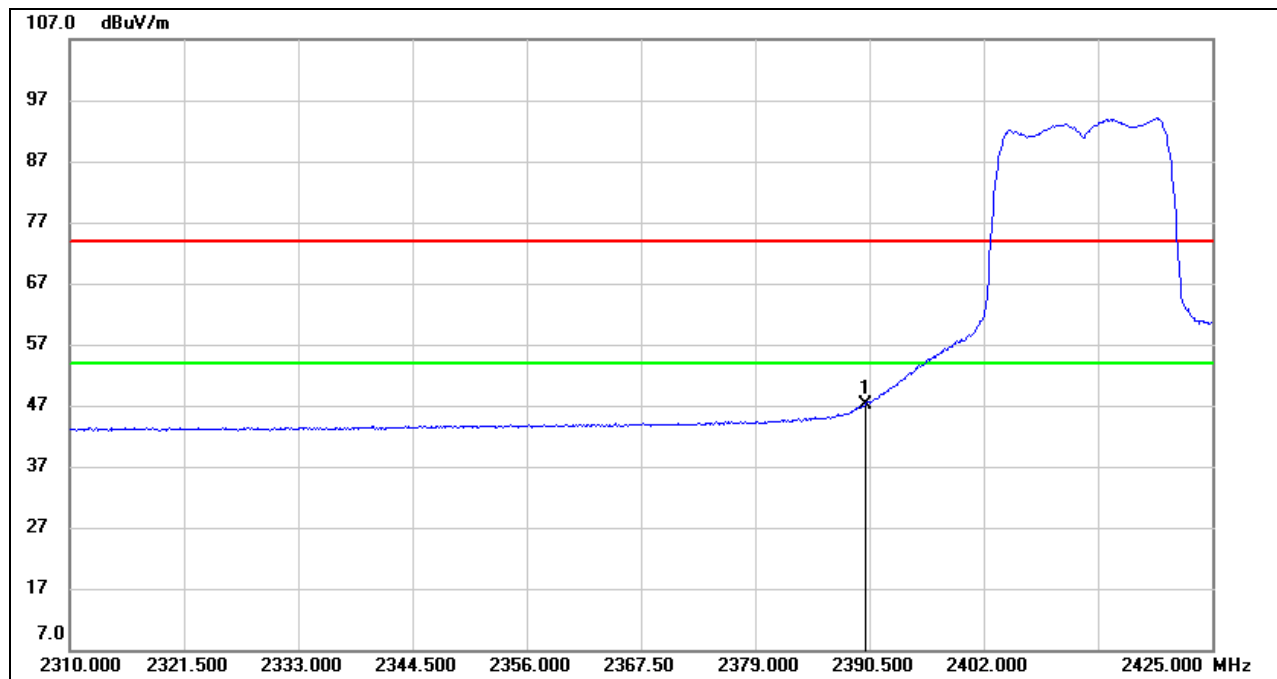

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	13.76	33.35	47.11	54.00	-6.89	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

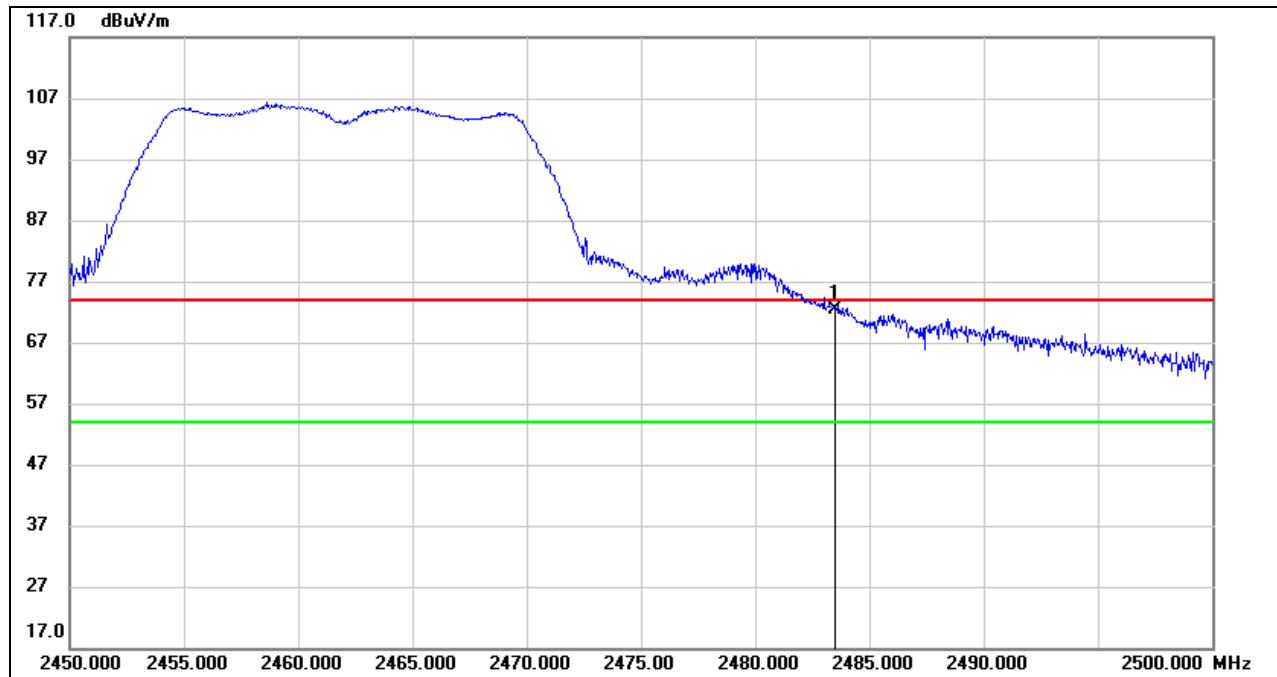
**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.71	33.71	72.42	74.00	-1.58	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

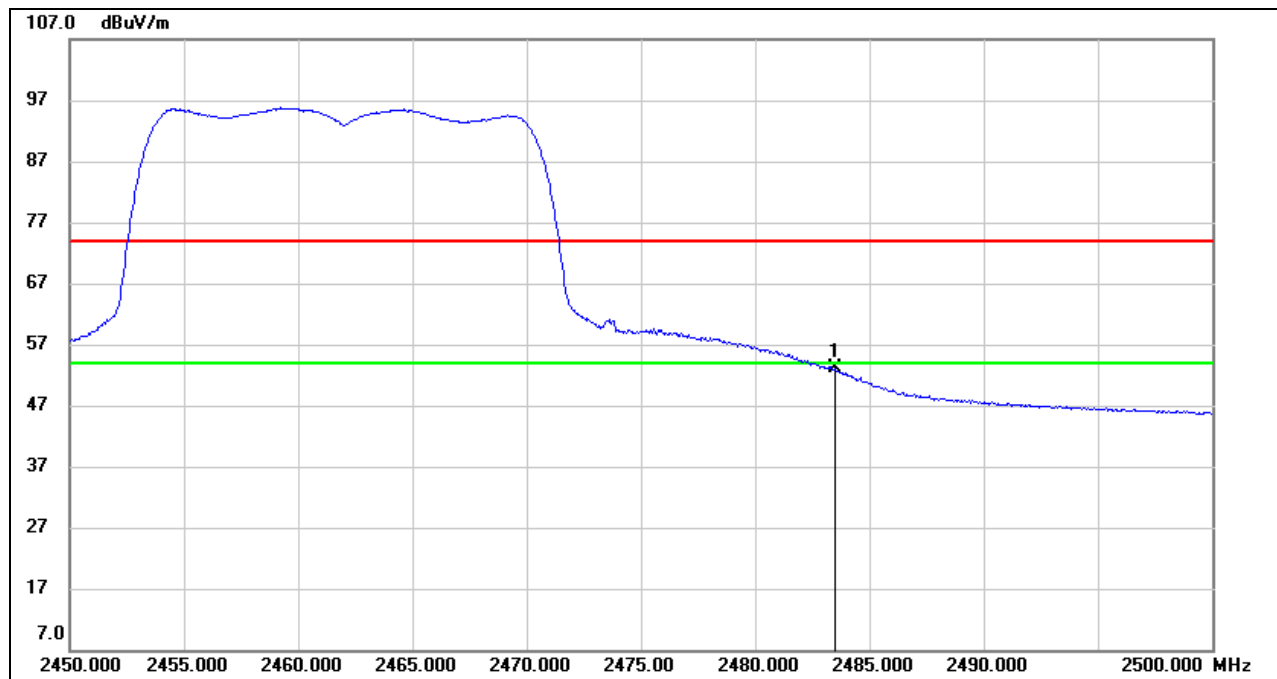**AVG**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.44	33.71	53.15	54.00	-0.85	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.

Note: Both antennas have been tested, only the worst data was recorded in the report.

8.1.3. 802.11n HT20 MIMO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

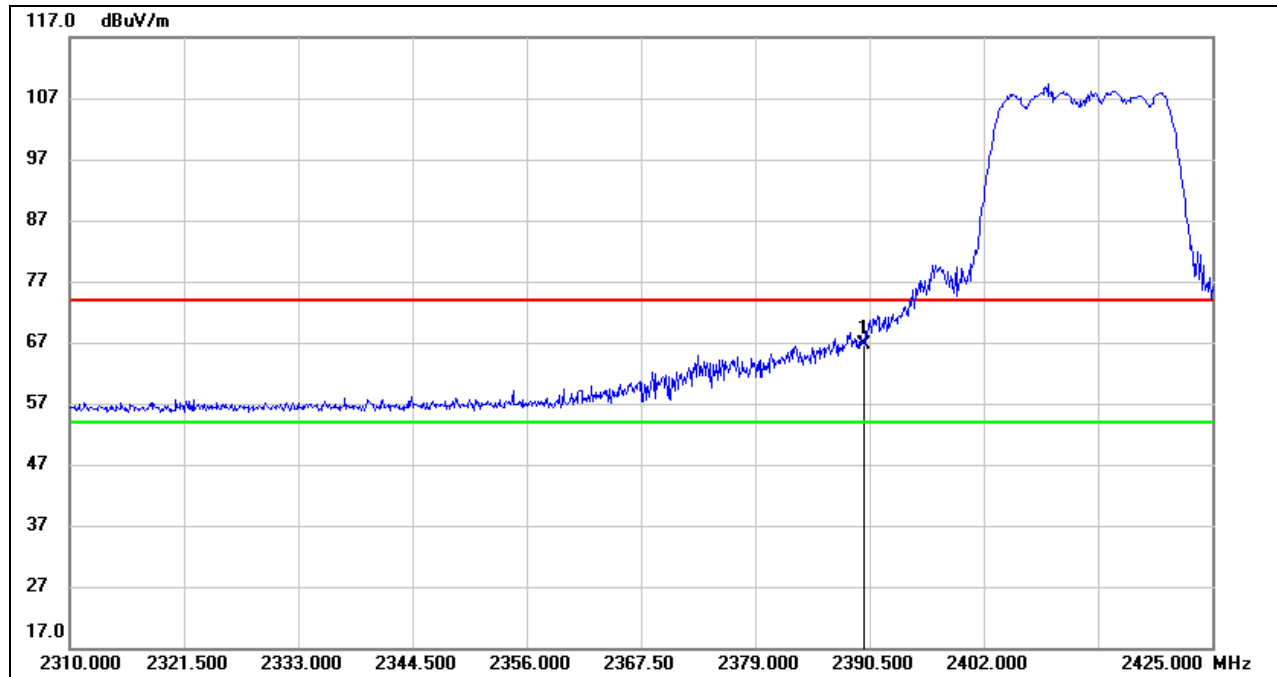


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	33.33	33.35	66.68	74.00	-7.32	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

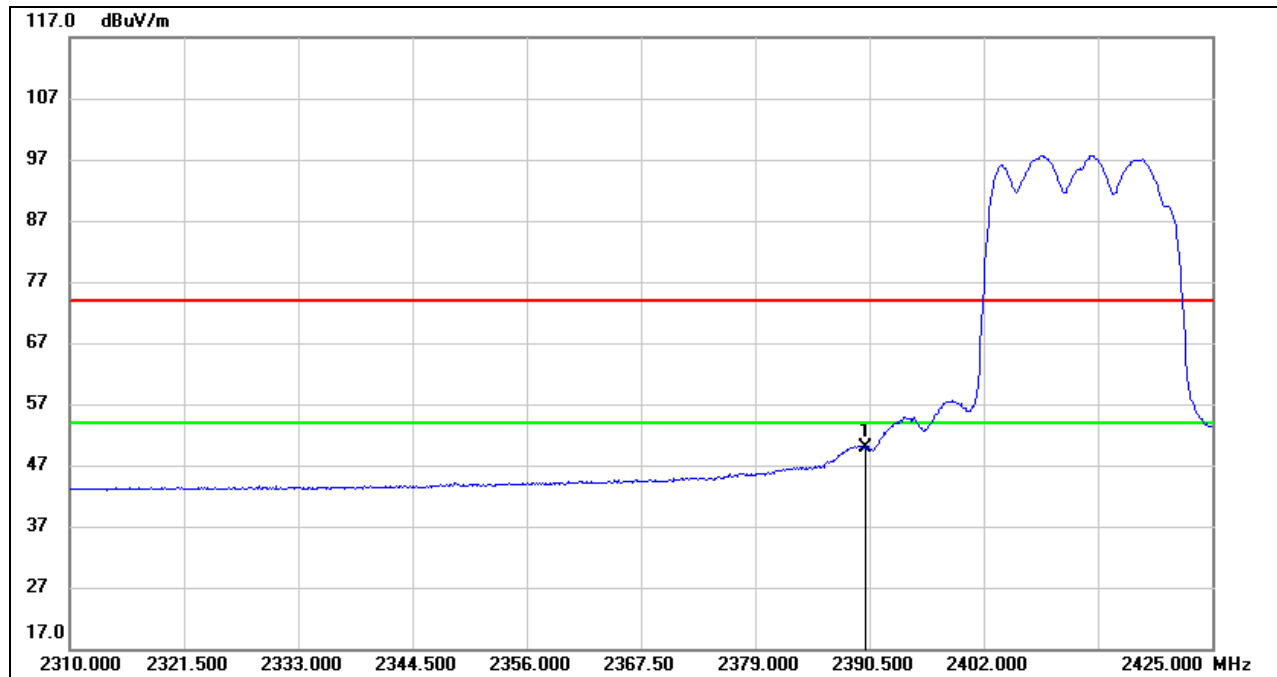


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	16.62	33.35	49.97	54.00	-4.03	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

PEAK

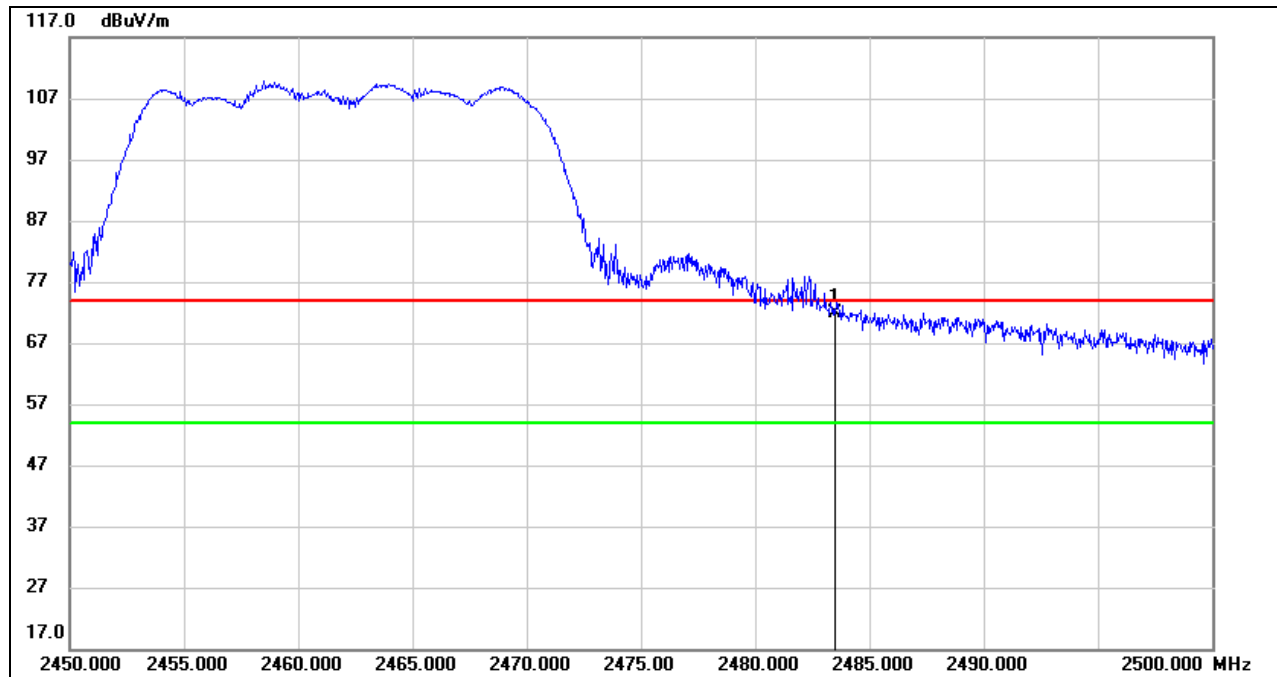


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.22	33.71	71.93	74.00	-2.07	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

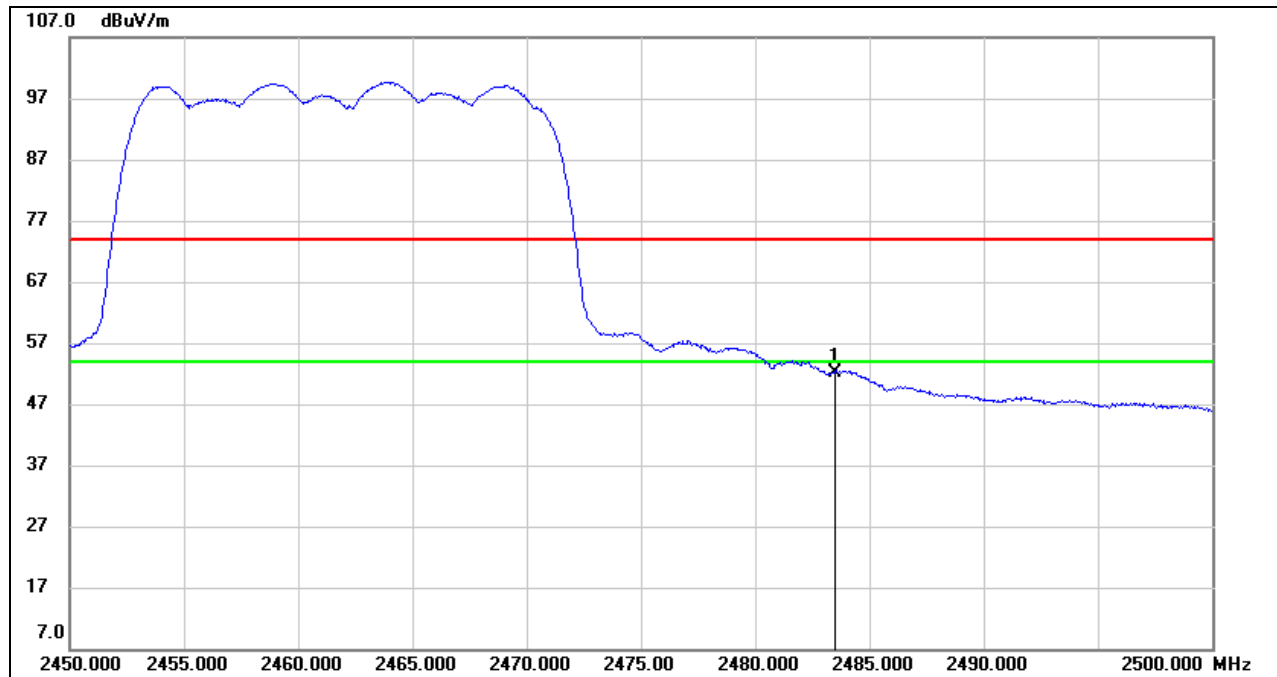

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.44	33.71	52.15	54.00	-1.85	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.

Note: All modes have been tested, only the worst data was recorded in the report.

8.1.4. 802.11n HT40 MIMO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

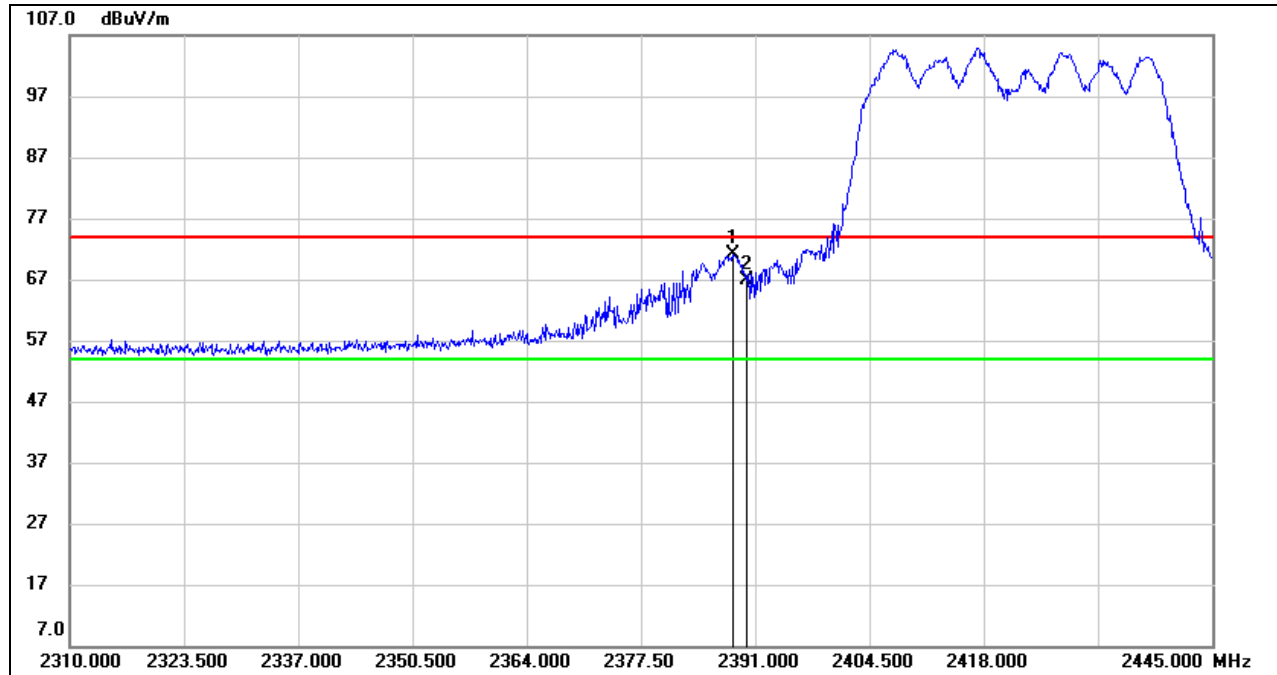


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.300	37.67	33.34	71.01	74.00	-2.99	peak
2	2390.000	33.43	33.35	66.78	74.00	-7.22	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

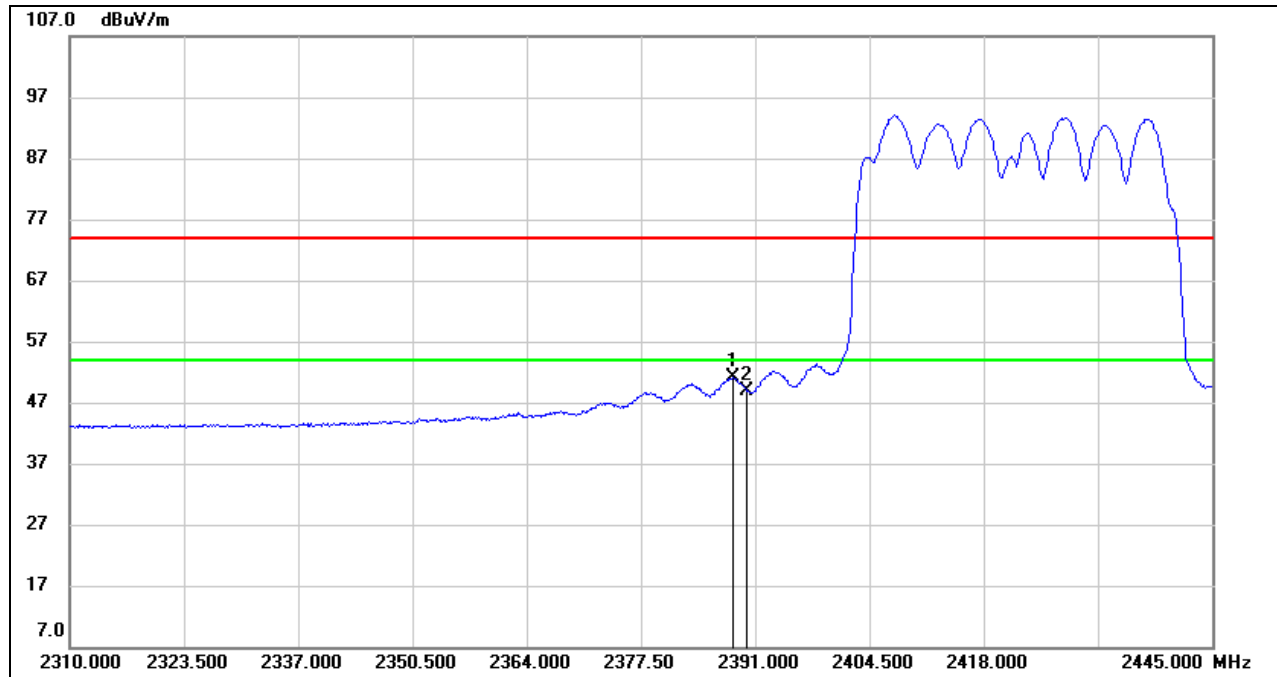

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.300	17.67	33.34	51.01	54.00	-2.99	AVG
2	2390.000	15.63	33.35	48.98	54.00	-5.02	AVG

Note: 1. Measurement = Reading Level + Correct Factor.


2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.

3. For the transmitting duration, please refer to clause 7.1.

4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

PEAK

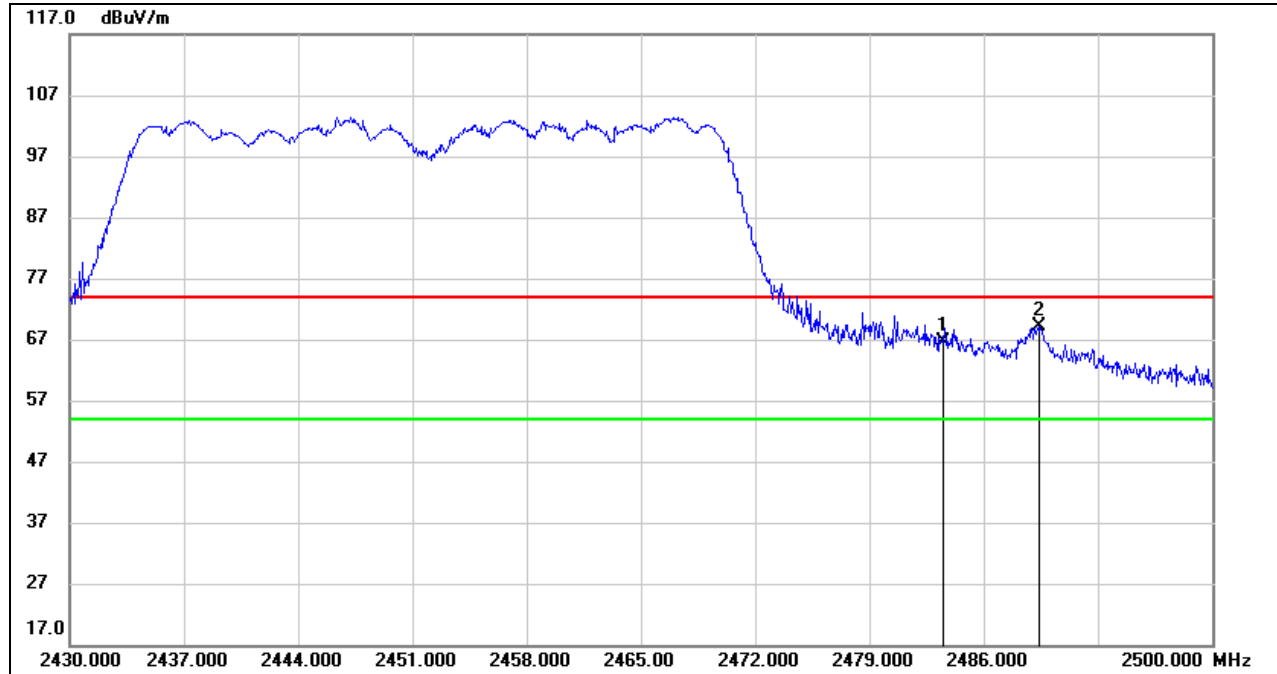


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	32.97	33.71	66.68	74.00	-7.32	peak
2	2489.430	35.36	33.72	69.08	74.00	-4.92	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

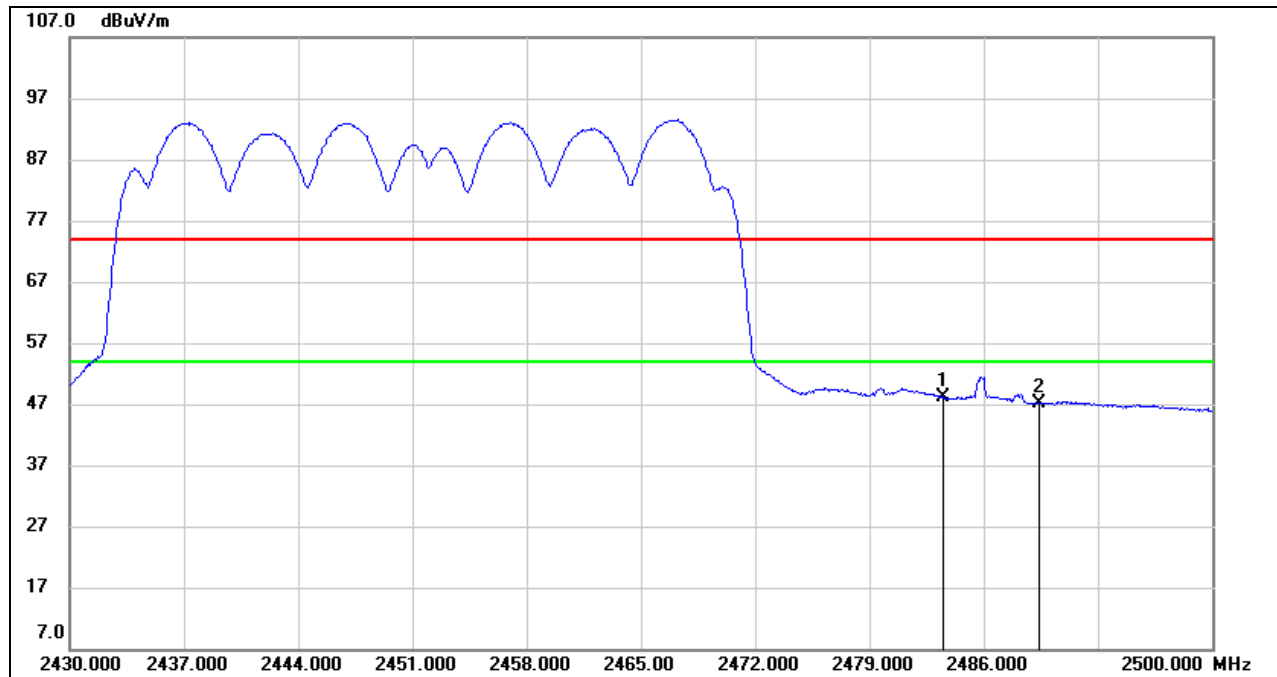

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	14.33	33.71	48.04	54.00	-5.96	AVG
2	2489.430	13.50	33.72	47.22	54.00	-6.78	AVG

Note: 1. Measurement = Reading Level + Correct Factor.

2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.

3. For the transmitting duration, please refer to clause 7.1.

4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.

Note: All modes have been tested, only the worst data was recorded in the report.




8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)

8.2.1. 802.11b SISO MODE

ANTENNA 1 TEST RESULTS (WORST CASE)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

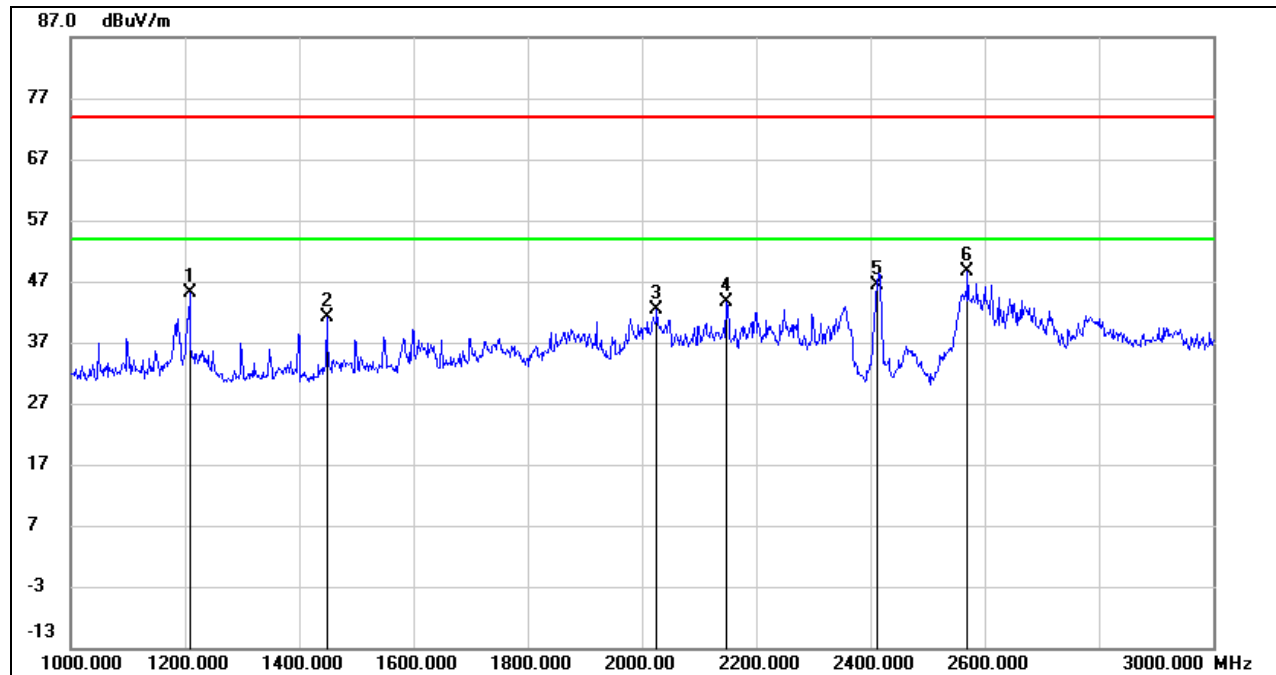


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1208.000	58.08	-12.98	45.10	74.00	-28.90	peak
2	1448.000	53.66	-12.47	41.19	74.00	-32.81	peak
3	2026.000	52.45	-10.03	42.42	74.00	-31.58	peak
4	2148.000	52.91	-9.34	43.57	74.00	-30.43	peak
5	2412.000	54.72	-8.37	46.35	/	/	Fundamental
6	2570.000	56.53	-7.97	48.56	74.00	-25.44	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

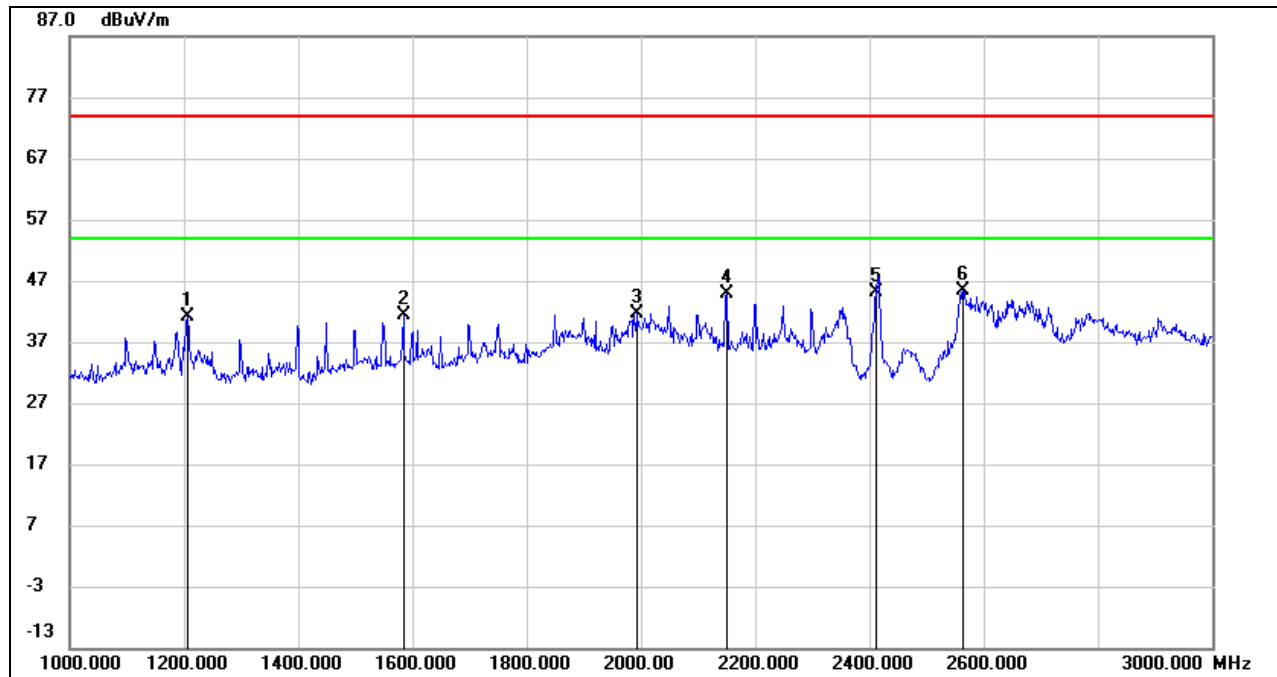
**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1206.000	54.21	-12.98	41.23	74.00	-32.77	peak
2	1584.000	52.99	-11.66	41.33	74.00	-32.67	peak
3	1994.000	51.93	-10.18	41.75	74.00	-32.25	peak
4	2150.000	54.12	-9.34	44.78	74.00	-29.22	peak
5	2412.000	53.54	-8.37	45.17	/	/	Fundamental
6	2564.000	53.34	-7.99	45.35	74.00	-28.65	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

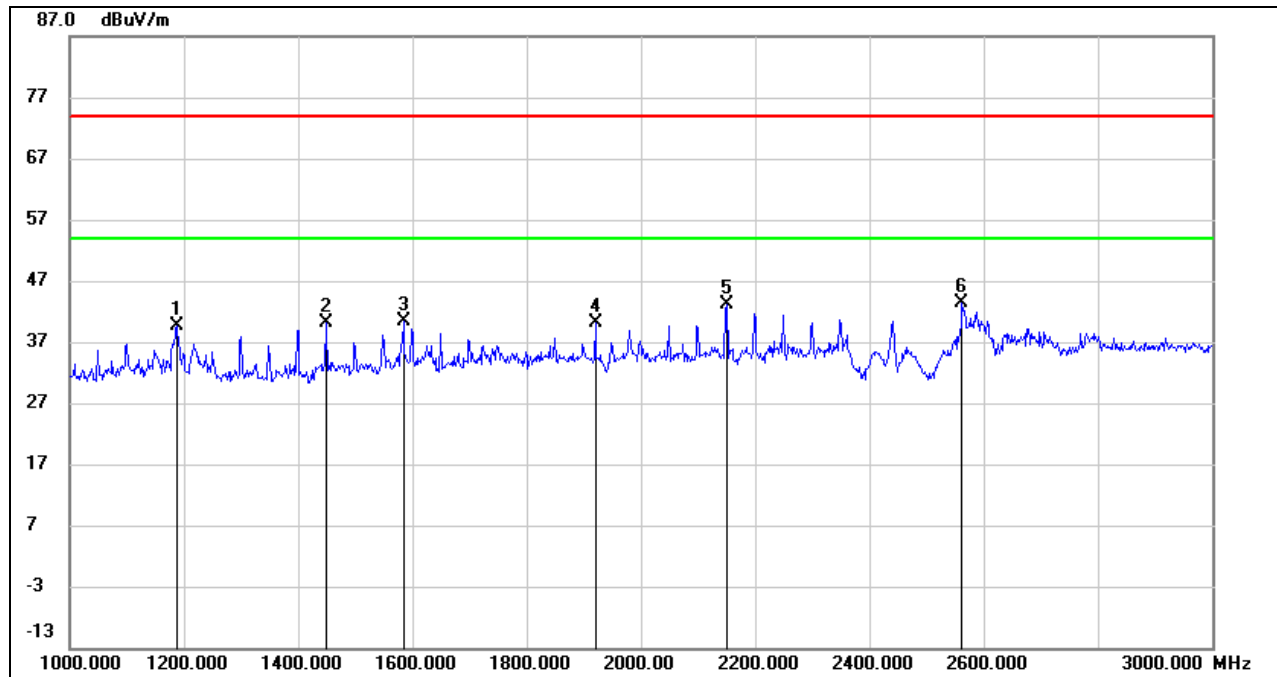
**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1188.000	52.78	-13.05	39.73	74.00	-34.27	peak
2	1448.000	52.58	-12.47	40.11	74.00	-33.89	peak
3	1584.000	51.96	-11.66	40.30	74.00	-33.70	peak
4	1920.000	50.30	-10.13	40.17	74.00	-33.83	peak
5	2150.000	52.35	-9.34	43.01	74.00	-30.99	peak
6	2562.000	51.46	-8.00	43.46	74.00	-30.54	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

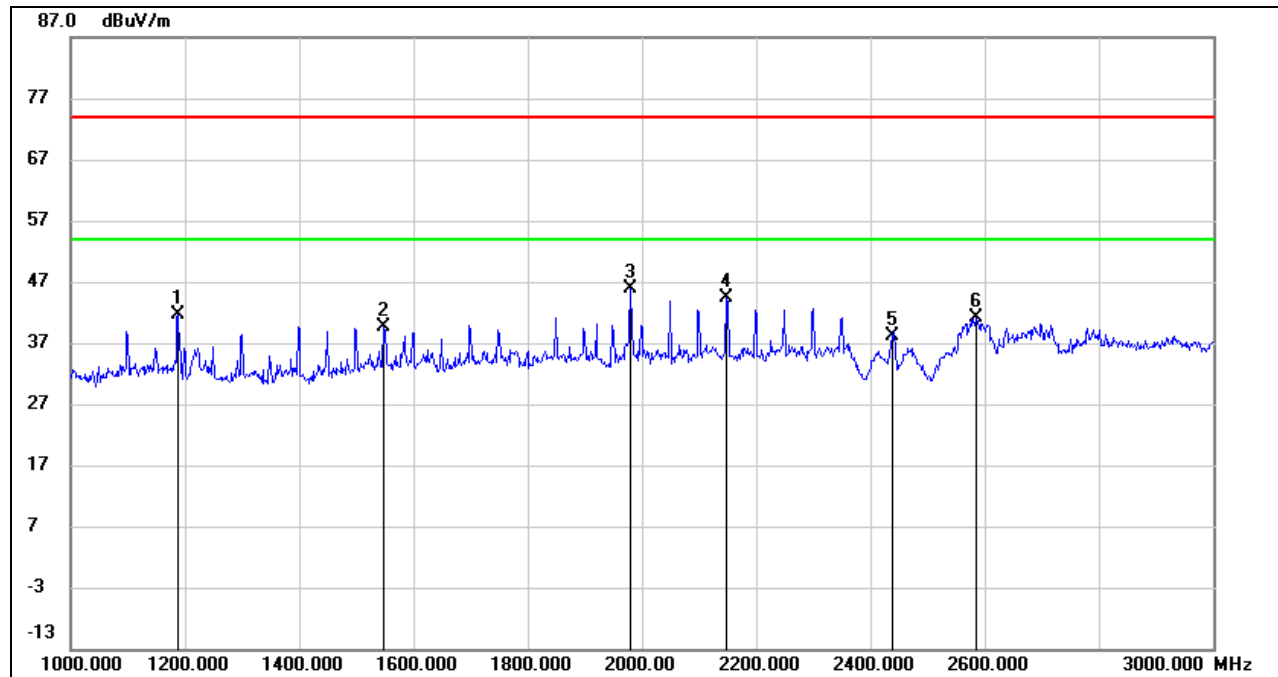**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1188.000	54.64	-13.05	41.59	74.00	-32.41	peak
2	1548.000	51.62	-11.91	39.71	74.00	-34.29	peak
3	1980.000	56.01	-10.18	45.83	74.00	-28.17	peak
4	2148.000	53.67	-9.34	44.33	74.00	-29.67	peak
5	2437.000	46.36	-8.33	38.03	/	/	Fundamental
6	2586.000	49.14	-7.92	41.22	74.00	-32.78	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

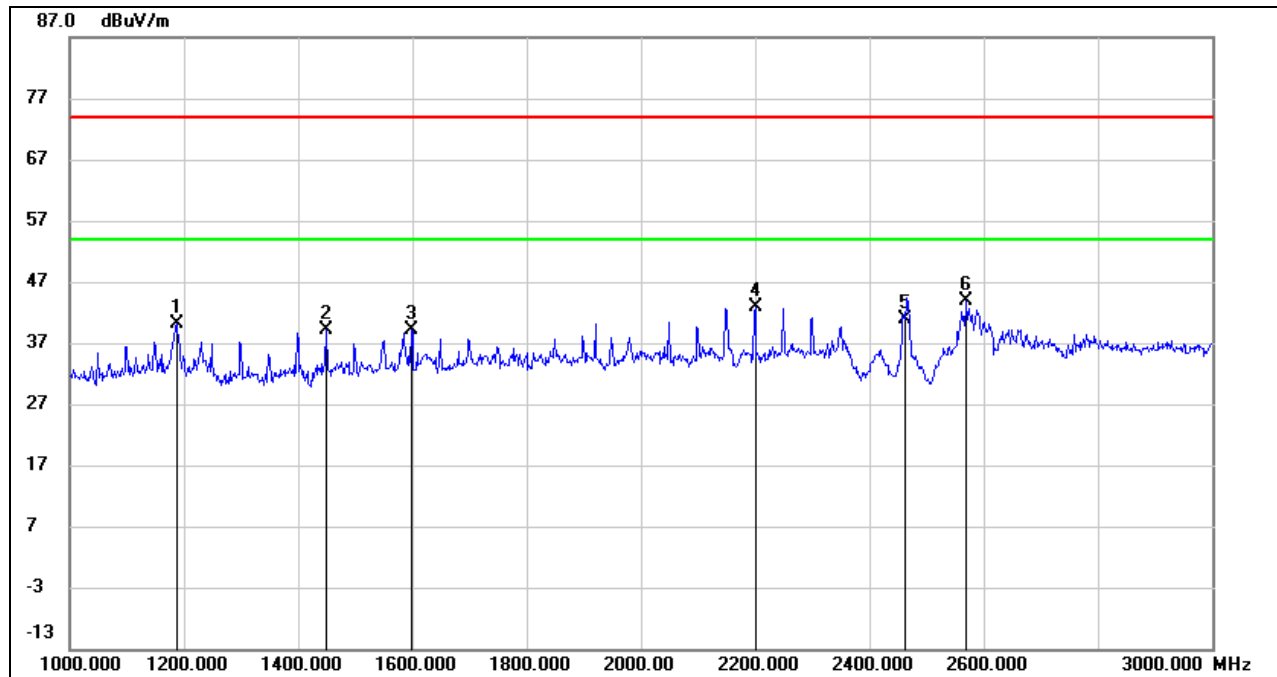


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1188.000	53.21	-13.05	40.16	74.00	-33.84	peak
2	1448.000	51.63	-12.47	39.16	74.00	-34.84	peak
3	1598.000	50.75	-11.58	39.17	74.00	-34.83	peak
4	2200.000	51.93	-9.05	42.88	74.00	-31.12	peak
5	2462.000	49.14	-8.29	40.85	/	/	Fundamental
6	2570.000	51.75	-7.97	43.78	74.00	-30.22	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

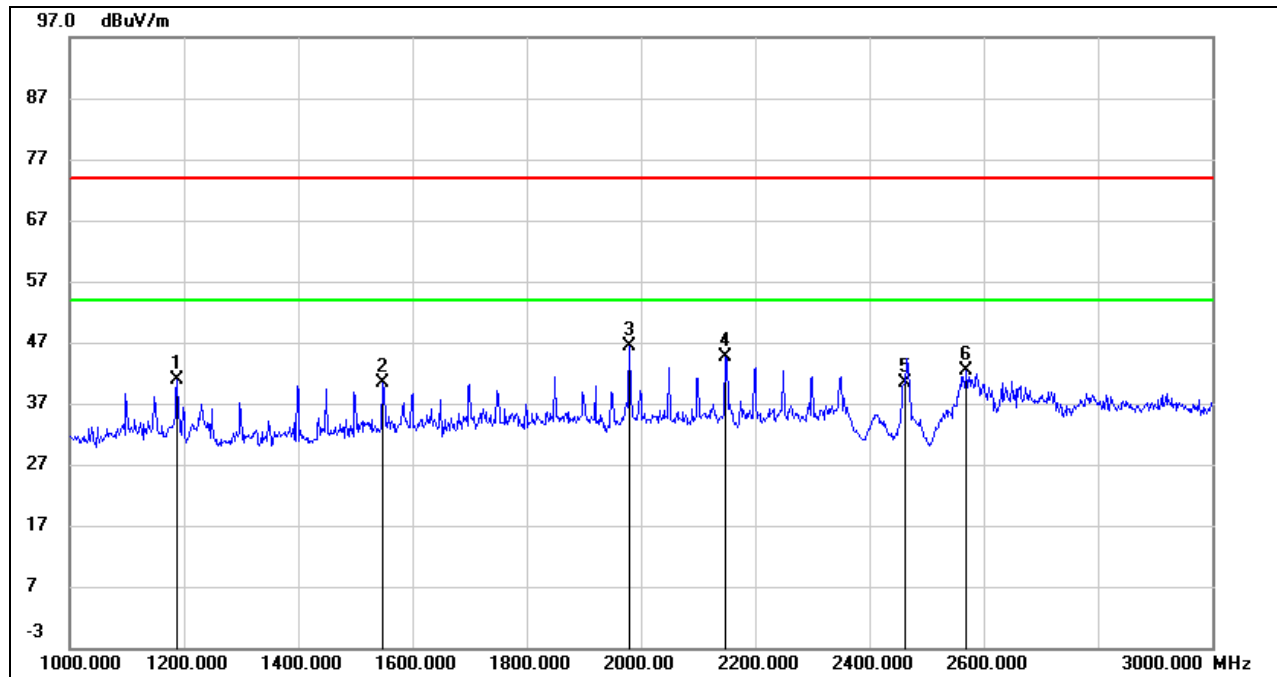**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1188.000	53.84	-13.05	40.79	74.00	-33.21	peak
2	1548.000	52.25	-11.91	40.34	74.00	-33.66	peak
3	1980.000	56.44	-10.18	46.26	74.00	-27.74	peak
4	2148.000	53.89	-9.34	44.55	74.00	-29.45	peak
5	2462.000	48.75	-8.29	40.46	/	/	Fundamental
6	2570.000	50.44	-7.97	42.47	74.00	-31.53	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

Note: Both the two antennas had been tested, but only the worst data was recorded in the report.


Note: All modes, channels and antenna have been tested, only the worst data was recorded in the report.

8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)

8.3.1. 802.11b SISO MODE

ANTENNA 1 TEST RESULTS (WORST CASE)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

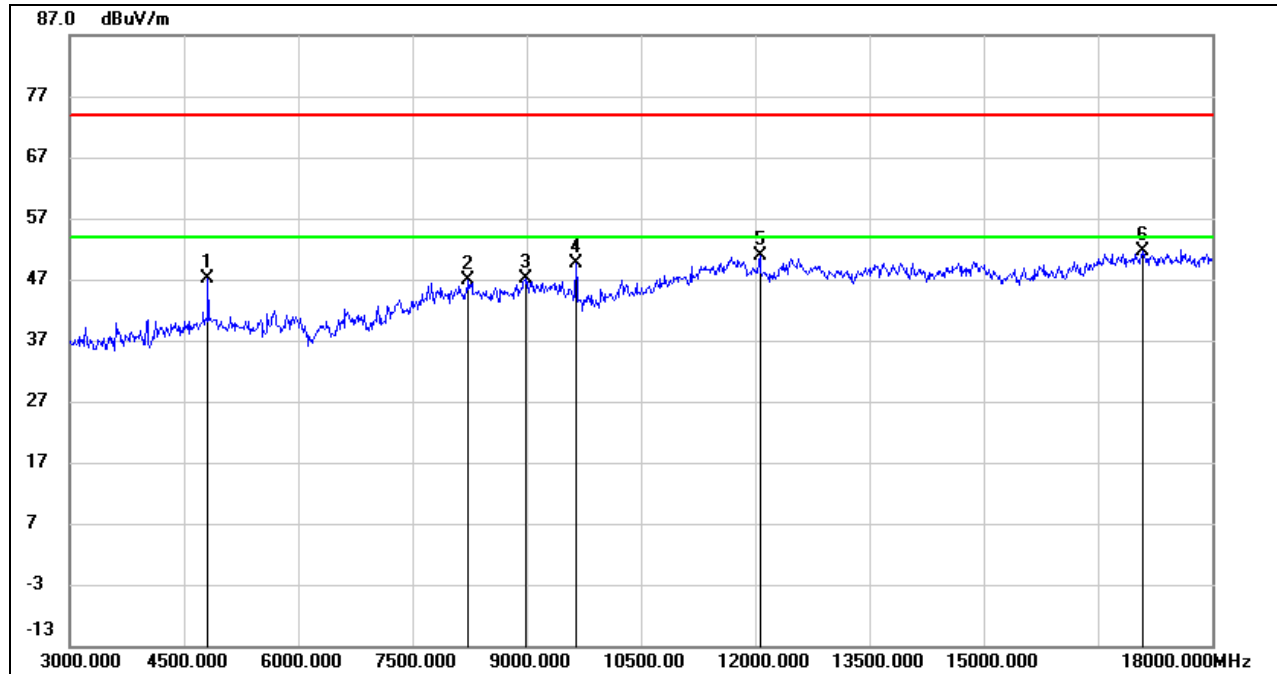

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	46.40	0.62	47.02	74.00	-26.98	peak
2	8238.500	37.63	9.21	46.84	74.00	-27.16	peak
3	8996.000	36.42	10.59	47.01	74.00	-26.99	peak
4	9648.500	39.17	10.35	49.52	74.00	-24.48	peak
5	12060.000	35.66	15.25	50.91	74.00	-23.09	peak
6	17090.500	31.13	20.59	51.72	74.00	-22.28	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.

5. For the transmitting duration, please refer to clause 7.1.

6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

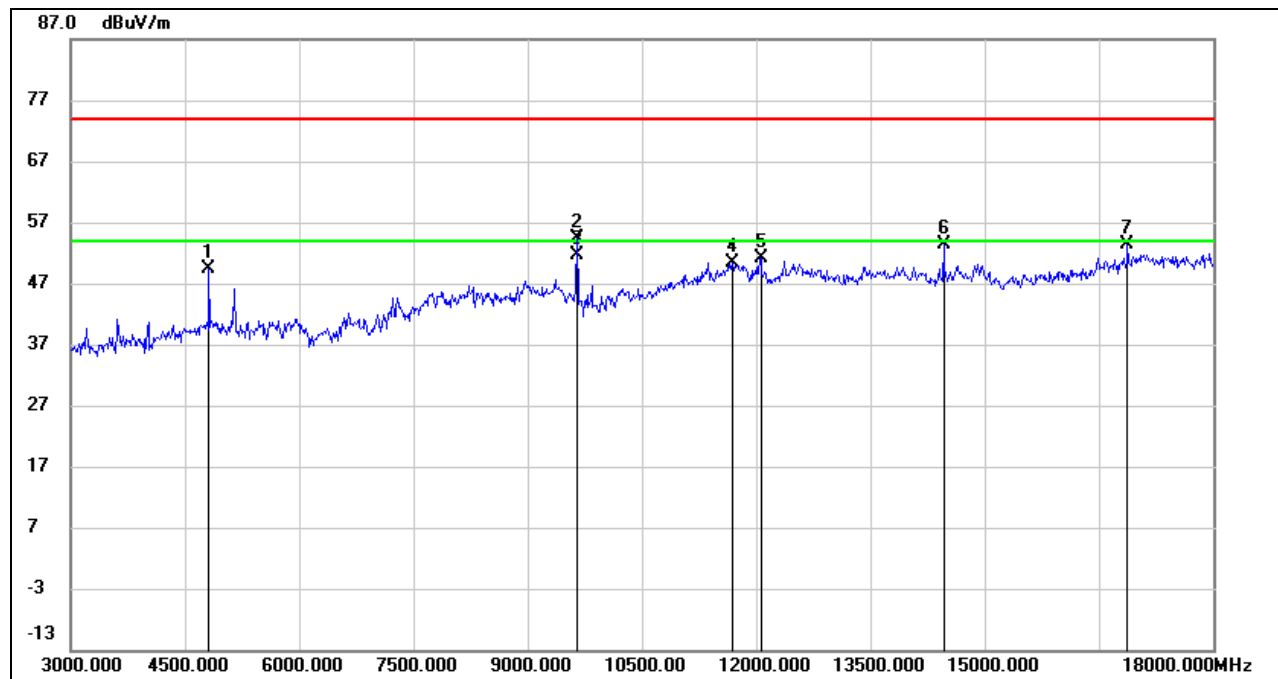**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	48.81	0.62	49.43	74.00	-24.57	peak
2	9648.000	43.94	10.35	54.29	74.00	-19.71	peak
3	9648.000	41.30	10.35	51.65	54.00	-2.35	AVG
4	11689.000	35.50	15.00	50.50	74.00	-23.50	peak
5	12064.000	35.97	15.25	51.22	74.00	-22.78	peak
6	14472.500	36.68	16.73	53.41	74.00	-20.59	peak
7	16883.500	33.51	19.94	53.45	74.00	-20.55	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

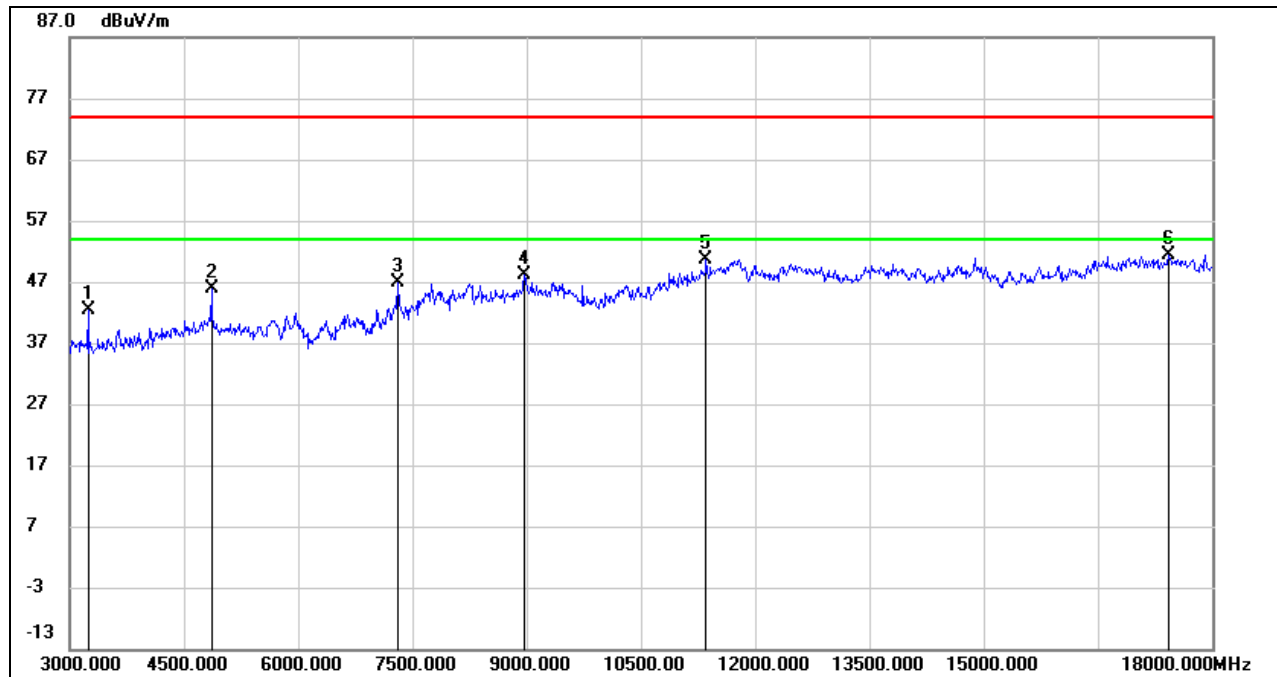

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3249.500	47.61	-5.22	42.39	74.00	-31.61	peak
2	4874.000	45.14	0.70	45.84	74.00	-28.16	peak
3	7312.500	39.37	7.41	46.78	74.00	-27.22	peak
4	8984.000	37.58	10.46	48.04	74.00	-25.96	peak
5	11361.500	36.55	14.10	50.65	74.00	-23.35	peak
6	17438.500	30.71	20.77	51.48	74.00	-22.52	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

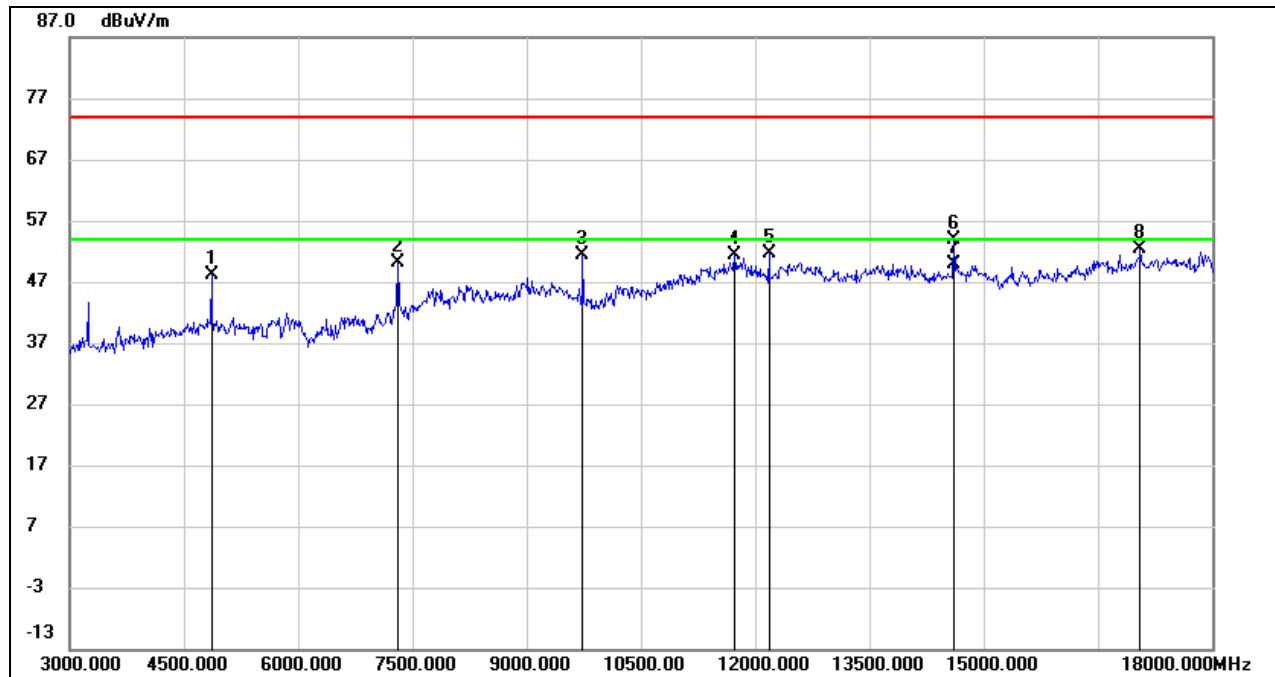**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	47.52	0.70	48.22	74.00	-25.78	peak
2	7310.000	42.82	7.40	50.22	74.00	-23.78	peak
3	9748.000	41.20	10.09	51.29	74.00	-22.71	peak
4	11739.500	36.11	15.28	51.39	74.00	-22.61	peak
5	12187.500	36.62	15.12	51.74	74.00	-22.26	peak
6	14622.500	37.46	16.51	53.97	74.00	-20.03	peak
7	14622.500	33.46	16.51	49.97	54.00	-4.03	AVG
8	17059.500	31.79	20.47	52.26	74.00	-21.74	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

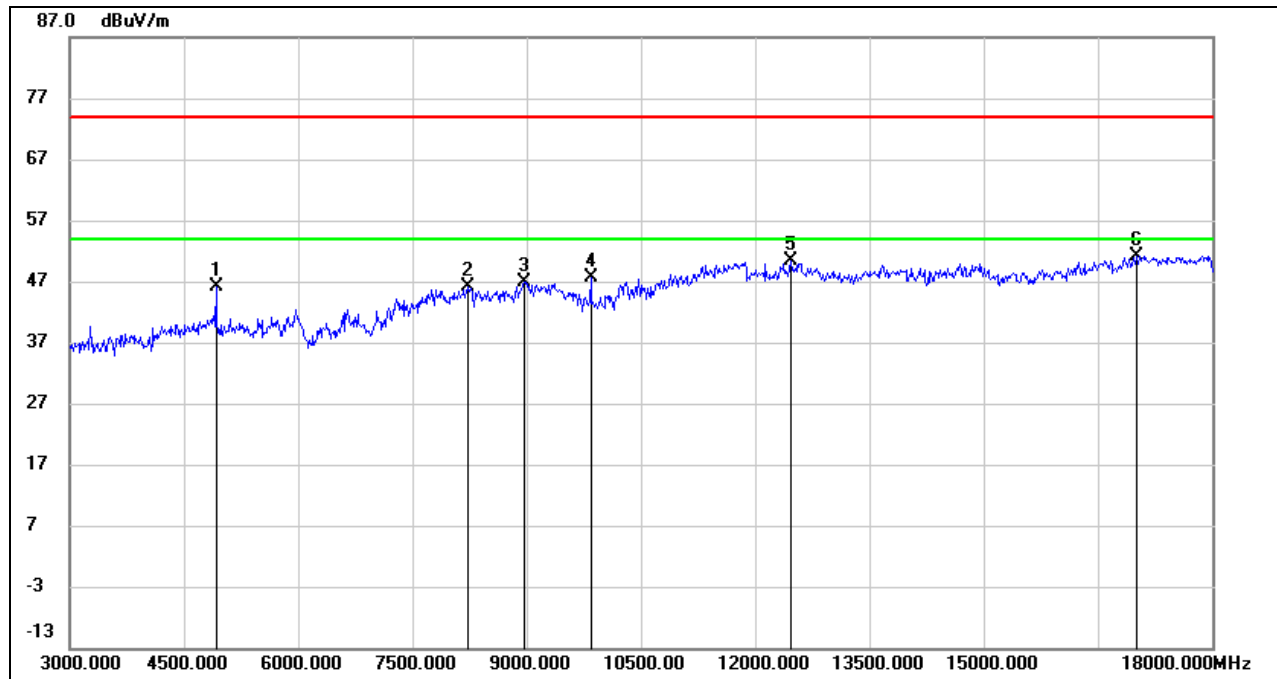

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	45.30	0.78	46.08	74.00	-27.92	peak
2	8234.500	36.80	9.22	46.02	74.00	-27.98	peak
3	8973.000	36.61	10.35	46.96	74.00	-27.04	peak
4	9848.500	37.65	10.02	47.67	74.00	-26.33	peak
5	12468.000	35.07	15.41	50.48	74.00	-23.52	peak
6	17016.500	30.94	20.29	51.23	74.00	-22.77	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

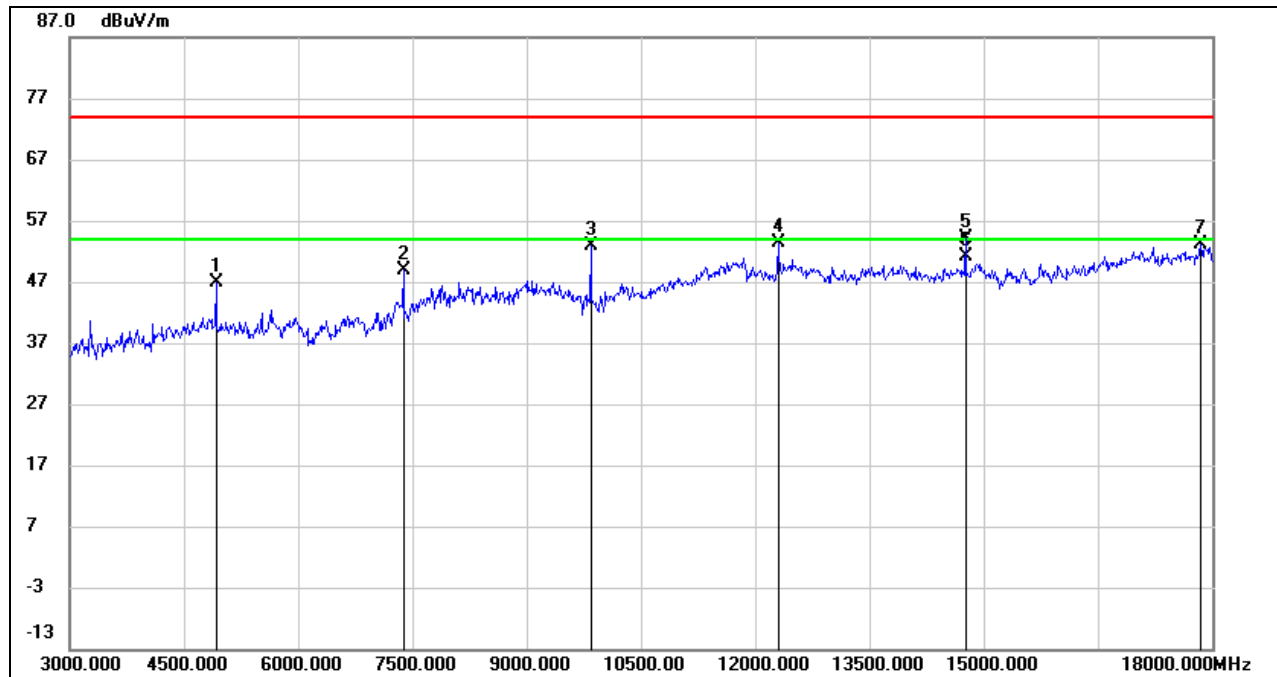**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	46.10	0.78	46.88	74.00	-27.12	peak
2	7384.000	41.19	7.68	48.87	74.00	-25.13	peak
3	9848.500	42.84	10.02	52.86	74.00	-21.14	peak
4	12311.500	38.16	15.33	53.49	74.00	-20.51	peak
5	14772.500	37.46	16.76	54.22	74.00	-19.78	peak
6	14772.500	34.36	16.76	51.12	54.00	-2.88	AVG
7	17858.500	30.32	22.71	53.03	74.00	-20.97	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: Both the two antennas had been tested, but only the worst data was recorded in the report.

8.3.2. 802.11g SISO MODE

ANTENNA 1 TEST RESULTS (WORST CASE)


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

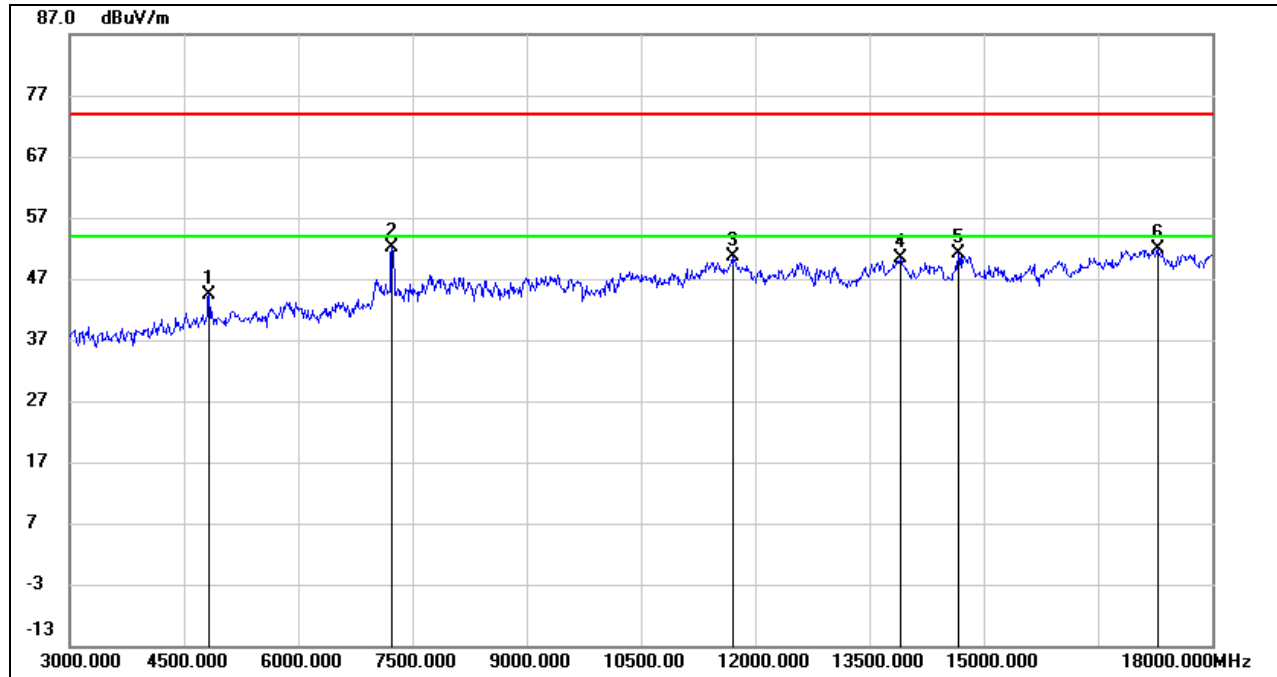

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	43.03	1.37	44.40	74.00	-29.60	peak
2	7230.000	44.82	7.28	52.10	74.00	-21.90	peak
3	11700.000	35.26	15.35	50.61	74.00	-23.39	peak
4	13905.000	32.72	17.54	50.26	74.00	-23.74	peak
5	14670.000	33.55	17.59	51.14	74.00	-22.86	peak
6	17280.000	29.44	22.48	51.92	74.00	-22.08	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

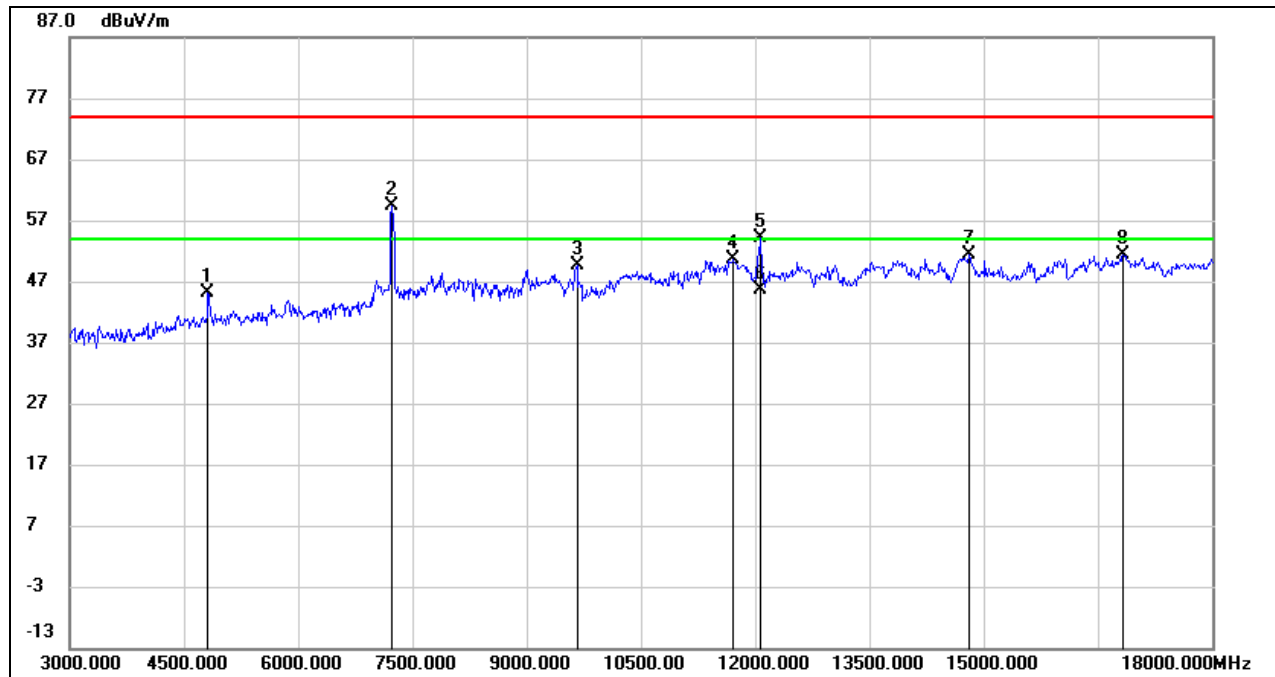

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	43.65	1.38	45.03	74.00	-28.97	peak
2	7230.000	52.07	7.28	59.35	74.00	-14.65	peak
3	9660.000	38.85	10.74	49.59	74.00	-24.41	peak
4	11715.000	35.18	15.34	50.52	74.00	-23.48	peak
5	12075.000	38.68	15.41	54.09	74.00	-19.91	peak
6	12075.000	30.14	15.41	45.55	54.00	-8.45	AVG
7	14805.000	33.28	18.00	51.28	74.00	-22.72	peak
8	16830.000	30.40	20.97	51.37	74.00	-22.63	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

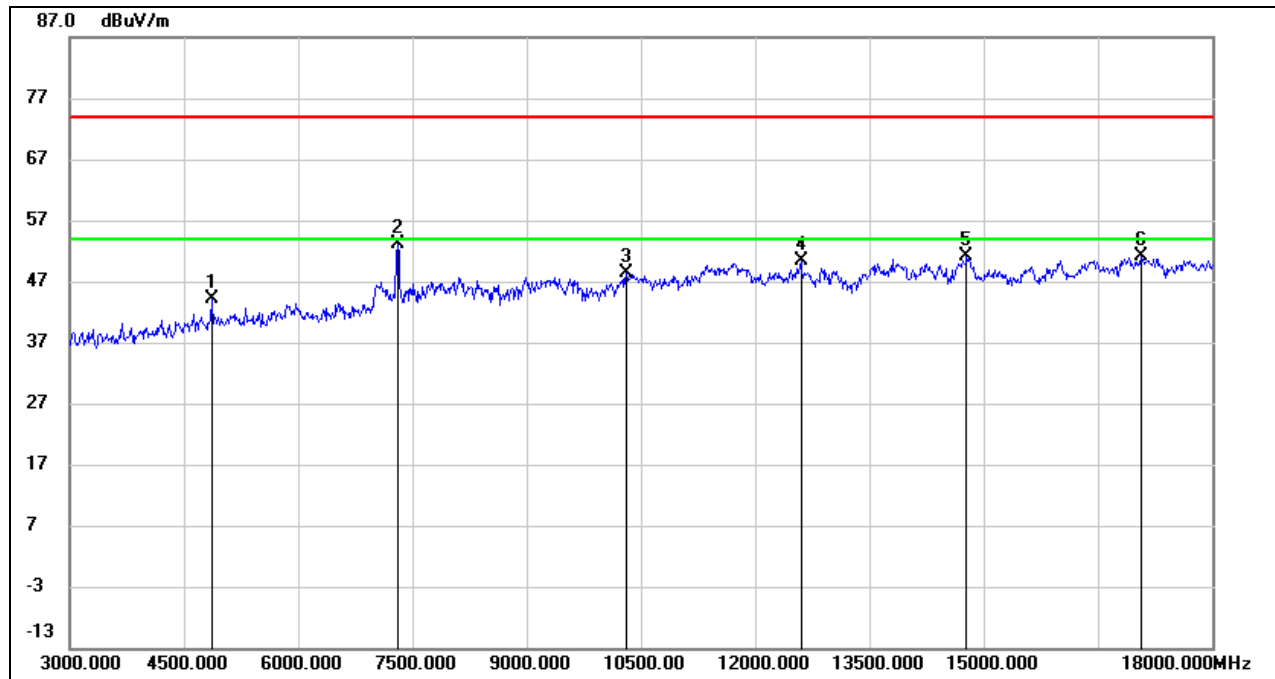**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	42.86	1.33	44.19	74.00	-29.81	peak
2	7305.000	46.11	7.14	53.25	74.00	-20.75	peak
3	10305.000	36.61	11.83	48.44	74.00	-25.56	peak
4	12600.000	34.54	15.78	50.32	74.00	-23.68	peak
5	14775.000	33.24	17.95	51.19	74.00	-22.81	peak
6	17070.000	29.36	21.71	51.07	74.00	-22.93	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

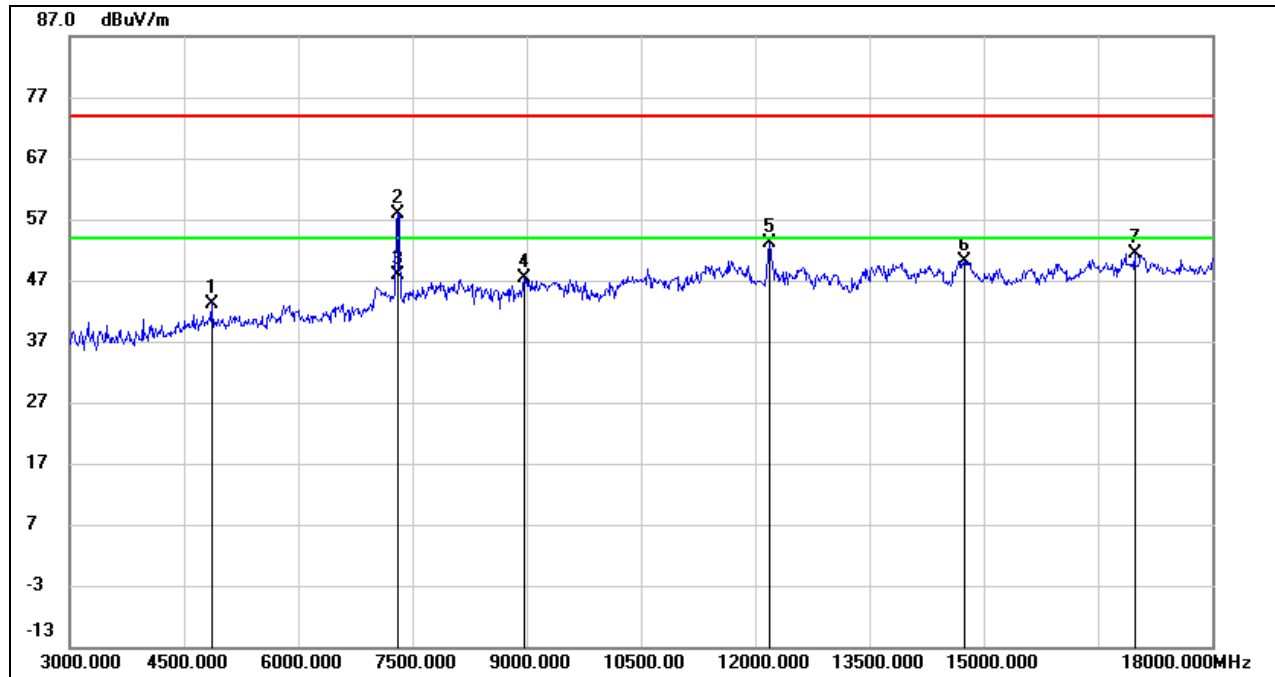**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	41.92	1.33	43.25	74.00	-30.75	peak
2	7305.000	50.82	7.14	57.96	74.00	-16.04	peak
3	7305.000	40.72	7.14	47.86	54.00	-6.14	AVG
4	8970.000	36.63	10.70	47.33	74.00	-26.67	peak
5	12195.000	37.10	15.93	53.03	74.00	-20.97	peak
6	14745.000	32.31	17.84	50.15	74.00	-23.85	peak
7	16980.000	30.18	21.30	51.48	74.00	-22.52	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

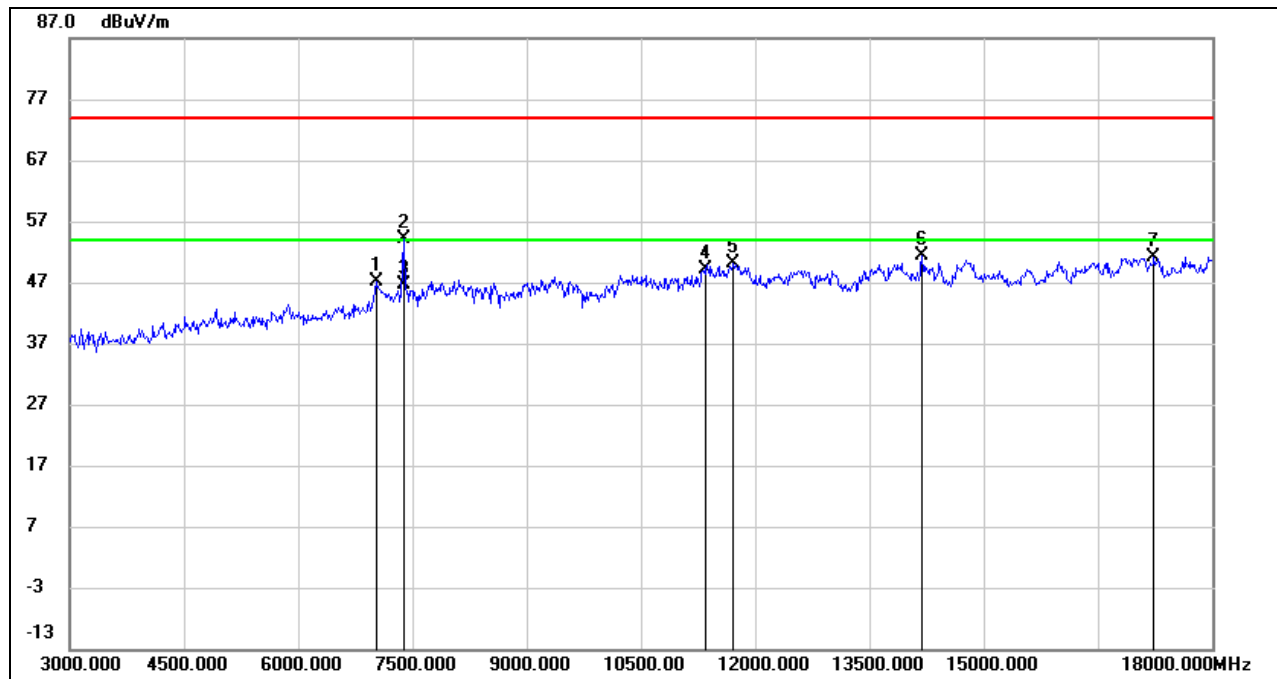

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7020.000	39.47	7.61	47.08	74.00	-26.92	peak
2	7380.000	46.23	7.79	54.02	74.00	-19.98	peak
3	7380.000	38.80	7.79	46.59	54.00	-7.41	AVG
4	11355.000	34.69	14.34	49.03	74.00	-24.97	peak
5	11715.000	34.87	15.34	50.21	74.00	-23.79	peak
6	14190.000	33.51	17.76	51.27	74.00	-22.73	peak
7	17235.000	28.98	22.21	51.19	74.00	-22.81	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

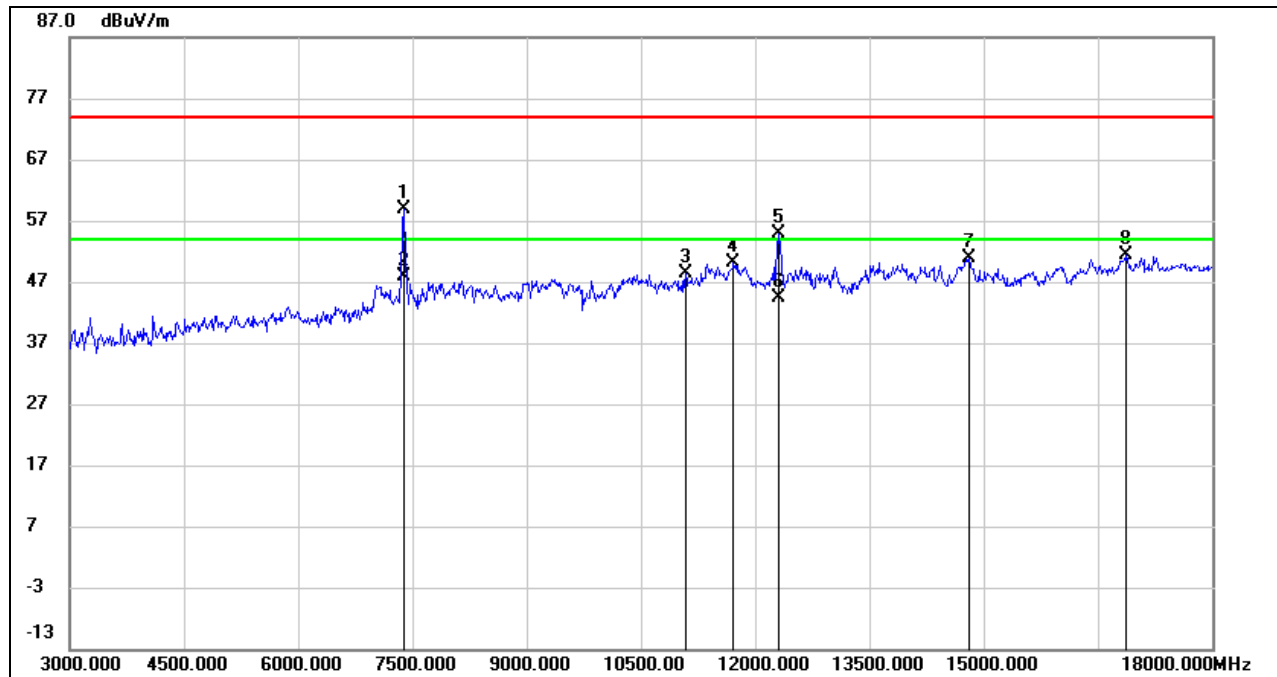

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7380.000	51.08	7.79	58.87	74.00	-15.13	peak
2	7380.000	40.20	7.79	47.99	54.00	-6.01	AVG
3	11085.000	34.55	13.72	48.27	74.00	-25.73	peak
4	11715.000	34.69	15.34	50.03	74.00	-23.97	peak
5	12315.000	38.71	16.06	54.77	74.00	-19.23	peak
6	12315.000	28.31	16.06	44.37	54.00	-9.63	AVG
7	14805.000	32.85	18.00	50.85	74.00	-23.15	peak
8	16860.000	30.26	21.22	51.48	74.00	-22.52	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.

5. For the transmitting duration, please refer to clause 7.1.


6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: Both the two antennas had been tested, but only the worst data was recorded in the report.


8.3.3. 802.11n HT20 MIMO MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

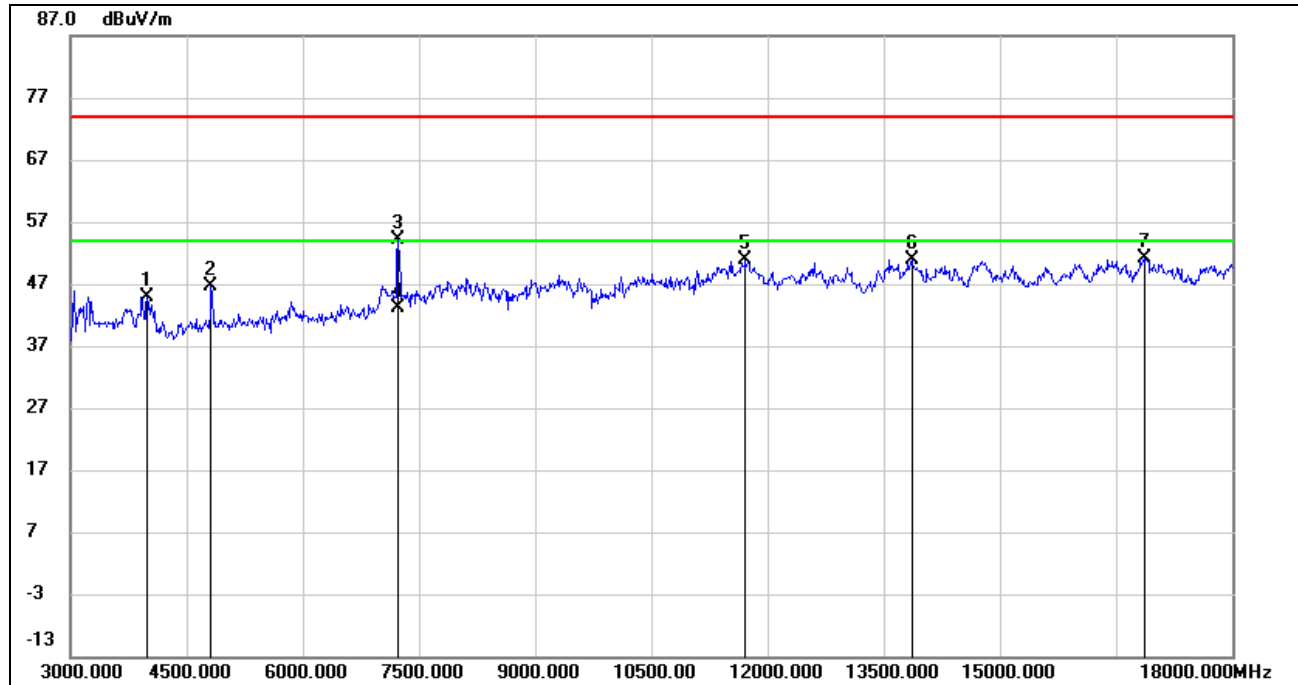

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	47.48	-2.51	44.97	74.00	-29.03	peak
2	4815.000	45.22	1.38	46.60	74.00	-27.40	peak
3	7230.000	46.93	7.28	54.21	74.00	-19.79	peak
4	7230.000	35.91	7.28	43.19	54.00	-10.81	AVG
5	11715.000	35.66	15.34	51.00	74.00	-23.00	peak
6	13860.000	33.43	17.55	50.98	74.00	-23.02	peak
7	16875.000	29.77	21.35	51.12	74.00	-22.88	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

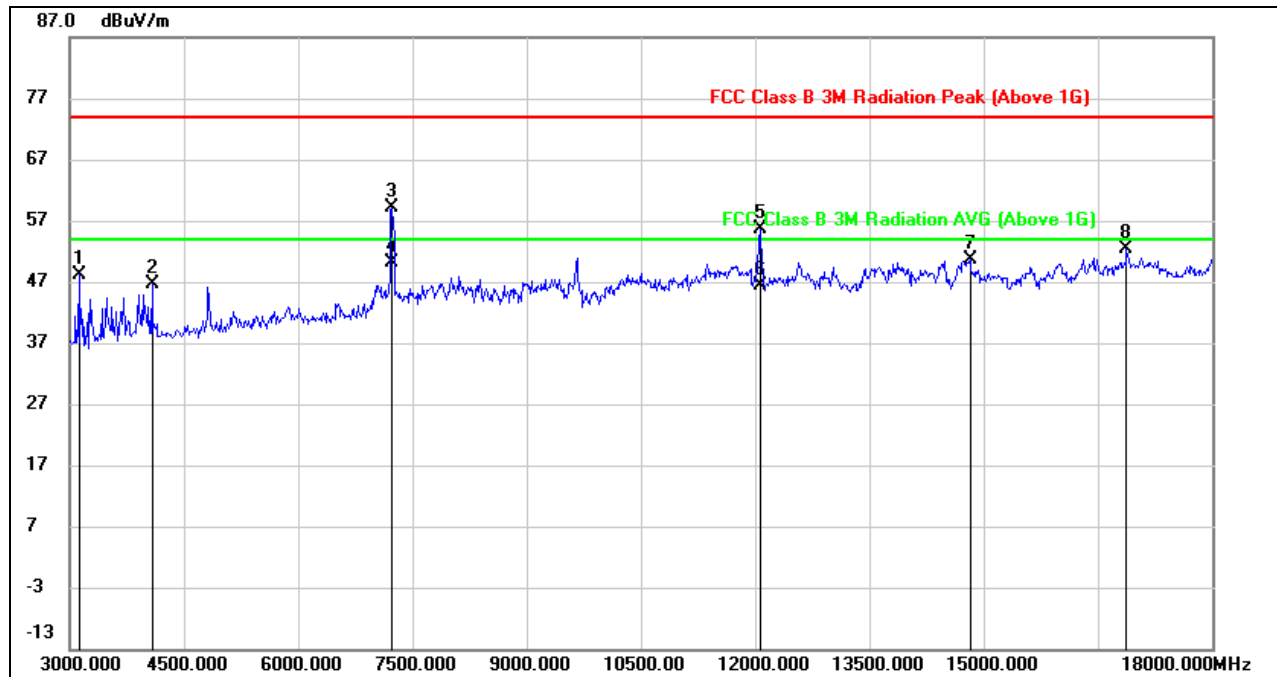**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3120.000	51.59	-3.36	48.23	74.00	-25.77	peak
2	4080.000	48.94	-2.39	46.55	74.00	-27.45	peak
3	7230.000	51.79	7.28	59.07	74.00	-14.93	peak
4	7230.000	42.96	7.28	50.24	54.00	-3.76	AVG
5	12060.000	40.23	15.44	55.67	74.00	-18.33	peak
6	12060.000	30.92	15.44	46.36	54.00	-7.64	AVG
7	14820.000	32.69	17.91	50.60	74.00	-23.40	peak
8	16875.000	30.93	21.35	52.28	74.00	-21.72	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.

5. For the transmitting duration, please refer to clause 7.1.

6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

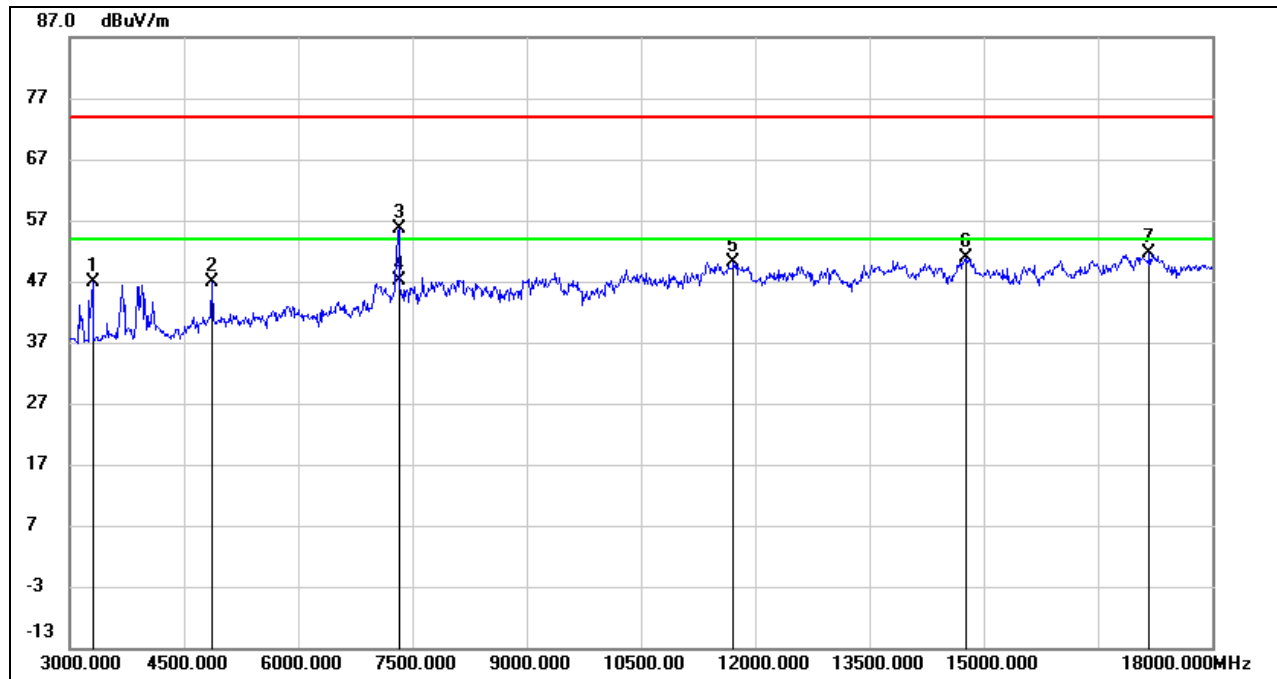

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3300.000	50.44	-3.60	46.84	74.00	-27.16	peak
2	4860.000	45.43	1.33	46.76	74.00	-27.24	peak
3	7320.000	48.31	7.28	55.59	74.00	-18.41	peak
4	7320.000	39.95	7.28	47.23	54.00	-6.77	AVG
5	11715.000	34.73	15.34	50.07	74.00	-23.93	peak
6	14775.000	32.90	17.95	50.85	74.00	-23.15	peak
7	17175.000	29.61	21.97	51.58	74.00	-22.42	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

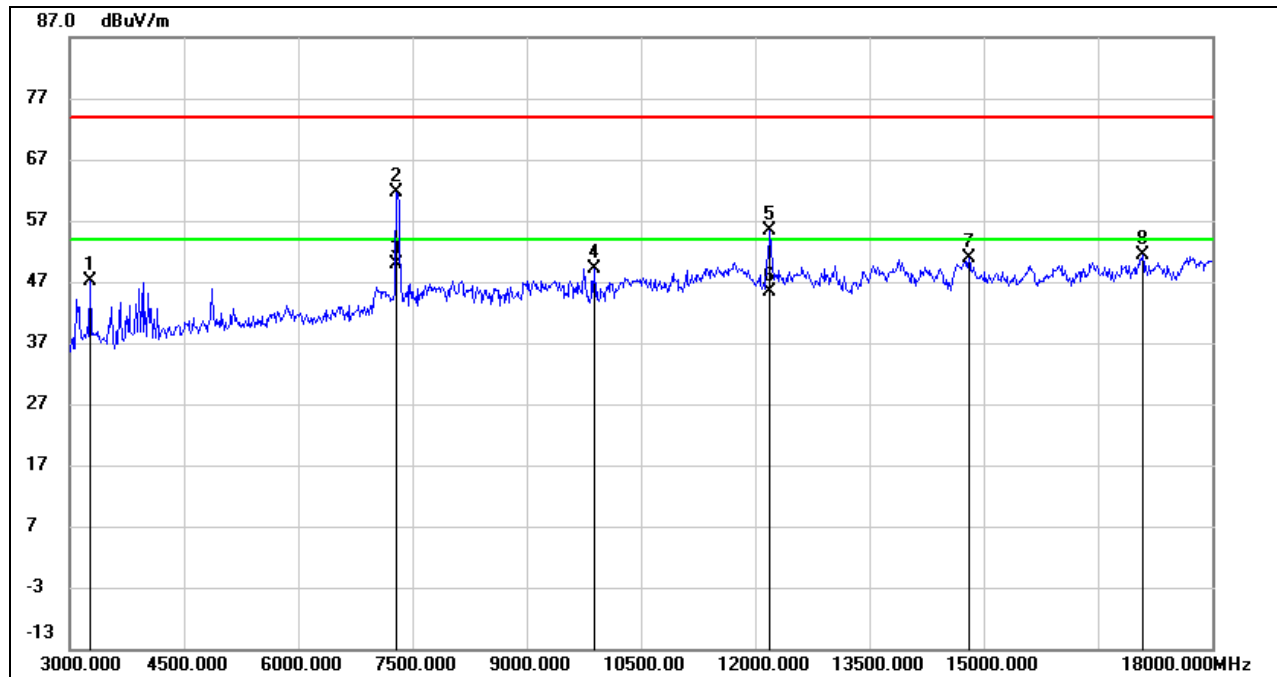

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3270.000	50.74	-3.70	47.04	74.00	-26.96	peak
2	7290.000	54.60	7.12	61.72	74.00	-12.28	peak
3	7290.000	42.74	7.12	49.86	54.00	-4.14	AVG
4	9885.000	38.26	10.96	49.22	74.00	-24.78	peak
5	12195.000	39.48	15.93	55.41	74.00	-18.59	peak
6	12195.000	29.37	15.93	45.30	54.00	-8.70	AVG
7	14805.000	32.80	18.00	50.80	74.00	-23.20	peak
8	17085.000	29.64	21.80	51.44	74.00	-22.56	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

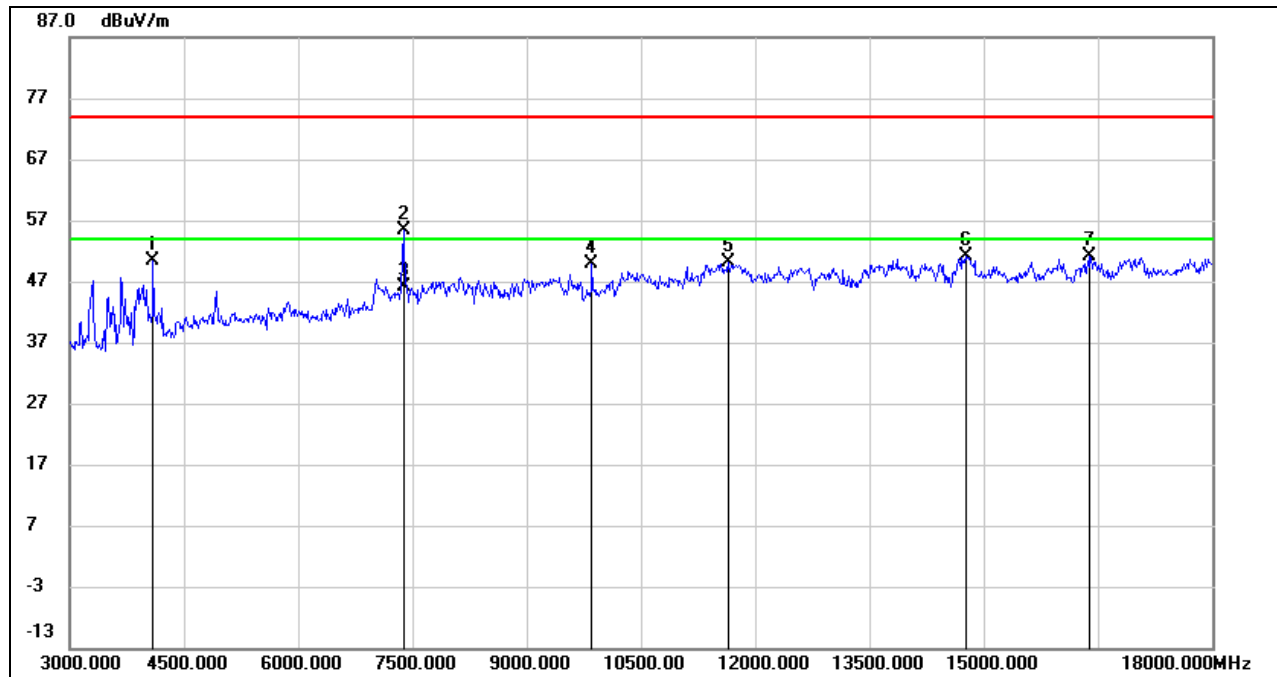**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4095.000	52.71	-2.37	50.34	74.00	-23.66	peak
2	7380.000	47.56	7.79	55.35	74.00	-18.65	peak
3	7380.000	38.29	7.79	46.08	54.00	-7.92	AVG
4	9855.000	39.30	10.64	49.94	74.00	-24.06	peak
5	11640.000	35.13	14.97	50.10	74.00	-23.90	peak
6	14760.000	33.11	17.90	51.01	74.00	-22.99	peak
7	16395.000	31.45	19.68	51.13	74.00	-22.87	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

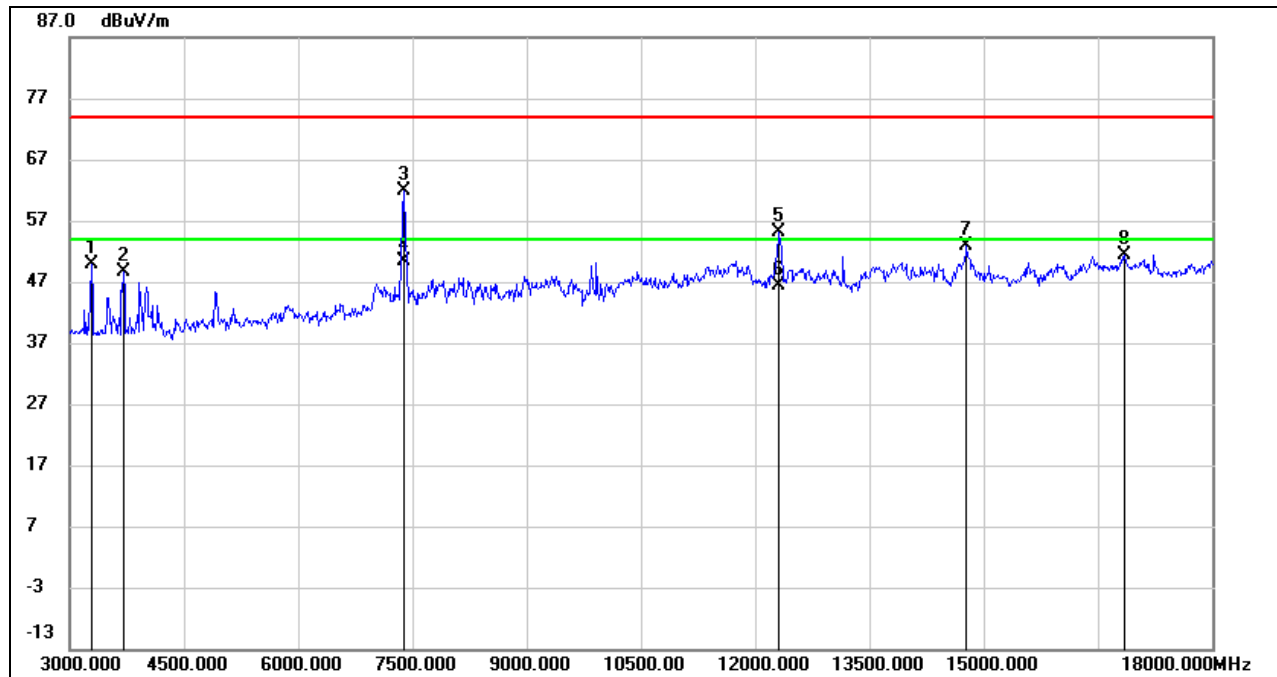

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3285.000	53.56	-3.65	49.91	74.00	-24.09	peak
2	3705.000	51.63	-2.90	48.73	74.00	-25.27	peak
3	7380.000	54.03	7.79	61.82	74.00	-12.18	peak
4	7380.000	42.51	7.79	50.30	54.00	-3.70	AVG
5	12315.000	39.15	16.06	55.21	74.00	-18.79	peak
6	12315.000	30.33	16.06	46.39	54.00	-7.61	AVG
7	14775.000	34.93	17.95	52.88	74.00	-21.12	peak
8	16845.000	30.36	21.10	51.46	74.00	-22.54	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.


5. For the transmitting duration, please refer to clause 7.1.

6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.3.4. 802.11n HT40 MIMO MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

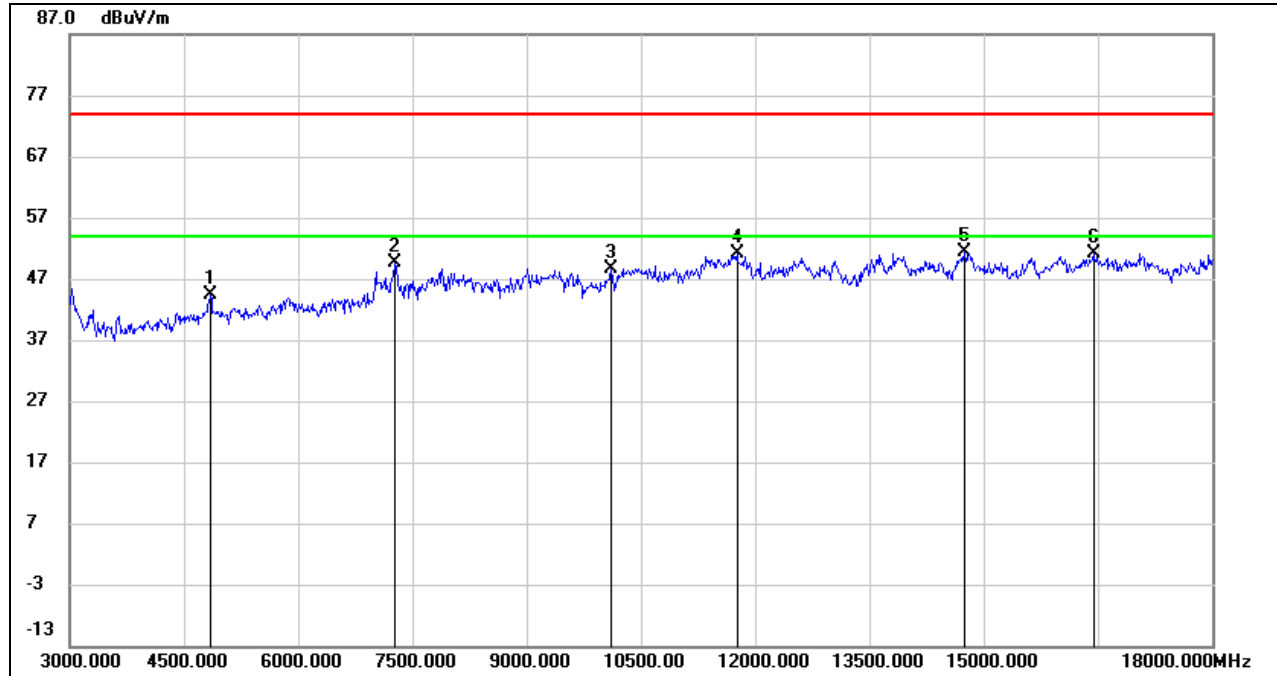

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4845.000	43.06	1.35	44.41	74.00	-29.59	peak
2	7275.000	42.51	7.16	49.67	74.00	-24.33	peak
3	10110.000	37.59	11.14	48.73	74.00	-25.27	peak
4	11760.000	35.76	15.29	51.05	74.00	-22.95	peak
5	14745.000	33.44	17.84	51.28	74.00	-22.72	peak
6	16440.000	31.54	19.68	51.22	74.00	-22.78	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

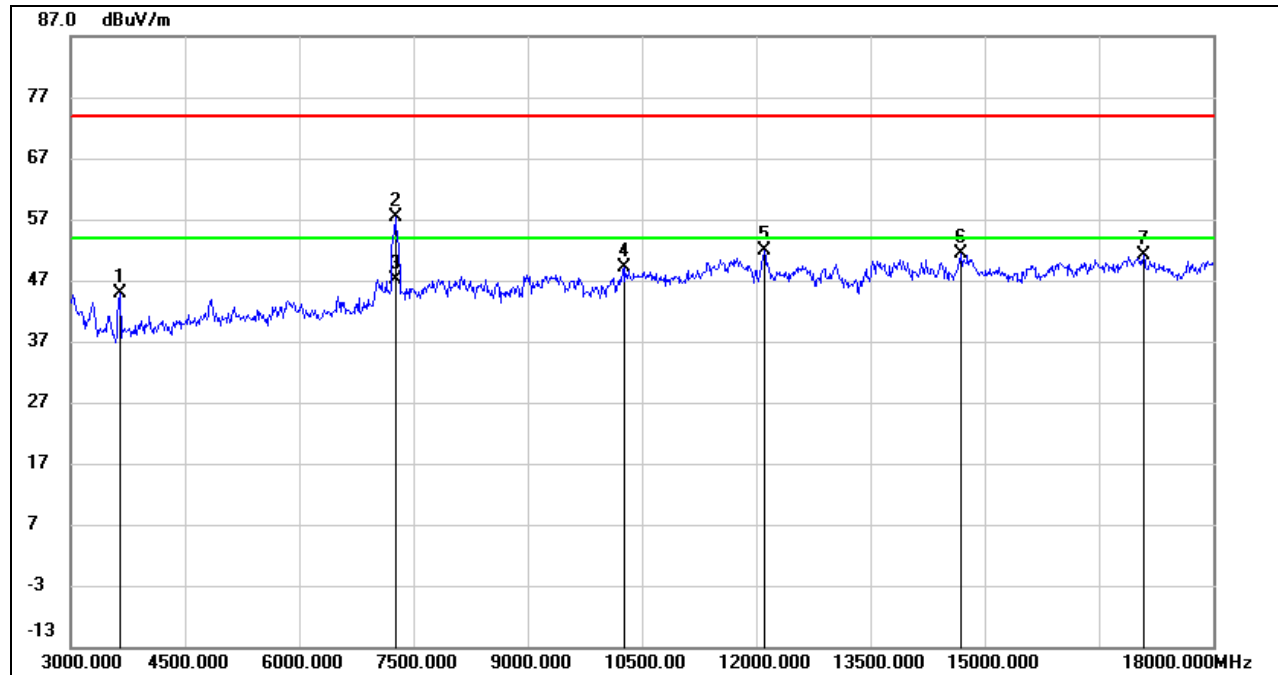**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3645.000	48.00	-3.06	44.94	74.00	-29.06	peak
2	7260.000	50.13	7.21	57.34	74.00	-16.66	peak
3	7260.000	39.88	7.21	47.09	54.00	-6.91	AVG
4	10260.000	37.51	11.68	49.19	74.00	-24.81	peak
5	12105.000	36.58	15.38	51.96	74.00	-22.04	peak
6	14685.000	33.81	17.64	51.45	74.00	-22.55	peak
7	17085.000	29.29	21.80	51.09	74.00	-22.91	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

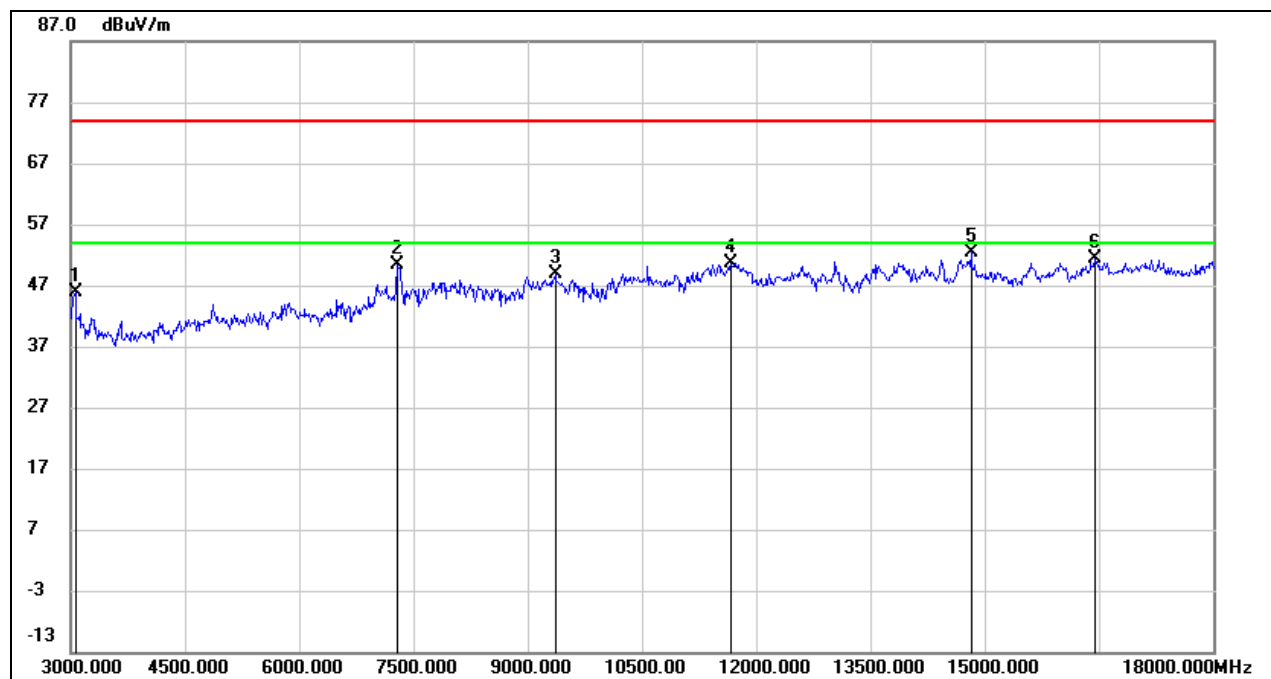**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3060.000	49.27	-3.40	45.87	74.00	-28.13	peak
2	7290.000	43.24	7.12	50.36	74.00	-23.64	peak
3	9360.000	38.06	10.75	48.81	74.00	-25.19	peak
4	11670.000	35.40	15.16	50.56	74.00	-23.44	peak
5	14820.000	34.47	17.91	52.38	74.00	-21.62	peak
6	16455.000	31.68	19.68	51.36	74.00	-22.64	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

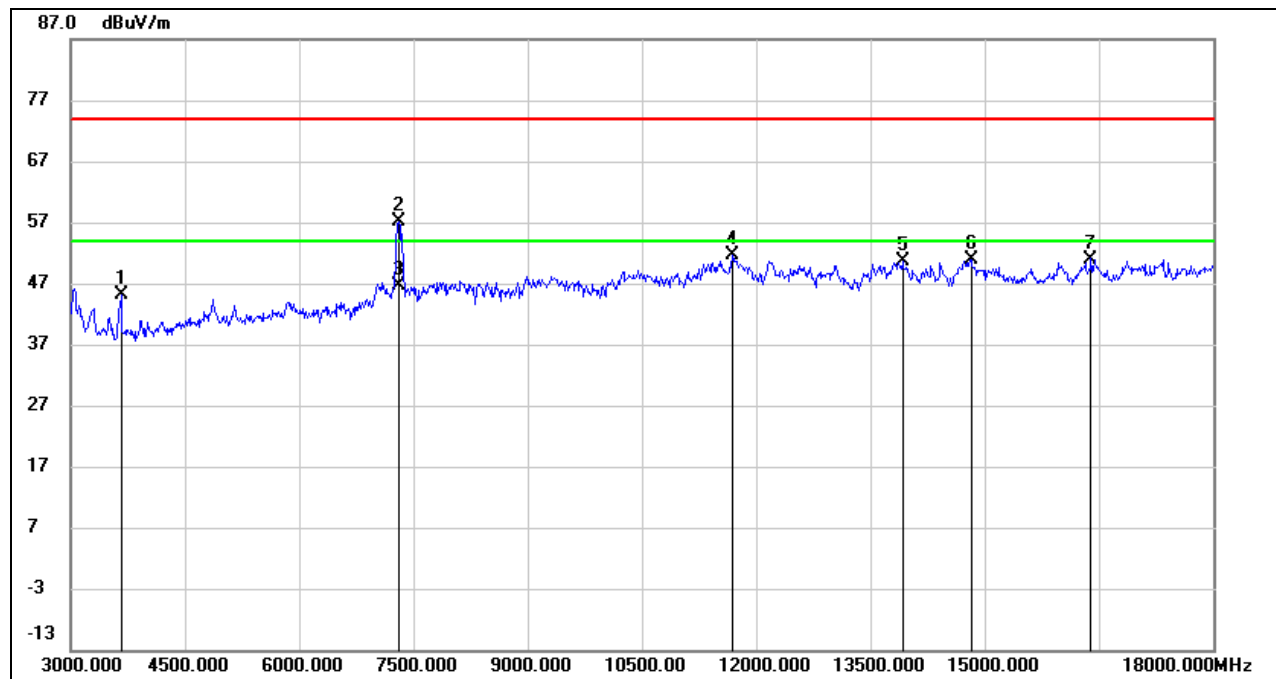**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	48.27	-3.02	45.25	74.00	-28.75	peak
2	7305.000	50.09	7.14	57.23	74.00	-16.77	peak
3	7305.000	39.55	7.14	46.69	54.00	-7.31	AVG
4	11685.000	36.42	15.26	51.68	74.00	-22.32	peak
5	13920.000	33.05	17.55	50.60	74.00	-23.40	peak
6	14820.000	32.95	17.91	50.86	74.00	-23.14	peak
7	16395.000	31.32	19.68	51.00	74.00	-23.00	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

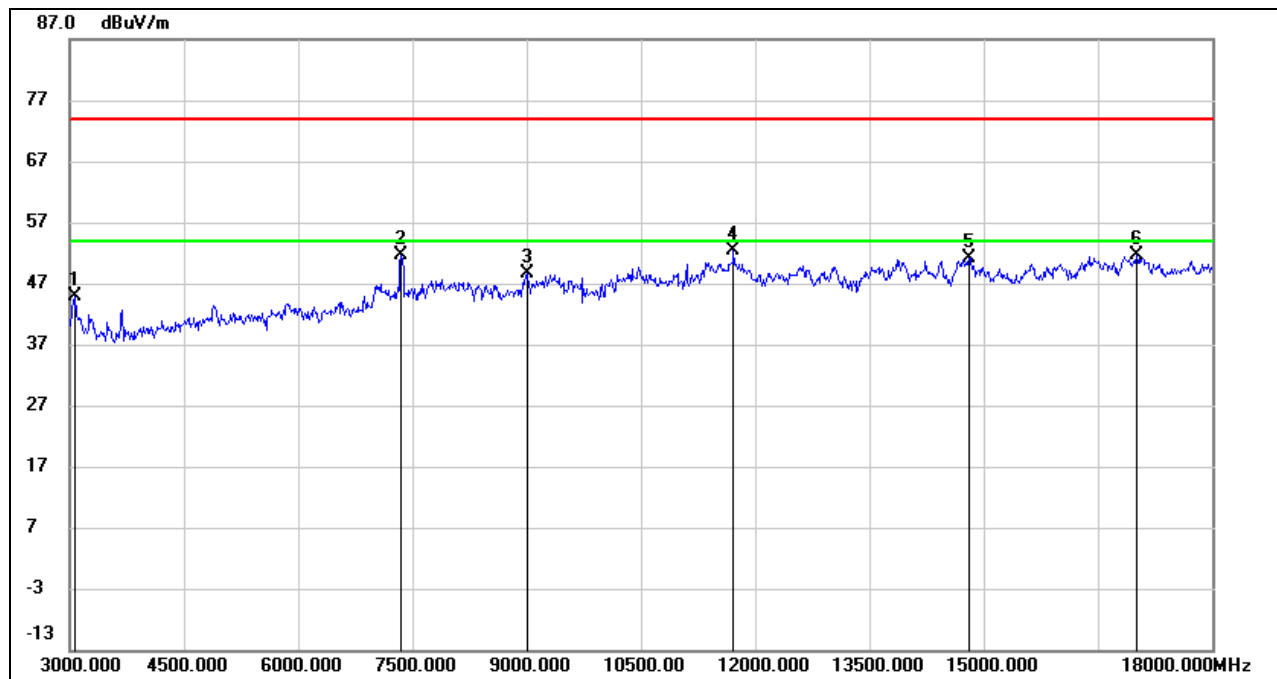**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3075.000	48.14	-3.34	44.80	74.00	-29.20	peak
2	7350.000	44.01	7.53	51.54	74.00	-22.46	peak
3	9000.000	37.46	11.27	48.73	74.00	-25.27	peak
4	11715.000	36.92	15.34	52.26	74.00	-21.74	peak
5	14805.000	33.22	18.00	51.22	74.00	-22.78	peak
6	17010.000	30.41	21.31	51.72	74.00	-22.28	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

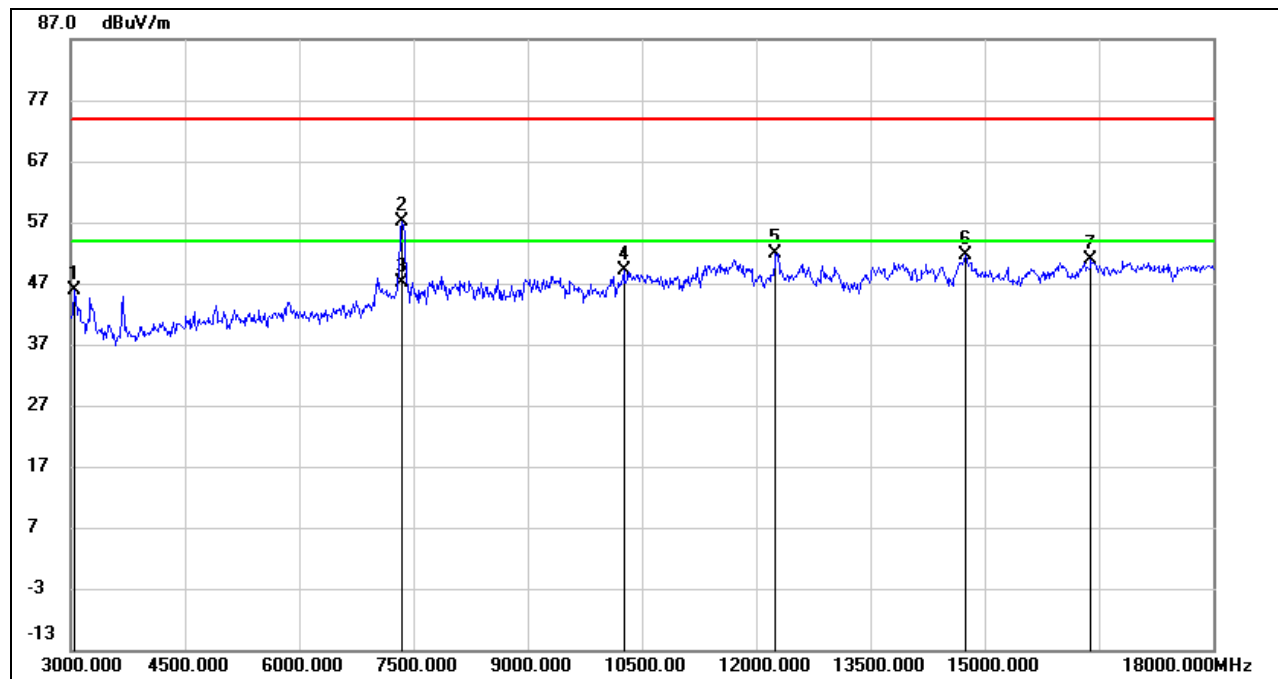

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3045.000	49.41	-3.46	45.95	74.00	-28.05	peak
2	7350.000	49.49	7.53	57.02	74.00	-16.98	peak
3	7350.000	39.60	7.53	47.13	54.00	-6.87	AVG
4	10260.000	37.37	11.68	49.05	74.00	-24.95	peak
5	12255.000	35.92	16.03	51.95	74.00	-22.05	peak
6	14745.000	33.76	17.84	51.60	74.00	-22.40	peak
7	16395.000	31.26	19.68	50.94	74.00	-23.06	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.5. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)

8.5.1. 802.11b SISO MODE

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

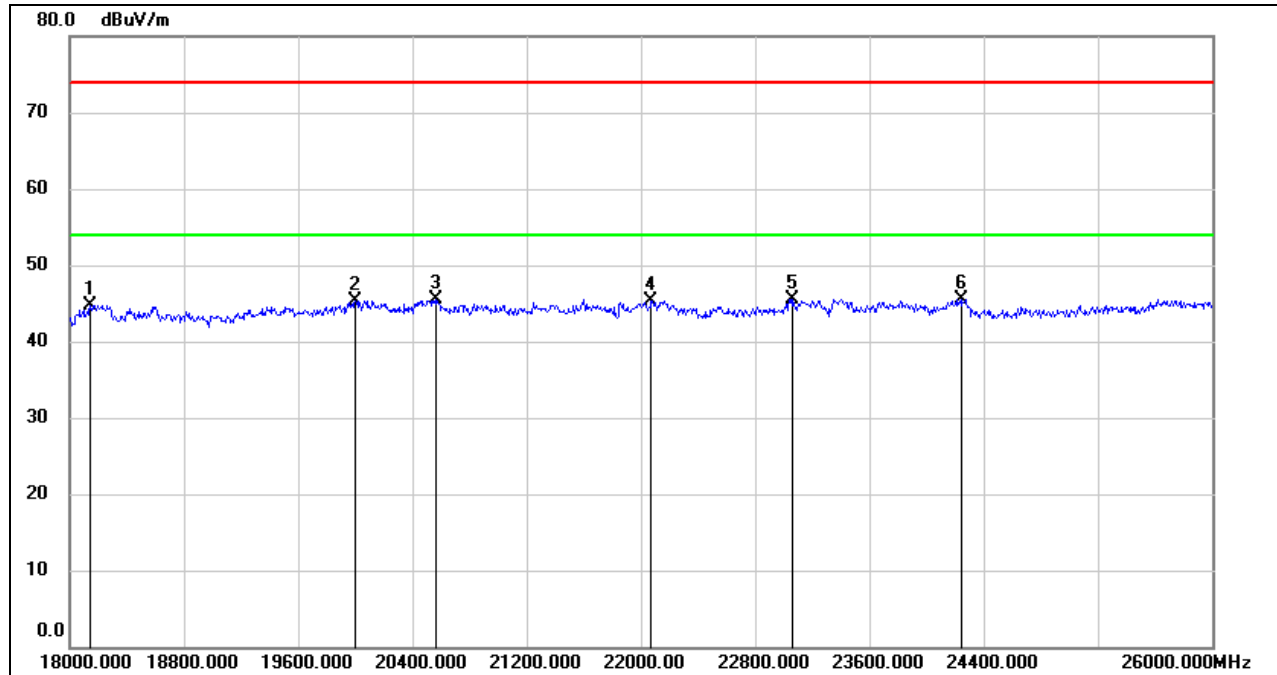


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18144.000	50.27	-5.48	44.79	74.00	-29.21	peak
2	20000.000	50.81	-5.45	45.36	74.00	-28.64	peak
3	20560.000	50.73	-5.30	45.43	74.00	-28.57	peak
4	22072.000	49.77	-4.41	45.36	74.00	-28.64	peak
5	23064.000	48.99	-3.42	45.57	74.00	-28.43	peak
6	24248.000	48.32	-2.83	45.49	74.00	-28.51	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

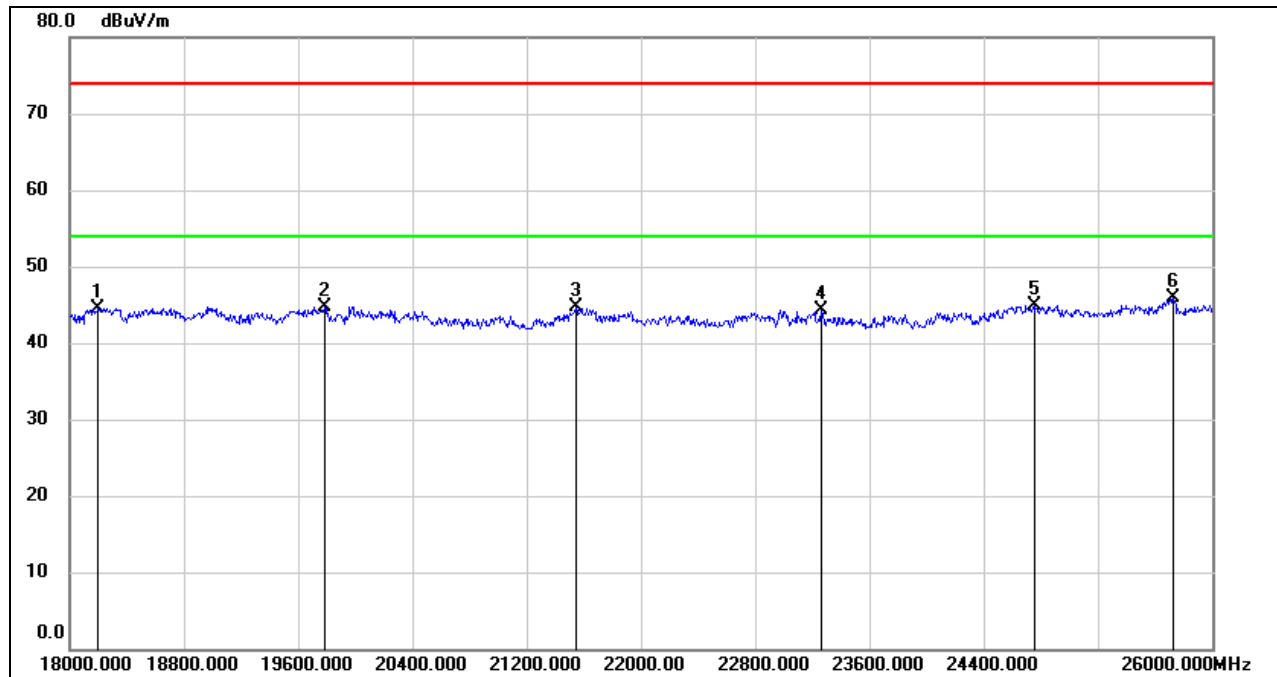

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18200.000	50.08	-5.52	44.56	74.00	-29.44	peak
2	19784.000	50.07	-5.28	44.79	74.00	-29.21	peak
3	21544.000	49.26	-4.63	44.63	74.00	-29.37	peak
4	23264.000	47.76	-3.36	44.40	74.00	-29.60	peak
5	24752.000	47.20	-2.32	44.88	74.00	-29.12	peak
6	25728.000	46.61	-0.72	45.89	74.00	-28.11	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

Note: All modes, channels and antenna have been tested, only the worst data was recorded in the report.




8.6. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

8.6.1. 802.11b SISO MODE

ANTENNA 1 TEST RESULTS (WORST CASE)

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

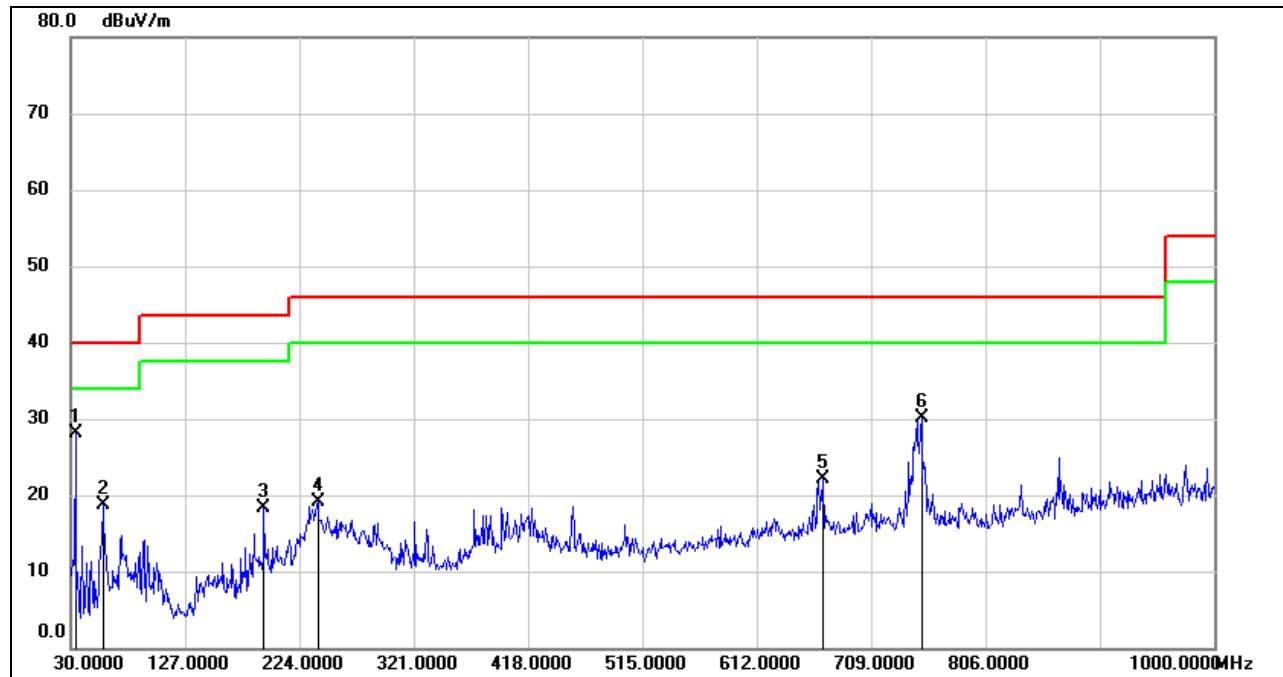


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	47.46	-19.31	28.15	40.00	-11.85	QP
2	57.1600	39.36	-20.58	18.78	40.00	-21.22	QP
3	193.9299	34.80	-16.51	18.29	43.50	-25.21	QP
4	239.5200	38.30	-19.16	19.14	46.00	-26.86	QP
5	668.2600	30.80	-8.65	22.15	46.00	-23.85	QP
6	751.6800	37.93	-7.90	30.03	46.00	-15.97	QP

Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

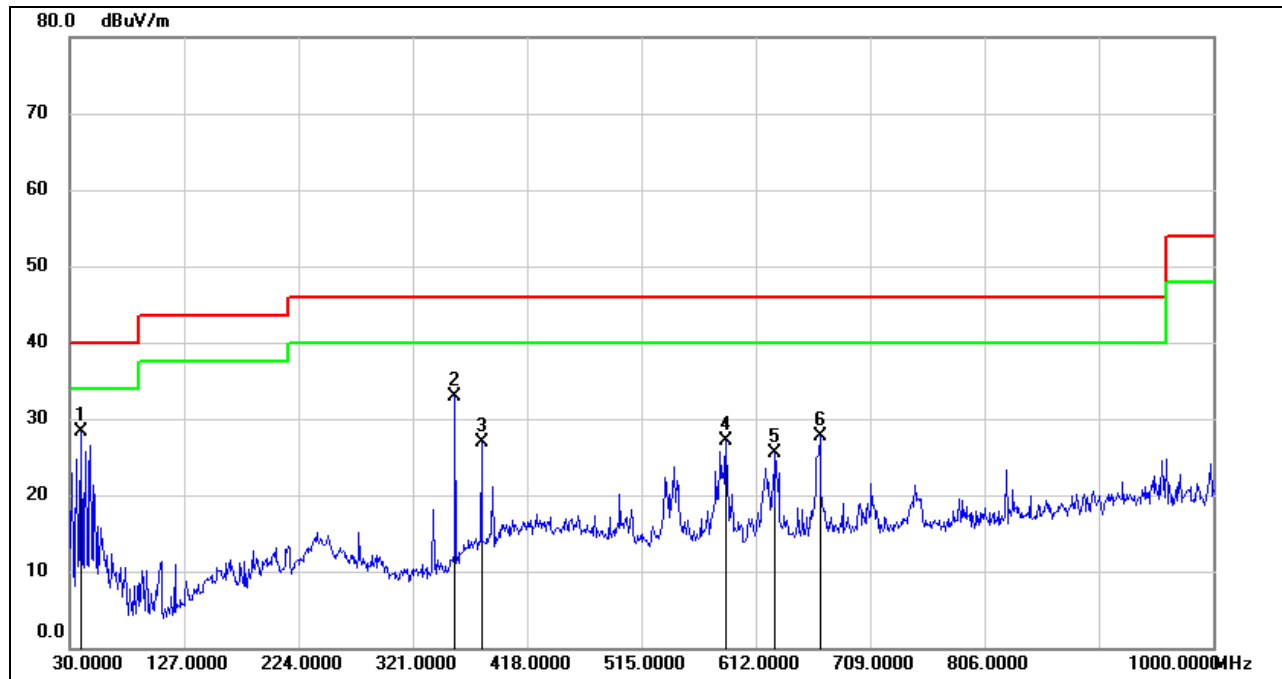

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	39.7000	48.34	-19.96	28.38	40.00	-11.62	QP
2	356.8900	47.07	-14.17	32.90	46.00	-13.10	QP
3	379.2000	40.50	-13.67	26.83	46.00	-19.17	QP
4	586.7800	37.05	-9.87	27.18	46.00	-18.82	QP
5	628.4900	34.75	-9.19	25.56	46.00	-20.44	QP
6	666.3200	36.42	-8.65	27.77	46.00	-18.23	QP

Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note: All modes, channels and antenna have been tested, only the worst data was recorded in the report.


8.7. SPURIOUS EMISSIONS BELOW 30 MHz

8.7.1. 802.11b SISO MODE

ANTENNA 1 TEST RESULTS (WORST CASE)

SPURIOUS EMISSIONS (MID CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz~ 150 kHz

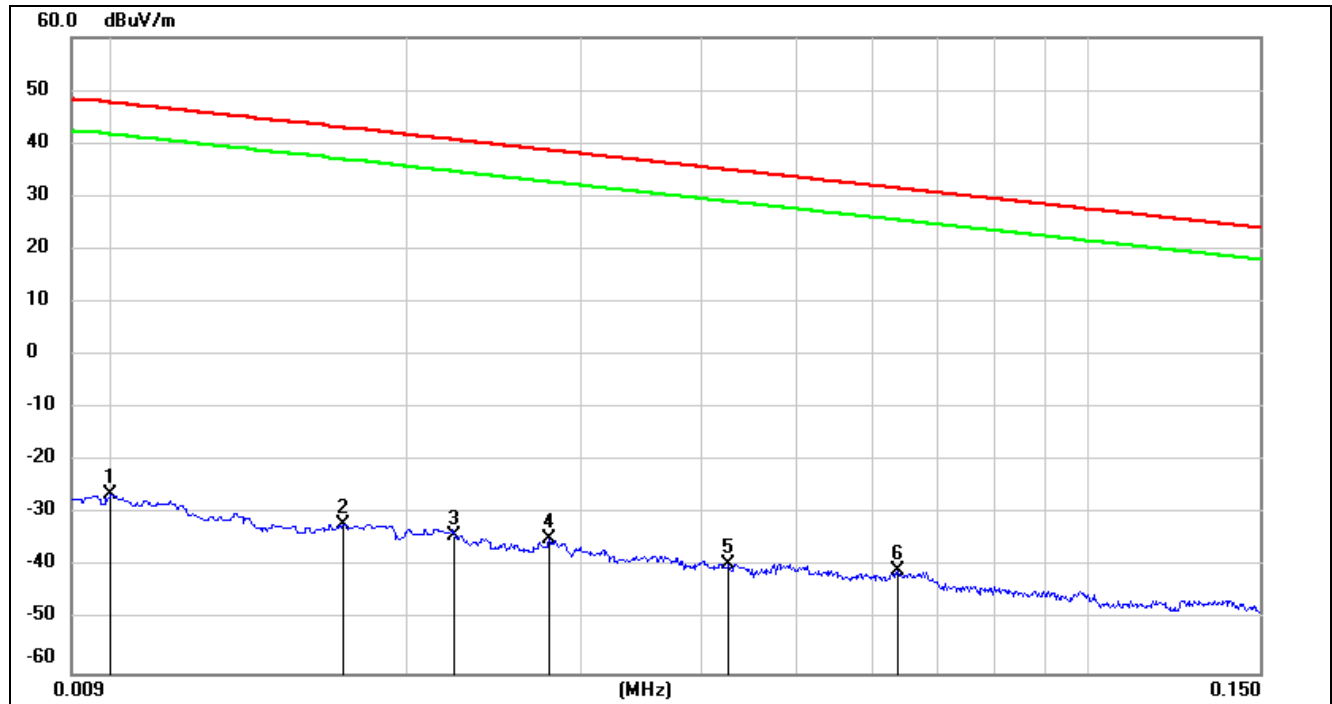


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	75.22	-101.40	-26.18	47.6	-77.68	-3.90	-73.78	peak
2	0.0171	69.38	-101.36	-31.98	42.94	-83.48	-8.56	-74.92	peak
3	0.0223	67.29	-101.35	-34.06	40.63	-85.56	-10.87	-74.69	peak
4	0.0279	66.67	-101.38	-34.71	38.69	-86.21	-12.81	-73.40	peak
5	0.0427	62.14	-101.45	-39.31	34.99	-90.81	-16.51	-74.30	peak
6	0.0636	60.81	-101.54	-40.73	31.53	-92.23	-19.97	-72.26	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

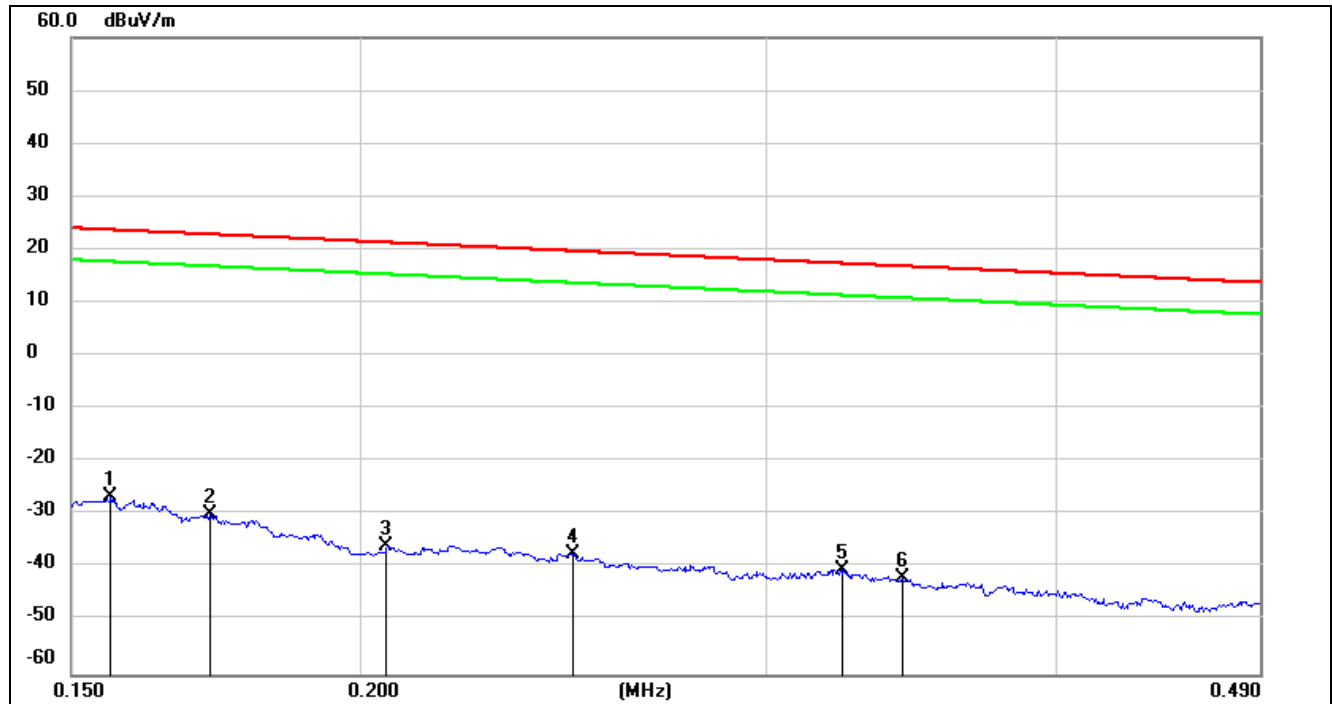150 kHz ~ 490 kHz


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1559	75.15	-101.65	-26.5	23.74	-78.00	-27.76	-50.24	peak
2	0.1720	71.69	-101.67	-29.98	22.9	-81.48	-28.60	-52.88	peak
3	0.2053	65.79	-101.73	-35.94	21.35	-87.44	-30.15	-57.29	peak
4	0.2472	64.45	-101.80	-37.35	19.74	-88.85	-31.76	-57.09	peak
5	0.3234	61.48	-101.88	-40.4	17.41	-91.90	-34.09	-57.81	peak
6	0.3431	60.17	-101.90	-41.73	16.89	-93.23	-34.61	-58.62	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

490 kHz ~ 30 MHz

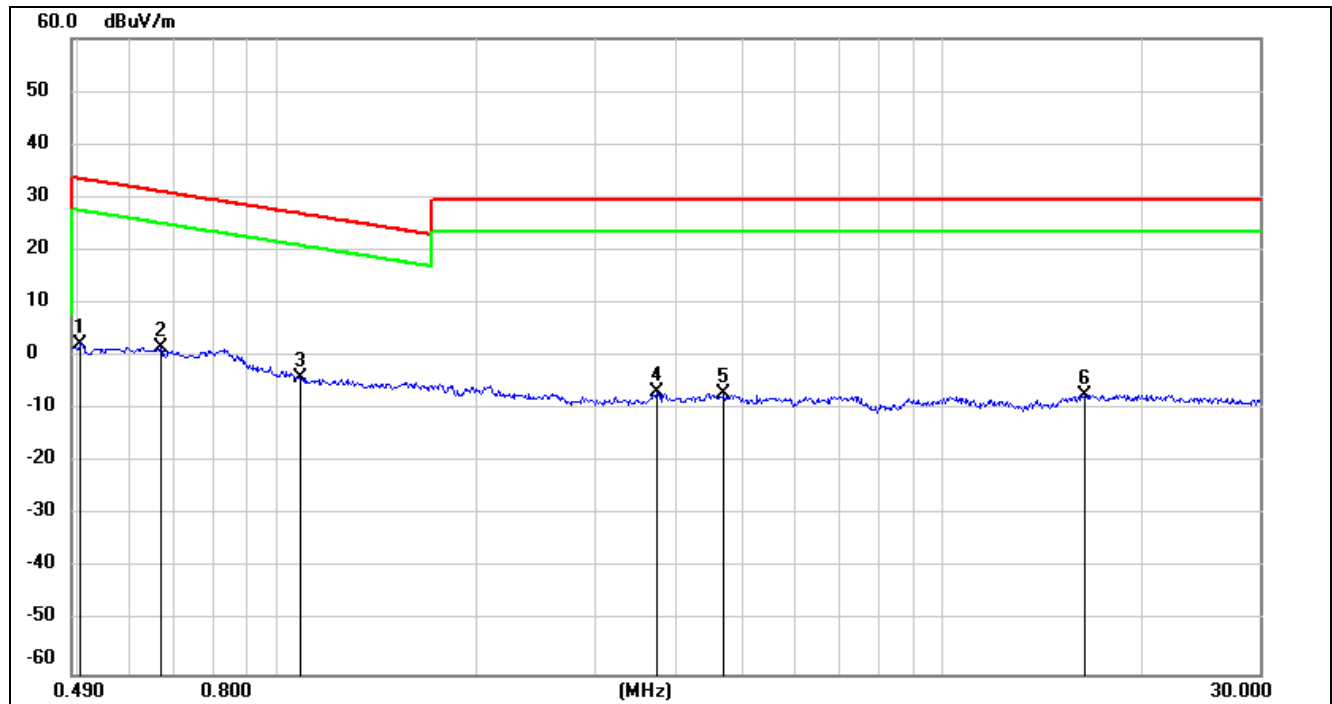

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5039	64.44	-62.07	2.37	33.56	-49.13	-17.94	-31.19	peak
2	0.6671	63.75	-62.10	1.65	31.12	-49.85	-20.38	-29.47	peak
3	1.0802	58.16	-62.23	-4.07	26.94	-55.57	-24.56	-31.01	peak
4	3.7100	54.70	-61.41	-6.71	29.54	-58.21	-21.96	-36.25	peak
5	4.6905	54.32	-61.44	-7.12	29.54	-58.62	-21.96	-36.66	peak
6	16.3959	53.67	-60.96	-7.29	29.54	-58.79	-21.96	-36.83	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note:

1)All modes, channels and antenna have been tested, only the worst data was recorded in the report.

2) Below 30MHz: According to the section 15.31 f2) of part 15, performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). If the results at 3m complies with the limit of 15.209, the results at 3m are deemed to comply with 3m limit.

9. AC POWER LINE CONDUCTED EMISSIONS


LIMITS

Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

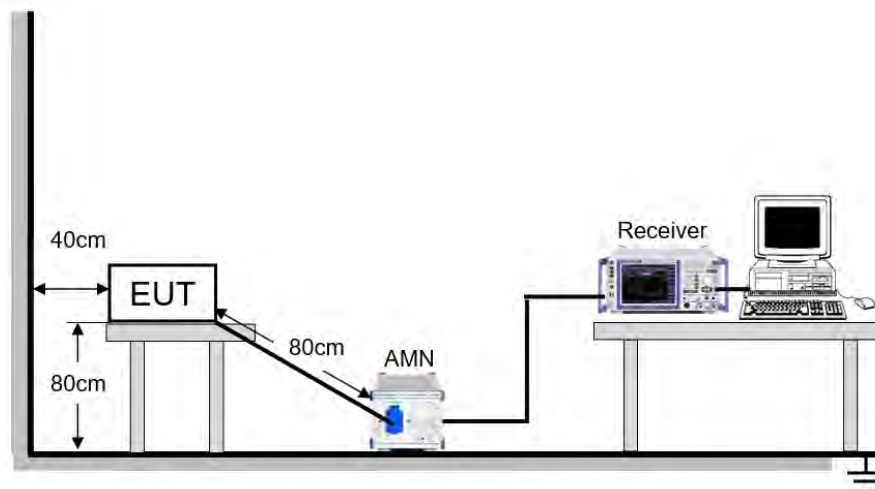

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.


TEST ENVIRONMENT

Temperature	25.1 °C	Relative Humidity	63%
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS

9.1.1. 802.11b SISO MODE

LINE L RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

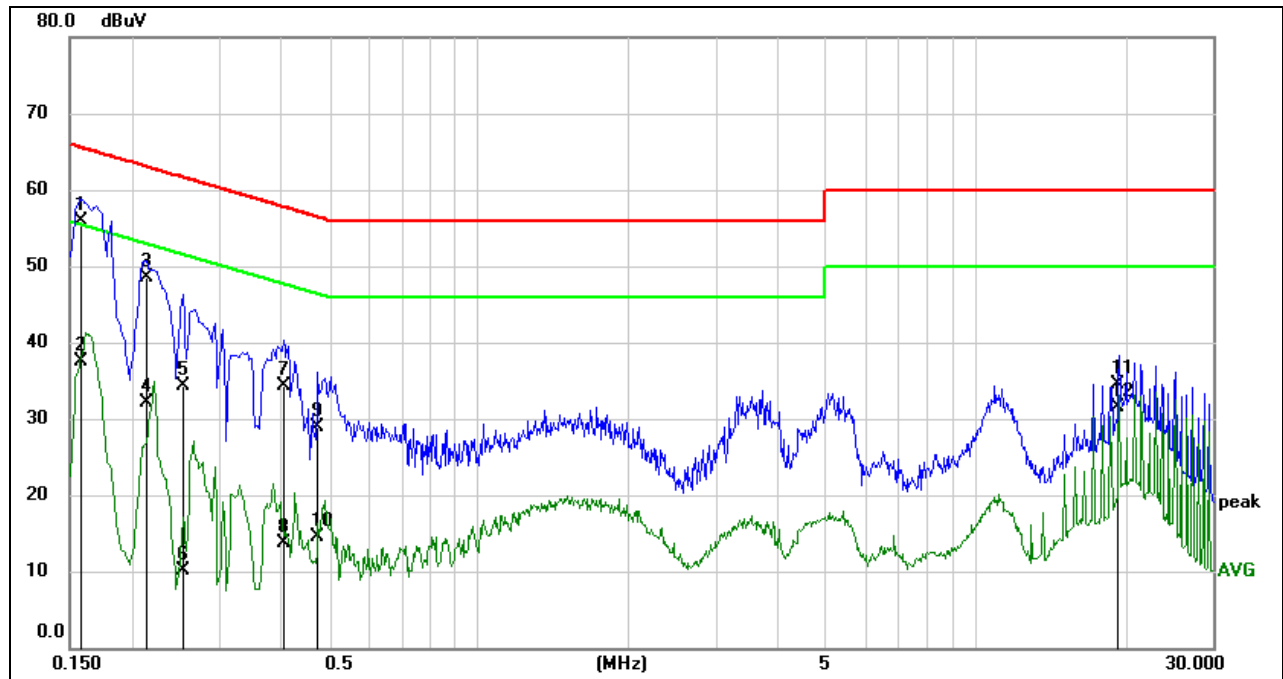

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1582	46.23	9.59	55.82	65.56	-9.74	QP
2	0.1582	27.91	9.59	37.50	55.56	-18.06	AVG
3	0.2142	38.99	9.59	48.58	63.04	-14.46	QP
4	0.2142	22.51	9.59	32.10	53.04	-20.94	AVG
5	0.2535	24.65	9.59	34.24	61.64	-27.40	QP
6	0.2535	0.48	9.59	10.07	51.64	-41.57	AVG
7	0.4026	24.72	9.60	34.32	57.80	-23.48	QP
8	0.4026	4.15	9.60	13.75	47.80	-34.05	AVG
9	0.4742	19.27	9.60	28.87	56.44	-27.57	QP
10	0.4742	4.87	9.60	14.47	46.44	-31.97	AVG
11	19.4244	24.85	9.73	34.58	60.00	-25.42	QP
12	19.4244	21.70	9.73	31.43	50.00	-18.57	AVG


Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

LINE N RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

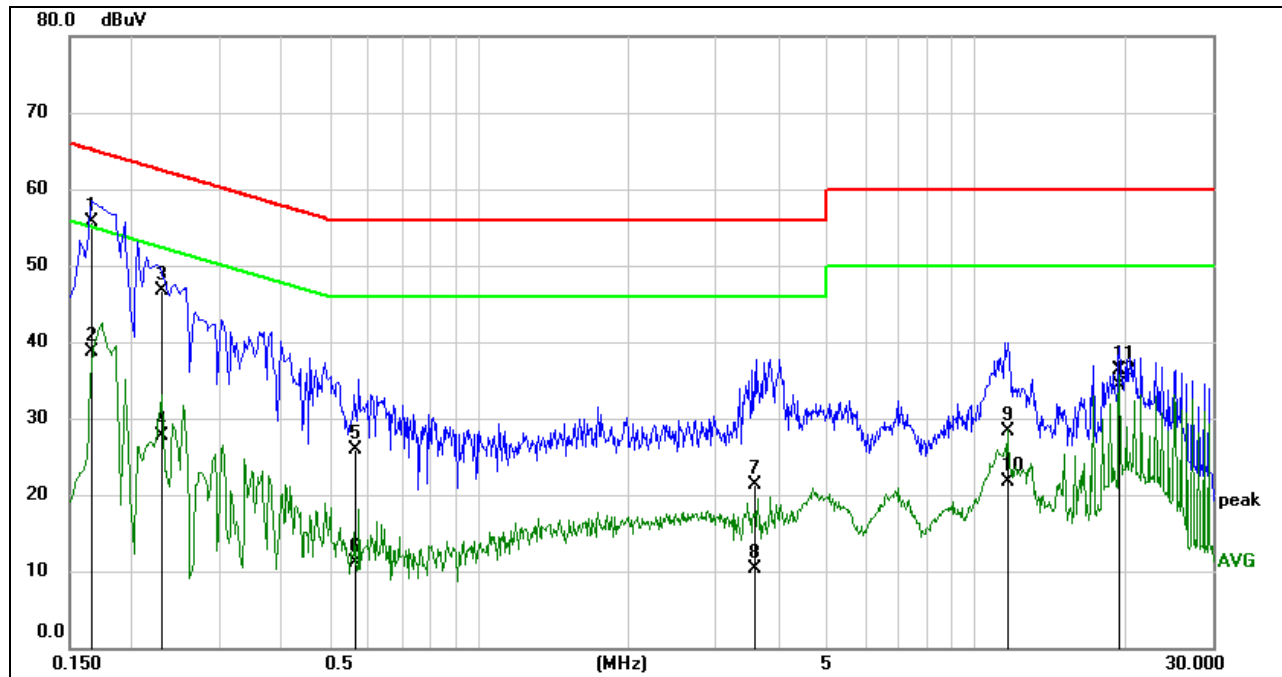

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1664	46.10	9.59	55.69	65.14	-9.45	QP
2	0.1664	29.12	9.59	38.71	55.14	-16.43	AVG
3	0.2312	37.07	9.59	46.66	62.41	-15.75	QP
4	0.2312	18.04	9.59	27.63	52.41	-24.78	AVG
5	0.5695	16.32	9.60	25.92	56.00	-30.08	QP
6	0.5695	1.58	9.60	11.18	46.00	-34.82	AVG
7	3.5736	11.72	9.61	21.33	56.00	-34.67	QP
8	3.5736	0.62	9.61	10.23	46.00	-35.77	AVG
9	11.5161	18.69	9.65	28.34	60.00	-31.66	QP
10	11.5161	12.06	9.65	21.71	50.00	-28.29	AVG
11	19.4333	26.62	9.73	36.35	60.00	-23.65	QP
12	19.4333	24.59	9.73	34.32	50.00	-15.68	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All modes, channels and antenna have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Please refer to RSS-GEN 6.8

Each applicant for equipment certification must provide a list of all antenna types that may be used with the transmitter, indicating the maximum permissible antenna gain(in dBi). When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements, including the antenna type used.

In addition, applicants shall perform RF power and spurious emission measurements with each antenna type supplied or specified by the manufacturer for use with the transmitter.

RESULTS

Complies



11. Appendix

11.1. Appendix A: DTS Bandwidth

11.1.1. Test Result


Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.160	2406.960	2417.120	0.5	PASS
	Ant2	2412	10.160	2406.960	2417.120	0.5	PASS
	Ant1	2437	9.920	2432.200	2442.120	0.5	PASS
	Ant2	2437	10.160	2431.960	2442.120	0.5	PASS
	Ant1	2462	10.160	2456.960	2467.120	0.5	PASS
	Ant2	2462	10.160	2456.960	2467.120	0.5	PASS
11G	Ant1	2412	16.440	2403.800	2420.240	0.5	PASS
	Ant2	2412	16.600	2403.720	2420.320	0.5	PASS
	Ant1	2437	16.640	2428.720	2445.360	0.5	PASS
	Ant2	2437	16.640	2428.720	2445.360	0.5	PASS
	Ant1	2462	16.600	2453.720	2470.320	0.5	PASS
	Ant2	2462	16.600	2453.760	2470.360	0.5	PASS
11N20MIMO	Ant1	2412	17.680	2403.200	2420.880	0.5	PASS
	Ant2	2412	17.640	2403.200	2420.840	0.5	PASS
	Ant1	2437	17.720	2428.160	2445.880	0.5	PASS
	Ant2	2437	17.640	2428.200	2445.840	0.5	PASS
	Ant1	2462	17.640	2453.200	2470.840	0.5	PASS
	Ant2	2462	17.720	2453.160	2470.880	0.5	PASS
11N40MIMO	Ant1	2422	35.920	2404.000	2439.920	0.5	PASS
	Ant2	2422	35.600	2404.400	2440.000	0.5	PASS
	Ant1	2437	35.440	2419.400	2454.840	0.5	PASS
	Ant2	2437	35.840	2419.400	2455.240	0.5	PASS
	Ant1	2452	36.480	2433.760	2470.240	0.5	PASS
	Ant2	2452	36.080	2434.160	2470.240	0.5	PASS

11.1.2. Test Graphs






11B_Ant2_2437

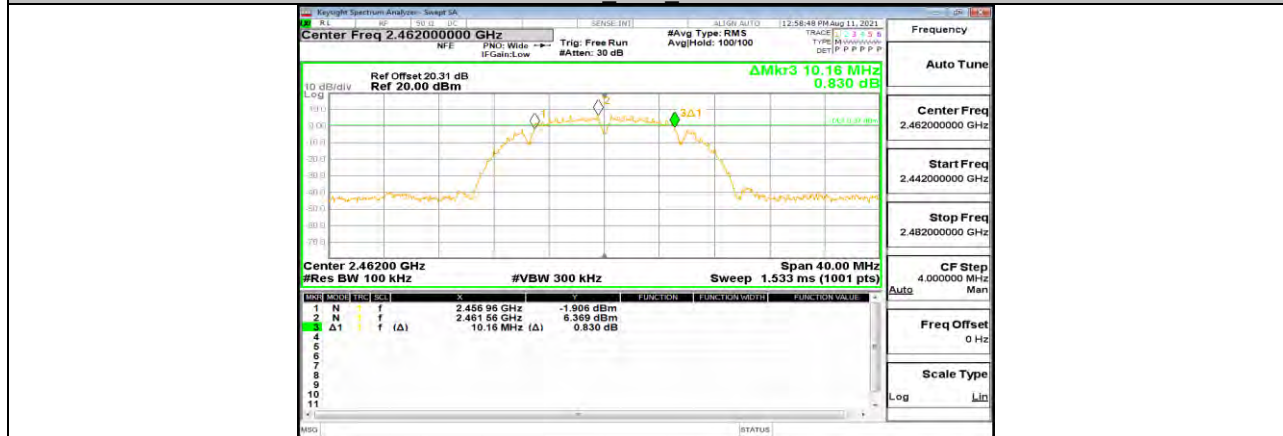

11B_Ant1_2462

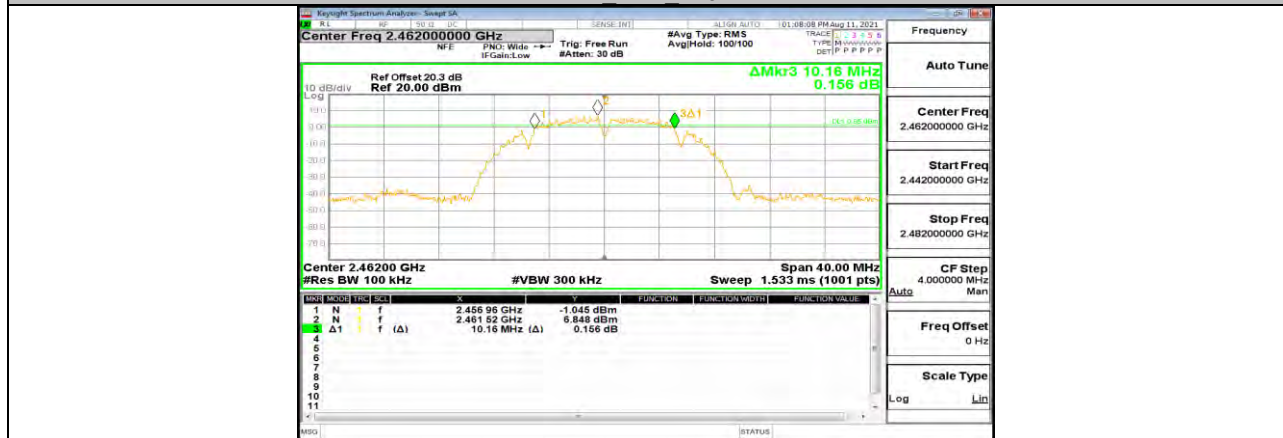

11B_Ant2_2462













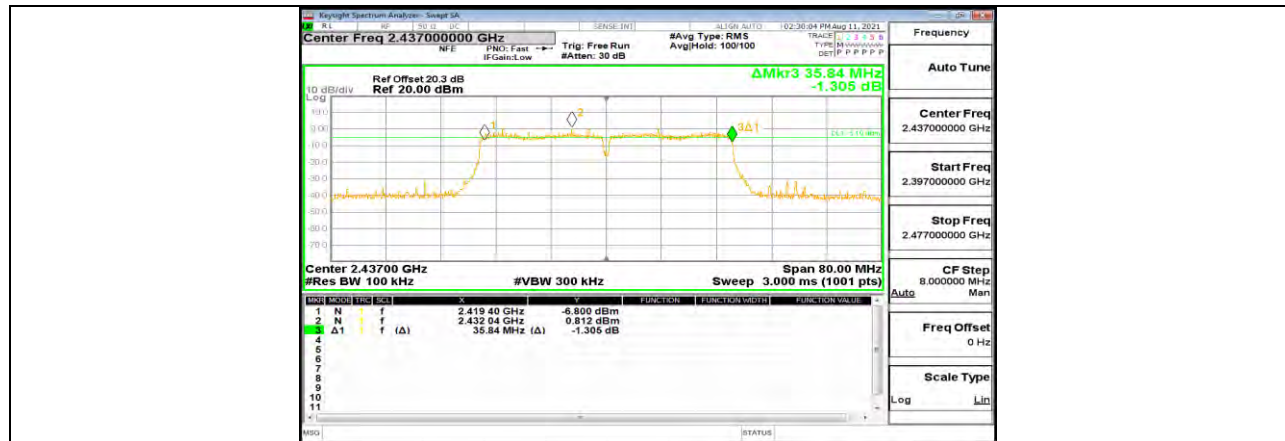

11N40MIMO Ant2 2437



11N40MIMO Ant1 2452

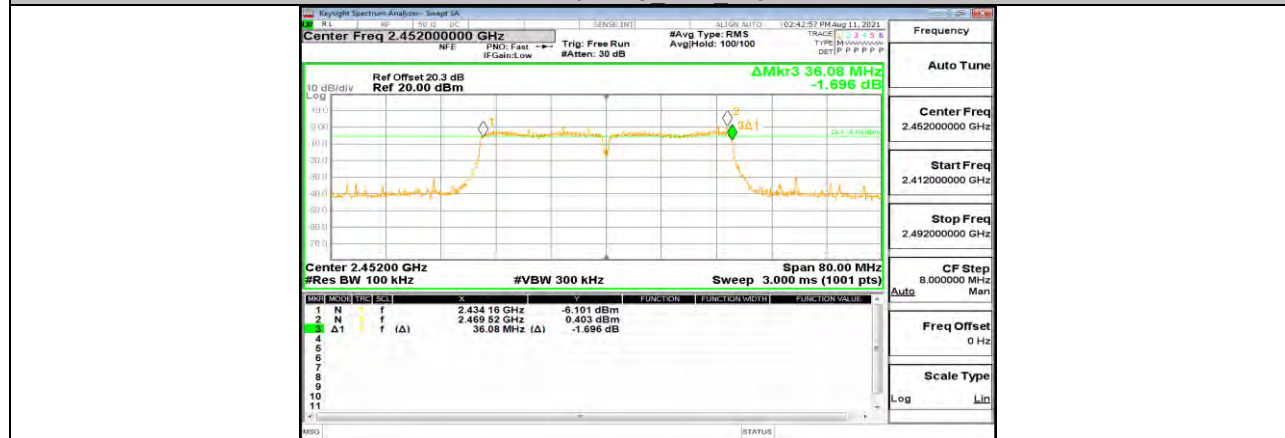

11N40MIMO Ant2 2452

11.2. Appendix B: Occupied Channel Bandwidth

11.2.1. Test Result

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant1	2412	13.547	2405.216	2418.763	PASS
	Ant2	2412	13.545	2405.208	2418.753	PASS
	Ant1	2437	13.463	2430.346	2443.809	PASS
	Ant2	2437	13.463	2430.338	2443.801	PASS
	Ant1	2462	13.561	2455.308	2468.869	PASS
	Ant2	2462	13.557	2455.291	2468.848	PASS
11G	Ant1	2412	16.929	2403.567	2420.496	PASS
	Ant2	2412	16.959	2403.566	2420.525	PASS
	Ant1	2437	16.981	2428.558	2445.539	PASS
	Ant2	2437	16.945	2428.577	2445.522	PASS
	Ant1	2462	16.931	2453.616	2470.547	PASS
	Ant2	2462	16.958	2453.593	2470.551	PASS
11N20MIMO	Ant1	2412	17.849	2403.090	2420.939	PASS
	Ant2	2412	17.815	2403.088	2420.903	PASS
	Ant1	2437	17.833	2428.130	2445.963	PASS
	Ant2	2437	17.815	2428.139	2445.954	PASS
	Ant1	2462	17.870	2453.126	2470.996	PASS
	Ant2	2462	17.855	2453.115	2470.970	PASS
11N40MIMO	Ant1	2422	36.332	2403.913	2440.245	PASS
	Ant2	2422	36.369	2403.877	2440.246	PASS
	Ant1	2437	36.337	2418.938	2455.275	PASS
	Ant2	2437	36.317	2418.917	2455.234	PASS
	Ant1	2452	36.420	2433.888	2470.308	PASS
	Ant2	2452	36.370	2433.871	2470.241	PASS

11.2.2. Test Graphs

















**11.3. Appendix C: Maximum conducted output power****11.3.1. Test Result**

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	16.46	<=30	PASS
	Ant2	2412	16.46	<=30	PASS
	Ant1	2437	16.77	<=30	PASS
	Ant2	2437	16.60	<=30	PASS
	Ant1	2462	16.54	<=30	PASS
	Ant2	2462	16.38	<=30	PASS
11G	Ant1	2412	15.48	<=30	PASS
	Ant2	2412	15.40	<=30	PASS
	Ant1	2437	15.75	<=30	PASS
	Ant2	2437	15.31	<=30	PASS
	Ant1	2462	15.45	<=30	PASS
	Ant2	2462	15.28	<=30	PASS
11N20MIMO	Ant1	2412	13.15	<=30	PASS
	Ant2	2412	12.67	<=30	PASS
	total	2412	15.93	<=30	PASS
	Ant1	2437	13.23	<=30	PASS
	Ant2	2437	12.90	<=30	PASS
	total	2437	16.08	<=30	PASS
	Ant1	2462	13.28	<=30	PASS
	Ant2	2462	13.04	<=30	PASS
11N40MIMO	total	2462	16.17	<=30	PASS
	Ant1	2422	9.90	<=30	PASS
	Ant2	2422	9.50	<=30	PASS
	total	2422	12.71	<=30	PASS
	Ant1	2437	9.97	<=30	PASS
	Ant2	2437	9.49	<=30	PASS
	total	2437	12.75	<=30	PASS
	Ant1	2452	8.94	<=30	PASS
	Ant2	2452	8.58	<=30	PASS
	total	2452	11.77	<=30	PASS

Note: 1. Conducted Power=Meas. Level+ Correction Factor


2. The Duty Cycle Factor (refer to section 7.1) had already compensated to the test data.

**11.4. Appendix D: Maximum power spectral density****11.4.1. Test Result**


Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-2.23	<=8	PASS
		2437	-2.51	<=8	PASS
		2462	-2.22	<=8	PASS
11G	Ant1	2412	-10.25	<=8	PASS
		2437	-10.54	<=8	PASS
		2462	-10.87	<=8	PASS
11N20MIMO	Ant1	2412	-11.73	<=8	PASS
	Ant2	2412	-12.77	<=8	PASS
	total	2412	-9.21	<=8	PASS
	Ant1	2437	-11.86	<=8	PASS
	Ant2	2437	-12.27	<=8	PASS
	total	2437	-9.05	<=8	PASS
	Ant1	2462	-11.22	<=8	PASS
	Ant2	2462	-12.15	<=8	PASS
	total	2462	-8.65	<=8	PASS
11N40MIMO	Ant1	2422	-13.49	<=8	PASS
	Ant2	2422	-12.95	<=8	PASS
	total	2422	-10.20	<=8	PASS
	Ant1	2437	-13.49	<=8	PASS
	Ant2	2437	-13.52	<=8	PASS
	total	2437	-10.49	<=8	PASS
	Ant1	2452	-13.01	<=8	PASS
	Ant2	2452	-13.44	<=8	PASS
	total	2452	-10.21	<=8	PASS


Note: For 802.11b&g, both antennas have been tested, only the worst data was recorded in the report.


11.4.2. Test Graphs

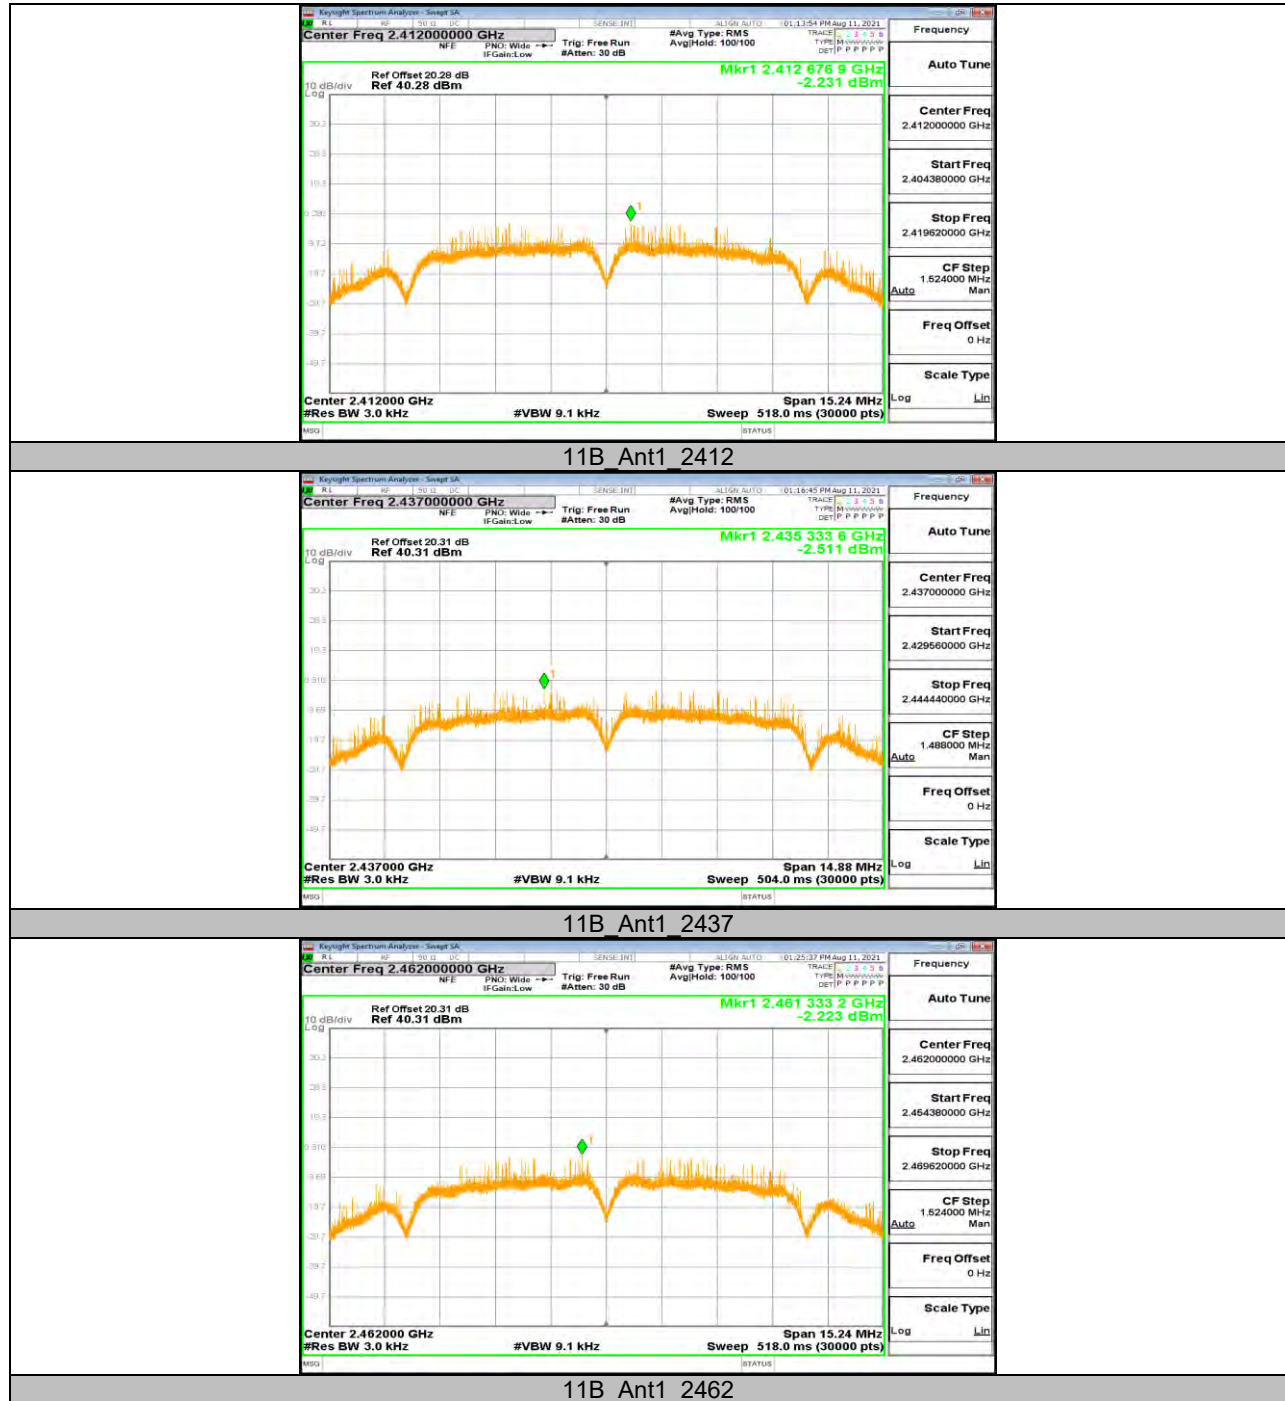




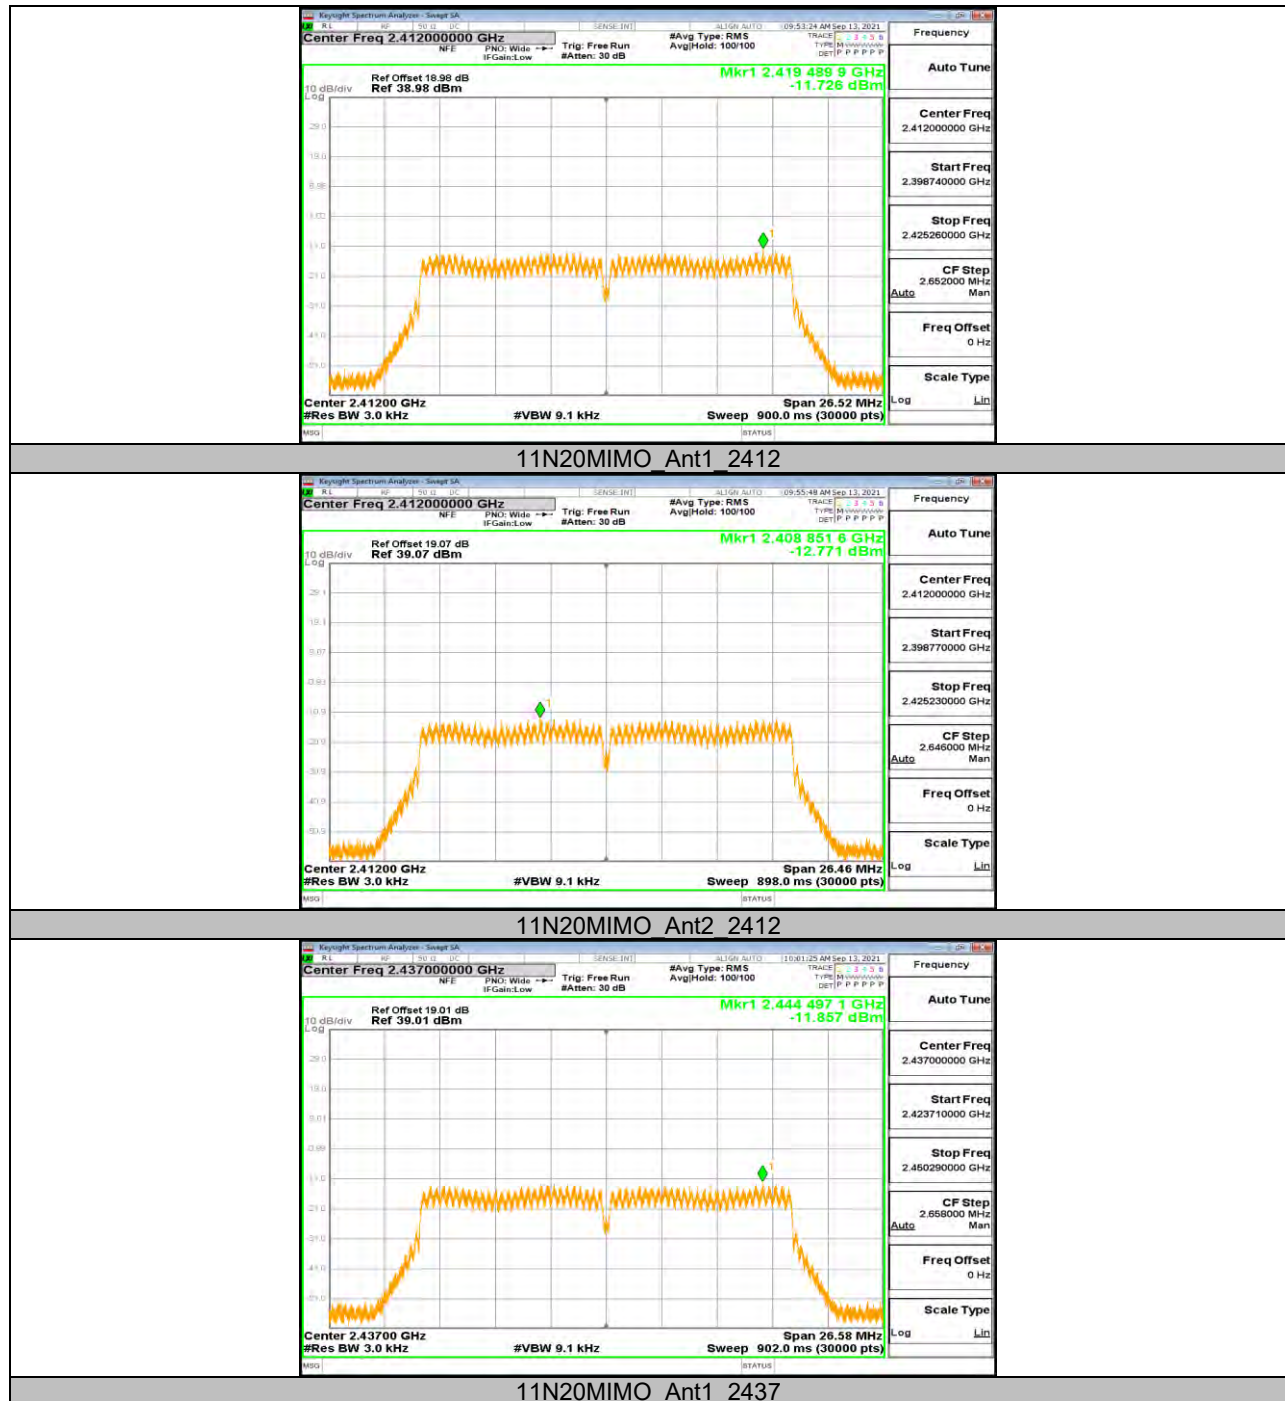

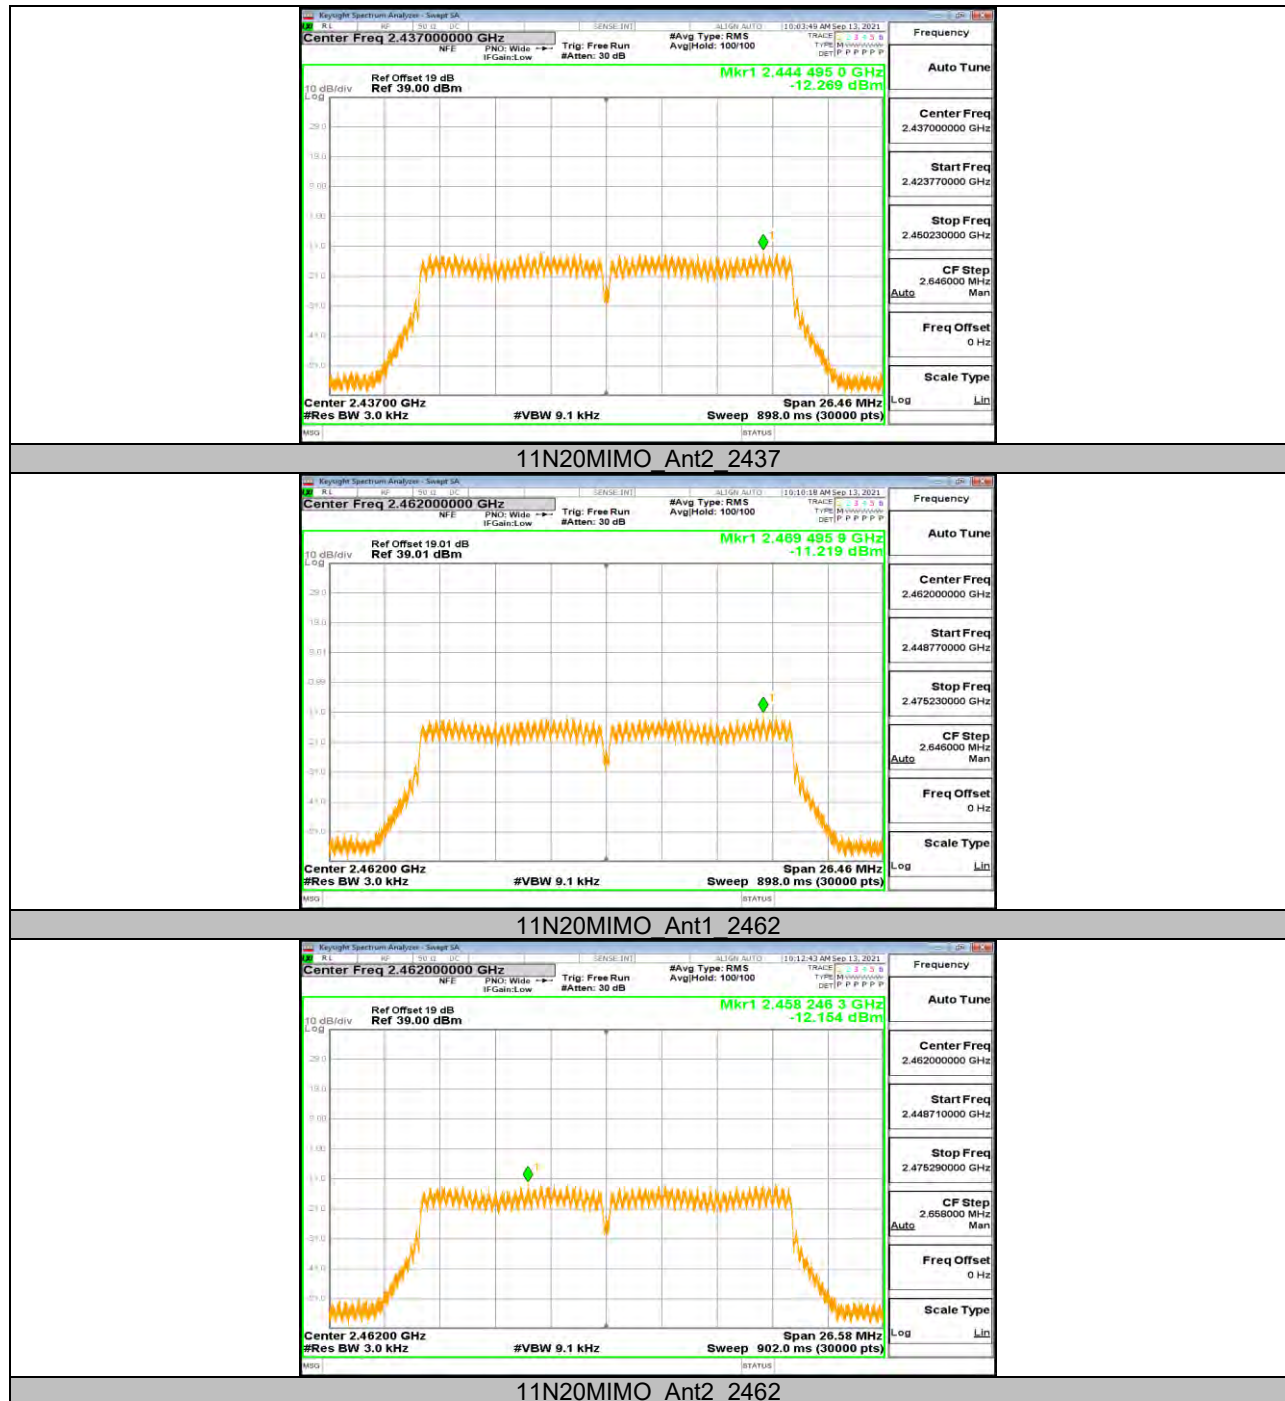

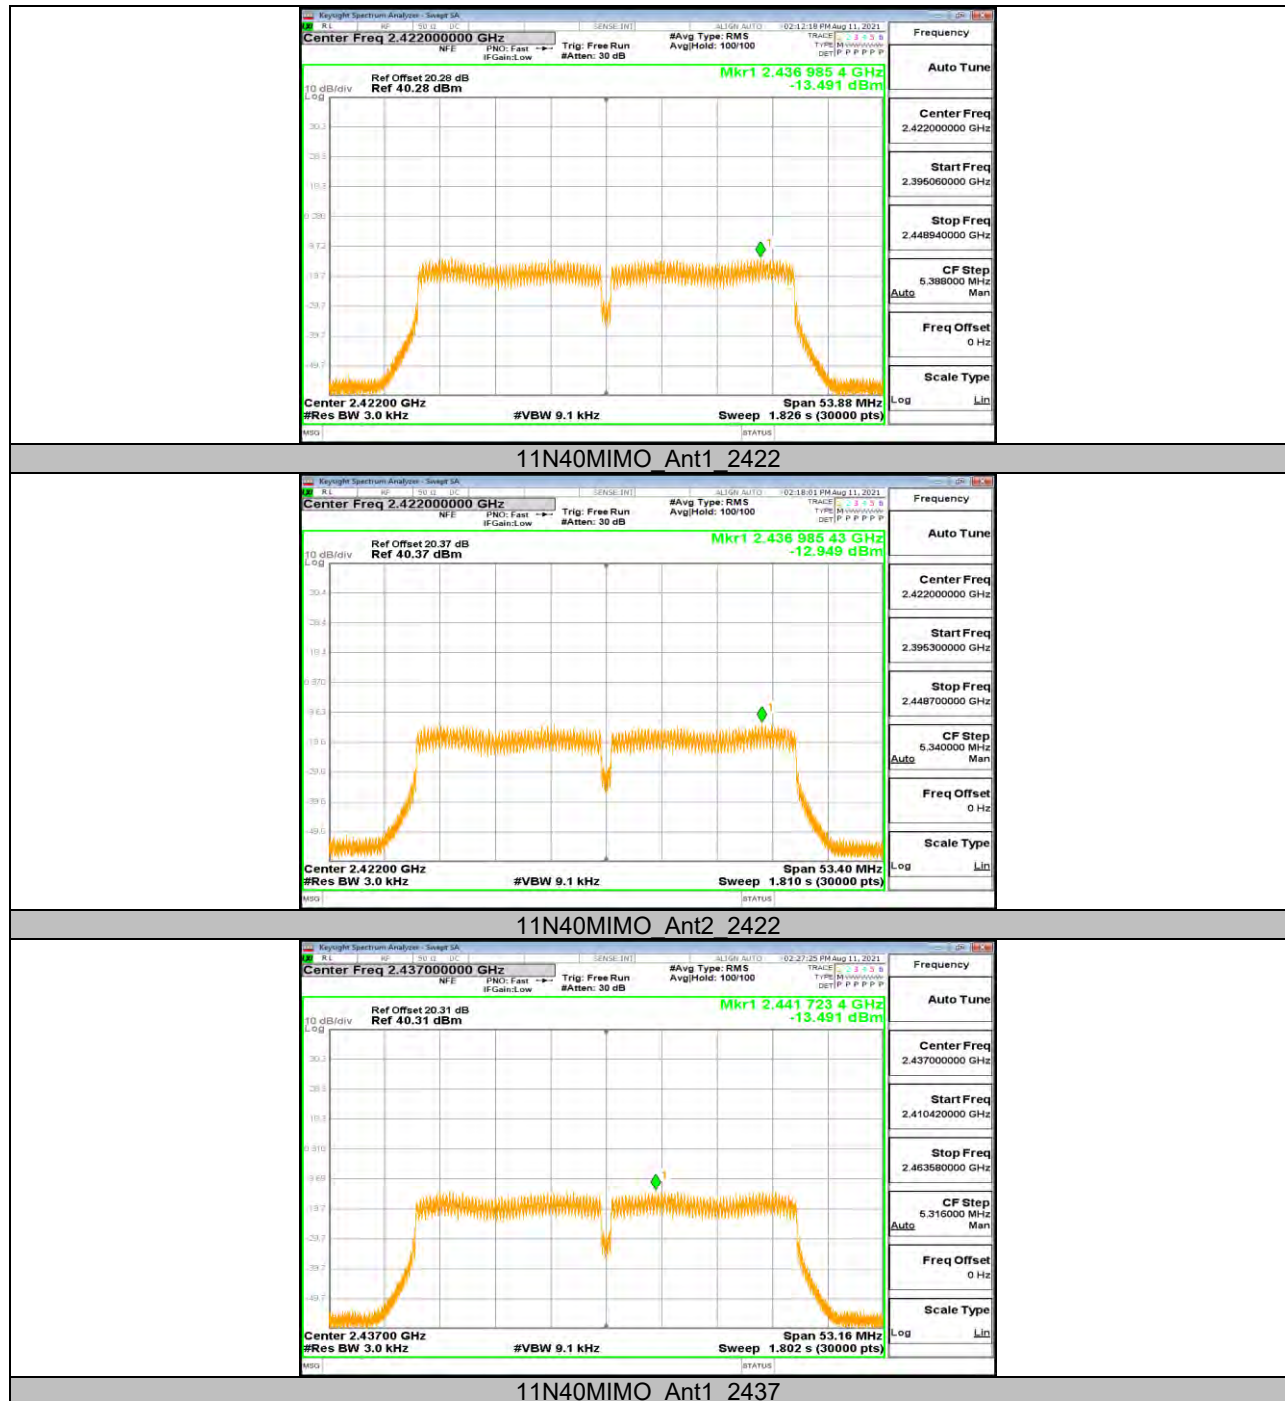

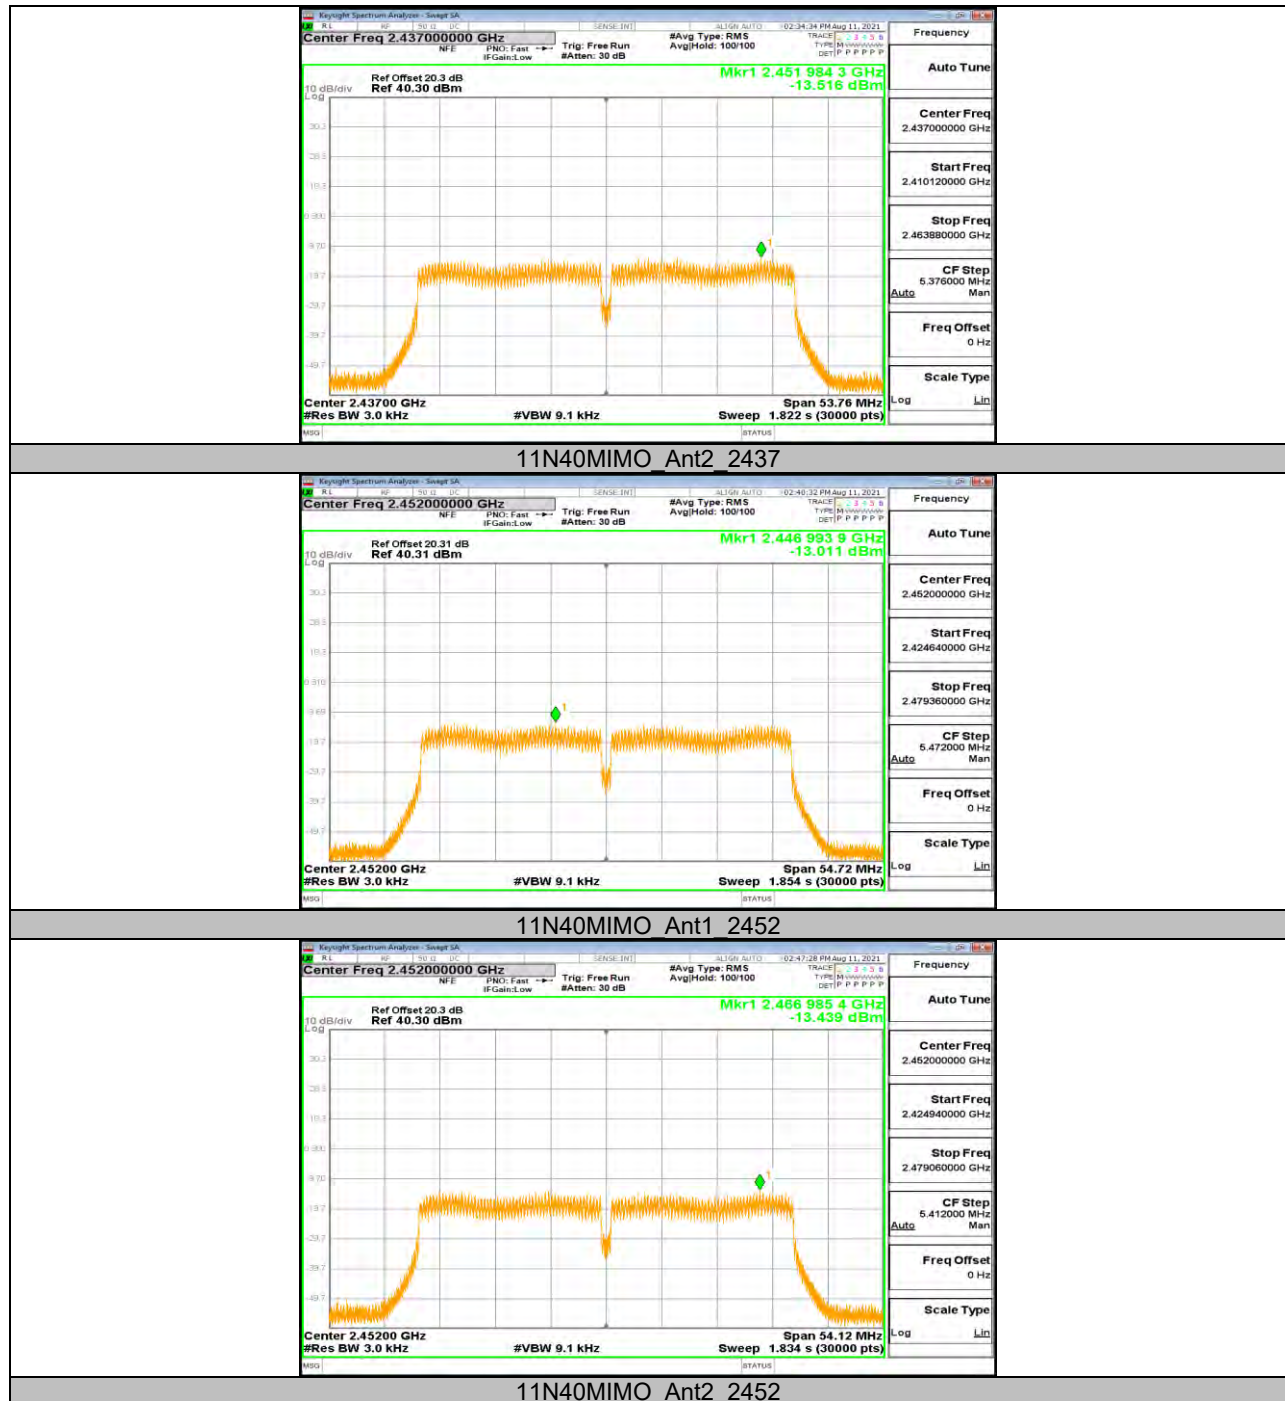



11.5. Appendix E: Band edge measurements

11.5.1. Test Result

Test Mode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	6.54	-38.84	<=-23.47	PASS
		High	2462	7.08	-39.98	<=-22.92	PASS
11G	Ant1	Low	2412	3.80	-38.05	<=-26.2	PASS
		High	2462	4.92	-38.71	<=-25.09	PASS
11N20MIMO	Ant1	Low	2412	2.61	-37.44	<=-27.39	PASS
	Ant2	Low	2412	2.90	-33.03	<=-27.1	PASS
	Ant1	High	2462	2.04	-40.23	<=-27.96	PASS
	Ant2	High	2462	2.69	-38.75	<=-27.31	PASS
11N40MIMO	Ant1	Low	2422	1.24	-31.25	<=-28.76	PASS
	Ant2	Low	2422	0.82	-31.04	<=-29.18	PASS
	Ant1	High	2452	1.12	-36.53	<=-28.88	PASS
	Ant2	High	2452	0.86	-32.94	<=-29.14	PASS


Note: For 802.11b&g, both antennas have been tested, only the worst data was recorded in the report.




11.5.2. Test Graphs






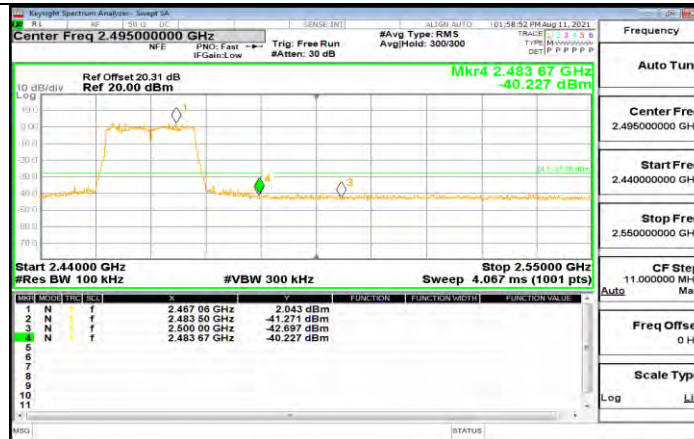


11N20MIMO Ant1 High 2462

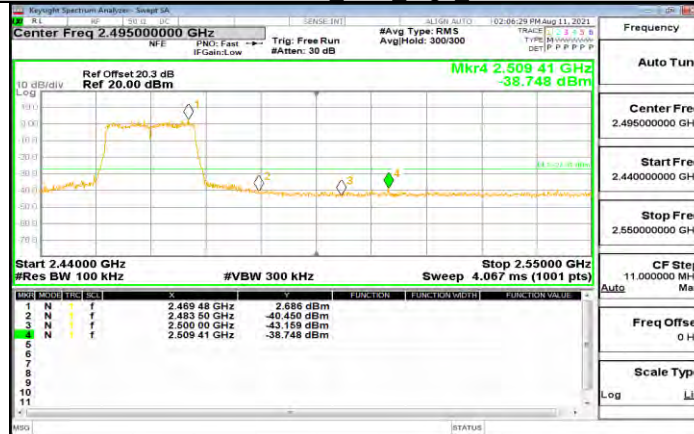

11N20MIMO Ant2 High 2462

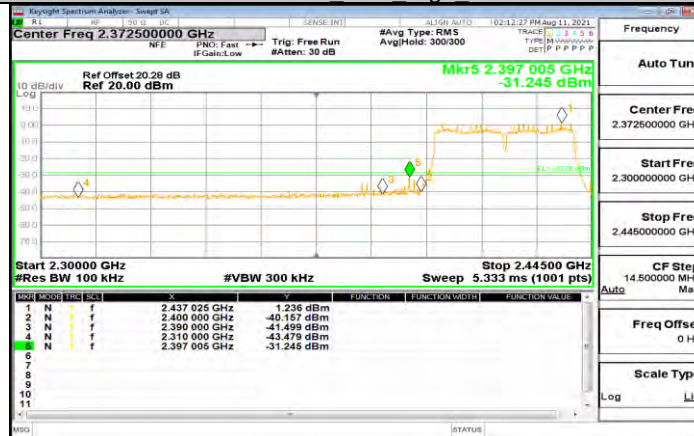

11N40MIMO Ant1 Low 2422

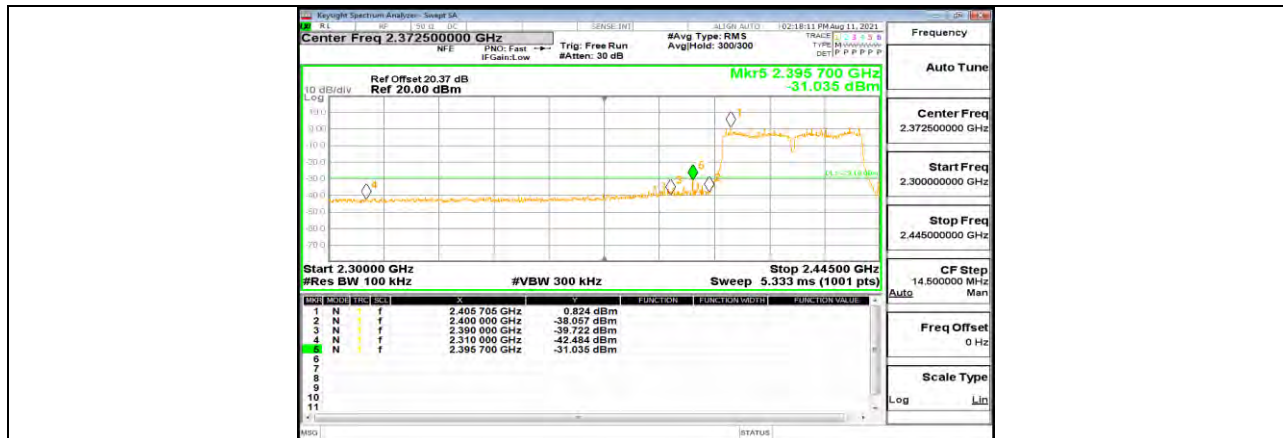

11N40MIMO Ant2 Low 2422



11N40MIMO Ant1 High 2452



11N40MIMO Ant2 High 2452

**11.6. Appendix F: Conducted Spurious Emission****11.6.1. Test Result**

Test Mode	Antenna	Channel	FreqRange [Mhz]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	6.78	---	PASS
			30~1000	-41.96	<=-23.22	PASS
			1000~26500	-42.57	<=-23.22	PASS
		2437	Reference	6.60	---	PASS
			30~1000	-43.73	<=-23.4	PASS
			1000~26500	-42.08	<=-23.4	PASS
		2462	Reference	6.34	---	PASS
			30~1000	-46.75	<=-23.66	PASS
			1000~26500	-43.1	<=-23.66	PASS
11G	Ant1	2412	Reference	4.51	---	PASS
			30~1000	-46.02	<=-25.49	PASS
			1000~26500	-43.8	<=-25.49	PASS
		2437	Reference	3.19	---	PASS
			30~1000	-46.61	<=-26.81	PASS
			1000~26500	-42.46	<=-26.81	PASS
		2462	Reference	3.59	---	PASS
			30~1000	-48.07	<=-26.41	PASS
			1000~26500	-43.64	<=-26.41	PASS
11N20MIMO	Ant1	2412	Reference	3.44	---	PASS
			30~1000	-48.38	<=-26.56	PASS
			1000~26500	-44.29	<=-26.56	PASS
	Ant2	2412	Reference	2.83	---	PASS
			30~1000	-49.33	<=-27.17	PASS
			1000~26500	-43.22	<=-27.17	PASS
	Ant1	2437	Reference	1.35	---	PASS
			30~1000	-46.99	<=-28.65	PASS
			1000~26500	-43.6	<=-28.65	PASS
	Ant2	2437	Reference	2.82	---	PASS
			30~1000	-50.08	<=-27.18	PASS
			1000~26500	-43.89	<=-27.18	PASS
	Ant1	2462	Reference	3.55	---	PASS
			30~1000	-42.34	<=-26.45	PASS
			1000~26500	-43.14	<=-26.45	PASS
	Ant2	2462	Reference	3.08	---	PASS
			30~1000	-50.34	<=-26.92	PASS
			1000~26500	-43.81	<=-26.92	PASS
11N40MIMO	Ant1	2422	Reference	0.78	---	PASS
			30~1000	-48.84	<=-29.22	PASS
			1000~26500	-42.77	<=-29.22	PASS
	Ant2	2422	Reference	0.66	---	PASS
			30~1000	-47.34	<=-29.34	PASS
			1000~26500	-43.11	<=-29.34	PASS
	Ant1	2437	Reference	0.04	---	PASS
			30~1000	-48.24	<=-29.96	PASS
			1000~26500	-43.48	<=-29.96	PASS
	Ant2	2437	Reference	-0.28	---	PASS
			30~1000	-47.56	<=-30.28	PASS
			1000~26500	-43.29	<=-30.28	PASS
	Ant1	2452	Reference	0.10	---	PASS
			30~1000	-49.26	<=-29.9	PASS
			1000~26500	-44.06	<=-29.9	PASS
	Ant2	2452	Reference	0.81	---	PASS
			30~1000	-47.64	<=-29.19	PASS




			1000~26500	-43.09	<=-29.19	PASS
--	--	--	------------	--------	----------	------


Note: For 802.11b&g, both antennas have been tested, only the worst data was recorded in the report.


11.6.2. Test Graphs






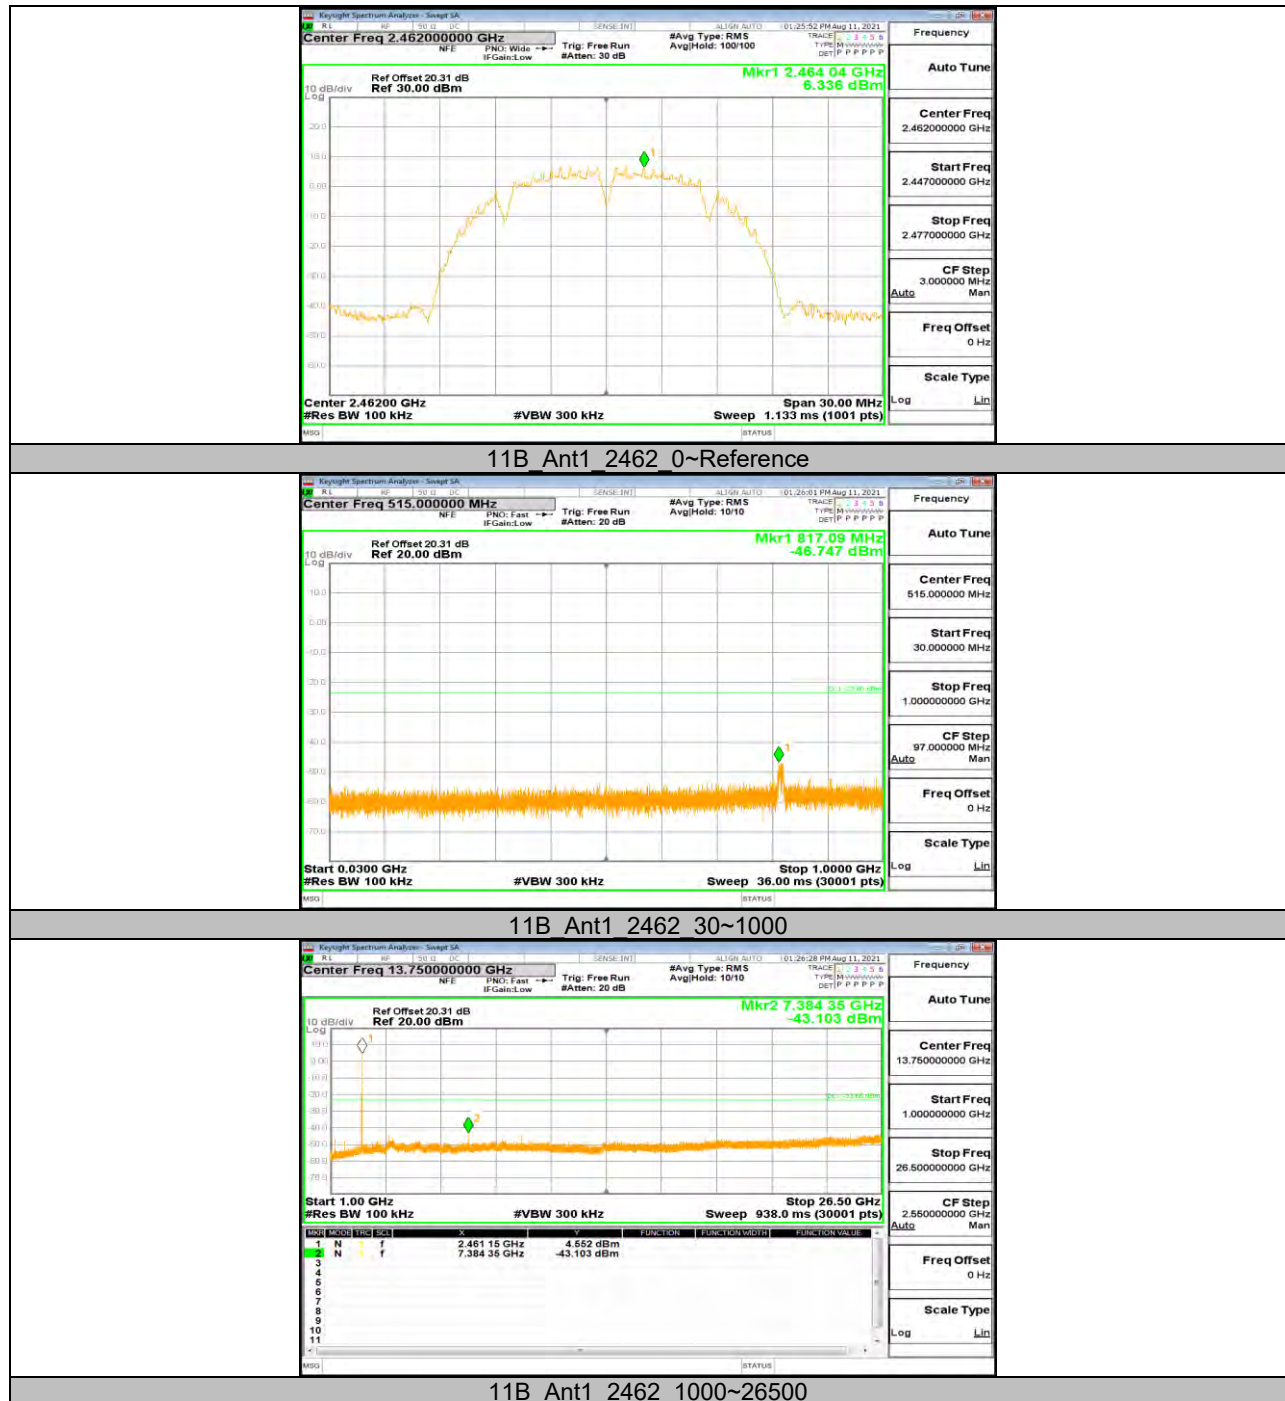


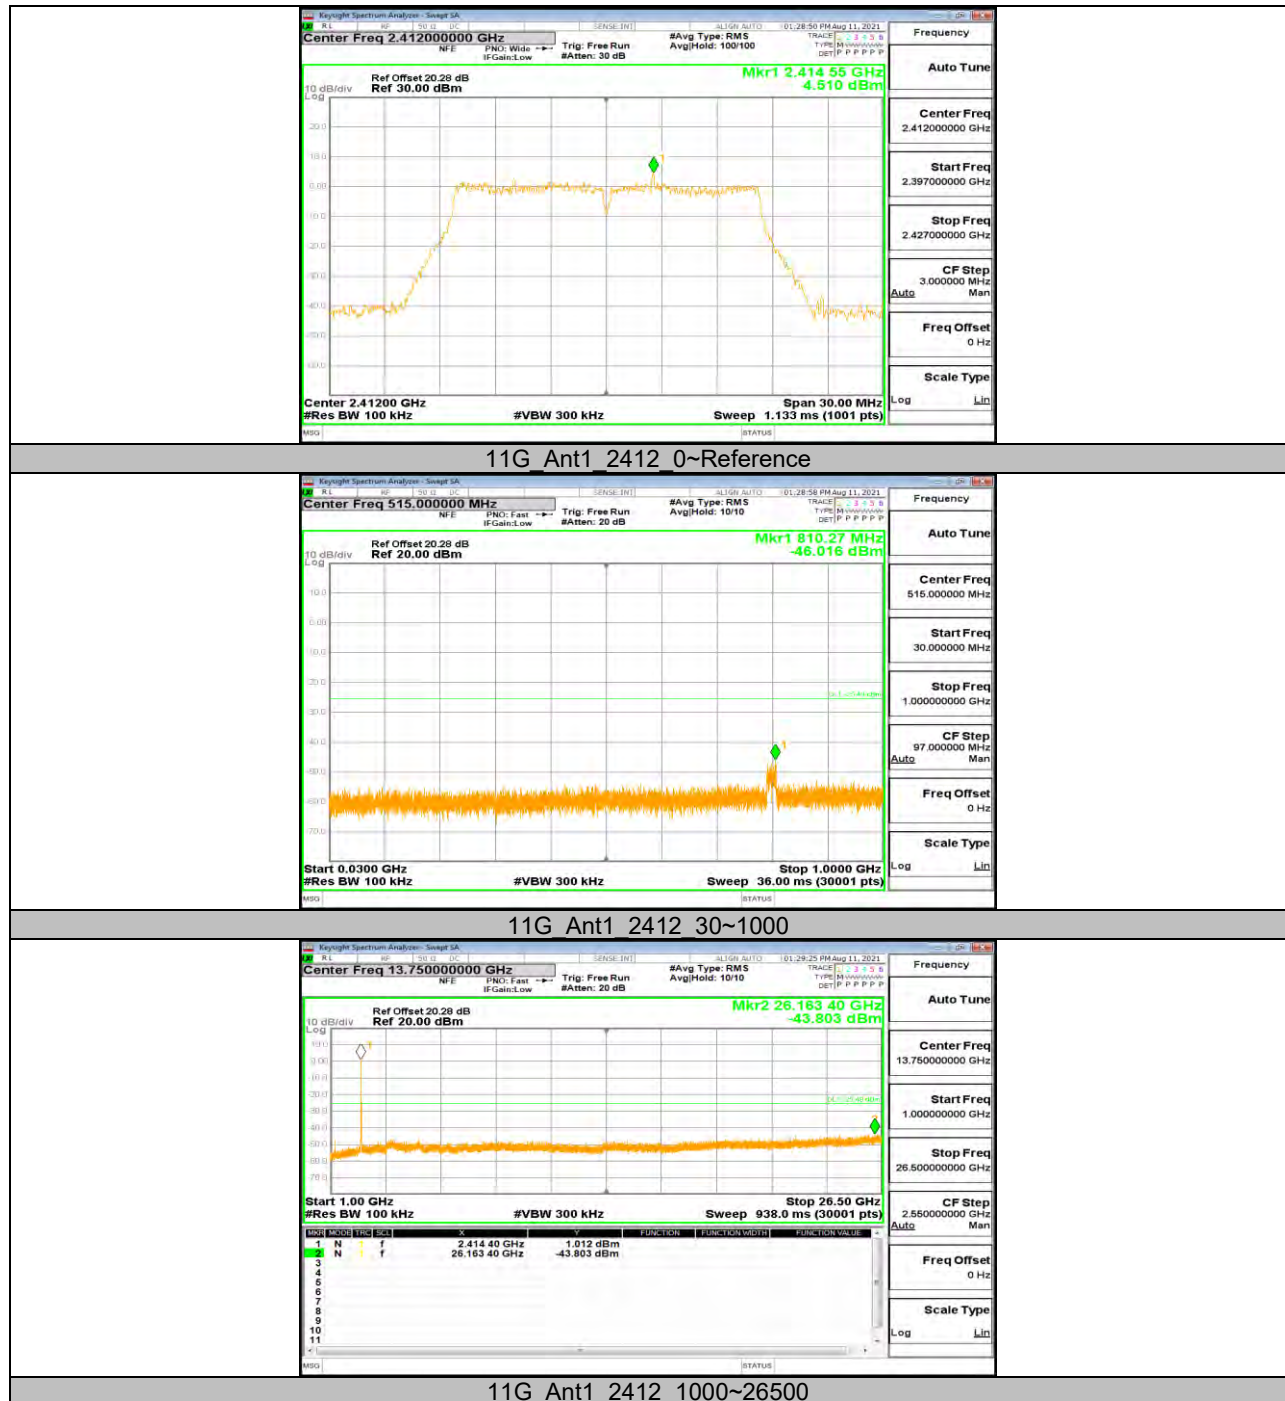


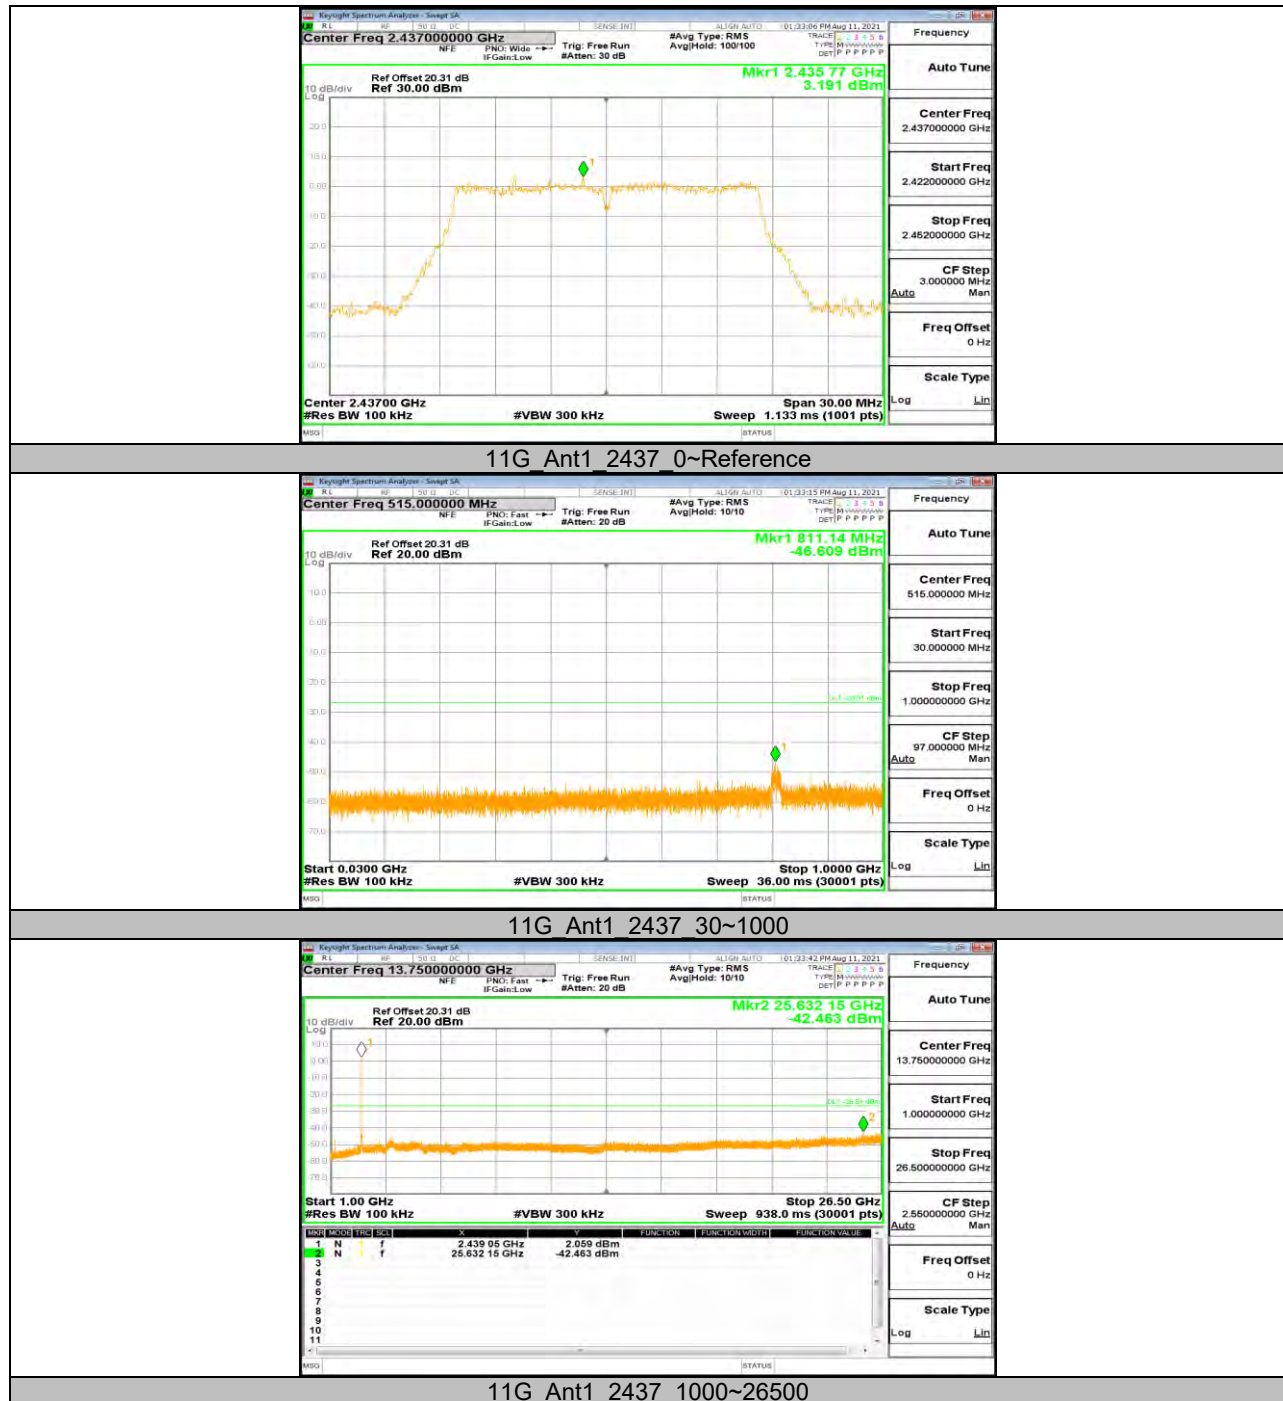


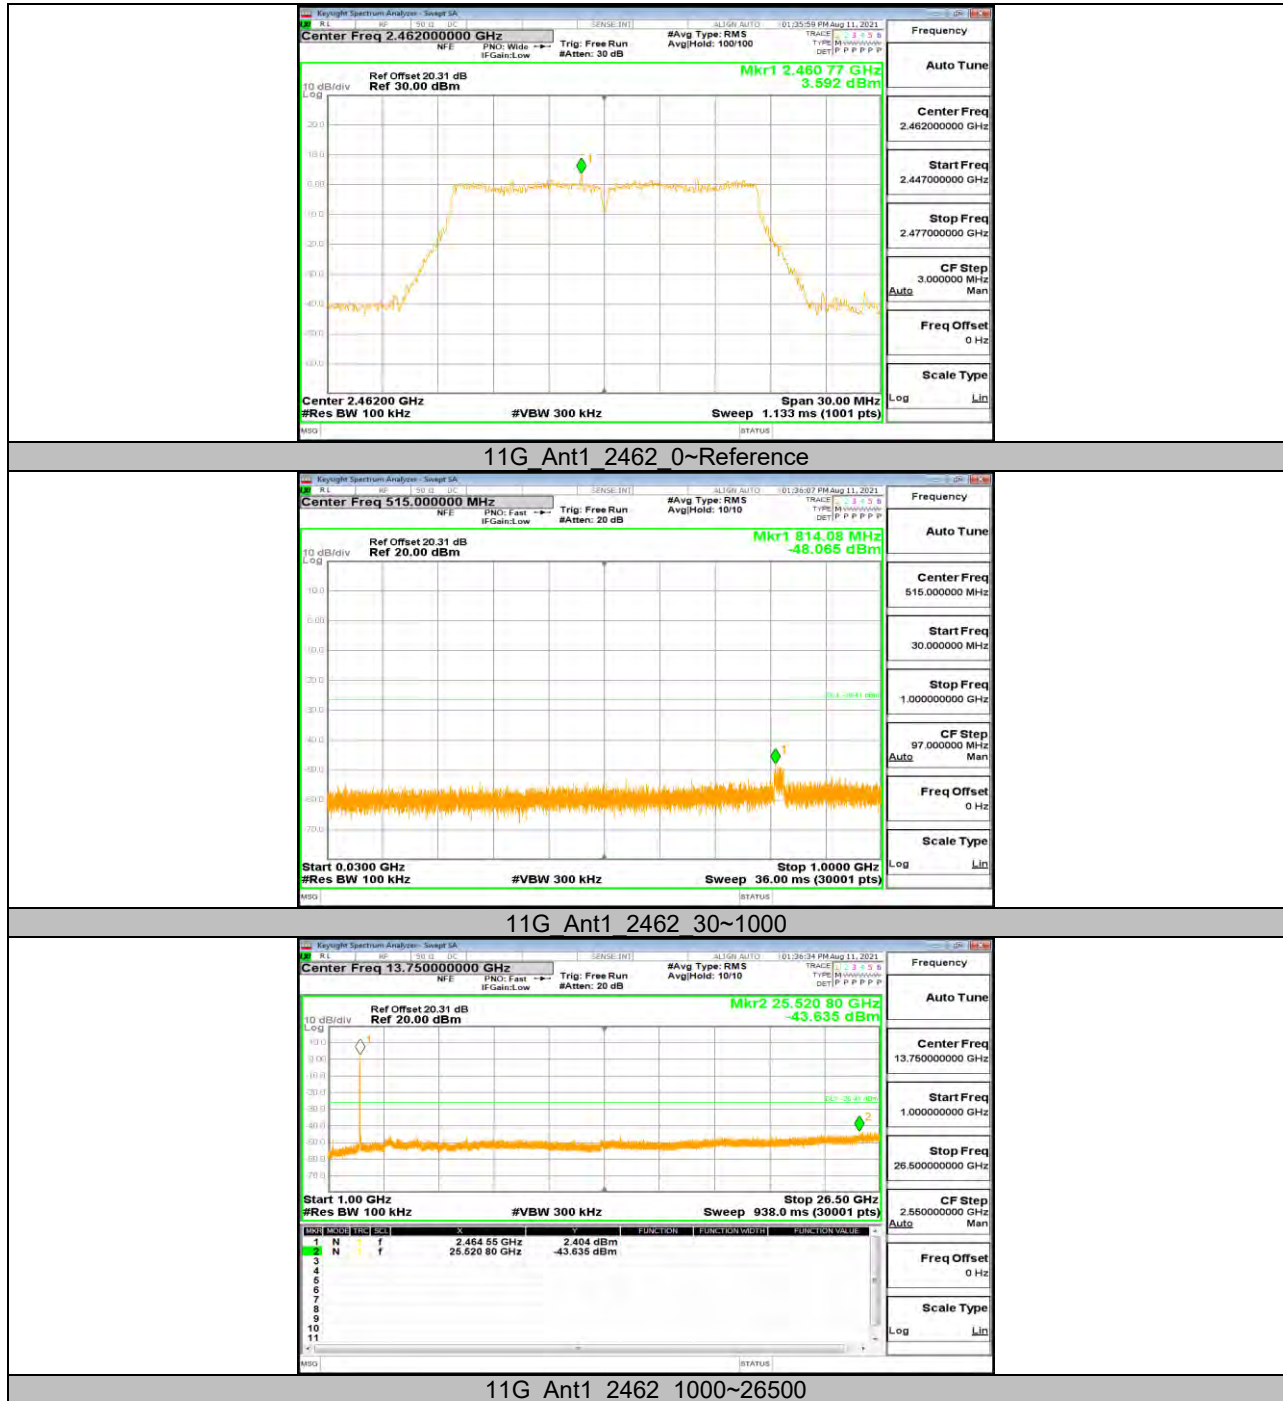




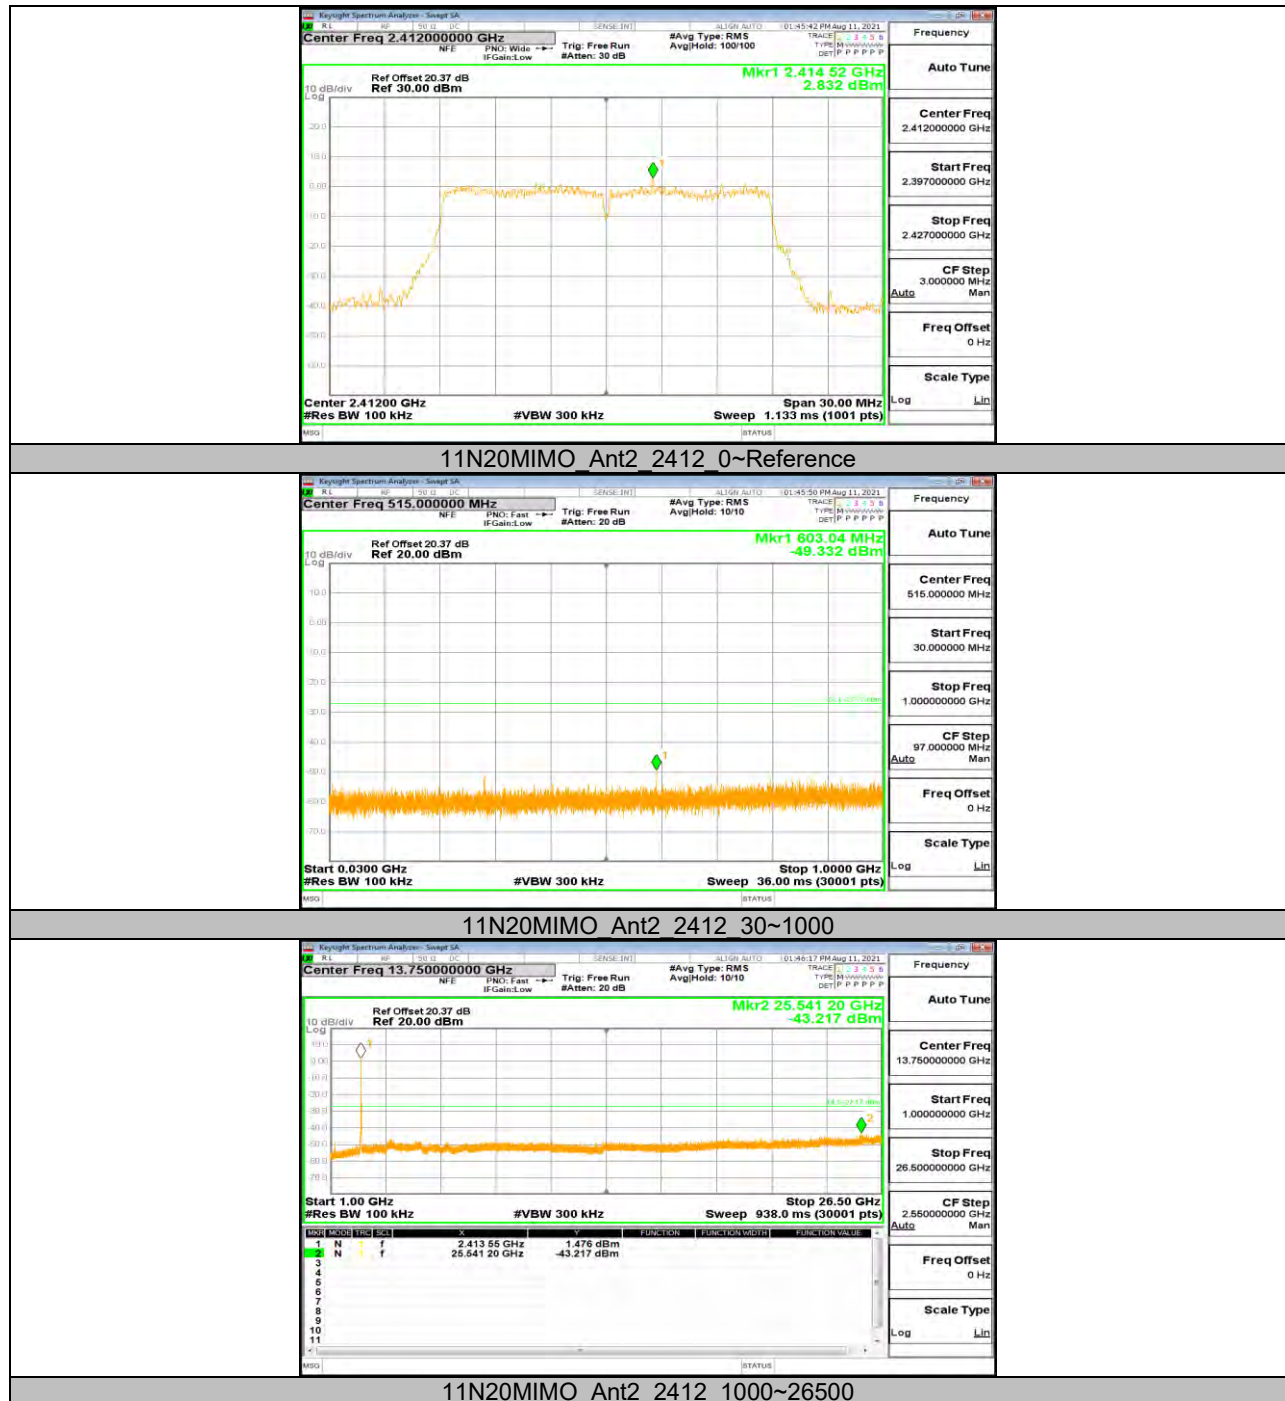

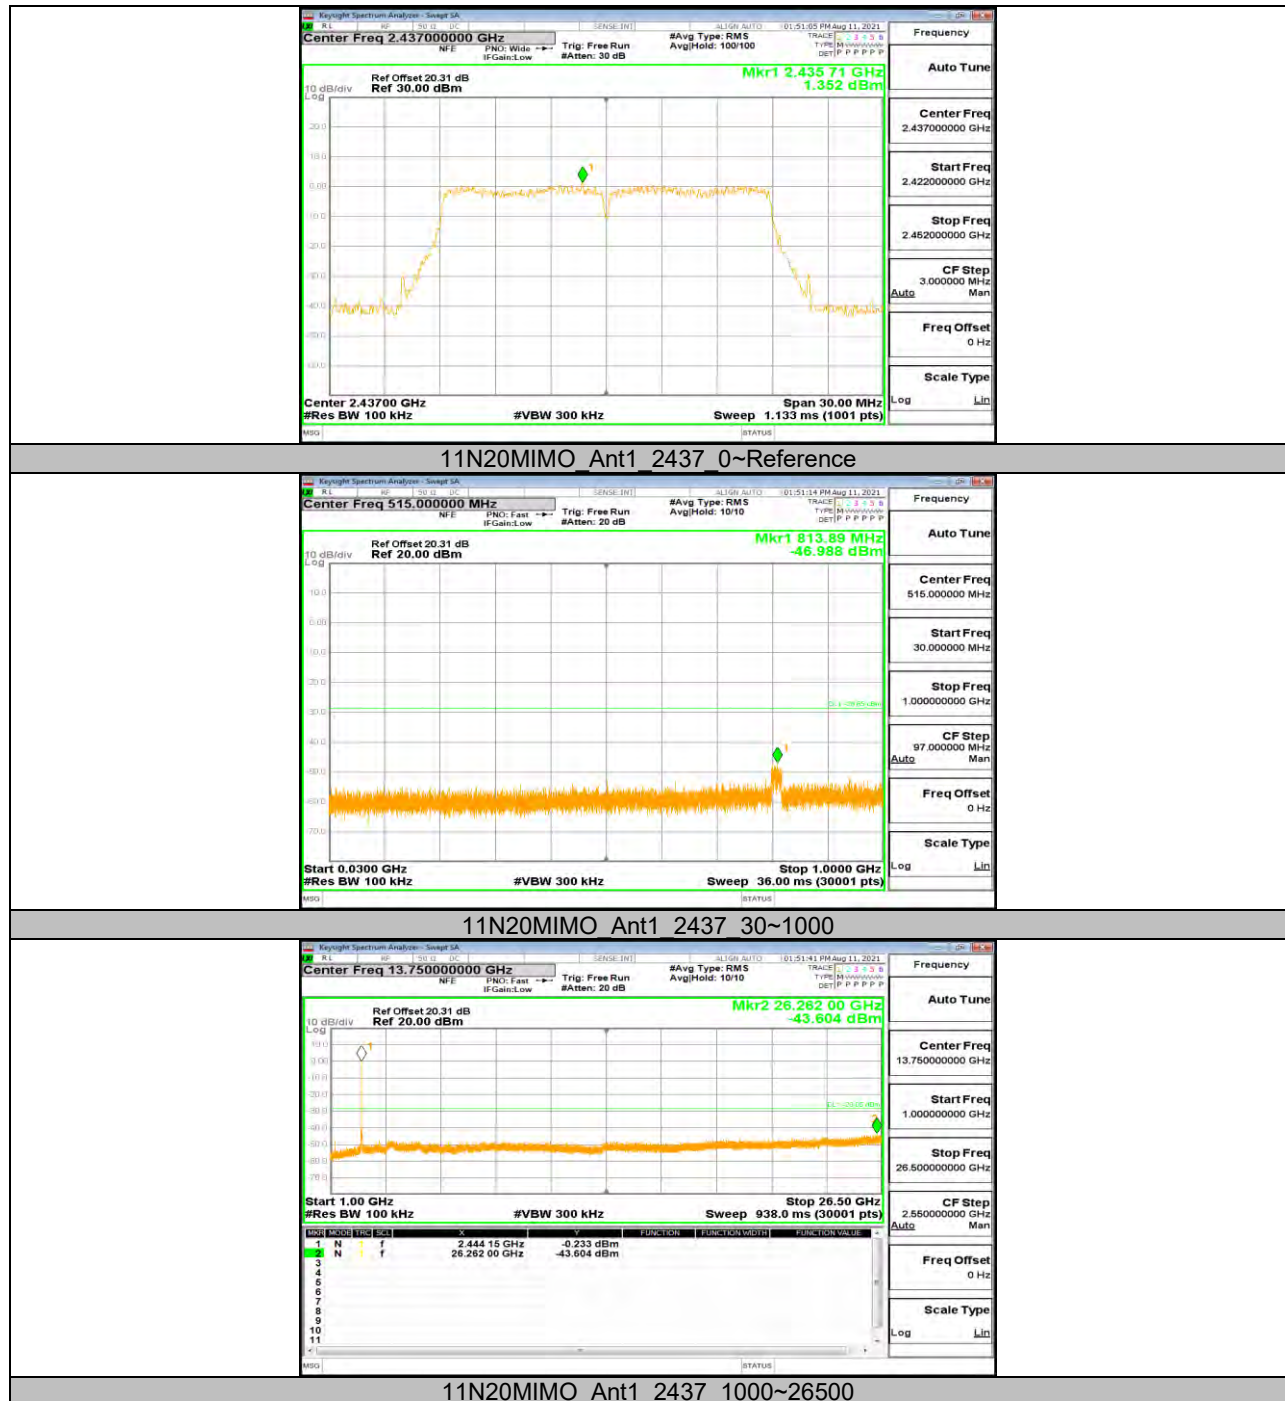


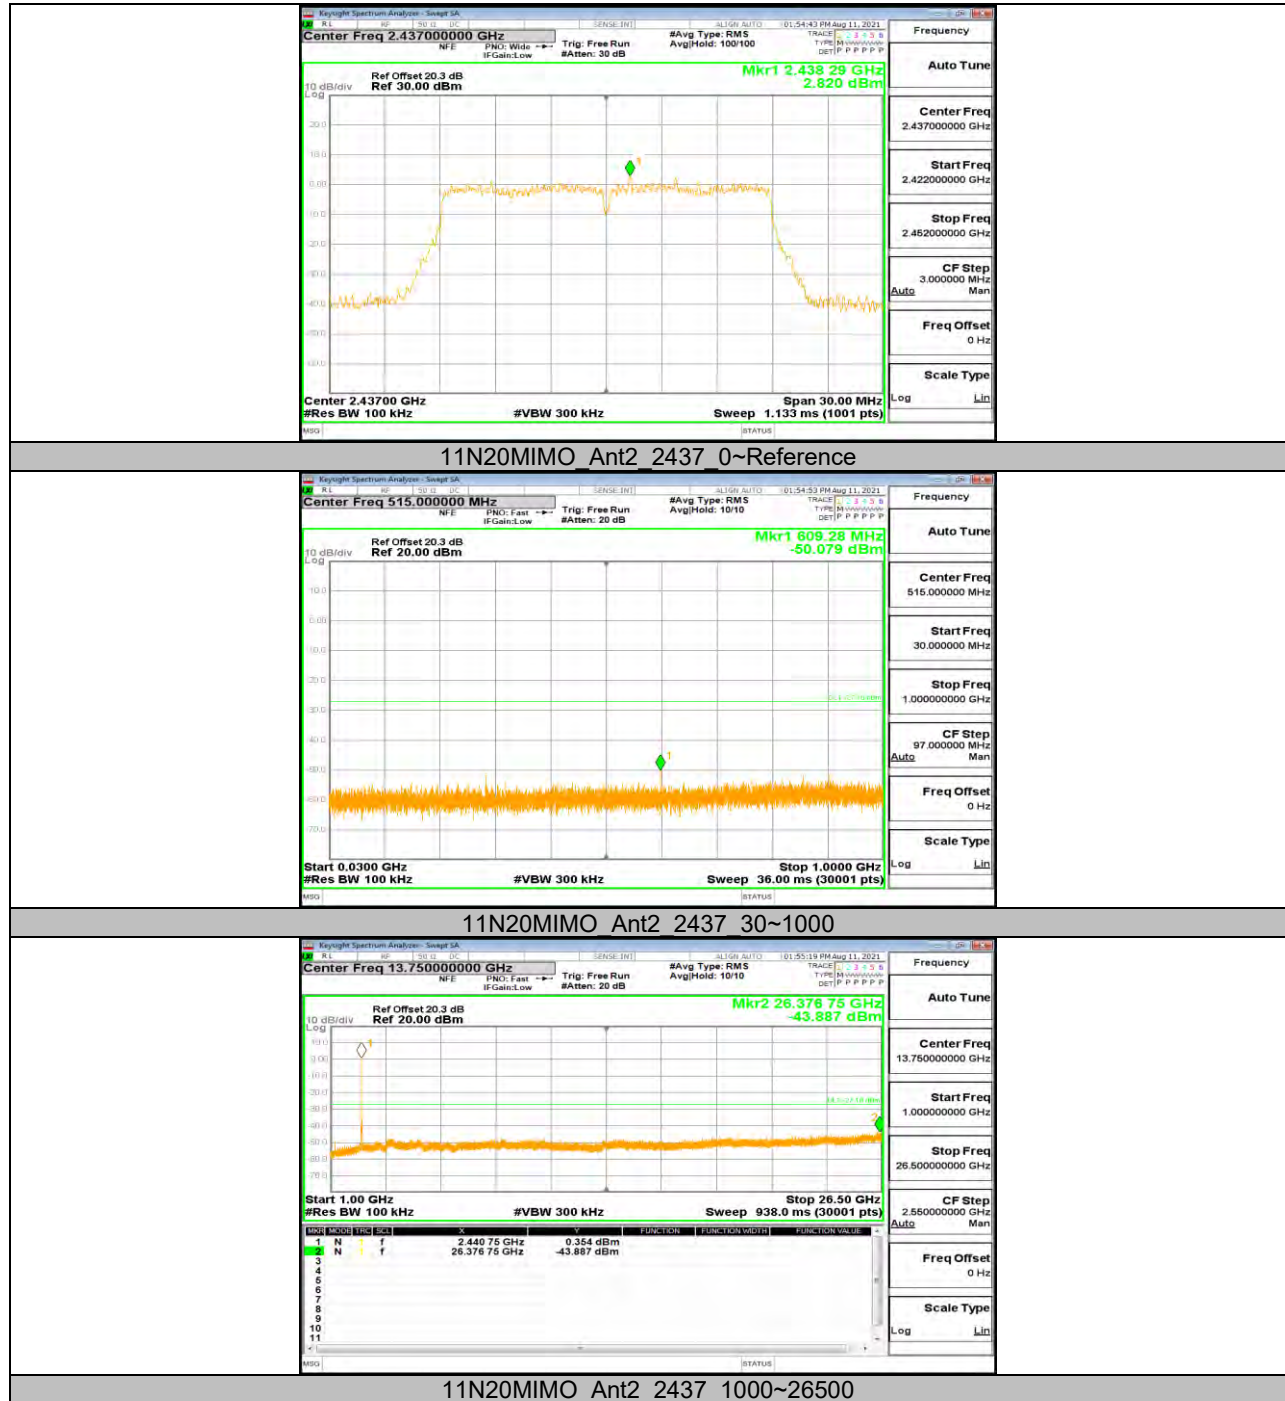




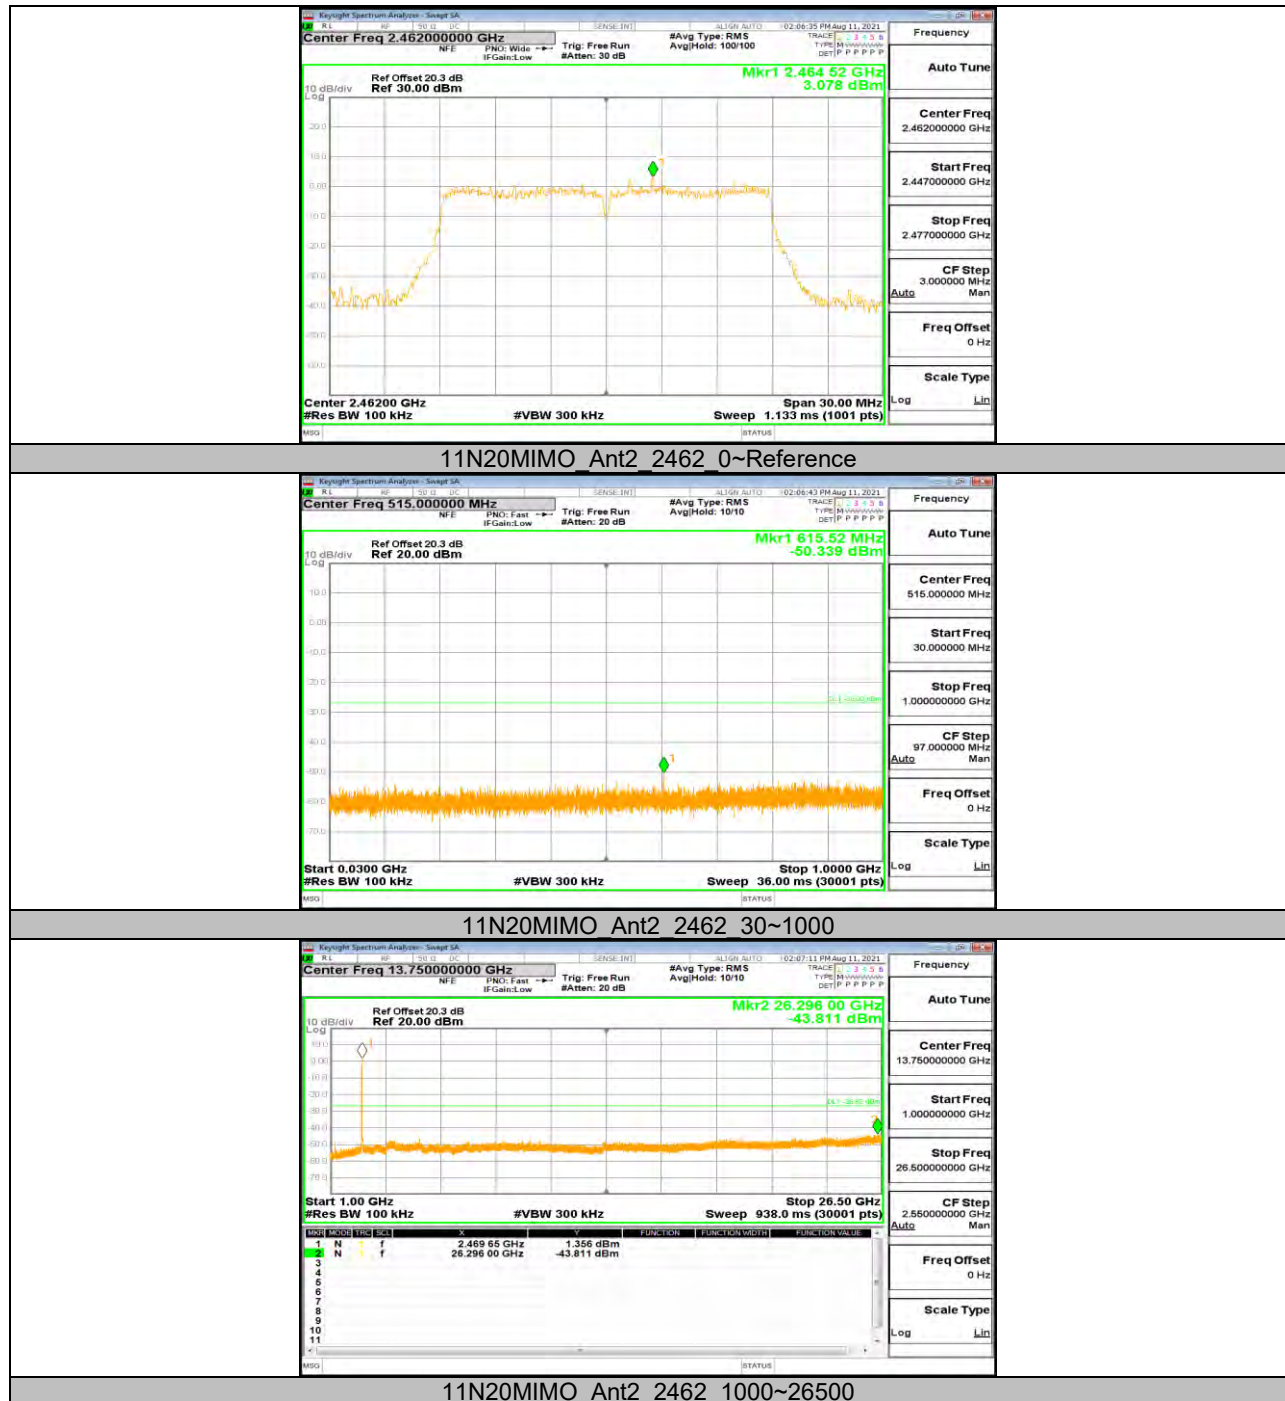





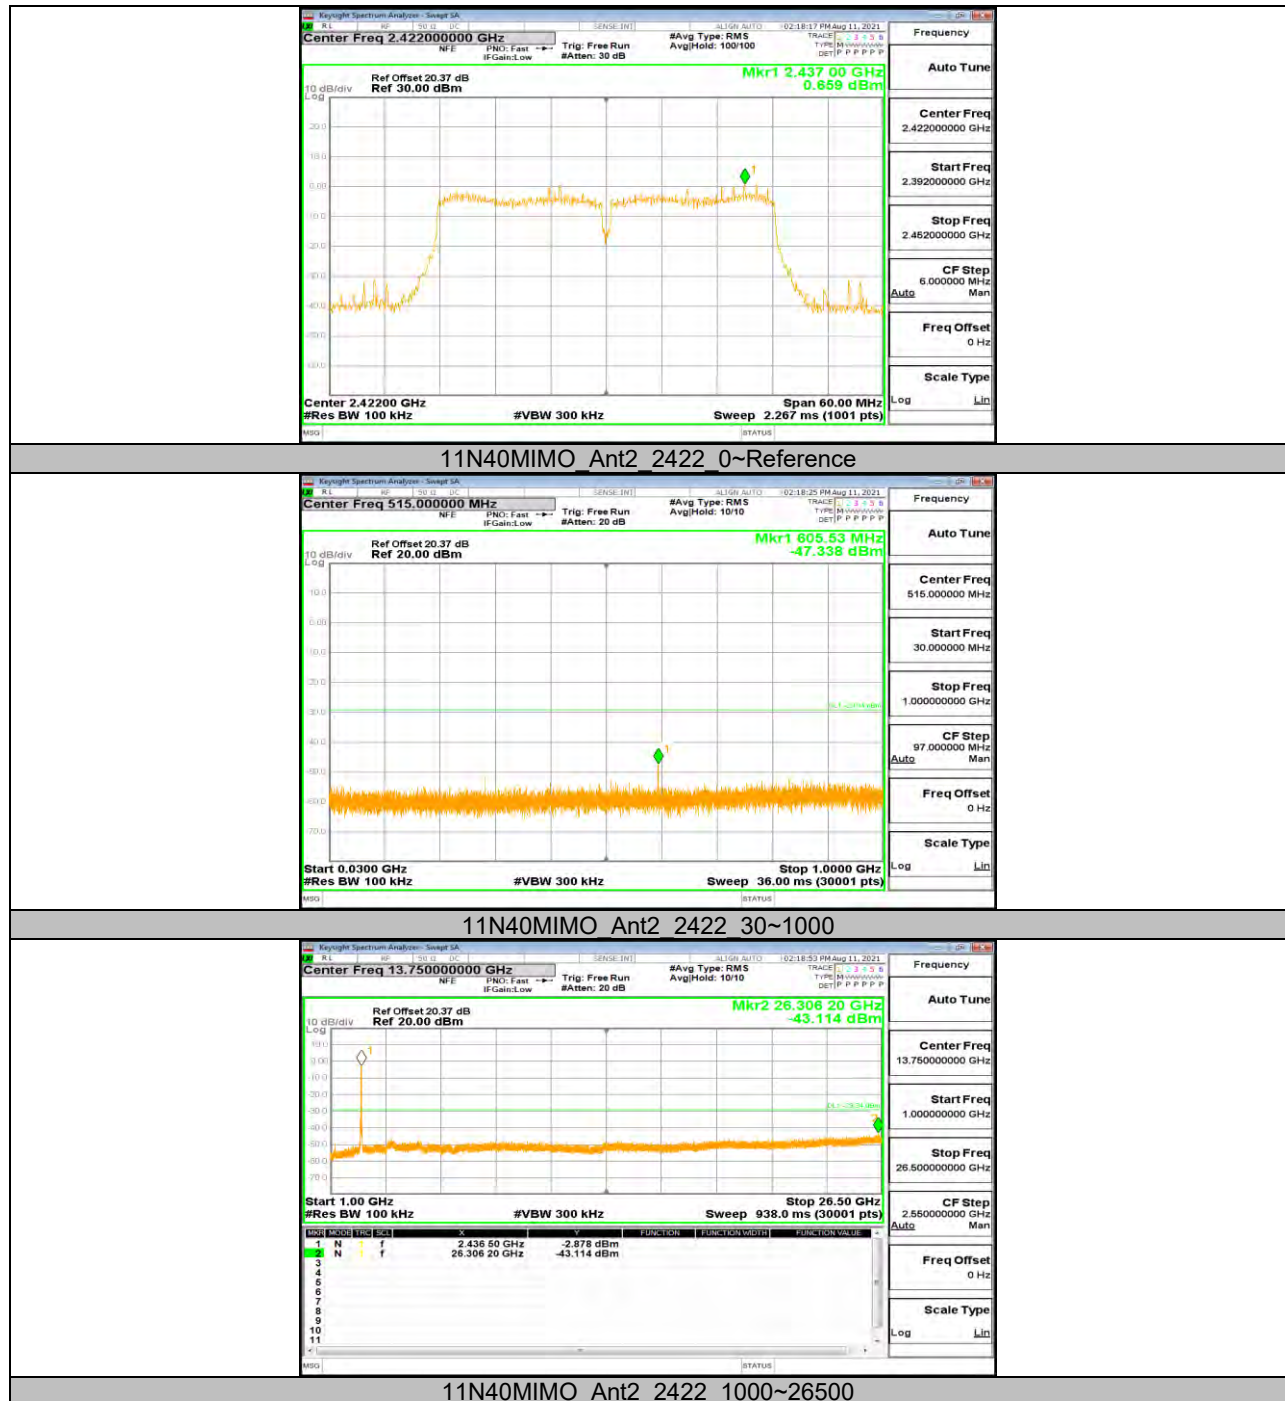



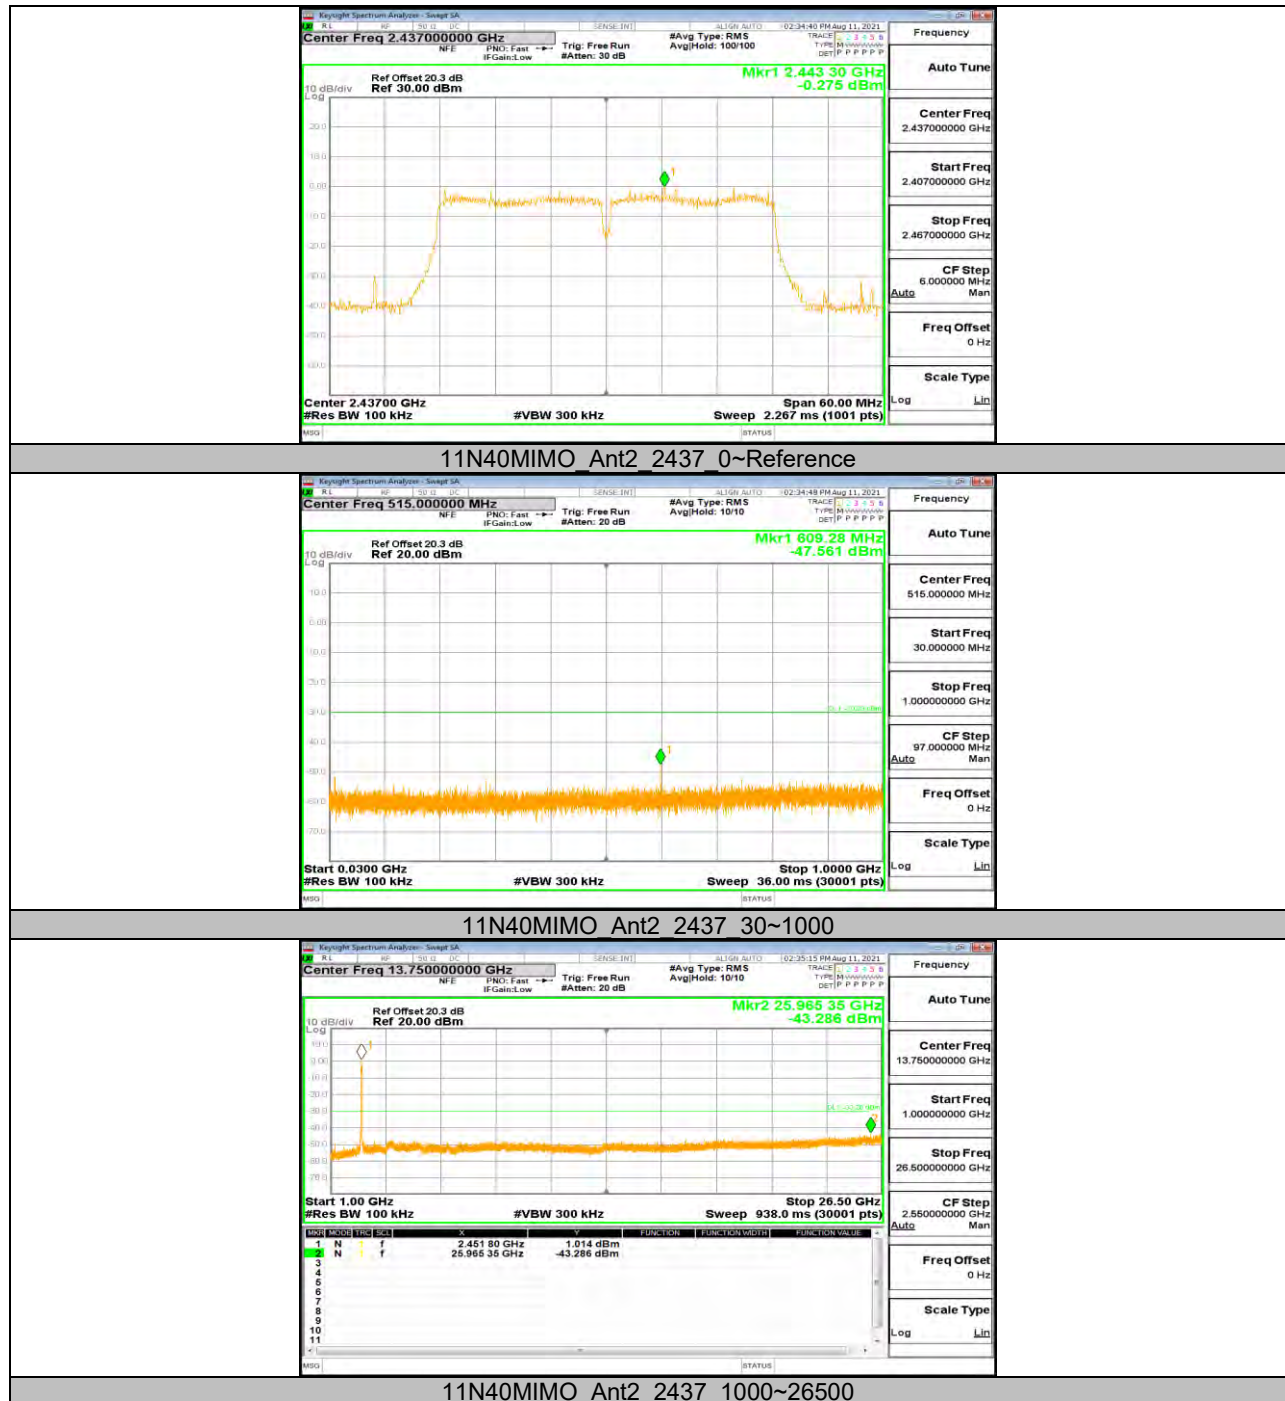

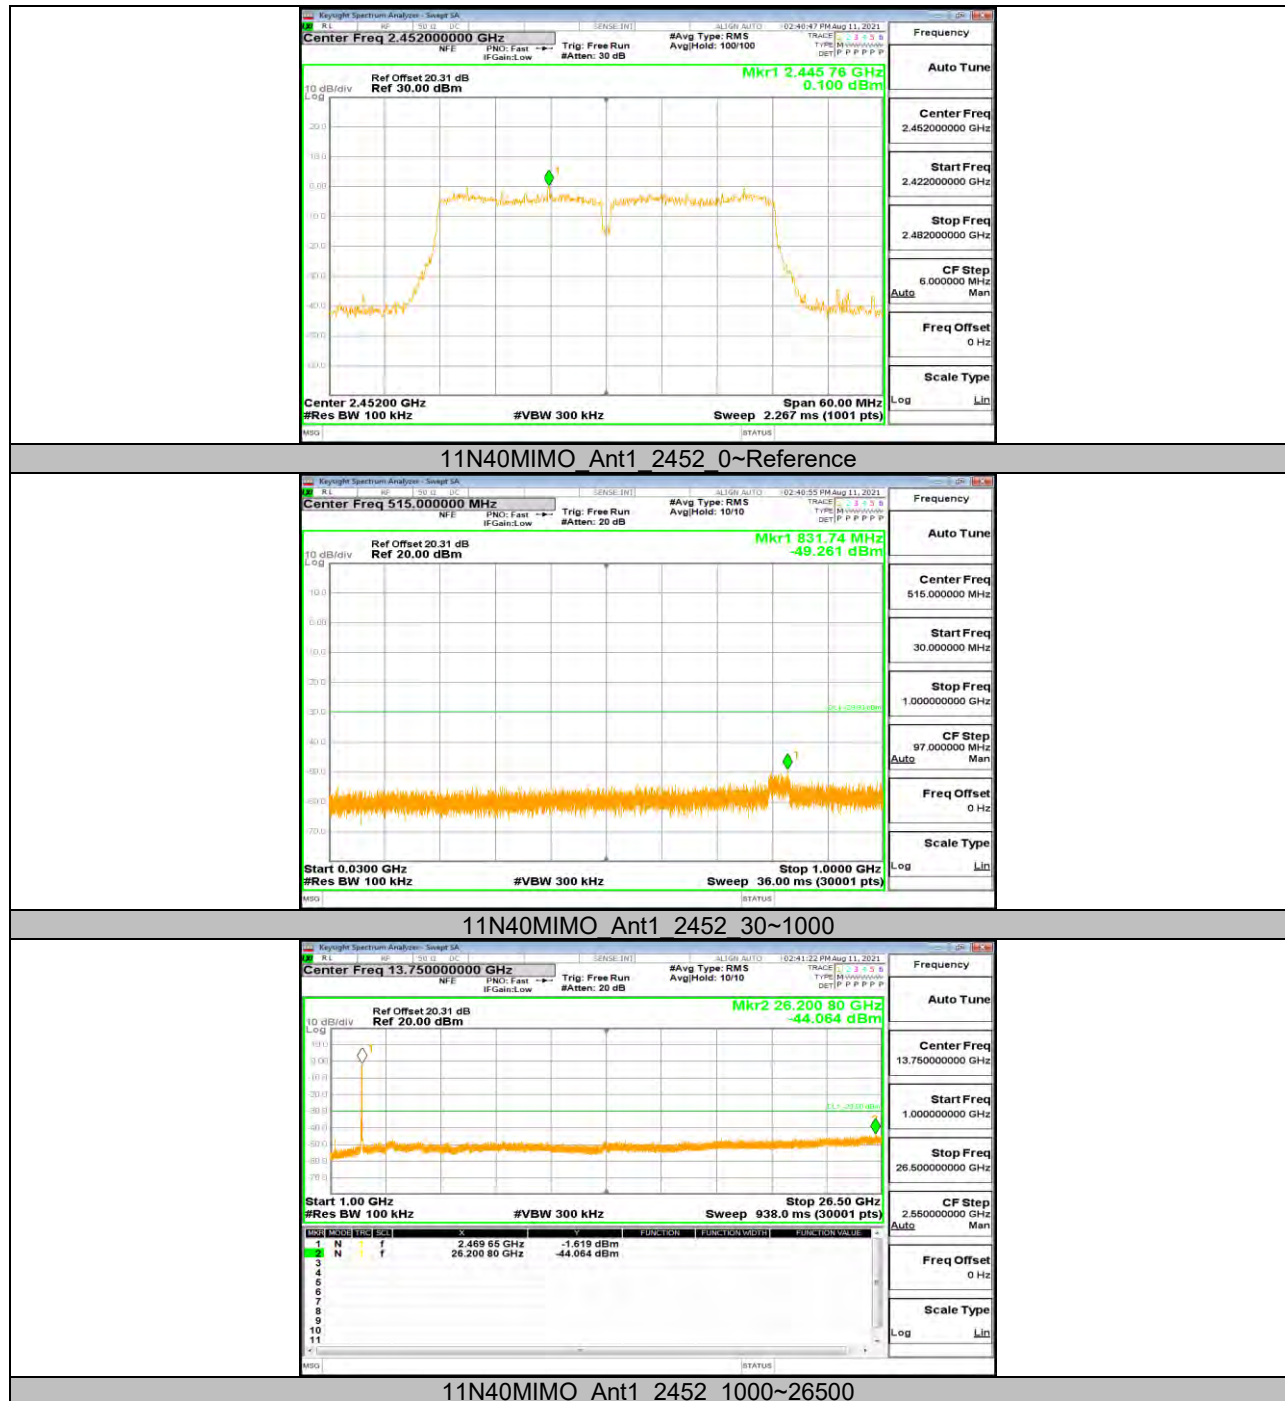

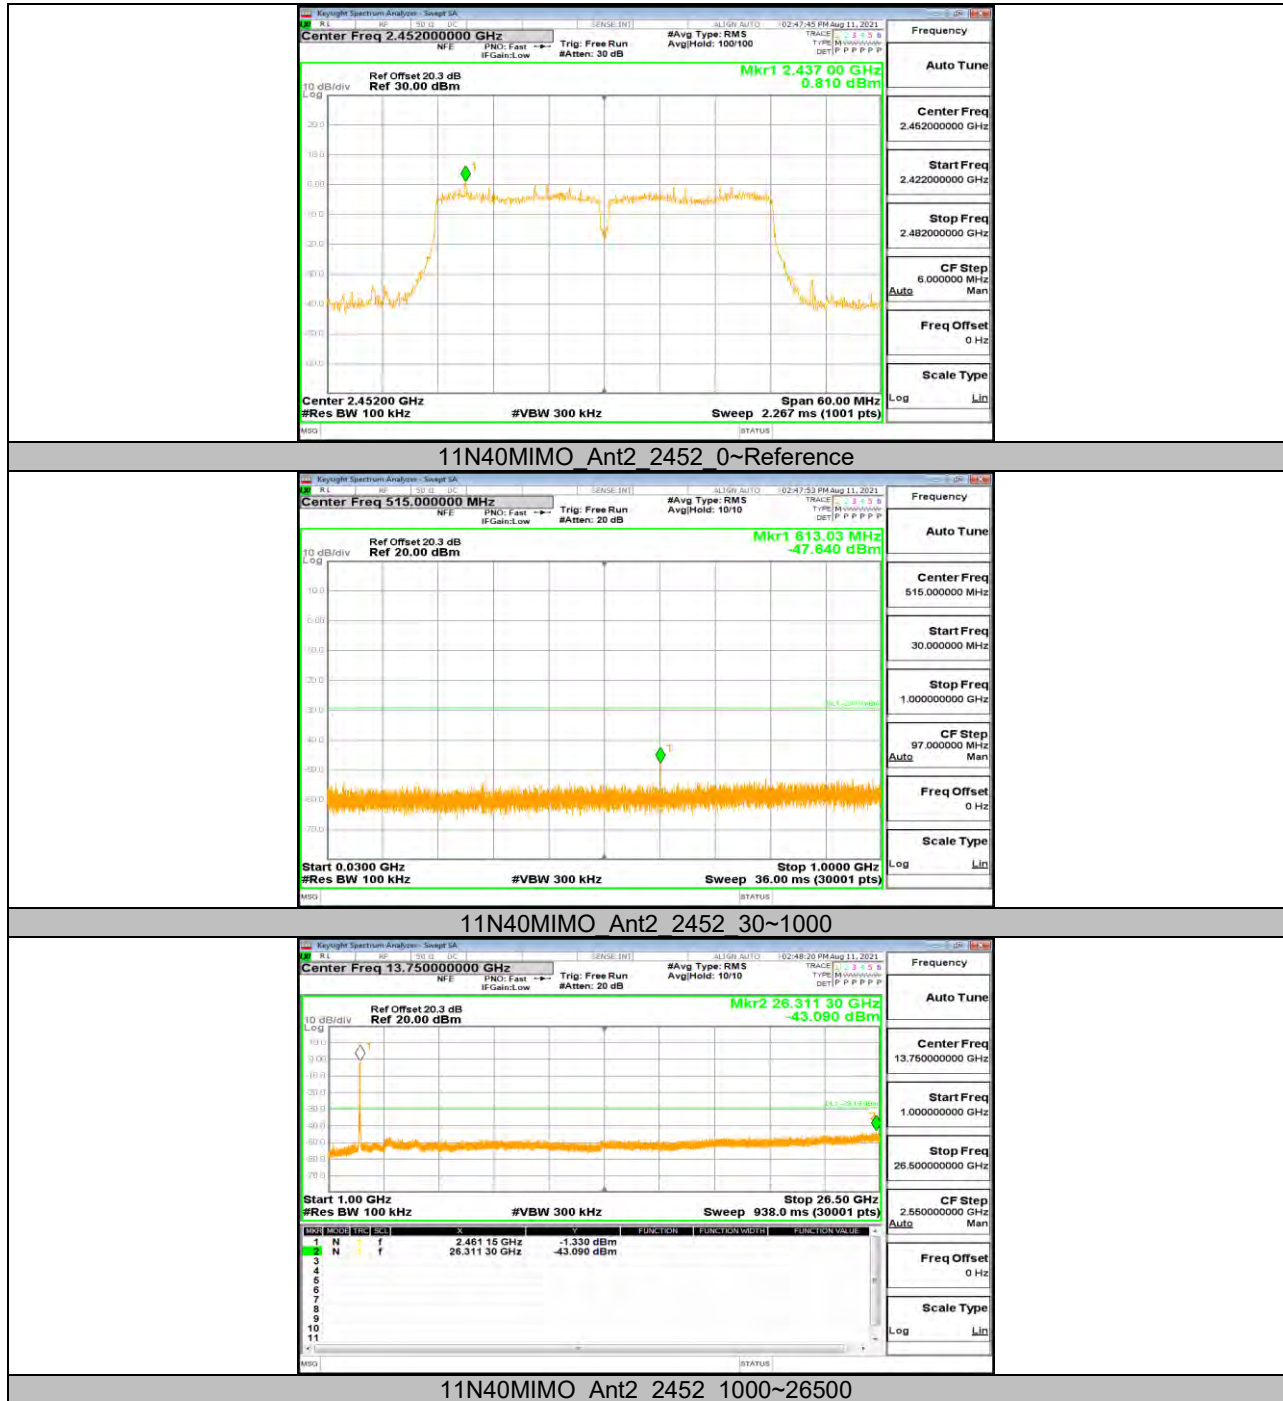



11.7. Appendix G: Duty Cycle

11.7.1. Test Result

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B	8.38	8.49	0.9870	98.70	0.06	0.12	0.01
11G	3.11	3.21	0.9688	96.88	0.14	0.32	1
11N20MIMO	4.76	4.87	0.9774	97.74	0.10	0.21	1
11N40MIMO	2.32	2.42	0.9587	95.87	0.18	0.43	1

Note:

Duty Cycle Correction Factor= $10\log(1/x)$.

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

11.7.2. Test Graphs





END OF REPORT