

FCC IC RF Test Report

Report No.: FCC_IC_SL20051401-JAD-003_HF

FCC ID: QV5MERCURY3E

IC: 5407A-MERCURY3E

Models: M3e

Received Date: 07/07/2020

Test Date: 07/17/2020-07/23/2020

Issued Date: 08/06/2020

Applicant name: JADAK, a business unit of Novanta Corporation

Address: 125 Middlesex Turnpike, Bedford, MA 01730

Manufacturer: JADAK, a business unit of Novanta Corporation

Address: 125 Middlesex Turnpike, Bedford, MA 01730

Issued By: Bureau Veritas Consumer Products Services, Inc.

Lab Address: 775 Montague Expressway, Milpitas, CA 95035

**FCC Registration /
Designation Number:** 540430

ISED# / CAB identifier: 4842D



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Description of Test Modes	7
3.2.1 1 channel is provided to this EUT	7
3.2.2 Test Mode Applicability and Tested Channel Detail	7
3.3 Description of Support Units	8
3.3.1 Configuration of System under Test	8
3.4 General Description of Applied Standards	8
4 Test Types and Results	9
4.1 Radiated Emission Measurement	9
4.1.1 Limits of Radiated Emission Measurement	9
4.1.2 Test Instruments	10
4.1.3 Test Procedures	11
4.1.4 Deviation from Test Standard	11
4.1.5 Test Setup	12
4.1.6 EUT Operating Conditions	12
4.1.7 Test Results	13
4.3 Occupied Bandwidth	19
4.3.1 Test Instruments	19
4.3.2 Test Procedures	19
4.3.3 Test Setup	19
4.3.4 EUT Operating Conditions	19
4.3.5 Test Results	20
4.4 Conducted Emission Measurement	21
4.4.1 Limits of Conducted Emission Measurement	21
4.4.2 Test Instruments	21
4.4.3 Test Procedures	21
4.4.4 Deviation from Test Standard	21
4.4.5 Test Setup	22
4.4.6 EUT Operating Conditions	22
4.4.7 Test Results	23
5 Pictures of Test Arrangements	27
Appendix – Information on the Testing Laboratories	28

Release Control Record

Issue No.	Description	Date Issued
FCC_IC_SL20051401-JAD-003_LF	Initial Release	08/06/2020

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (15.207/15.209)			
RSS Gen Issue 5			
FCC IC Clause	Test Item	Result	Remarks
15.207 RSS Gen 8.8	AC Power Conducted Emission	Pass	Meet the requirement of limit.
RSS Gen	Occupied Bandwidth	Pass	Meet the requirement of limit.
15.209 RSS Gen	Transmitter Radiated Emission	Pass	Meet the requirement of limit.
15.203 RSS Gen	Antenna Requirement	Pass	The EUT uses a Coil Antenna to permanently attach to the device.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	3.51dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	3.73dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	M3e LF/HF Embedded RFID Module
Brand	JADAK, a business unit of Novanta Corporation
Test Model	M3e
Status of EUT	Engineering sample
EUT Software Version	FW-HS1RX-00-A02-814
Power Supply Rating	5Vdc
Modulation Type	ASK
Operating Frequency	125 kHz / 134.2 kHz
Antenna Type	Coil Antenna (Air core)
Antenna inductance	505 uH nominal with DCR < 10 ohms

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

3.2.1 1 channel is provided to this EUT

Channel	Freq. (MHz)
1	0.125
1	0.1342

3.2.2 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE	PLC	FS	EB	
A	-	-	-	-	Power from battery
B	√	√	-	-	Power from USB via laptop

Where **RE:** Radiated Emission
FS: Frequency Stability

PLC: Power Line Conducted Emission
EB: 20dB Bandwidth measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.

NOTE: "-" means no effect.

Radiated Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
B	2	2	ASK

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
B	2	2	ASK

Frequency Stability:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
B	2	2	ASK

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE	25deg. C, 65%RH	5Vdc	Deon Dai
PLC	25deg. C, 65%RH	5Vdc	Deon Dai

3.3 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	Thinkpad	0578-CTO	LR-16MAW	-	Provided by Customer
B.						

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB cable	1	0.8	N	0	Provided by Customer

Note: The core(s) is(are) originally attached to the cable(s).

3.3.1 Configuration of System under Test

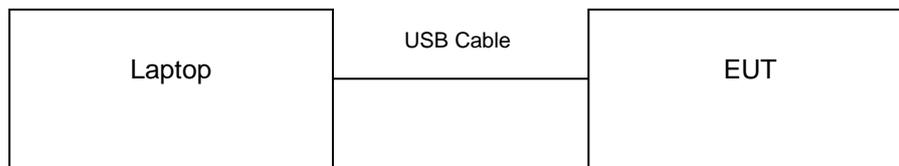

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR FCC Part 15, Subpart C (Section 15.207)

47 CFR FCC Part 15, Subpart C (Section 15.209)

ANSI C63.10:2013

RSS Gen Issue 5, March 2019

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission Measurement

4.1.1 Limits of Radiated Emission Measurement

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$
 Limit Line (dBuV/m) = $20 \log \text{Emission level (uV/m)} + \text{Distance extrapolation factor}$
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
EMI Test Receiver ROHDE & SCHWARZ	ESW 44	100179	08/30/2019	08/30/2020
Passive Loop Antenna (9k-30MHz)	6512	49120	07/14/2020	07/14/2021
Hybrid Antenna SUNAR	JB6	A111717	03/09/2020	03/09/2021
Preamplifier RF-BAY	LNA-150	12170607	02/16/2020	02/16/2021

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup

For Radiated emission below 30MHz

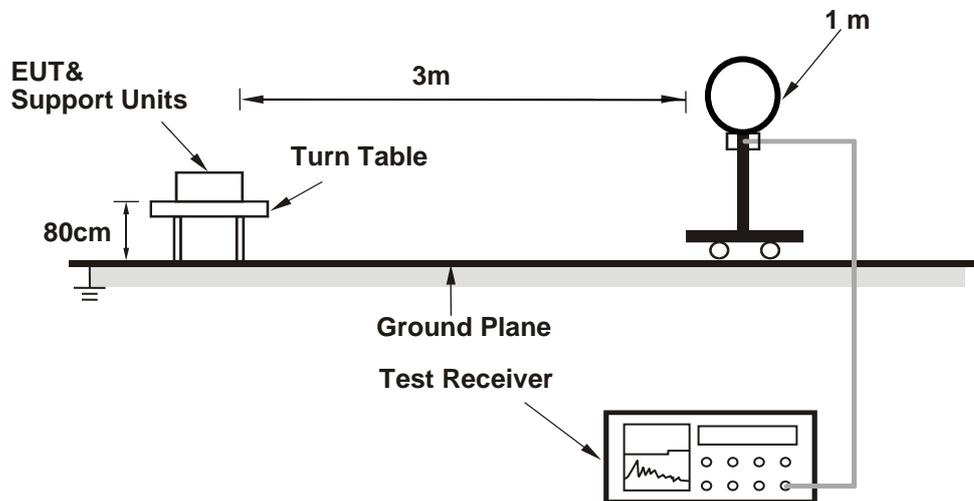

For Radiated emission 30MHz to 1GHz

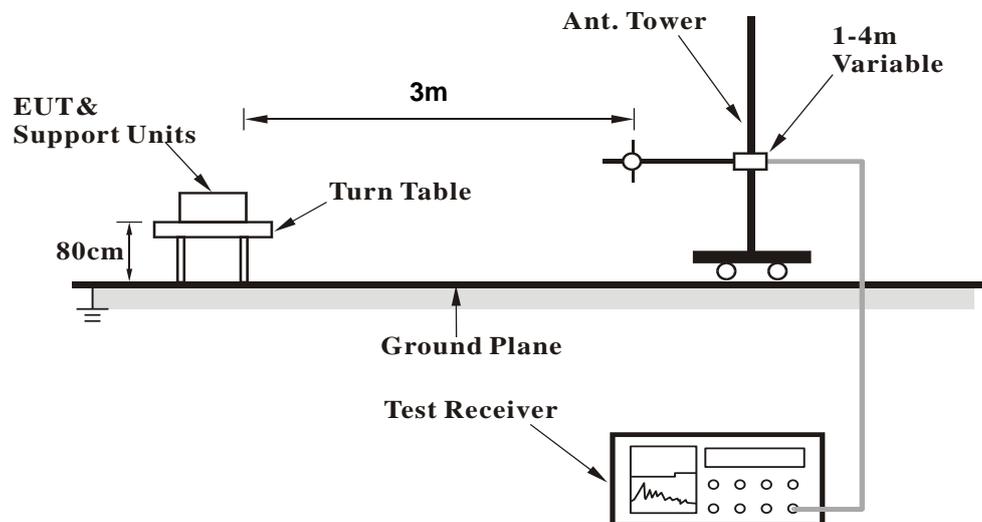

4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Notebook Computer which is placed on remote site.
- b. Controlling software has been activated to set the EUT on specific status.

4.1.7 Test Results

Radiated Emissions (9 kHz~30 MHz)


EUT Test Condition		Measurement Detail	
Frequency	125KHz	Frequency Range	9 kHz~30 MHz
Input Power	DC5V	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Deon Dai

Antenna Polarity & Test Distance: Loop Antenna 0 degree At 3m

No.	Frequency (MHz)	Polarization	Reading QP [dB(uV)]	Factor [dB(1/m)]	Level QP [dB(uV/m)]	LimitQP dB(uV/m)	Margin QP [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	0.124	0	36.1	29.5	65.6	105.7	-40.1	100	43.4	Pass
2	0.294	0	36.3	23	59.3	98.2	-38.9	100	33.1	Pass
3	0.574	0	29	17.3	46.3	72.4	-26.1	100	157	Pass
4	1.174	0	29.1	11.7	40.8	66.2	-25.4	100	137	Pass
5	1.354	0	23.3	10.7	34	65	-31	100	0	Pass
6	5.957	0	11.4	2.6	14	69.5	-55.5	100	35.6	Pass
7	0.124	0	36.1	29.5	65.6	105.7	-40.1	100	43.4	Pass

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB)
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

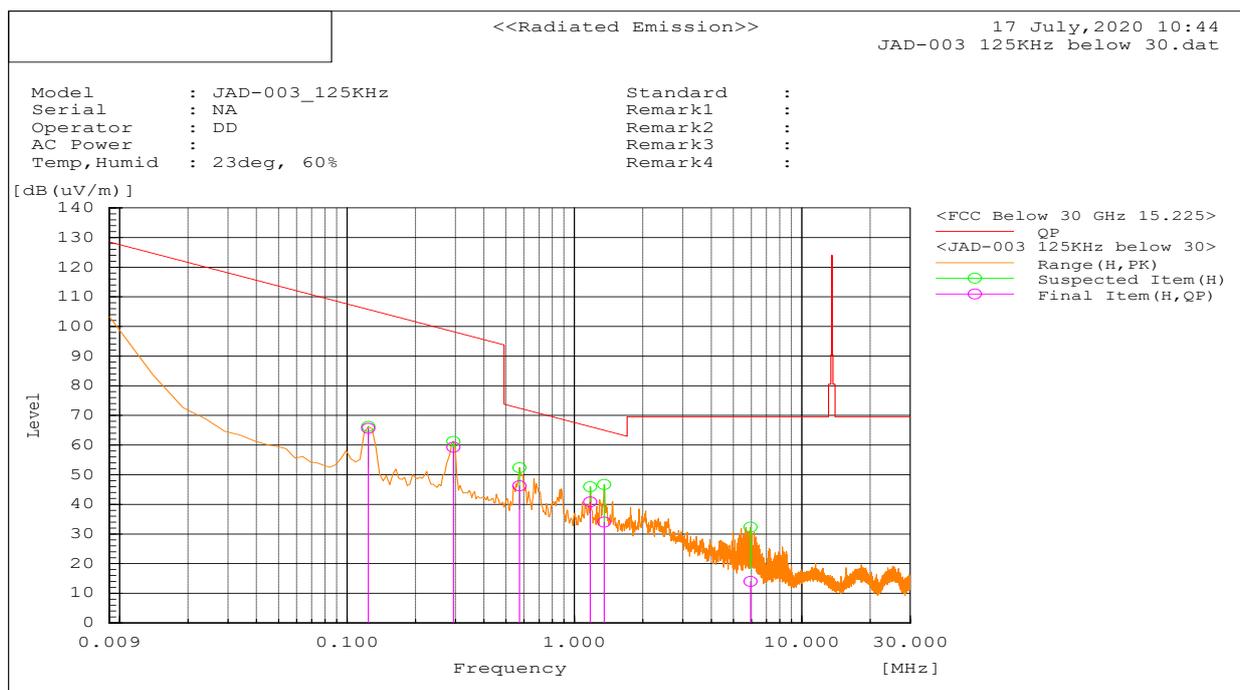


EUT Test Condition		Measurement Detail	
Frequency	125KHz	Frequency Range	9 kHz~30 MHz
Input Power	DC5V	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Deon Dai

Antenna Polarity & Test Distance: Loop Antenna 90 degree At 3m										
No.	Frequency (MHz)	Polarization	Reading QP [dB(uV)]	Factor [dB(1/m)]	Level QP [dB(uV/m)]	Limit\QP dB(uV/m)	Margin QP [dB]	Height (cm)	Angle (Deg)	Pass/ Fail
1	0.294	90	35.5	23	58.5	98.2	-39.7	100	106	Pass
2	0.674	90	20.2	16.1	36.3	71	-34.7	100	0	Pass
3	1.179	90	27.7	11.7	39.4	66.2	-26.8	100	82.8	Pass
4	1.339	90	30.5	10.8	41.3	65.1	-23.8	100	93.6	Pass
5	1.474	90	26.2	10.1	36.3	64.2	-27.9	100	102	Pass
6	2.023	90	24	7.8	31.8	69.5	-37.7	100	93.9	Pass

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB)
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

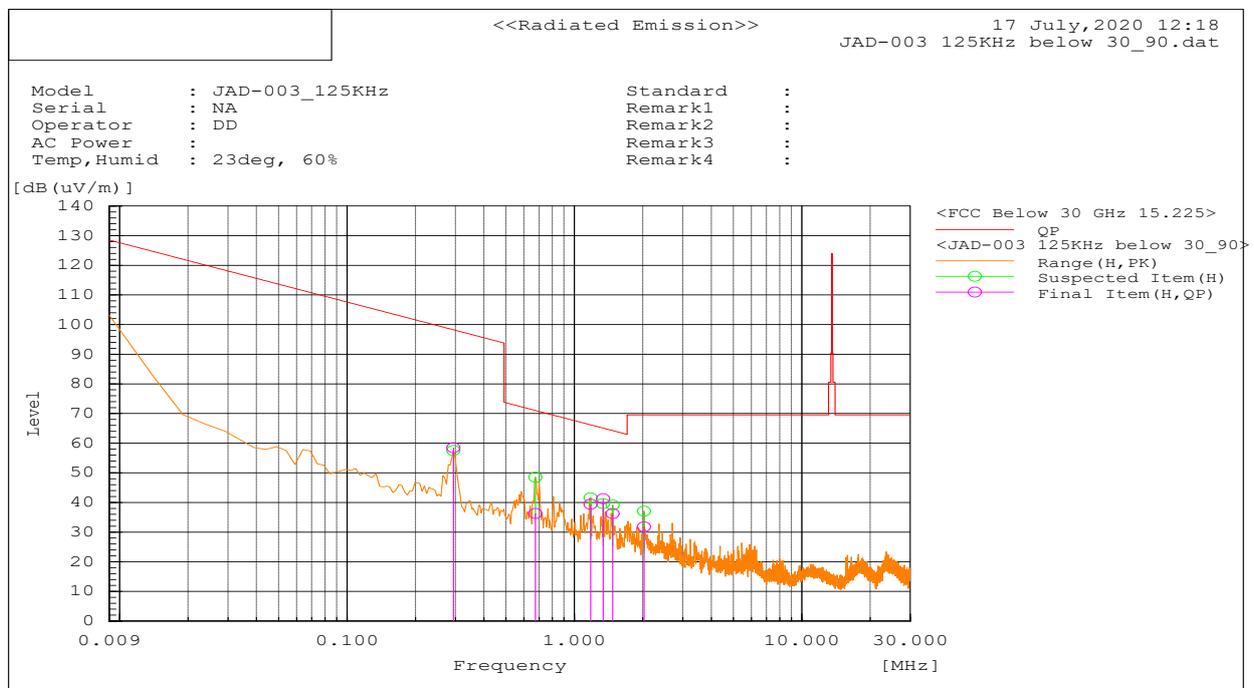


EUT Test Condition		Measurement Detail	
Frequency	134.2KHz	Frequency Range	9 kHz~30 MHz
Input Power	DC5V	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Deon Dai

Antenna Polarity & Test Distance: Loop Antenna 0 degree At 3m										
No.	Frequency (MHz)	Polarization	Reading QP [dB(uV)]	Factor [dB(1/m)]	Level QP [dB(uV/m)]	LimitQP [dB(uV/m)]	Margin QP [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	0.134	0	36	28.9	64.9	105.1	-40.2	100	30.6	Pass
2	0.294	0	37.2	23	60.2	98.2	-38	100	161.5	Pass
3	0.589	0	35.2	17.1	52.3	72.2	-19.9	100	165.4	Pass
4	0.884	0	32.6	13.9	46.5	68.7	-22.2	100	154.2	Pass
5	1.159	0	26.8	11.8	38.6	66.3	-27.7	100	151.5	Pass
6	1.394	0	27	10.5	37.5	64.7	-27.2	100	153.5	Pass

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB)
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

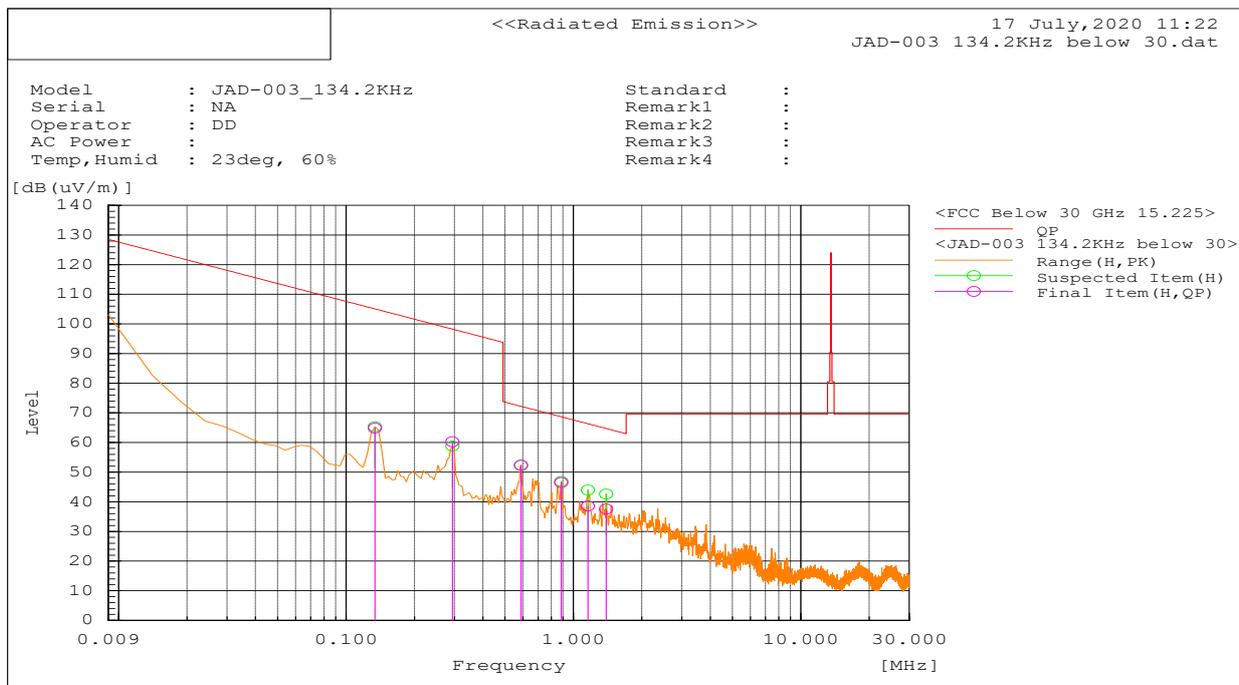


EUT Test Condition		Measurement Detail	
Frequency	134.2KHz	Frequency Range	9 kHz~30 MHz
Input Power	DC5V	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Deon Dai

Antenna Polarity & Test Distance: Loop Antenna 90 degree At 3m										
No.	Frequency (MHz)	Polarization	Reading QP [dB(uV)]	Factor [dB(1/m)]	Level QP [dB(uV/m)]	Limit\QP dB(uV/m)	Margin QP [dB]	Height (cm)	Angle (Deg)	Pass/ Fail
1	0.289	90	30.7	23.1	53.8	98.4	-44.6	100	85.8	Pass
2	0.579	90	25.5	17.2	42.7	72.4	-29.7	100	78.4	Pass
3	0.674	90	22.6	16.1	38.7	71	-32.3	100	183.9	Pass
4	0.884	90	28.6	13.9	42.5	68.7	-26.2	100	83.2	Pass
5	1.174	90	29.8	11.7	41.5	66.2	-24.7	100	94.4	Pass
6	1.369	90	22.6	10.6	33.2	64.9	-31.7	100	101.9	Pass

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB)
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

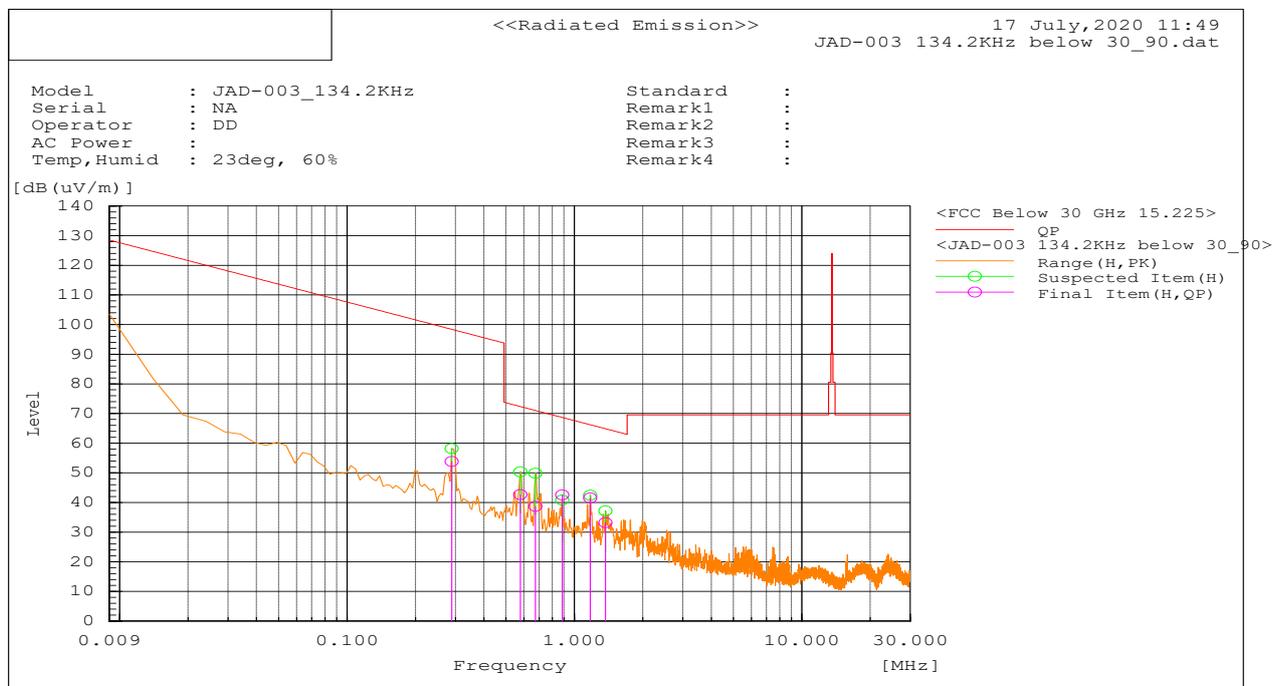

Radiated Emissions (30 MHz~1000 MHz)


EUT Test Condition		Measurement Detail	
Frequency	125KHz	Frequency Range	30MHz ~ 1000 MHz
Input Power	DC5V	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Deon Dai

Antenna Polarity & Test Distance: Horizontal & Vertical at 3 m

No.	Frequency (MHz)	Polarization	Reading QP [dB(uV)]	Factor [dB(1/m)]	Level QP [dB(uV/m)]	Limit QP dB(uV/m)	Margin QP [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	30.162	H	0.5	26.9	27.4	40	-12.6	176	194	Pass
2	30.162	V	0.6	25.4	26	40	-14	362	166	Pass
3	64.435	H	7.9	13.2	21.1	40	-18.9	286	162	Pass
4	232.407	H	8.8	18.6	27.4	47	-19.6	137	111	Pass
5	298.205	H	1.8	21.2	23	47	-24	112	253	Pass
6	691.378	V	1.1	28.3	29.4	47	-17.6	159	143	Pass

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB)
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

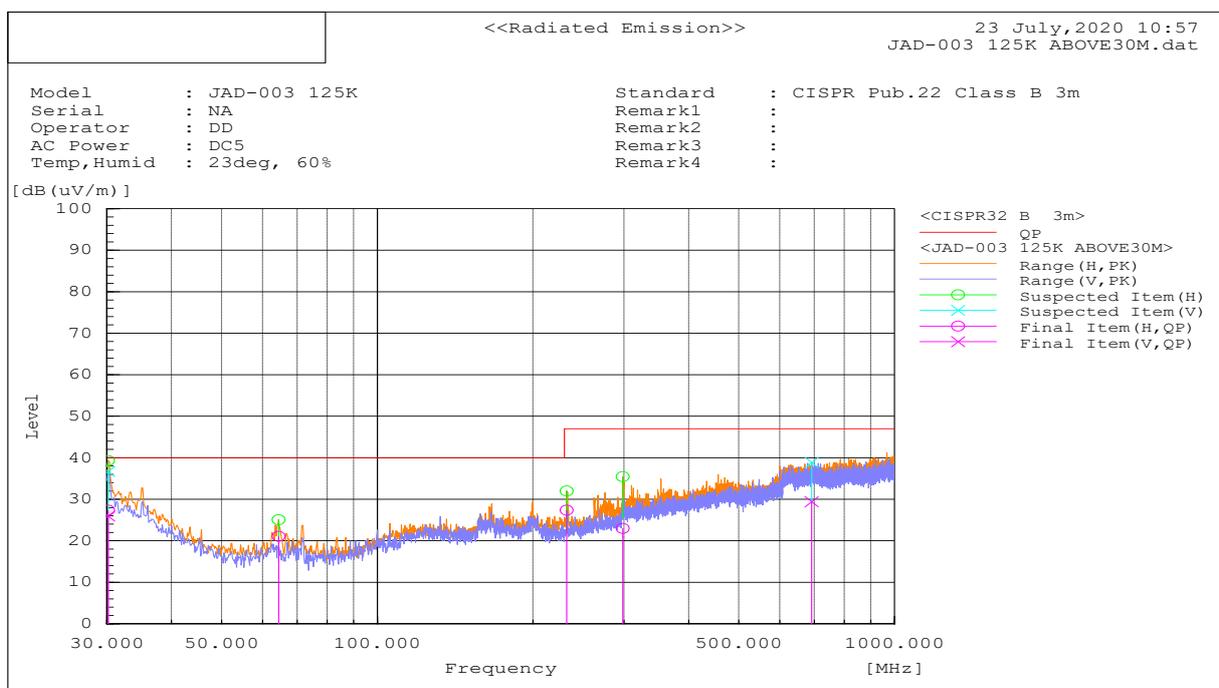


EUT Test Condition		Measurement Detail	
Frequency	134.2KHz	Frequency Range	30MHz ~ 1000 MHz
Input Power	DC5V	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Deon Dai

Antenna Polarity & Test Distance: Horizontal & Vertical at 3 m

No.	Frequency (MHz)	Polarization	Reading QP [dB(uV)]	Factor [dB(1/m)]	Level QP [dB(uV/m)]	LimitQP dB(uV/m)	Margin QP [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	30.162	H	0.5	26.9	27.4	40	-12.6	108	200	Pass
2	68.315	V	7.4	13	20.4	40	-19.6	100	284	Pass
3	73.327	V	0.8	13.1	13.9	40	-26.1	100	272	Pass
4	166.447	V	9.4	19	28.4	40	-11.6	100	141	Pass
5	299.822	H	8.3	21.2	29.5	47	-17.5	104	281	Pass
6	655.488	H	0.8	27.8	28.6	47	-18.4	357	151	Pass

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB)
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

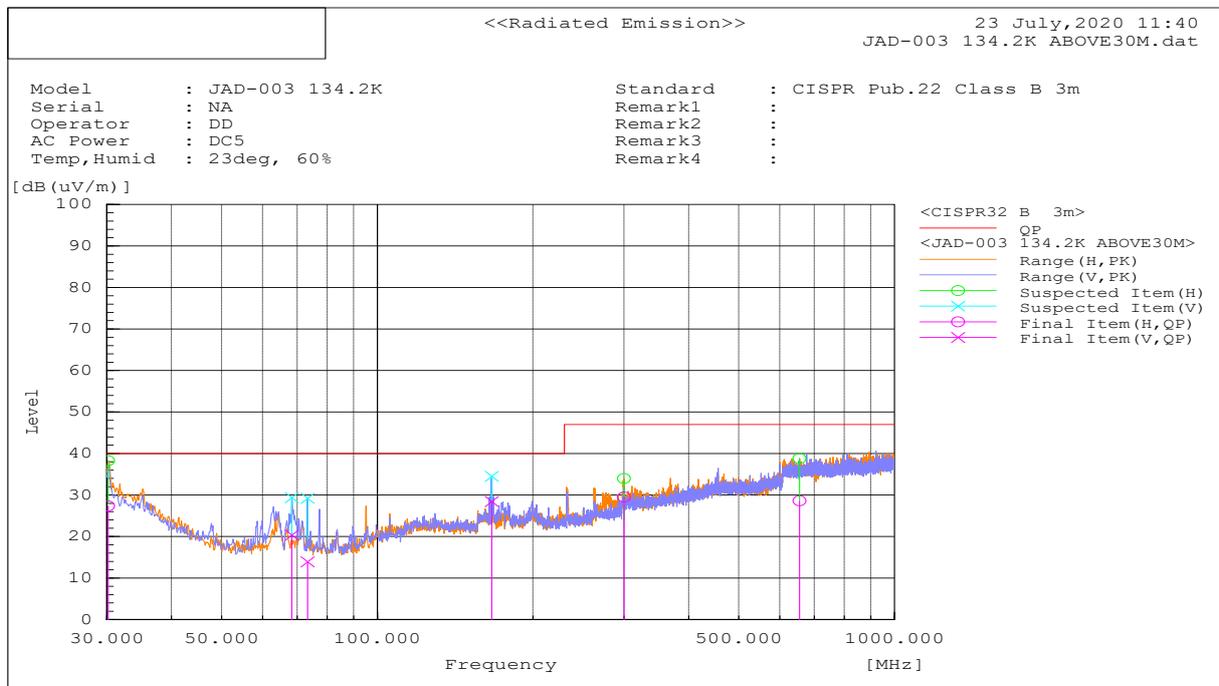

4.3 Occupied Bandwidth

4.3.1 Test Instruments


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
MXA Signal Analyzer 20Hz to 26.5GHz & Agilent	N9020A	MY51240100	02/06/2020	02/06/2021
Passive Loop Antenna (9k-30MHz)	6512	49120	07/14/2019	07/14/2020

4.3.2 Test Procedures

- Set resolution bandwidth (RBW) = 100Hz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the 99% emission bandwidth

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100Hz RBW and 300Hz VBW.

4.3.3 Test Setup

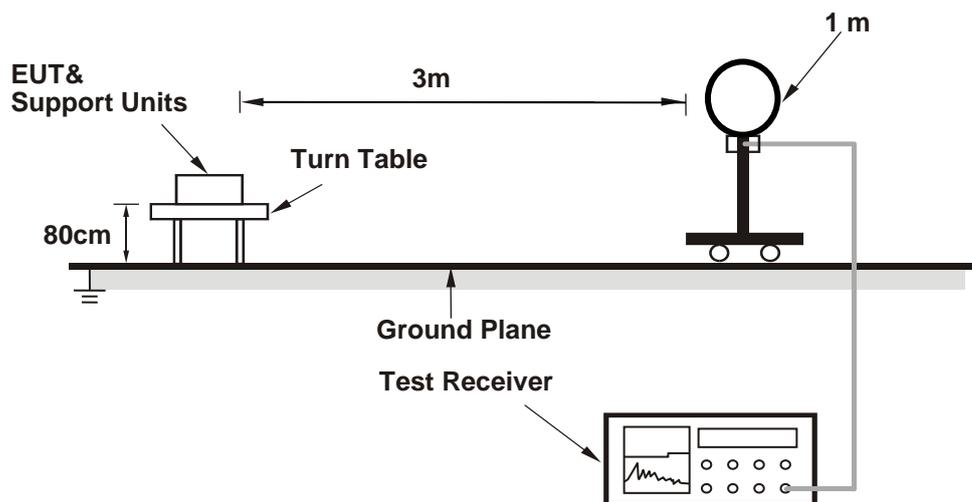


4.3.4 EUT Operating Conditions

- Connected the EUT with the Notebook Computer which is placed on remote site.

4.3.5 Test Results

Frequency (KHz)	99% Bandwidth (KHz)	20dB Bandwidth (KHz)
125	2.120	2.502
134.23	2.119	2.499

Test Plots:

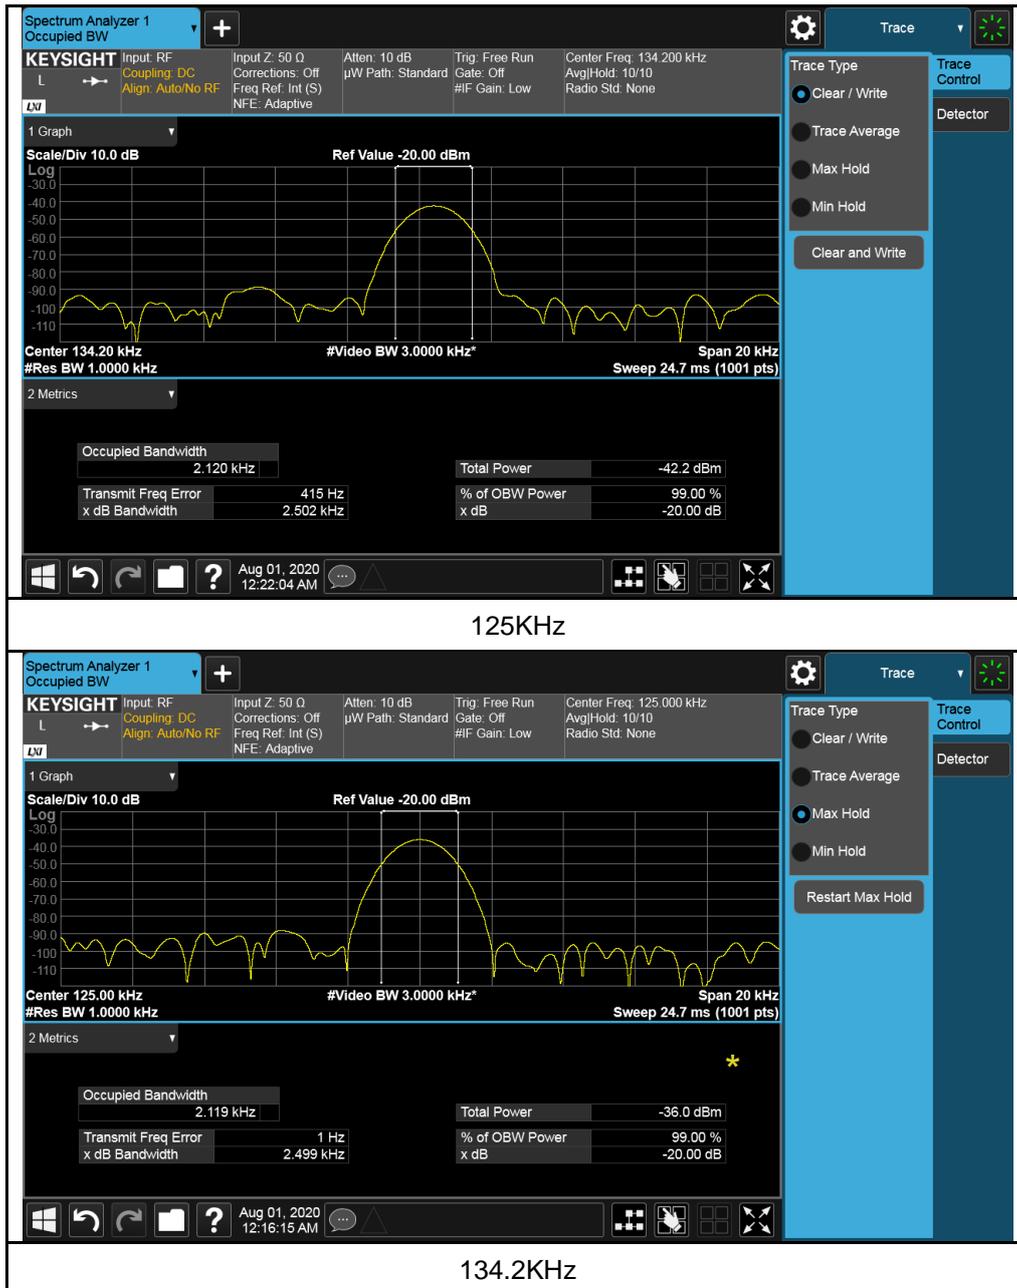

4.4 Conducted Emission Measurement

4.4.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.4.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
EMI Test Receiver ROHDE & SCHWARZ	ESIB 40	100179	08/28/2019	08/28/2020
Transient Limiter ELECTRO-METRICS	EM-7600-5	106	12/31/2019	12/31/2020
LISN EMCO	3816/2NM	214372	01/14/2020	01/14/2021

4.4.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.4.4 Deviation from Test Standard

No deviation.

4.4.5

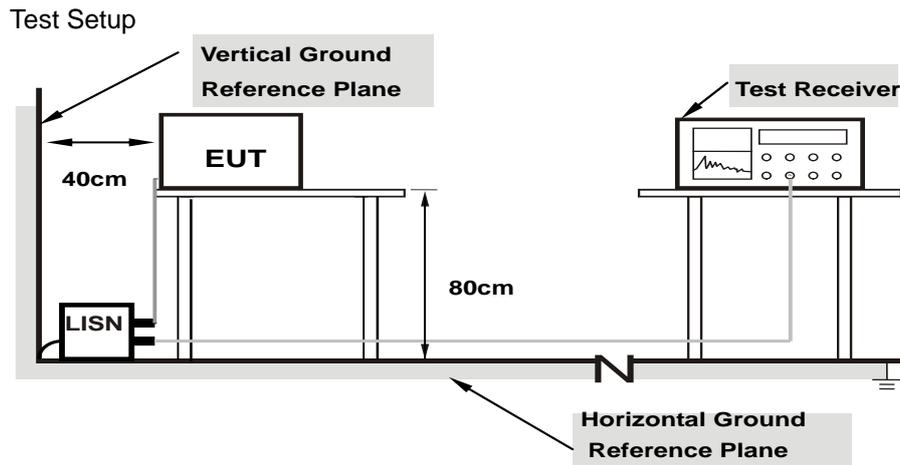

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.4.6 EUT Operating Conditions

Same as 4.1.6.

4.4.7 Test Results


125 kHz Transmit

Phase	Line (L)	Detector Function	Quasi-Peak / Average
-------	----------	-------------------	----------------------

No	Freq.	Raw	Calc Loss	Factors	Level	Measurement Type	Line	Limit	Margin	Pass /Fail
	[MHz]	(dBuV)	(dB)	(dB)	(dBuV)			(dBuV)	(dB)	
1	0.562833	28.66	9.46	0.04	38.15	Quasi Peak	Live	56	-17.85	Pass
2	2.864256	22.89	9.51	0.06	32.47	Quasi Peak	Live	56	-23.53	Pass
3	3.238062	24.92	9.53	0.07	34.51	Quasi Peak	Live	56	-21.49	Pass
4	2.646429	24.18	9.5	0.06	33.75	Quasi Peak	Live	56	-22.25	Pass
5	2.583194	25.45	9.5	0.06	35.01	Quasi Peak	Live	56	-20.99	Pass
6	3.889585	21.22	9.55	0.08	30.84	Quasi Peak	Live	56	-25.16	Pass
7	0.562833	16.24	9.46	0.04	25.73	Average	Live	46	-20.27	Pass
8	2.864256	16.12	9.51	0.06	25.69	Average	Live	46	-20.31	Pass
9	3.238062	15.58	9.53	0.07	25.17	Average	Live	46	-20.83	Pass
10	2.646429	17.76	9.5	0.06	27.32	Average	Live	46	-18.68	Pass
11	2.583194	17.94	9.5	0.06	27.5	Average	Live	46	-18.5	Pass
12	3.889585	16.42	9.55	0.08	26.04	Average	Live	46	-19.96	Pass

REMARKS:

1. The emission levels of other frequencies were very low against the limit.
2. Margin value = Emission level - Limit value
3. Emission Level = Correction Factor + Raw Value + Factors Value.

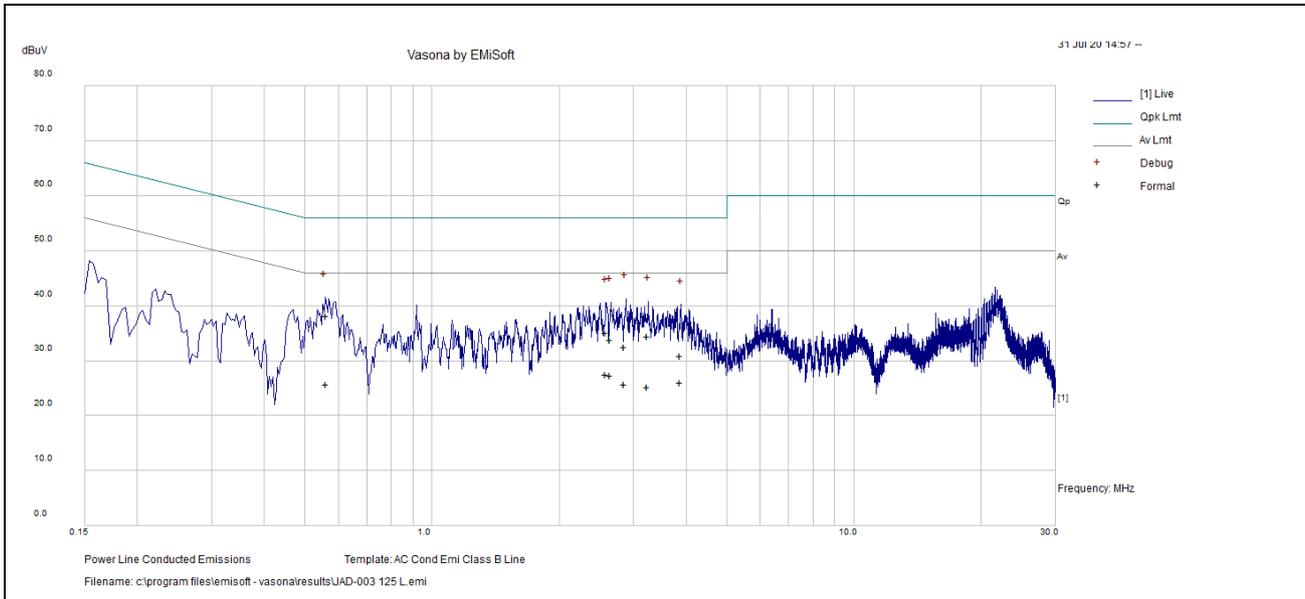


Phase	Neutral (N)	Detector Function	Quasi-Peak / Average
-------	-------------	-------------------	----------------------

No	Freq.	Raw	Calc Loss	Factors	Level	Measurement Type	Line	Limit	Margin	Pass /Fail
	[MHz]	(dBuV)	(dB)	(dB)	(dBuV)			(dBuV)	(dB)	
1	0.21481	36.12	9.39	0.03	45.54	Quasi Peak	Neutral	63.02	-17.48	Pass
2	0.550497	25.93	9.45	0.03	35.42	Quasi Peak	Neutral	56	-20.58	Pass
3	0.915752	23.25	9.48	0.03	32.75	Quasi Peak	Neutral	56	-23.25	Pass
4	2.611291	23.59	9.5	0.05	33.14	Quasi Peak	Neutral	56	-22.86	Pass
5	21.64488	23.17	9.79	0.53	33.49	Quasi Peak	Neutral	60	-26.51	Pass
6	0.46117	27.02	9.45	0.03	36.5	Quasi Peak	Neutral	56.67	-20.17	Pass
7	0.21481	21.33	9.39	0.03	30.75	Average	Neutral	53.02	-22.27	Pass
8	0.550497	14	9.45	0.03	23.49	Average	Neutral	46	-22.51	Pass
9	0.915752	12.16	9.48	0.03	21.66	Average	Neutral	46	-24.34	Pass
10	2.611291	17.75	9.5	0.05	27.3	Average	Neutral	46	-18.7	Pass
11	21.64488	17.52	9.79	0.53	27.84	Average	Neutral	50	-22.16	Pass
12	0.46117	17.32	9.45	0.03	26.79	Average	Neutral	46.67	-19.88	Pass

REMARKS:

1. The emission levels of other frequencies were very low against the limit.
2. Margin value = Emission level - Limit value
3. Emission Level = Correction Factor + Raw Value + Factors Value.

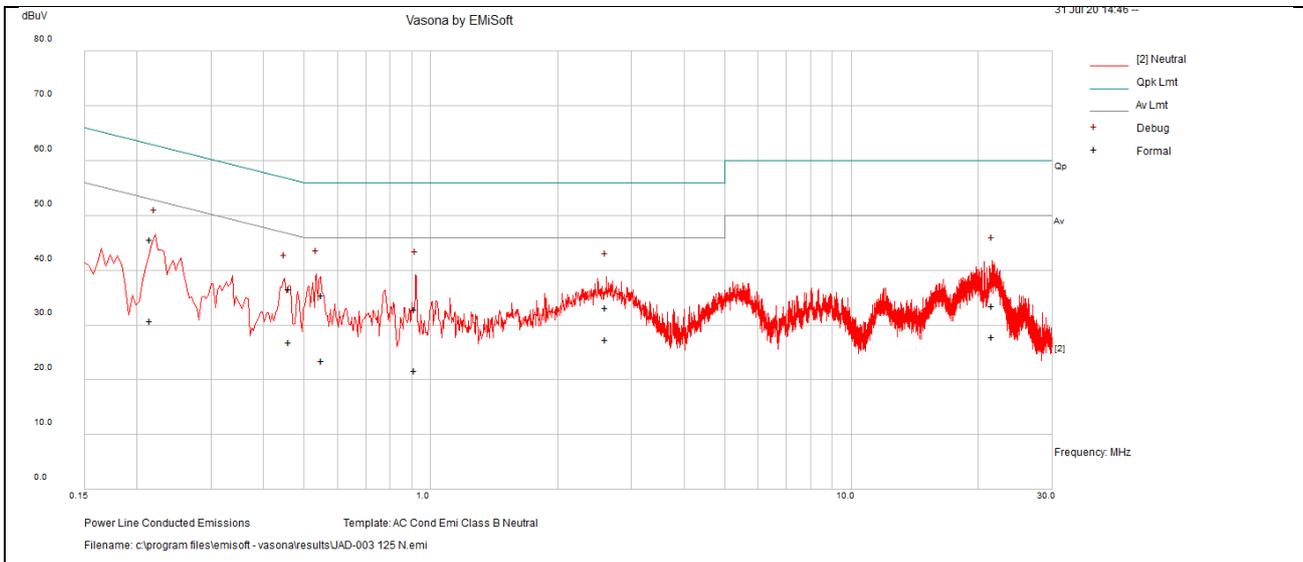


134.2 kHz Transmit

Phase	Line (L)	Detector Function	Quasi-Peak / Average
-------	----------	-------------------	----------------------

No	Freq.	Raw	Calc Loss	Factors	Level	Measurement Type	Line	Limit	Margin	Pass /Fail
	[MHz]	(dBuV)	(dB)	(dB)	(dBuV)			(dBuV)	(dB)	
1	2.432095	25.95	9.49	0.06	35.51	Quasi Peak	Live	56	-20.49	Pass
2	2.571361	25.28	9.5	0.06	34.84	Quasi Peak	Live	56	-21.16	Pass
3	2.942206	24.83	9.52	0.06	34.4	Quasi Peak	Live	56	-21.6	Pass
4	21.33931	17.82	9.79	0.53	28.14	Quasi Peak	Live	60	-31.86	Pass
5	3.17497	20.55	9.53	0.06	30.14	Quasi Peak	Live	56	-25.86	Pass
6	3.330561	20.37	9.53	0.07	29.97	Quasi Peak	Live	56	-26.03	Pass
7	2.432095	18.61	9.49	0.06	28.16	Average	Live	46	-17.84	Pass
8	2.571361	18.11	9.5	0.06	27.67	Average	Live	46	-18.33	Pass
9	2.942206	17.56	9.52	0.06	27.14	Average	Live	46	-18.86	Pass
10	21.33931	13.79	9.79	0.53	24.1	Average	Live	50	-25.9	Pass
11	3.17497	13.03	9.53	0.06	22.62	Average	Live	46	-23.38	Pass
12	3.330561	12.28	9.53	0.07	21.88	Average	Live	46	-24.12	Pass

REMARKS:

1. The emission levels of other frequencies were very low against the limit.
2. Margin value = Emission level - Limit value
3. Emission Level = Correction Factor + Raw Value + Factors Value.

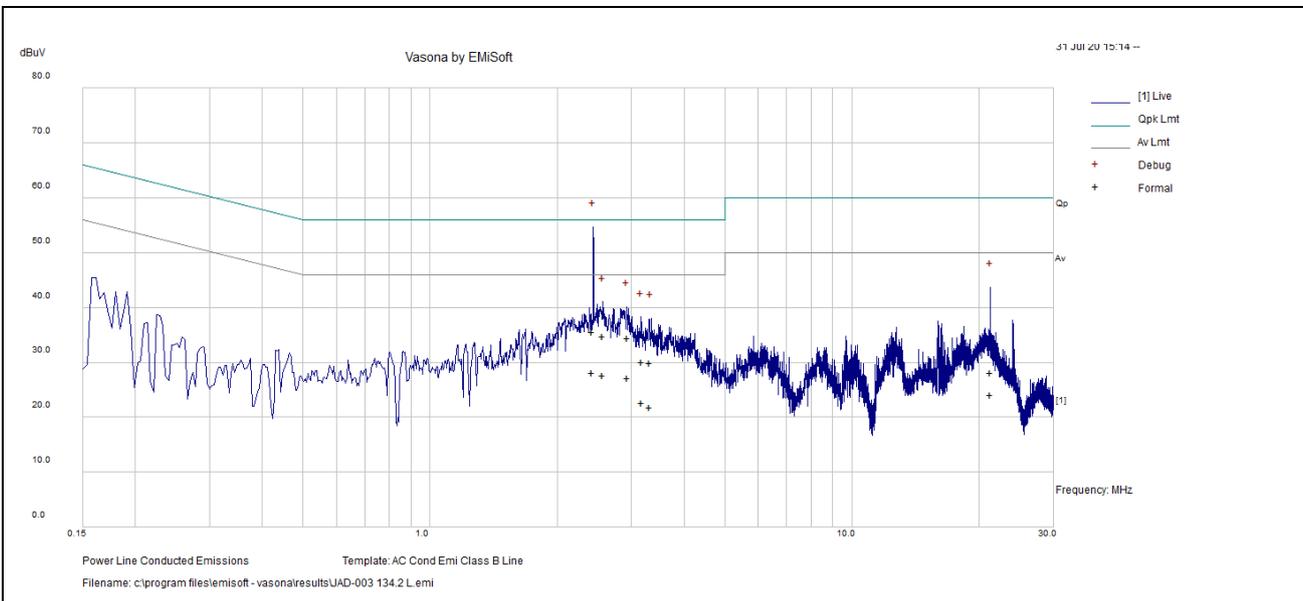


Phase	Neutral (N)	Detector Function	Quasi-Peak / Average
-------	-------------	-------------------	----------------------

No	Freq.	Raw	Calc Loss	Factors	Level	Measurement Type	Line	Limit	Margin	Pass /Fail
	[MHz]	(dBuV)	(dB)	(dB)	(dBuV)			(dBuV)	(dB)	
1	2.558187	20.41	9.5	0.05	29.96	Quasi Peak	Neutral	56	-26.04	Pass
2	2.574032	20.96	9.5	0.05	30.51	Quasi Peak	Neutral	56	-25.49	Pass
3	26.12575	14.9	9.87	0.67	25.45	Quasi Peak	Neutral	60	-34.55	Pass
4	2.985224	19.22	9.52	0.05	28.79	Quasi Peak	Neutral	56	-27.21	Pass
5	3.164856	15.82	9.53	0.05	25.4	Quasi Peak	Neutral	56	-30.6	Pass
6	2.627122	20.12	9.5	0.05	29.67	Quasi Peak	Neutral	56	-26.33	Pass
7	2.558187	12.46	9.5	0.05	22.01	Average	Neutral	46	-23.99	Pass
8	2.574032	14.65	9.5	0.05	24.2	Average	Neutral	46	-21.8	Pass
9	26.12575	1.63	9.87	0.67	12.18	Average	Neutral	50	-37.82	Pass
10	2.985224	7.53	9.52	0.05	17.1	Average	Neutral	46	-28.9	Pass
11	3.164856	6.92	9.53	0.05	16.5	Average	Neutral	46	-29.5	Pass
12	2.627122	13.96	9.5	0.05	23.51	Average	Neutral	46	-22.49	Pass

REMARKS:

1. The emission levels of other frequencies were very low against the limit.
2. Margin value = Emission level - Limit value
3. Emission Level = Correction Factor + Raw Value + Factors Value.

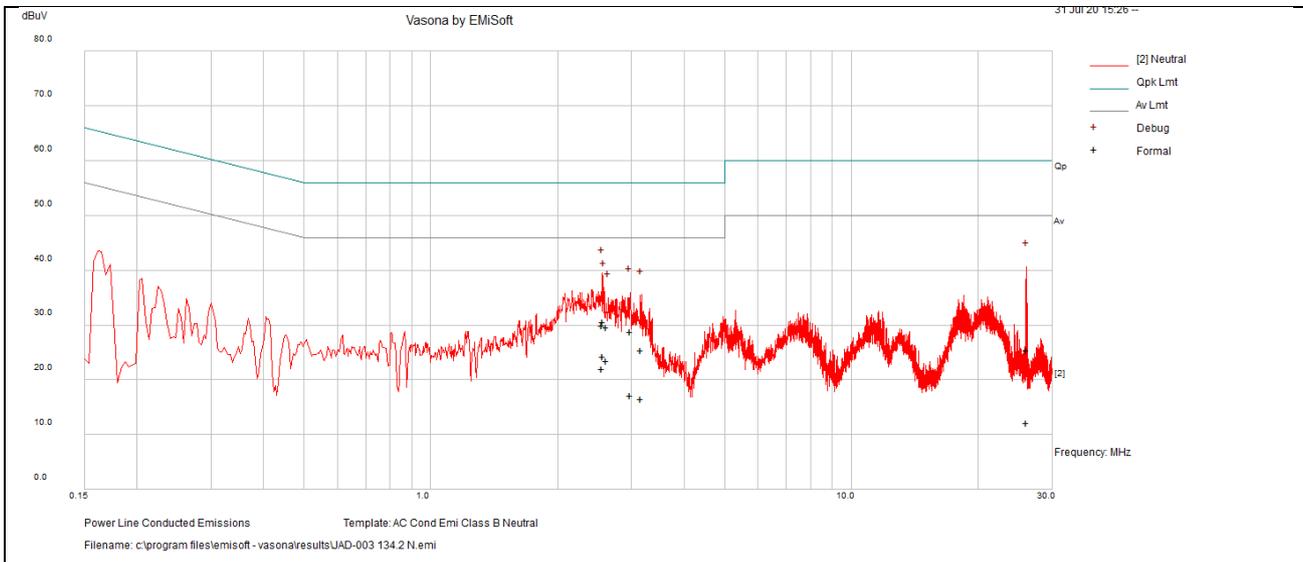

5 Pictures of Test Arrangements

Please see setup photo file.

Appendix – Information on the Testing Laboratories

Bureau Veritas is a global leader in testing, inspection and certification (TIC) services. We help businesses improve safety, sustainability and productivity; and our clients include the majority of leading brands in retail, manufacturing and other industries. With a presence in every major country around the world, our quality assurance and compliance solutions are vital in helping our customers enhance product quality and concept-to-consumer journeys. We also assist with increasing speed to market, profitability and brand equity throughout the supply chain. Bureau Veritas is a leading wireless/IoT testing, inspection, audit and certification provider, with a global network of test laboratories to support the IoT industry in areas of connectivity, security, interoperability as well as quality, health & safety, and environmental/chemical requirements.

If you have any comments, please feel free to contact us at the following:

Milpitas EMC/RF/Safety/Telecom Lab

775 Montague Expressway, Milpitas, CA 95035
Tel: +1 408 526 1188

Sunnyvale OTA/Bluetooth Lab

1293 Anvilwood Avenue, Sunnyvale, CA
94089
Tel: +1 669 600 5293

Littleton EMC/RF/Safety/Environmental Lab

1 Distribution Center Cir #1, Littleton, MA 01460
Tel: +1 978 486 8880

Email: sales.eaw@us.bureauveritas.com

Web Site: www.cpsusa-bureauveritas.com

The address and road map of all our labs can be found in our web site also.

--- END ---