



Appendix A

RF Test Data for BT LE (Conducted Measurement)

Product Name: Bluetooth speaker with cd player

Test Model: KJM-CD002

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Paddi Chen
Supervised by:	Ling Zhu





A.1 DTS Bandwidth


Test Result


TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.712	2401.624	2402.336	0.5	PASS
		2440	0.712	2439.628	2440.340	0.5	PASS
		2480	0.716	2479.624	2480.340	0.5	PASS





Test Graphs

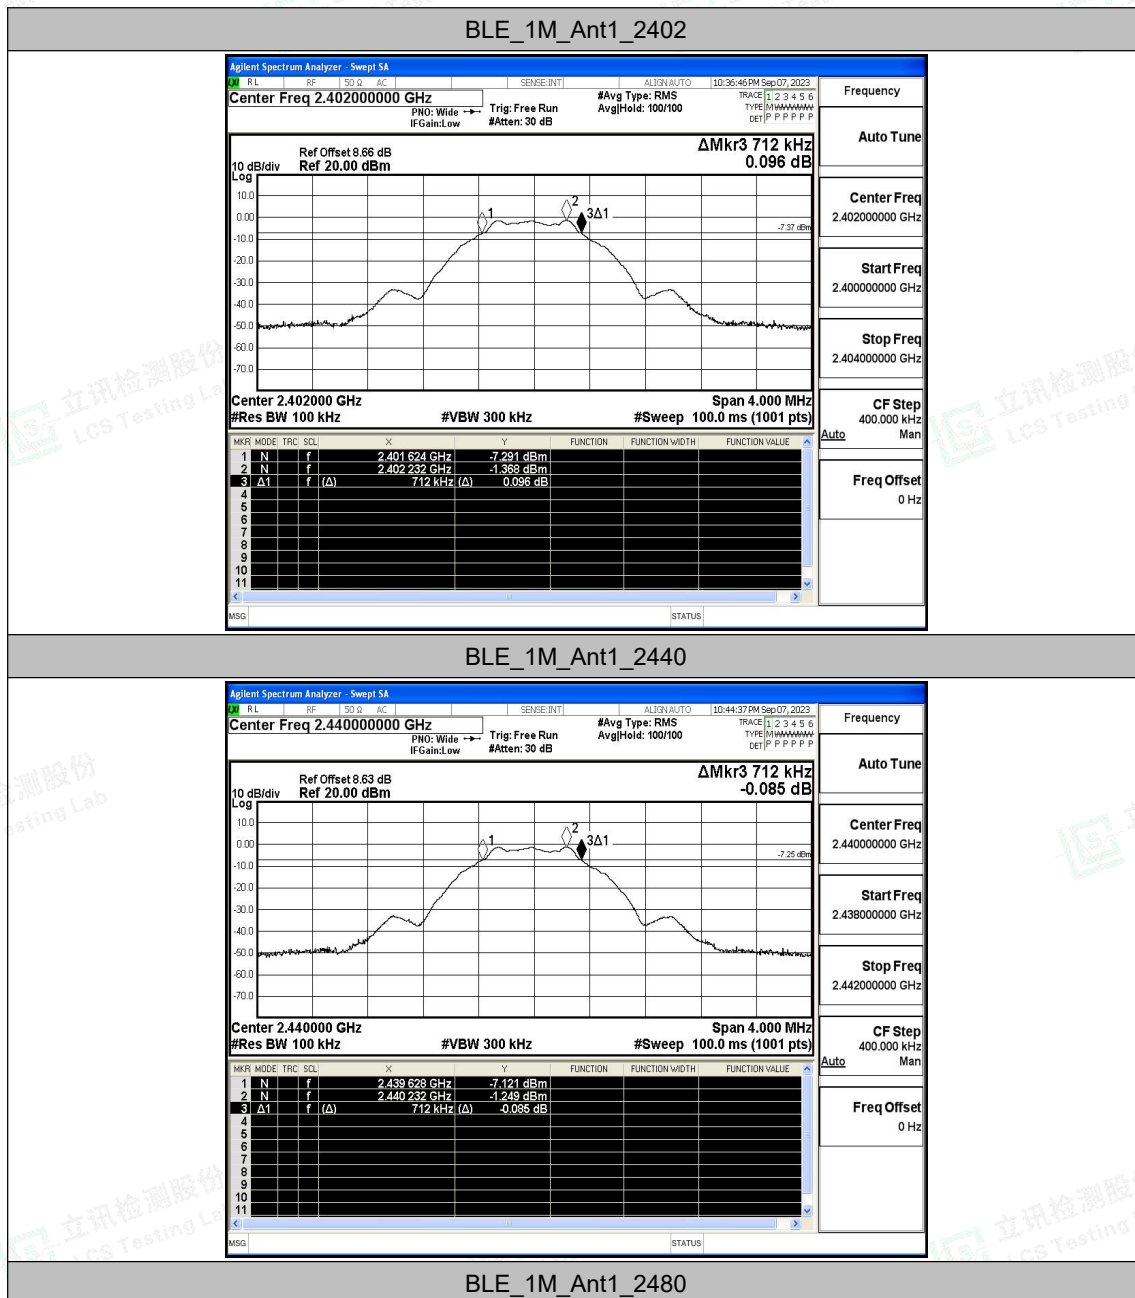

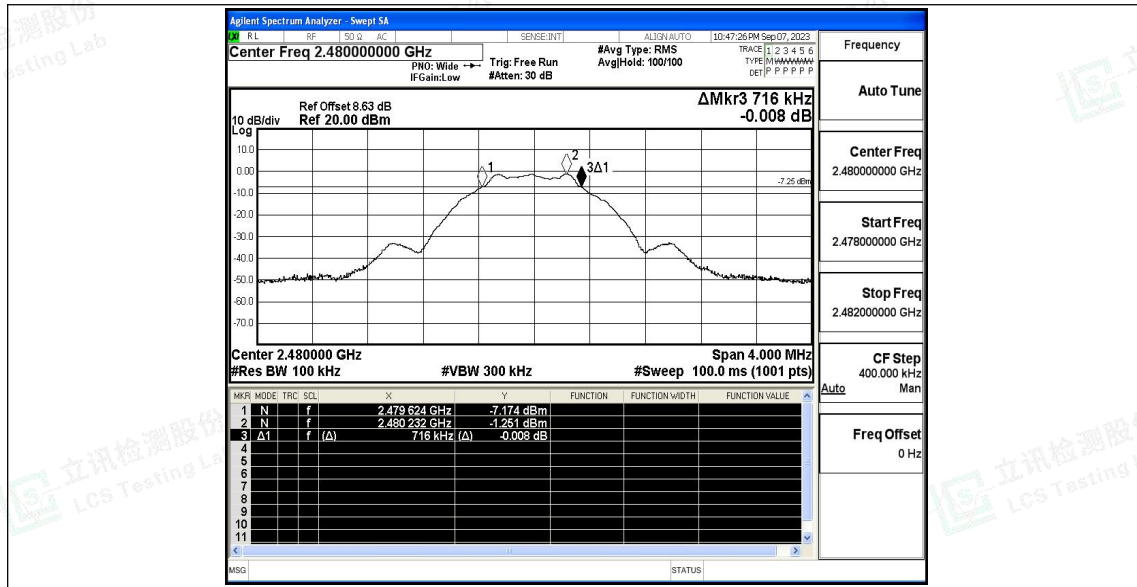



A.2 Maximum conducted output power


Test Result


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-0.41	≤30	PASS
		2440	-0.3	≤30	PASS
		2480	-0.31	≤30	PASS





Test Graphs

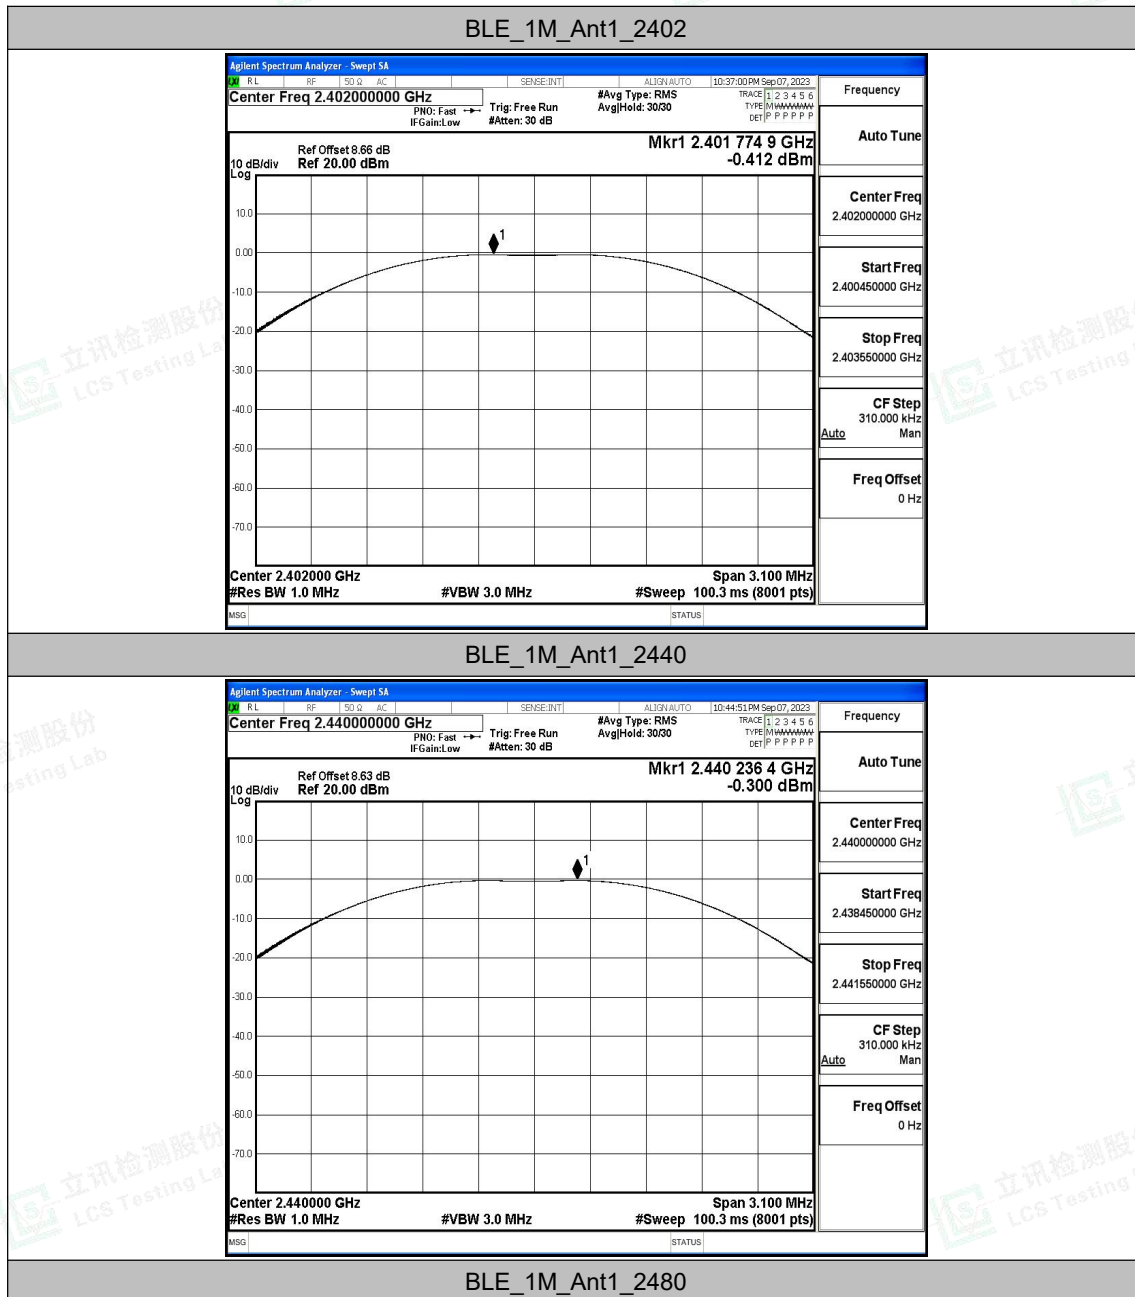

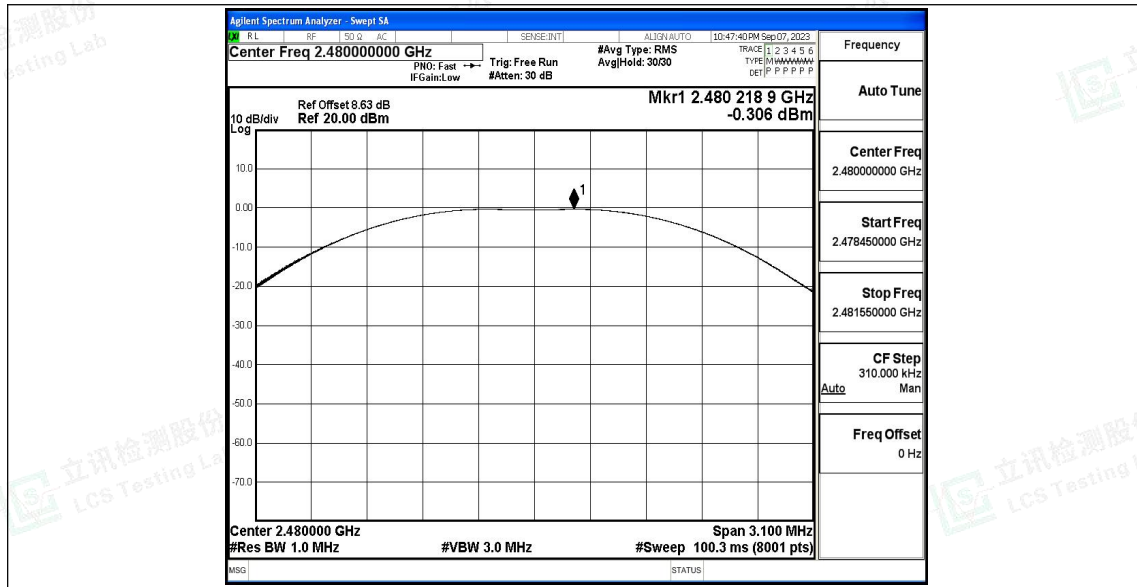




A.3 Maximum power spectral density



Test Result


TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-15.53	≤8.00	PASS
		2440	-15.34	≤8.00	PASS
		2480	-15.43	≤8.00	PASS





BLE_1M_Ant1_2402

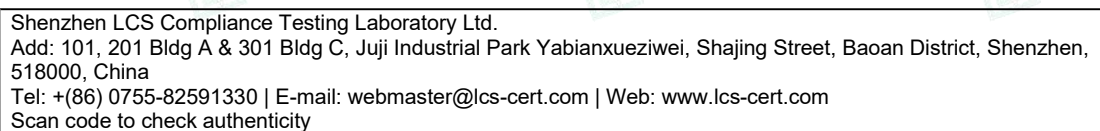

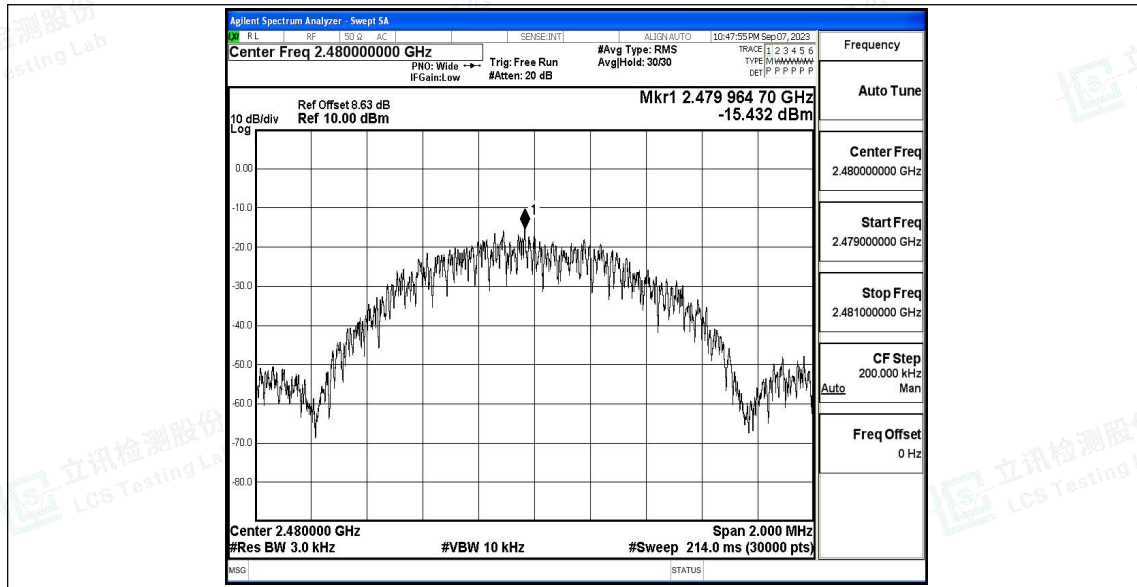



A.4 Band edge measurements


Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	-1.14	-58.78	≤-21.14	PASS
		High	2480	-1.11	-57.61	≤-21.11	PASS





Test Graphs

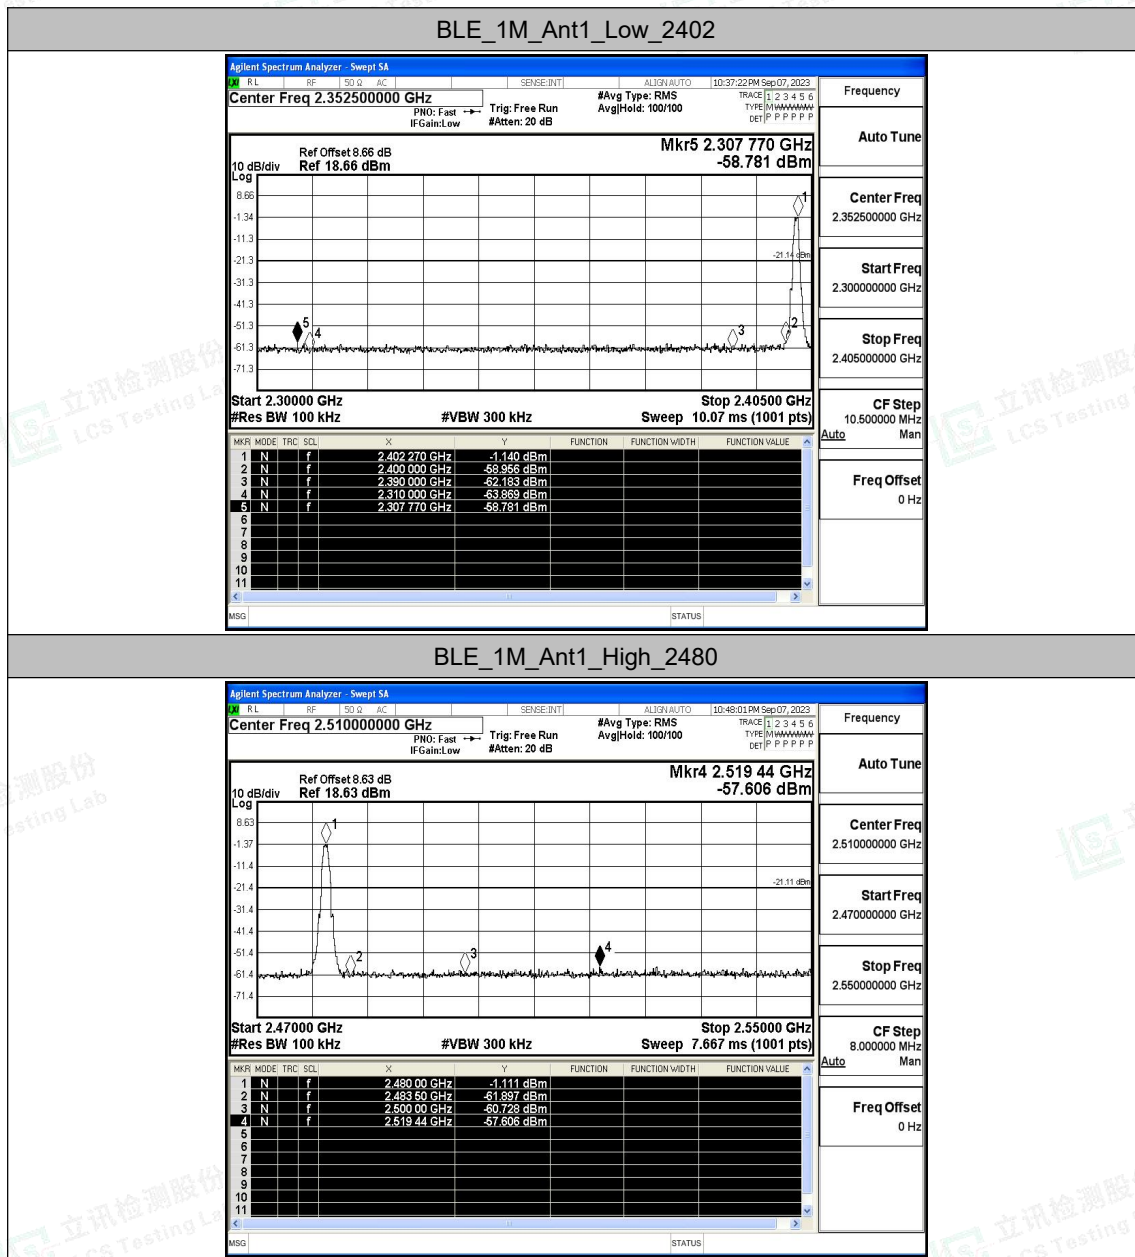

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



A.5 Conducted Spurious Emission

Test Result


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	-1.35	-1.35	---	PASS
			30~1000	-1.35	-60.73	≤-21.35	PASS
			1000~26500	-1.35	-45.25	≤-21.35	PASS
		2440	Reference	-1.24	-1.24	---	PASS
			30~1000	-1.24	-59.96	≤-21.24	PASS
			1000~26500	-1.24	-46.54	≤-21.24	PASS
		2480	Reference	-1.24	-1.24	---	PASS
			30~1000	-1.24	-73.37	≤-21.24	PASS
			1000~26500	-1.24	-46.57	≤-21.24	PASS






Test Graphs

BLE_1M_Ant1_2402_0~Reference

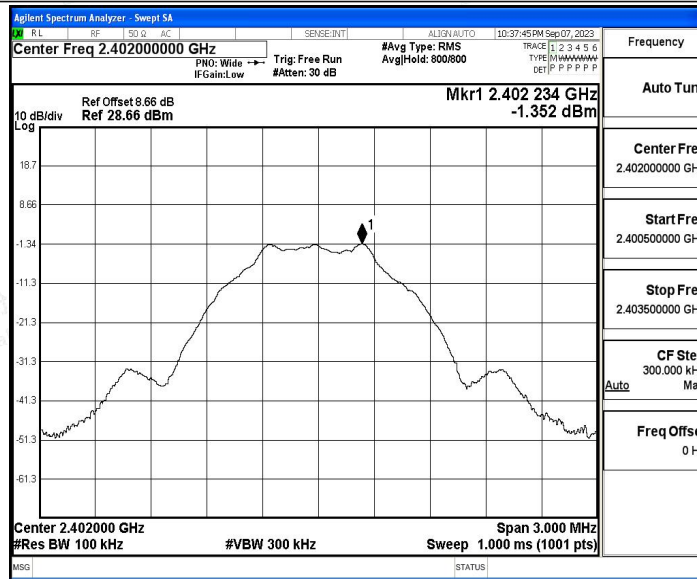

BLE_1M_Ant1_2402_30~1000

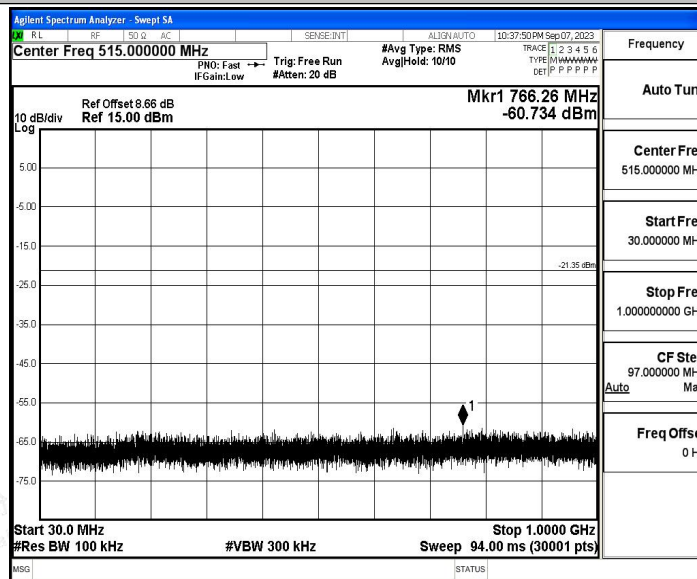

BLE_1M_Ant1_2402_1000~26500




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

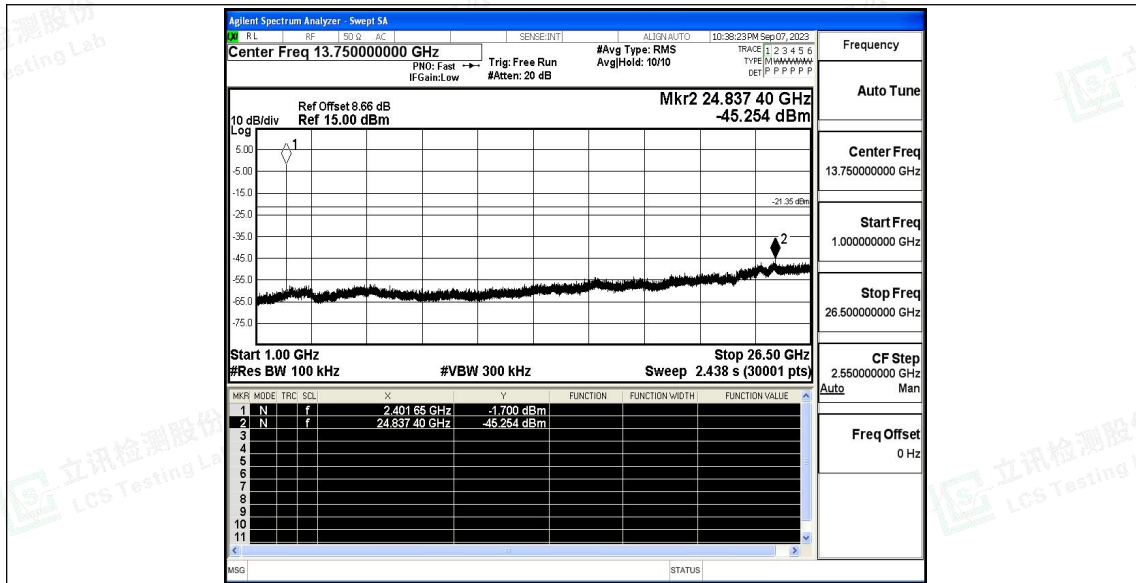


BLE_1M_Ant1_2440_0~Reference

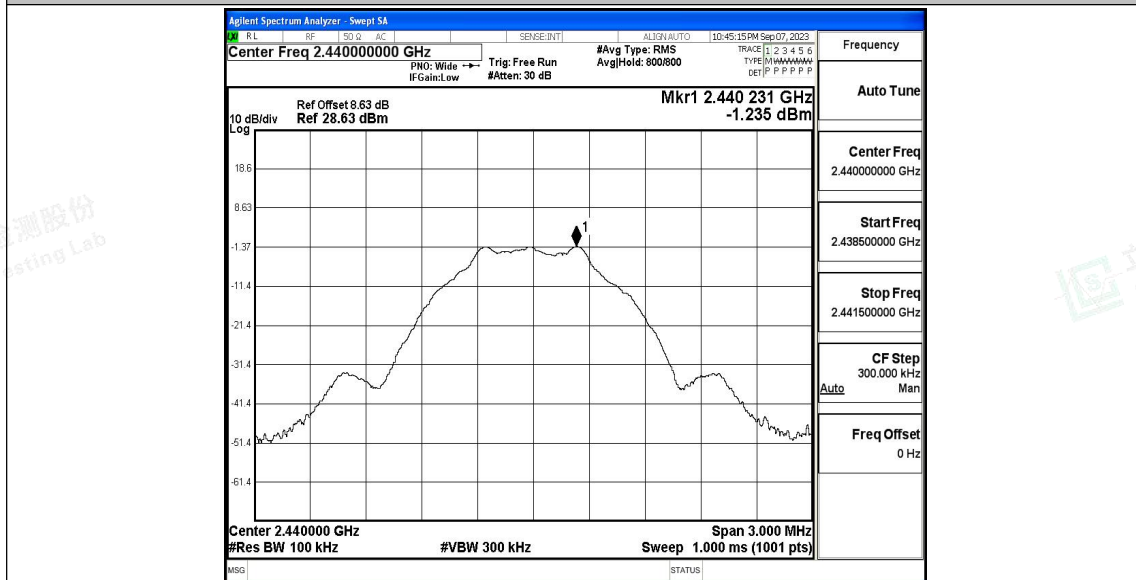


BLE_1M_Ant1_2440_30~1000



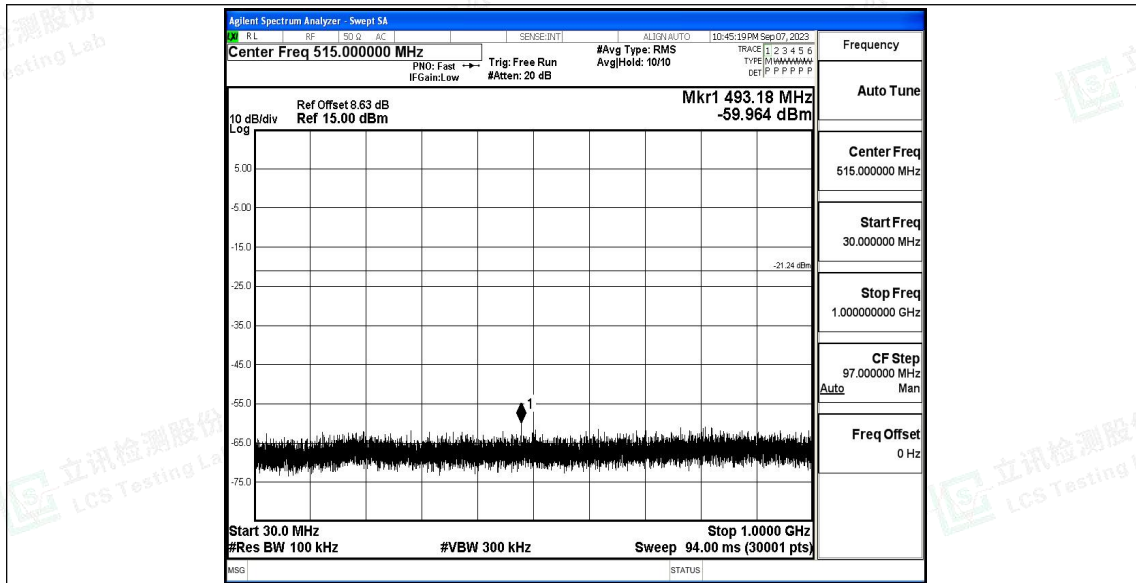


BLE_1M_Ant1_2440_1000~26500

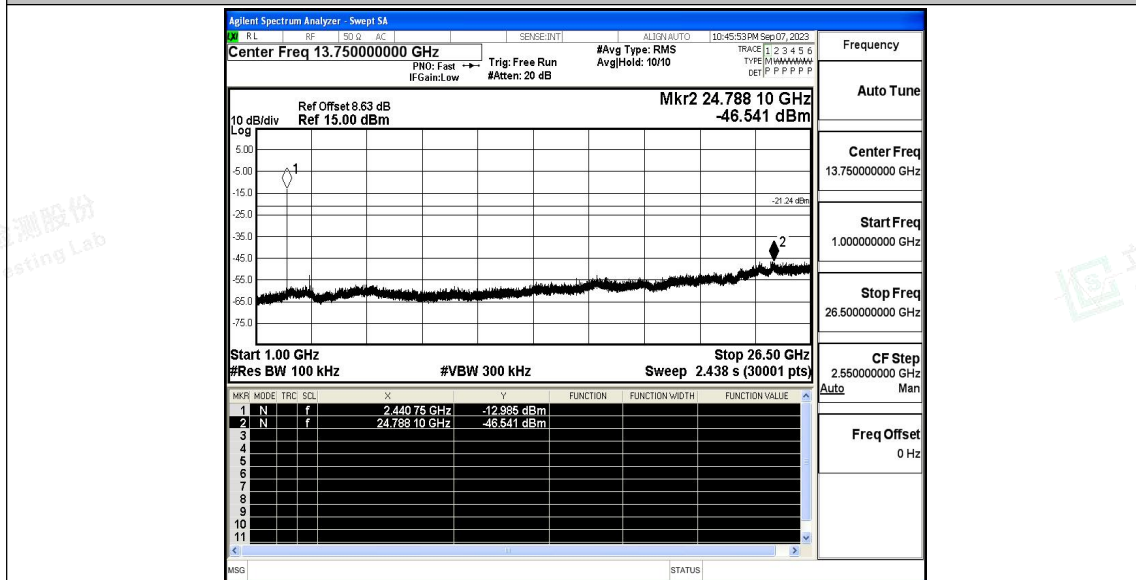


BLE_1M_Ant1_2480_0~Reference



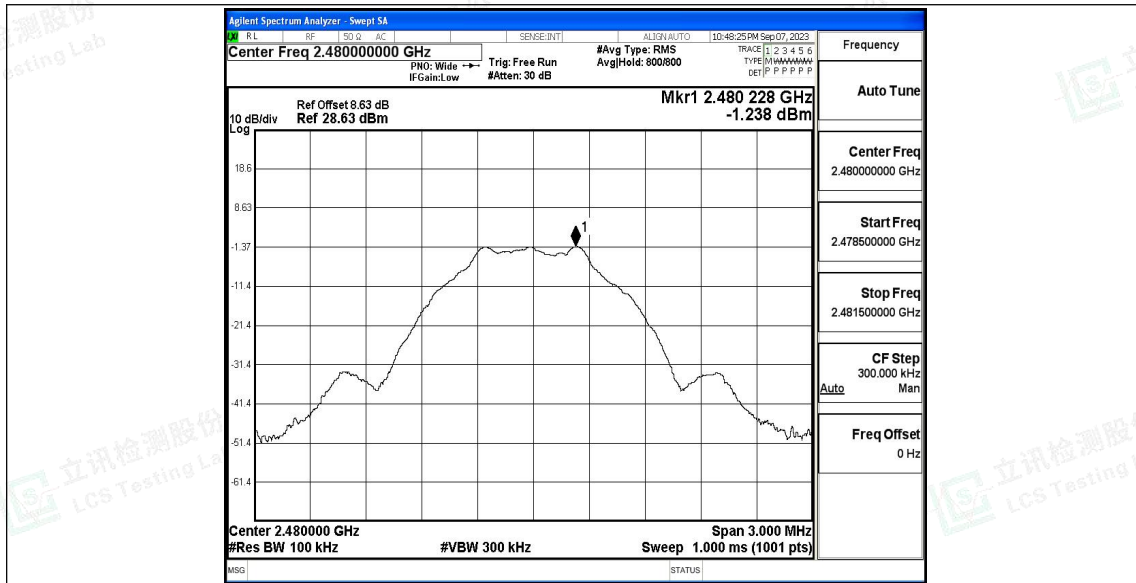


BLE_1M_Ant1_2480_30~1000

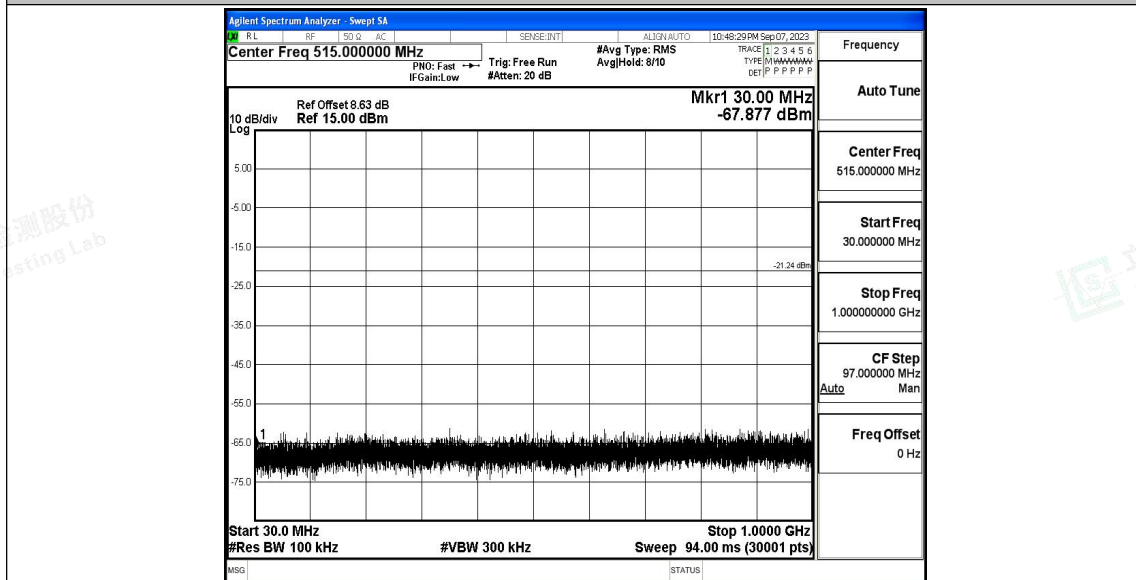

BLE_1M_Ant1_2480_1000~26500



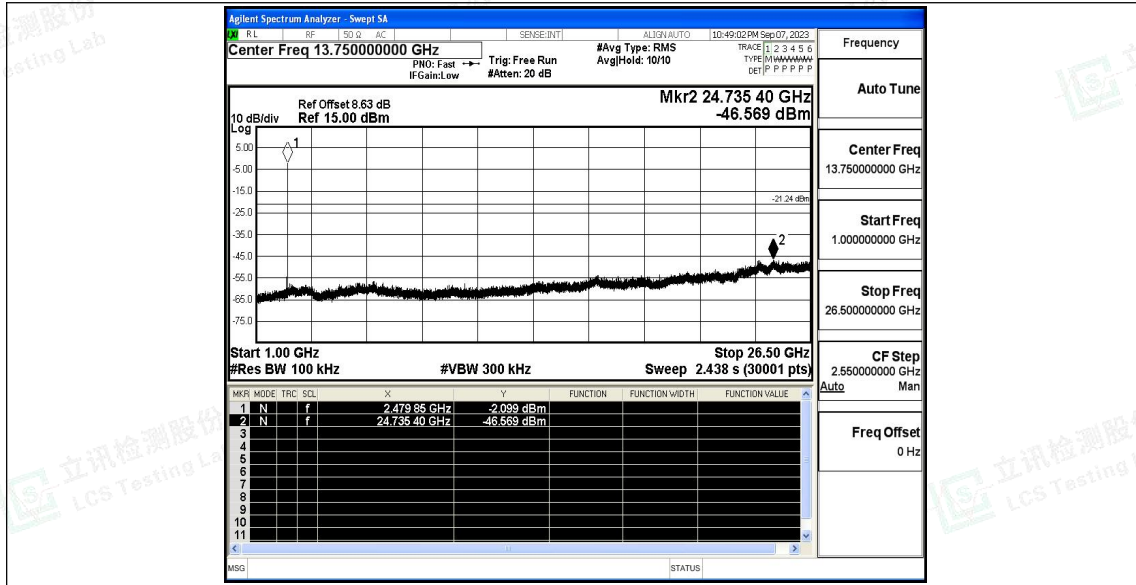



A.6 Duty Cycle


Test Result


TestMode	Antenna	Channel	ON Time [ms]	Period [ms]	X	DC [%]	xFactor	1/T	Limit	Verdict
BLE_1M	Ant1	2402	0.38	0.62	0.6129	61.29	2.13	2.63	---	---
		2440	0.38	0.62	0.6129	61.29	2.13	2.63	---	---
		2480	0.39	0.63	0.6190	61.90	2.08	2.56	---	---





Test Graphs

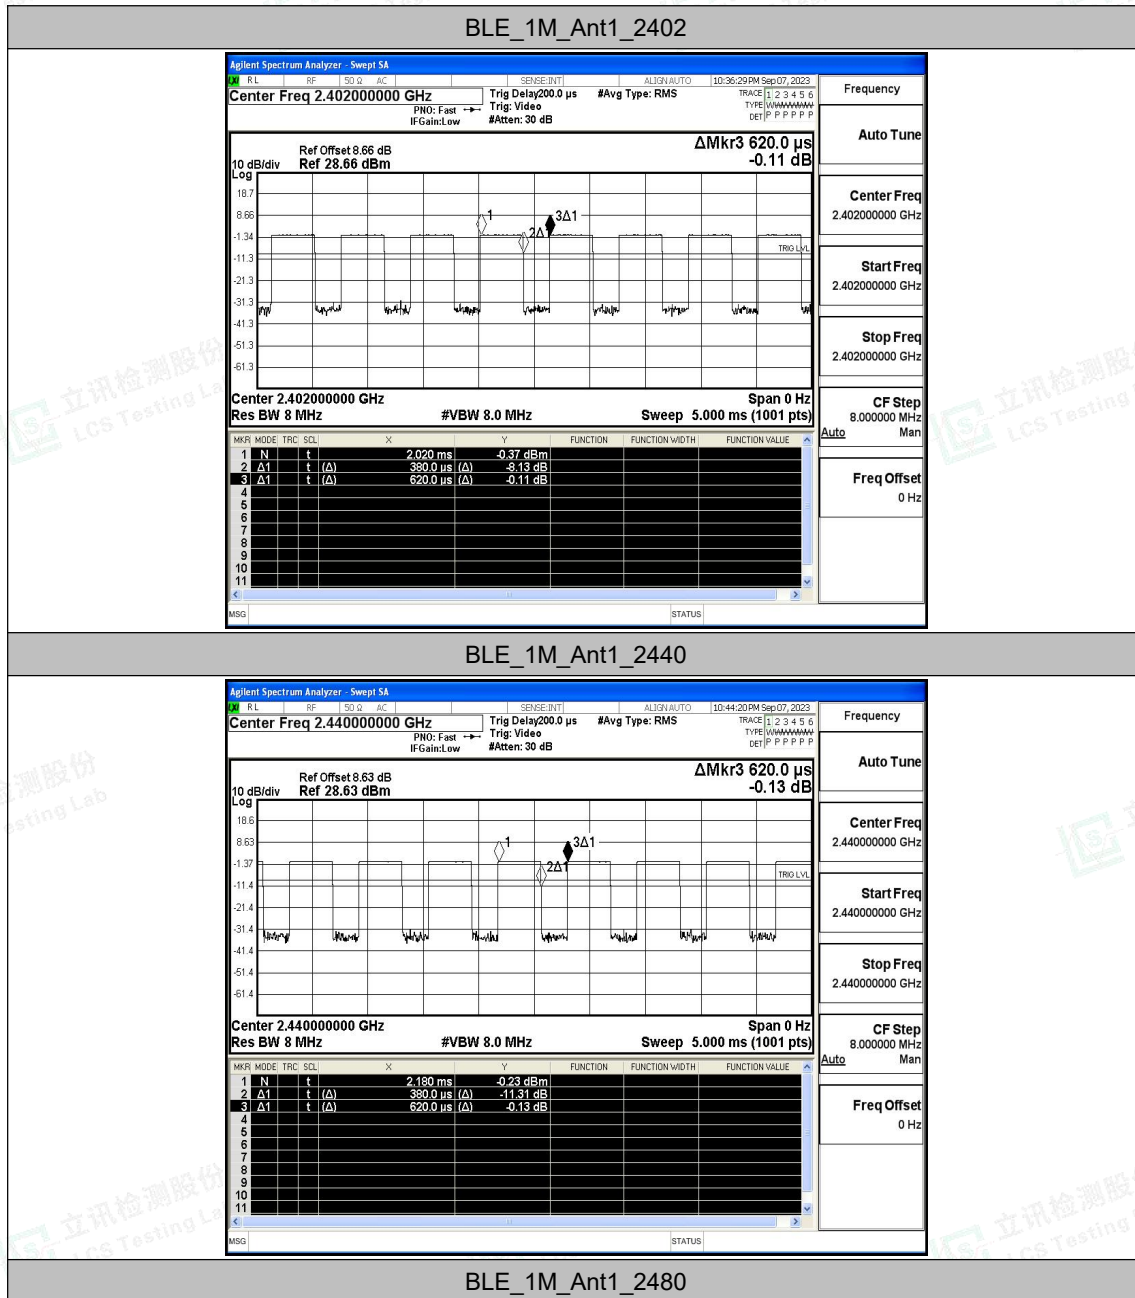

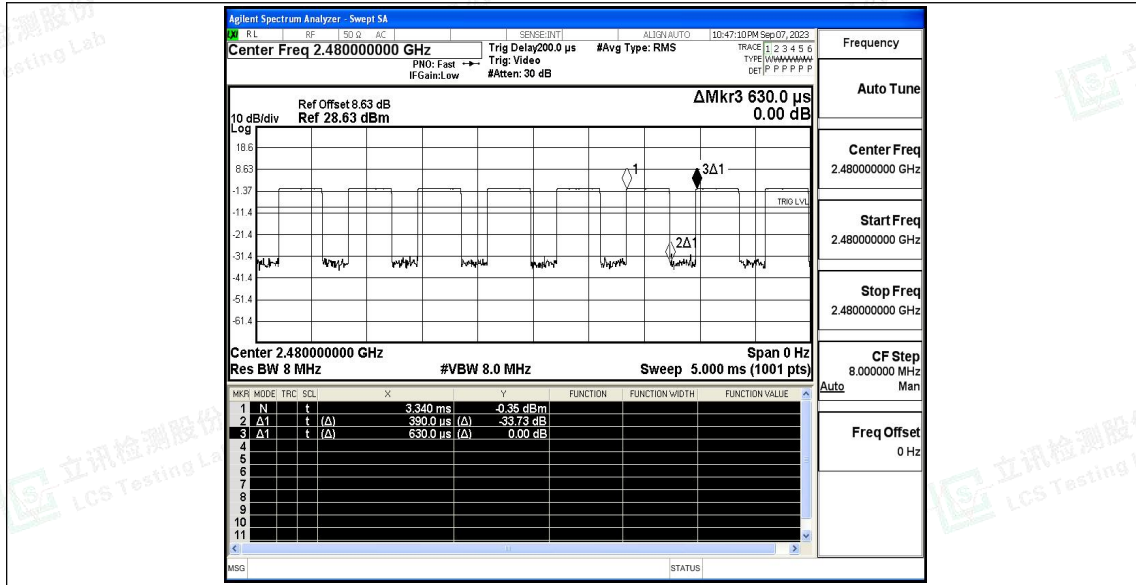



A.7 Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Channel	Detector	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE_1M	Ant1	Low	2402	AV	2310.000	-57.15	≤-41.20	38.05	≤54	PASS
				AV	2383.790	-56.45	≤-41.20	38.75	≤54	PASS
				AV	2390.000	-56.92	≤-41.20	38.28	≤54	PASS
				Peak	2310.000	-49.88	≤-21.20	45.32	≤74	PASS
				Peak	2347.565	-47.57	≤-21.20	47.63	≤74	PASS
				Peak	2390.000	-50.81	≤-21.20	44.39	≤74	PASS
		High	2480	AV	2483.500	-53.6	≤-41.20	41.60	≤54	PASS
				AV	2483.520	-53.6	≤-41.20	41.60	≤54	PASS
				AV	2500.000	-56.09	≤-41.20	39.11	≤54	PASS
				Peak	2483.500	-49.37	≤-21.20	45.83	≤74	PASS
				Peak	2496.320	-47.39	≤-21.20	47.81	≤74	PASS
				Peak	2500.000	-50.56	≤-21.20	44.64	≤74	PASS

Note:


1. The Antenna Gain is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.






Test Graphs

BLE_1M_Ant1_Low_2402_AV

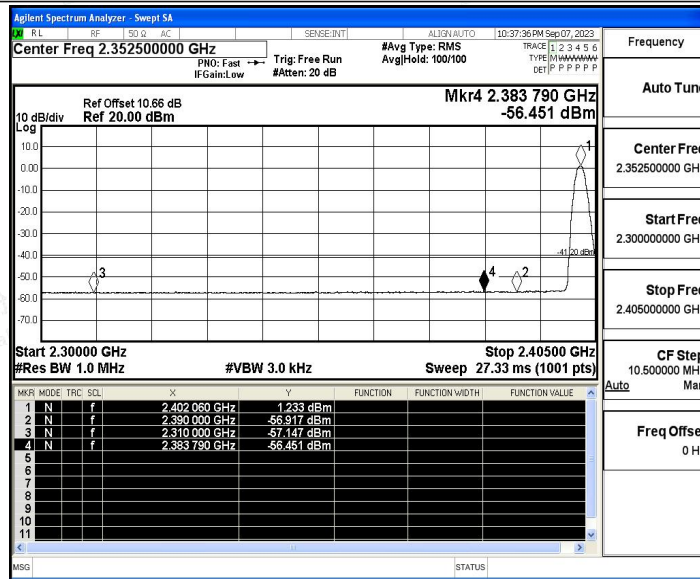

BLE_1M_Ant1_Low_2402_Peak

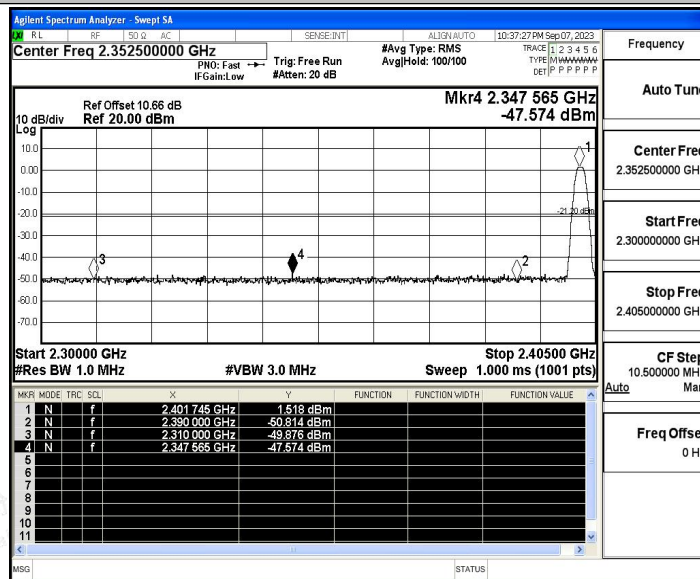

BLE_1M_Ant1_High_2480_AV



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

