





WCDMA Band V (RMC 12.2Kbps)

Lowest Channel

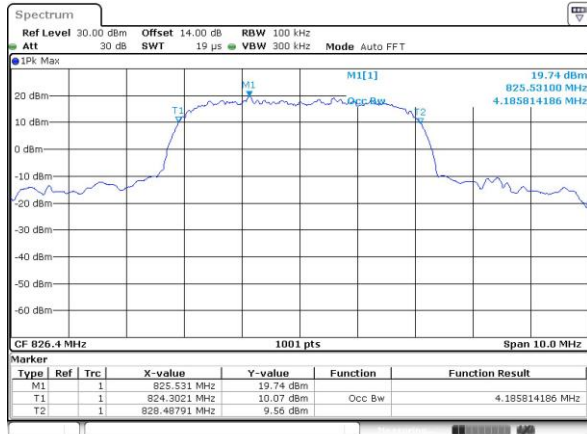


WCDMA Band II (RMC 12.2Kbps)


Lowest Channel

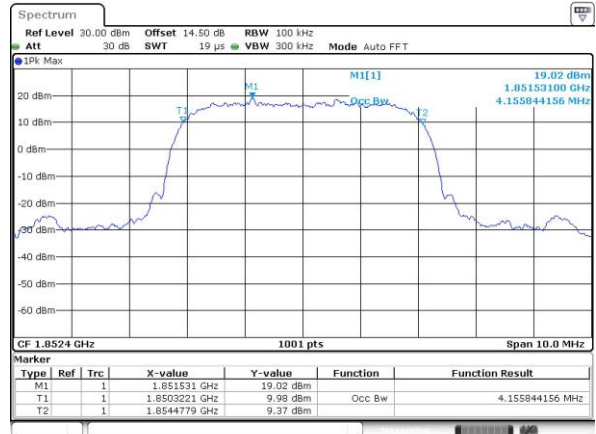


Middle Channel

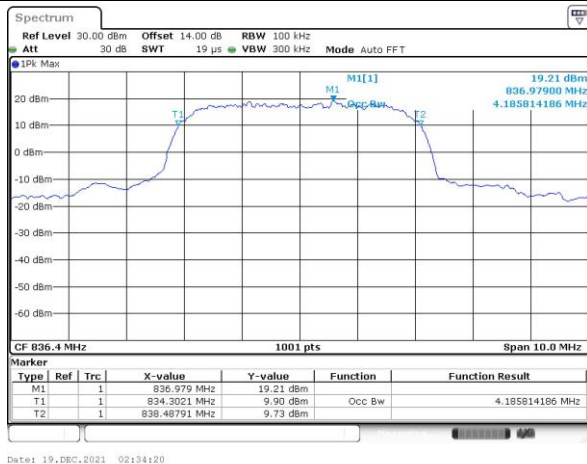


Middle Channel

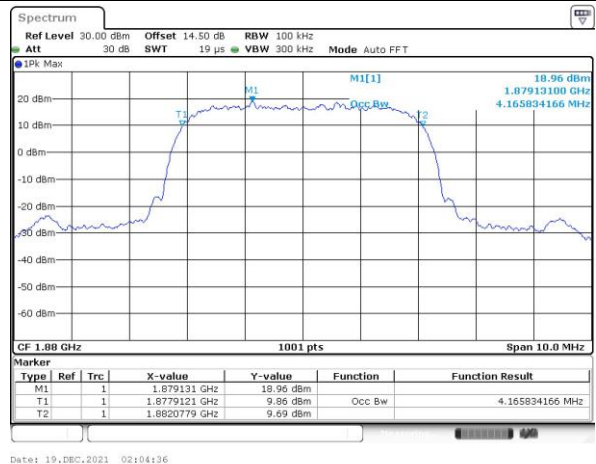

Highest Channel

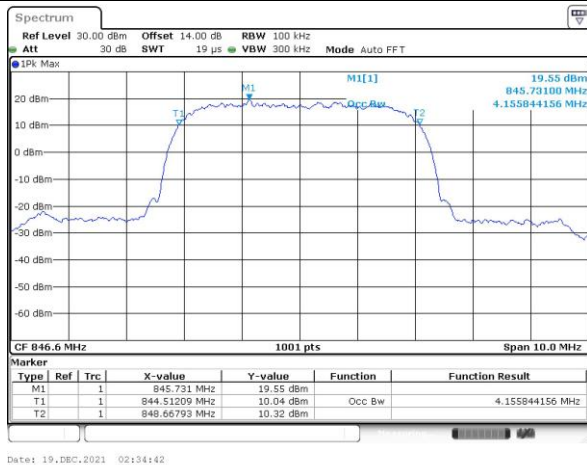


Highest Channel

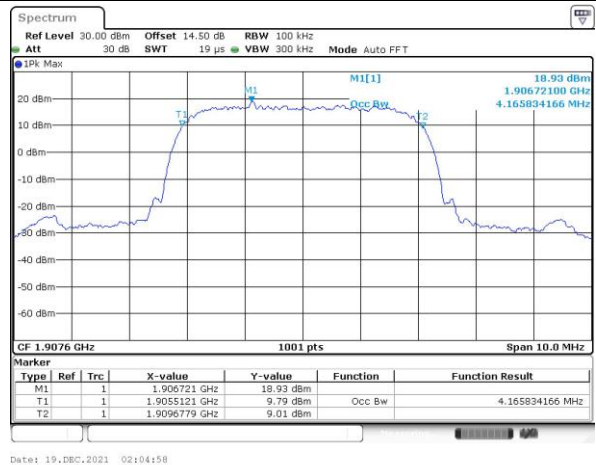




WCDMA Band IV (RMC 12.2Kbps)


Lowest Channel

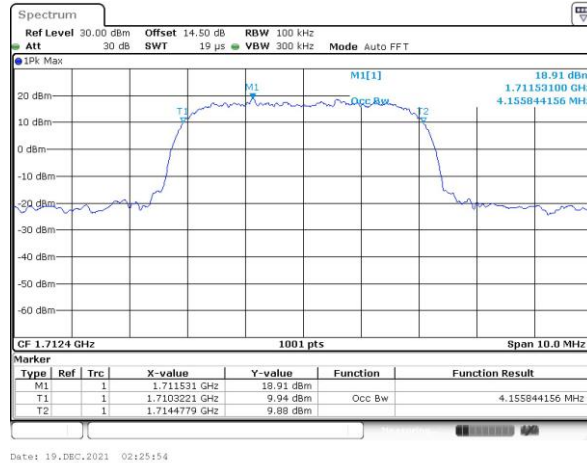

Middle Channel

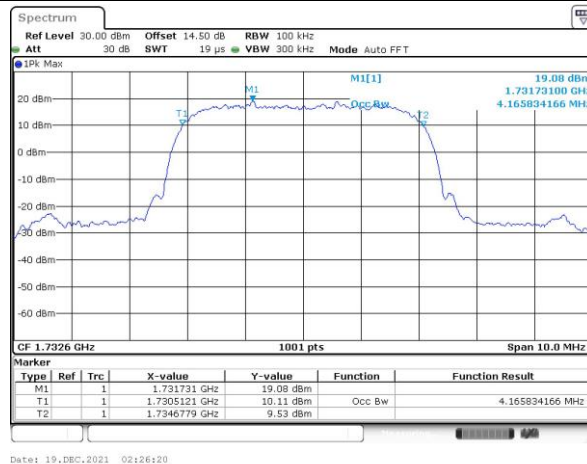

Highest Channel

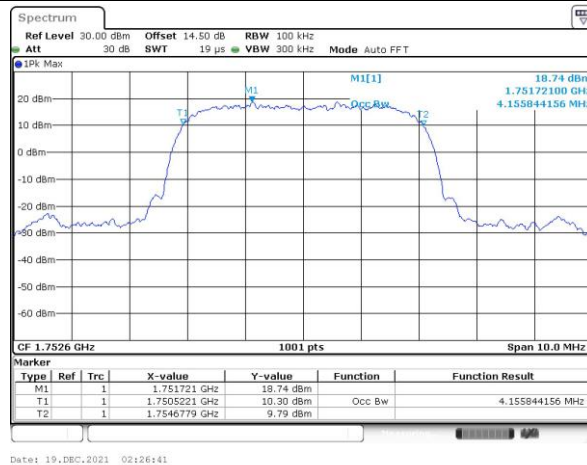





Conducted Band Edge

WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

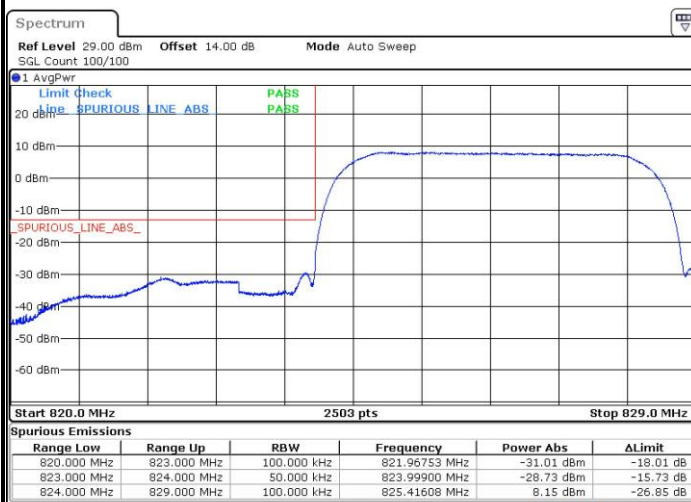


Highest Band Edge

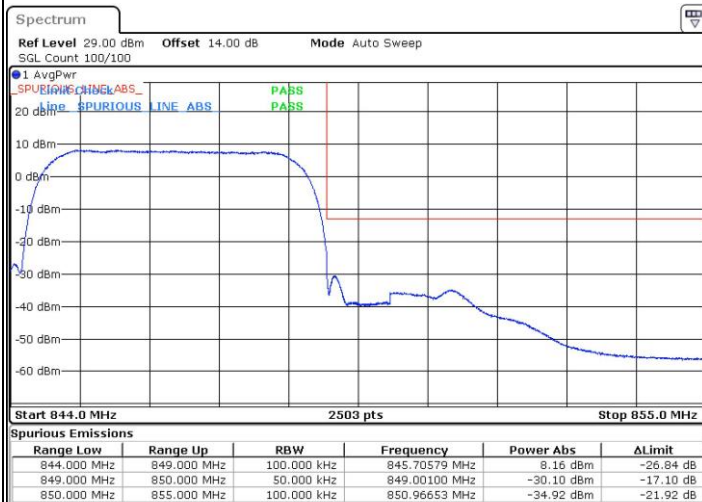

WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

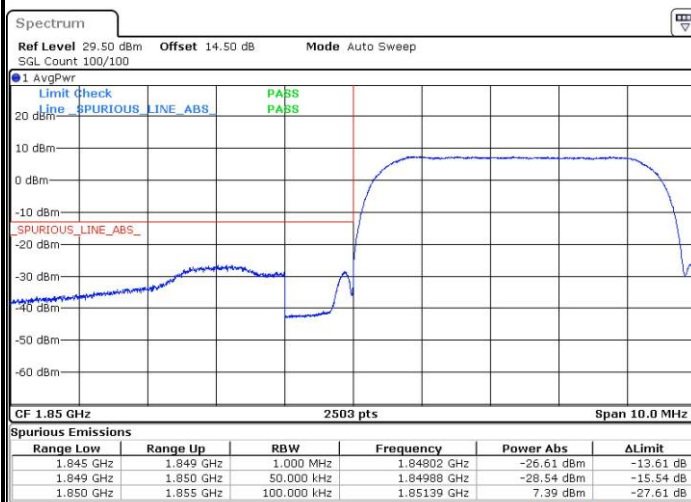


Highest Band Edge





WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

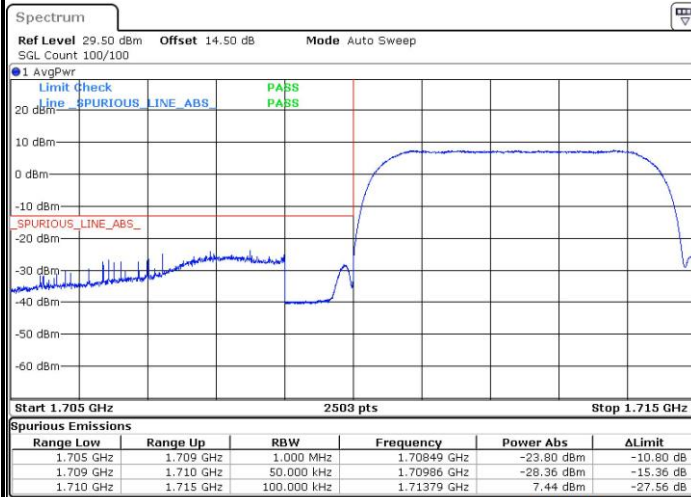

Date: 19.DEC.2021 02:27:19

Highest Band Edge




Date: 19.DEC.2021 02:28:05



Conducted Spurious Emission


WCDMA Band V (RMC 12.2Kbps)

Lowest Channel

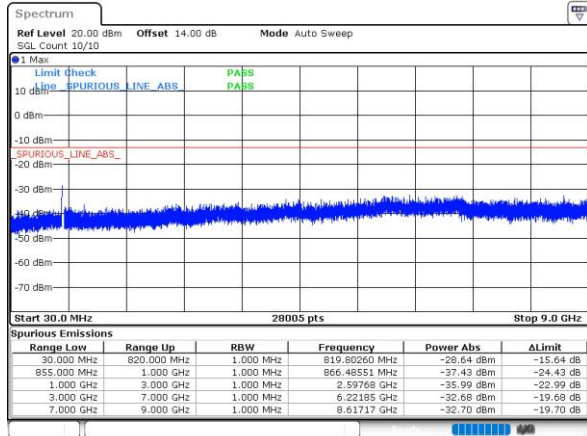


WCDMA Band II (RMC 12.2Kbps)


Lowest Channel

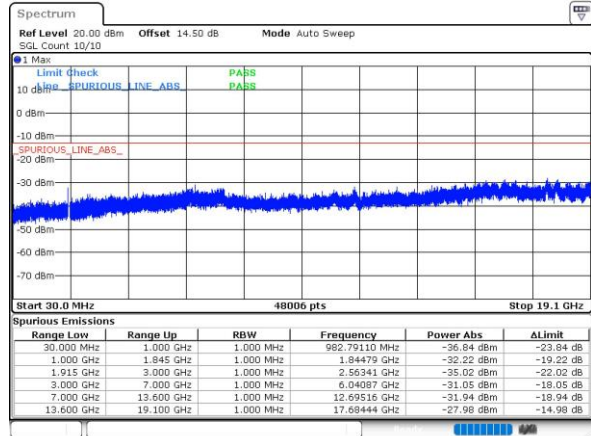


Middle Channel

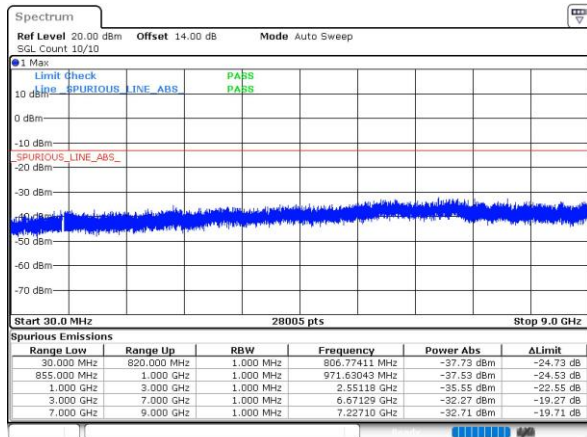


Middle Channel

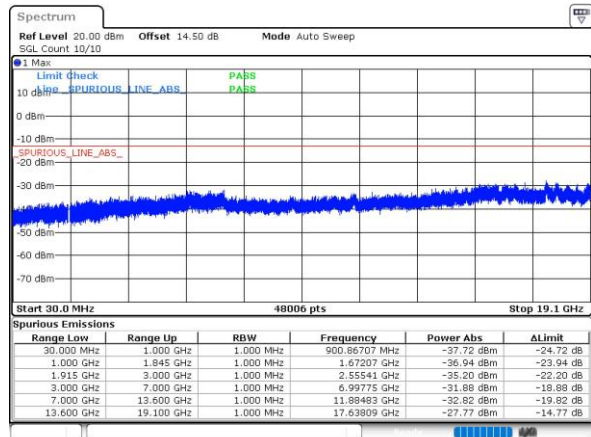

Highest Channel

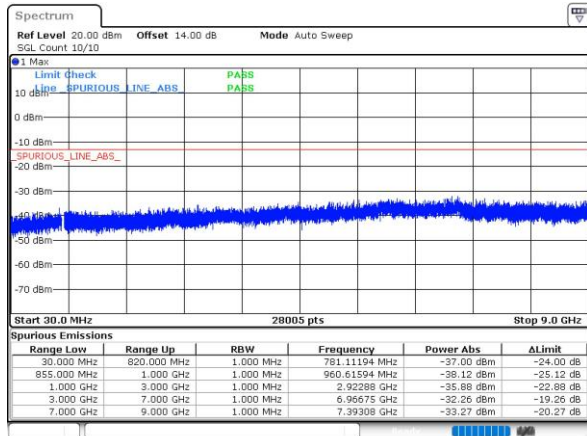


Highest Channel

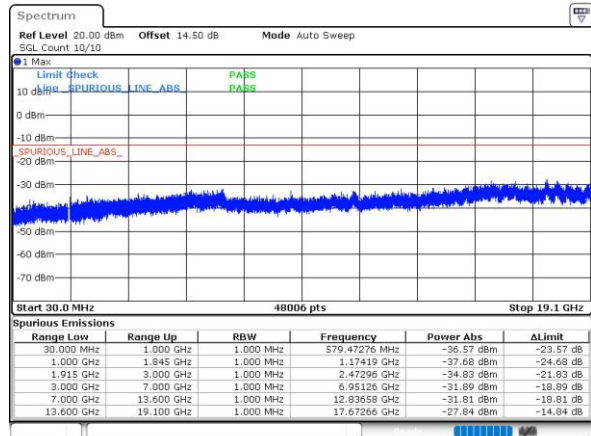




WCDMA Band IV (RMC 12.2Kbps)


Lowest Channel

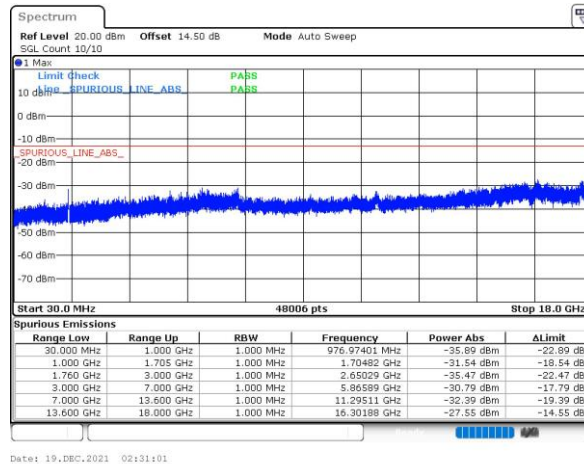

Middle Channel

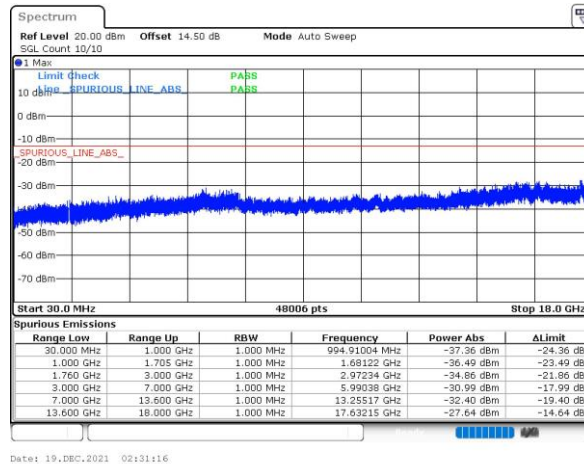

Highest Channel

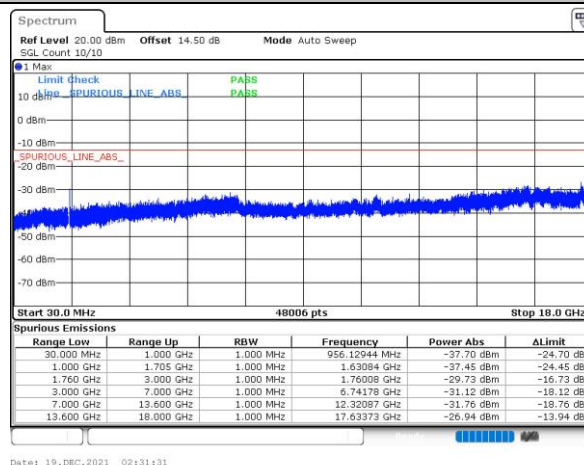

**Frequency Stability**

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2KbpsRMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0008	PASS
40	Normal Voltage	0.0005	
30	Normal Voltage	0.0002	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0001	
0	Normal Voltage	0.0008	
-10	Normal Voltage	0.0012	
-20	Normal Voltage	0.0012	
-30	Normal Voltage	0.0006	
20	Maximum Voltage	0.0010	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0005	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0002	PASS
40	Normal Voltage	0.0003	
30	Normal Voltage	0.0005	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0002	
0	Normal Voltage	0.0003	
-10	Normal Voltage	0.0005	
-20	Normal Voltage	0.0006	
-30	Normal Voltage	0.0005	
20	Maximum Voltage	0.0001	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0005	

Note:

1. Normal Voltage = 3.87V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage =4.45 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0002	PASS
40	Normal Voltage	0.0005	
30	Normal Voltage	0.0002	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0004	
0	Normal Voltage	0.0006	
-10	Normal Voltage	0.0003	
-20	Normal Voltage	0.0002	
-30	Normal Voltage	0.0008	
20	Maximum Voltage	0.0003	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0005	

Note:

1. Normal Voltage = 3.87V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage =4.45 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of Radiated Spurious Emission Test

Test Engineer :	Zhaohui Liang	Temperature :	22~25°C
		Relative Humidity :	48~52%

GSM850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA. Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-58.29	-13	-45.29	-70.00	-61.54	4.00	9.40	H
	2509.2	-55.38	-13	-42.38	-74.28	-58.95	4.88	10.60	H
	3345.6	-54.43	-13	-41.43	-75.50	-59.36	5.52	12.60	H
	4182	-51.19	-13	-38.19	-72.86	-55.66	6.00	12.62	H
	1672.8	-51.31	-13	-38.31	-63.73	-54.56	4.00	9.40	V
	2509.2	-51.92	-13	-38.92	-71.03	-55.49	4.88	10.60	V
	3345.6	-54.07	-13	-41.07	-75.44	-59.00	5.52	12.60	V
	4182	-46.91	-13	-33.91	-71.11	-51.38	6.00	12.62	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EDGE 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA. Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-57.99	-13	-44.99	-69.70	-61.24	4.00	9.40	H
	2509.2	-56.99	-13	-43.99	-75.89	-60.56	4.88	10.60	H
	3345.6	-56.99	-13	-43.99	-78.06	-61.92	5.52	12.60	H
	1672.8	-53.33	-13	-40.33	-65.75	-56.58	4.00	9.40	V
	2509.2	-56.75	-13	-43.75	-75.86	-60.32	4.88	10.60	V
	3345.6	-54.75	-13	-41.75	-76.12	-59.68	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA. Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-66.92	-13	-53.92	-78.63	-70.17	4.00	9.40	H
	2509.2	-60.72	-13	-47.72	-79.62	-64.29	4.88	10.60	H
	3345.6	-60.36	-13	-47.36	-81.43	-65.29	5.52	12.60	H
	1672.8	-64.98	-13	-51.98	-77.40	-68.23	4.00	9.40	V
	2509.2	-60.78	-13	-47.78	-79.89	-64.35	4.88	10.60	V
	3345.6	-59.98	-13	-46.98	-81.35	-64.91	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA. Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-52.77	-13	-39.77	-75.11	-59.52	5.85	12.60	H
	5640	-53.82	-13	-40.82	-77.94	-59.62	7.30	13.10	H
	7520	-55.19	-13	-42.19	-81.47	-58.34	8.35	11.50	H
	9400	-50.71	-13	-37.71	-78.70	-52.86	9.85	12.00	H
	3760	-48.02	-13	-35.02	-73.52	-54.77	5.85	12.60	V
	5640	-55.70	-13	-42.70	-79.97	-61.50	7.30	13.10	V
	7520	-55.46	-13	-42.46	-81.72	-58.61	8.35	11.50	V
	9400	-51.40	-13	-38.40	-80.76	-53.55	9.85	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EDGE1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA. Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-53.35	-13	-40.35	-75.69	-60.10	5.85	12.60	H
	5640	-54.59	-13	-41.59	-78.71	-60.39	7.30	13.10	H
	7520	-55.29	-13	-42.29	-81.57	-58.44	8.35	11.50	H
	9400	-49.90	-13	-36.90	-77.89	-52.05	9.85	12.00	H
	3760	-46.24	-13	-33.24	-71.74	-52.99	5.85	12.60	V
	5640	-53.31	-13	-40.31	-77.58	-59.11	7.30	13.10	V
	7520	-55.14	-13	-42.14	-81.4	-58.29	8.35	11.50	V
	9400	-50.38	-13	-37.38	-79.74	-52.53	9.85	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA. Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-50.84	-13	-37.84	-73.18	-57.59	5.85	12.60	H
	5640	-56.67	-13	-43.67	-80.79	-62.47	7.30	13.10	H
	7520	-55.29	-13	-42.29	-81.57	-58.44	8.35	11.50	H
	3760	-48.59	-13	-35.59	-74.09	-55.34	5.85	12.60	V
	5640	-56.32	-13	-43.32	-80.59	-62.12	7.30	13.10	V
	7520	-54.94	-13	-41.94	-81.2	-58.09	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band IV (RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA. Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3465.2	-56.58	-13	-43.58	-78.53	-63.43	5.65	12.50	H
	5197.8	-56.83	-13	-43.83	-80.99	-62.50	7.13	12.80	H
	6930.4	-55.55	-13	-42.55	-81.25	-58.95	8.40	11.80	H
	3465.2	-57.63	-13	-44.63	-79.38	-64.48	5.65	12.50	V
	5197.8	-56.47	-13	-43.47	-80.9	-62.14	7.13	12.80	V
	6930.4	-54.78	-13	-41.78	-81.4	-58.18	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.