

FCC - TEST REPORT

Report Number : **68.950.21.0388.01** Date of Issue: 2021-07-02

Model : **LTI610**

Product Type : Bluetooth Earphones

Applicant : Little Bird Co., Ltd

Address : 18F, Building D, No.7 Zhichun Road, 100191 Beijing, PEOPLE'S
REPUBLIC OF CHINA.

Manufacturer : Little Bird Co., Ltd

Address : 18F, Building D, No.7 Zhichun Road, 100191 Beijing, PEOPLE'S
REPUBLIC OF CHINA.

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : 38

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation chapter A-3.4.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

1 Table of Contents

| | | |
|-----|--|----|
| 1 | Table of Contents..... | 2 |
| 2 | Details about the Test Laboratory..... | 3 |
| 3 | Description of the Equipment under Test | 4 |
| 4 | Summary of Test Standards | 5 |
| 5 | Summary of Test Results..... | 6 |
| 6 | General Remarks..... | 7 |
| 7 | Test Setups..... | 8 |
| 8 | Systems test configuration..... | 9 |
| 9 | Technical Requirement..... | 10 |
| 9.1 | Conducted Emission | 10 |
| 9.2 | Conducted output power | 13 |
| 9.3 | 6dB bandwidth..... | 16 |
| 9.4 | 99% bandwidth..... | 18 |
| 9.5 | Power spectral density | 20 |
| 9.6 | Spurious RF conducted emissions..... | 22 |
| 9.7 | Band edge | 27 |
| 9.8 | Spurious radiated emissions for transmitter..... | 29 |
| 10 | System Measurement Uncertainty | 38 |

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park,
Nantou Checkpoint Road 2, Nanshan District,
Shenzhen City, 518052,
P. R. China

FCC Designation Number: CN5009

FCC Registration No.: 514049

Telephone: 86 755 8828 6998
Fax: 86 755 8828 5299

3 Description of the Equipment under Test

| | |
|-------------------------------|--|
| Product: | Bluetooth Earphones |
| Model no.: | LTI610 |
| FCC ID: | 2AW92LTI610 |
| Rating: | 3.7VDC, 120mAh, (Supplied by Rechargeable Li-ion Battery) or 5VDC (Supplied by external adapter for Charging rechargeable battery) |
| RF Transmission Frequency: | 2402MHz-2480MHz |
| No. of Operated Channel: | 40 |
| Modulation: | GFSK |
| Antenna Type: | Internal antenna |
| Antenna Ports | Ant 1 |
| Antenna Gain: | 2.5dBi Max for 2.4GHz |
| Description of the EUT: | The equipment supports Bluetooth Low Energy/Bluetooth BR+EDR functions. The TX and RX range is 2402MHz-2480MHz |

4 Summary of Test Standards

| Test Standards | |
|--|--|
| FCC Part 15 Subpart C 10-1-2020 Edition | PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators |

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 and ANSI C63.10 (2013).

5 Summary of Test Results

| Technical Requirements | | | |
|-----------------------------------|---|--------------------|-----------|
| FCC Part 15 Subpart C | | | |
| Test Condition | | Test Result | Test Site |
| §15.207 | Conducted emission AC power port | Pass | Site 1 |
| §15.247 (b) (3) | Conducted output power | Pass | Site 1 |
| §15.247(e) | Power spectral density | Pass | Site 1 |
| §15.247(a)(2) | 6dB bandwidth | Pass | Site 1 |
| §15.247(a)(1) | 20dB Occupied bandwidth | N/A | -- |
| §15.247(a)(2) | 99% Occupied Bandwidth | Pass | Site 1 |
| §15.247(a)(1) | Carrier frequency separation | N/A | -- |
| §15.247(a)(1)(iii) | Number of hopping frequencies | N/A | -- |
| §15.247(a)(1)(iii) | Dwell Time | N/A | -- |
| §15.247(d) | Spurious RF conducted emissions | Pass | Site 1 |
| §15.247(d) | Band edge | Pass | Site 1 |
| §15.247(d) & §15.209 & §15.205 | Spurious radiated emissions for transmitter | Pass | Site 1 |
| §15.203 | Antenna requirement | Pass See note 2 | -- |

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an Internal antenna, which gain is 2.5dBi Max for 2.4GHz. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2AW92LTI610, complies with 15.207, 15.209, 15.205, 15.247 of the FCC Part 15, Subpart C

LTI610 is a Bluetooth Earphones with Bluetooth Low Energy/Bluetooth BDR+EDR functions.

This report is for the Bluetooth Low Energy.

SUMMARY:

All tests according to the regulations cited on page 6 were

■ - Performed

□ - **Not** Performed

The Equipment under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: 2021-05-28

Testing Start Date: 2021-05-28

Testing End Date: 2021-07-02

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch –

Reviewed by:

Prepared by:

Tested by:



John Zhi
Project Manager


Joe Gu
Project Engineer

Carry Cai
Test Engineer


7 Test Setups

7.1 Radiated test setups


Below 1GHz

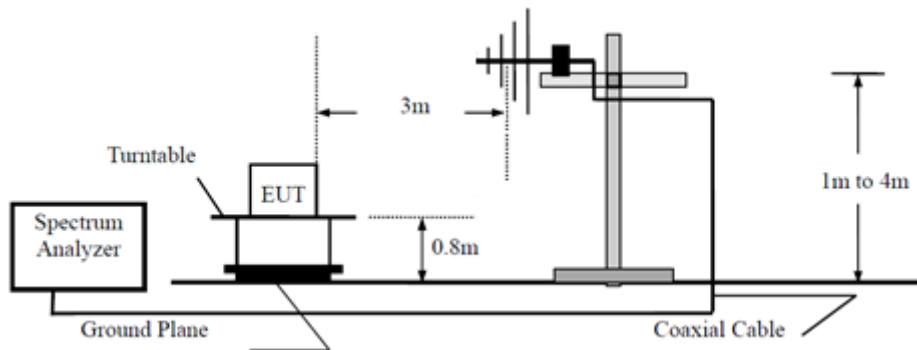


Above 1GHz

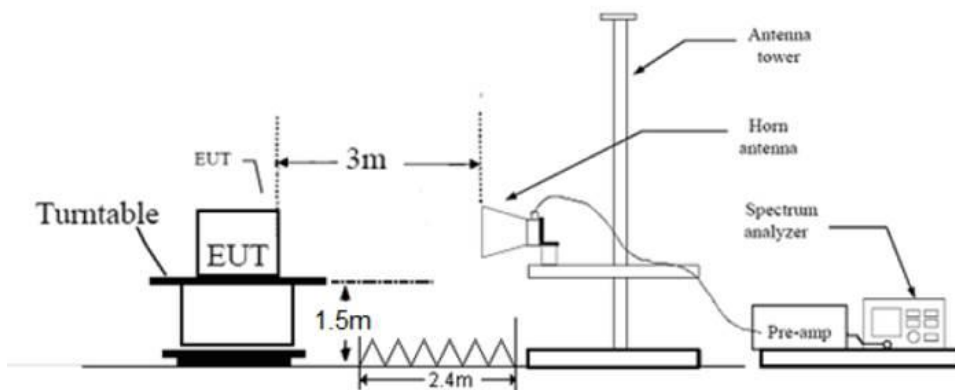

7.2 Conducted RF test setups



7.3 AC Power Line Conducted Emission test setups

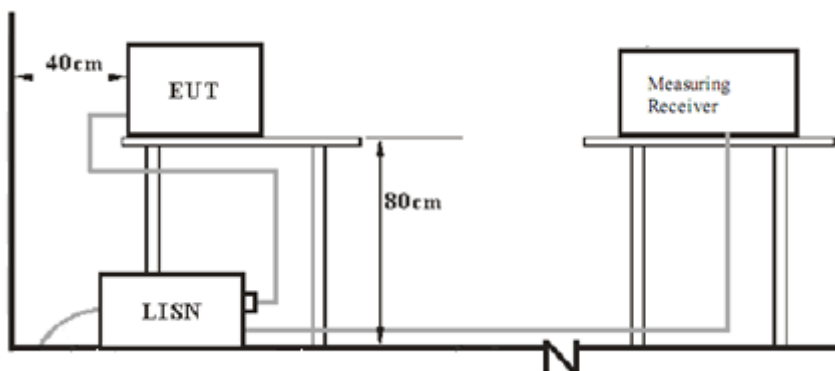

8 Systems test configuration

Auxiliary Equipment Used during Test:

| Description | Manufacturer | Model no. | Serial no. | CAL. DUE DATE |
|-------------|--------------|-----------|------------|---------------|
| Laptop | Thinkpad | X220 | --- | --- |
| Adaptor | Apple | A1443 | --- | --- |

The system was configured to channel 0, 19, and 39 for the test.

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

Limit


According to §15.207, conducted emissions limit as below:

| Frequency MHz | QP Limit dB μ V | AV Limit dB μ V |
|------------------|------------------------|------------------------|
| 0.150-0.500 | 66-56* | 56-46* |
| 0.500-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreasing linearly with logarithm of the frequency

Conducted Emission

Product Type : Bluetooth Earphones
 M/N : LTI610
 Operating Condition : Charging + Transmit
 Test Specification : Power Line, Live
 Comment : AC 120V/60Hz (External adapter)

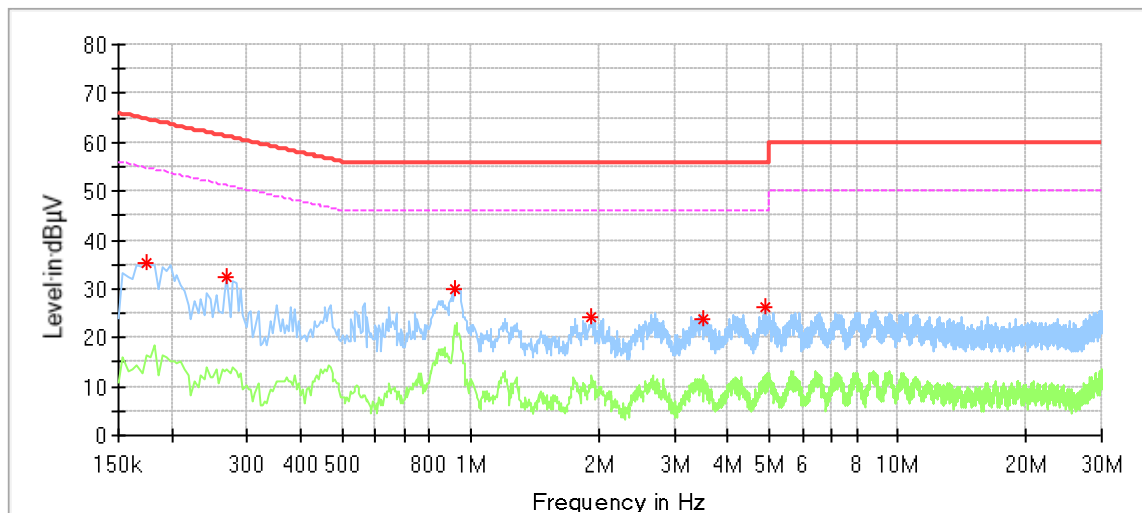

| Frequency (MHz) | MaxPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Line | Corr. (dB) |
|-----------------|----------------|----------------|--------------|-------------|------|------------|
| 0.174000 | 35.17 | --- | 64.77 | 29.59 | L1 | 9.64 |
| 0.270000 | 32.31 | --- | 61.12 | 28.80 | L1 | 9.64 |
| 0.918000 | 30.14 | --- | 56.00 | 25.86 | L1 | 9.66 |
| 1.910000 | 24.02 | --- | 56.00 | 31.99 | L1 | 9.68 |
| 3.522000 | 23.70 | --- | 56.00 | 32.30 | L1 | 9.73 |
| 4.894000 | 26.06 | --- | 56.00 | 29.94 | L1 | 9.76 |

Remark :


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : Bluetooth Earphones
 M/N : LTI610
 Operating Condition : Charging + Transmit
 Test Specification : Power Line, Neutral
 Comment : AC 120V/60Hz (External adapter)

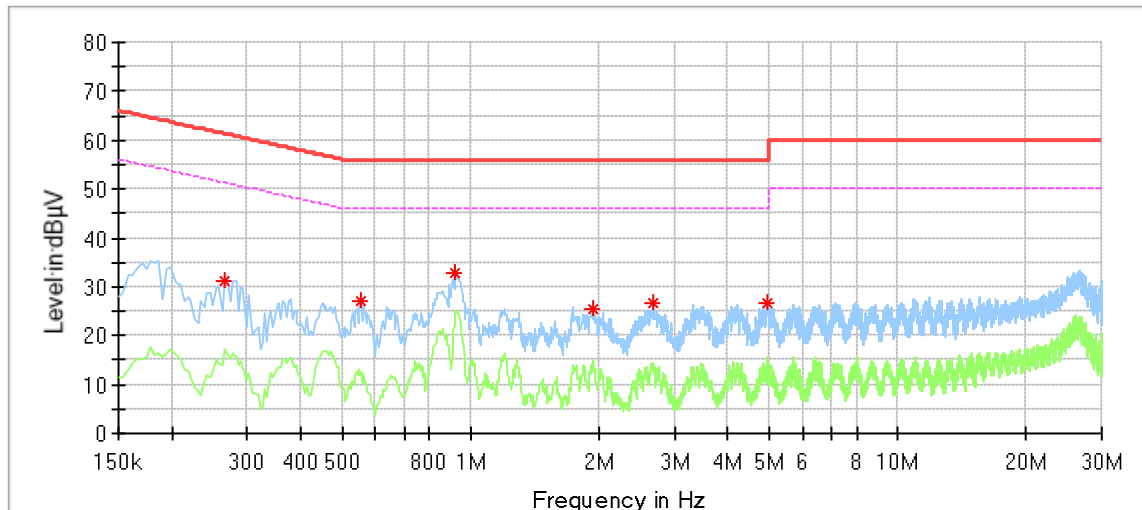

| Frequency (MHz) | MaxPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Line | Corr. (dB) |
|-----------------|----------------|----------------|--------------|-------------|------|------------|
| 0.266000 | 31.36 | --- | 61.24 | 29.88 | N | 9.63 |
| 0.554000 | 27.27 | --- | 56.00 | 28.73 | N | 9.65 |
| 0.922000 | 33.00 | --- | 56.00 | 23.00 | N | 9.65 |
| 1.926000 | 25.24 | --- | 56.00 | 30.76 | N | 9.67 |
| 2.674000 | 26.53 | --- | 56.00 | 29.47 | N | 9.70 |
| 4.966000 | 26.54 | --- | 56.00 | 29.46 | N | 9.77 |

Remark :

Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

9.2 Conducted output power

Test Method

1. The EUT was placed on 0.8m height table, the RF output of EUT was connected to the power meter by RF cable. The path loss was compensated to the results for each measurement.
2. Use the following spectrum analyzer settings:
RBW > the 6dB bandwidth of the emission being measured, VBW \geq 3RBW, Span \geq 3RBW
Sweep = auto, Detector function = peak, Trace = max hold.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

Limits


According to §15.247 (b) (3), conducted output power limit as below:

| Frequency Range MHz | Limit W | Limit dBm |
|------------------------|------------|--------------|
| 2400-2483.5 | ≤ 1 | ≤ 30 |

Test result as below table


| Frequency (MHz) | Conducted Output Power (dBm) | Limit (dBm) | Result |
|---------------------------|------------------------------------|----------------|--------|
| Low channel 2402MHz | 5.31 | 30 | Pass |
| Middle channel 2440MHz | 5.30 | 30 | Pass |
| High channel 2480MHz | 4.82 | 30 | Pass |

Low channel 2402MHz

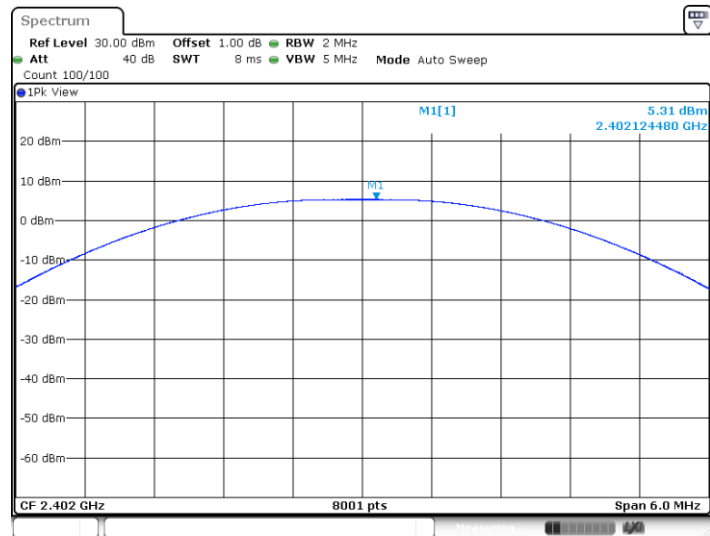


Date: 2 JUL 2021 11:00:47

Middle channel 2440MHz

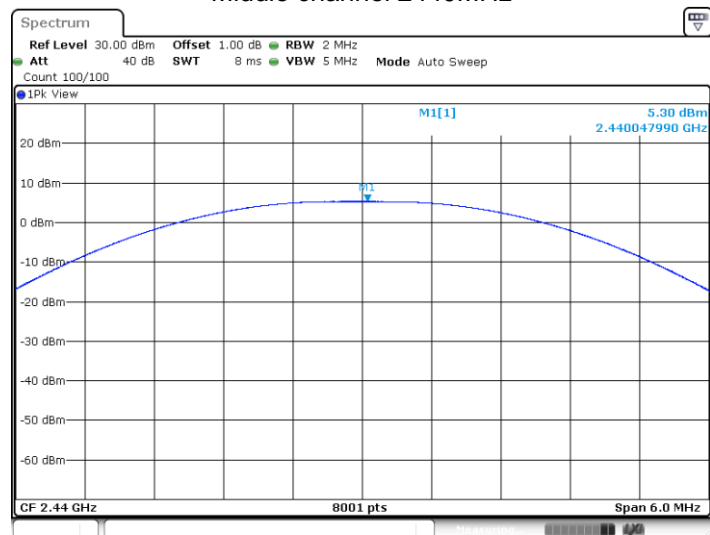

Date: 2 JUL 2021 11:03:27

High channel 2480MHz

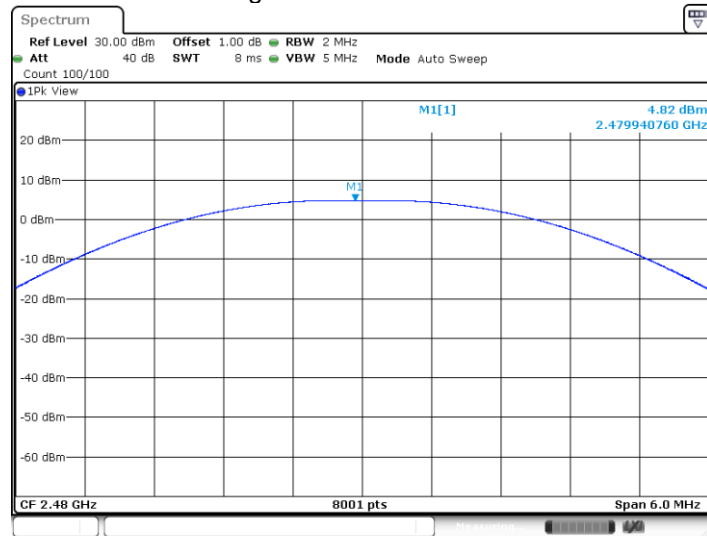

Date: 2 JUL 2021 11:05:06

9.3 6dB bandwidth

Test Method

1. Connect EUT test port to spectrum analyzer.
2. Use the following spectrum analyzer settings:
RBW=100K, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
3. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.
4. Allow the trace to stabilize, record the X dB Bandwidth value.

Limit


Limit [kHz]

≥500


Test result

| Channel (MHz) | Result (MHz) | Limit (KHz) | Verdict |
|---------------|--------------|-------------|---------|
| 2402 | 0.728 | ≥500 | PASS |
| 2440 | 0.724 | ≥500 | PASS |
| 2480 | 0.728 | ≥500 | PASS |

Test Graphs

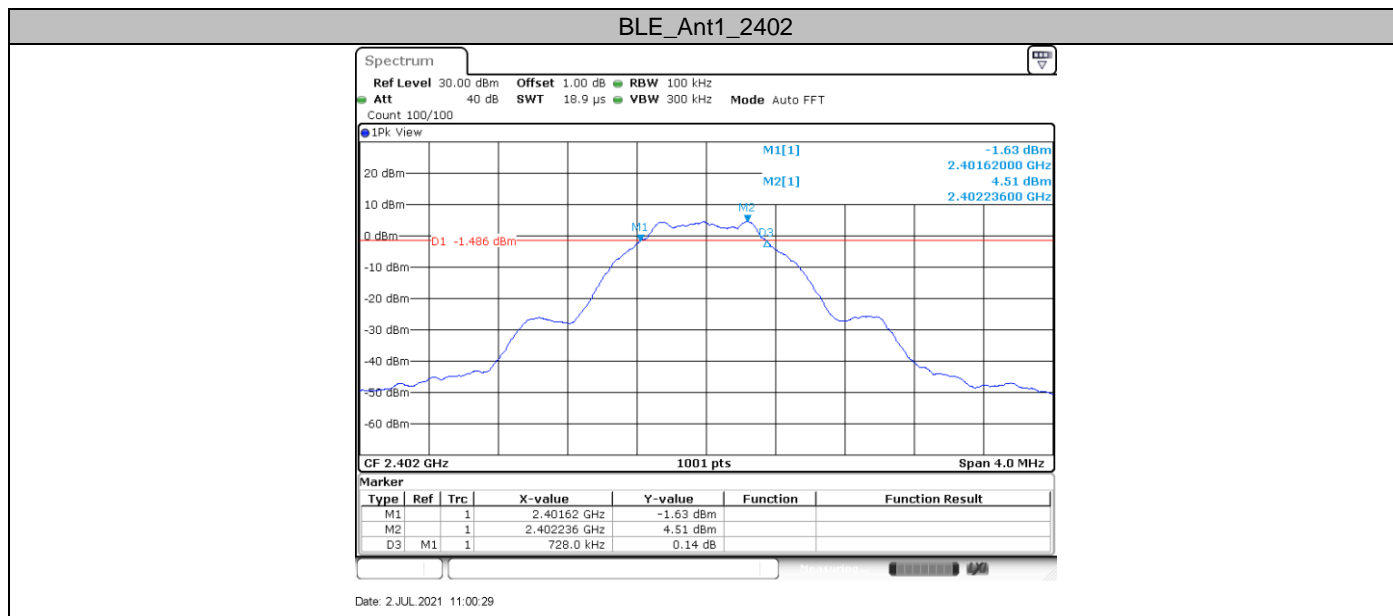


BLE_Ant1_2440

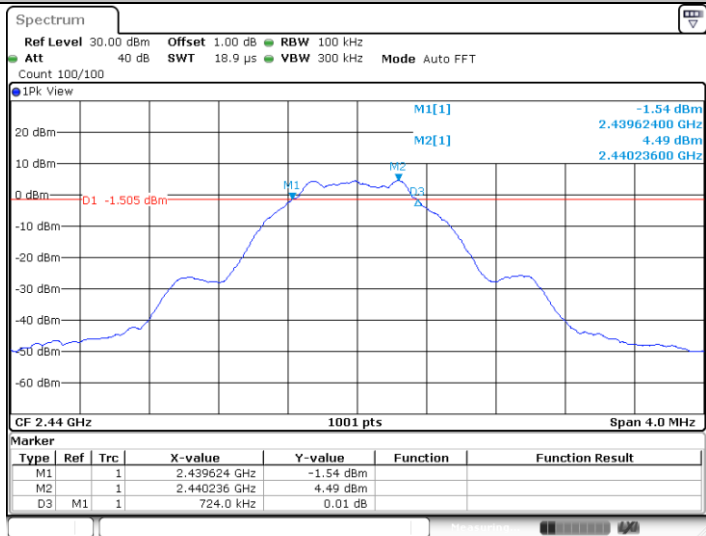

Date: 2 JUL 2021 11:03:10

BLE_Ant1_2480

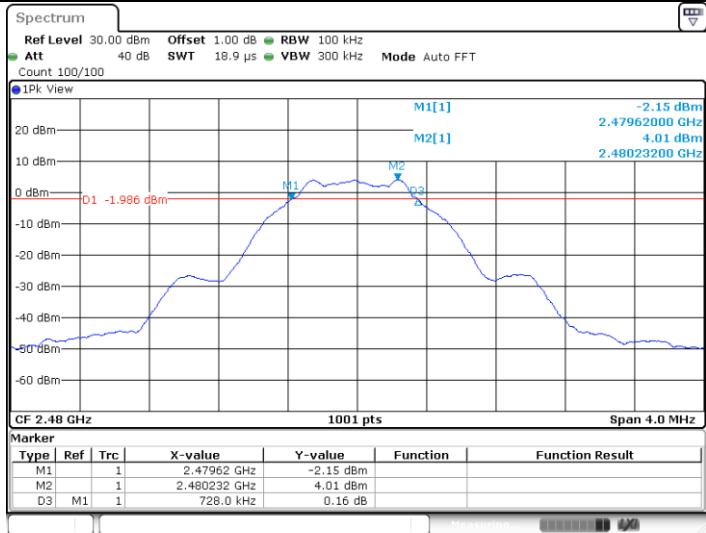

Date: 2 JUL 2021 11:04:49

9.4 99% bandwidth

Test Method

1. Connect EUT test port to spectrum analyzer.
2. Use the following spectrum analyzer settings:
RBW=1% to 5% of the actual occupied, VBW \geq 3RBW, Sweep = auto,
Detector function = peak, Trace = max hold
3. Use the automatic bandwidth measurement capability of an instrument, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.
4. Allow the trace to stabilize, record the X dB Bandwidth value.

Limit


Limit [kHz]

--


Test result

| Channel (MHz) | Result (MHz) | Limit | Verdict |
|---------------|--------------|-------|---------|
| 2402 | 1.035 | --- | PASS |
| 2440 | 1.039 | --- | PASS |
| 2480 | 1.035 | --- | PASS |

Test Graphs

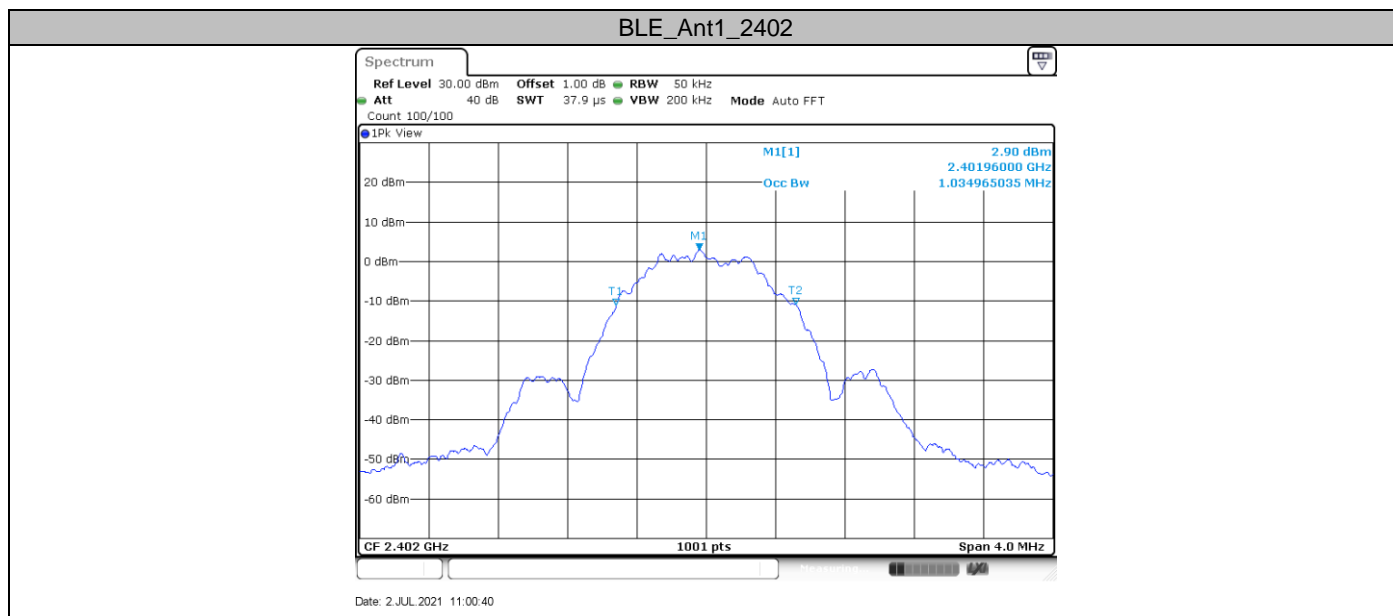


BLE_Ant1_2440

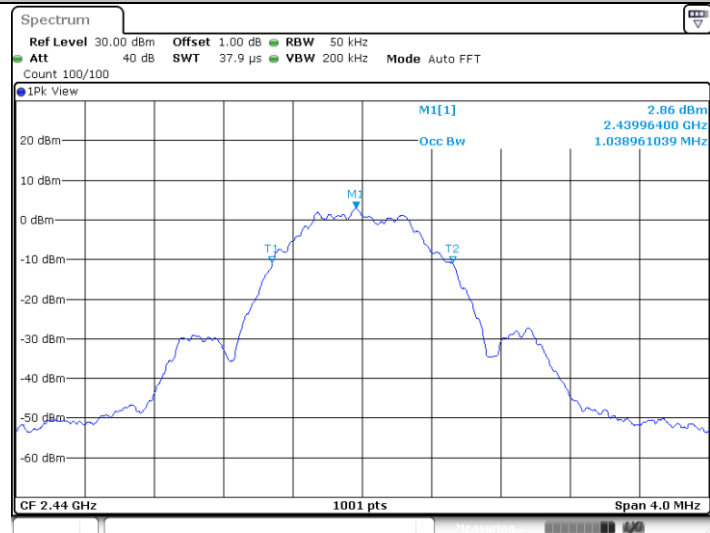

Date: 2 JUL 2021 11:03:21

BLE_Ant1_2480

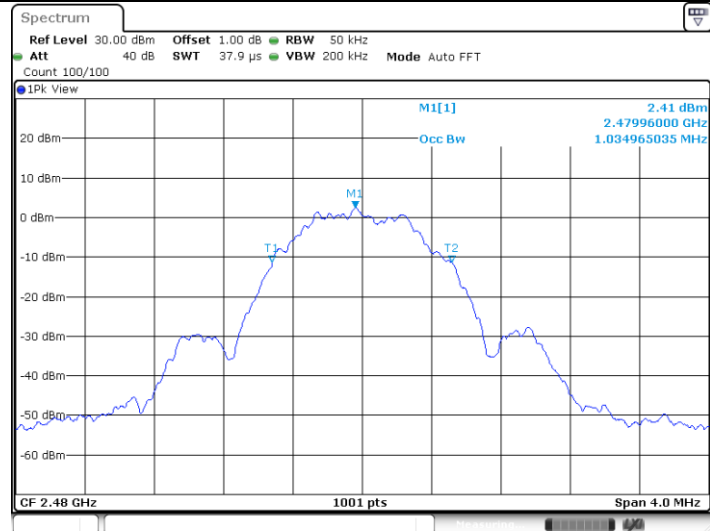

Date: 2 JUL 2021 11:05:00

9.5 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW \geq 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
3. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
4. Repeat above procedures until other frequencies measured were completed.

Limit


Limit [dBm/3KHz]

≤ 8


Test result

| Channel (MHz) | Result (dBm/3KHz) | Limit(dBm/3KHz) | Verdict |
|---------------|-------------------|-----------------|---------|
| 2402 | -10.31 | 8 | PASS |
| 2440 | -10.30 | 8 | PASS |
| 2480 | -10.87 | 8 | PASS |

Test Graphs

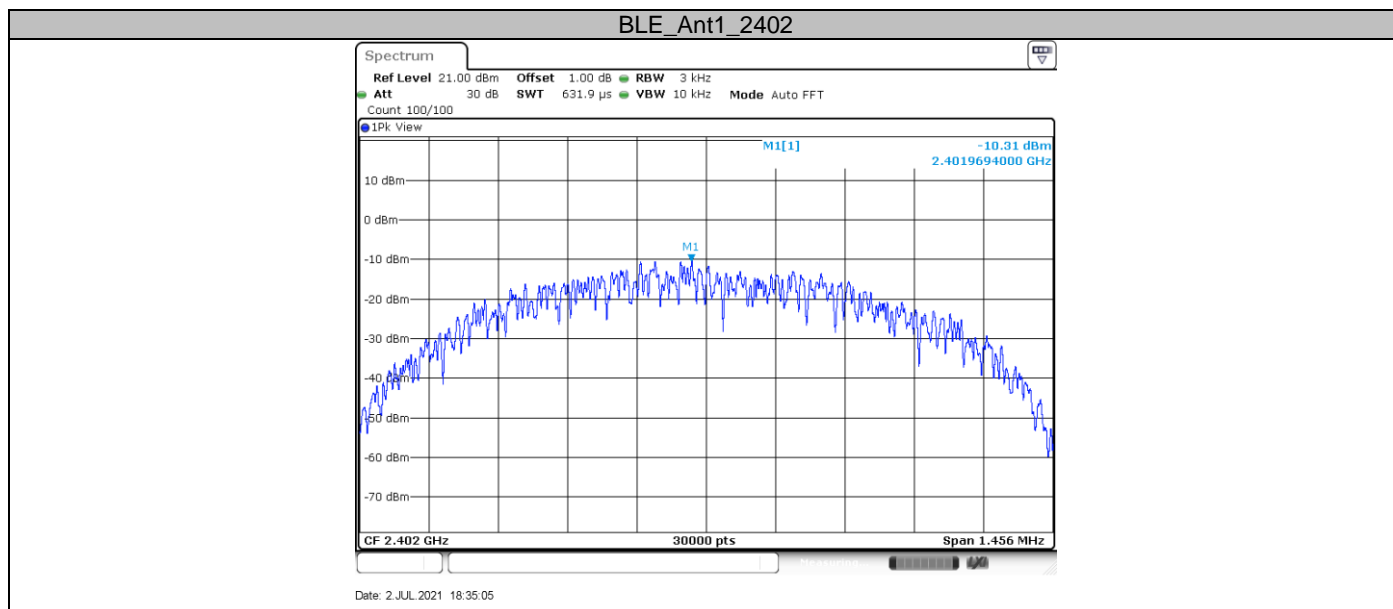


BLE_Ant1_2440

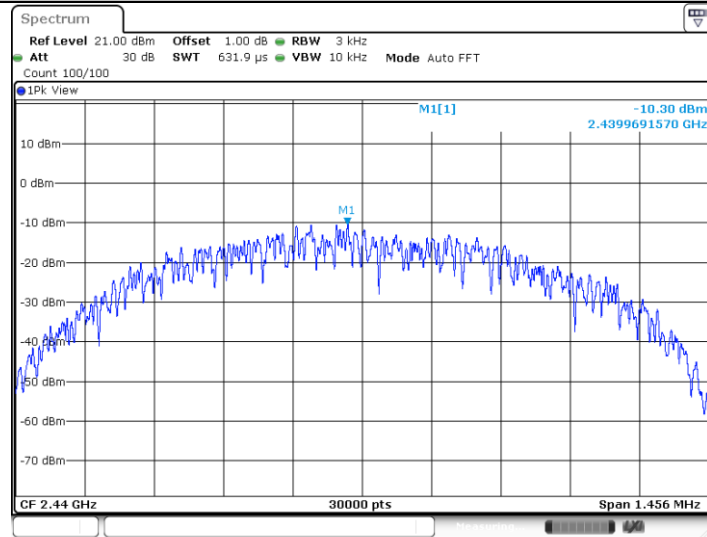

Date: 2 JUL 2021 18:37:21

BLE_Ant1_2480

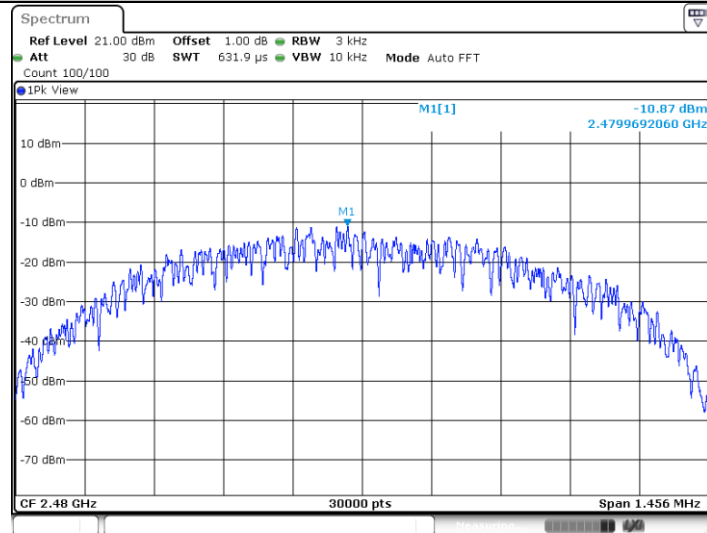

Date: 2 JUL 2021 18:39:04

9.6 Spurious RF conducted emissions

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold
3. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
4. The level displayed must comply with the limit specified in this Section. Submit these plots.
5. Repeat above procedures until all frequencies measured were complete.


Limit

| Frequency Range MHz | Limit (dBc) |
|------------------------|-------------|
| 30-25000 | -20 |

Test Result


Remark: The emissions exceed limit is fundamental signal.

BLE_BT4.0_Ant1_2402_0~Reference

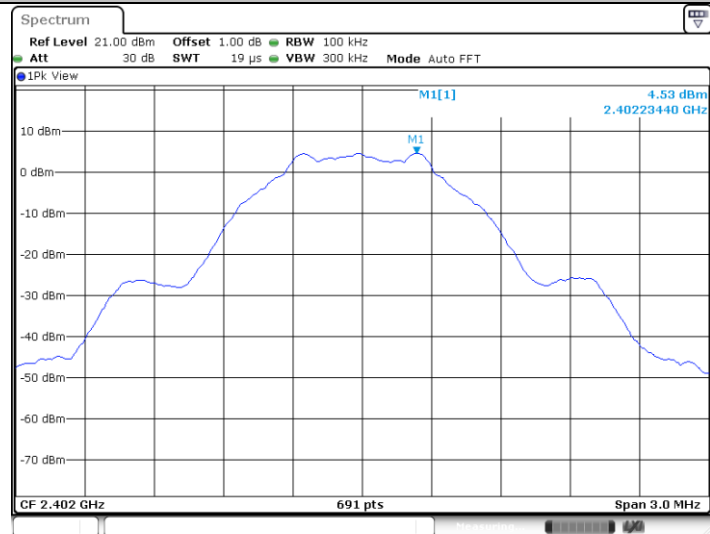


Date: 2 JUL 2021 11:01:54

BLE_BT4.0_Ant1_2402_30~1000

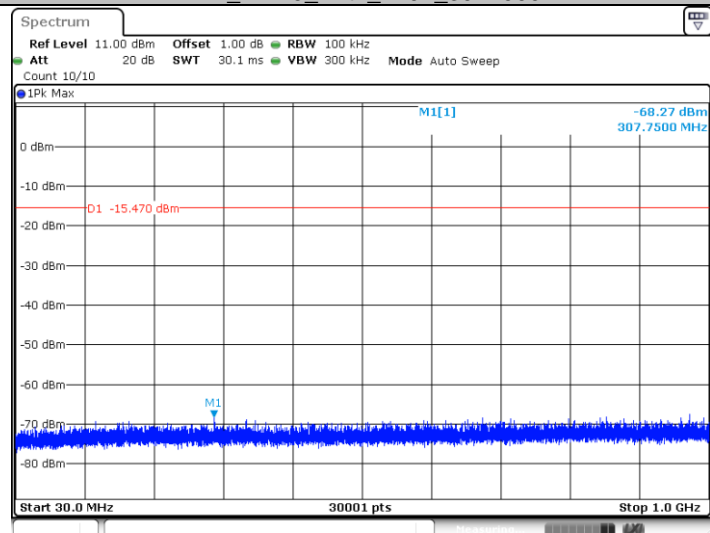


Date: 2 JUL 2021 11:02:00

BLE_BT4.0_Ant1_2402_1000~26500

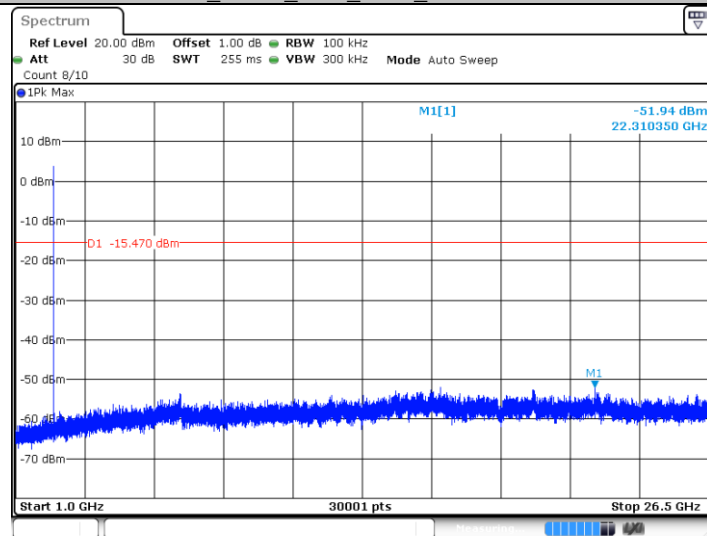


Date: 2 JUL 2021 11:02:08

BLE_BT4.0_Ant1_2440_0~Reference

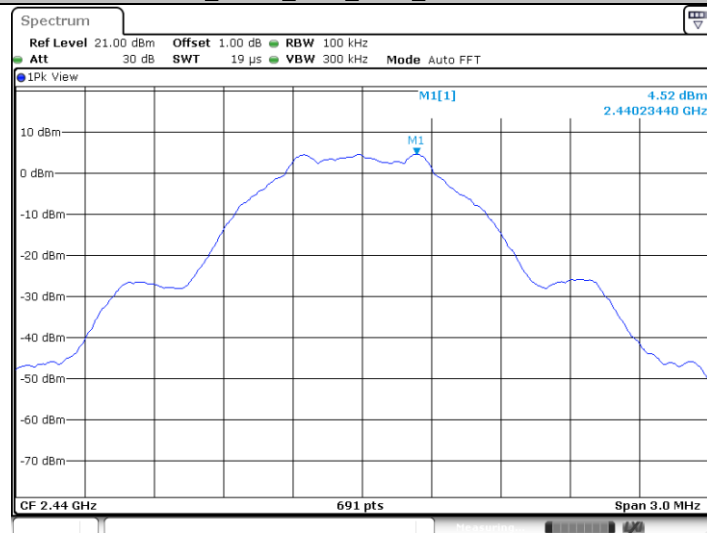


Date: 2 JUL 2021 11:03:33

BLE_BT4.0_Ant1_2440_30~1000

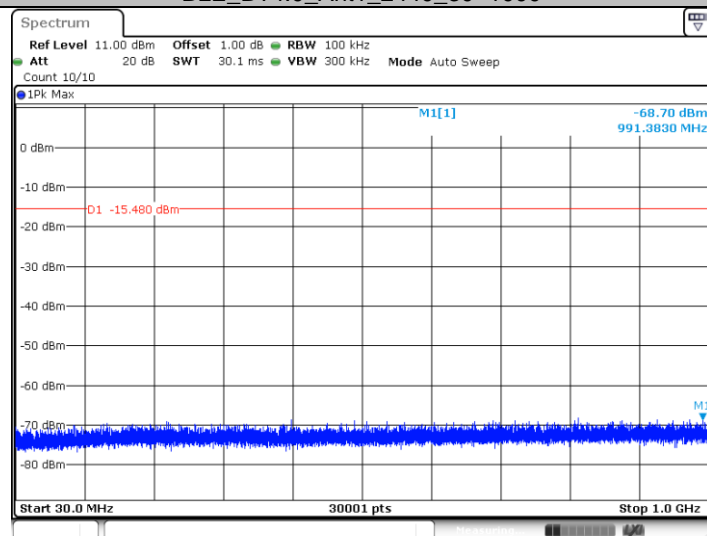


Date: 2 JUL 2021 11:03:39

BLE_BT4.0_Ant1_2440_1000~26500

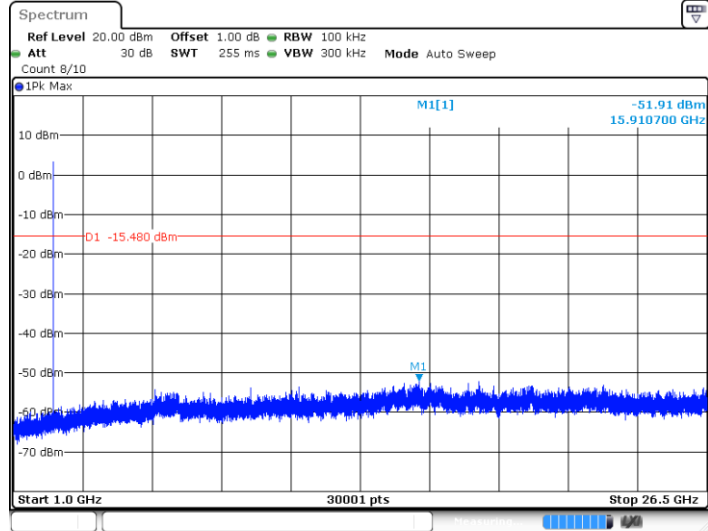


Date: 2 JUL 2021 11:03:47

BLE_BT4.0_Ant1_2480_0~Reference

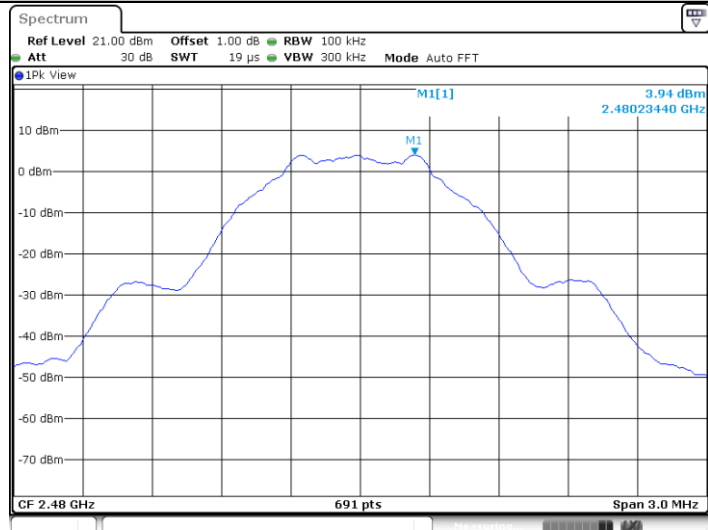


Date: 2 JUL 2021 11:05:27

BLE_BT4.0_Ant1_2480_30~1000

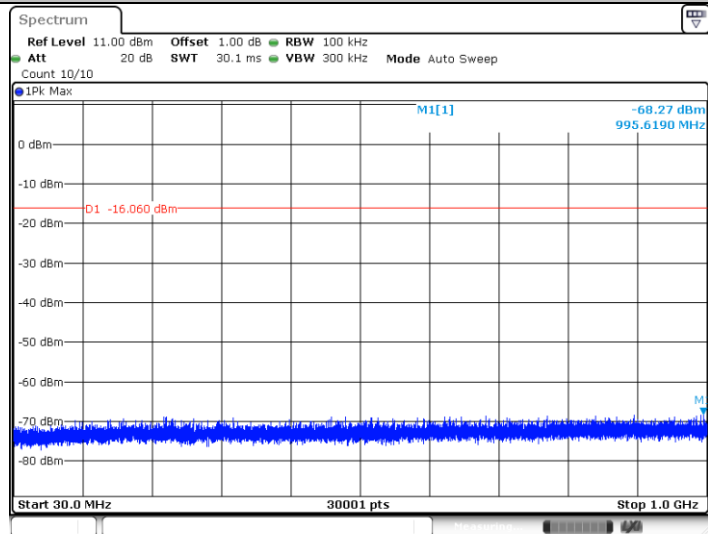

Date: 2 JUL 2021 11:05:33

BLE_BT4.0_Ant1_2480_1000~26500

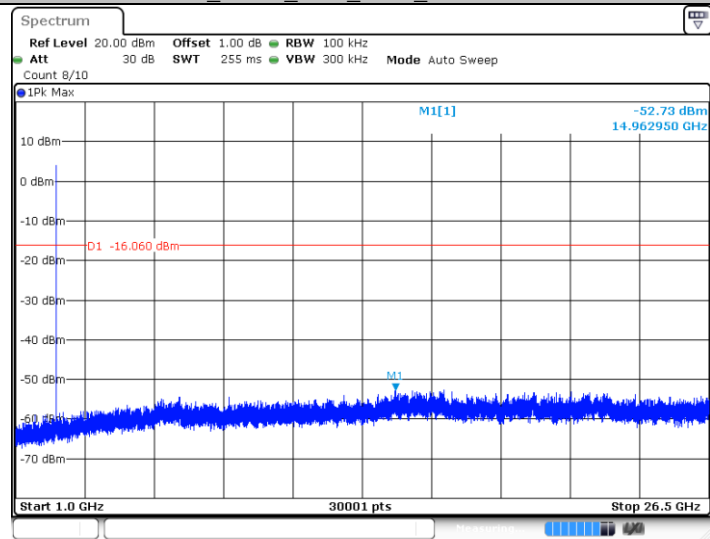

Date: 2 JUL 2021 11:05:41

9.7 Band edge

Test Method


1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
3. Allow the trace to stabilize, use the peak and delta measurement to record the result.
4. The level displayed must comply with the limit specified in this Section.
5. Repeat the test at the hopping off and hopping on mode, submit all the plots.

Limit:

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c))

| Frequency Range MHz | Limit (dBc) |
|------------------------|-------------|
| 30-25000 | -20 |

Test result

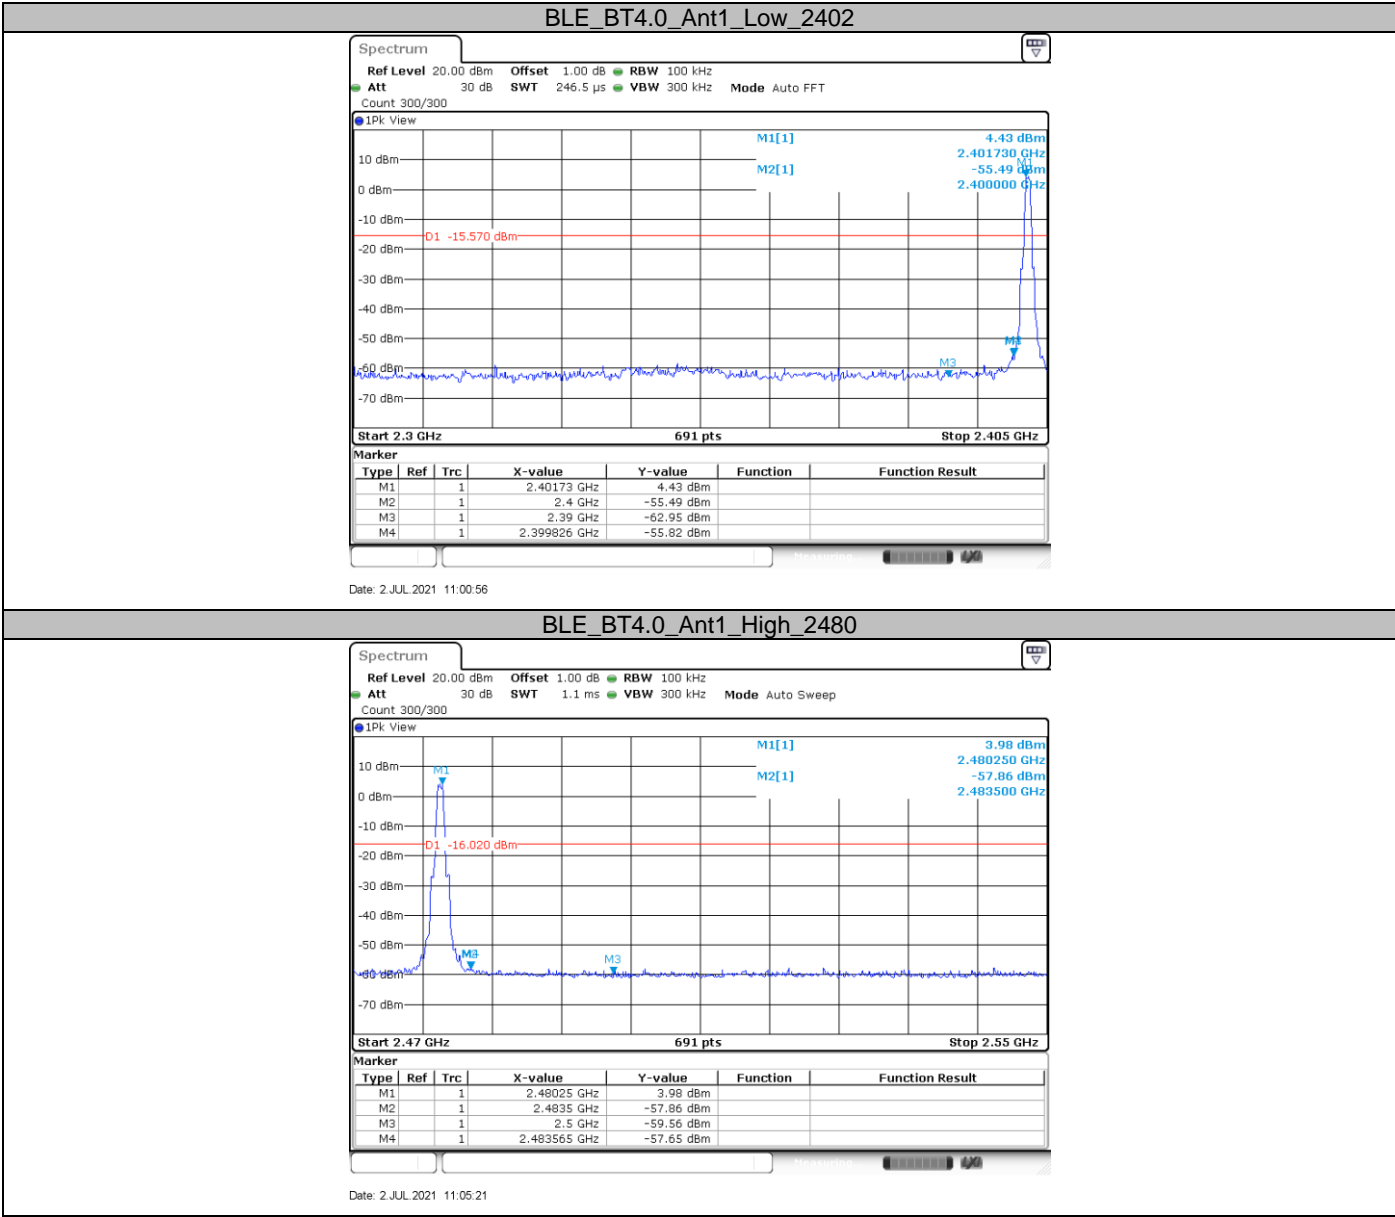

9.8 Spurious radiated emissions for transmitter

Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 100 KHz to 120KHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

a) RBW = 1MHz.

b) VBW \ [3 × RBW].

c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$.

Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty

cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.


| Frequency MHz | Field Strength uV/m | Field Strength dBµV/m | Detector |
|------------------|------------------------|--------------------------|----------|
| 30-88 | 100 | 40 | QP |
| 88-216 | 150 | 43.5 | QP |
| 216-960 | 200 | 46 | QP |
| 960-1000 | 500 | 54 | QP |
| Above 1000 | 500 | 54 | AV |
| Above 1000 | 5000 | 74 | PK |

Spurious radiated emissions for transmitter


According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Transmitting spurious emission test result as below:

Below 1G:

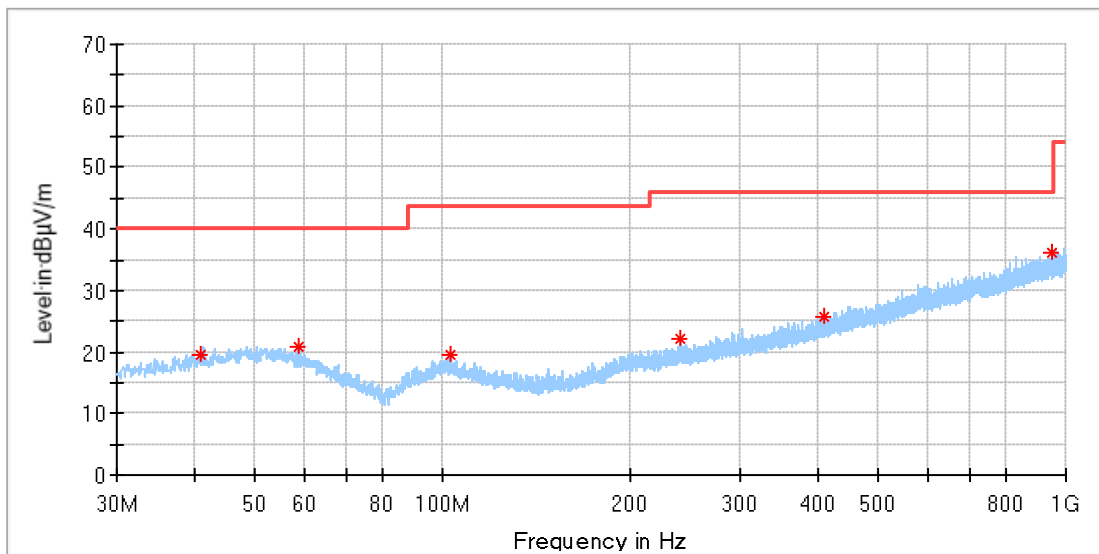


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 40.791250 | 19.40 | 40.00 | 20.60 | 200.0 | H | 14.0 | 17.02 |
| 58.918125 | 20.80 | 40.00 | 19.20 | 100.0 | H | 305.0 | 17.43 |
| 103.295625 | 19.53 | 43.50 | 23.97 | 200.0 | H | 266.0 | 15.91 |
| 241.156875 | 22.07 | 46.00 | 23.93 | 100.0 | H | 25.0 | 17.25 |
| 408.481875 | 25.79 | 46.00 | 20.21 | 200.0 | H | 0.0 | 21.53 |
| 948.711250 | 36.23 | 46.00 | 9.77 | 200.0 | H | 115.0 | 30.48 |

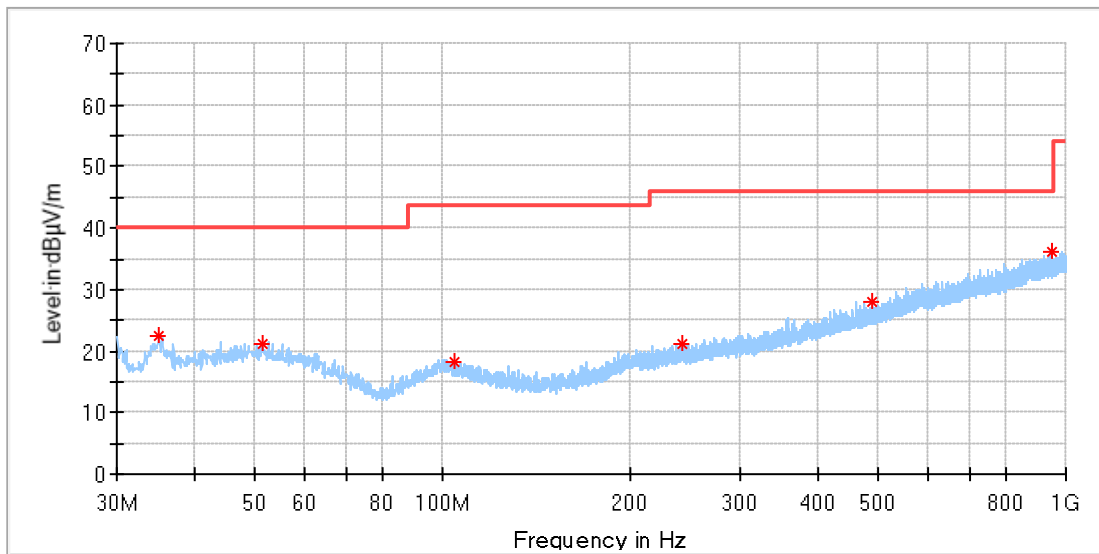


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 35.031875 | 22.44 | 40.00 | 17.56 | 200.0 | V | 310.0 | 15.67 |
| 51.279375 | 21.14 | 40.00 | 18.86 | 100.0 | V | 76.0 | 18.46 |
| 104.205000 | 18.18 | 43.50 | 25.32 | 100.0 | V | 118.0 | 15.82 |
| 242.308750 | 21.26 | 46.00 | 24.74 | 100.0 | V | 0.0 | 17.26 |
| 487.658125 | 27.87 | 46.00 | 18.13 | 100.0 | V | 7.0 | 23.21 |
| 948.590000 | 35.99 | 46.00 | 10.01 | 100.0 | V | 254.0 | 30.48 |

Low channel 2402MHz

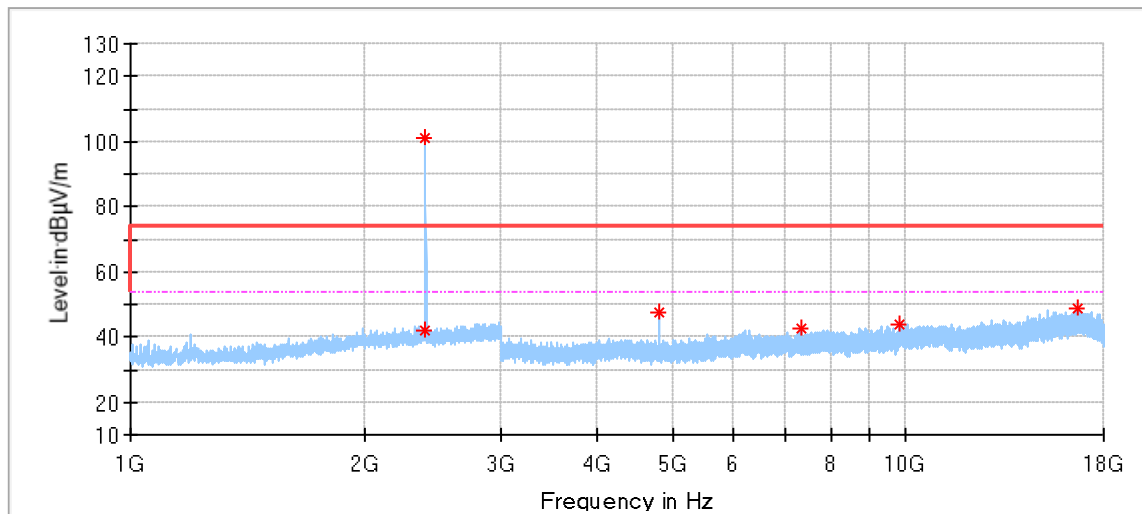


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2391.428571 | 42.24 | 74.00 | 31.76 | 150.0 | H | 69.0 | -2.96 |
| 2402.857143 | 100.83 | 74.00 | -26.83 | 150.0 | H | 245.0 | -2.99 |
| 4803.500000 | 47.59 | 74.00 | 26.41 | 150.0 | H | 161.0 | 2.18 |
| 7348.000000 | 42.41 | 74.00 | 31.59 | 150.0 | H | 58.0 | 7.10 |
| 9828.500000 | 44.03 | 74.00 | 29.97 | 150.0 | H | 211.0 | 10.88 |
| 16619.000000 | 48.83 | 74.00 | 25.17 | 150.0 | H | 211.0 | 17.87 |

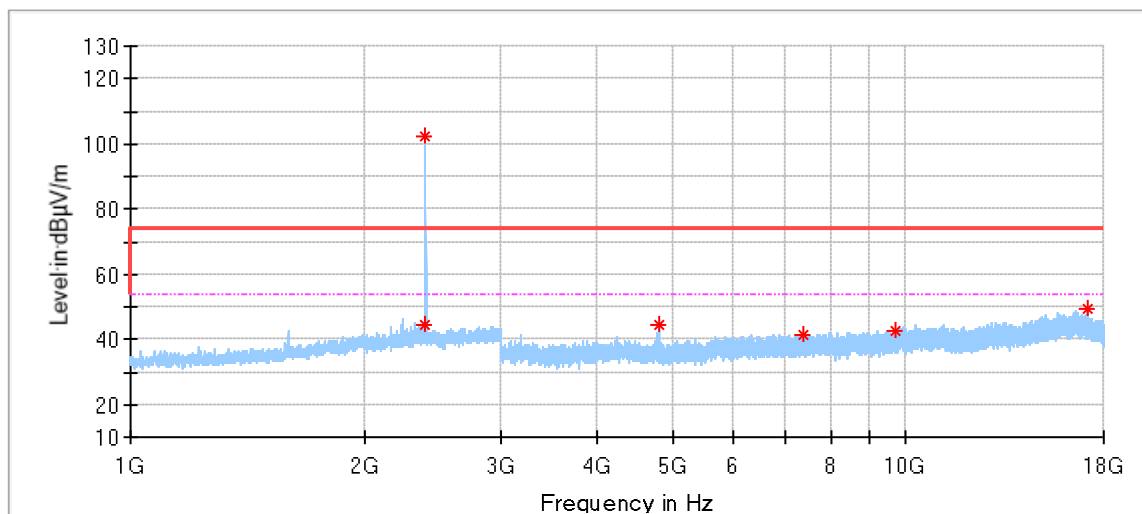


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2390.952381 | 44.36 | 74.00 | 29.64 | 150.0 | V | 43.0 | -2.96 |
| 2402.857143 | 102.19 | 74.00 | -28.19 | 150.0 | V | 110.0 | -2.99 |
| 4804.000000 | 44.73 | 74.00 | 29.27 | 150.0 | V | 188.0 | 2.18 |
| 7392.000000 | 41.56 | 74.00 | 32.44 | 150.0 | V | 213.0 | 7.19 |
| 9710.500000 | 42.61 | 74.00 | 31.39 | 150.0 | V | 162.0 | 9.48 |
| 17140.000000 | 49.19 | 74.00 | 24.81 | 150.0 | V | 310.0 | 18.11 |

Middle channel 2440MHz

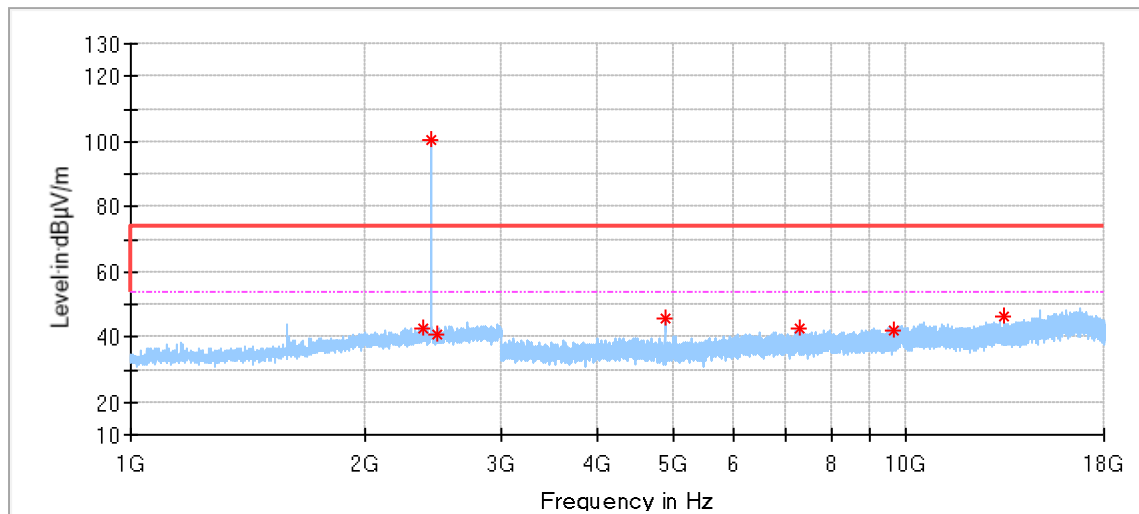


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2382.857143 | 42.90 | 74.00 | 31.10 | 150.0 | H | 277.0 | -2.93 |
| 2440.476191 | 100.72 | 74.00 | -26.72 | 150.0 | H | 191.0 | -2.90 |
| 2482.380952 | 41.02 | 74.00 | 32.98 | 150.0 | H | 50.0 | -2.69 |
| 4880.000000 | 45.91 | 74.00 | 28.09 | 150.0 | H | 315.0 | 2.38 |
| 7270.000000 | 42.33 | 74.00 | 31.67 | 150.0 | H | 357.0 | 6.97 |
| 9643.500000 | 42.21 | 74.00 | 31.79 | 150.0 | H | 188.0 | 9.27 |
| 13409.000000 | 46.27 | 74.00 | 27.73 | 150.0 | H | 188.0 | 11.72 |

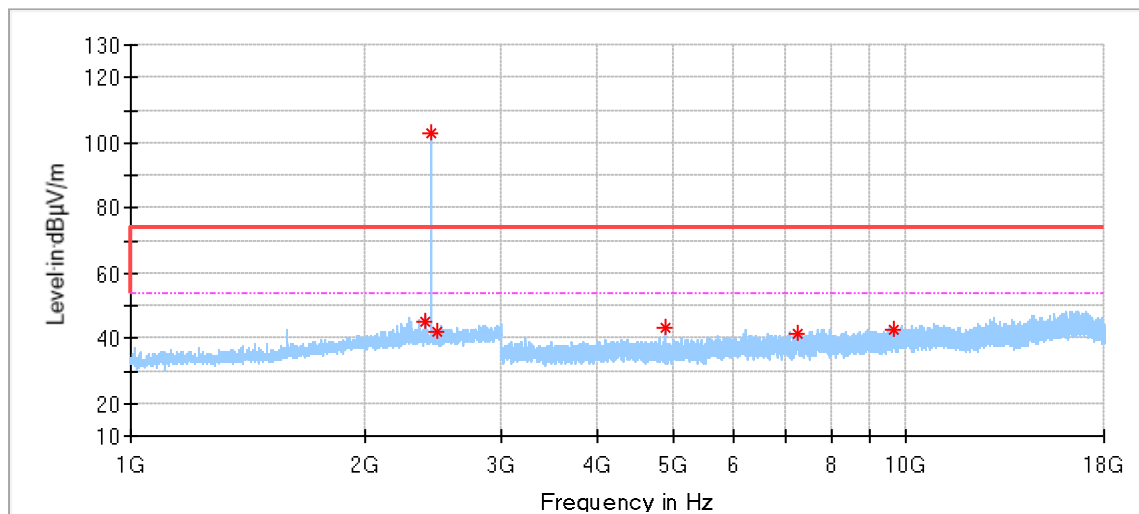


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2391.904762 | 44.80 | 74.00 | 29.20 | 150.0 | V | 295.0 | -2.96 |
| 2440.476191 | 102.67 | 74.00 | -28.67 | 150.0 | V | 109.0 | -2.90 |
| 2486.190476 | 42.04 | 74.00 | 31.96 | 150.0 | V | 205.0 | -2.69 |
| 4879.500000 | 43.09 | 74.00 | 30.91 | 150.0 | V | 238.0 | 2.38 |
| 7261.500000 | 41.45 | 74.00 | 32.55 | 150.0 | V | 214.0 | 6.96 |
| 9623.500000 | 42.37 | 74.00 | 31.63 | 150.0 | V | 85.0 | 9.24 |

High channel 2480MHz

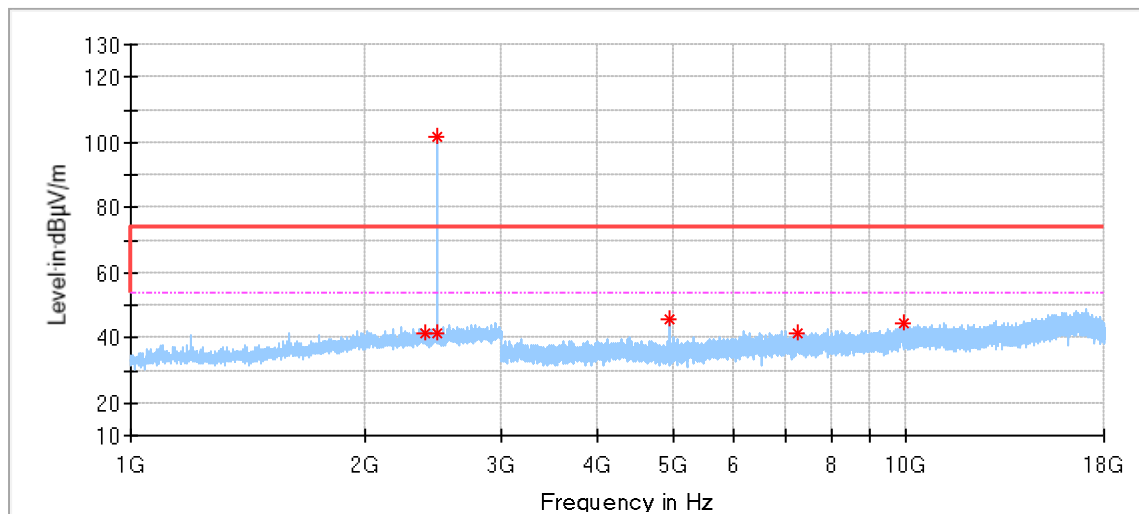

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2395.238095 | 41.63 | 74.00 | 32.37 | 150.0 | H | 88.0 | -2.97 |
| 2480.476191 | 101.80 | 74.00 | -27.80 | 150.0 | H | 316.0 | -2.69 |
| 2484.285714 | 41.11 | 74.00 | 32.89 | 150.0 | H | 316.0 | -2.69 |
| 4960.000000 | 45.63 | 74.00 | 28.37 | 150.0 | H | 162.0 | 2.55 |
| 7249.000000 | 41.64 | 74.00 | 32.36 | 150.0 | H | 59.0 | 6.95 |
| 9915.500000 | 44.43 | 74.00 | 29.57 | 150.0 | H | 313.0 | 10.44 |

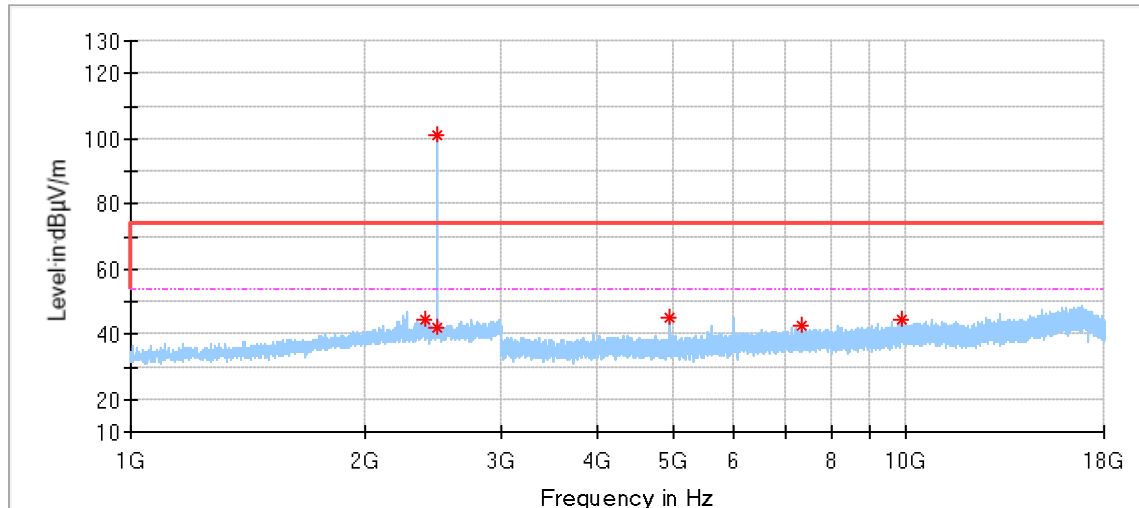

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2394.285714 | 44.39 | 74.00 | 29.61 | 150.0 | V | 352.0 | -2.97 |
| 2480.476191 | 100.89 | 74.00 | -26.89 | 150.0 | V | 91.0 | -2.69 |
| 2484.285714 | 41.78 | 74.00 | 32.22 | 150.0 | V | 53.0 | -2.69 |
| 4960.000000 | 44.93 | 74.00 | 29.07 | 150.0 | V | 356.0 | 2.55 |
| 7346.500000 | 42.69 | 74.00 | 31.31 | 150.0 | V | 165.0 | 7.10 |
| 9869.500000 | 44.36 | 74.00 | 29.64 | 150.0 | V | 215.0 | 11.30 |

Remark:

- (1) Data of measurement within frequency range 18-26GHz are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report.

- (2) These frequencies which exceed the limit are carrier frequency.
- (3) Level= Reading Level + Correction Factor
- (4) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
(The Reading Level is recorded by software which is not shown in the sheet)

Test Equipment List

Conducted Emission Test

| Description | Manufacturer | Model no. | Serial no. | cal. due date |
|-------------------|-------------------|-----------|----------------|---------------|
| EMI Test Receiver | Rohde & Schwarz | ESR 3 | 101782 | 2022-6-4 |
| LISN | Rohde & Schwarz | ENV4200 | 100249 | 2022-6-5 |
| Attenuator | Shanghai Huaxiang | TS2-26-3 | 080928189 | 2022-6-3 |
| Test software | Rohde & Schwarz | EMC32 | Version9.15.00 | N/A |

Radiated Emission Test

| DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | CAL. DUE DATE |
|-------------------------------------|-----------------|-------------------|-----------------|---------------|
| EMI Test Receiver | Rohde & Schwarz | ESR 26 | 101269 | 2022-6-4 |
| Trilog Super Broadband Test Antenna | Schwarzbeck | VULB 9162 | 284 | 2021-8-20 |
| Horn Antenna | Rohde & Schwarz | HF907 | 102295 | 2021-8-5 |
| Wideband Horn Antenna | Q-PAR | QWH-SL-18-40-K-SG | 12827 | 2021-8-5 |
| Pre-amplifier | Rohde & Schwarz | SCU 18 | 102230 | 2022-6-6 |
| Pre-amplifier | Rohde & Schwarz | SCU 40A | 100432 | 2021-7-30 |
| Attenuator | Agilent | 8491A | MY39264334 | 2022-6-3 |
| Test software | Rohde & Schwarz | EMC32 | Version 9.15.00 | N/A |

RF conducted test

| DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | CAL. DUE DATE |
|------------------|-----------------|--------------------|---------------|---------------|
| Signal Analyzer | Rohde & Schwarz | FSV40 | 101030 | 2022-6-3 |
| RF Switch Module | Rohde & Schwarz | OSP120/OSP-B157 | 101226/100851 | 2022-6-3 |
| Power Splitter | Weinschel | 1580 | SC319 | 2022-6-3 |
| Test software | Tonscend | System for BT/WIFI | Version 2.6 | N/A |

10 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

| System Measurement Uncertainty | |
|---|---|
| Test Items | Extended Uncertainty |
| Uncertainty for Conducted Emission 150kHz-30MHz (for test using AMN ENV432 or ENV4200) | 3.62dB |
| Uncertainty for Radiated Emission 25MHz-3000MHz | Horizontal: 4.63dB; Vertical: 4.61dB; |
| Uncertainty for Radiated Emission 3000MHz- 18000MHz | Horizontal: 4.65dB; Vertical: 4.64dB; |
| Uncertainty for Radiated Emission 18000MHz- 40000MHz | Horizontal: 4.89dB; Vertical: 4.87dB; |
| Uncertainty for Conducted RF test | RF Power Conducted: 1.16dB Frequency test involved: 0.6×10^{-7} or 1% |

---The End---