



# TEST REPORT

**Reference No.**..... : WTF24F04075400W  
**FCC ID** ..... : 2A3DS-A320  
**Applicant**..... : Guangdong Chiyang Scent Technology Co.,Ltd.  
**Address**..... : Floor 1-9, Building 10, CIMC Center, Chanxing Road No. 1, Shunde District, Foshan City, Guangdong Province, China, 528313  
**Manufacturer** ..... : The same as above  
**Address**..... : The same as above  
**Product Name**..... : Aroma Diffuser  
**Model No.**..... : A320  
**Test specification**..... : FCC CFR47 Part 15 Subpart C (Section 15.247)  
**Date of Receipt sample** .... : 2024-04-24  
**Date of Test**..... : 2024-04-26  
**Date of Issue**..... : 2024-05-14  
**Test Report Form No.** ..... : WEW-15247A-01B  
**Test Result**..... : **Pass**

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

**Prepared By:**

**Waltek Testing Group (Foshan) Co., Ltd.**

Address: 1/F., Building 19, Sunlink Machinery City, Xingye 4 Road,  
Guanglong Industrial Park, Chihua Neighborhood Committee, Chencun Town,  
Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398

Fax:+86-757-23811381

E-mail:info@waltek.com.cn

Tested by:

Roy Hong

Approved by:

Danny Zhou



1 Revision History

| Test Report No. | Date of Issue | Description | Status |
|-----------------|---------------|-------------|--------|
| WTF24F04075400W | 2024-05-14    | Original    | Valid  |

WALTEK



## 2 Contents

|                                                       | Page |
|-------------------------------------------------------|------|
| 1 REVISION HISTORY.....                               | 2    |
| 2 CONTENTS.....                                       | 3    |
| 3 GENERAL INFORMATION.....                            | 4    |
| 3.1 GENERAL DESCRIPTION OF E.U.T.....                 | 4    |
| 3.2 TECHNICAL CHARACTERISTICS OF EUT .....            | 4    |
| 3.3 STANDARDS APPLICABLE FOR TESTING.....             | 4    |
| 3.4 TEST FACILITY .....                               | 5    |
| 3.5 SUBCONTRACTED .....                               | 5    |
| 3.6 ABNORMALITIES FROM STANDARD CONDITIONS.....       | 5    |
| 3.7 DISCLAIMER.....                                   | 5    |
| 4 EUT SETUP AND TEST MODE.....                        | 6    |
| 5 EQUIPMENT USED DURING TEST.....                     | 7    |
| 5.1 EQUIPMENT LIST .....                              | 7    |
| 5.2 TEST SOFTWARE .....                               | 8    |
| 5.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT ..... | 8    |
| 5.4 MEASUREMENT UNCERTAINTY.....                      | 8    |
| 6 SUMMARY OF TEST RESULT .....                        | 9    |
| 6.1 ANTENNA REQUIREMENT.....                          | 10   |
| 6.2 RADIATED SPURIOUS EMISSIONS .....                 | 11   |
| 6.3 POWER SPECTRAL DENSITY .....                      | 21   |
| 6.4 DTS BANDWIDTH.....                                | 24   |
| 6.5 RF OUTPUT POWER.....                              | 27   |
| 6.6 OUT OF BAND EMISSIONS.....                        | 30   |
| 6.7 CONDUCTED EMISSIONS.....                          | 38   |
| 7 PHOTOGRAPHS TEST SETUP.....                         | 42   |
| 7.1 PHOTOGRAPHS - RADIATED EMISSION TEST SETUP.....   | 42   |
| 7.2 PHOTOGRAPHS – CONDUCTED EMISSION TEST SETUP ..... | 43   |
| 8 PHOTOGRAPHS – EUT CONSTRUCTIONAL DETAILS.....       | 44   |



### 3 General Information

#### 3.1 General Description of E.U.T

**Product Name** ..... : Aroma Diffuser  
**Model No.** ..... : A320  
**Model Description** ..... : ---  
**Rating** ..... : Input: DC 12V, 1A  
**Battery Capacity** ..... : ---  
**Power Adapter** ..... : RXW-0698-12V1A-E  
Input: 100-240V~, 0.5A, 50/60Hz; Output: DC 12V, 1000mA

#### 3.2 Technical Characteristics of EUT

**Bluetooth Version** ..... : V5.2 (BLE mode)  
**Frequency Range** ..... : 2402-2480MHz  
**Max. RF Output Power** ..... : -3.296dBm (Conducted ) @2Mbps  
**Modulation** ..... : GFSK  
**Data Rate** ..... : 1Mbps, 2Mbps  
**Quantity of Channels** ..... : 40  
**Channel Separation** ..... : 2MHz  
**Type of Antenna** ..... : PCB Antenna  
**Antenna Gain** ..... : 3.08dBi

#### 3.3 Standards Applicable for Testing

The tests were performed according to following standards:

|                                        |                                                                                                                                                                                          |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC Rules Part 15.247                  | Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz                                   |
| 558074 D01 15.247 Meas Guidance v05r02 | Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The FCC Rules |
| ANSI C63.10-2013                       | American National Standard for Testing Unlicensed Wireless Devices                                                                                                                       |



### 3.4 Test Facility

The test facility has a test site registered with the following organizations:

- **ISED – Registration No.: 21895**

Waltek Testing Group (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Innovation, Science and Economic Development Canada (ISED). The acceptance letter from the ISED is maintained in our files. Registration ISED number: 21895, March 12, 2019

- **FCC – Registration No.: 820106**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106, August 16, 2018

- **FCC – Designation No.: CN5034**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation No. CN5034.

- **NVLAP – Lab Code: 600191-0**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

### 3.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test items: ---

Lab information: ---

### 3.6 Abnormalities from Standard Conditions

None.

### 3.7 Disclaimer

The antenna gain information is provided by the customer. The laboratory is not responsible for the accuracy of the antenna gain information.



#### 4 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

**Test Mode List**

| Test Mode | Description    | Remark  |
|-----------|----------------|---------|
| TM1       | Low Channel    | 2402MHz |
| TM2       | Middle Channel | 2440MHz |
| TM3       | High Channel   | 2480MHz |

**Test Conditions**

|                       |          |
|-----------------------|----------|
| Temperature:          | 22~25°C  |
| Relative Humidity:    | 50~55%   |
| Atmospheric pressure: | 101.9kPa |

# WALTEK



## 5 Equipment Used during Test

### 5.1 Equipment List

| <input type="checkbox"/> Conducted Emissions 1#            |                            |                 |                   |             |                       |                      |
|------------------------------------------------------------|----------------------------|-----------------|-------------------|-------------|-----------------------|----------------------|
| Item                                                       | Equipment                  | Manufacturer    | Model No.         | Serial No.  | Last Cal Date         | Cal Due Date         |
| 1.                                                         | EMI Test Receiver          | R&S             | ESR3              | 102423      | 2024-01-05            | 2025-01-04           |
| 2.                                                         | LISN                       | R&S             | ENV216            | 101343      | 2024-01-05            | 2025-01-04           |
| 3.                                                         | Cable                      | HUBER+SUHNER    | CBL2-NN-6M        | 223NN624    | 2024-01-04            | 2025-01-03           |
| 4.                                                         | Switch                     | CD              | RSU-A4 18G        | RSUA4008    | 2024-01-04            | 2025-01-03           |
| <input checked="" type="checkbox"/> Conducted Emissions 2# |                            |                 |                   |             |                       |                      |
| Item                                                       | Equipment                  | Manufacturer    | Model No.         | Serial No.  | Last Cal Date         | Cal Due Date         |
| 1.                                                         | EMI Test Receiver          | R&S             | ESCI              | 101178      | 2024-01-06            | 2025-01-05           |
| 2.                                                         | LISN                       | R&S             | ENV216            | 101215      | 2024-01-05            | 2025-01-04           |
| 3.                                                         | Cable                      | HUBER+SUHNER    | CBL2-NN-6M        | 6102701     | 2024-01-04            | 2025-01-03           |
| 4.                                                         | Switch                     | ESE             | RSU/M2            | ---         | 2024-01-04            | 2025-01-03           |
| <input type="checkbox"/> Conducted Emissions 3#            |                            |                 |                   |             |                       |                      |
| Item                                                       | Equipment                  | Manufacturer    | Model No.         | Serial No.  | Last Cal Date         | Cal Due Date         |
| 1.                                                         | EMI Test Receiver          | R&S             | ESR3              | 102842      | 2024-01-05            | 2025-01-04           |
| 2.                                                         | LISN                       | R&S             | ENV216            | 101542      | 2024-01-05            | 2025-01-04           |
| 3.                                                         | Cable                      | YIHENG          | LMR195UF-NMNM-2.5 | ---         | 2024-01-04            | 2025-01-03           |
| 4.                                                         | Manual RF Switch           | YIHENG          | SW-2              | RSU0402     | 2024-01-04            | 2025-01-03           |
| <input checked="" type="checkbox"/> Radiation Emissions    |                            |                 |                   |             |                       |                      |
| Item                                                       | Equipment                  | Manufacturer    | Model No.         | Serial No.  | Last Calibration Date | Calibration Due Date |
| 1.                                                         | 3m Semi-anechoic Chamber   | CHANGCHUANG     | 9m×6m×6m          | -           | 2024-01-05            | 2025-01-04           |
| 2.                                                         | EMI Test Receiver          | RS              | ESR7              | 101566      | 2024-01-06            | 2025-01-05           |
| 3.                                                         | EMC Analyzer               | Agilent         | N9020A            | MY48011796  | 2024-01-04            | 2025-01-03           |
| 4.                                                         | Active Loop Antenna        | SCHWARZBECK     | FMZB1519B         | 00004       | 2024-01-05            | 2025-01-04           |
| 5.                                                         | Trilog Broadband Antenna   | SCHWARZBECK     | VULB 9162         | 9162-117    | 2024-01-05            | 2025-01-04           |
| 6.                                                         | Coaxial Cable (below 1GHz) | H+S             | CBL3-NN-12+3 m    | 214NN320    | 2024-01-06            | 2025-01-05           |
| 7.                                                         | Broad-band Horn Antenna    | SCHWARZBECK     | BBHA 9120 D       | 01561       | 2024-01-05            | 2025-01-04           |
| 8.                                                         | Broad-band Horn Antenna    | SCHWARZBECK     | BBHA 9170         | 01119       | 2024-01-05            | 2025-01-04           |
| 9.                                                         | Coaxial Cable (above 1GHz) | Times-Microwave | CBL5-NN           | -           | 2024-01-04            | 2025-01-03           |
| 10.                                                        | Amplifier                  | Lunar E M       | LNA1G18-40        | 20160501002 | 2024-01-04            | 2025-01-03           |



| <input checked="" type="checkbox"/> RF Conducted Testing |                         |              |           |            |                       |                      |
|----------------------------------------------------------|-------------------------|--------------|-----------|------------|-----------------------|----------------------|
| Item                                                     | Equipment               | Manufacturer | Model No. | Serial No. | Last Calibration Date | Calibration Due Date |
| 1.                                                       | Spectrum Analyzer       | Agilent      | N9020A    | MY48011796 | 2024-01-04            | 2025-01-03           |
| 2.                                                       | Analog Signal Generator | Agilent      | N5181A    | MY48180720 | 2024-01-04            | 2025-01-03           |
| 3.                                                       | RF Control Unit         | CHANGCHUANG  | JS0806-2  | -          | 2024-01-04            | 2025-01-03           |

☐: Not Used

☒: Used

5.2 Test Software

| Description                               | Manufacturer | Model    | Version   |
|-------------------------------------------|--------------|----------|-----------|
| EMI Test Software (Conducted Emission 1#) | FARATRONIC   | EZ-EMC   | EMEC-3A1  |
| EMI Test Software (Conducted Emission 2#) | FARATRONIC   | EZ-EMC   | CON-03A1  |
| EMI Test Software (Conducted Emission 3#) | FARATRONIC   | EZ-EMC   | COM 3A1.1 |
| EMI Test Software (Radiated Emission)     | FARATRONIC   | EZ-EMC   | RA-03A1-1 |
| RF Conducted Test Software                | TONSCEND     | JS1120-2 | V2.6      |

5.3 Special Accessories and Auxiliary Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. |
|------|-----------|--------------|-----------|------------|
| 1.   | /         | /            | /         | /          |

5.4 Measurement Uncertainty

| Parameter                     | Uncertainty             |
|-------------------------------|-------------------------|
| RF Output Power               | ±2.2dB                  |
| Occupied Bandwidth            | ±1.5%                   |
| Conducted Emission            | ±2.6dB                  |
| Transmitter Spurious Emission | ±3.8dB (for 25MHz-1GHz) |
|                               | ±5.0dB (for 1GHz-18GHz) |

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



## 6 Summary of Test Result

| Test Items                        | FCC Rules                 | Result    |
|-----------------------------------|---------------------------|-----------|
| Antenna Requirement               | §15.203; §15.247(b)(4)(i) | Compliant |
| Restricted Band of Operation      | §15.205                   | Compliant |
| Conducted Emissions               | §15.207(a)                | Compliant |
| Radiated Spurious Emissions       | §15.209(a)                | Compliant |
| Power Spectral Density            | §15.247(e)                | Compliant |
| DTS Bandwidth                     | §15.247(a)(2)             | Compliant |
| RF Output Power                   | §15.247(b)(1)             | Compliant |
| Band edge (Out of Band Emissions) | §15.247(d)                | Compliant |

Remark:

Pass Test item meets the requirement

Fail Test item does not meet the requirement

N/A Test case does not apply to the test object

# WALTEK




## 6.1 Antenna Requirement

### 6.1.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### 6.1.2 Evaluation Information

The EUT has a PCB Antenna, the gain is 3.08 dBi, fulfil the requirement of this section.

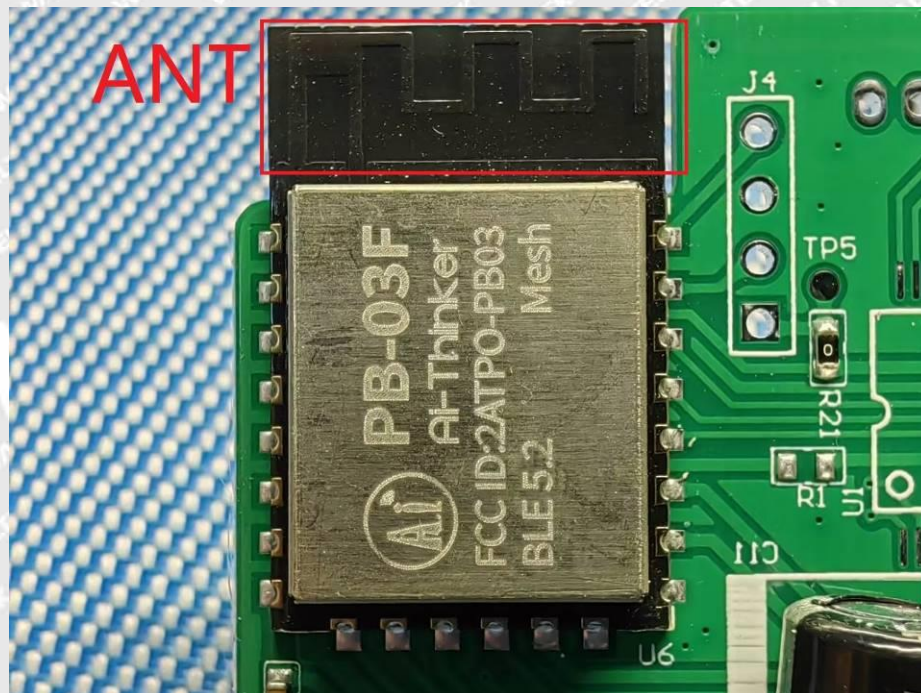



## 6.2 Radiated Spurious Emissions

### 6.2.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 6.2.2 Test Procedure

- 1) The EUT is placed on a turntable, which is 0.8m(Below 1G) 1.5m(above 1G)above ground plane.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- 4) Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5) And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6) Repeat above procedures until the measurements for all frequencies are complete.
- 7) The radiation measurements are tested under 3-axes(X, Y, Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.




### 6.2.3 Test Setup

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz.

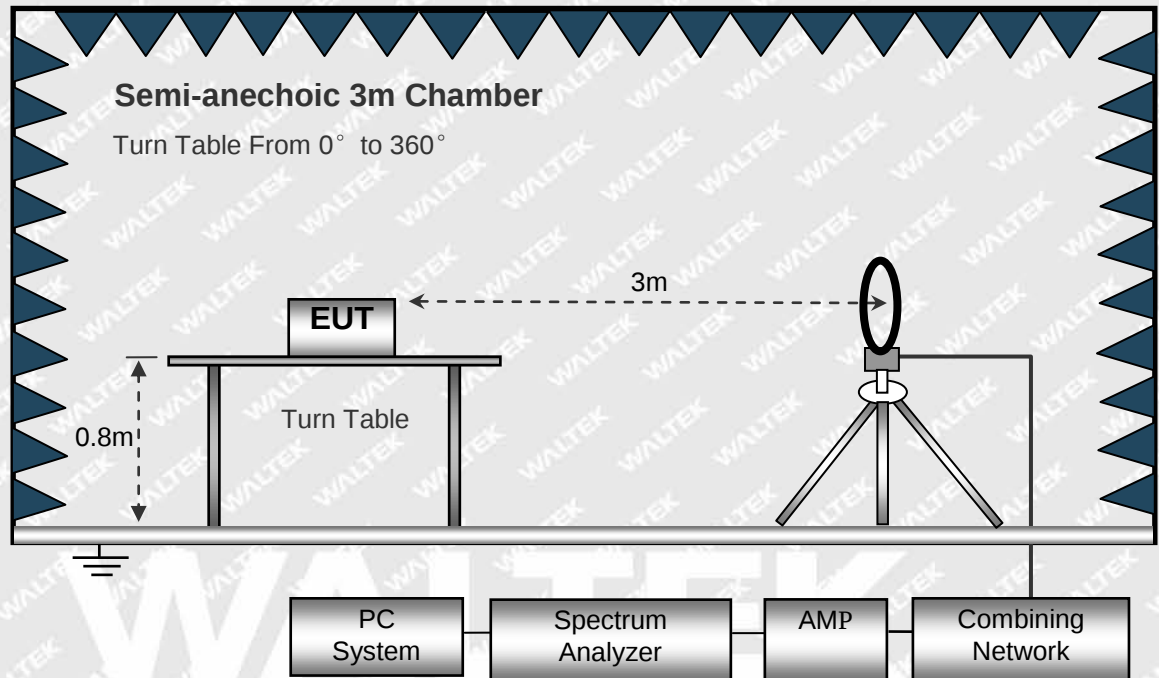


The test setup for emission measurement from 30 MHz to 1 GHz.

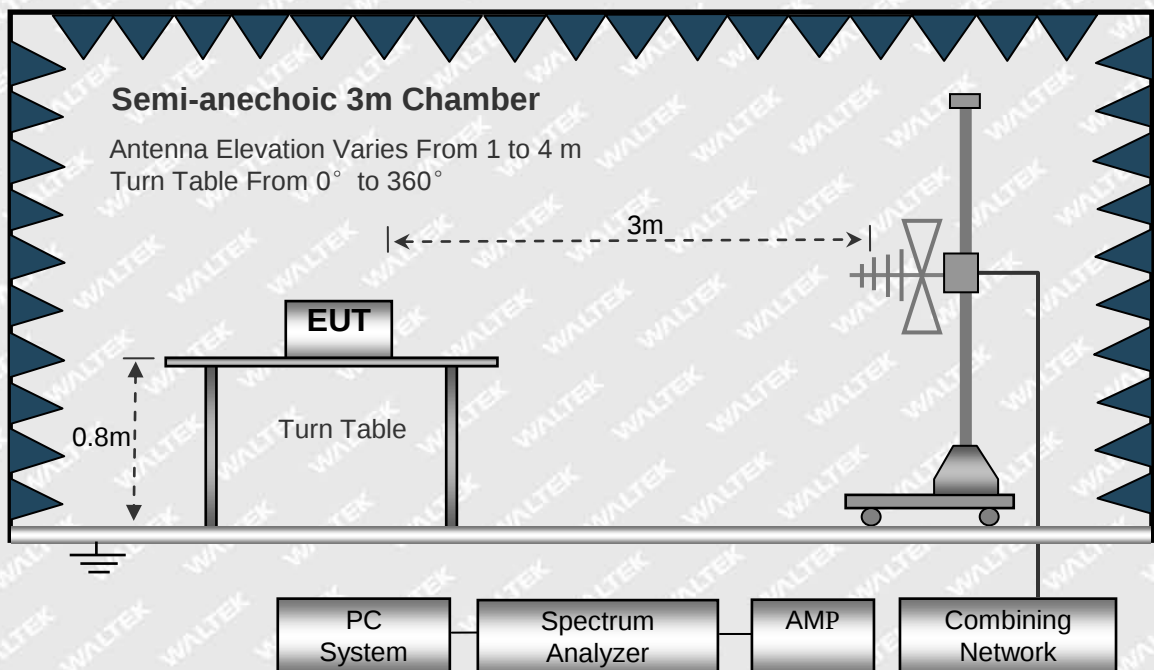



The test setup for emission measurement above 1 GHz.

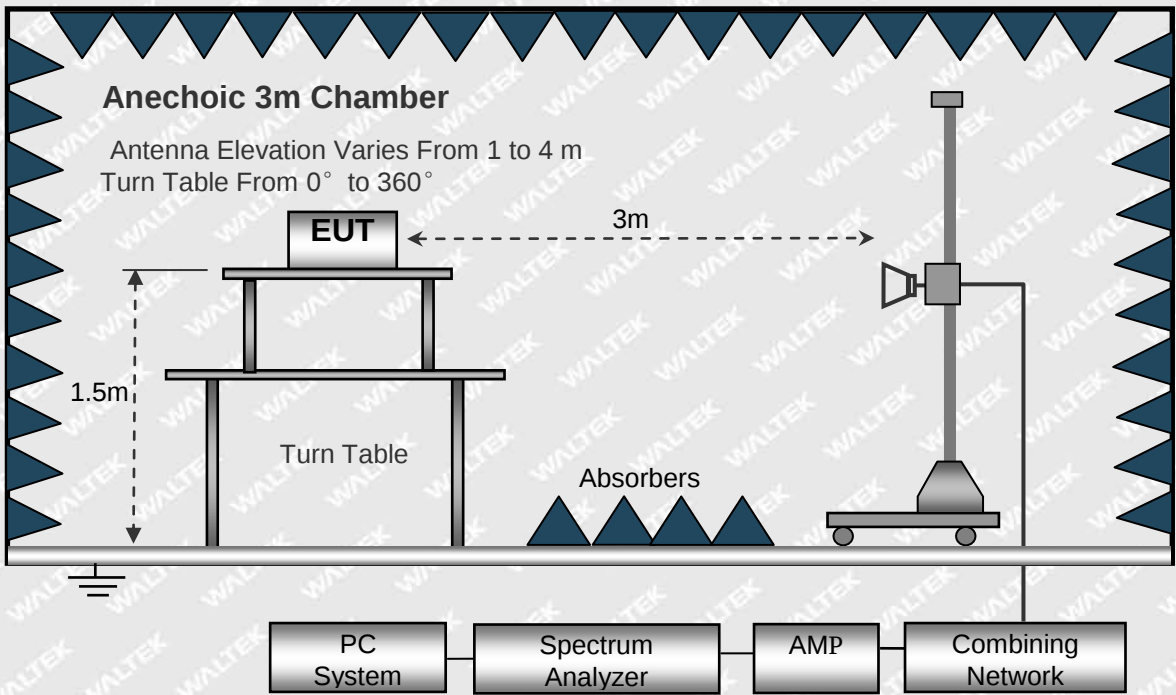

### 6.2.4 Spectrum Analyzer Setup

#### 9KHz-30MHz

RBW=10kHz

VBW=30kHz

Sweep time=Auto

Trace=Max hold

Detector function=peak

#### 30MHz-1GHz

RBW=120kHz

VBW=300kHz

Sweep time=Auto

Trace=Max hold

Detector function=peak, QP

#### Above 1GHz

RBW=1MHz

VBW=3MHz(Peak), 10MHz(AV)

Sweep time=Auto

Trace=Max hold

Detector function=peak, AV

### 6.2.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$




6.2.6 Test Results

Test Frequency: Below 1GHz (worst case @1Mbps)

Test Channel Low

Polarization Vertical

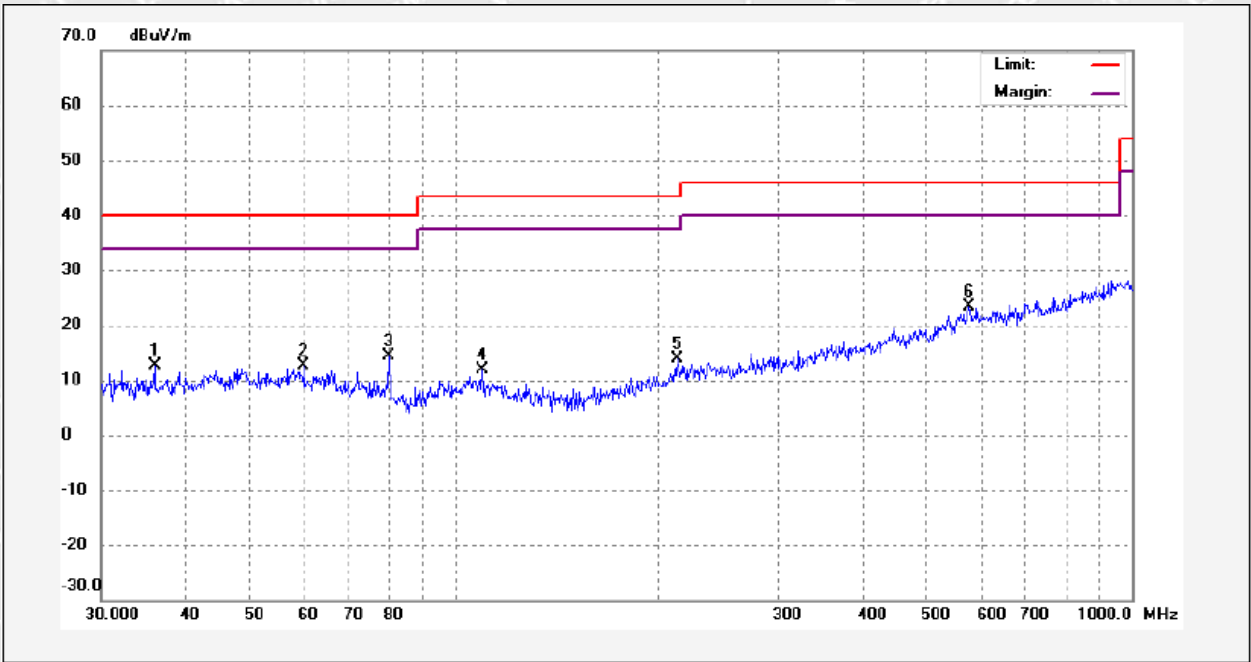


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 36.0133     | 0.27             | 12.37       | 12.64           | 40.00          | -27.36      | peak     |        |
| 2   | 59.9849     | -1.18            | 13.86       | 12.68           | 40.00          | -27.32      | peak     |        |
| 3   | 79.9963     | 4.95             | 9.44        | 14.39           | 40.00          | -25.61      | peak     |        |
| 4   | 109.9886    | -0.74            | 12.73       | 11.99           | 43.50          | -31.51      | peak     |        |
| 5   | 213.3141    | -0.12            | 13.89       | 13.77           | 43.50          | -29.73      | peak     |        |
| 6   | 576.0380    | 0.69             | 22.81       | 23.50           | 46.00          | -22.50      | peak     |        |



Test Channel Low


Polarization Horizontal

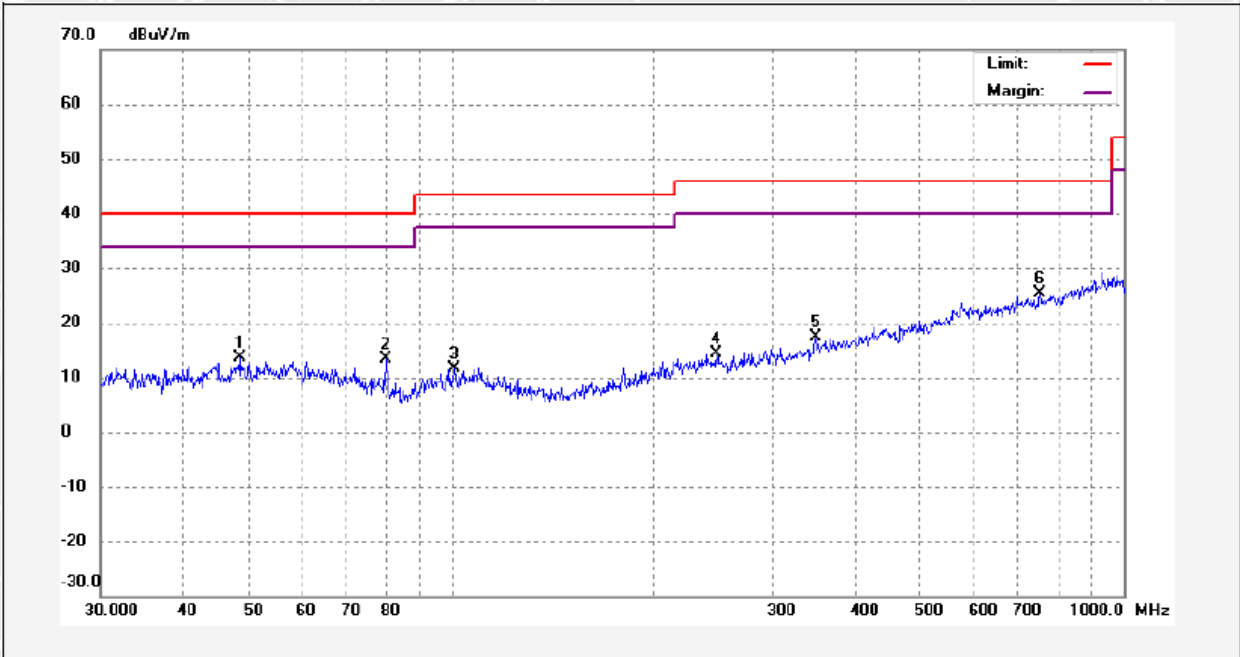

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 48.3995     | -0.81            | 14.39       | 13.58           | 40.00          | -26.42      | peak     |        |
| 2   | 79.9963     | 3.92             | 9.44        | 13.36           | 40.00          | -26.64      | peak     |        |
| 3   | 101.2527    | -0.89            | 12.48       | 11.59           | 43.50          | -31.91      | peak     |        |
| 4   | 247.9424    | -0.25            | 14.55       | 14.30           | 46.00          | -31.70      | peak     |        |
| 5   | 349.0051    | 0.23             | 17.13       | 17.36           | 46.00          | -28.64      | peak     |        |
| 6   | 751.4244    | 0.62             | 24.82       | 25.44           | 46.00          | -20.56      | peak     |        |




Test Channel    Middle Channel    Polarization    Vertical

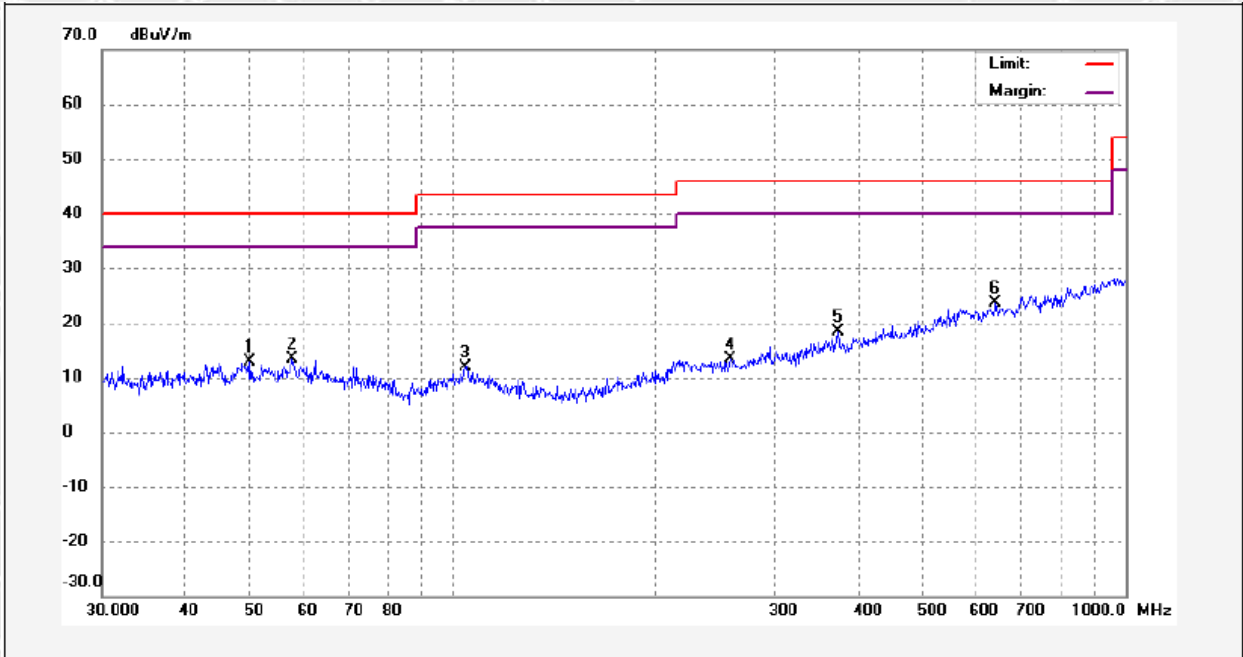

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 49.8988     | -1.34            | 14.25       | 12.91           | 40.00          | -27.09      | peak     |        |
| 2   | 57.6343     | -1.06            | 14.35       | 13.29           | 40.00          | -26.71      | peak     |        |
| 3   | 104.2066    | -1.09            | 12.96       | 11.87           | 43.50          | -31.63      | peak     |        |
| 4   | 259.0520    | -1.11            | 14.61       | 13.50           | 46.00          | -32.50      | peak     |        |
| 5   | 373.4421    | 0.51             | 17.96       | 18.47           | 46.00          | -27.53      | peak     |        |
| 6   | 641.7350    | 0.63             | 22.98       | 23.61           | 46.00          | -22.39      | peak     |        |



Test Channel Middle Channel Polarization Horizontal

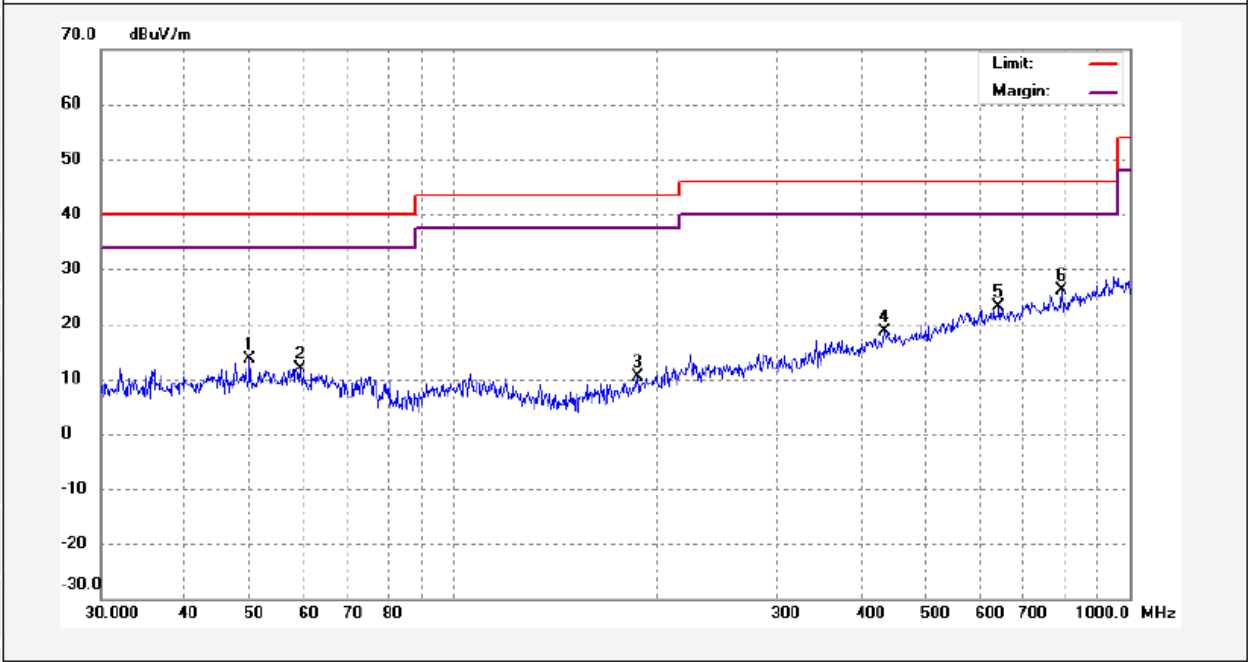


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 49.9514     | -0.70            | 14.24       | 13.54           | 40.00          | -26.46      | peak     |        |
| 2   | 59.3572     | -2.15            | 14.01       | 11.86           | 40.00          | -28.14      | peak     |        |
| 3   | 187.3584    | -1.46            | 11.81       | 10.35           | 43.50          | -33.15      | peak     |        |
| 4   | 435.4371    | -0.35            | 19.08       | 18.73           | 46.00          | -27.27      | peak     |        |
| 5   | 640.8357    | 0.25             | 22.99       | 23.24           | 46.00          | -22.76      | peak     |        |
| 6   | 795.9038    | 0.65             | 25.41       | 26.06           | 46.00          | -19.94      | peak     |        |



Test Channel    High Channel

Polarization    Vertical

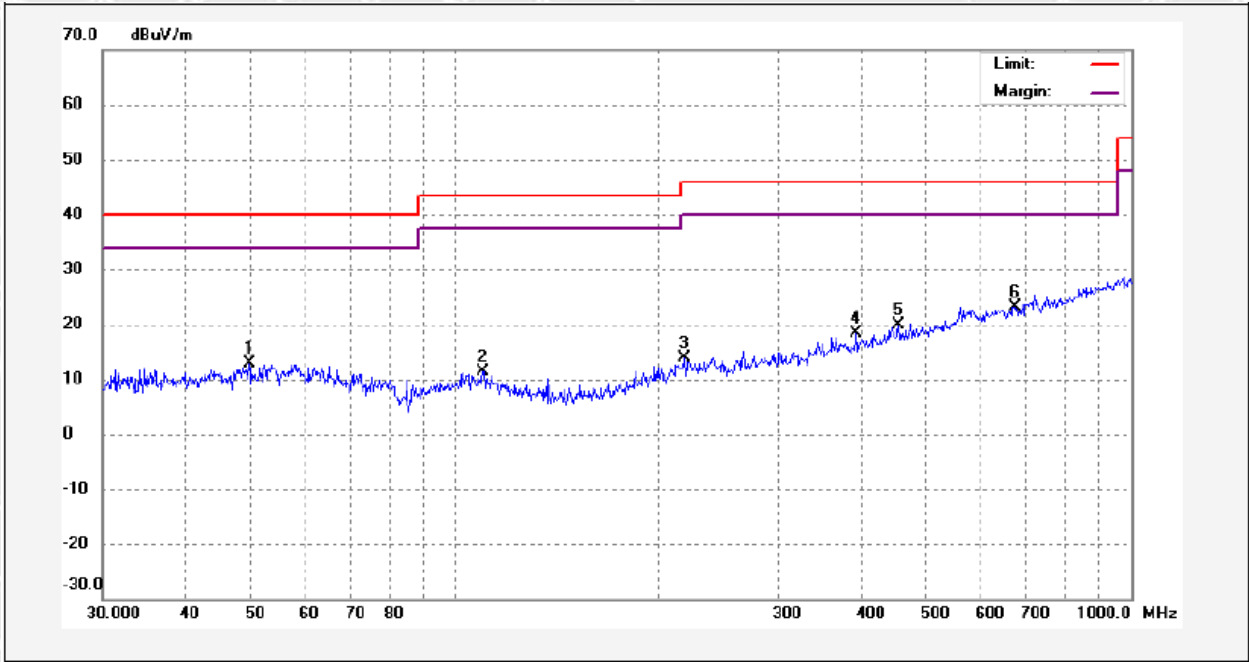


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 49.6371     | -1.49            | 14.28       | 12.79           | 40.00          | -27.21      | peak     |        |
| 2   | 110.1430    | -1.39            | 12.71       | 11.32           | 43.50          | -32.18      | peak     |        |
| 3   | 218.8450    | -0.38            | 14.25       | 13.87           | 46.00          | -32.13      | peak     |        |
| 4   | 393.1965    | 0.38             | 17.98       | 18.36           | 46.00          | -27.64      | peak     |        |
| 5   | 452.8785    | 0.62             | 19.33       | 19.95           | 46.00          | -26.05      | peak     |        |
| 6   | 673.7889    | -0.04            | 23.16       | 23.12           | 46.00          | -22.88      | peak     |        |



Test Channel    High Channel

Polarization    Horizontal

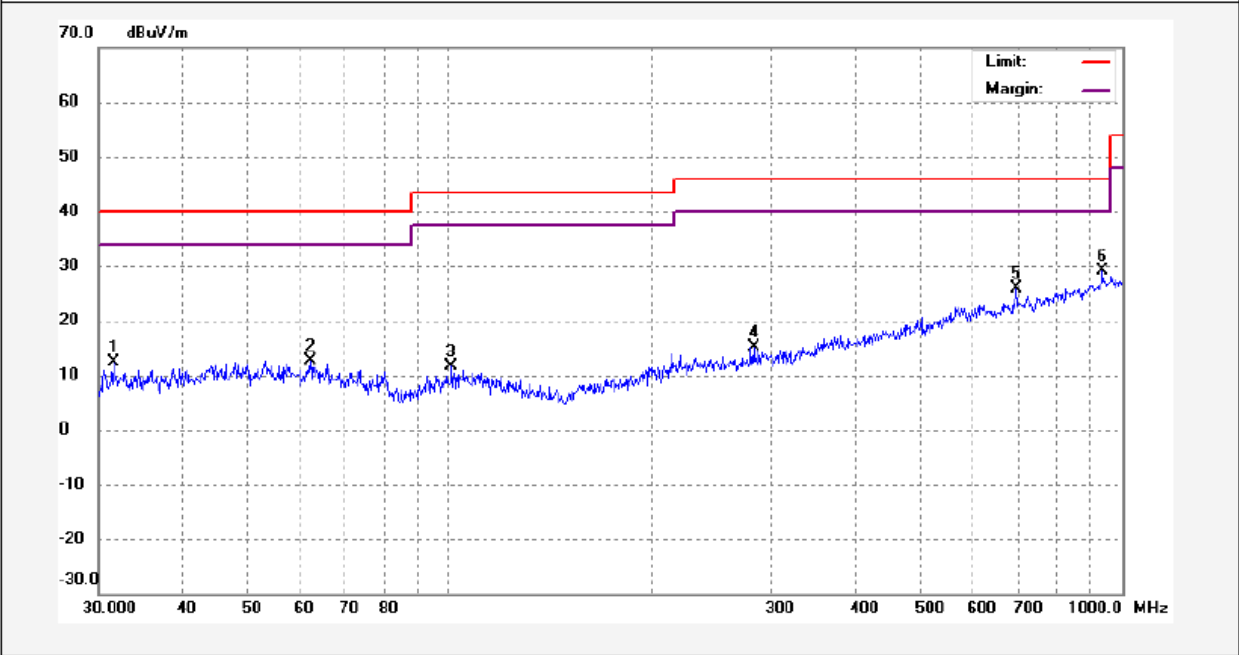

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 31.6979        | 0.17                | 12.23          | 12.40              | 40.00             | -27.60         | peak     |        |
| 2   | 62.1692        | -0.89               | 13.62          | 12.73              | 40.00             | -27.27         | peak     |        |
| 3   | 100.7571       | -0.78               | 12.39          | 11.61              | 43.50             | -31.89         | peak     |        |
| 4   | 283.8796       | -0.09               | 15.34          | 15.25              | 46.00             | -30.75         | peak     |        |
| 5   | 697.1011       | 1.87                | 23.96          | 25.83              | 46.00             | -20.17         | peak     |        |
| 6   | 938.5035       | 1.79                | 27.42          | 29.21              | 46.00             | -16.79         | peak     |        |


**Test Frequency: Above 1GHz (worst case @1Mbps)**

| Frequency (MHz)       | Reading (dBμV/m) | Detector | Polar (H/V) | Corrected Factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------------|------------------|----------|-------------|-----------------------|-----------------|----------------|-------------|
| <b>Low Channel</b>    |                  |          |             |                       |                 |                |             |
| 4804                  | 43.63            | PK       | H           | -3.59                 | 40.04           | 74             | -33.96      |
| 4804                  | 32.71            | AV       | H           | -3.59                 | 29.12           | 54             | -24.88      |
| 7206                  | 39.08            | PK       | H           | 3.06                  | 42.14           | 74             | -31.86      |
| 7206                  | 30.21            | AV       | H           | 3.06                  | 33.27           | 54             | -20.73      |
| 4804                  | 43.25            | PK       | V           | -3.47                 | 39.78           | 74             | -34.22      |
| 4804                  | 33.39            | AV       | V           | -3.47                 | 29.92           | 54             | -24.08      |
| 7206                  | 39.34            | PK       | V           | 2.96                  | 42.3            | 74             | -31.7       |
| 7206                  | 30.53            | AV       | V           | 2.96                  | 33.49           | 54             | -20.51      |
| <b>Middle Channel</b> |                  |          |             |                       |                 |                |             |
| 4880                  | 42.09            | PK       | H           | -3.41                 | 38.68           | 74             | -35.32      |
| 4880                  | 31.71            | AV       | H           | -3.41                 | 28.3            | 54             | -25.7       |
| 7320                  | 38.04            | PK       | H           | 3.23                  | 41.27           | 74             | -32.73      |
| 7320                  | 30.59            | AV       | H           | 3.23                  | 33.82           | 54             | -20.18      |
| 4880                  | 42.54            | PK       | V           | -3.26                 | 39.28           | 74             | -34.72      |
| 4880                  | 32.35            | AV       | V           | -3.26                 | 29.09           | 54             | -24.91      |
| 7320                  | 40.34            | PK       | V           | 3.13                  | 43.47           | 74             | -30.53      |
| 7320                  | 31.31            | AV       | V           | 3.13                  | 34.44           | 54             | -19.56      |
| <b>High Channel</b>   |                  |          |             |                       |                 |                |             |
| 4960                  | 41.45            | PK       | H           | -3.22                 | 38.23           | 74             | -35.77      |
| 4960                  | 32.56            | AV       | H           | -3.22                 | 29.34           | 54             | -24.66      |
| 7440                  | 40.97            | PK       | H           | 3.41                  | 44.38           | 74             | -29.62      |
| 7440                  | 31.12            | AV       | H           | 3.41                  | 34.53           | 54             | -19.47      |
| 4960                  | 43.08            | PK       | V           | -3.03                 | 40.05           | 74             | -33.95      |
| 4960                  | 34.31            | AV       | V           | -3.03                 | 31.28           | 54             | -22.72      |
| 7440                  | 41.17            | PK       | V           | 3.31                  | 44.48           | 74             | -29.52      |
| 7440                  | 32.49            | AV       | V           | 3.31                  | 35.8            | 54             | -18.2       |

**Note:**

1. Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
2. Average measurement was not performed if peak level is lower than average limit 54 dBuV/m) for above 1GHz.



## 6.3 Power Spectral Density

### 6.3.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.




### 6.3.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


### 6.3.3 Test Result

| Test Mode   | Test Channel | Power Spectral Density<br>dBm/3kHz | Limit<br>dBm/3kHz |
|-------------|--------------|------------------------------------|-------------------|
| BLE (1Mbps) | Low          | -19.85                             | 8                 |
|             | Middle       | -20.37                             | 8                 |
|             | High         | -20.43                             | 8                 |
| BLE (2Mbps) | Low          | -22.53                             | 8                 |
|             | Middle       | -22.87                             | 8                 |
|             | High         | -23.13                             | 8                 |

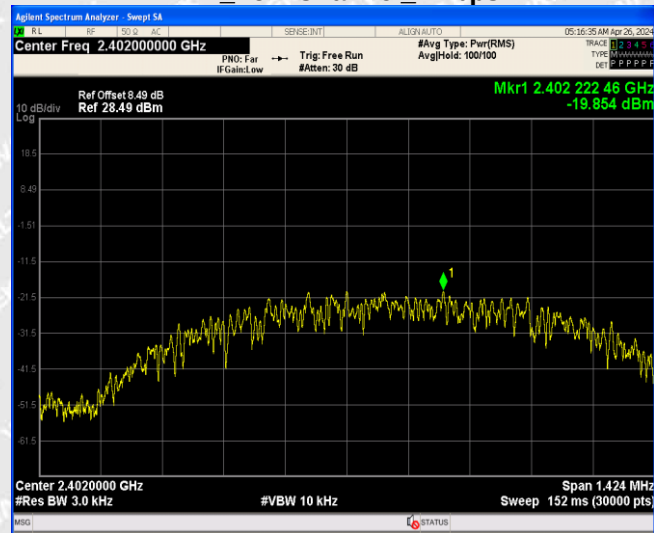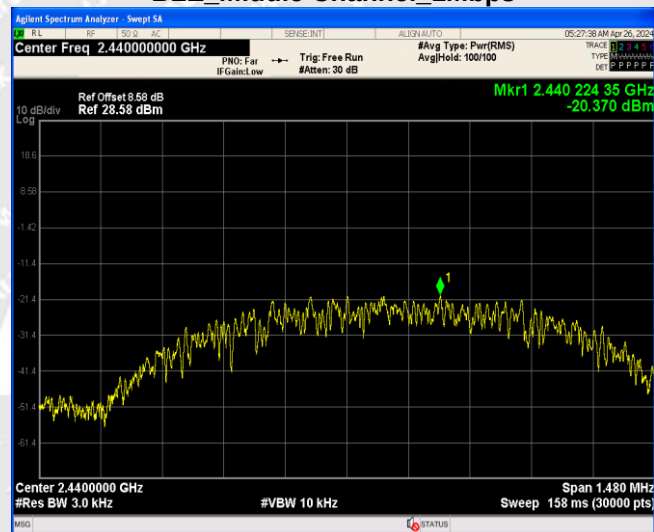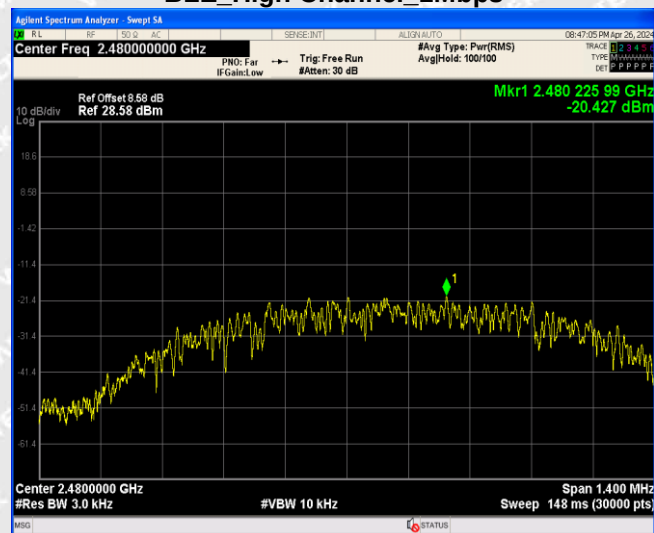
**BLE Low Channel 1Mbps****BLE Middle Channel 1Mbps****BLE High Channel 1Mbps**




## BLE Low Channel 2Mbps

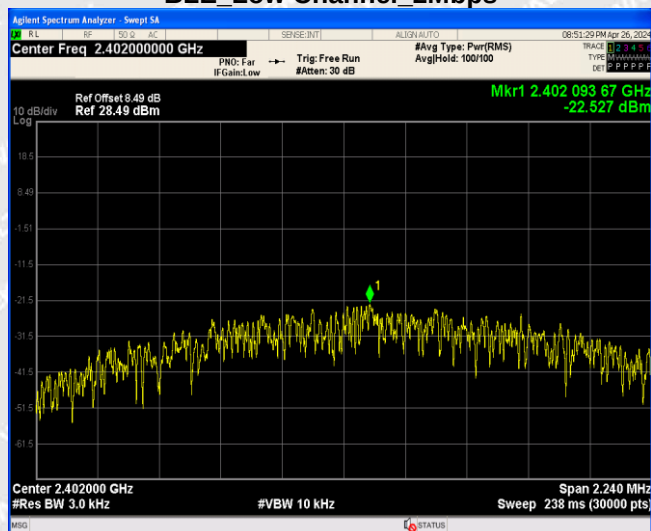

## BLE Middle Channel 2Mbps

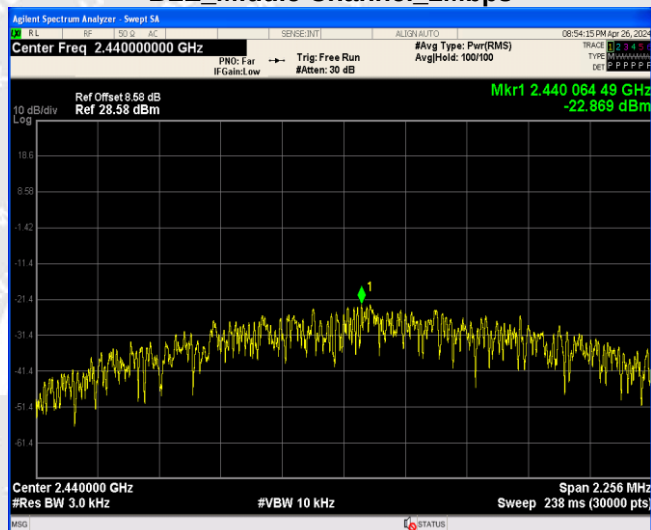

## BLE High Channel 2Mbps

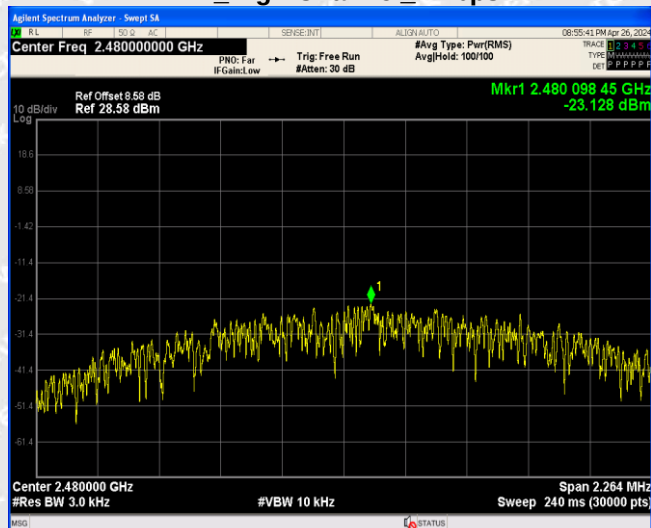



## 6.4 DTS Bandwidth

### 6.4.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.4.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.4.3 Test Result

| Test Mode   | Test Channel | 6dB Bandwidth MHz | Limit kHz  |
|-------------|--------------|-------------------|------------|
| BLE (1Mbps) | Low          | 0.732             | $\geq 500$ |
|             | Middle       | 0.740             | $\geq 500$ |
|             | High         | 0.700             | $\geq 500$ |
| BLE (2Mbps) | Low          | 1.120             | $\geq 500$ |
|             | Middle       | 1.128             | $\geq 500$ |
|             | High         | 1.132             | $\geq 500$ |



Agilent Spectrum Analyzer - Sweep SA

Center Freq 2.402000000 GHz

Ref Offset 8.49 dB  
Ref 30.00 dBm

Span 4.000 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 1.00 ms (1001 pts)

Mkr3 732 kHz  
0.114 dB

| MkR | MkSE | TRC | SL    | F            | dB         | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE |
|-----|------|-----|-------|--------------|------------|----------|----------------|----------------|
| 1   | N    | 1   | f     | 2.401752 GHz | -9.917 dBm |          |                |                |
| 2   | N    | 1   | f     | 2.402384 GHz | -3.747 dBm |          |                |                |
| 3   | A1   | 1   | f (Δ) | 732 kHz (Δ)  | 0.114 dB   |          |                |                |

Agilent Spectrum Analyzer - Sweep 54

1.1 MHz PC FCB: FCB1

Center Freq 2.440000000 GHz

PNO: Far IF Gain: low Trig: Free Run #Atten: 40 dB

ALIGN AUTO #Avg Type: Pwr(RMS) Avg/Hold: 100/100

05:24:14 AM Apr 26, 2012 TRACE REF: 2.440 GHz TYPE: MAAAAH DET: P P P P P

Ref Offset 8.58 dB Ref 30.00 dBm

ΔMkr3 740 kHz -0.110 dB

10 dB/div

20.0

10.0

0.00

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

Center 2.440000 GHz #Res BW 100 kHz #VBW 300 kHz Span 4.000 MHz #Sweep 1.00 ms (1001 pts)

MEAS MODE TOL SQL

1 N 1 f 2.439 752 GHz -10.751 dBm

2 N 1 f 2.440 400 GHz -4.464 dBm

3 Δ1 1 f (Δ) 740 kHz (Δ) -0.110 dB

4

5

6

7

8

9

10

11

12

MSO STATUS

**Agilent Spectrum Analyzer - Sweep 5A**

Center Freq: 2.48000000 GHz PNO: Far IF Gain: Low TRIG: Free Run #Atten: 40 dB ALIGN: AUTO #Avg Type: Pur(MRS) AvgHld: 100/100

08:46:30 PM 20, 20 TRACE RF SW: 3 TYPE B-AAAAAA DET PPPPPP

Ref Offset: 8.58 dB ΔMkr3 700 kHz  
Ref: 30.00 dBm 0.521 dB

10 dB/dBv

Span 4.000 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.00 ms (1001 pts)

| MkR | MODE | FREQ | SFL | SPAN          | VOL         | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE |
|-----|------|------|-----|---------------|-------------|----------|----------------|----------------|
| 1   | N    | f    | P   | 2.479 772 GHz | -10.759 dBm |          |                |                |
| 2   | N    | f    | P   | 2.480 388 GHz | -4.226 dBm  |          |                |                |
| 3   | A1   | f    | (Δ) | 700 kHz (Δ)   | 0.521 dB    |          |                |                |



## BLE Low Channel 2Mbps



## BLE Middle Channel 2Mbps



## BLE High Channel 2Mbps





## 6.5 RF Output Power

### 6.5.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.




### 6.5.2 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.


### 6.5.3 Test Result

| Modulation  | Test Channel | Reading (dBm) | Output Power (mW) | Limit (mW) |
|-------------|--------------|---------------|-------------------|------------|
| BLE (1Mbps) | Low          | -3.316        | 0.466             | 1000       |
|             | Middle       | -3.701        | 0.427             | 1000       |
|             | High         | -3.741        | 0.423             | 1000       |
| BLE (2Mbps) | Low          | -3.296        | 0.468             | 1000       |
|             | Middle       | -3.742        | 0.423             | 1000       |
|             | High         | -3.735        | 0.423             | 1000       |

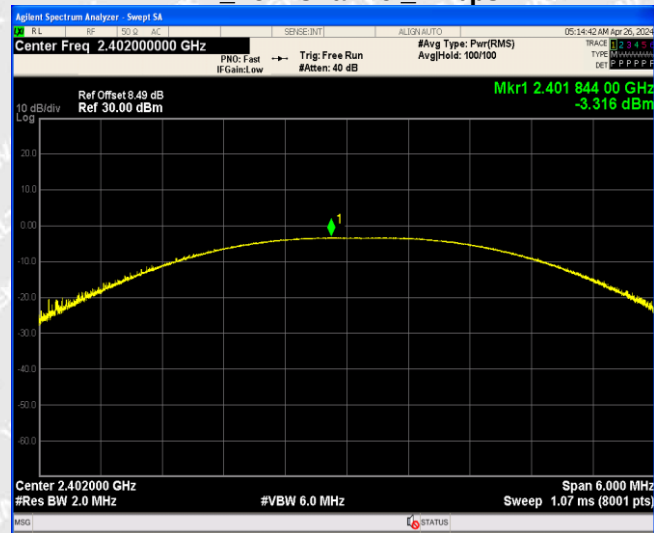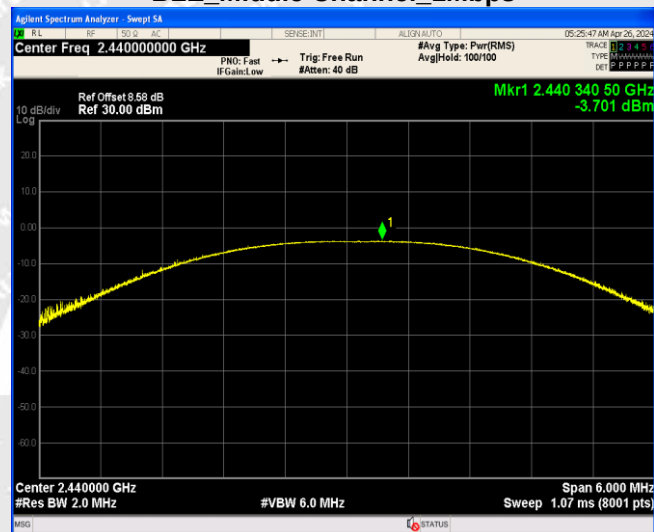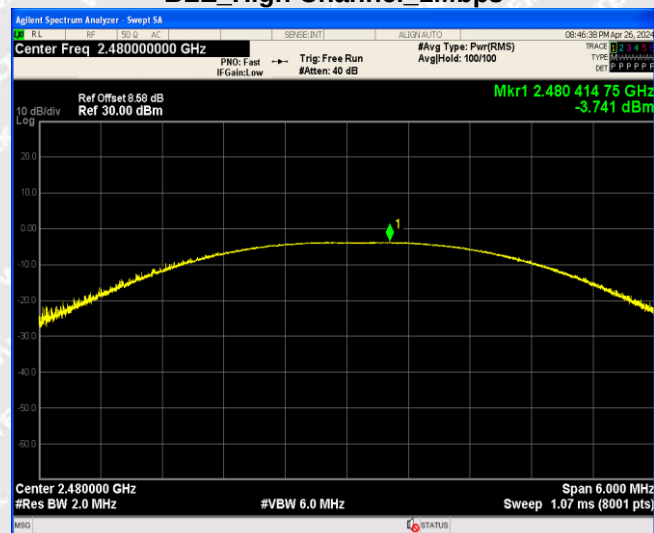
**BLE Low Channel 1Mbps****BLE Middle Channel 1Mbps****BLE High Channel 1Mbps**




## BLE Low Channel 2Mbps

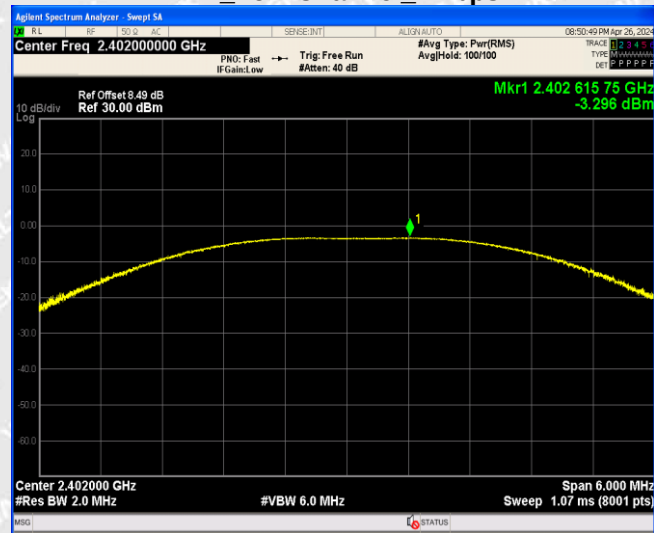

## BLE Middle Channel 2Mbps

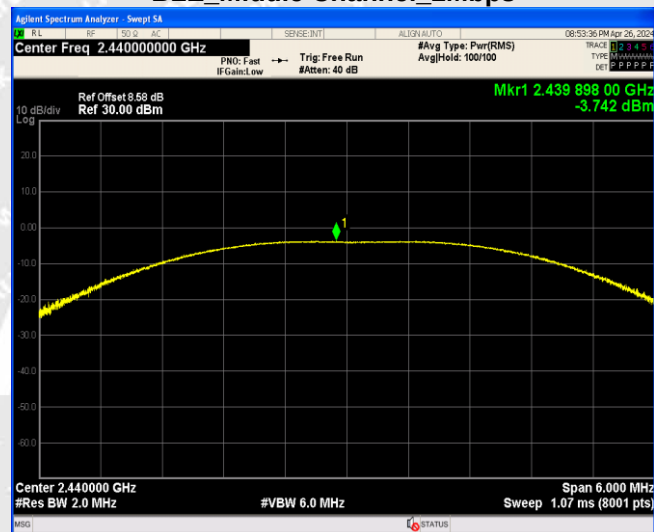

## BLE High Channel 2Mbps

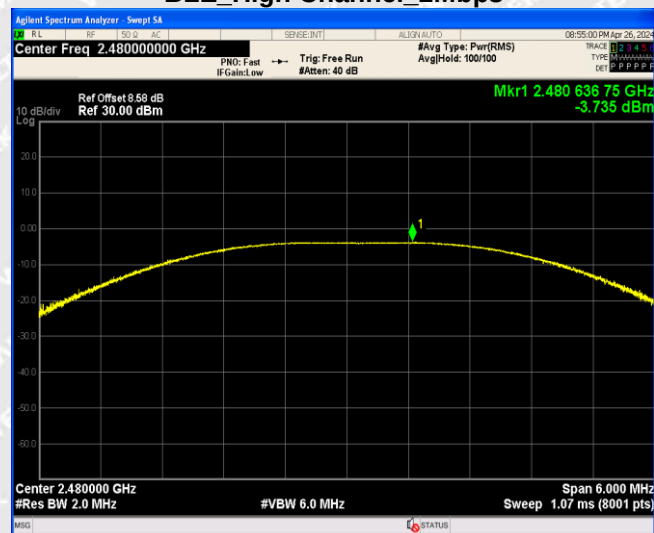



## 6.6 Out of Band Emissions

### 6.6.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 6.6.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

#### A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge,

as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz

for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emissions must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205.



Note that the method of measurement KDB publication number: 913591 may be used for the radiated band edge measurements.

**B. Antenna-port conducted measurements**

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9/
- b) VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

**Table 9—RBW as a function of frequency**

| Frequency          | RBW                |
|--------------------|--------------------|
| 9 kHz to 150 kHz   | 200 Hz to 300 Hz   |
| 0.15 MHz to 30 MHz | 9 kHz to 10 kHz    |
| 30 MHz to 1000 MHz | 100 kHz to 120 kHz |
| >1000 MHz          | 1 MHz              |

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1.




6.6.3 Test Result

Radiated Test

1Mbps


Test Channel Low Channel

Polarization Horizontal (worst case)

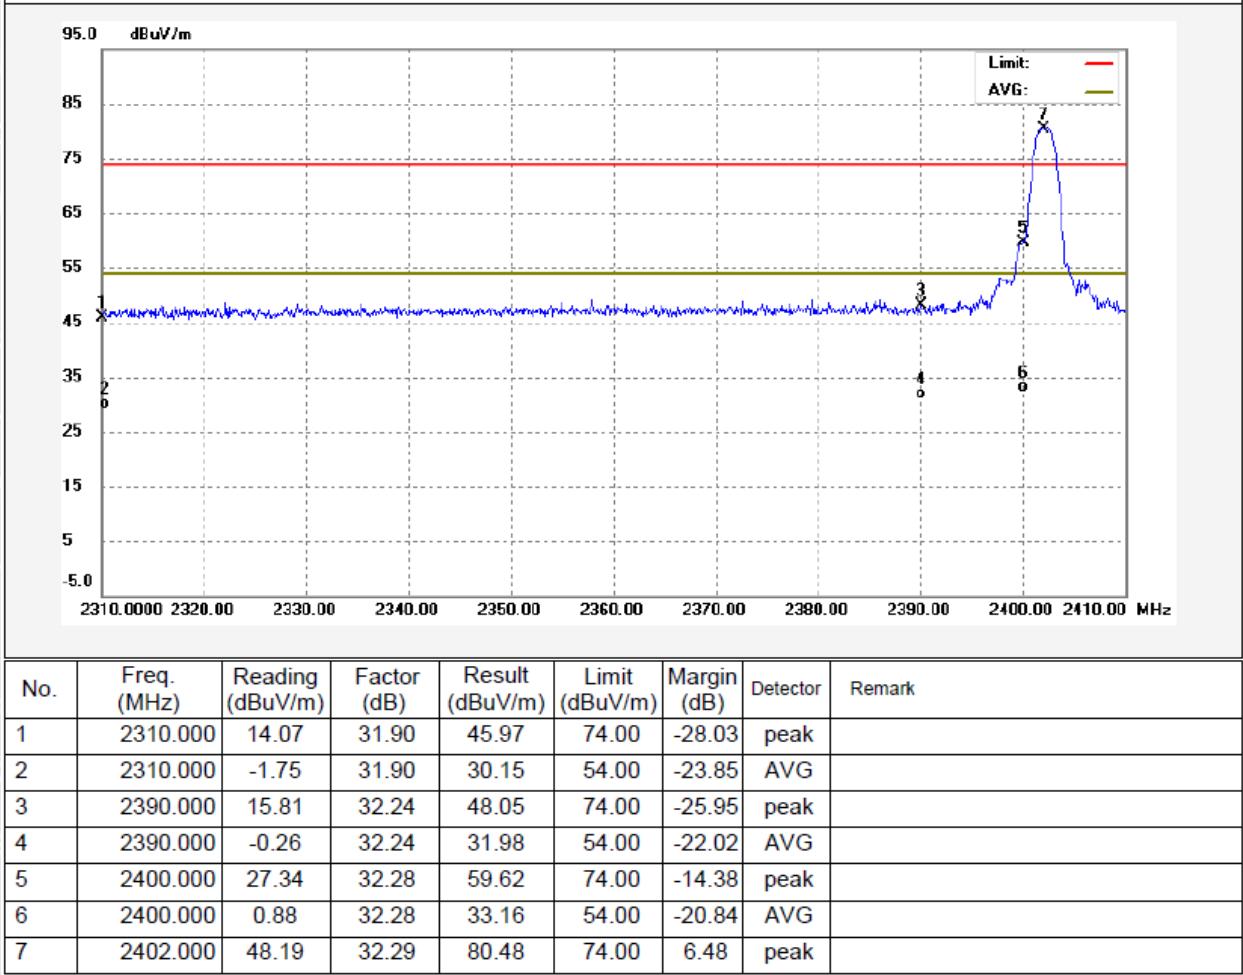



Test Channel    High Channel                      Polarization    Horizontal (worst case)

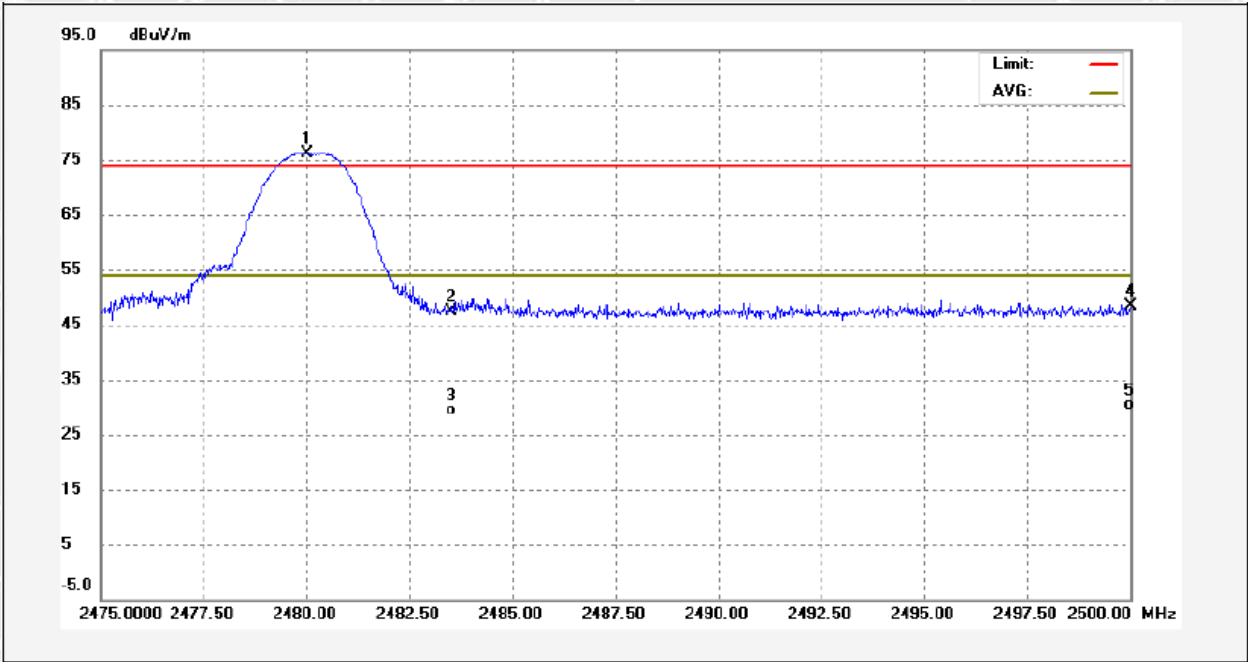


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2480.000    | 43.45            | 32.62       | 76.07           | 74.00          | 2.07        | peak     |        |
| 2   | 2483.500    | 14.80            | 32.63       | 47.43           | 74.00          | -26.57      | peak     |        |
| 3   | 2483.500    | -3.29            | 32.63       | 29.34           | 54.00          | -24.66      | AVG      |        |
| 4   | 2500.000    | 15.71            | 32.70       | 48.41           | 74.00          | -25.59      | peak     |        |
| 5   | 2500.000    | -2.37            | 32.70       | 30.33           | 54.00          | -23.67      | AVG      |        |



2Mbps

Test Channel Low Channel

Polarization Horizontal (worst case)

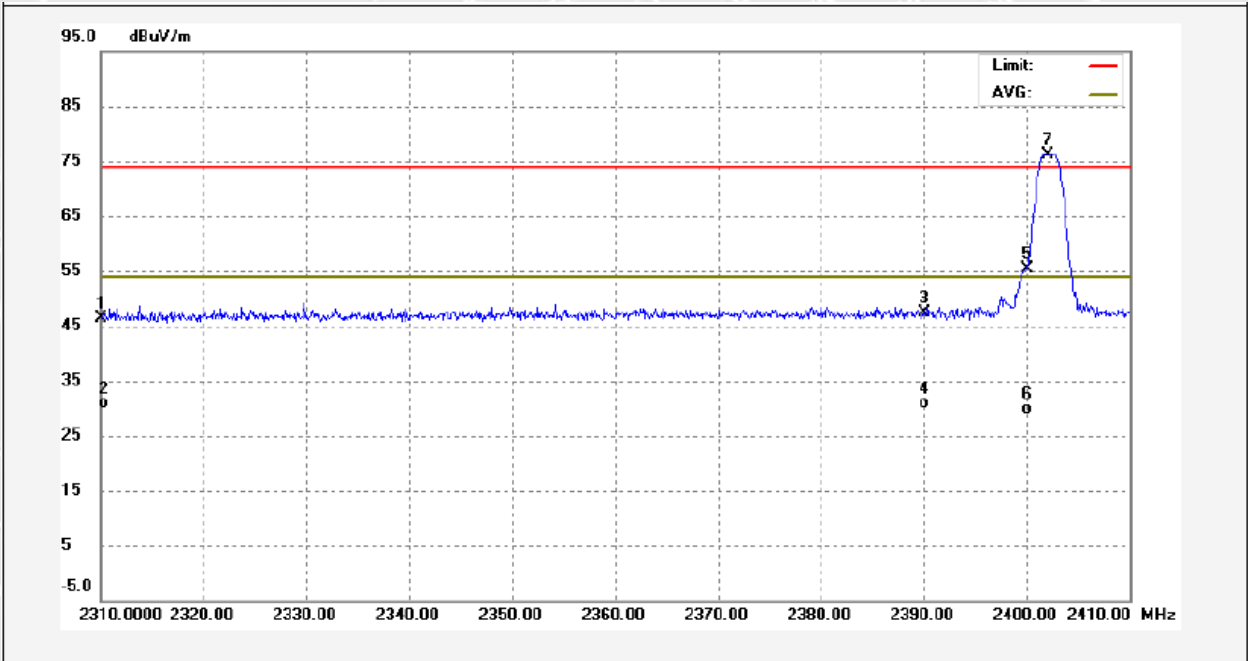


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2310.000    | 14.42            | 31.90       | 46.32           | 74.00          | -27.68      | peak     |        |
| 2   | 2310.000    | -0.93            | 31.90       | 30.97           | 54.00          | -23.03      | AVG      |        |
| 3   | 2390.000    | 15.12            | 32.24       | 47.36           | 74.00          | -26.64      | peak     |        |
| 4   | 2390.000    | -1.44            | 32.24       | 30.80           | 54.00          | -23.20      | AVG      |        |
| 5   | 2400.000    | 23.01            | 32.28       | 55.29           | 74.00          | -18.71      | peak     |        |
| 6   | 2400.000    | -2.45            | 32.28       | 29.83           | 54.00          | -24.17      | AVG      |        |
| 7   | 2402.000    | 43.78            | 32.29       | 76.07           | 74.00          | 2.07        | peak     |        |



Test Channel    High Channel

Polarization    Horizontal (worst case)

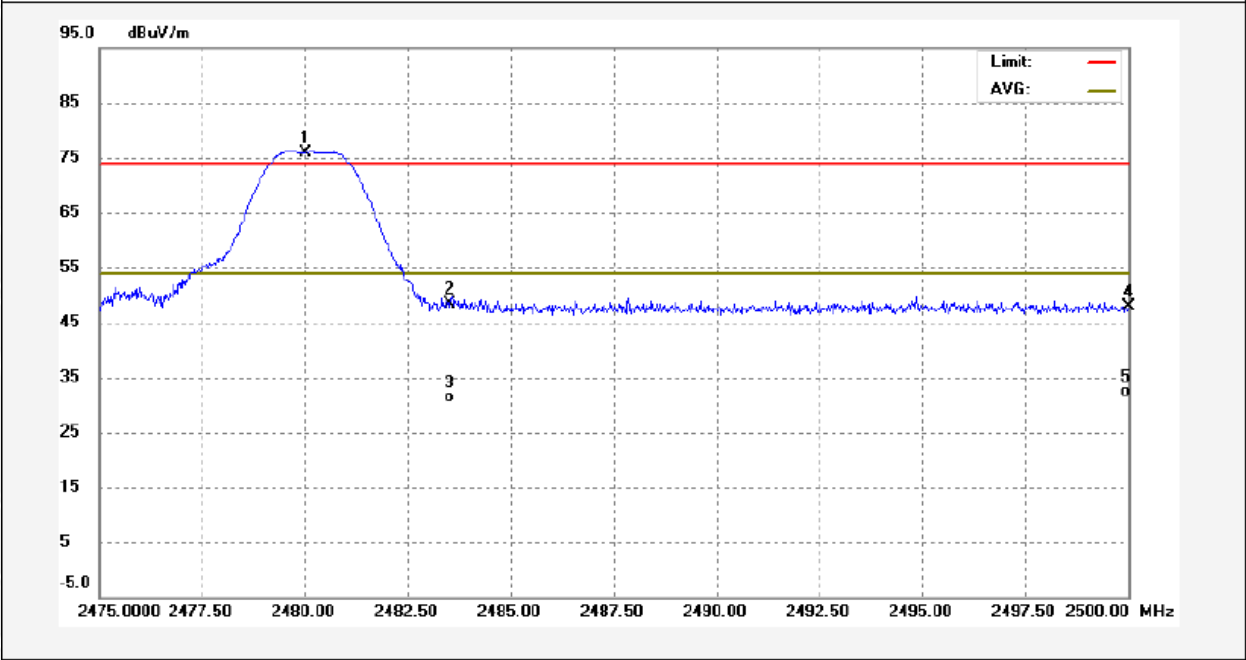


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2480.000    | 43.33            | 32.62       | 75.95           | 74.00          | 1.95        | peak     |        |
| 2   | 2483.500    | 15.69            | 32.63       | 48.32           | 74.00          | -25.68      | peak     |        |
| 3   | 2483.500    | -1.24            | 32.63       | 31.39           | 54.00          | -22.61      | AVG      |        |
| 4   | 2500.000    | 15.14            | 32.70       | 47.84           | 74.00          | -26.16      | peak     |        |
| 5   | 2500.000    | -0.39            | 32.70       | 32.31           | 54.00          | -21.69      | AVG      |        |




## Conducted Test

## BLE\_Low Channel\_1Mbps

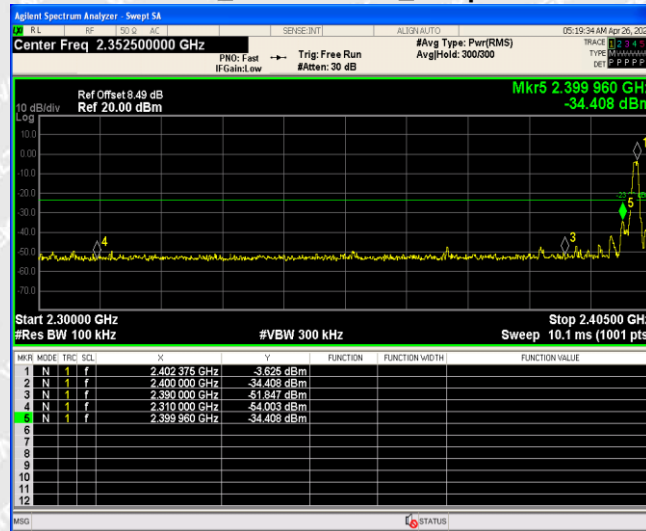


## BLE\_High Channel\_1Mbps

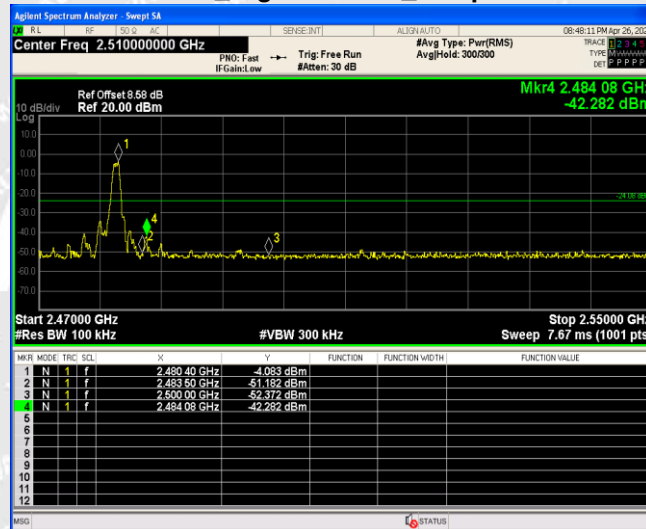




BLE\_Low Channel\_2Mbps

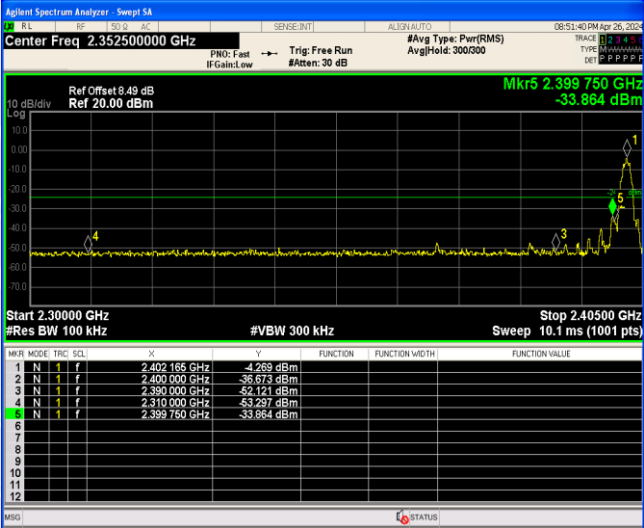

BLE\_High Channel\_2Mbps

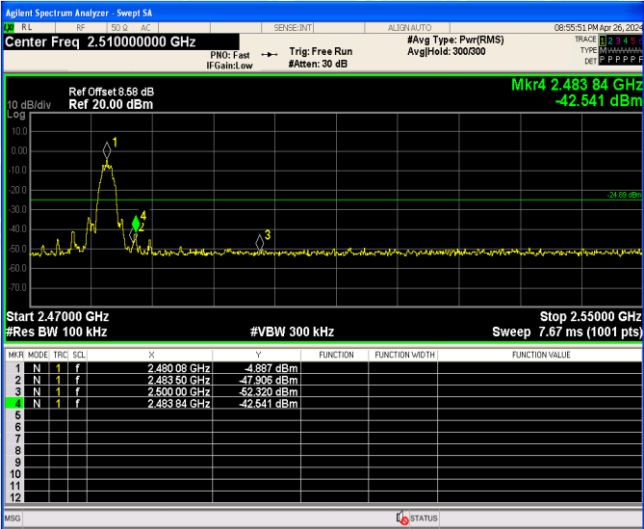




6.7 Conducted Emissions

6.7.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

6.7.2 Basic Test Setup Block Diagram

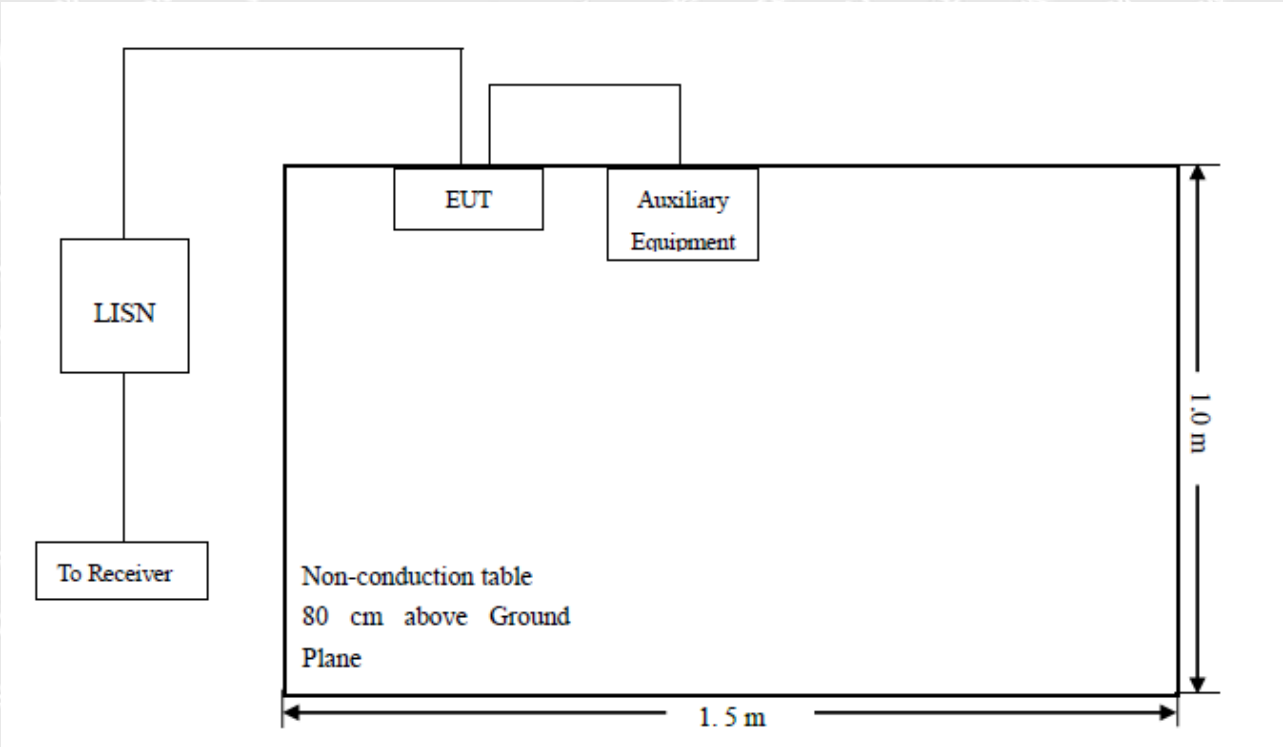

6.7.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

|                                   |         |
|-----------------------------------|---------|
| Start Frequency.....              | 150 kHz |
| Stop Frequency.....               | 30 MHz  |
| Sweep Speed.....                  | Auto    |
| IF Bandwidth.....                 | 10 kHz  |
| Quasi-Peak Adapter Bandwidth..... | 9 kHz   |
| Quasi-Peak Adapter Mode.....      | Normal  |



#### 6.7.4 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

#### 6.7.5 Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF(Voltage Division Facotr), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Measurement} = \text{Reading Level} + \text{Correct Factor}$$

$$\text{Correct Facotor} = \text{LISN VDF} + \text{Cable Loss}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Measurement} - \text{Limit}$$

# WALTEK



6.7.6 Test Result

Test Mode      Communication mode (AC 120V/60Hz)      Polarity      Line

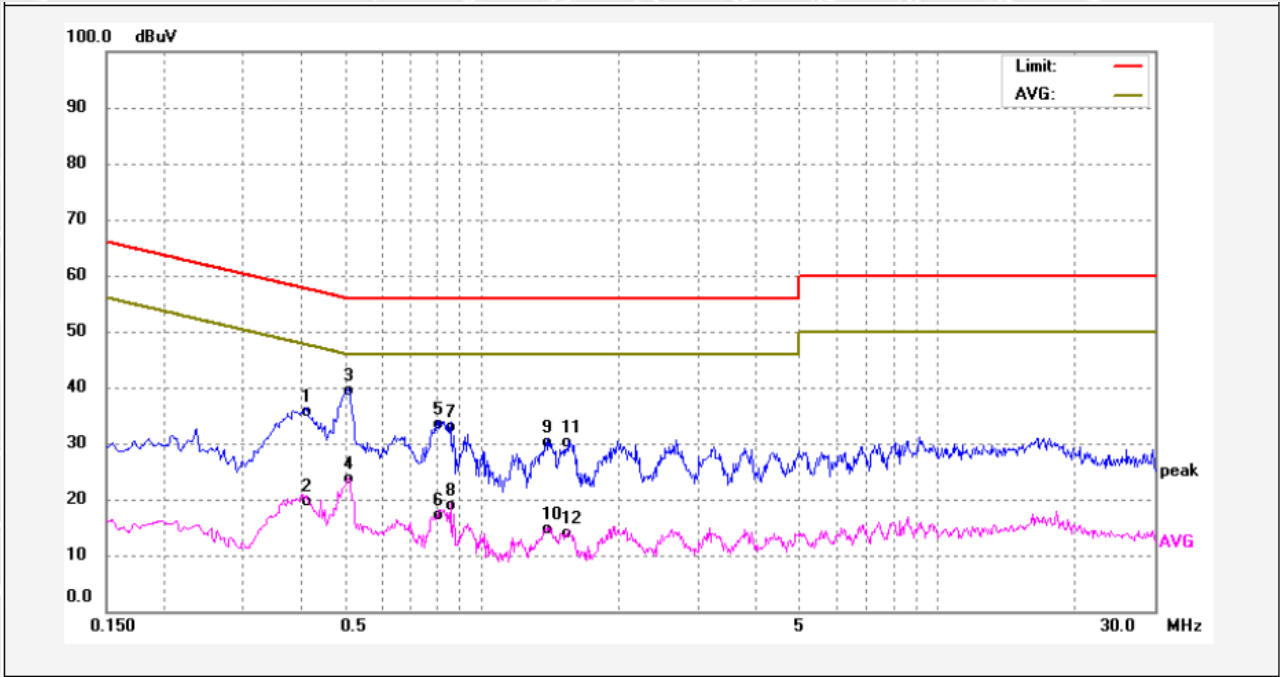

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1   | 0.4105      | 25.98          | 9.67        | 35.65         | 57.64      | -21.99      | QP       |        |
| 2   | 0.4105      | 9.89           | 9.67        | 19.56         | 47.64      | -28.08      | AVG      |        |
| 3   | 0.5100      | 29.61          | 9.68        | 39.29         | 56.00      | -16.71      | QP       |        |
| 4   | 0.5100      | 14.01          | 9.68        | 23.69         | 46.00      | -22.31      | AVG      |        |
| 5   | 0.8070      | 23.73          | 9.69        | 33.42         | 56.00      | -22.58      | QP       |        |
| 6   | 0.8070      | 7.36           | 9.69        | 17.05         | 46.00      | -28.95      | AVG      |        |
| 7   | 0.8565      | 23.25          | 9.69        | 32.94         | 56.00      | -23.06      | QP       |        |
| 8   | 0.8565      | 9.29           | 9.69        | 18.98         | 46.00      | -27.02      | AVG      |        |
| 9   | 1.4010      | 20.45          | 9.69        | 30.14         | 56.00      | -25.86      | QP       |        |
| 10  | 1.4010      | 5.02           | 9.69        | 14.71         | 46.00      | -31.29      | AVG      |        |
| 11  | 1.5540      | 20.53          | 9.69        | 30.22         | 56.00      | -25.78      | QP       |        |
| 12  | 1.5540      | 4.15           | 9.69        | 13.84         | 46.00      | -32.16      | AVG      |        |




Test Mode

Communication mode (AC 120V/60Hz)

Polarity

Neutral

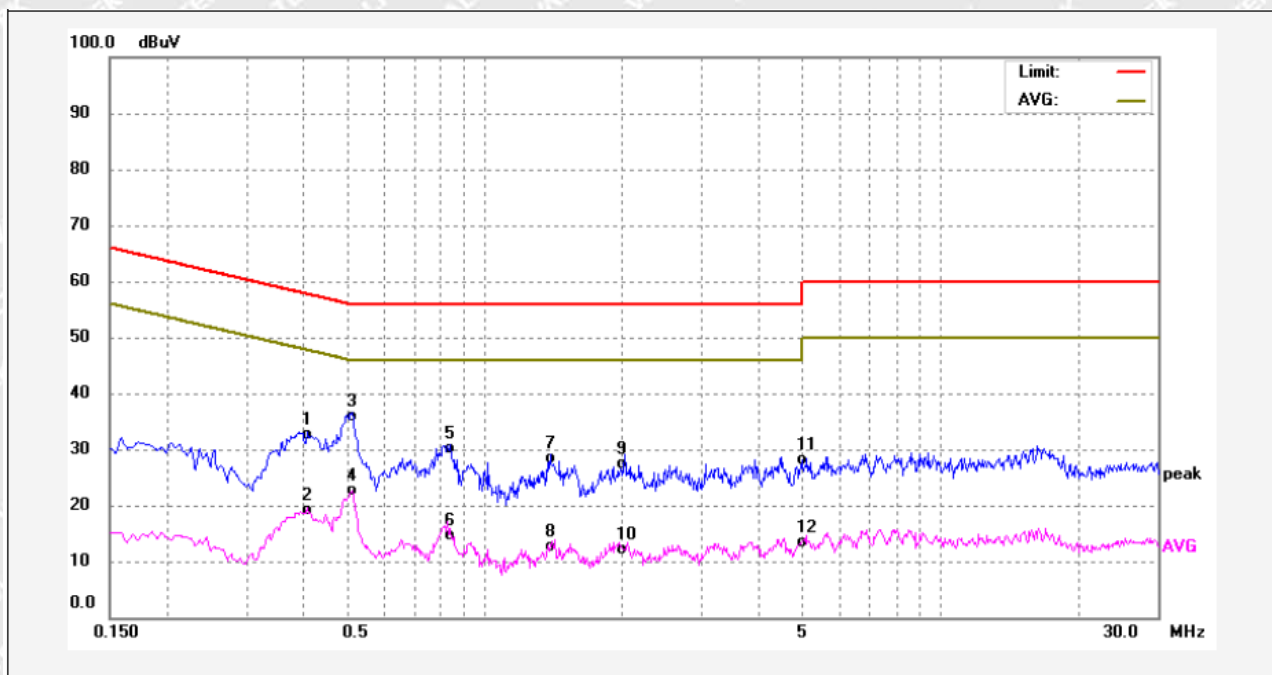

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1   | 0.4065      | 22.84          | 9.70        | 32.54         | 57.72      | -25.18      | QP       |        |
| 2   | 0.4065      | 9.43           | 9.70        | 19.13         | 47.72      | -28.59      | AVG      |        |
| 3   | 0.5100      | 26.23          | 9.70        | 35.93         | 56.00      | -20.07      | QP       |        |
| 4   | 0.5100      | 12.87          | 9.70        | 22.57         | 46.00      | -23.43      | AVG      |        |
| 5   | 0.8430      | 20.39          | 9.71        | 30.10         | 56.00      | -25.90      | QP       |        |
| 6   | 0.8430      | 4.91           | 9.71        | 14.62         | 46.00      | -31.38      | AVG      |        |
| 7   | 1.3920      | 18.65          | 9.72        | 28.37         | 56.00      | -27.63      | QP       |        |
| 8   | 1.3920      | 2.88           | 9.72        | 12.60         | 46.00      | -33.40      | AVG      |        |
| 9   | 2.0310      | 17.76          | 9.73        | 27.49         | 56.00      | -28.51      | QP       |        |
| 10  | 2.0310      | 2.36           | 9.73        | 12.09         | 46.00      | -33.91      | AVG      |        |
| 11  | 4.9740      | 18.27          | 9.81        | 28.08         | 56.00      | -27.92      | QP       |        |
| 12  | 4.9740      | 3.56           | 9.81        | 13.37         | 46.00      | -32.63      | AVG      |        |



## 7 Photographs Test Setup

### 7.1 Photographs - Radiated Emission Test Setup

30MHz-1GHz



Above 1GHz





## 7.2 Photographs – Conducted Emission Test Setup



# WALTEK



## 8 Photographs – EUT Constructional Details

Please refer to “ANNEX”.

=====End of Report=====

# WALTEK