

## TEST REPORT

**Report Number: 21061501HKG-001**

Mobile Technologies Inc.

Application For Certification  
(Original Grant)

**FCC ID: 2AA2X-15000301**

**IC: 24439-15000301**

Transceiver

**PREPARED AND CHECKED BY:**

**APPROVED BY:**

Signed On File  
Wong Cheuk Ho, Herbert  
Lead Engineer

---

Wong Kwok Yeung, Kenneth  
Assistant Supervisor  
Date: 20 Aug 2021

Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

© 2017 Intertek

## TEST REPORT

### GENERAL INFORMATION

|                                    |                                                                                                                                                                         |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant Name:</b>             | Mobile Technologies Inc.                                                                                                                                                |
| <b>Applicant Address:</b>          | 1050 NE 67th Ave., Hillsboro, Oregon<br>97124, United States                                                                                                            |
| <b>Contact Person:</b>             | Audy Tse                                                                                                                                                                |
| <b>e-mail:</b>                     | audy.tse@mtigs.com                                                                                                                                                      |
| <b>Brand Name:</b>                 | MTI                                                                                                                                                                     |
| <b>FCC Specification Standard:</b> | FCC Part 15, October 1, 2019 Edition                                                                                                                                    |
| <b>FCC ID:</b>                     | 2AA2X-15000301                                                                                                                                                          |
| <b>FCC Model(s):</b>               | VERSA EX                                                                                                                                                                |
| <b>IC Specification Standard:</b>  | RSS-247 Issue 2, February 2017<br>RSS-Gen Issue 5 + Amendment 2 (February 2021)                                                                                         |
| <b>IC:</b>                         | 24439-15000301                                                                                                                                                          |
| <b>PMN:</b>                        | VERSA EX                                                                                                                                                                |
| <b>HVIN:</b>                       | VERSA EX                                                                                                                                                                |
| <b>Type of EUT:</b>                | Spread Spectrum Transmitter                                                                                                                                             |
| <b>Description of EUT:</b>         | Network Hub                                                                                                                                                             |
| <b>Serial Number:</b>              | D23MT0100023                                                                                                                                                            |
| <b>Sample Receipt Date:</b>        | 28 Jun 2021                                                                                                                                                             |
| <b>Date of Test:</b>               | 10 Jul 2021 to 20 Jul 2021                                                                                                                                              |
| <b>Report Date:</b>                | 20 Aug 2021                                                                                                                                                             |
| <b>Environmental Conditions:</b>   | Temperature: +10 to 40°C<br>Humidity: 10 to 90%                                                                                                                         |
| <b>Conclusion:</b>                 | Test was conducted by client submitted sample. The submitted sample as received / after modification complied with the 47 CFR Part 15 / RSS-210 Issue 10 Certification. |

## TEST REPORT

### TABLE OF CONTENTS

|                                                                               |           |
|-------------------------------------------------------------------------------|-----------|
| <b>1.0 Test Results Summary &amp; Statement of Compliance</b>                 | <b>4</b>  |
| 1.1 Summary of Test Results                                                   | 4         |
| 1.2 Statement of Compliance                                                   | 4         |
| <b>2.0 General Description</b>                                                | <b>5</b>  |
| 2.1 Product Description                                                       | 5         |
| 2.2 Test Methodology                                                          | 6         |
| 2.3 Test Facility                                                             | 6         |
| 2.4 Related Submittal(s) Grants                                               | 6         |
| <b>3.0 System Test Configuration</b>                                          | <b>7</b>  |
| 3.1 Justification                                                             | 7         |
| 3.2 EUT Exercising Software                                                   | 8         |
| 3.3 Details of EUT and Description of Accessories                             | 9         |
| 3.4 Measurement Uncertainty                                                   | 9         |
| <b>4.0 Test Results</b>                                                       | <b>10</b> |
| 4.1 Maximum Conducted Output Power at Antenna Terminals                       | 10        |
| 4.2 Minimum 6dB RF Bandwidth                                                  | 12        |
| 4.3 Maximum Power Spectral Density                                            | 15        |
| 4.3 Maximum Power Spectral Density                                            | 15        |
| 4.4 Out of Band Conducted Emissions                                           | 18        |
| 4.5 Field Strength Calculation                                                | 23        |
| 4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions | 24        |
| 4.6.1 Radiated Emission Configuration Photograph                              | 24        |
| 4.6.2 Radiated Emission Data                                                  | 24        |
| 4.6.3 Radiated Emission Test Setup                                            | 29        |
| 4.6.4 Transmitter Duty Cycle Calculation                                      | 30        |
| 4.7 AC Power Line Conducted Emission                                          | 31        |
| 4.7.1 AC Power Line Conducted Emission Configuration Photograph               | 31        |
| 4.7.2 AC Power Line Conducted Emission Data                                   | 31        |
| 4.7.3 Conducted Emission Test Setup                                           | 34        |
| 4.8 Occupied Bandwidth                                                        | 37        |
| <b>5.0 Equipment List</b>                                                     | <b>36</b> |

## TEST REPORT

### EXHIBIT 1 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

#### 1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

##### 1.1 Summary of Test Results

| TEST ITEMS                                                   | FCC PART 15 SECTION        | RSS-247/<br>RSS-GEN#<br>SECTION | RESULTS | DETAILS<br>SEE<br>SECTION |
|--------------------------------------------------------------|----------------------------|---------------------------------|---------|---------------------------|
| Antenna Requirement                                          | 15.203                     | 8.3#                            | Pass    | 2.1                       |
| Max. Conducted Output Power (Peak)                           | 15.247(b)(3)&(4)           | 5.4(d)                          | Pass    | 4.1                       |
| Min. 6dB RF Bandwidth                                        | 15.247(a)(2)               | 5.1(a)                          | Pass    | 4.2                       |
| Max. Power Density (average)                                 | 15.247(e)                  | 5.1(b)                          | Pass    | 4.3                       |
| Out of Band Antenna Conducted Emission                       | 15.247(d)                  | 5.5                             | Pass    | 4.4                       |
| Radiated Emission in Restricted Bands and Spurious Emissions | 15.247(d), 15.209 & 15.109 | 5.5<br>8.10#                    | Pass    | 4.6                       |
| AC Power Line Conducted Emission                             | 15.207 & 15.107            | 8.8#                            | Pass    | 4.7                       |

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

##### 1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, October 1, 2020 Edition  
RSS-247 Issue 2, February 2017  
RSS-Gen Issue 5 + Amendment 2 (February 2021)

## TEST REPORT

### EXHIBIT 2 GENERAL DESCRIPTION

#### 2.0 GENERAL DESCRIPTION

##### 2.1 Product Description

The Equipment Under Test (EUT) is Versa Ex. The EUT has 125kHz RFID reader and 2.4GHz Zigbee transceiver for wireless connectivity. The EUT is powered by USB port (5VDC) from AC/DC adaptor (Model: W&T-AD1824A050300U Input:100-240VAC 50/60Hz 0.8A, Output: 5V 3A). When main power is lost, the unit is powered from internal backup battery.

The antenna(s) used in the EUT is integral, and the test sample is a prototype.

The circuit description is saved with filename: descri.pdf.

## TEST REPORT

### 2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No.558074 D01 v05r01 (11-February-2019). All other measurements were made in accordance with the procedures in 47 CFR Part 2 and RSS-Gen Issue 5 + Amendment 2 (February 2021).

### 2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been fully placed on file with the FCC and Industry Canada No.: 2042H, Conformity Assessment Body Identifier (CABID) of test facility: HKAP01.

### 2.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver (ZigBee portion).

## TEST REPORT

### EXHIBIT 3 SYSTEM TEST CONFIGURATION

#### 3.0 SYSTEM TEST CONFIGURATION

##### 3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by USB port (5VDC) from AC/DC adaptor.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209 / RSS-247 2.5. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109 / RSS-247 Section 5.5 Limits.

## TEST REPORT

### 3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 3MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

Different data rates have been tested. Worst case is reported only.

All relevant operation modes have been tested, and the worst-case data is included in this report.

For simultaneous transmission, both Zigbee and 125kHz RFID portions are also switched on when taking radiated emission for determining worst-case spurious emission.

### 3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.



## TEST REPORT

### 3.3 Details of EUT and Description of Accessories

#### Details of EUT:

An AC/DC adaptor was used to power the device.

- (1) Model: W&T-AD1824A050300U Input:100-240VAC 50/60Hz 0.8A, Output: 5V 3A  
(Provided by Applicant)

#### Description of Accessories:

N/A

### 3.4 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044. For these excepted or not mentioned standards, Cl 4.2.2 of ILAC-G8:09/2019 decision rules will be reference and guard band will be equal to our measurement uncertainty with 95% confidence level ( $k=2$ ). In case, the measured value is within guard band region, undetermined decision will be used. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are  $\pm 5.3\text{dB}$  and  $\pm 0.99\text{dB}$  respectively. The value of the Measurement uncertainty for conducted emission test is  $\pm 4.2\text{dB}$ .

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

## TEST REPORT


### EXHIBIT 4 TEST RESULTS

#### 4.0 TEST RESULTS

##### 4.1 Maximum Conducted (peak) Output Power at Antenna Terminals

###### RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



The antenna port of the EUT was connected to the input of a spectrum analyzer.

- ☒ The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure 9.1.3 was used.
- ☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

Antenna Gain = -1 dBi

| Frequency (MHz)      | Output in dBm | Output in mWatt |
|----------------------|---------------|-----------------|
| Low Channel: 2405    | 0.8           | 1.2             |
| Middle Channel: 2440 | -0.8          | 0.8             |
| High Channel: 2480   | -1.2          | 0.8             |

## TEST REPORT

### 4.1 Maximum Conducted Output Power at Antenna Terminals – Cont'd

Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation: ☒ included in OFFSET function  
☐ added to SA raw reading

max. conducted (peak) output level = 0.8 dBm

Limits:

☒ 1W (30dBm) for antennas with gains of 6dBi or less

☐ \_\_\_W (\_\_\_dBm) for antennas with gains more than 6dBi

The plots of conducted output power are saved as below.

## TEST REPORT

### 4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

| Frequency (MHz)      | 6dB Bandwidth (MHz) |
|----------------------|---------------------|
| Low Channel: 2405    | 1.6                 |
| Middle Channel: 2440 | 1.6                 |
| High Channel: 2480   | 1.6                 |

#### Limits


6 dB bandwidth shall be at least 500kHz

The plots of 6dB RF bandwidth are saved as below.

## TEST REPORT


### PLOTS OF 6dB RF BANDWIDTH

#### Lowest Channel

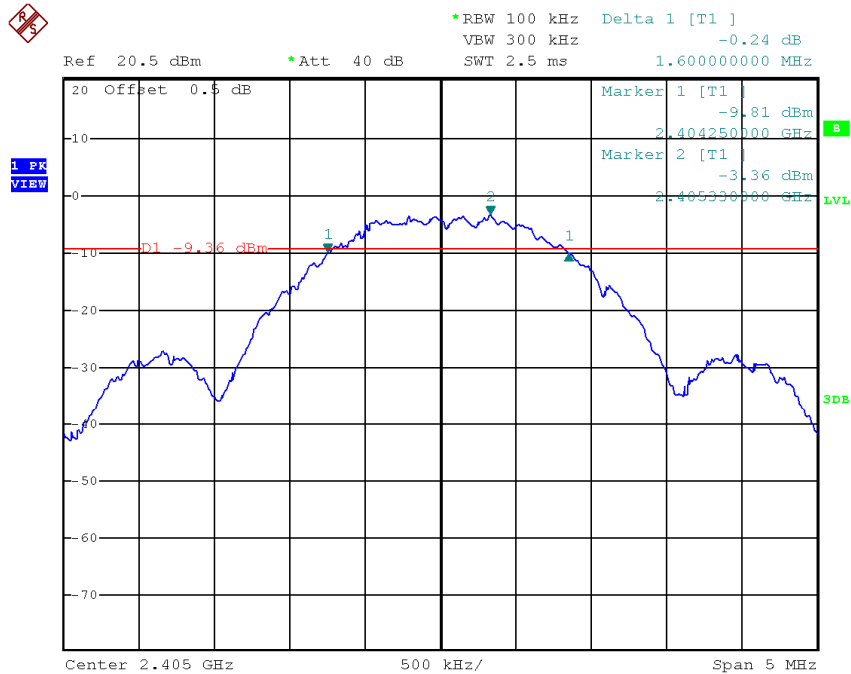

Date: 9.JUL.2021 14:10:35


#### Middle Channel

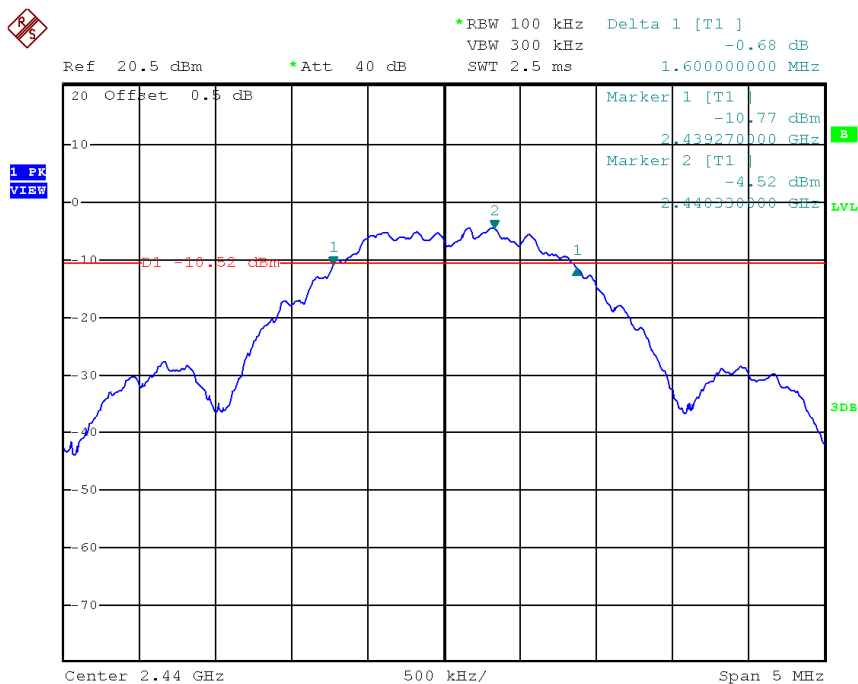

Date: 9.JUL.2021 14:18:38

TEST REPORT

PLOTS OF 6dB RF BANDWIDTH  
Highest Channel

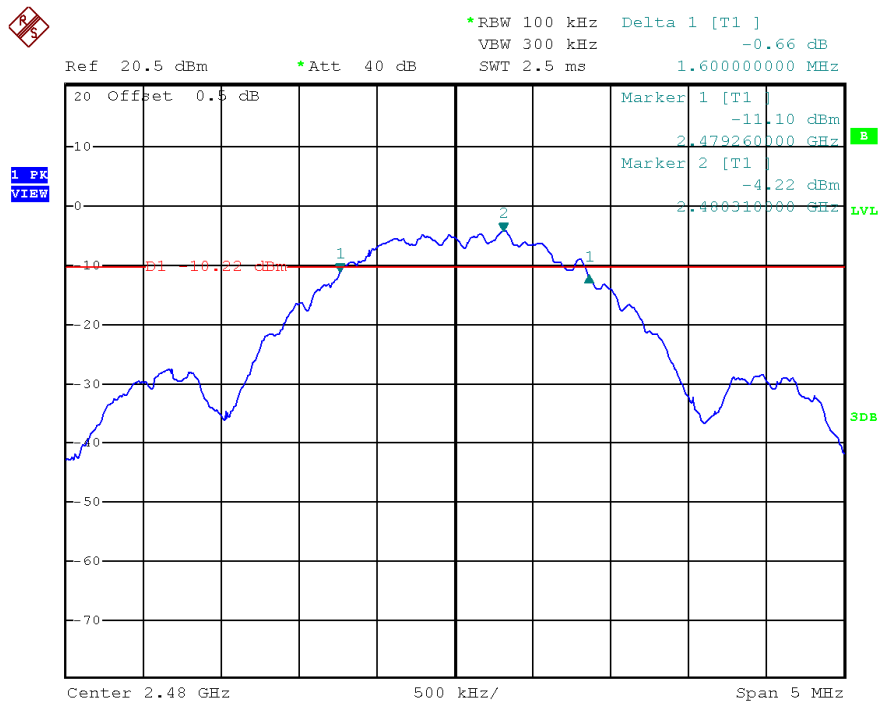

Date: 9.JUL.2021 14:21:12

## TEST REPORT

### 4.3 Maximum Power Spectral Density

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

| Frequency (MHz) |      | PSD in 100kHz (dBm) |
|-----------------|------|---------------------|
| Low Channel:    | 2405 | -2.70               |
| Middle Channel: | 2440 | -3.84               |
| High Channel:   | 2480 | -4.08               |

Cable Loss: 0.5 dB

Limit:  
8dBm


The plots of power spectral density are as below.

### 4.3 Maximum Power Spectral Density

## TEST REPORT


### PLOTS OF POWER SPECTRAL DENSITY (100kHz RBW)

Lowest channel

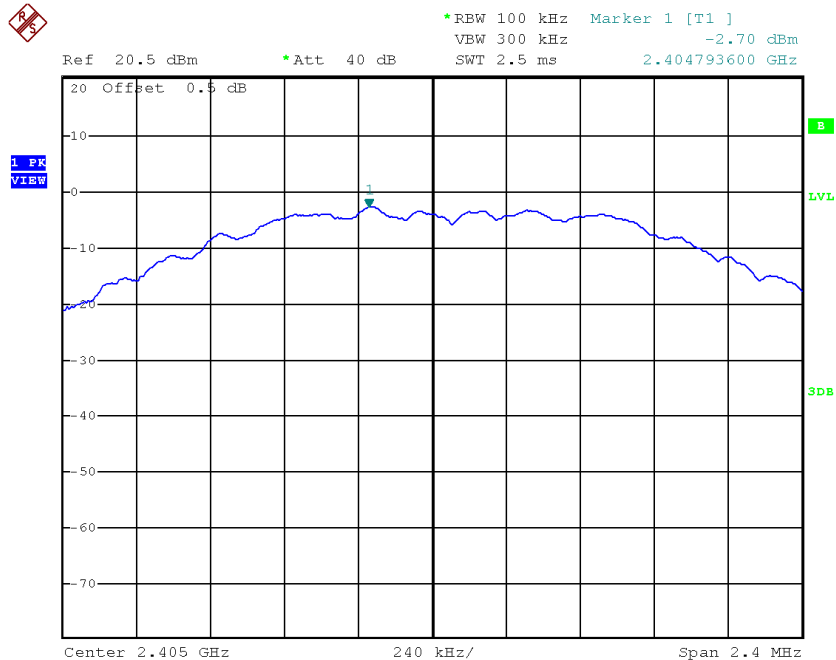

Date: 9.JUL.2021 14:26:41

Middle channel

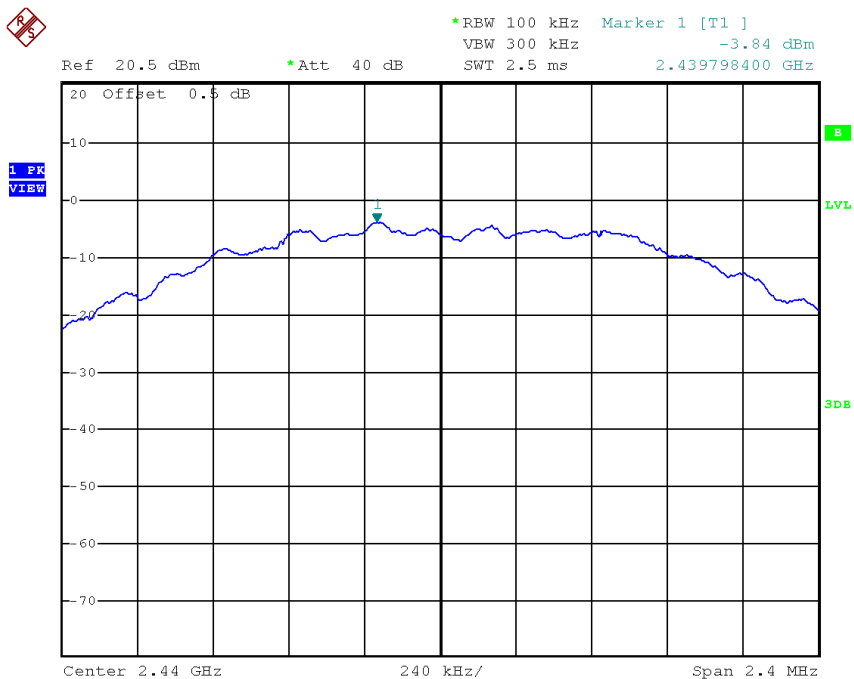


Date: 9.JUL.2021 14:30:39



## TEST REPORT

### PLOTS OF POWER SPECTRAL DENSITY (100kHz RBW)

Highest channel

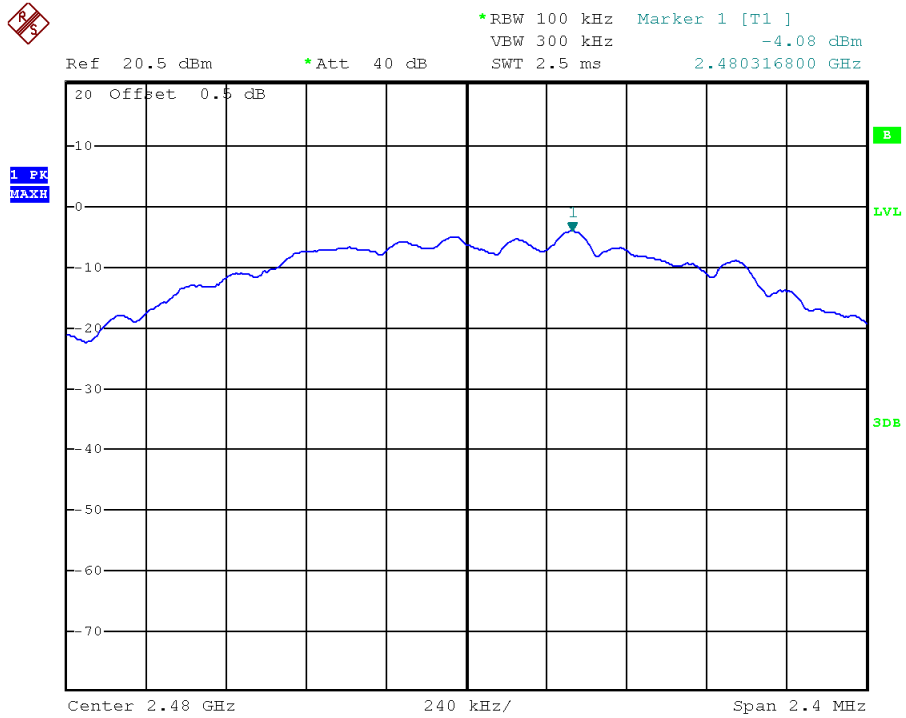

Date: 9.JUL.2021 14:34:21

## TEST REPORT

### 4.4 Out of Band Conducted Emissions

The maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth.

The measurement procedures under sections 11 of KDB558074 D01 v05r01 (11-February-2019) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.


#### Limits:

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the maximum measured in-band peak PSD level.

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

Lowest Channel, Bandedge

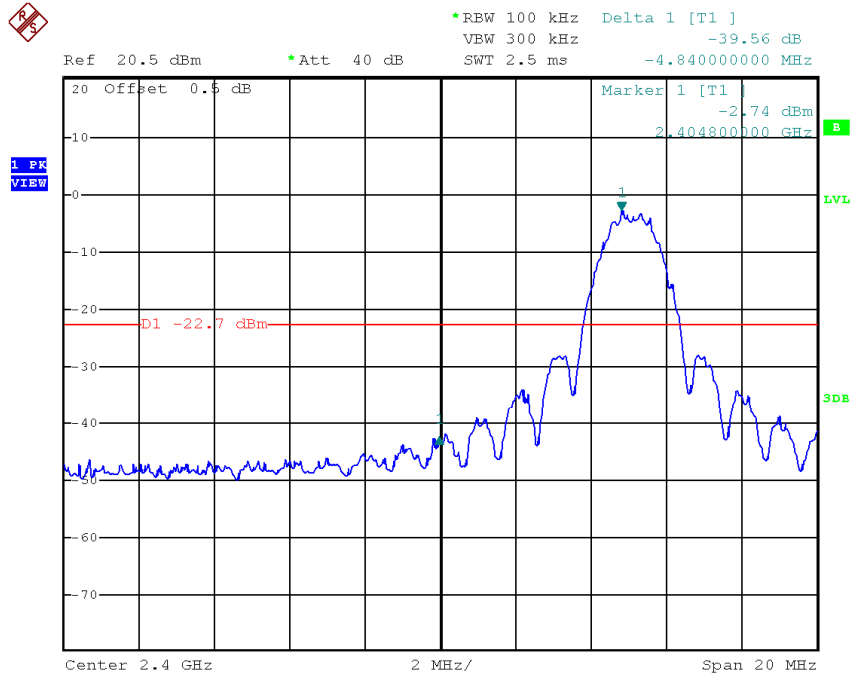

Date: 9.JUL.2021 14:54:10

Highest Channel, Bandedge

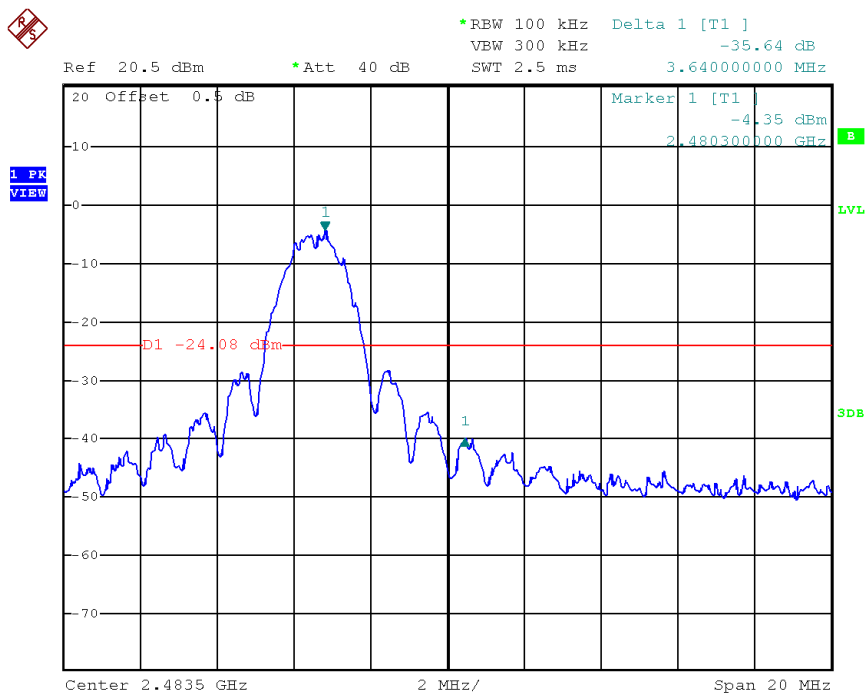


Date: 9.JUL.2021 14:57:11

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

Lowest Channel, Plot A

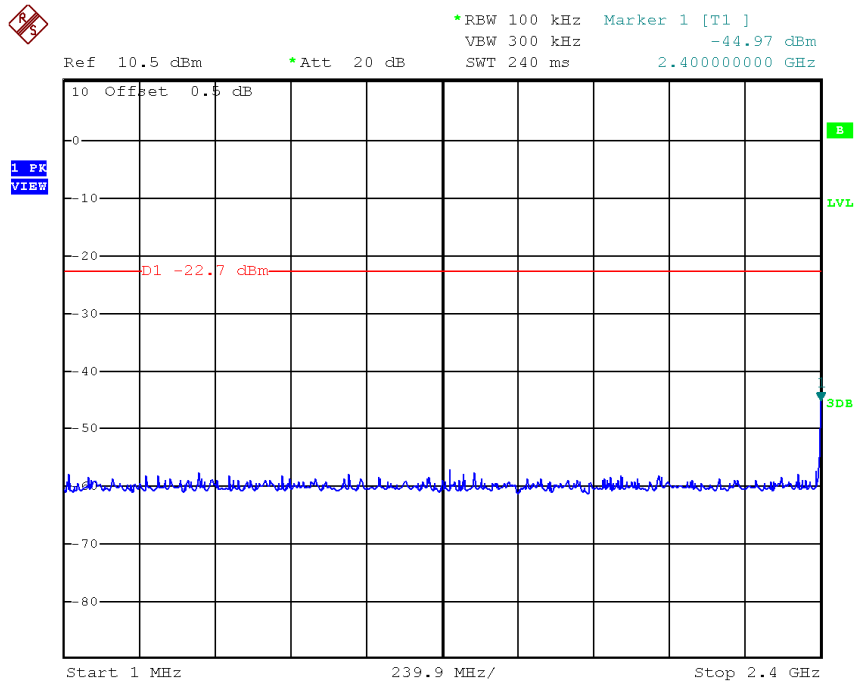

Date: 9.JUL.2021 15:17:09

Lowest Channel, Plot B

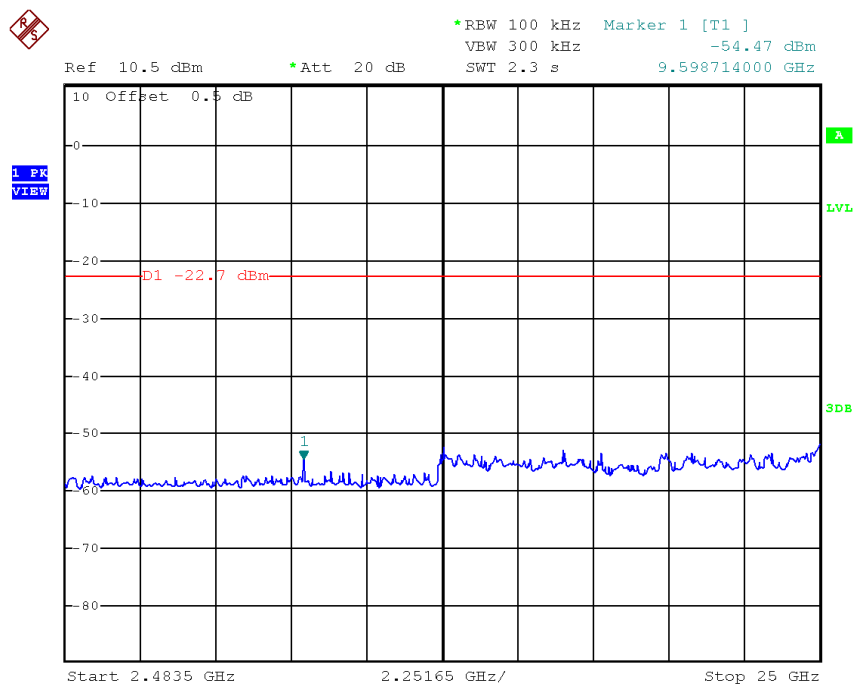


Date: 9.JUL.2021 15:13:15

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

#### Middle Channel, Plot A

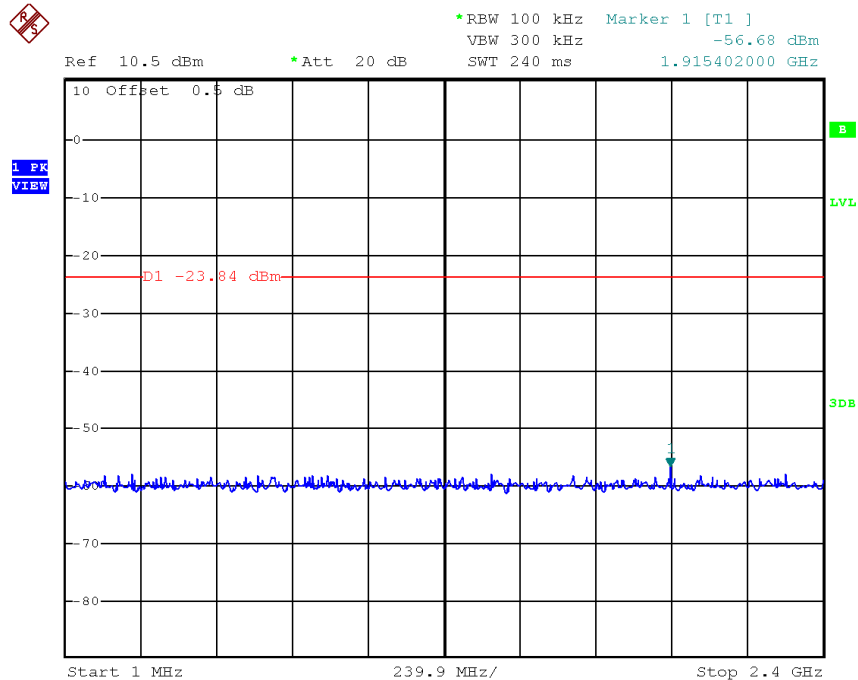

Date: 9.JUL.2021 15:24:27

#### Middle Channel, Plot B

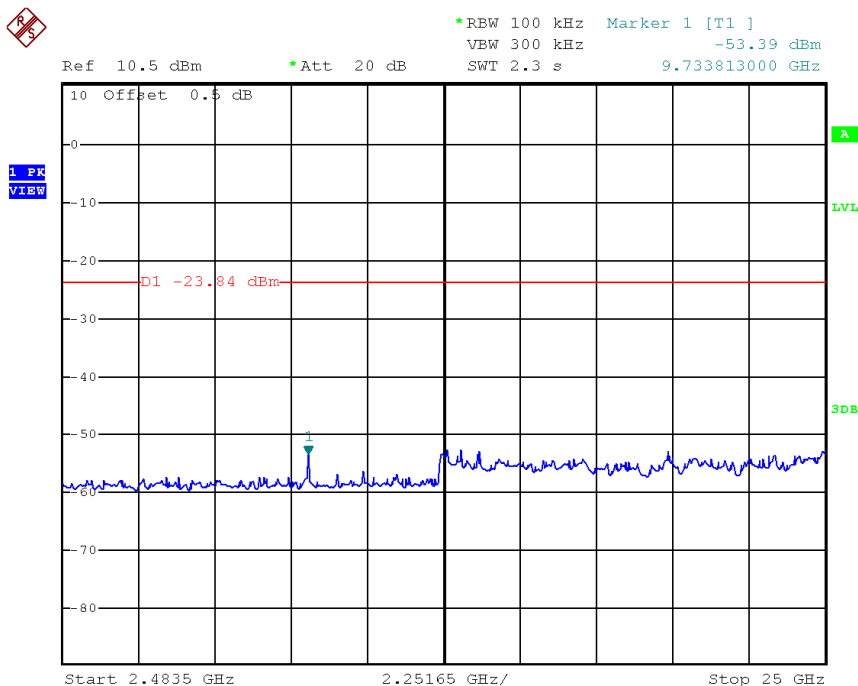


Date: 9.JUL.2021 15:26:43

## TEST REPORT


### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

#### Highest Channel, Plot A

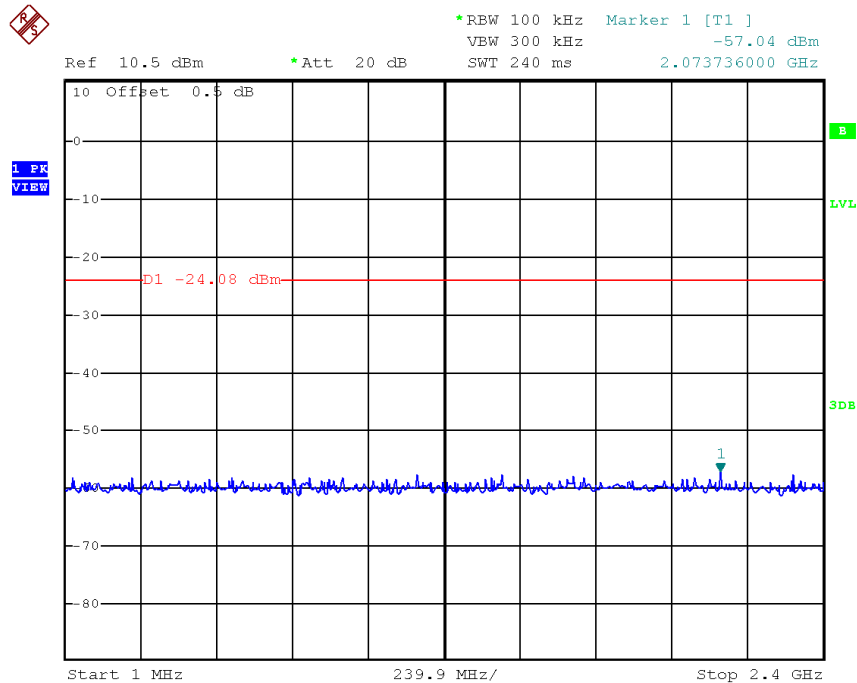

Date: 9.JUL.2021 15:32:24

#### Highest Channel, Plot B

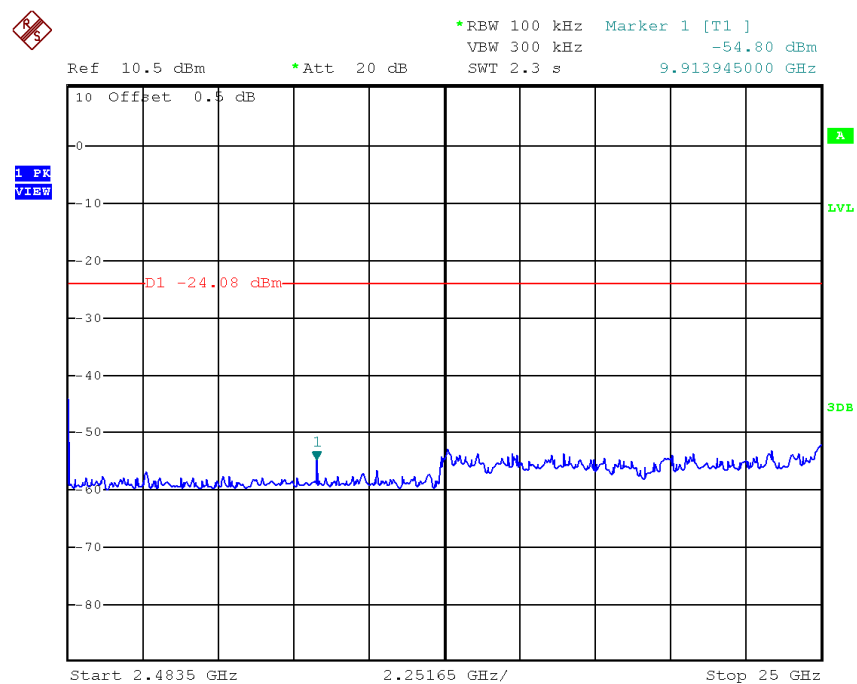

Date: 9.JUL.2021 15:29:01

## TEST REPORT

### 4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

#### Example

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB $\mu$ V/m. This value in dB $\mu$ V/m is converted to its corresponding level in  $\mu$ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0.0 \text{ dB}$$

$$AV = -10 \text{ dB}$$

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

## TEST REPORT

### 4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

#### 4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission  
at

2483.500 MHz

The worst-case radiated emission configuration photographs are saved with filename: config photos.pdf

#### 4.6.2 Radiated Emission Data

The data in tables 1-4 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 0.6 dB margin



## TEST REPORT

### RADIATED EMISSION DATA

Mode: TX-Channel 2405MHz (Zigbee)

Table 1

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Average (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|------------------------------|------------------------------|--------------|
| <b>H</b>     | <b>2390.000</b>  | <b>51.8</b>    | <b>33</b>         | <b>29.4</b>         | <b>48.2</b>                  | <b>54.0</b>                  | <b>-5.8</b>  |
| <b>H</b>     | <b>4810.000</b>  | <b>41.0</b>    | <b>33</b>         | <b>34.9</b>         | <b>42.9</b>                  | <b>54.0</b>                  | <b>-11.1</b> |
| <b>H</b>     | <b>12025.000</b> | <b>25.7</b>    | <b>33</b>         | <b>40.5</b>         | <b>33.2</b>                  | <b>54.0</b>                  | <b>-20.8</b> |

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| <b>H</b>     | <b>2390.000</b>  | <b>62.8</b>    | <b>33</b>         | <b>29.4</b>         | <b>59.2</b>               | <b>74.0</b>               | <b>-14.8</b> |
| <b>H</b>     | <b>4810.000</b>  | <b>49.3</b>    | <b>33</b>         | <b>34.9</b>         | <b>51.2</b>               | <b>74.0</b>               | <b>-22.8</b> |
| <b>H</b>     | <b>12025.000</b> | <b>32.3</b>    | <b>33</b>         | <b>40.5</b>         | <b>39.8</b>               | <b>74.0</b>               | <b>-34.2</b> |

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average measurement method is according to ANSI C63.10.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

## TEST REPORT

Mode: TX-Channel 2440MHz (Zigbee)

Table 2

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Average (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|------------------------------|------------------------------|--------------|
| <b>H</b>     | <b>4880.000</b>  | <b>42.6</b>    | <b>33</b>         | <b>34.9</b>         | <b>44.5</b>                  | <b>54.0</b>                  | <b>-9.5</b>  |
| <b>H</b>     | <b>7320.000</b>  | <b>28.9</b>    | <b>33</b>         | <b>37.9</b>         | <b>33.8</b>                  | <b>54.0</b>                  | <b>-20.2</b> |
| <b>H</b>     | <b>12200.000</b> | <b>32.7</b>    | <b>33</b>         | <b>40.5</b>         | <b>40.2</b>                  | <b>54.0</b>                  | <b>-13.8</b> |

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| <b>H</b>     | <b>4880.000</b>  | <b>50.8</b>    | <b>33</b>         | <b>34.9</b>         | <b>52.7</b>               | <b>74.0</b>               | <b>-21.3</b> |
| <b>H</b>     | <b>7320.000</b>  | <b>34.9</b>    | <b>33</b>         | <b>37.9</b>         | <b>39.8</b>               | <b>74.0</b>               | <b>-34.2</b> |
| <b>H</b>     | <b>12200.000</b> | <b>44.7</b>    | <b>33</b>         | <b>40.5</b>         | <b>52.2</b>               | <b>74.0</b>               | <b>-21.8</b> |

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average measurement method is according to ANSI C63.10.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

## TEST REPORT

Mode: TX-Channel 2480MHz (Zigbee)

Table 3

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Average (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|------------------------------|------------------------------|--------------|
| <b>H</b>     | <b>2483.500</b>  | <b>57.0</b>    | <b>33</b>         | <b>29.4</b>         | <b>53.4</b>                  | <b>54.0</b>                  | <b>-0.6</b>  |
| <b>H</b>     | <b>4960.000</b>  | <b>40.5</b>    | <b>33</b>         | <b>34.9</b>         | <b>42.4</b>                  | <b>54.0</b>                  | <b>-11.6</b> |
| <b>H</b>     | <b>7440.000</b>  | <b>24.5</b>    | <b>33</b>         | <b>37.9</b>         | <b>29.4</b>                  | <b>54.0</b>                  | <b>-24.6</b> |
| <b>H</b>     | <b>12400.000</b> | <b>35.7</b>    | <b>33</b>         | <b>40.5</b>         | <b>43.2</b>                  | <b>54.0</b>                  | <b>-10.8</b> |

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| <b>H</b>     | <b>2483.500</b>  | <b>71.3</b>    | <b>33</b>         | <b>29.4</b>         | <b>67.7</b>               | <b>74.0</b>               | <b>-6.3</b>  |
| <b>H</b>     | <b>4960.000</b>  | <b>48.7</b>    | <b>33</b>         | <b>34.9</b>         | <b>50.6</b>               | <b>74.0</b>               | <b>-23.4</b> |
| <b>H</b>     | <b>7440.000</b>  | <b>30.7</b>    | <b>33</b>         | <b>37.9</b>         | <b>35.6</b>               | <b>74.0</b>               | <b>-38.4</b> |
| <b>H</b>     | <b>12400.000</b> | <b>43.7</b>    | <b>33</b>         | <b>40.5</b>         | <b>51.2</b>               | <b>74.0</b>               | <b>-22.8</b> |

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average measurement method is according to ANSI C63.10.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

## TEST REPORT

Mode: 125kHz RFID Reader + Zigbee Operating

Table 4


| Polarization | Frequency (MHz) | Reading (dB $\mu$ V) | Pre-amp (dB) | Antenna Factor (dB) | Net at 3m (dB $\mu$ V/m) | Limit at 3m (dB $\mu$ V/m) | Margin (dB) |
|--------------|-----------------|----------------------|--------------|---------------------|--------------------------|----------------------------|-------------|
| V            | 56.078          | 30.8                 | 16           | 11.0                | 25.8                     | 40.0                       | -14.2       |
| V            | 71.802          | 33.2                 | 16           | 7.0                 | 24.2                     | 40.0                       | -15.8       |
| H            | 119.088         | 24.8                 | 16           | 14.0                | 22.8                     | 43.5                       | -20.7       |
| V            | 124.815         | 26.5                 | 16           | 14.0                | 24.5                     | 43.5                       | -19.0       |
| V            | 141.512         | 26.2                 | 16           | 14.0                | 24.2                     | 43.5                       | -19.3       |
| V            | 218.782         | 22.6                 | 16           | 17.0                | 23.6                     | 46.0                       | -22.4       |

- NOTES:
1. Quasi-Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters.
  3. Negative value in the margin column shows emission below limit.
  4. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.


## TEST REPORT

### 4.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

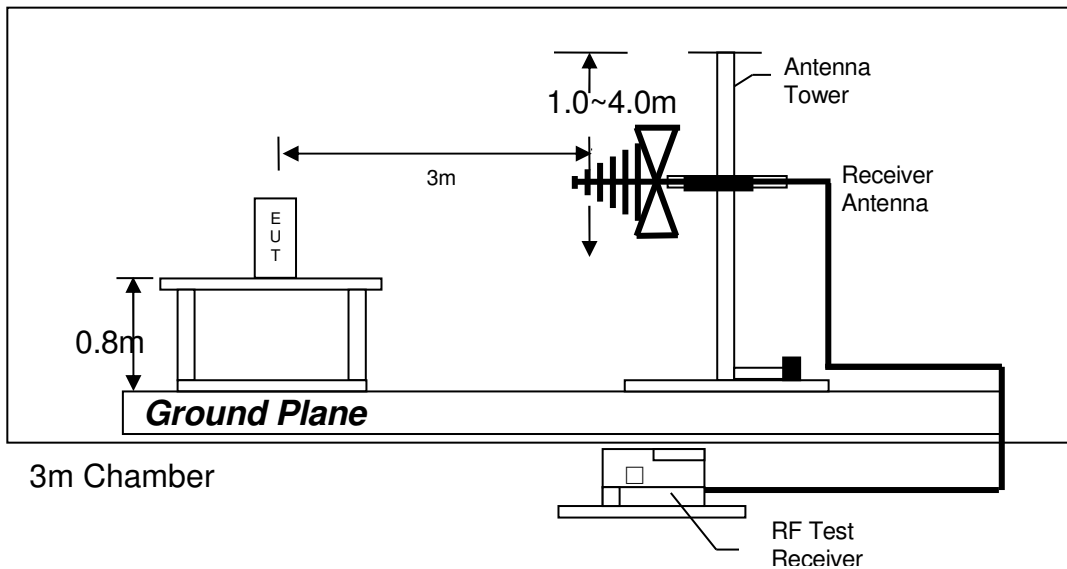

Test setup of radiated emissions up to 1GHz

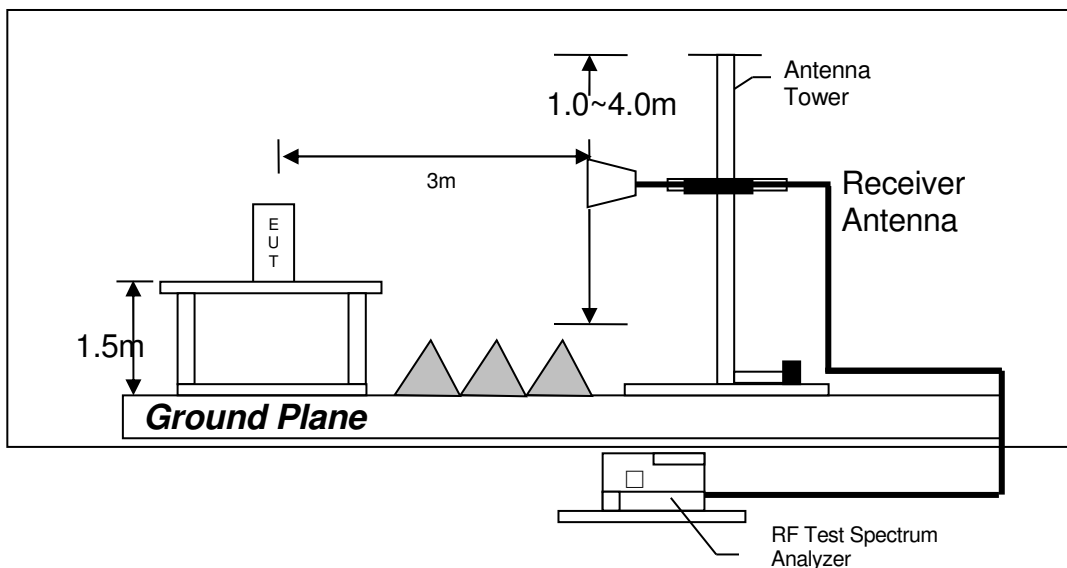

Test setup of radiated emissions above 1GHz

## TEST REPORT

### 4.6.4 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.

## TEST REPORT

### 4.7 AC Power Line Conducted Emission

- ☐ Not applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

#### 4.7.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration  
at

0.560 MHz

The worst-case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

#### 4.7.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 23.3 dB margin

## TEST REPORT

### AC POWER LINE CONDUCTED EMISSION

Worst Case: 125kHz RFID Reader + Zigbee Operating


| EDIT PEAK LIST (Final Measurement Results) |            |            |                |  |
|--------------------------------------------|------------|------------|----------------|--|
| Trace1:                                    | CF15MQP    |            |                |  |
| Trace2:                                    | CF15MAV    |            |                |  |
| Trace3:                                    | ---        |            |                |  |
| TRACE                                      | FREQUENCY  | LEVEL dBµV | DELTA LIMIT dB |  |
| 1 Quasi Peak                               | 370.5 kHz  | 24.83 L1   | -33.65         |  |
| 1 Quasi Peak                               | 559.5 kHz  | 30.71 L1   | -25.28         |  |
| 2 CISPR Average                            | 559.5 kHz  | 22.73 L1   | -23.26         |  |
| 1 Quasi Peak                               | 568.5 kHz  | 27.79 L1   | -28.20         |  |
| 2 CISPR Average                            | 568.5 kHz  | 19.72 L1   | -26.27         |  |
| 1 Quasi Peak                               | 883.5 kHz  | 25.01 L1   | -30.98         |  |
| 2 CISPR Average                            | 924 kHz    | 16.19 L1   | -29.81         |  |
| 1 Quasi Peak                               | 1.4145 MHz | 21.90 L1   | -34.09         |  |
| 1 Quasi Peak                               | 1.9995 MHz | 20.23 L1   | -35.76         |  |
| 1 Quasi Peak                               | 2.5125 MHz | 21.14 L1   | -34.85         |  |
| 1 Quasi Peak                               | 3.6285 MHz | 22.81 L1   | -33.18         |  |
| 1 Quasi Peak                               | 4.2495 MHz | 20.22 L1   | -35.77         |  |

Date: 13.JUL.2021 09:38:20



## TEST REPORT


Worst Case: 125kHz RFID Reader + Zigbee Operating

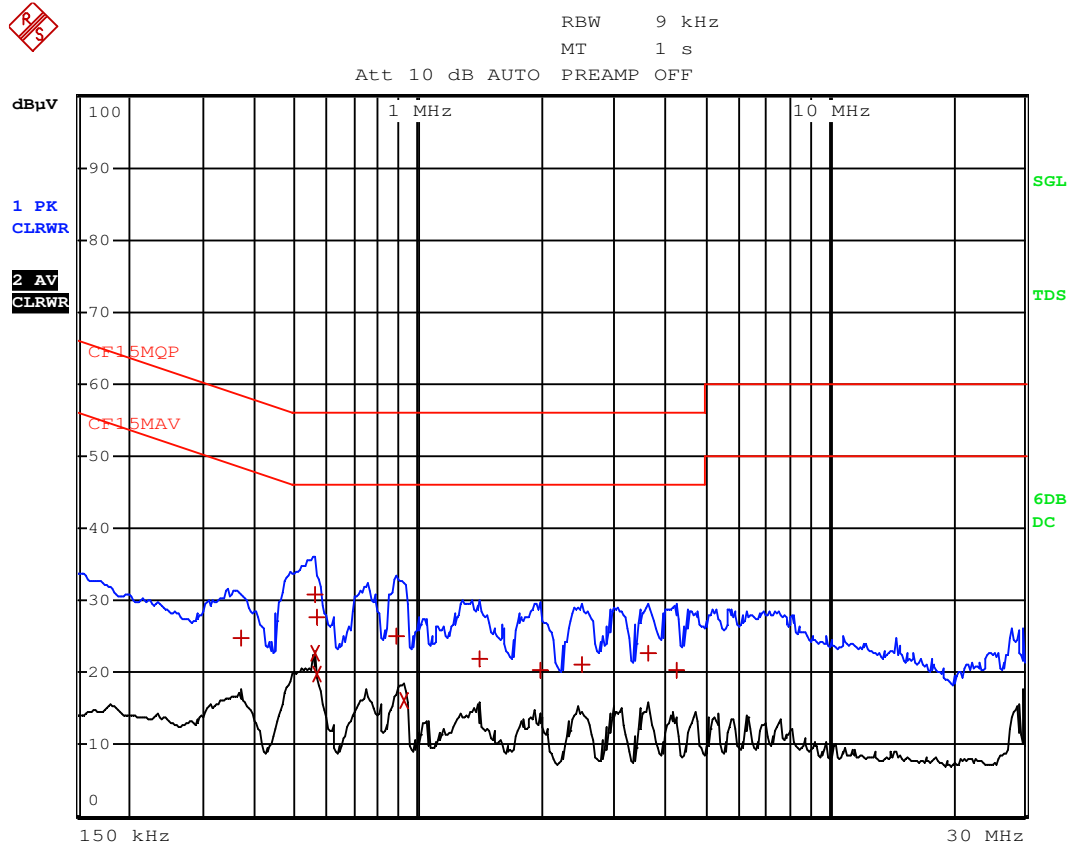

Date: 13.JUL.2021 09:38:52

## TEST REPORT

### 4.7.3 Conducted Emission Test Setup

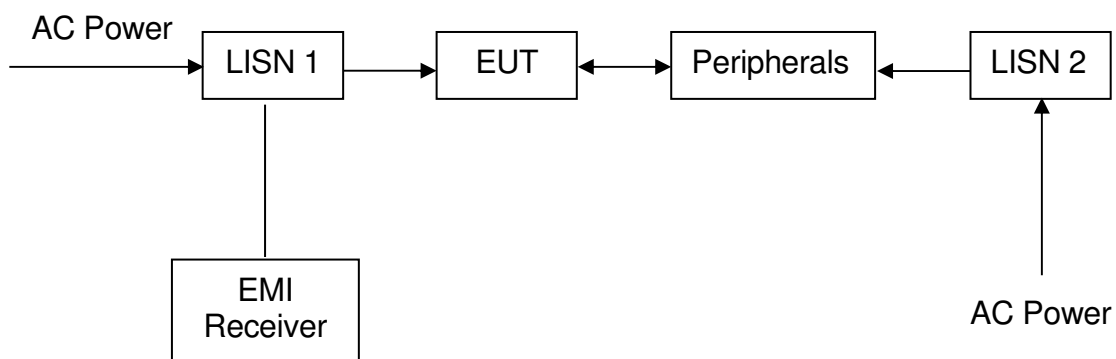

## TEST REPORT

### Occupied Bandwidth Results: (ZigBee)

(ZigBee) Occupied Bandwidth (MHz)

Low Channel: 2405MHz 2.27

Middle Channel: 2440MHz 2.32

High Channel: 2480MHz 2.37

The worst case is shown as below



## TEST REPORT

### EXHIBIT 5 EQUIPMENT LIST

#### 5.0 EQUIPMENT LIST

##### 1) Radiated Emissions Test

| Equipment            | EMI Test Receiver<br>(9kHz to 26.5GHz) | Spectrum Analyzer  | Biconical Antenna<br>(20MHz to 200MHz) |
|----------------------|----------------------------------------|--------------------|----------------------------------------|
| Registration No.     | EW-3156                                | EW-2466            | EW-2512                                |
| Manufacturer         | ROHDESCHWARZ                           | ROHDESCHWARZ       | EMCO                                   |
| Model No.            | ESR26                                  | FSP30              | 3104C                                  |
| Calibration Date     | January 25, 2021                       | September 05, 2020 | June 03, 2020                          |
| Calibration Due Date | January 25, 2022                       | September 05, 2021 | December 03, 2021                      |

| Equipment            | Log Periodic Antenna | Double Ridged Guide<br>Antenna | RF Cable 14m<br>(1GHz to 26.5GHz) |
|----------------------|----------------------|--------------------------------|-----------------------------------|
| Registration No.     | EW-0447              | EW-1133                        | EW-2781                           |
| Manufacturer         | EMCO                 | EMCO                           | GREATBILLION                      |
| Model No.            | 3146                 | 3115                           | SMA m/SHF5MPU<br>/SMA m ra14m,26G |
| Calibration Date     | September 25, 2019   | June 03, 2021                  | November 24, 2020                 |
| Calibration Due Date | September 25, 2021   | June 03, 2022                  | November 24, 2021                 |

| Equipment            | RF Preamplifier (9kHz<br>to 6000MHz) | Active Loop H-field<br>(9kHz to 30MHz) | 14m Double Shield RF<br>Cable (20MHz to 6GHz) |
|----------------------|--------------------------------------|----------------------------------------|-----------------------------------------------|
| Registration No.     | EW-3006b                             | EW-2313                                | EW-2074                                       |
| Manufacturer         | SCHWARZBECK                          | ELECTROMETRI                           | RADIALL                                       |
| Model No.            | BBV9718                              | EM-6876                                | N(m)-RG142-BNC(m)<br>L=14M                    |
| Calibration Date     | November 25, 2019                    | December 17, 2019                      | August 29, 2020                               |
| Calibration Due Date | September 25, 2021                   | September 17, 2021                     | August 29, 2021                               |

## TEST REPORT

### 2) Conductive Measurement Test

| Equipment            | 5m RF Cable (40GHz) | RF Power Meter with Power Sensor (N1921A) | Spectrum Analyzer  |
|----------------------|---------------------|-------------------------------------------|--------------------|
| Registration No.     | EW-2701             | EW-2270                                   | EW-2466            |
| Manufacturer         | RADIAL              | N/A                                       | ROHDESCHWARZ       |
| Model No.            | sma m-m 5m 40G      | AGILENTTECH                               | FSP30              |
| Calibration Date     | November 24, 2020   | September 03, 2020                        | September 05, 2020 |
| Calibration Due Date | November 24, 2021   | September 03, 2021                        | September 05, 2021 |

### 3) Bandedge/Bandwidth Measurement

| Equipment            | 5m RF Cable (40GHz) | Spectrum Analyzer  |
|----------------------|---------------------|--------------------|
| Registration No.     | EW-2701             | EW-2466            |
| Manufacturer         | RADIAL              | ROHDESCHWARZ       |
| Model No.            | sma m-m 5m 40G      | FSP30              |
| Calibration Date     | November 24, 2020   | September 05, 2020 |
| Calibration Due Date | November 24, 2021   | September 05, 2021 |

## TEST REPORT

### 4) Conducted Emissions Test

| Equipment            | RF Cable 240cm<br>(RG142) (9kHz to<br>30MHz) | Artificial Mains<br>Network | EMI Test Receiver |
|----------------------|----------------------------------------------|-----------------------------|-------------------|
| Registration No.     | EW-2454                                      | EW-2501                     | EW-2500           |
| Manufacturer         | RADIALL                                      | ROHDESCHWARZ                | ROHDESCHWARZ      |
| Model No.            | Bnc m st / 142 / bnc<br>mra 240cm            | ENV-216                     | ESCI              |
| Calibration Date     | November 10, 2020                            | September 11, 2020          | March 29, 2021    |
| Calibration Due Date | November 10, 2021                            | September 11, 2021          | March 29, 2022    |

- End of Report -