

TEST REPORT

Product : Smart Sleep Light
Trade mark : N/A
Model/Type reference : TEW201
Serial Number : N/A
Report Number : EED32K00287202
FCC ID : 2ADIOTEW201
Date of Issue : Nov. 09, 2018
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

Shenzhen Medica Technology Development Co., Ltd.
2F Building A, Tongfang Information Harbor, No.11, East Langshan Road,
Nanshan District, Shenzhen, P.R. China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested by:

Tom chen
Tom chen (Test Project)

Compiled by:

Max liang
Max liang (Project Engineer)

Reviewed by:

Kevin Yang
Kevin yang (Reviewer)

Approved by:

Sheek Luo
Sheek Luo (Lab supervisor)

Date:

Nov. 09, 2018

Check No.:3096353610



2 Version

Version No.	Date	Description
00	Nov. 09, 2018	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
6.4 DESCRIPTION OF SUPPORT UNITS	8
6.5 TEST LOCATION	8
6.6 DEVIATION FROM STANDARDS	8
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	8
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	12
Appendix A): 20dB Occupied Bandwidth	13
Appendix B): Carrier Frequency Separation	17
Appendix C): Dwell Time	21
Appendix D): Hopping Channel Number	25
Appendix E): Conducted Peak Output Power	27
Appendix F): Band-edge for RF Conducted Emissions	31
Appendix G): RF Conducted Spurious Emissions	36
Appendix H): Pseudorandom Frequency Hopping Sequence	45
Appendix I): Antenna Requirement	46
Appendix J): AC Power Line Conducted Emission	47
Appendix K): Restricted bands around fundamental frequency (Radiated)	50
Appendix L): Radiated Spurious Emissions	64
PHOTOGRAPHS OF TEST SETUP	72
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	74

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

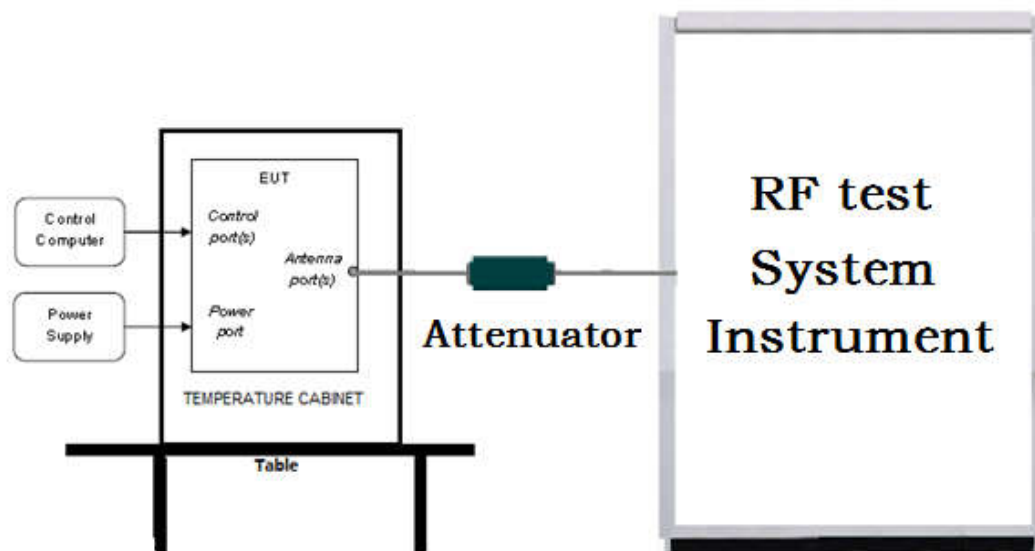

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

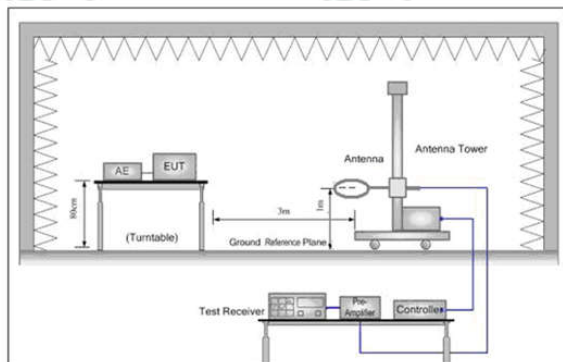


Figure 1. Below 30MHz

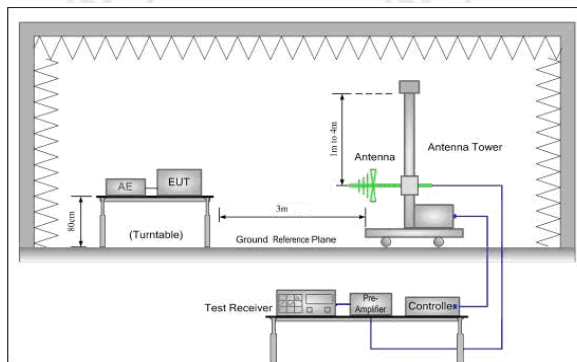


Figure 2. 30MHz to 1GHz


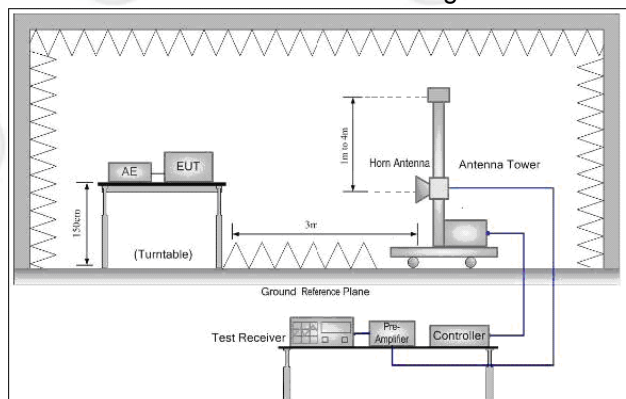


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

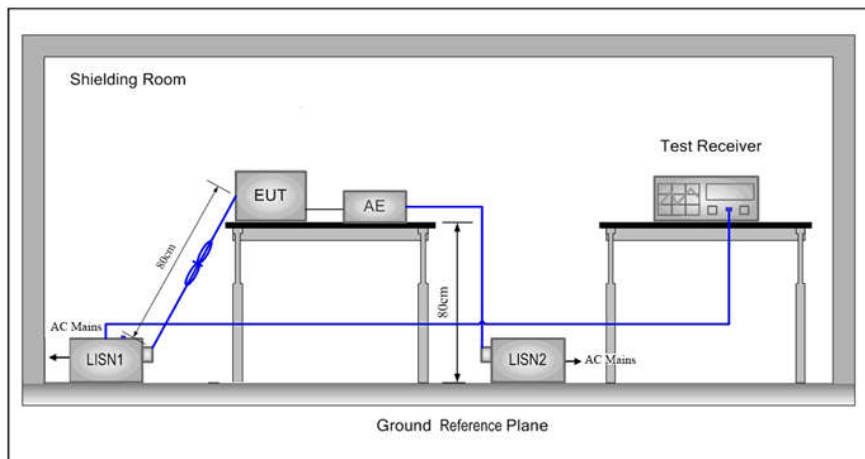

5.2 Test Environment

Operating Environment:

Temperature:	22°C
Humidity:	58% RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ π /4DQPSK/ 8DPSK(DH1,DH3, DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz

TX mode: The EUT transmitted the continuous signal at the specific channel(s).

Test mode:

Pre-scan under all rate at Lowest channel 1

Mode	GFSK		
packets	1-DH1	1-DH3	1-DH5
Power(dBm)	0.041	0.057	0.078

Mode	π /4DQPSK		
packets	2-DH1	2-DH3	2-DH5
Power(dBm)	1.206	1.314	1.355

Mode	8DPSK		
packets	3-DH1	3-DH3	3-DH5
Power(dBm)	1.548	1.671	1.773

Through Pre-scan, 1-DH5 packet the power is the worst case of GFSK, 2-DH5 packet the power is the worst case of π /4DQPSK, 3-DH5 packet the power is the worst case of 8DPSK.

6 General Information

6.1 Client Information

Applicant:	Shenzhen Medica Technology Development Co., Ltd.
Address of Applicant:	2F Building A, Tongfang Information Harbor, No.11, East Langshan Road, Nanshan District, Shenzhen, P.R. China
Manufacturer:	Shenzhen Medica Technology Development Co., Ltd.
Address of Manufacturer:	2F Building A, Tongfang Information Harbor, No.11, East Langshan Road, Nanshan District, Shenzhen, P.R. China
Factory:	E-safe Technology Limited
Address of Factory:	Room 210, Block B, Baoyuan huafeng Economic Building, Xixiang Avenue, Bao'an District, Shenzhen, Guangdong, China

6.2 General Description of EUT

Product Name:	Smart Sleep Light
Model No.(EUT):	TEW201
Trade mark:	N/A
EUT Supports Radios application:	BT: 4.0 BT Dual mode, 2402MHz to 2480MHz WiFi: IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
Power Supply:	Model: NLB100120W1A5S95 Input: 100-240V~50/60Hz, 0.35A Max Output: 12V --- 1A
Sample Received Date:	Oct. 25, 2018
Sample tested Date:	Oct. 25, 2018 to Nov. 09, 2018

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz						
Bluetooth Version:	3.0						
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)						
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK						
Number of Channel:	79						
Hopping Channel Type:	Adaptive Frequency Hopping systems						
Firmware version:	V0.51(manufacturer declare)						
Hardware version:	V1.0(manufacturer declare)						
Antenna Type:	PCB Antenna						
Antenna Gain:	4dBi						
Test Voltage:	AC 120V, 60Hz						
Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz

7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

CNAS-Lab Code: L1910

A2LA-Lab Cert. No. 3061.01

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-13-2018	03-12-2019
Signal Generator	Keysight	N5182B	MY53051549	03-13-2018	03-12-2019
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398-002	---	01-10-2018	01-09-2019
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-10-2018	01-09-2019
DC Power	Keysight	E3642A	MY54426035	03-13-2018	03-12-2019
PC-1	Lenovo	R4960d	---	03-13-2018	03-12-2019
BT&WI-FI Automatic control	R&S	OSP120	101374	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-2	15860006	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-1	15860004	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-4	158060007	03-13-2018	03-12-2019
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	03-13-2018	03-12-2019

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-25-2018	05-24-2019
Temperature/ Humidity Indicator	Defu	TH128	/	07-02-2018	07-01-2019
Communication test set	Agilent	E5515C	GB47050 534	03-16-2018	03-15-2019
Communication test set	R&S	CMW500	152394	03-16-2018	03-15-2019
LISN	R&S	ENV216	100098	05-10-2018	05-10-2019
LISN	schwarzbeck	NNLK8121	8121-529	05-10-2018	05-10-2019
Voltage Probe	R&S	ESH2-Z3 0299.7810.5 6	100042	06-13-2017	06-11-2020
Current Probe	R&S	EZ-17 816.2063.03	100106	05-30-2018	05-29-2019
ISN	TESEQ	ISN T800	30297	02-06-2018	02-05-2019

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-04-2016	06-03-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-401	04-26-2018	04-25-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-30-2018	07-29-2019
Microwave Preamplifier	Agilent	8449B	3008A02425	08-21-2018	08-20-2019
Microwave Preamplifier	Tonscend	EMC051845 SE	980380	01-19-2018	01-18-2019
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1869	04-25-2018	04-23-2021
Double ridge horn antenna	A.H.SYSTEM S	SAS-574	6042	06-05-2018	06-04-2021
Pre-amplifier	A.H.SYSTEM S	PAP-1840-60	6041	06-05-2018	06-04-2021
Loop Antenna	ETS	6502	00071730	06-22-2017	06-21-2019
Spectrum Analyzer	R&S	FSP40	100416	05-11-2018	05-10-2019
Receiver	R&S	ESCI	100435	05-25-2018	05-24-2019
Multi device Controller	maturo	NCD/070/10711112	---	01-10-2018	01-09-2019
LISN	schwarzbeck	NNBM8125	81251547	05-11-2018	05-10-2019
LISN	schwarzbeck	NNBM8125	81251548	05-11-2018	05-10-2019
Signal Generator	Agilent	E4438C	MY45095744	03-13-2018	03-12-2019
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Temperature/Humidity Indicator	TAYLOR	1451	1905	05-02-2018	05-01-2019
Communication test set	Agilent	E5515C	GB47050534	03-16-2018	03-15-2019
Cable line	Fulai(7M)	SF106	5219/6A	01-10-2018	01-09-2019
Cable line	Fulai(6M)	SF106	5220/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5216/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5217/6A	01-10-2018	01-09-2019
Communication test set	R&S	CMW500	104466	02-05-2018	02-04-2019
High-pass filter	Sinoscite	FL3CX03WG18NM12-0398-002	---	01-10-2018	01-09-2019
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA09CL12-0395-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA08CL12-0393-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA04CL12-0396-002	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA03CL12-0394-001	---	01-10-2018	01-09-2019

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)




Appendix A): 20dB Occupied Bandwidth




Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	1.024	0.91545	PASS
GFSK	MCH	0.9865	0.91486	PASS
GFSK	HCH	0.9869	0.91449	PASS
$\pi/4$ DQPSK	LCH	1.288	1.1791	PASS
$\pi/4$ DQPSK	MCH	1.291	1.1787	PASS
$\pi/4$ DQPSK	HCH	1.280	1.1771	PASS
8DPSK	LCH	1.290	1.1734	PASS
8DPSK	MCH	1.291	1.1747	PASS
8DPSK	HCH	1.288	1.1719	PASS

Test Graph

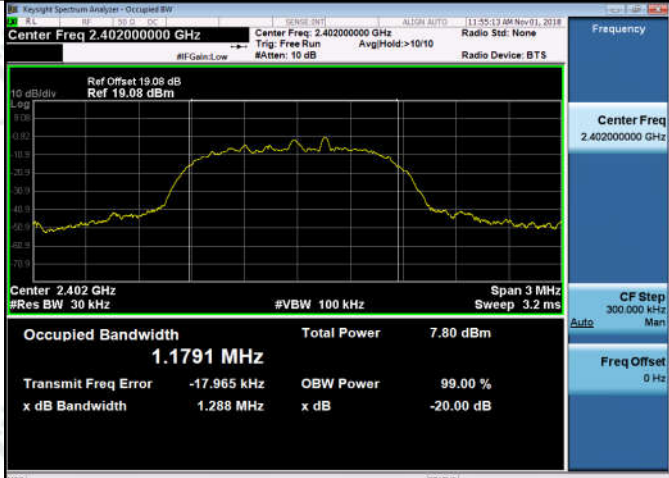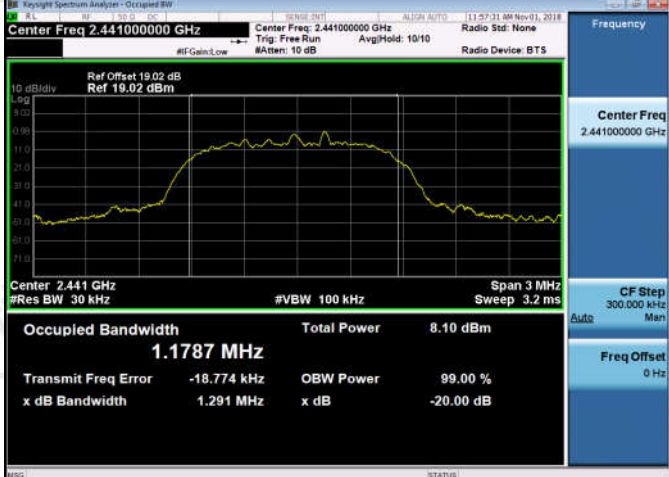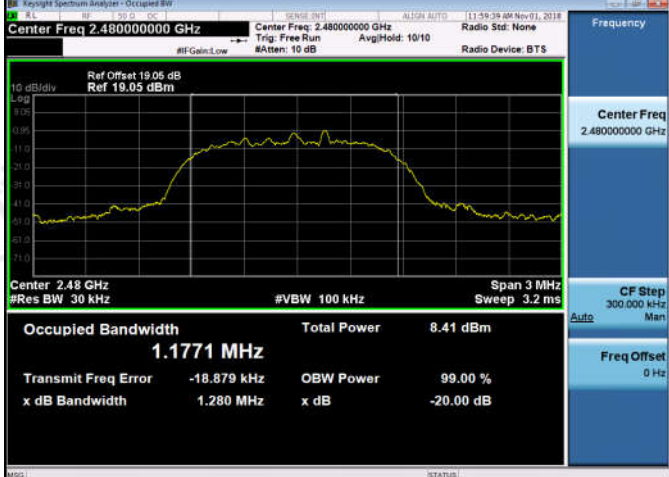

$\pi/4$DQPSK/LCH	
$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	

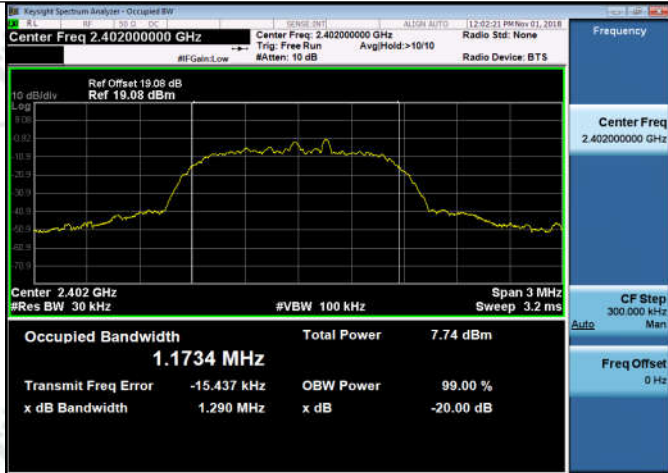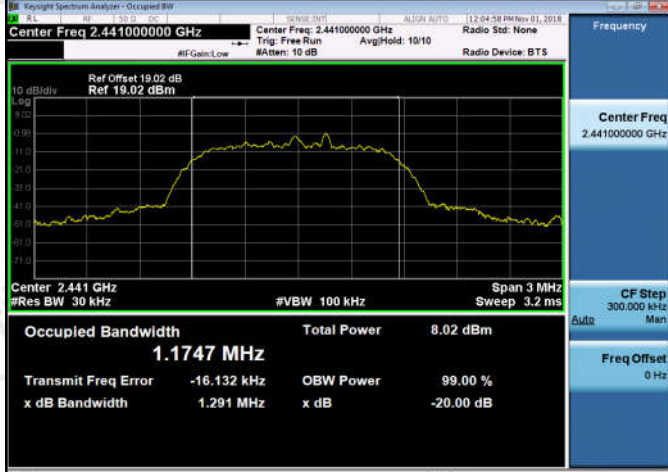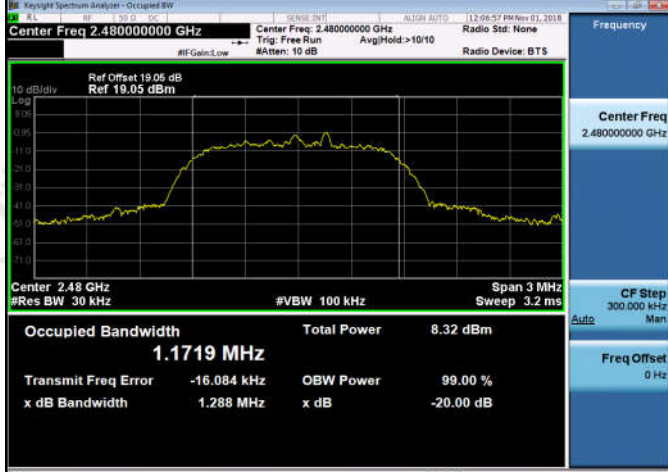8DPSK/LCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Ref Offset 19.08 dB Ref 19.08 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1734 MHz Total Power 7.74 dBm Transmit Freq Error -15.437 kHz OBW Power 99.00 % x dB Bandwidth 1.290 MHz x dB -20.00 dB
8DPSK/MCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Ref Offset 19.02 dB Ref 19.02 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1747 MHz Total Power 8.02 dBm Transmit Freq Error -16.132 kHz OBW Power 99.00 % x dB Bandwidth 1.291 MHz x dB -20.00 dB
8DPSK/HCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Ref Offset 19.05 dB Ref 19.05 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1719 MHz Total Power 8.32 dBm Transmit Freq Error -16.084 kHz OBW Power 99.00 % x dB Bandwidth 1.288 MHz x dB -20.00 dB


Appendix B): Carrier Frequency Separation


Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	0.924	PASS
GFSK	MCH	1.086	PASS
GFSK	HCH	1.086	PASS
$\pi/4$ DQPSK	LCH	1.214	PASS
$\pi/4$ DQPSK	MCH	1.128	PASS
$\pi/4$ DQPSK	HCH	1.102	PASS
8DPSK	LCH	1.014	PASS
8DPSK	MCH	1.138	PASS
8DPSK	HCH	0.922	PASS

Test Graph



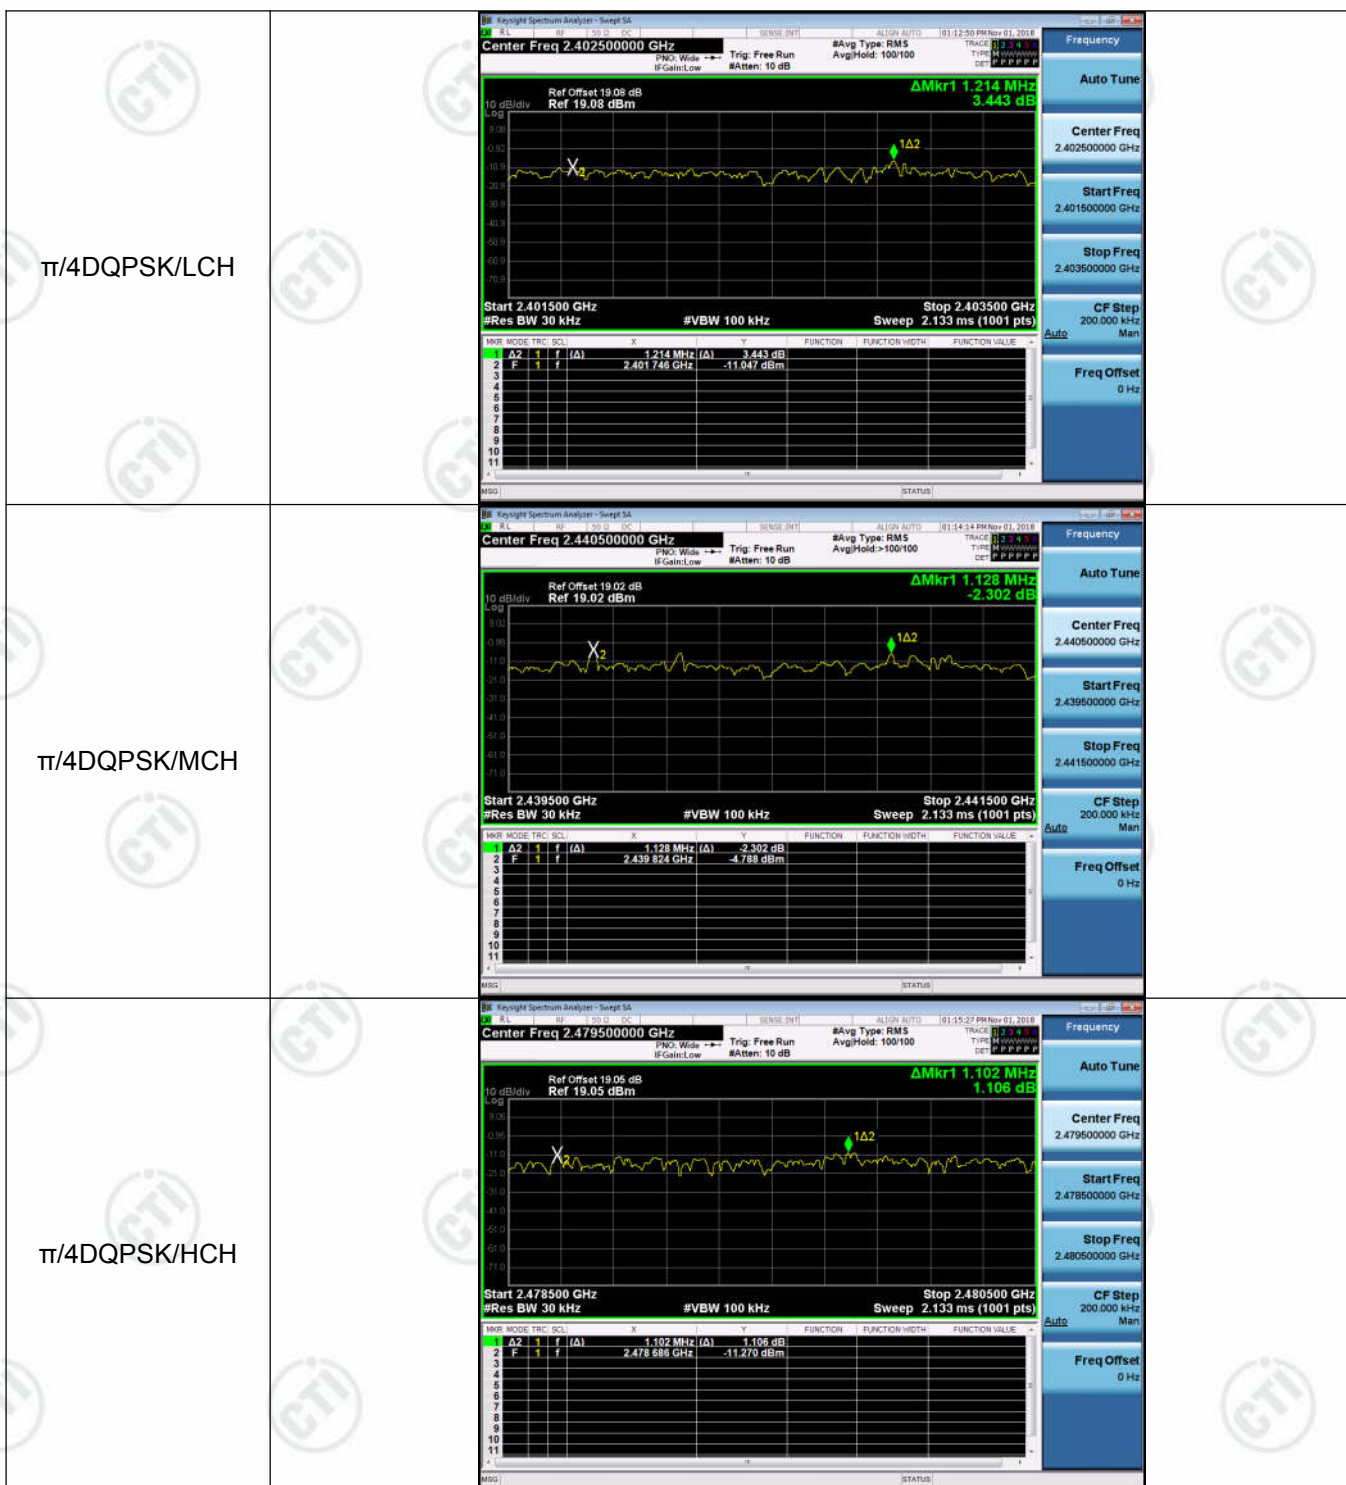

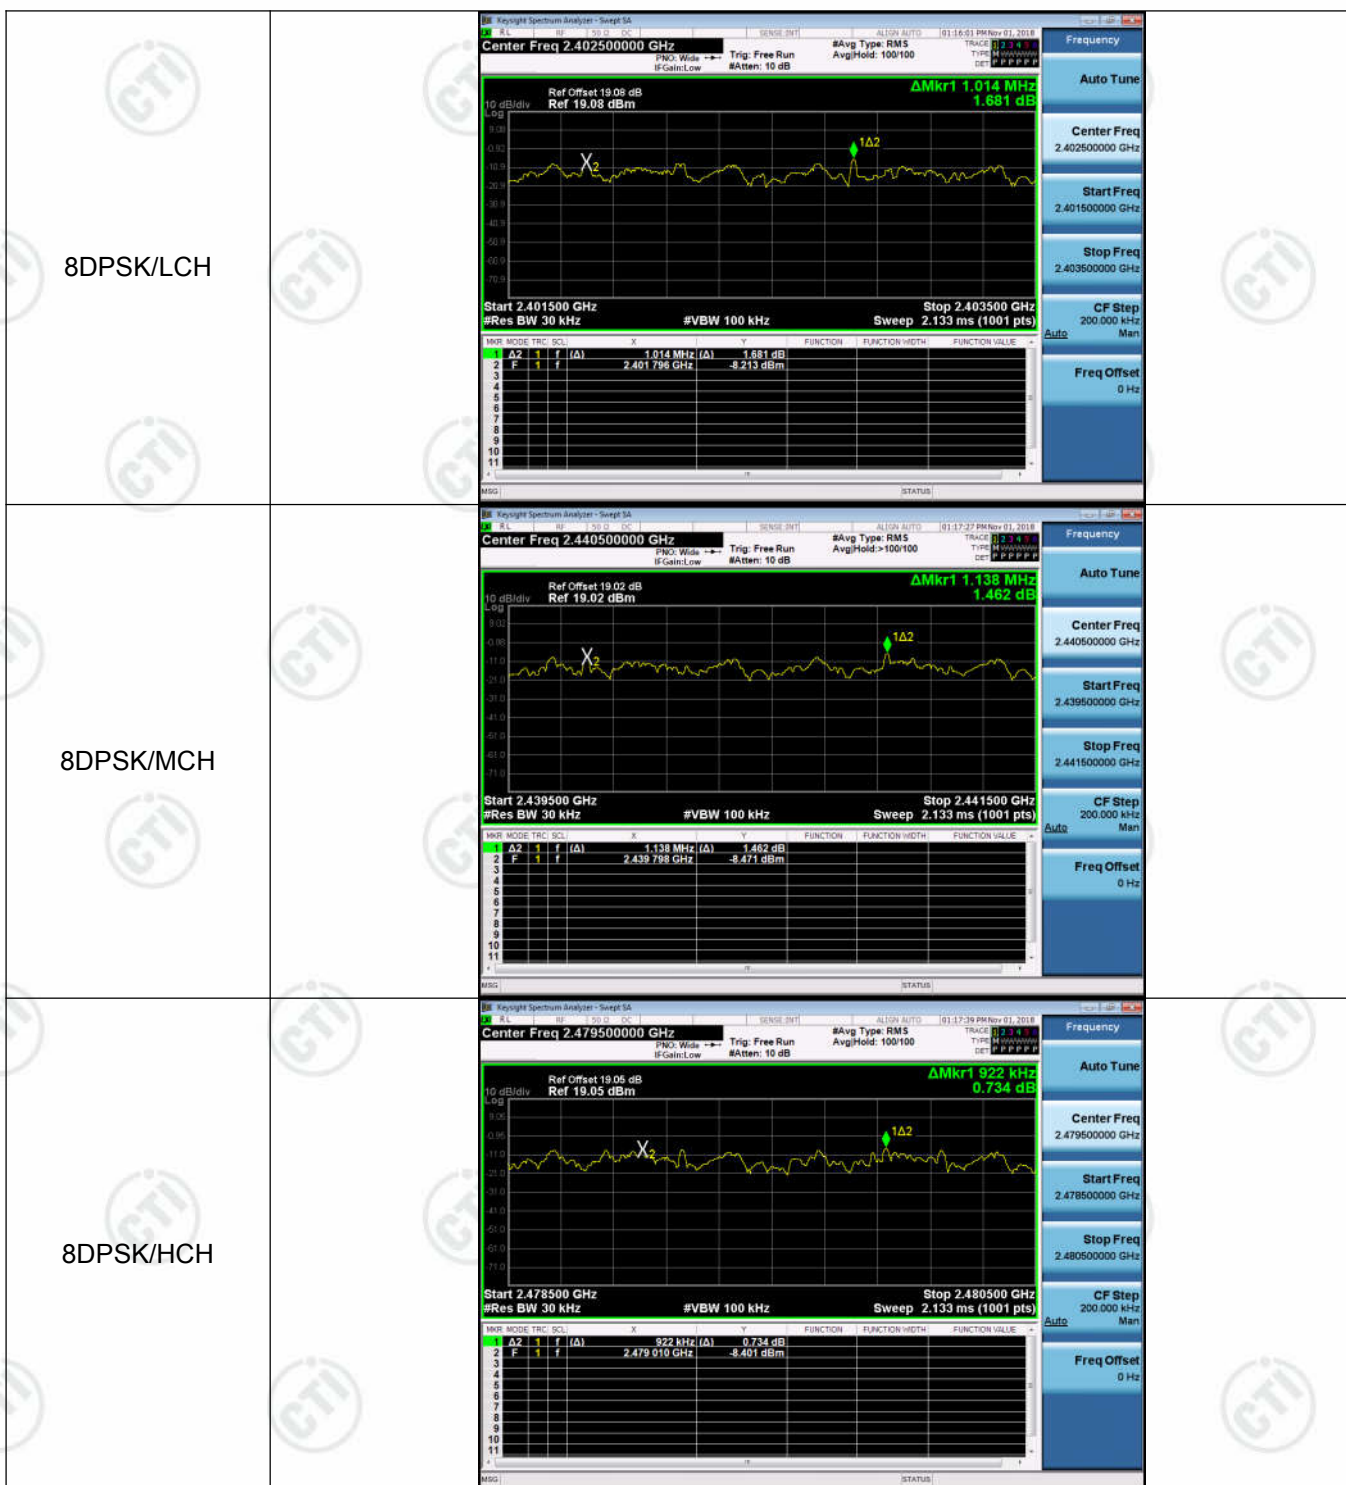


Appendix C): Dwell Time


Result Table


Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.363534	320	0.116	0.64	PASS
GFSK	DH1	MCH	0.363534	320	0.116	0.64	PASS
GFSK	DH1	HCH	0.363533	320	0.116	0.64	PASS
GFSK	DH3	LCH	1.62007	160	0.259	0.89	PASS
GFSK	DH3	MCH	1.62006	160	0.259	0.89	PASS
GFSK	DH3	HCH	1.62007	160	0.259	0.89	PASS
GFSK	DH5	LCH	2.852	106.7	0.304	0.93	PASS
GFSK	DH5	MCH	2.852	106.7	0.304	0.93	PASS
GFSK	DH5	HCH	2.852	106.7	0.304	0.93	PASS

Remark : All modes are tested, only the worst mode GFSK is reported.

Test Graph

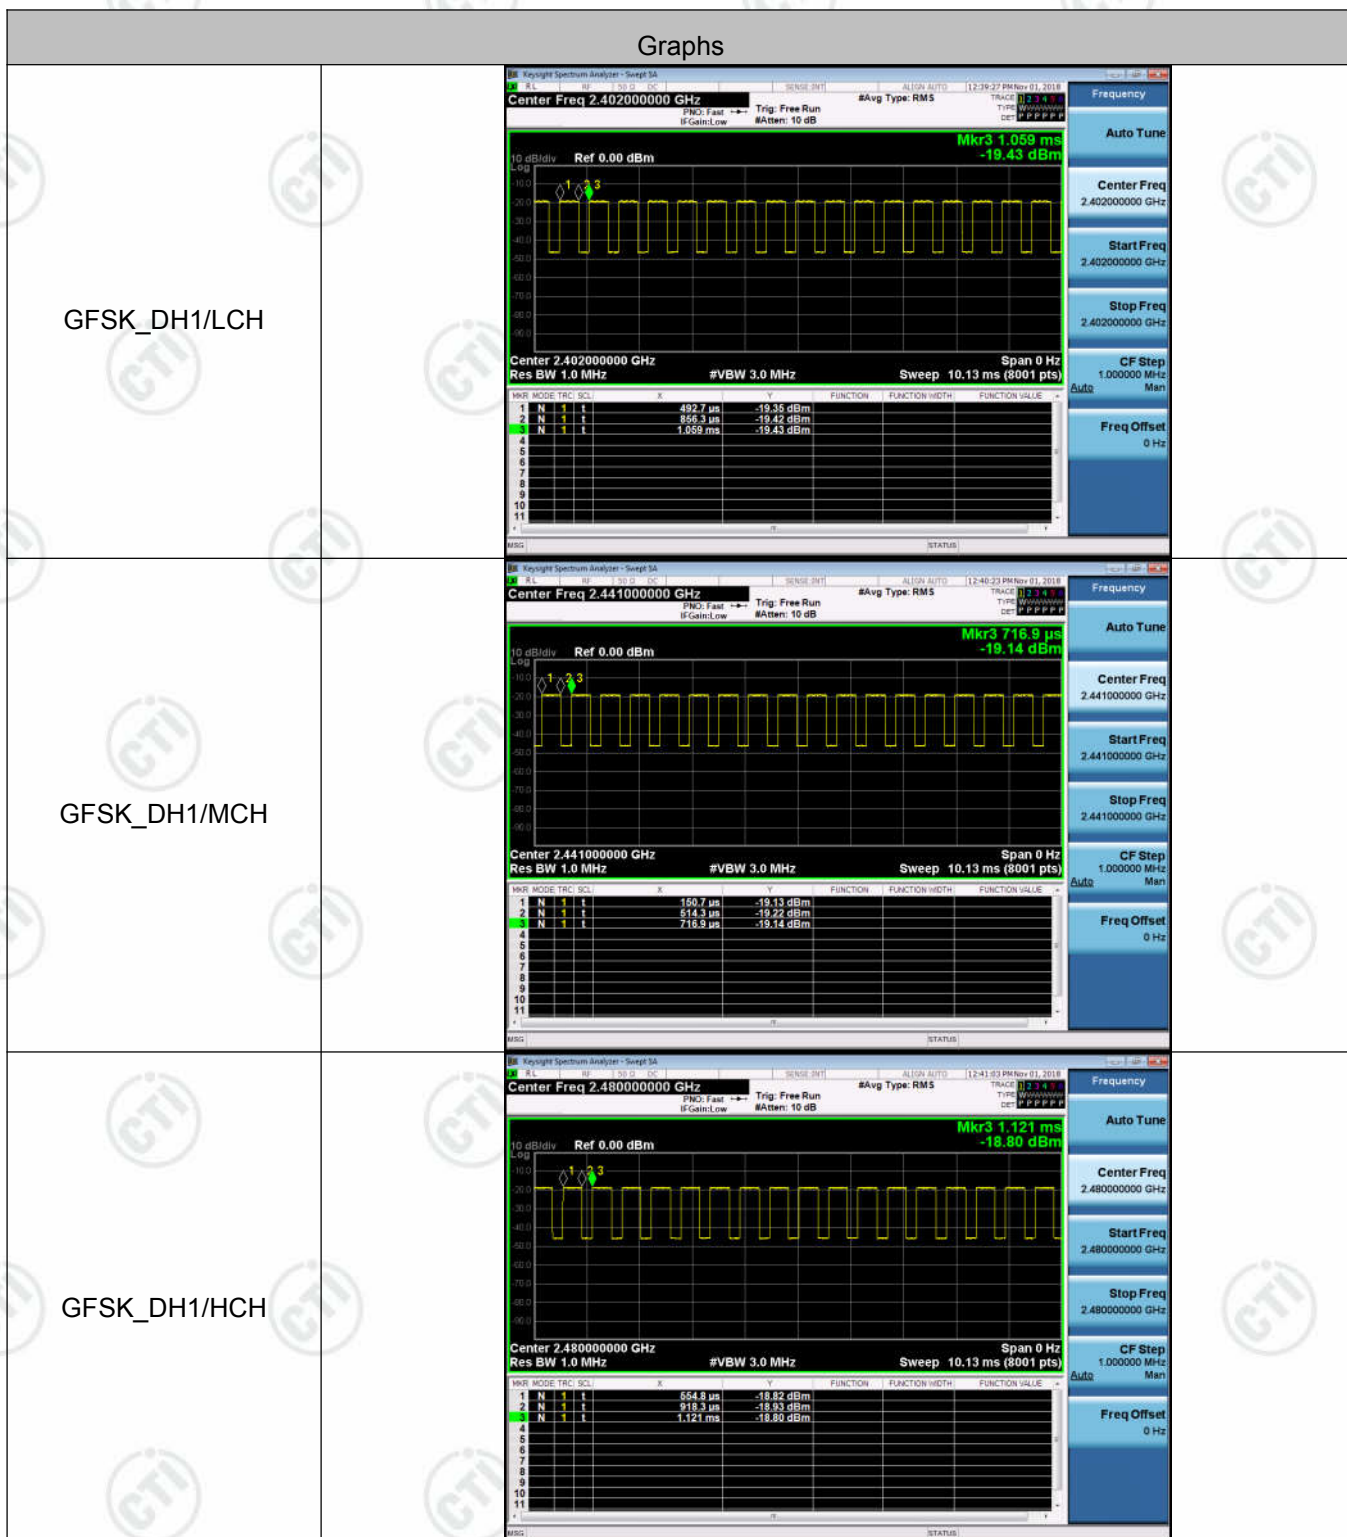

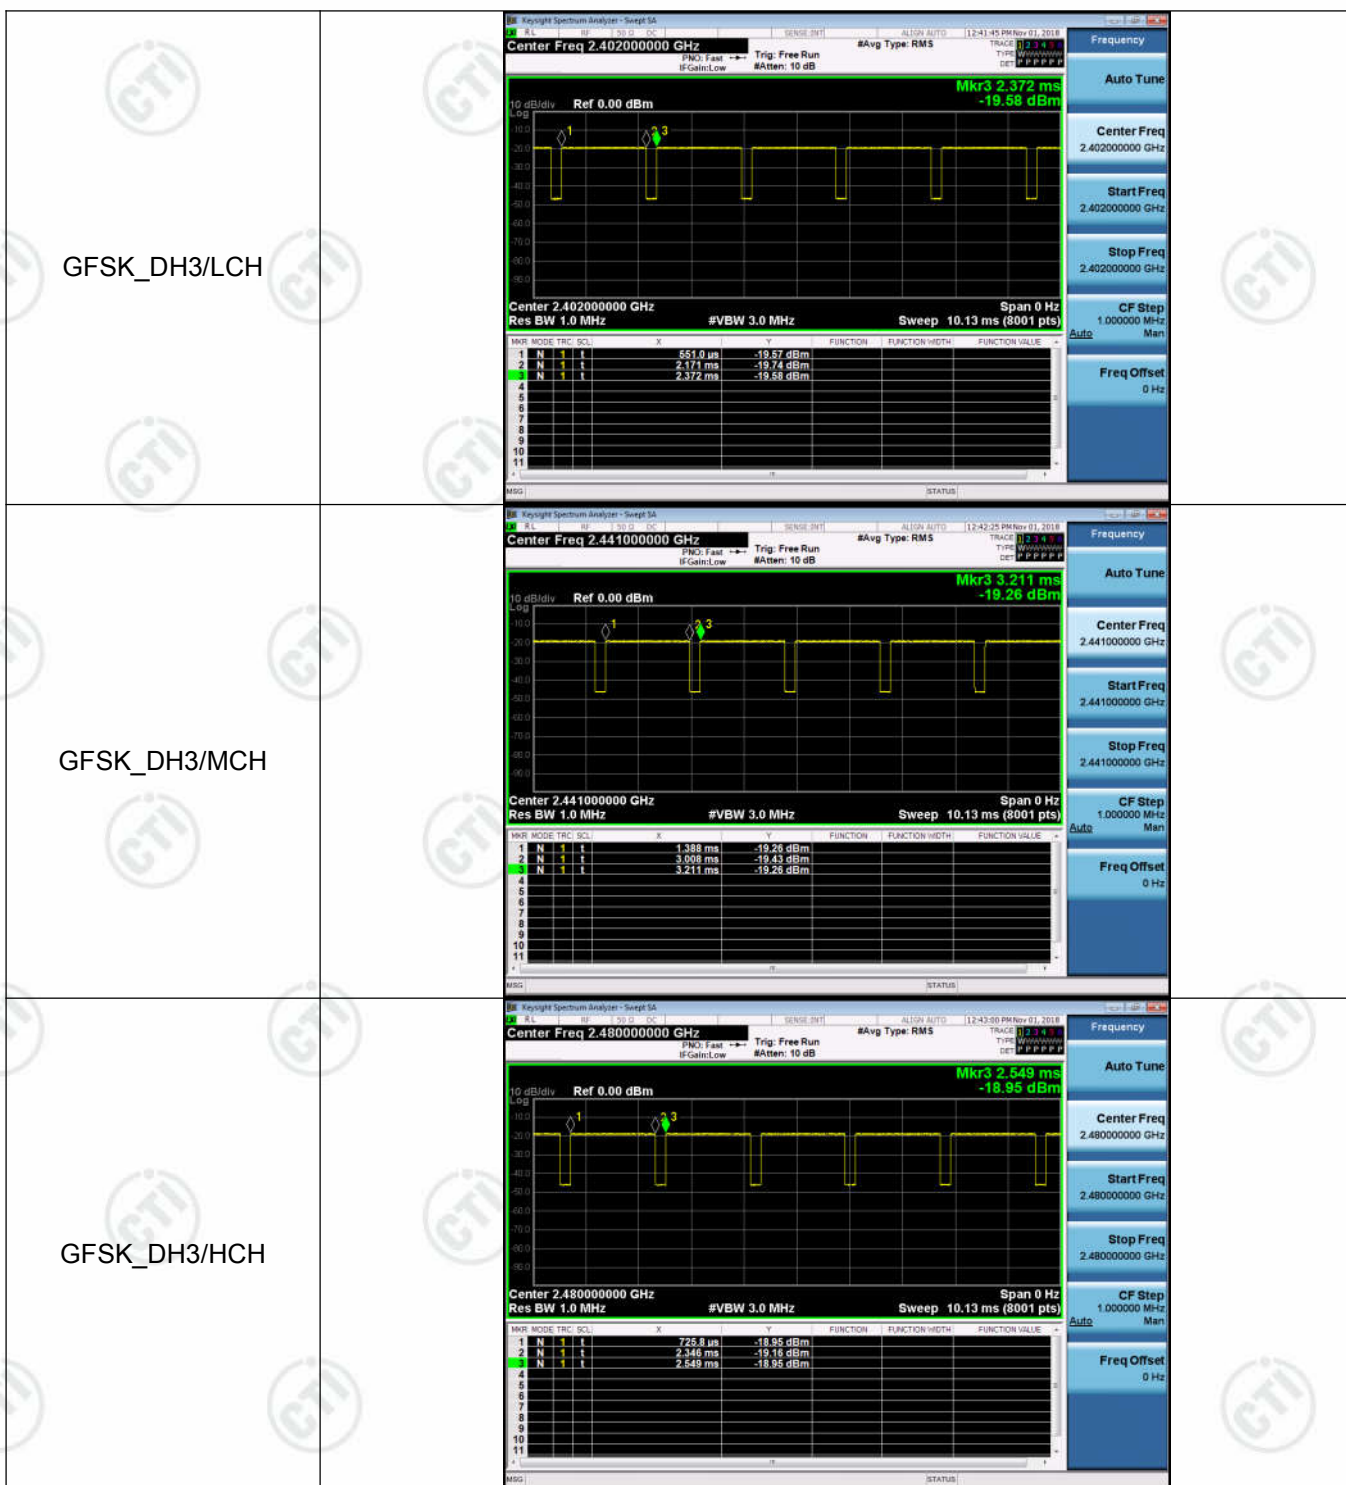

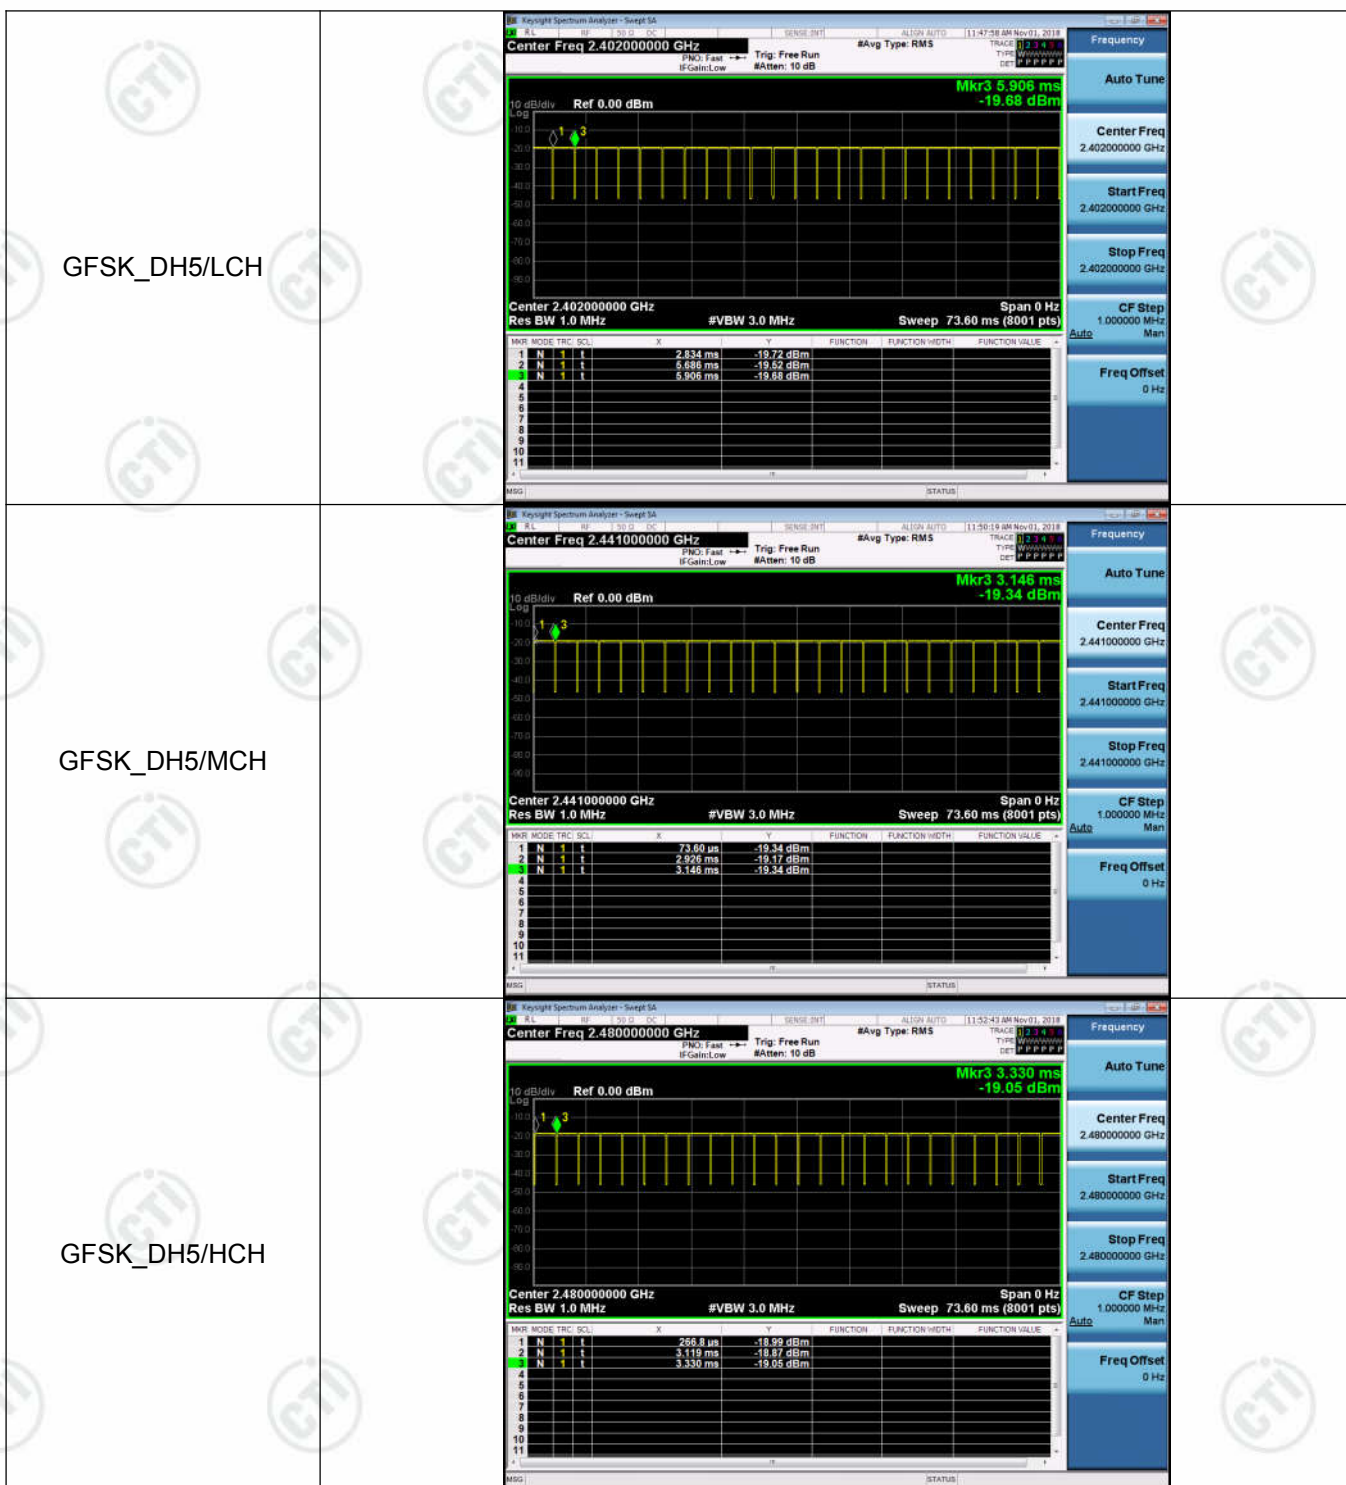


Appendix D): Hopping Channel Number

Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

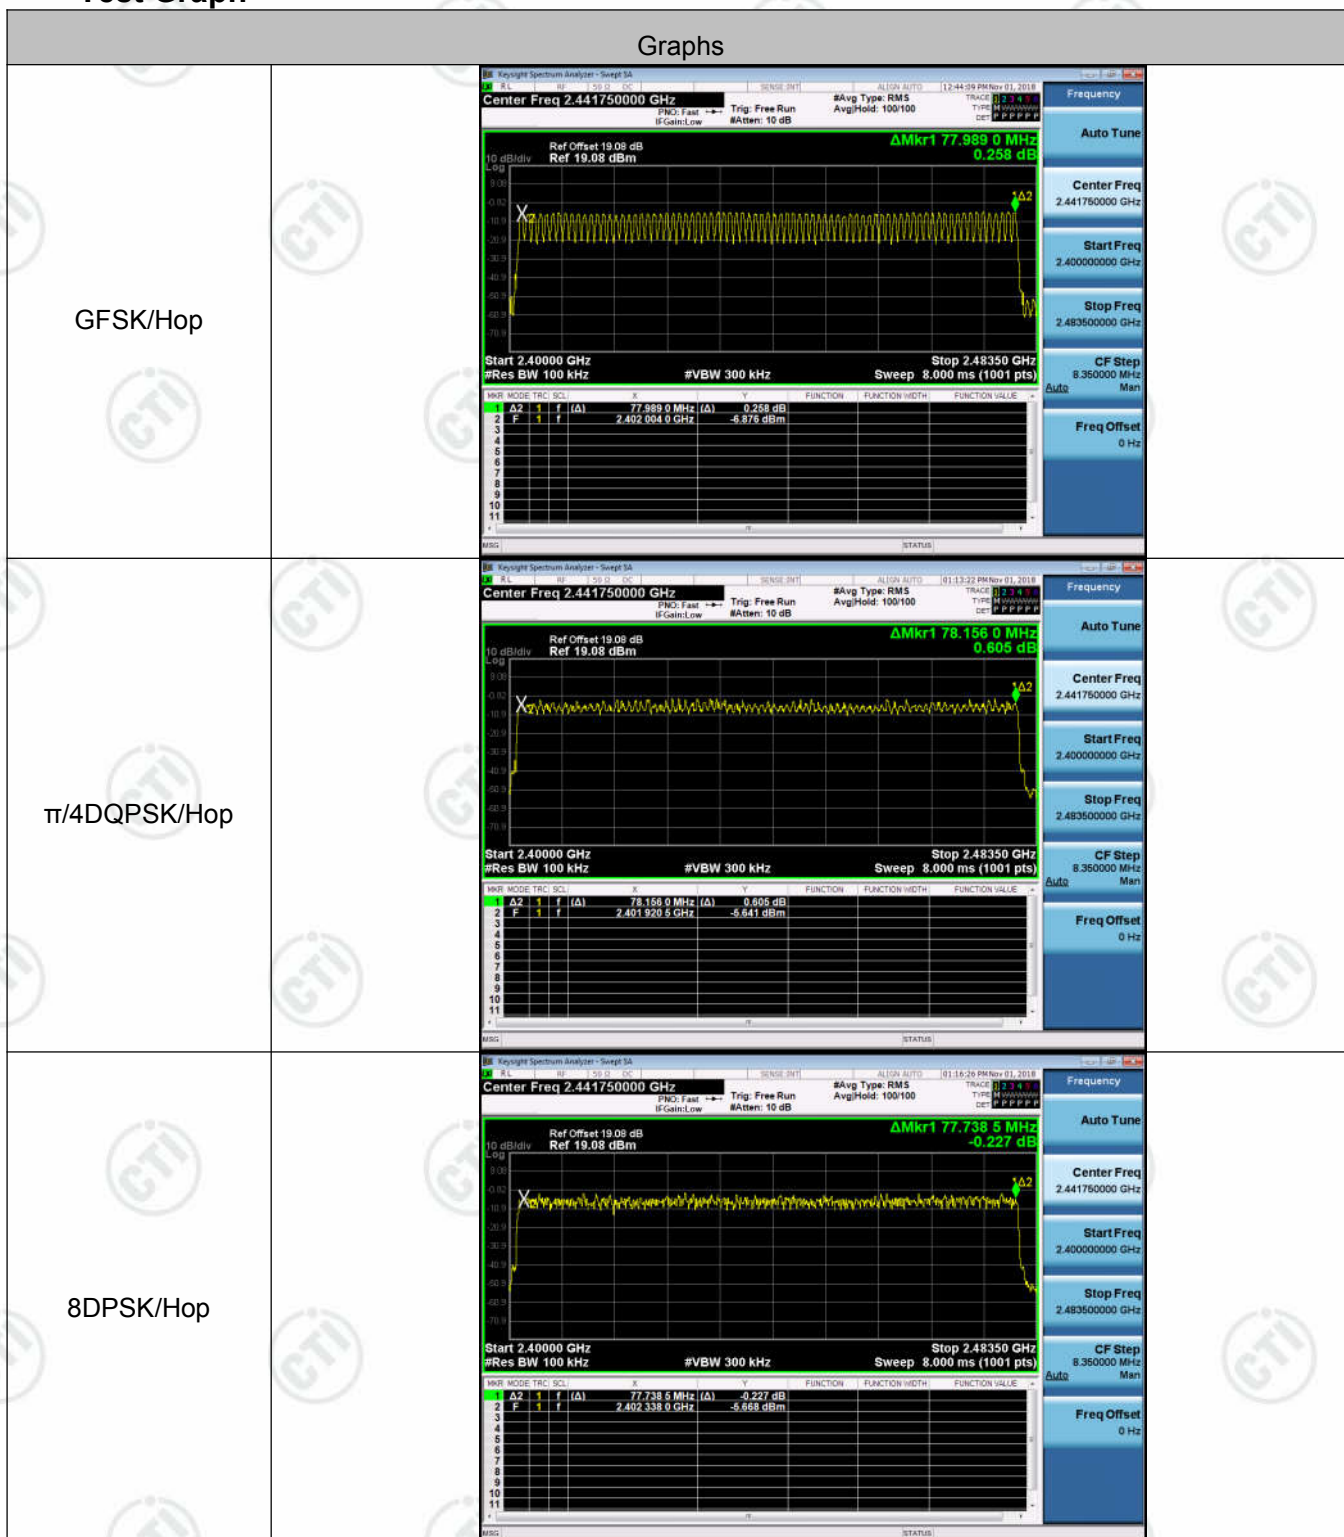

Appendix E): Conducted Peak Output Power

Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	0.078	PASS
GFSK	MCH	0.177	PASS
GFSK	HCH	0.557	PASS
$\pi/4$ DQPSK	LCH	1.355	PASS
$\pi/4$ DQPSK	MCH	1.532	PASS
$\pi/4$ DQPSK	HCH	1.927	PASS
8DPSK	LCH	1.773	PASS
8DPSK	MCH	1.976	PASS
8DPSK	HCH	2.333	PASS

Test Graph

