



## System Performance Check Data(5200MHz Body)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2020-03-30

### Experimental conditions.


|                       |                  |
|-----------------------|------------------|
| Device Position       | Validation plane |
| Band                  | 5200 MHz         |
| Channels              | -                |
| Signal                | CW               |
| Frequency (MHz)       | 5200             |
| Relative permittivity | 49.73            |
| Conductivity (S/m)    | 5.37             |
| Power drift (%)       | 2.12             |
| Probe                 | SN 41/18 EPGO334 |
| ConvF                 | 1.92             |
| Crest factor:         | 1:1              |

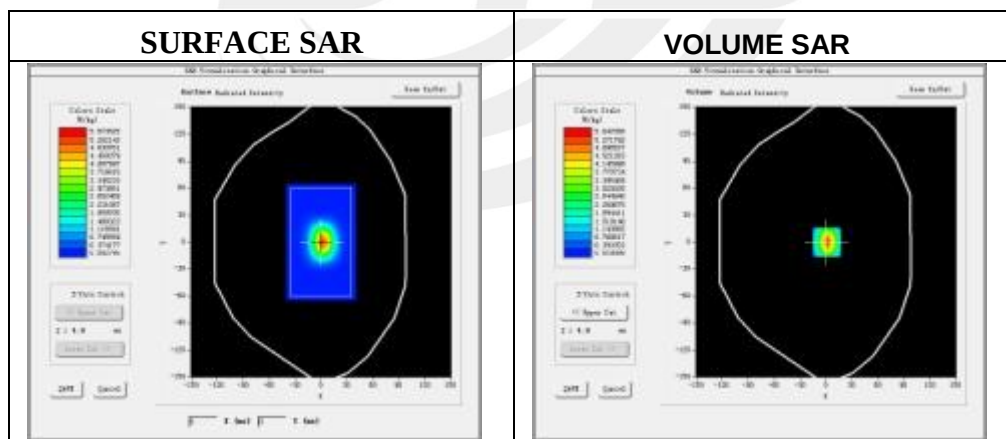

Maximum location: X=7.00, Y=2.00

|                |           |
|----------------|-----------|
| SAR 10g (W/Kg) | 5.826982  |
| SAR 1g (W/Kg)  | 15.814076 |

## Z Axis Scan

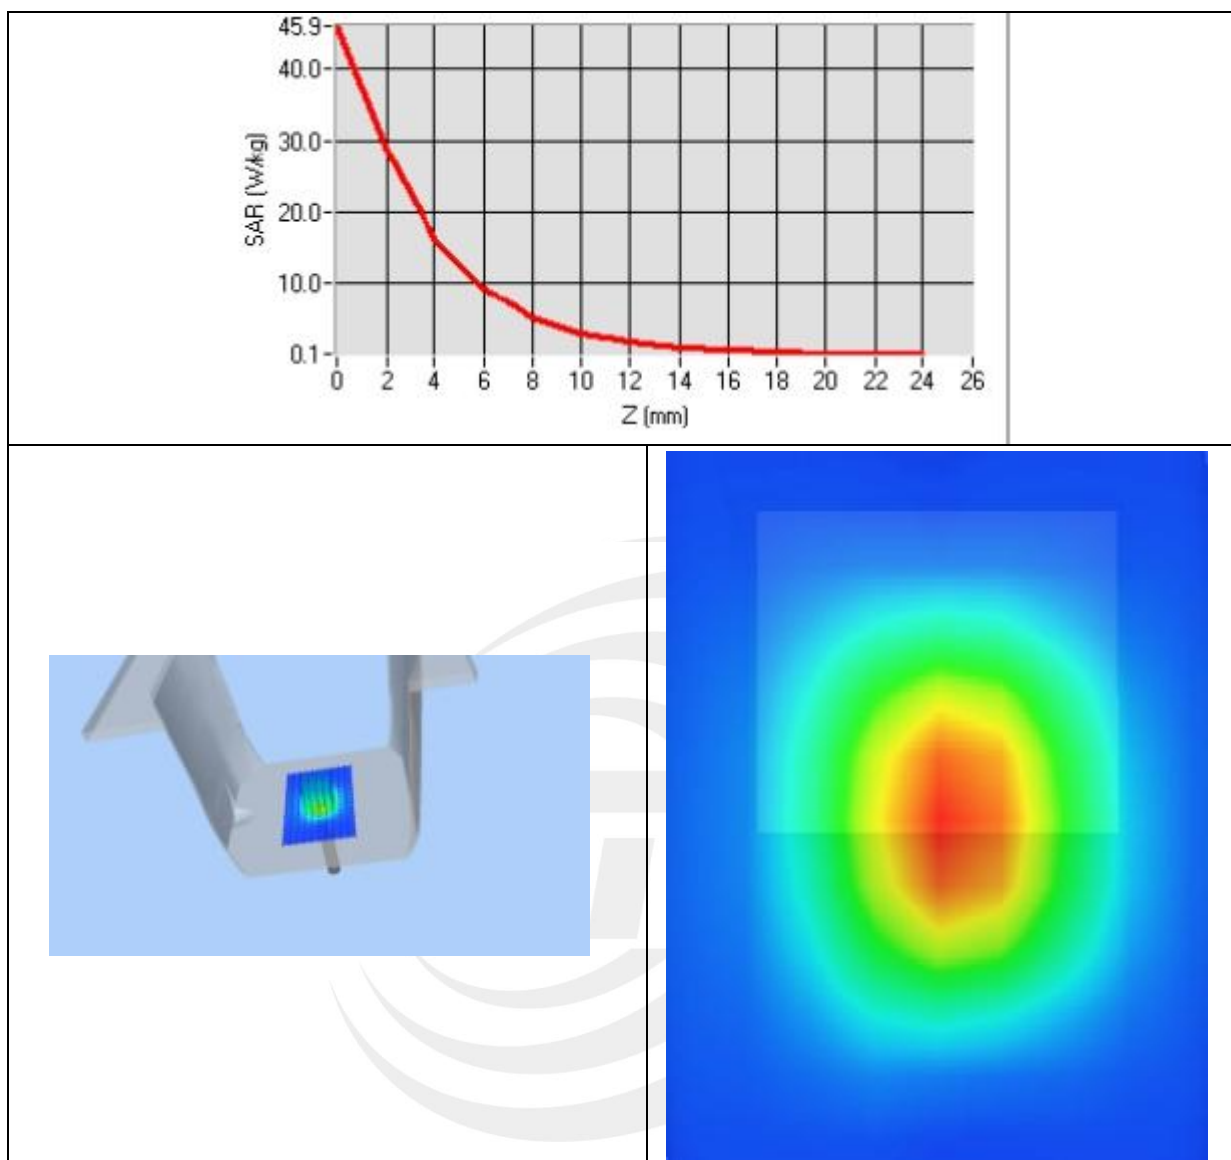



## System Performance Check Data(5400MHz Body)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2020-03-26

### Experimental conditions.


|                       |                  |
|-----------------------|------------------|
| Device Position       | Validation plane |
| Band                  | 5400 MHz         |
| Channels              | -                |
| Signal                | CW               |
| Frequency (MHz)       | 5400             |
| Relative permittivity | 48.15            |
| Conductivity (S/m)    | 5.62             |
| Power drift (%)       | -2.76            |
| Probe                 | SN 41/18 EPGO334 |
| ConvF                 | 2.12             |
| Crest factor:         | 1:1              |

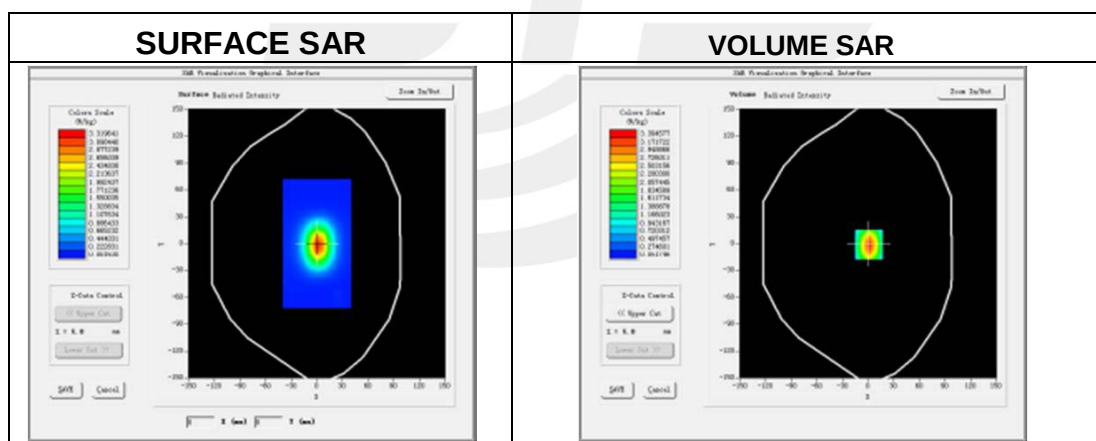

Maximum location: X=7.00, Y=2.00

|                |           |
|----------------|-----------|
| SAR 10g (W/Kg) | 5.993174  |
| SAR 1g (W/Kg)  | 16.718236 |

## Z Axis Scan

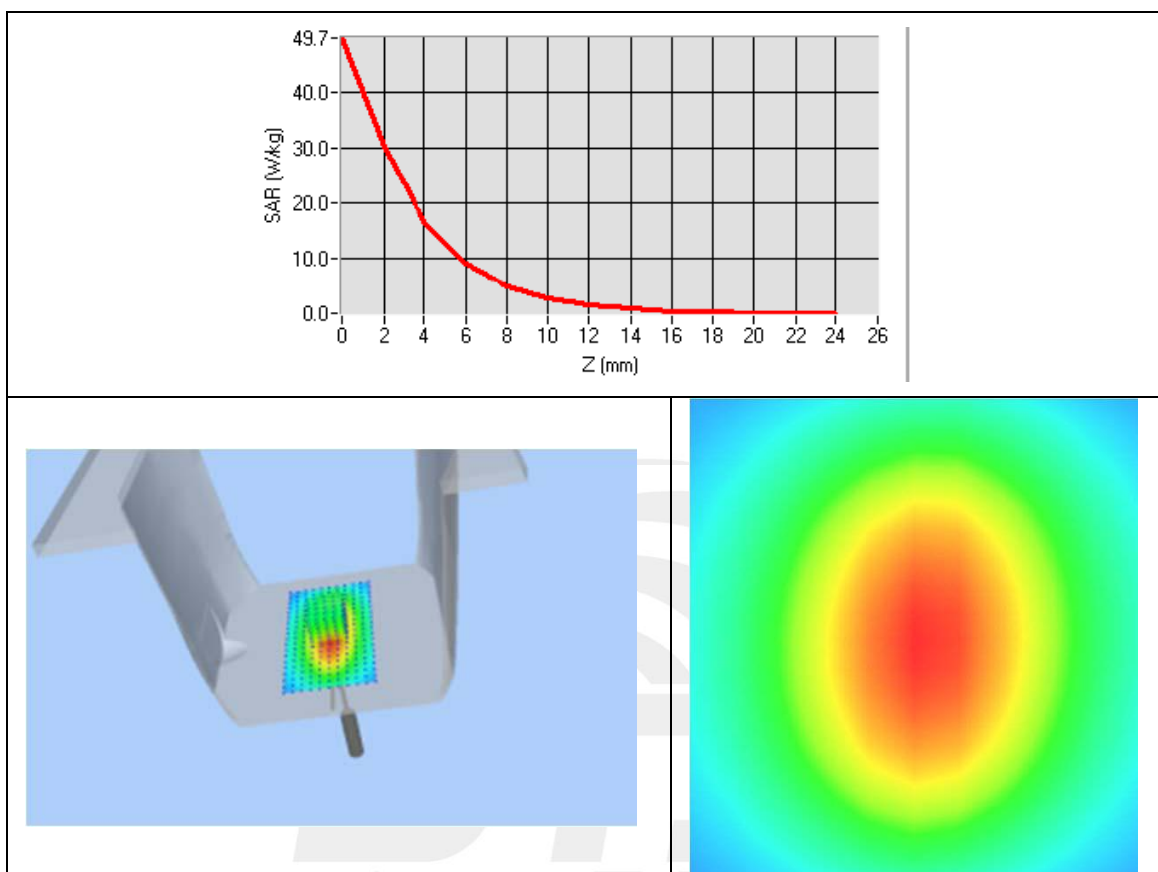



## System Performance Check Data(5600MHz Body)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2020-03-27

### Experimental conditions.


|                       |                  |
|-----------------------|------------------|
| Device Position       | Validation plane |
| Band                  | 5600 MHz         |
| Channels              | -                |
| Signal                | CW               |
| Frequency (MHz)       | 5600             |
| Relative permittivity | 49.16            |
| Conductivity (S/m)    | 5.64             |
| Power drift (%)       | 1.59             |
| Probe                 | SN 41/18 EPG0334 |
| ConvF                 | 2.21             |
| Crest factor:         | 1:1              |

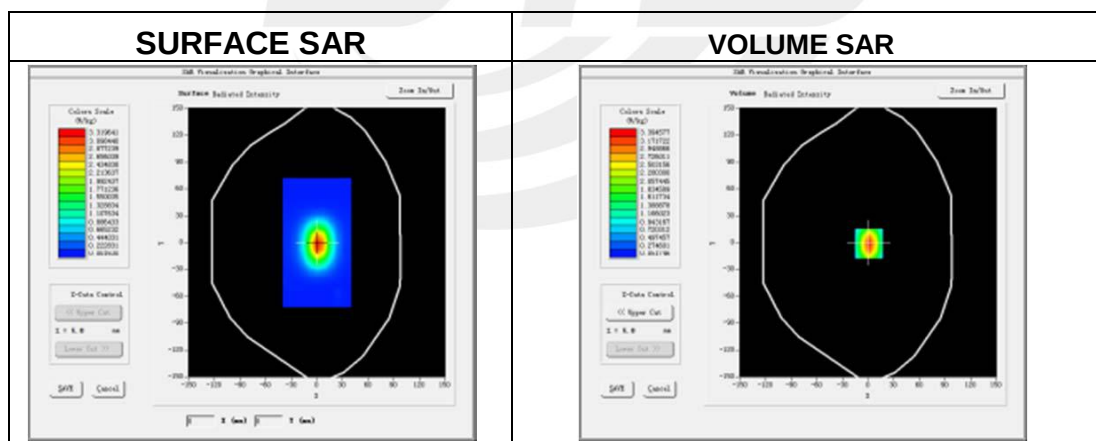

Maximum location: X=7.00, Y=2.00

|                |           |
|----------------|-----------|
| SAR 10g (W/Kg) | 6.251487  |
| SAR 1g (W/Kg)  | 17.725831 |

## Z Axis Scan

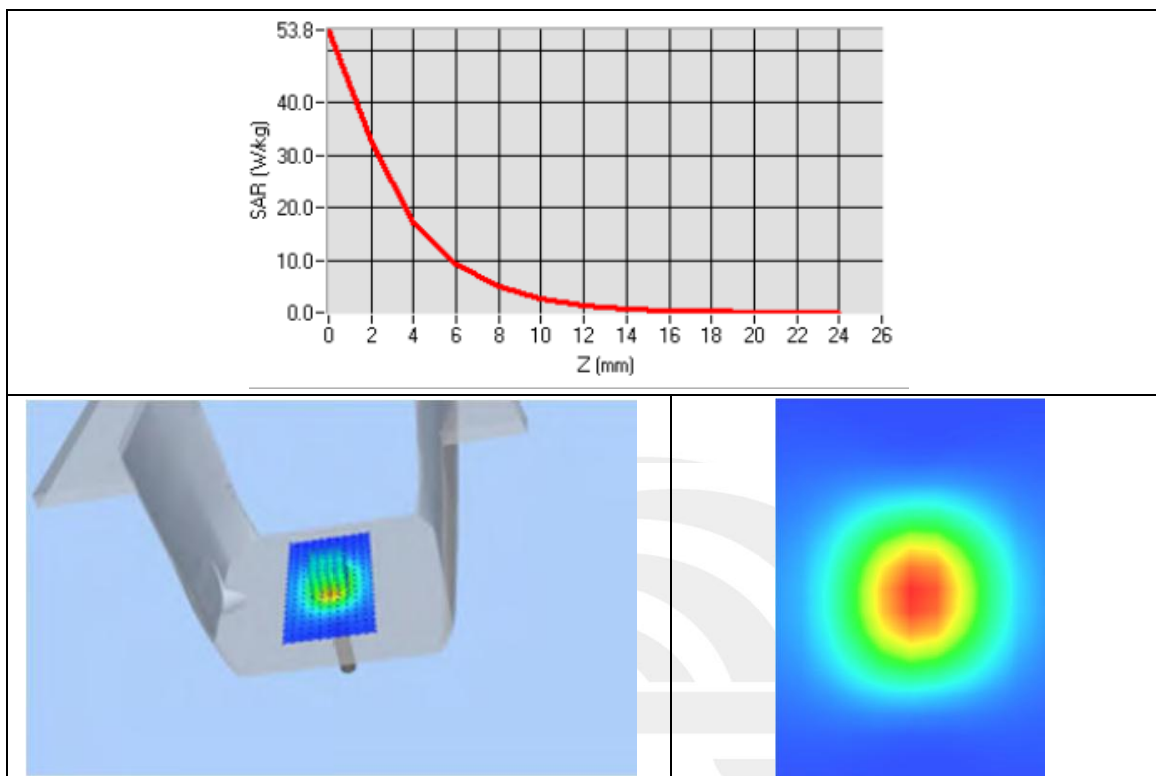



## System Performance Check Data(5800MHz Body)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2020-03-16

### Experimental conditions.


|                       |                  |
|-----------------------|------------------|
| Device Position       | Validation plane |
| Band                  | 5800 MHz         |
| Channels              | -                |
| Signal                | CW               |
| Frequency (MHz)       | 5800             |
| Relative permittivity | 48.95            |
| Conductivity (S/m)    | 6.14             |
| Power drift (%)       | -3.27            |
| Probe                 | SN 41/18 EPG0334 |
| ConvF                 | 2.16             |
| Crest factor:         | 1:1              |

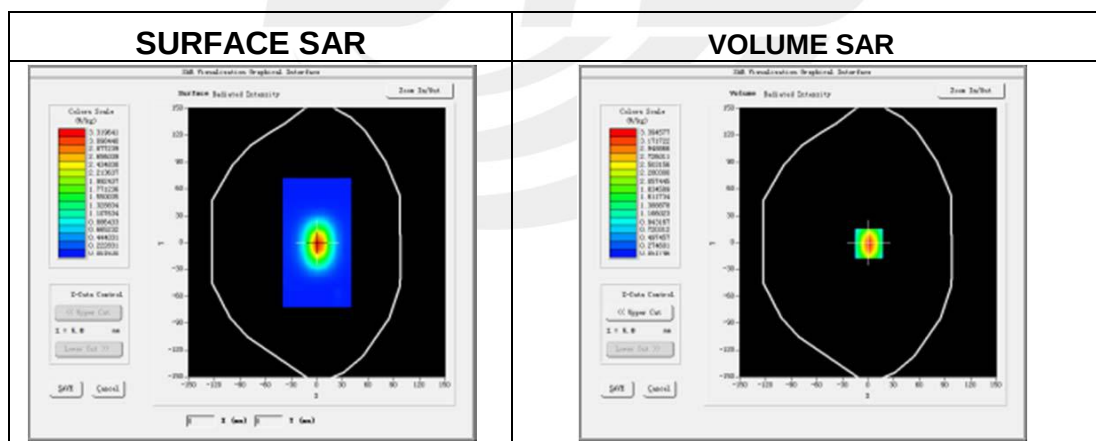

Maximum location: X=7.00, Y=2.00

|                |           |
|----------------|-----------|
| SAR 10g (W/Kg) | 6.118748  |
| SAR 1g (W/Kg)  | 18.214063 |

## Z Axis Scan

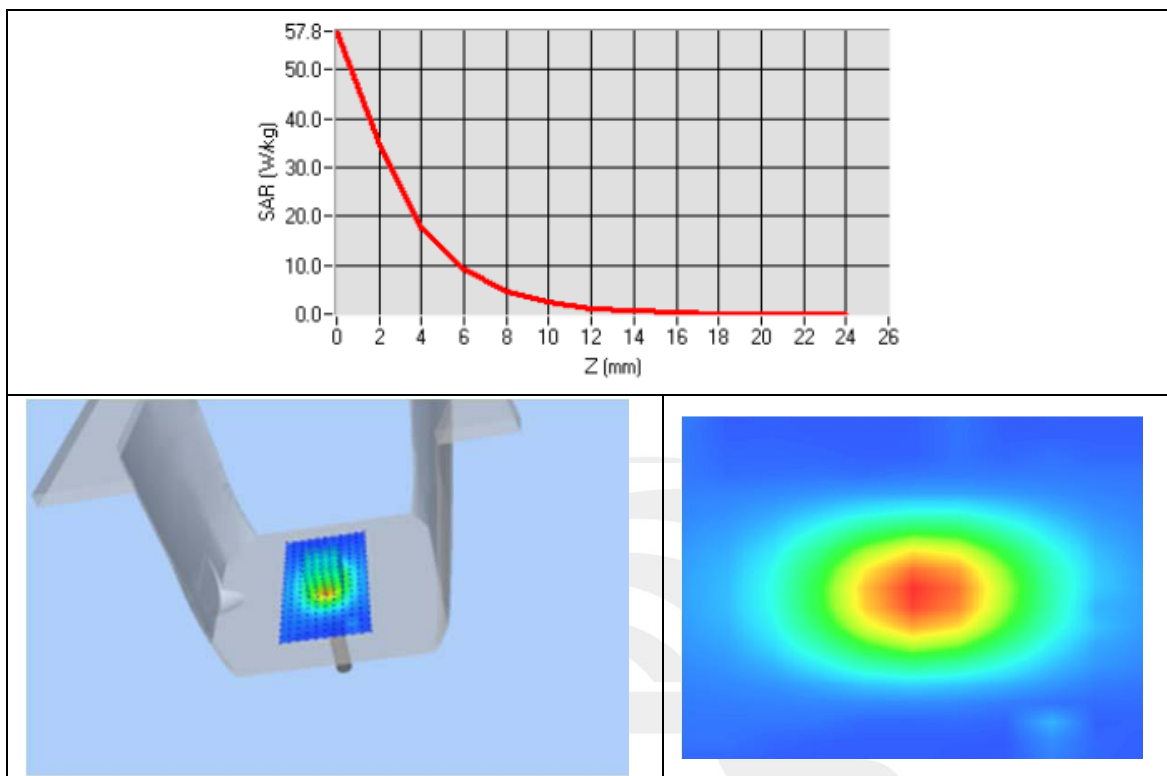



## Appendix B. SAR Test Plots


### Plot 1: DUT: Rugged Tablet PC; EUT Model: M101P-LA

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-02                                                         |
| Probe                             | SN 41/18 EPG0334                                                   |
| ConvF                             | 1.88                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | WCDMA II                                                           |
| Channels                          | High                                                               |
| Signal                            | WCDMA (Crest factor: 1.0)                                          |
| Frequency (MHz)                   | 1907.6                                                             |
| Relative permittivity (real part) | 54.11                                                              |
| Conductivity (S/m)                | 1.55                                                               |
| Variation (%)                     | -0.08                                                              |

Maximum location: X=24.00, Y=-31.00

SAR Peak: 1.66 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.566757 |
| SAR 1g (W/Kg)  | 1.041984 |

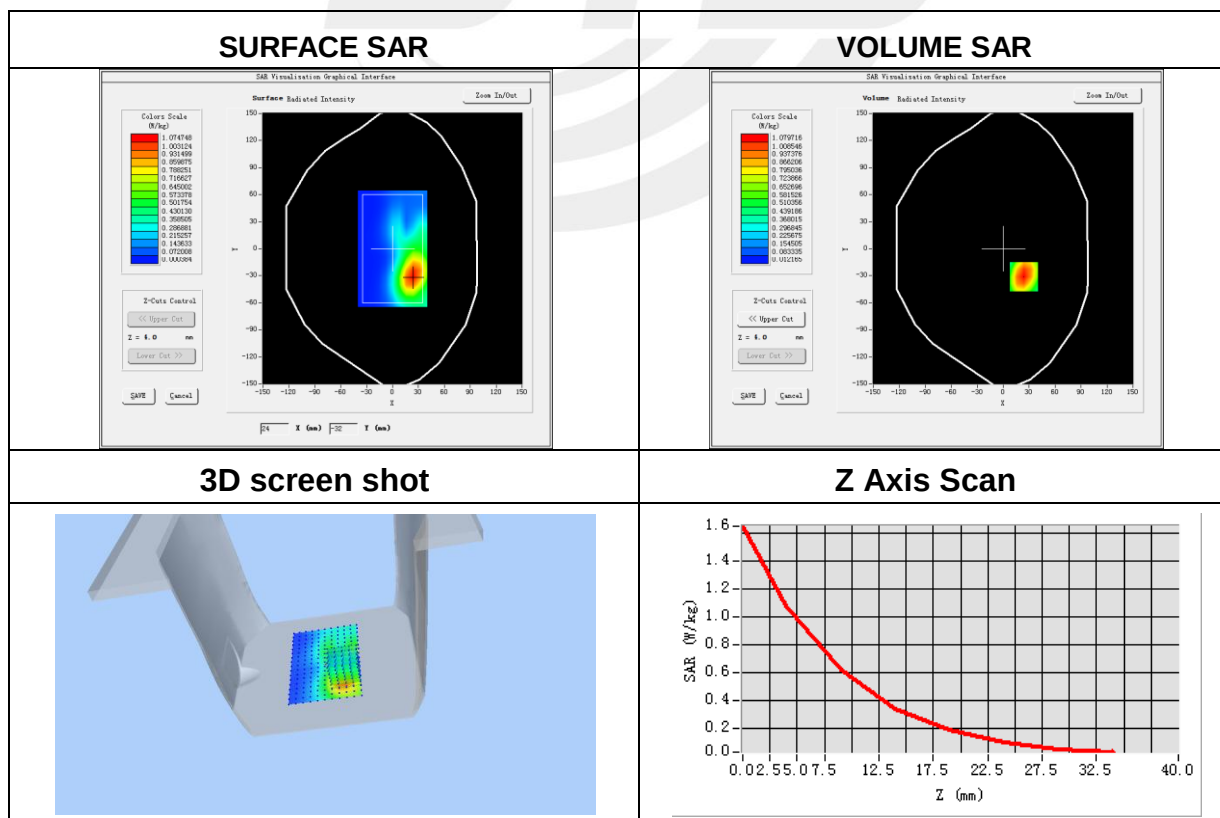


**Plot 2: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-07                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.66                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | WCDMA IV                                                           |
| Channels                          | High                                                               |
| Signal                            | WCDMA (Crest factor: 1.0)                                          |
| Frequency (MHz)                   | 1752.4                                                             |
| Relative permittivity (real part) | 53.69                                                              |
| Conductivity (S/m)                | 1.54                                                               |
| Variation (%)                     | 1.75                                                               |

Maximum location: X=8.00, Y=9.00

SAR Peak: 1.43 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.509651 |
| SAR 1g (W/Kg)  | 0.908664 |

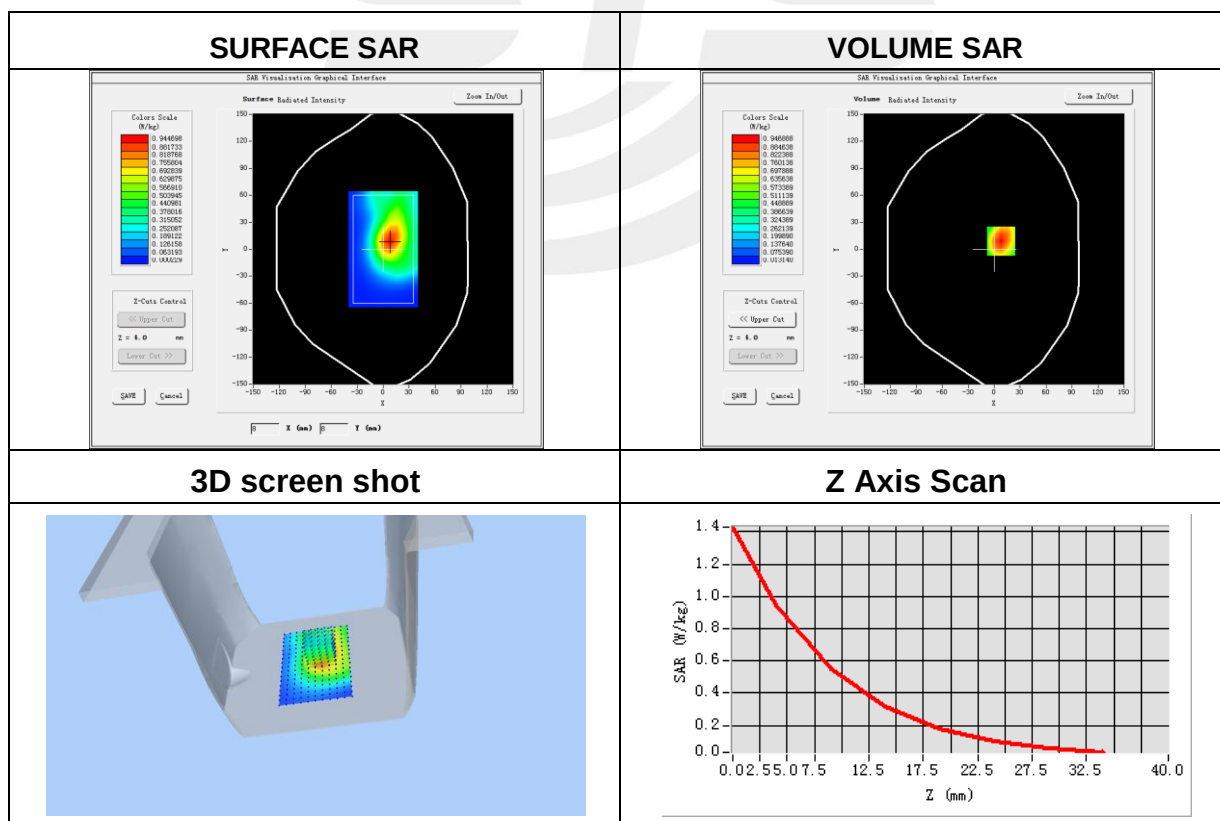



**Plot 3: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-03                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.53                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | WCDMA V                                                            |
| Channels                          | High                                                               |
| Signal                            | WCDMA (Crest factor: 1.0)                                          |
| Frequency (MHz)                   | 846.6                                                              |
| Relative permittivity (real part) | 54.76                                                              |
| Conductivity (S/m)                | 0.95                                                               |
| Variation (%)                     | 2.34                                                               |

Maximum location: X=-18.00, Y=-23.00

SAR Peak: 1.48 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.594468 |
| SAR 1g (W/Kg)  | 0.985537 |

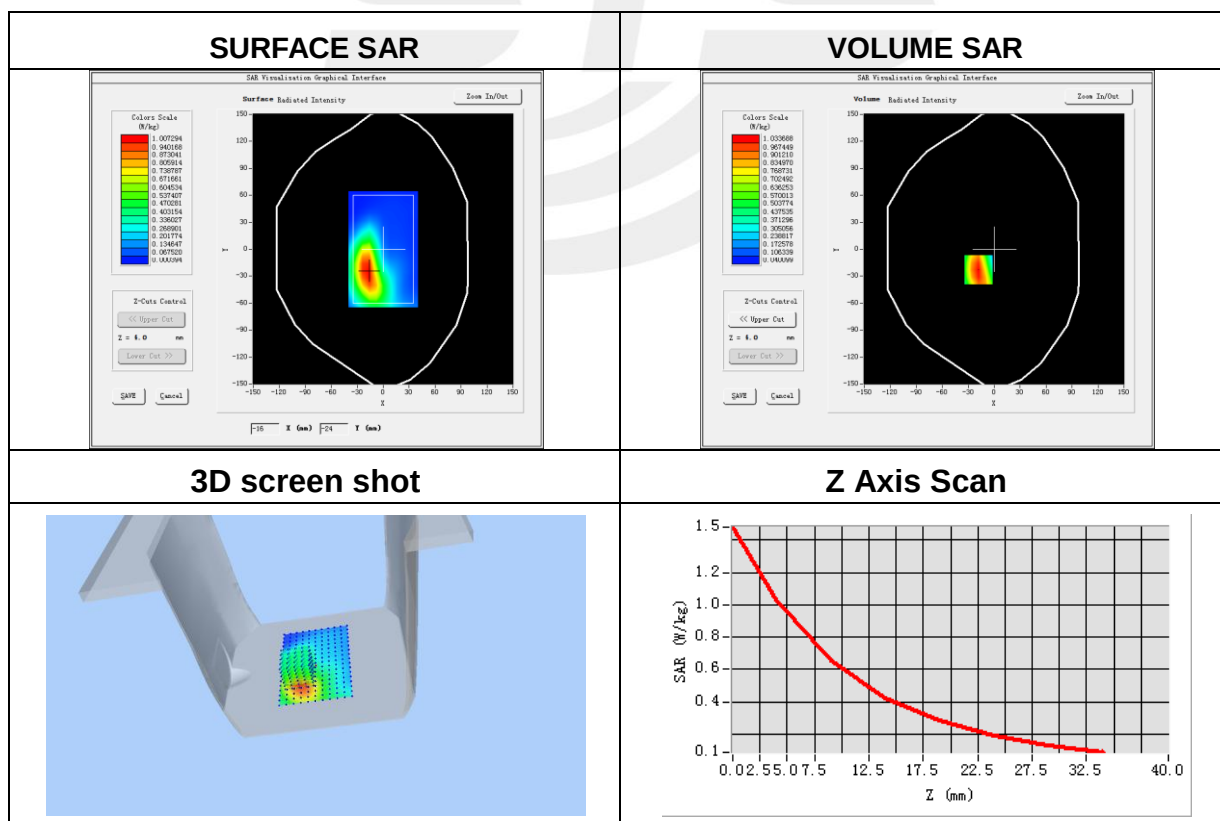


**Plot 4: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-03-10                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 2.02                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | IEEE 802.11b ISM                                                   |
| Channels                          | Middle                                                             |
| Antenna                           | A                                                                  |
| Signal                            | IEEE802.b (Crest factor: 1.0)                                      |
| Frequency (MHz)                   | 2437                                                               |
| Relative permittivity (real part) | 52.53                                                              |
| Conductivity (S/m)                | 1.98                                                               |
| Variation (%)                     | -3.39                                                              |

Maximum location: X=-3.00, Y=18.00

SAR Peak: 1.21 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.324359 |
| SAR 1g (W/Kg)  | 0.695273 |

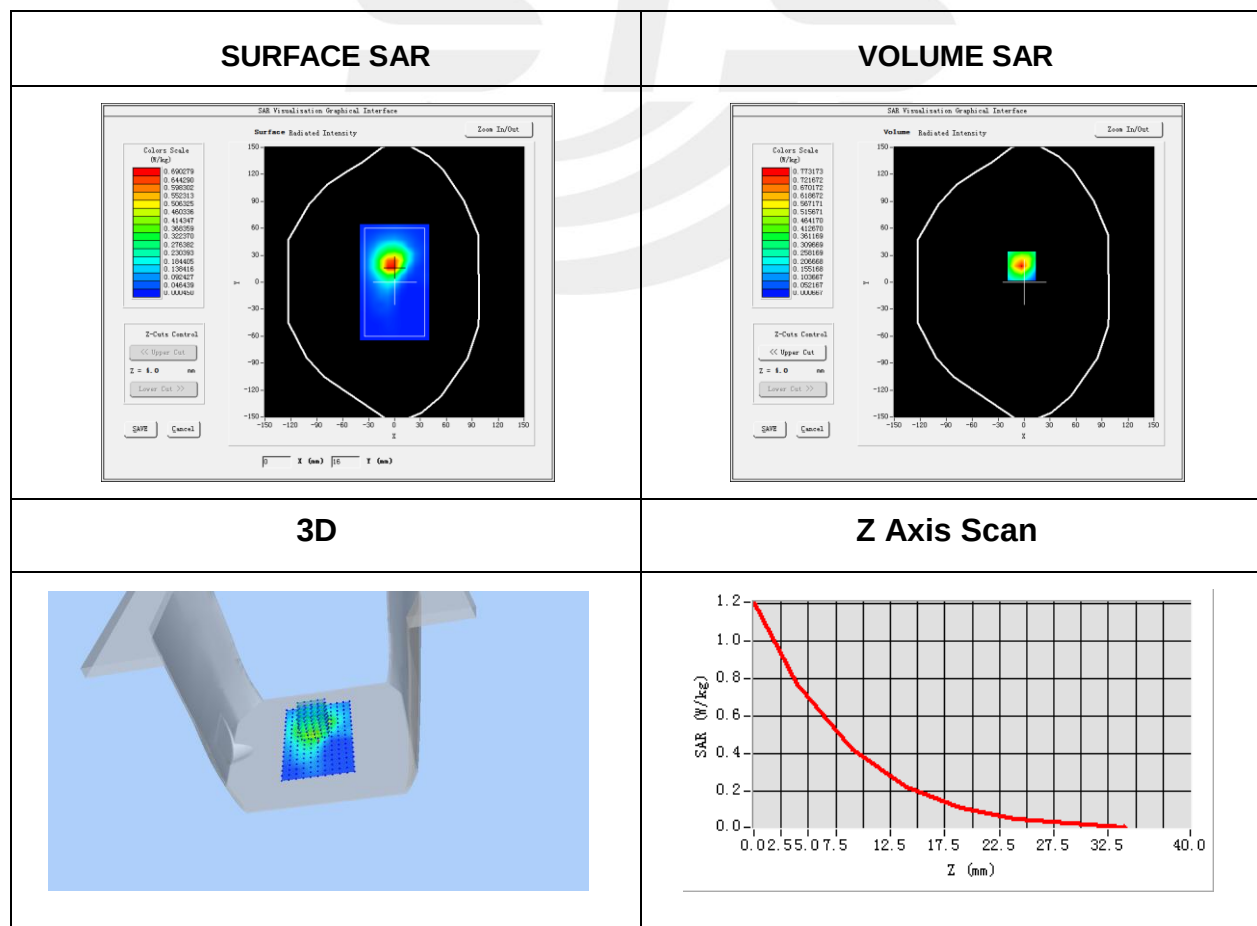




# Plot 5: DUT: Rugged Tablet PC; EUT Model: M101P-LA

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-03-10                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 2.02                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | IEEE 802.11b ISM                                                   |
| Channels                          | Middle                                                             |
| Antenna                           | B                                                                  |
| Signal                            | IEEE802.b (Crest factor: 1.0)                                      |
| Frequency (MHz)                   | 2437                                                               |
| Relative permittivity (real part) | 52.53                                                              |
| Conductivity (S/m)                | 1.98                                                               |
| Variation (%)                     | -1.99                                                              |

Maximum location: X=-9.00, Y=-13.00

SAR Peak: 1.03 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.282847 |
| SAR 1g (W/Kg)  | 0.604748 |

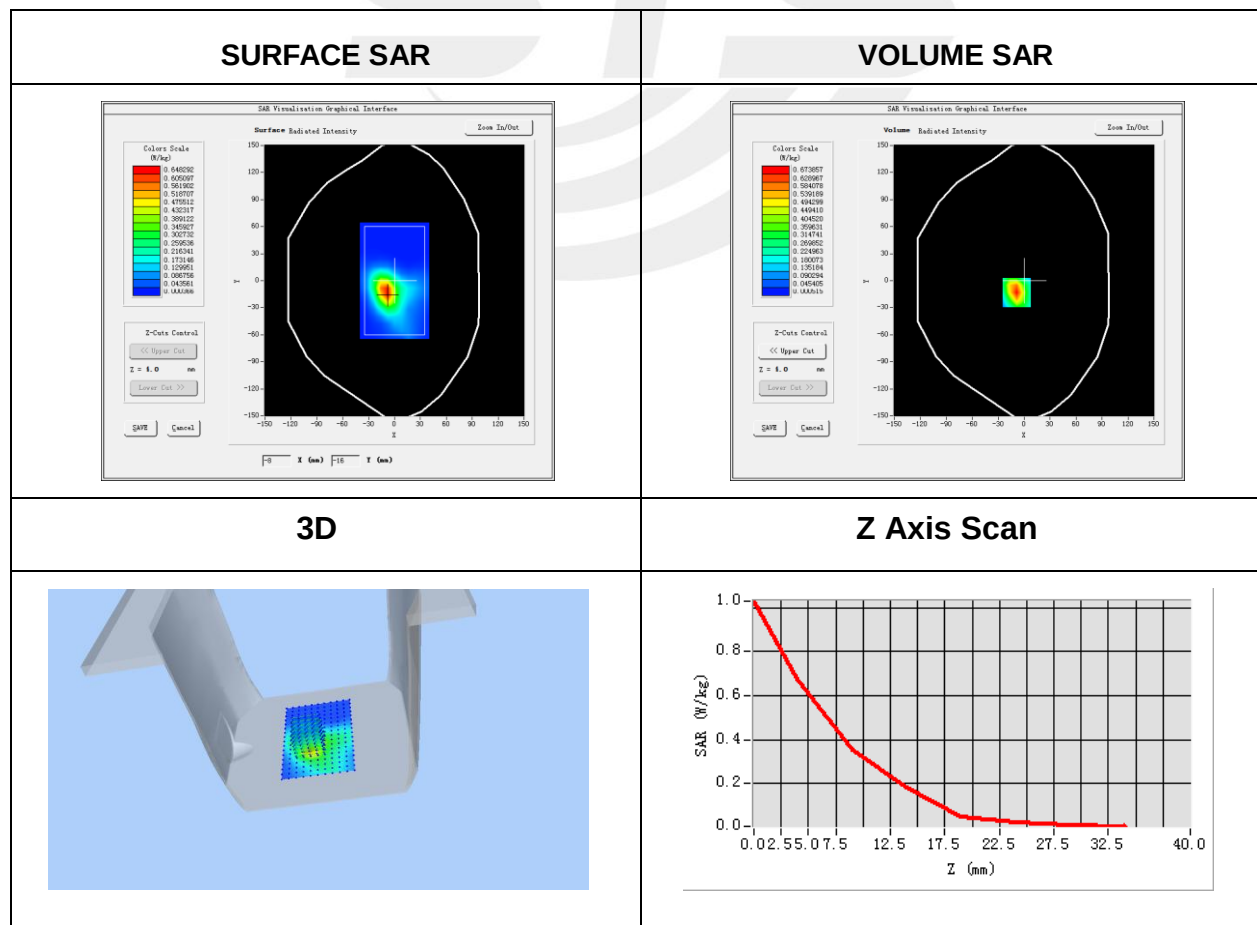



**Plot 6: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-03-10                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 2.02                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | IEEE 802.11n ISM                                                   |
| Channels                          | Middle                                                             |
| Antenna                           | A                                                                  |
| Signal                            | IEEE802.n (Crest factor: 1.0)                                      |
| Frequency (MHz)                   | 2437                                                               |
| Relative permittivity (real part) | 52.53                                                              |
| Conductivity (S/m)                | 1.98                                                               |
| Variation (%)                     | 3.93                                                               |

Maximum location: X=16.00, Y=24.00

SAR Peak: 0.17 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.039500 |
| SAR 1g (W/Kg)  | 0.091043 |

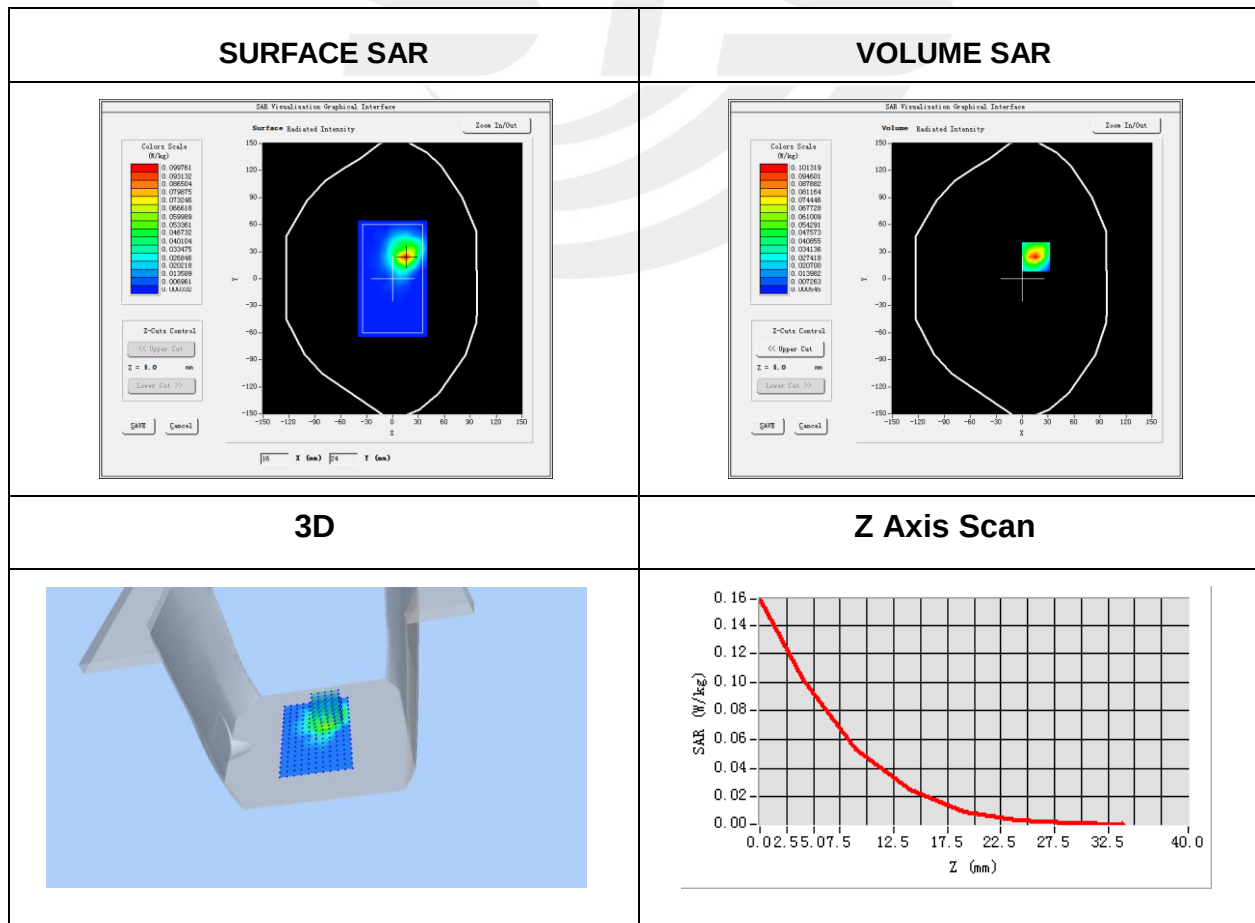



**Plot 7: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-03-10                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 2.02                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | IEEE 802.11n ISM                                                   |
| Channels                          | Middle                                                             |
| Antenna                           | B                                                                  |
| Signal                            | IEEE802.n (Crest factor: 1.0)                                      |
| Frequency (MHz)                   | 2437                                                               |
| Relative permittivity (real part) | 52.53                                                              |
| Conductivity (S/m)                | 1.98                                                               |
| Variation (%)                     | -1.13                                                              |

Maximum location: X=-7.00, Y=-9.00

SAR Peak: 0.15 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.038445 |
| SAR 1g (W/Kg)  | 0.084284 |

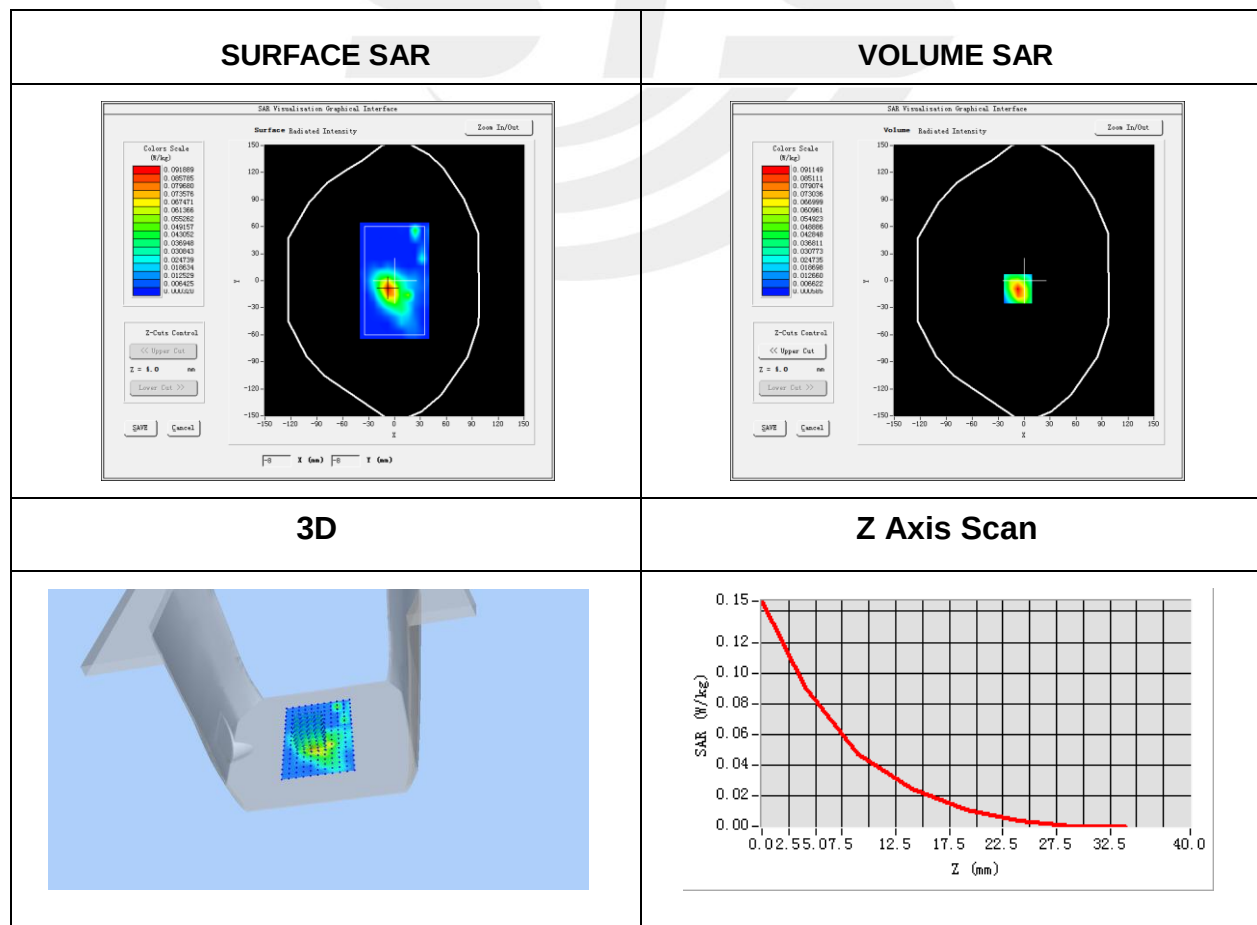





**Plot 8: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-07                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.66                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | LTE Band 4 (RB 1)                                                  |
| Channels                          | High                                                               |
| Signal                            | LTE (Crest factor: 1.0)                                            |
| Frequency (MHz)                   | 1745                                                               |
| Relative permittivity (real part) | 53.69                                                              |
| Conductivity (S/m)                | 1.54                                                               |
| Variation (%)                     | -0.88                                                              |

Maximum location: X=9.00, Y=8.00

SAR Peak: 1.73 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.630909 |
| SAR 1g (W/Kg)  | 1.105658 |

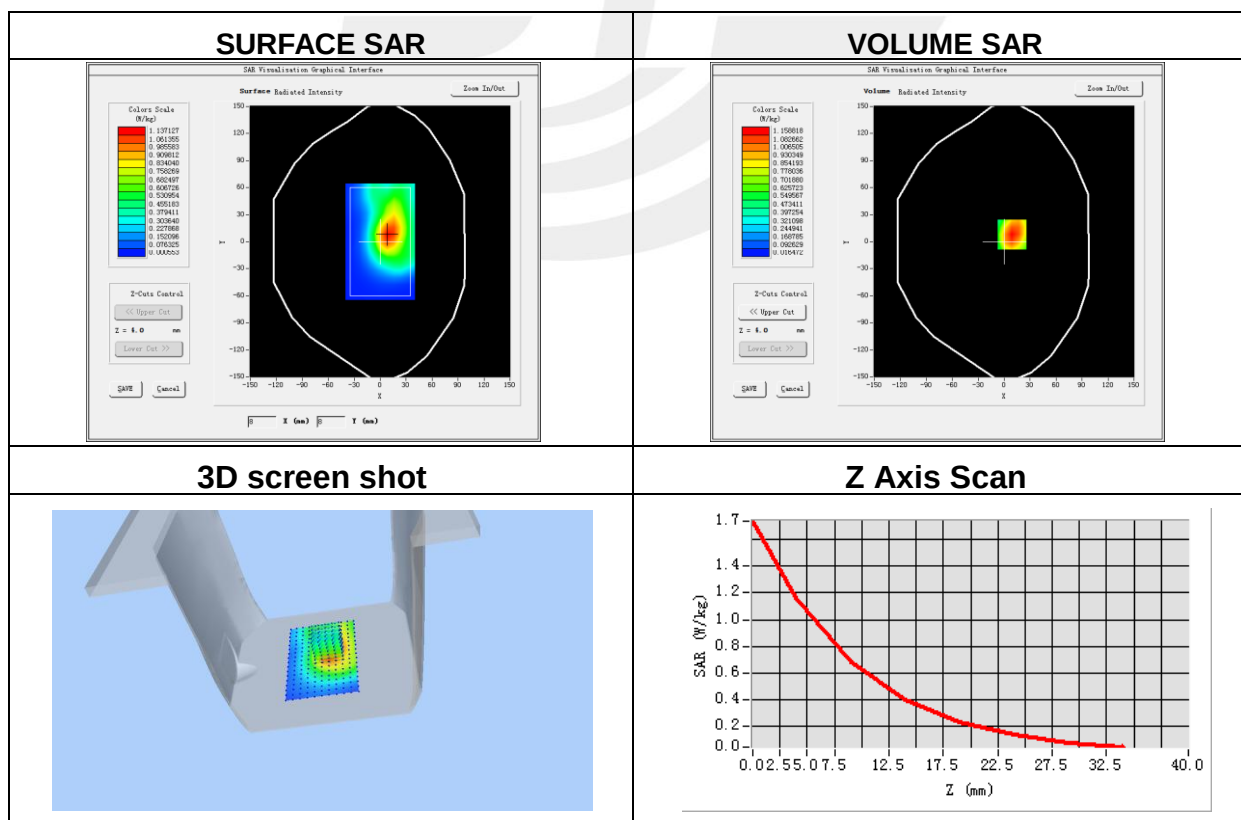





**Plot 9: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-09                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.92                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | LTE Band 7 (RB 1)                                                  |
| Channels                          | Low                                                                |
| Signal                            | LTE (Crest factor: 1.0)                                            |
| Frequency (MHz)                   | 2510                                                               |
| Relative permittivity (real part) | 53.08                                                              |
| Conductivity (S/m)                | 2.07                                                               |
| Variation (%)                     | -3.90                                                              |

Maximum location: X=16.00, Y=-34.00

SAR Peak: 1.72 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.485732 |
| SAR 1g (W/Kg)  | 0.977458 |

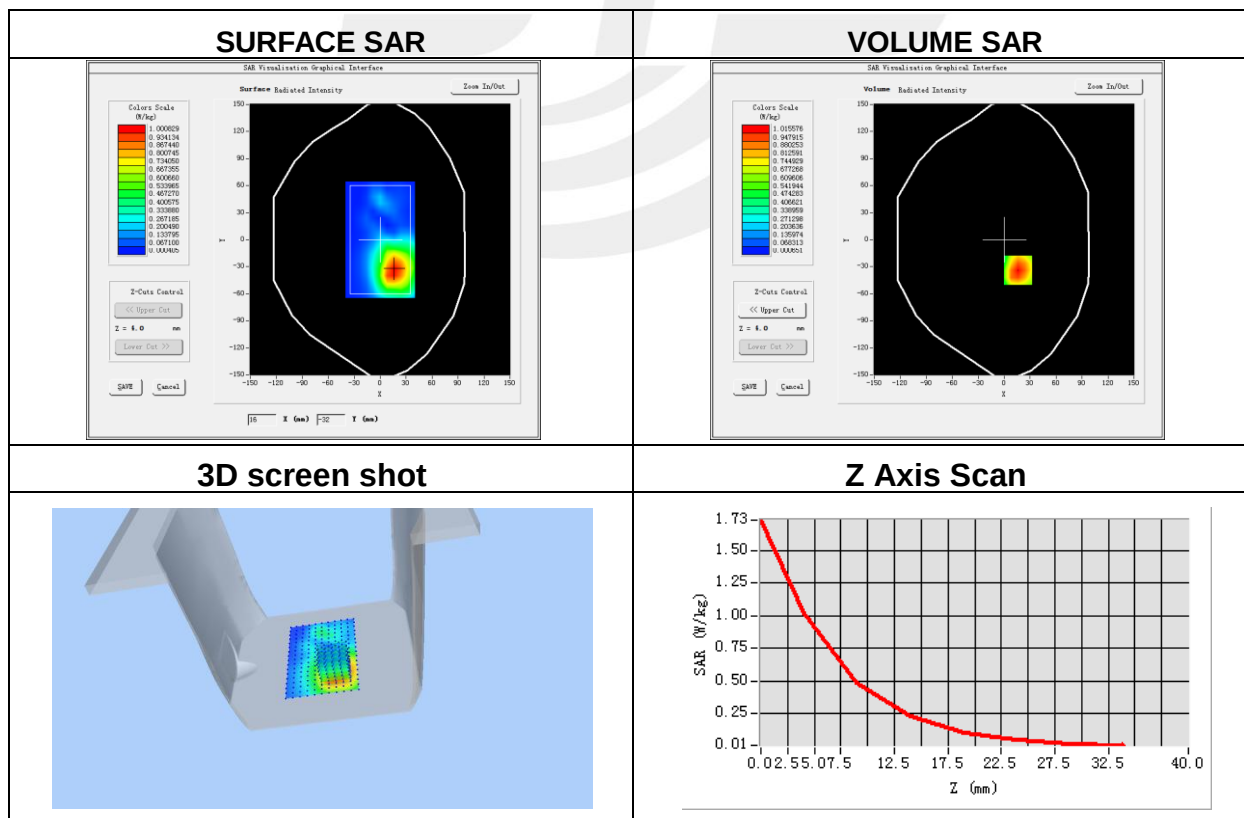



**Plot 10: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-01                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.49                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | LTE Band 12 (RB 1)                                                 |
| Channels                          | Low                                                                |
| Signal                            | LTE (Crest factor: 1.0)                                            |
| Frequency (MHz)                   | 704                                                                |
| Relative permittivity (real part) | 56.32                                                              |
| Conductivity (S/m)                | 0.98                                                               |
| Variation (%)                     | -0.10                                                              |

Maximum location: X=-15.00, Y=-17.00

SAR Peak: 1.56 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.673671 |
| SAR 1g (W/Kg)  | 1.059796 |

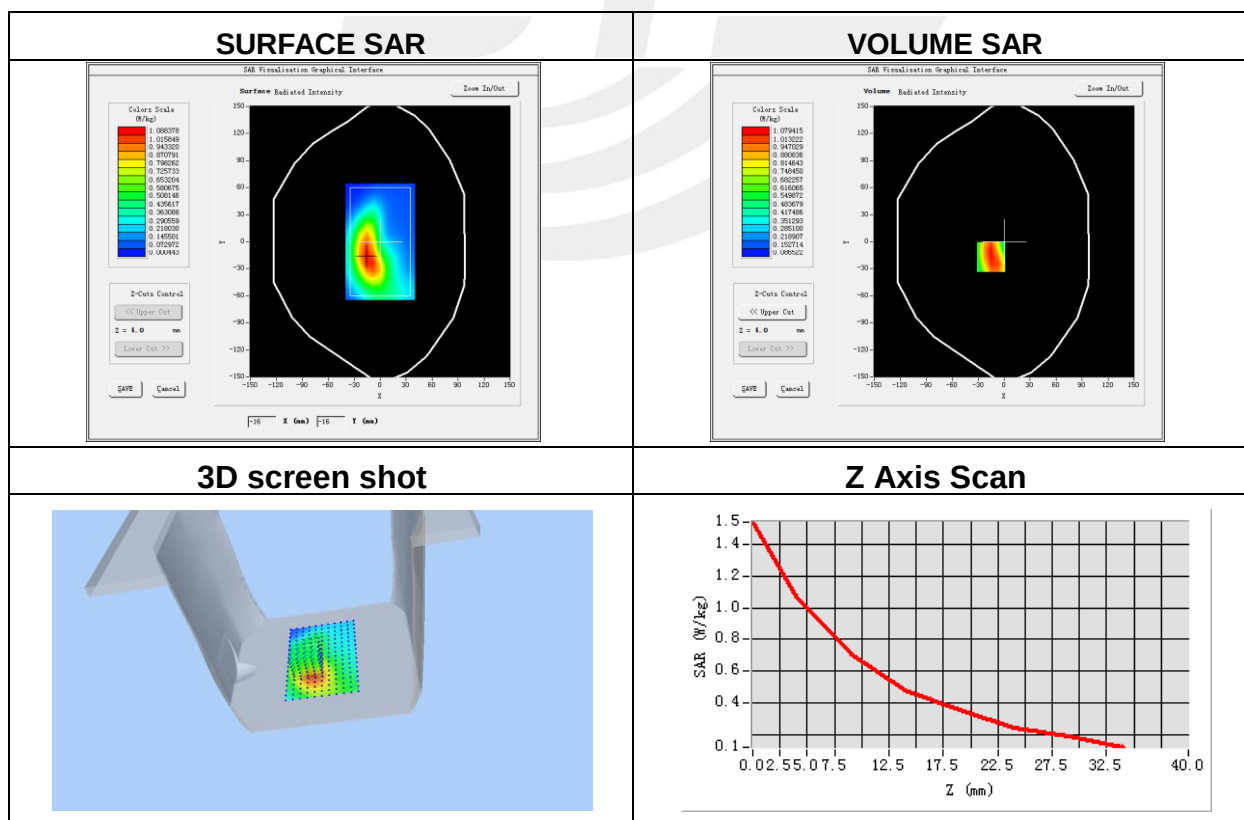


**Plot 11: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-01                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.49                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | LTE Band 13 (RB 1)                                                 |
| Channels                          | Middle                                                             |
| Signal                            | LTE (Crest factor: 1.0)                                            |
| Frequency (MHz)                   | 782                                                                |
| Relative permittivity (real part) | 56.32                                                              |
| Conductivity (S/m)                | 0.98                                                               |
| Variation (%)                     | 2.51                                                               |

Maximum location: X=6.00, Y=-12.00

SAR Peak: 1.13 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.477535 |
| SAR 1g (W/Kg)  | 0.767339 |

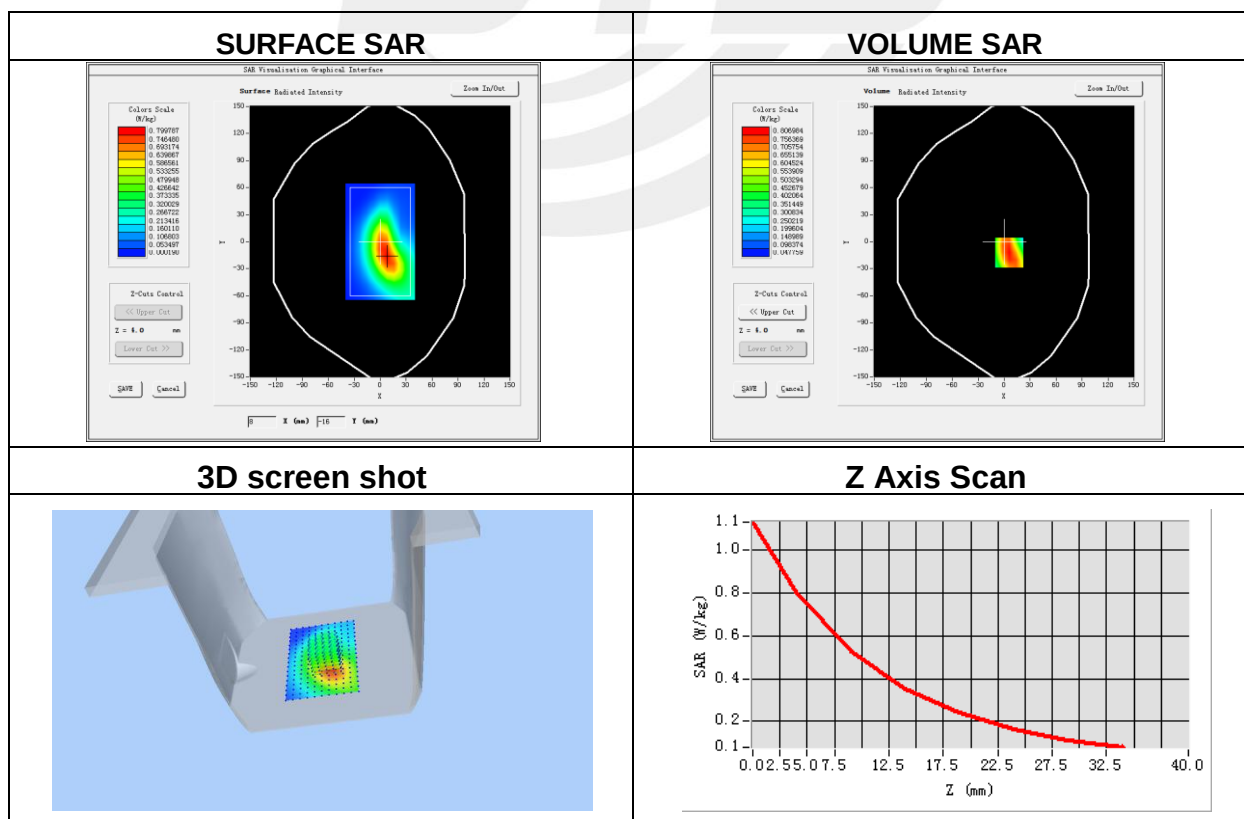


**Plot 12: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-02                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.88                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | LTE Band 25 (RB 1)                                                 |
| Channels                          | Middle                                                             |
| Signal                            | LTE (Crest factor: 1.0)                                            |
| Frequency (MHz)                   | 1882.5                                                             |
| Relative permittivity (real part) | 54.11                                                              |
| Conductivity (S/m)                | 1.55                                                               |
| Variation (%)                     | 3.62                                                               |

Maximum location: X=2.00, Y=24.00

SAR Peak: 1.65 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.540974 |
| SAR 1g (W/Kg)  | 1.009081 |

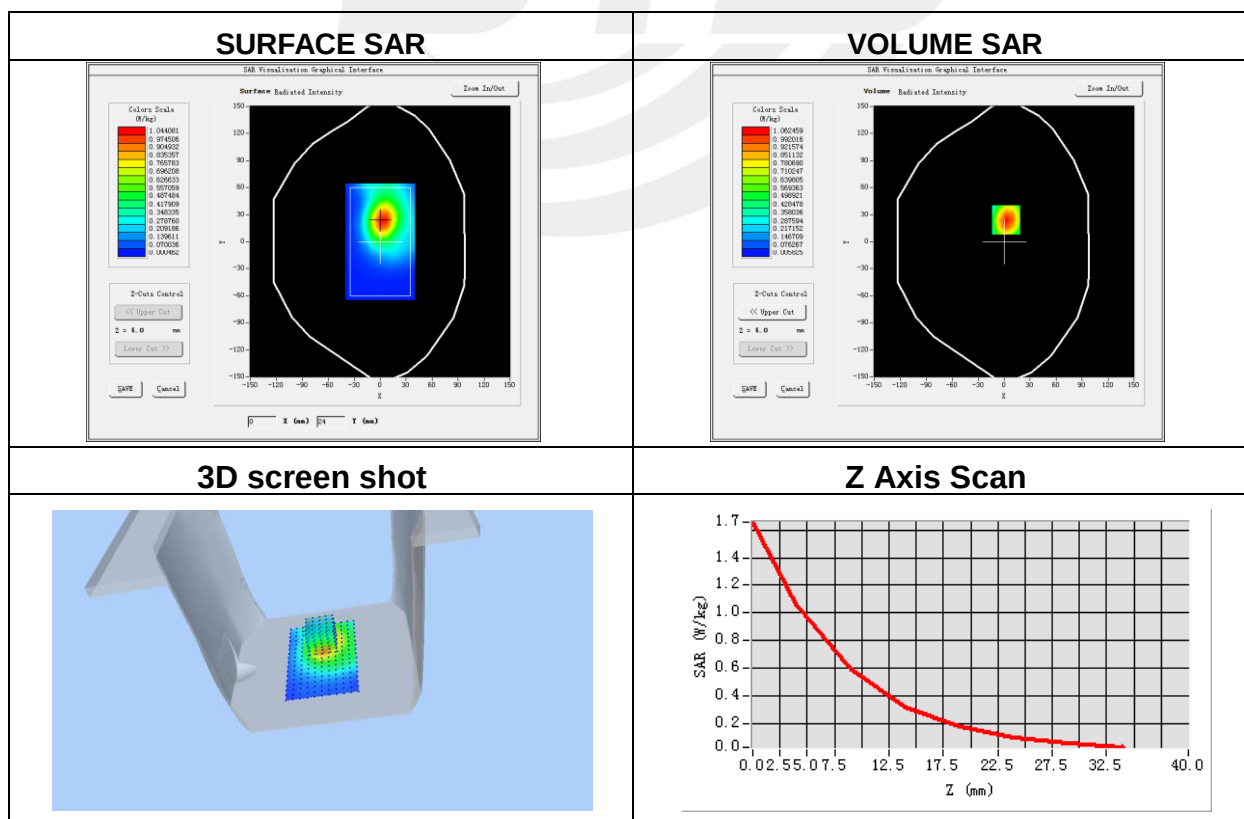


**Plot 13: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-03                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.53                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | LTE Band 26 (RB 1)                                                 |
| Channels                          | High                                                               |
| Signal                            | LTE (Crest factor: 1.0)                                            |
| Frequency (MHz)                   | 841.5                                                              |
| Relative permittivity (real part) | 54.76                                                              |
| Conductivity (S/m)                | 0.95                                                               |
| Variation (%)                     | -3.70                                                              |

Maximum location: X=-11.00, Y=-19.00

SAR Peak: 1.40 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.562532 |
| SAR 1g (W/Kg)  | 0.931904 |

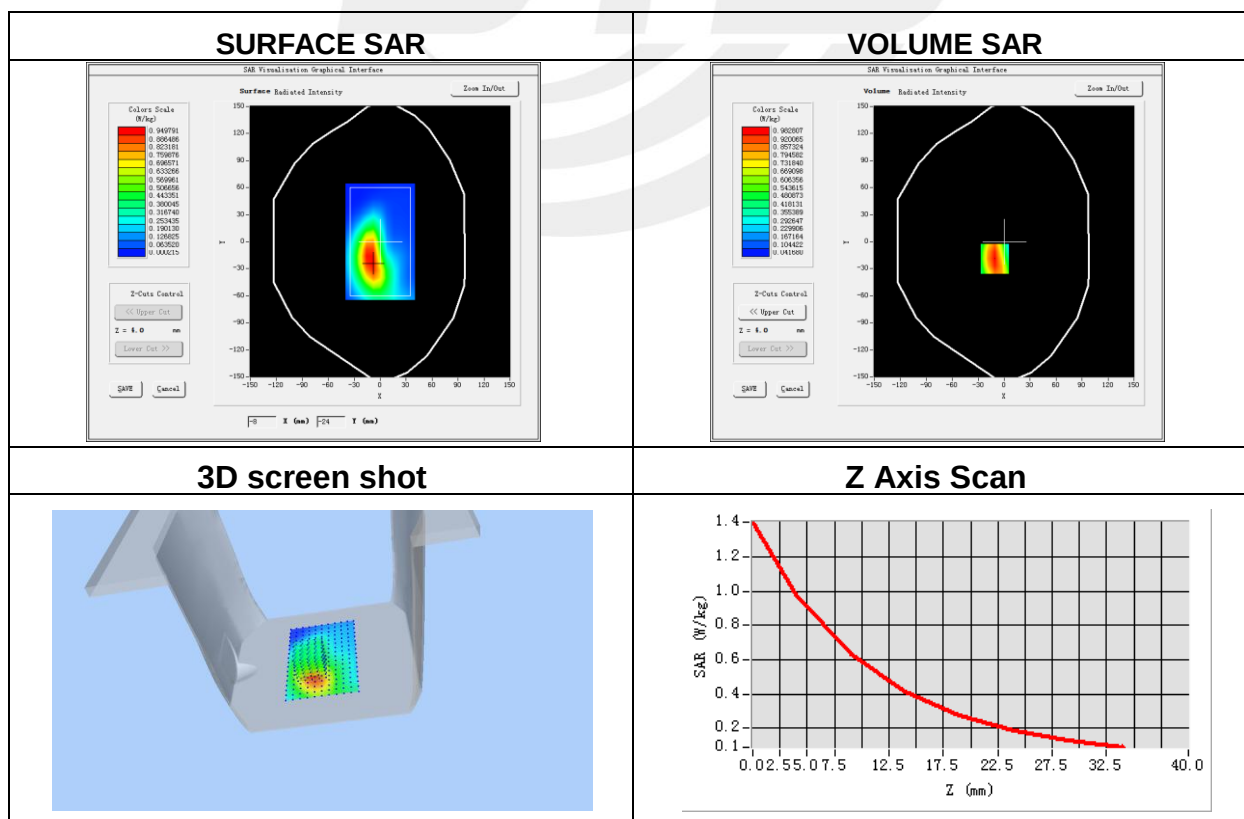



**Plot 14: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-03-10                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 2.02                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | LTE Band 30 (RB 1)                                                 |
| Channels                          | Middle                                                             |
| Signal                            | LTE (Crest factor: 1.0)                                            |
| Frequency (MHz)                   | 2310                                                               |
| Relative permittivity (real part) | 52.53                                                              |
| Conductivity (S/m)                | 1.98                                                               |
| Variation (%)                     | 0.68                                                               |

Maximum location: X=-12.00, Y=-34.00

SAR Peak: 0.72 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.220544 |
| SAR 1g (W/Kg)  | 0.428231 |

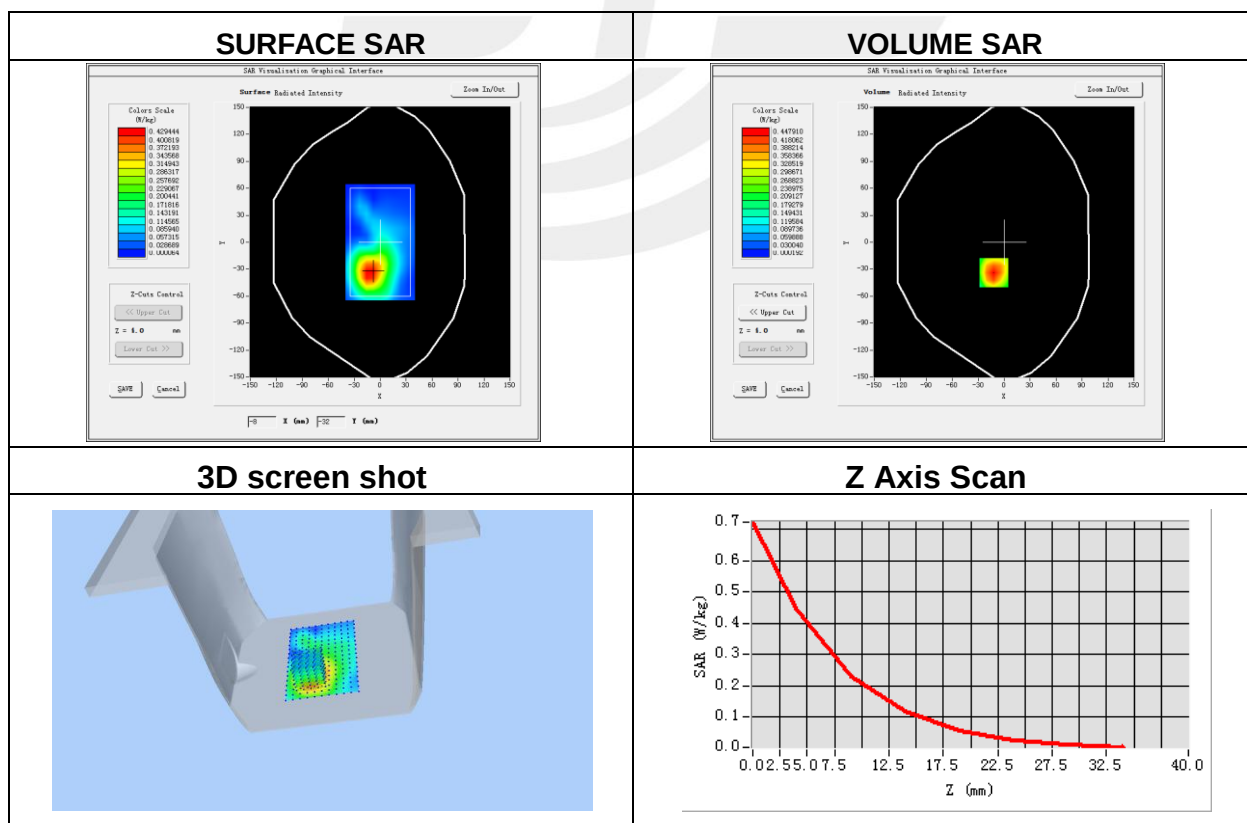



**Plot 15: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-09                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.92                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | LTE Band 41 (RB 1)                                                 |
| Channels                          | Middle                                                             |
| Signal                            | LTE (Crest factor: 1.6)                                            |
| Frequency (MHz)                   | 2593                                                               |
| Relative permittivity (real part) | 53.08                                                              |
| Conductivity (S/m)                | 2.07                                                               |
| Variation (%)                     | -3.22                                                              |

Maximum location: X=-5.00, Y=-15.00

SAR Peak: 0.66 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.185386 |
| SAR 1g (W/Kg)  | 0.371180 |

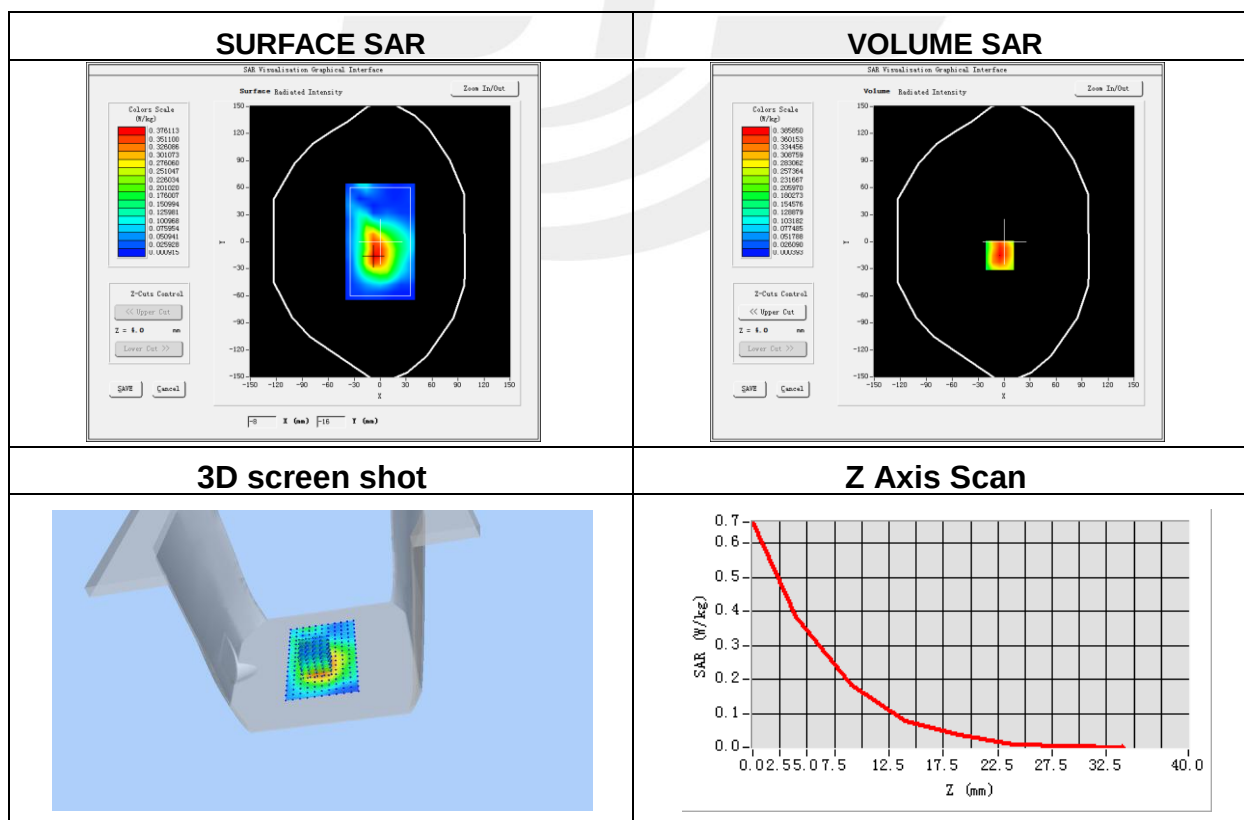




**Plot 16: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-30                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 1.92                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back Side                                                           |
| Band                              | IEEE 802.11a ISM                                                    |
| Antenna                           | A                                                                   |
| Signal                            | IEEE802.a (Crest factor: 1.0)                                       |
| Frequency (MHz)                   | 5180                                                                |
| Relative permittivity (real part) | 49.73                                                               |
| Conductivity (S/m)                | 5.37                                                                |
| Variation (%)                     | -1.05                                                               |

Maximum location: X=-8.00, Y=-14.00  
SAR Peak: 2.01 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.179658 |
| SAR 1g (W/Kg)  | 0.589426 |

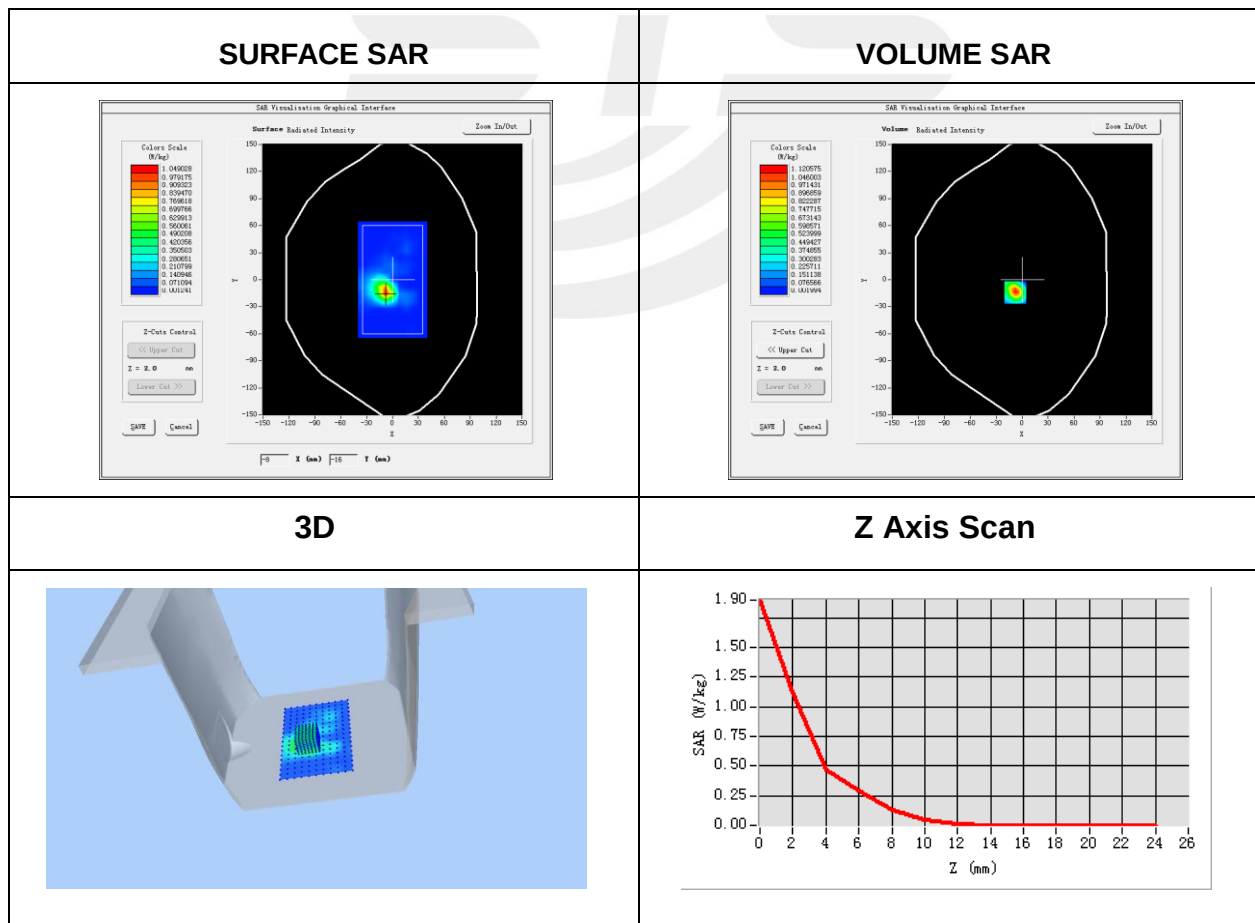





**Plot 17: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-30                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 1.92                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back                                                                |
| Band                              | IEEE 802.11a ISM                                                    |
| Antenna                           | B                                                                   |
| Signal                            | IEEE802.a (Crest factor: 1.0)                                       |
| Frequency (MHz)                   | 5180                                                                |
| Relative permittivity (real part) | 49.73                                                               |
| Conductivity (S/m)                | 5.37                                                                |
| Variation (%)                     | 2.34                                                                |

Maximum location: X=0.00, Y=-9.00

SAR Peak: 2.24 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.235722 |
| SAR 1g (W/Kg)  | 0.694040 |

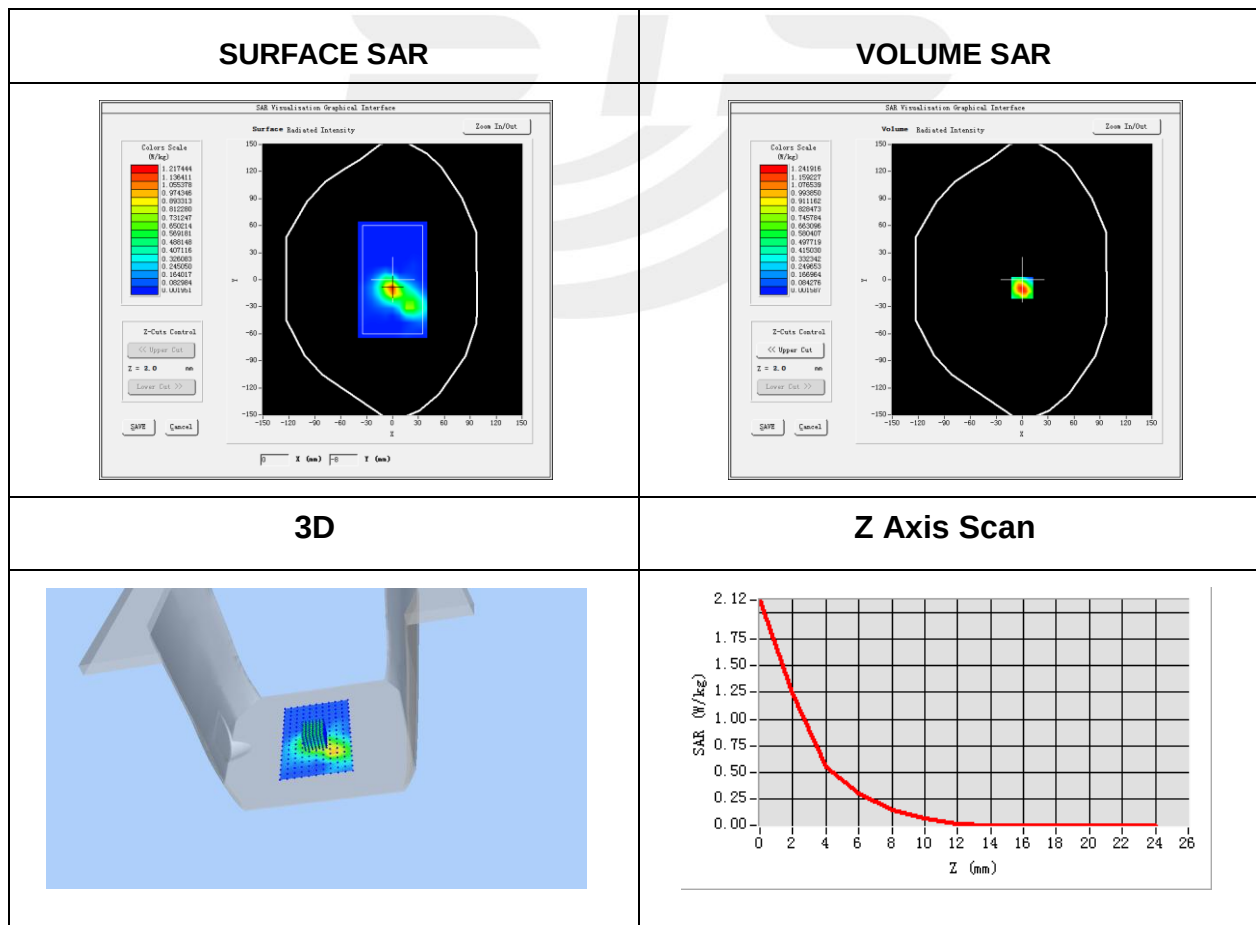



**Plot 18: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-30                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 1.92                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back Side                                                           |
| Band                              | IEEE 802.11ac ISM                                                   |
| Antenna                           | A                                                                   |
| Signal                            | IEEE802.ac (Crest factor: 1.0)                                      |
| Frequency (MHz)                   | 5190                                                                |
| Relative permittivity (real part) | 49.73                                                               |
| Conductivity (S/m)                | 5.37                                                                |
| Variation (%)                     | -0.65                                                               |

Maximum location: X=-17.00, Y=2.00

SAR Peak: 1.36 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.112219 |
| SAR 1g (W/Kg)  | 0.381519 |

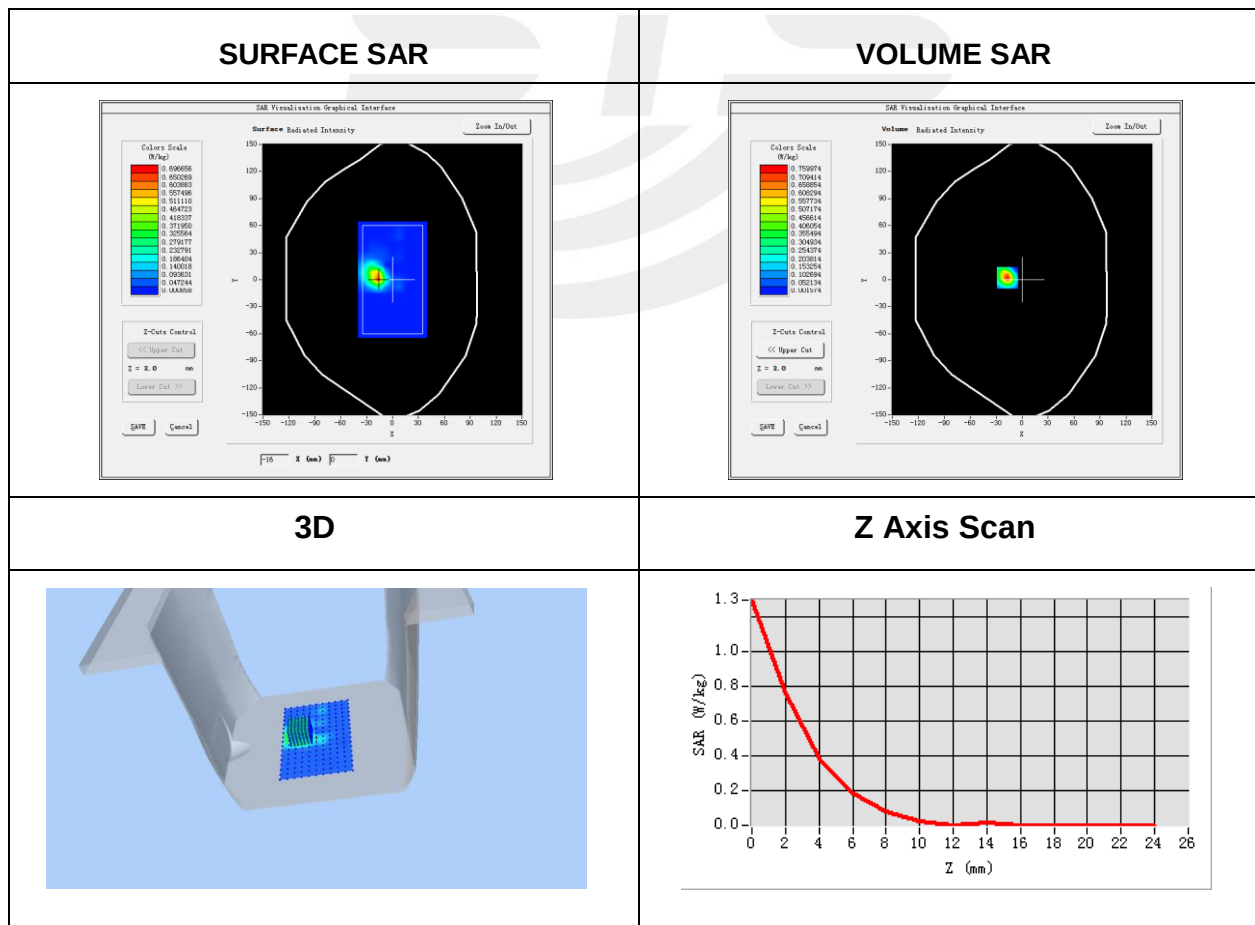


**Plot 19: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-30                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 1.92                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back Side                                                           |
| Band                              | IEEE 802.11ac ISM                                                   |
| Antenna                           | B                                                                   |
| Signal                            | IEEE802.ac (Crest factor: 1.0)                                      |
| Frequency (MHz)                   | 5190                                                                |
| Relative permittivity (real part) | 49.73                                                               |
| Conductivity (S/m)                | 5.37                                                                |
| Variation (%)                     | 3.50                                                                |

Maximum location: X=16.00, Y=-40.00  
SAR Peak: 0.59 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.060073 |
| SAR 1g (W/Kg)  | 0.171585 |

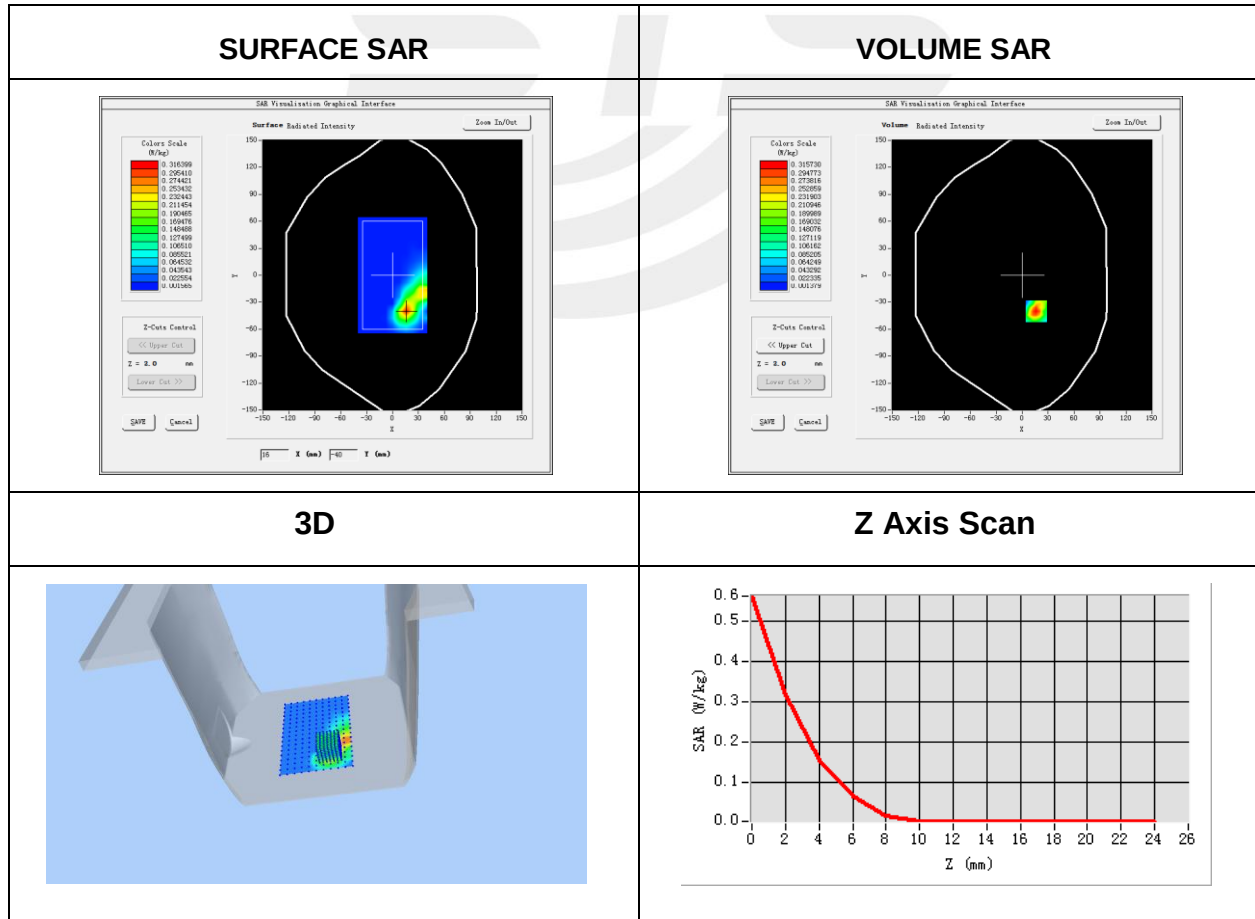



**Plot 20: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-26                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 2.12                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back Side                                                           |
| Band                              | IEEE 802.11a ISM                                                    |
| Antenna                           | A                                                                   |
| Signal                            | IEEE802.a (Crest factor: 1.0)                                       |
| Frequency (MHz)                   | 5300                                                                |
| Relative permittivity (real part) | 48.15                                                               |
| Conductivity (S/m)                | 5.62                                                                |
| Variation (%)                     | 2.14                                                                |

Maximum location: X=0.00, Y=25.00

SAR Peak: 2.67 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.224479 |
| SAR 1g (W/Kg)  | 0.771029 |

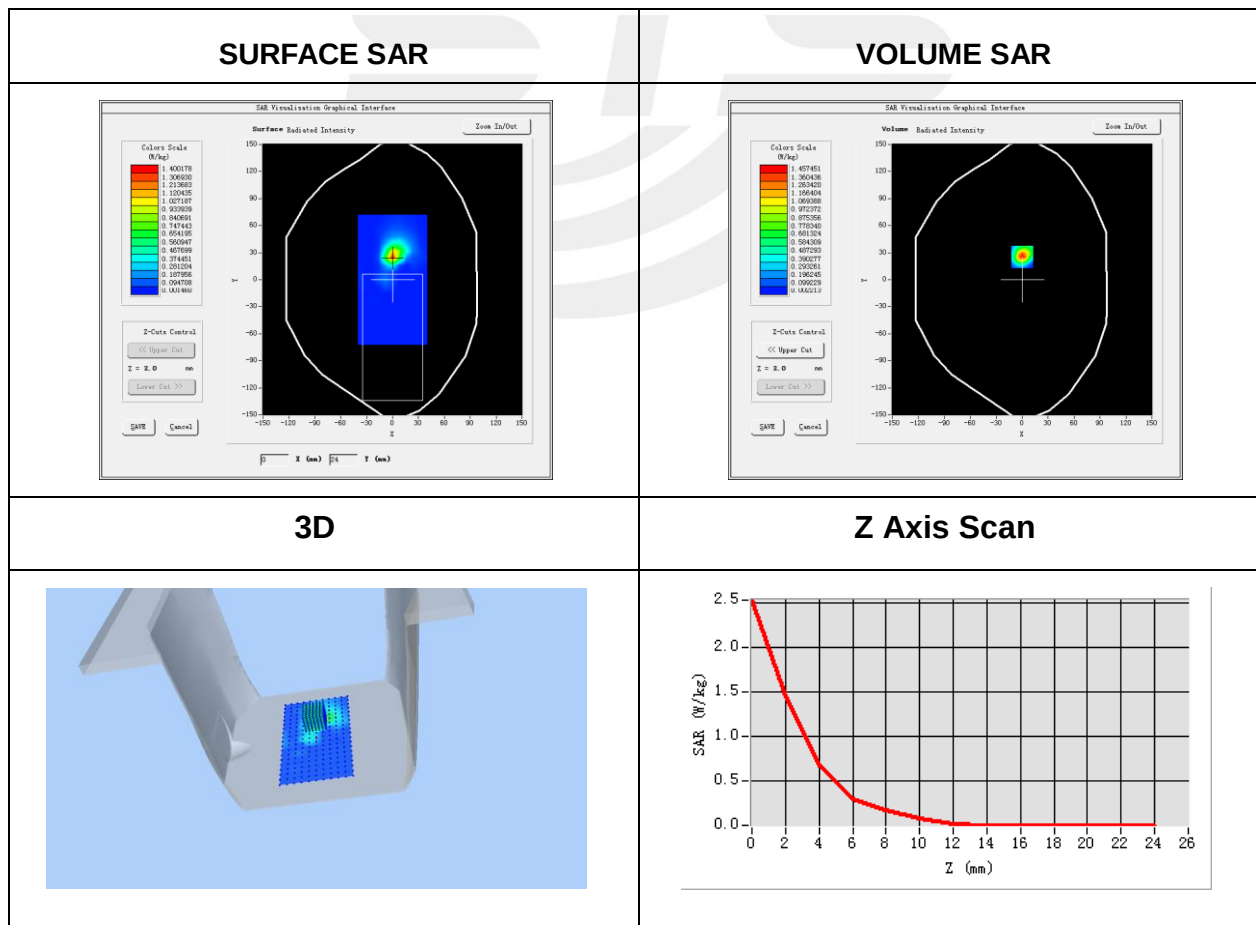



**Plot 21: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-26                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 2.12                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back                                                                |
| Band                              | IEEE 802.11a ISM                                                    |
| Antenna                           | B                                                                   |
| Signal                            | IEEE802.a (Crest factor: 1.0)                                       |
| Frequency (MHz)                   | 5260                                                                |
| Relative permittivity (real part) | 48.15                                                               |
| Conductivity (S/m)                | 5.62                                                                |
| Variation (%)                     | -1.06                                                               |

Maximum location: X=17.00, Y=-45.00

SAR Peak: 1.99 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.214340 |
| SAR 1g (W/Kg)  | 0.613819 |

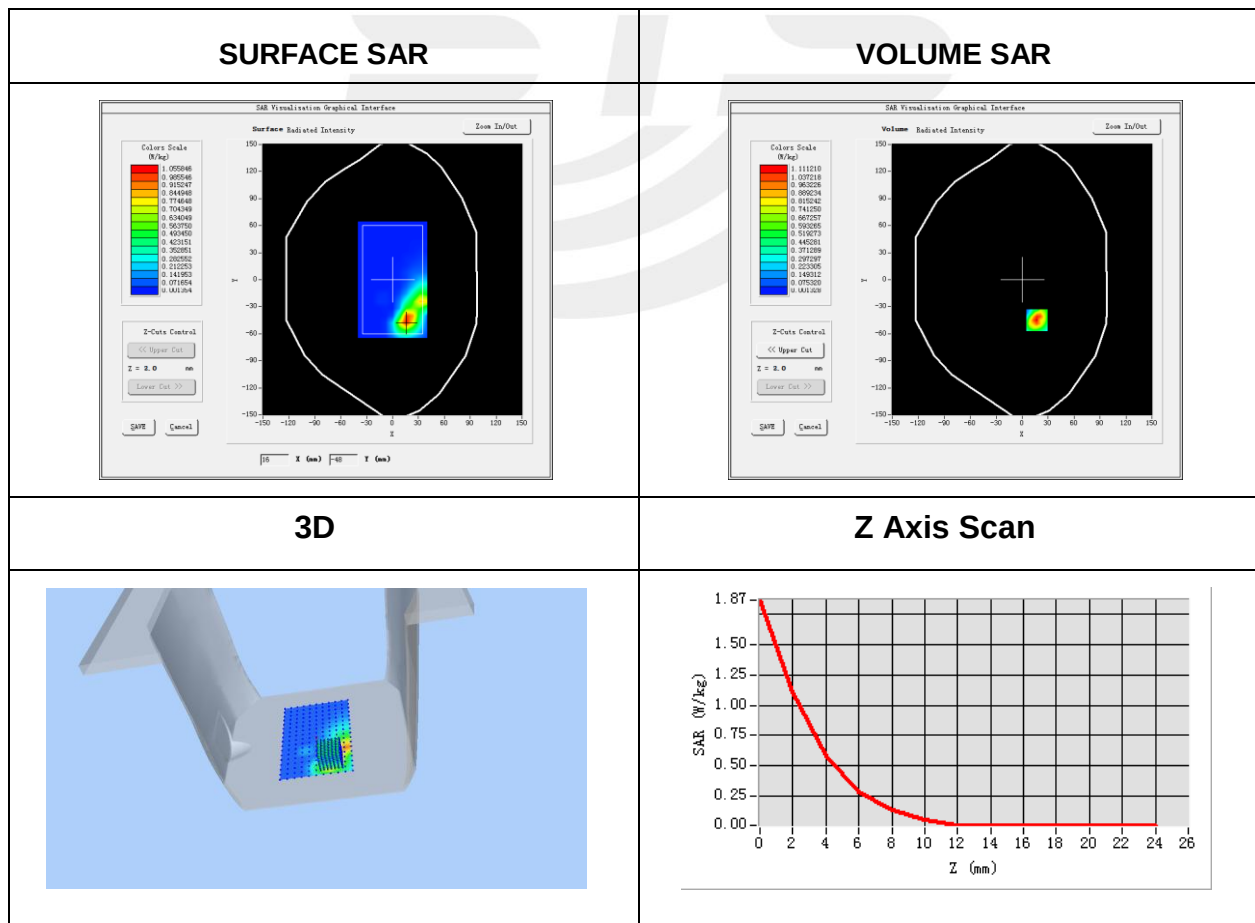




# Plot 22: DUT: Rugged Tablet PC; EUT Model: M101P-LA

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-26                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 2.12                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back Side                                                           |
| Band                              | IEEE 802.11n ISM                                                    |
| Antenna                           | A                                                                   |
| Signal                            | IEEE802.n (Crest factor: 1.0)                                       |
| Frequency (MHz)                   | 5270                                                                |
| Relative permittivity (real part) | 48.15                                                               |
| Conductivity (S/m)                | 5.62                                                                |
| Variation (%)                     | 1.16                                                                |

Maximum location: X=-25.00, Y=-8.00  
SAR Peak: 1.12 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.088221 |
| SAR 1g (W/Kg)  | 0.300890 |

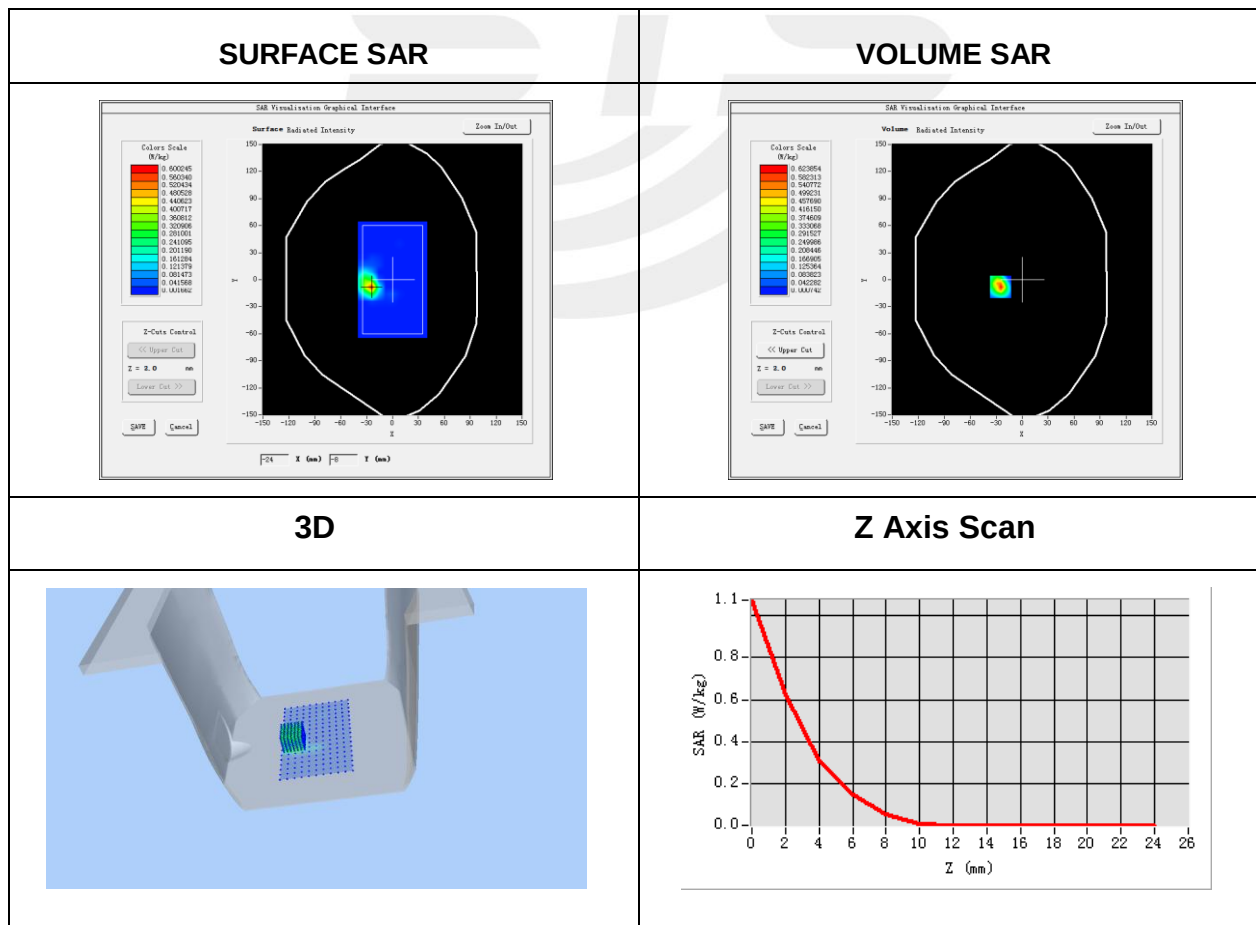



**Plot 23: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-26                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 2.12                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back Side                                                           |
| Band                              | IEEE 802.11ac ISM                                                   |
| Antenna                           | B                                                                   |
| Signal                            | IEEE802.ac (Crest factor: 1.0)                                      |
| Frequency (MHz)                   | 5270                                                                |
| Relative permittivity (real part) | 48.15                                                               |
| Conductivity (S/m)                | 5.62                                                                |
| Variation (%)                     | 2.92                                                                |

Maximum location: X=23.00, Y=-33.00

SAR Peak: 0.56 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.053266 |
| SAR 1g (W/Kg)  | 0.150236 |

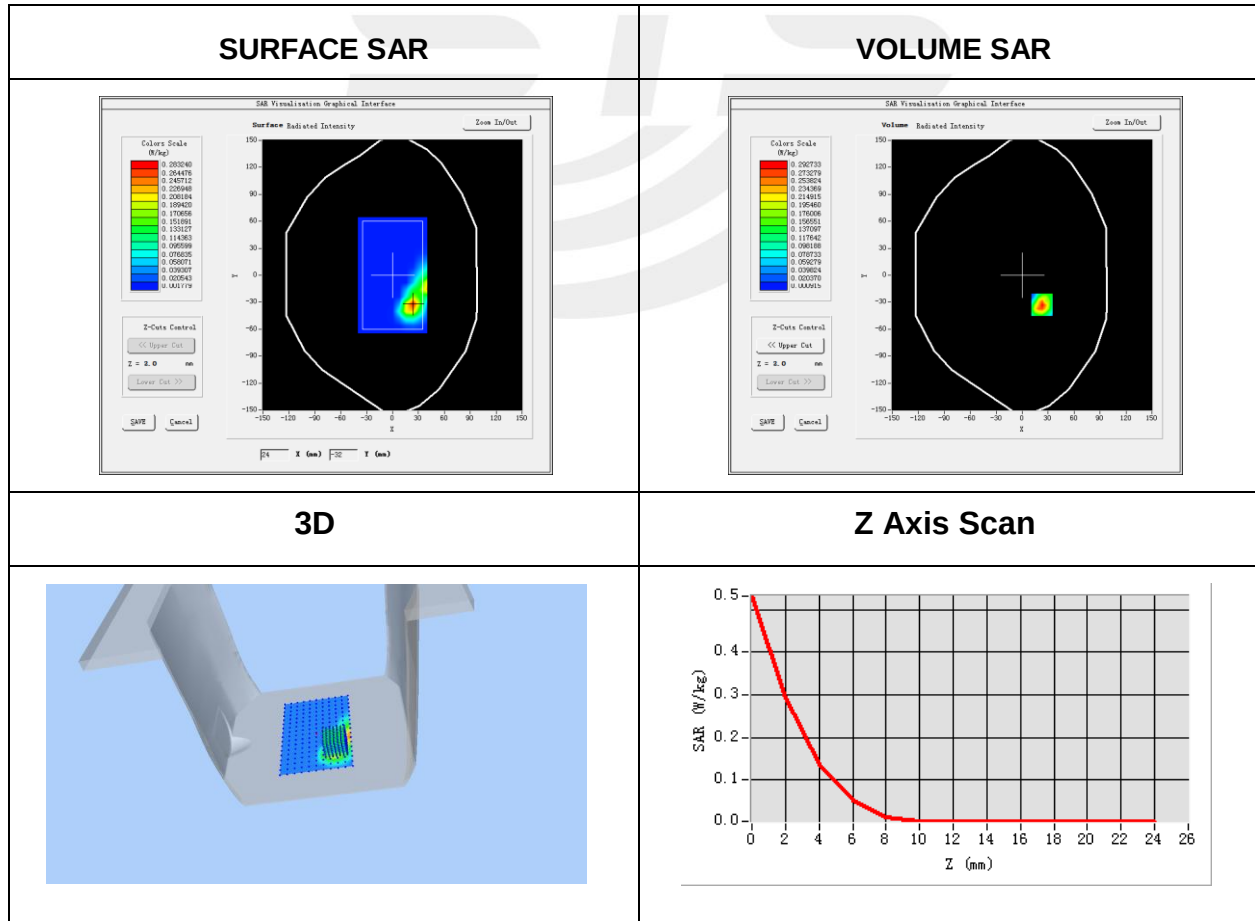





**Plot 24: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-27                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 2.21                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back Side                                                           |
| Band                              | IEEE 802.11a ISM                                                    |
| Antenna                           | A                                                                   |
| Signal                            | IEEE802.a (Crest factor: 1.0)                                       |
| Frequency (MHz)                   | 5700                                                                |
| Relative permittivity (real part) | 49.16                                                               |
| Conductivity (S/m)                | 5.64                                                                |
| Variation (%)                     | -1.63                                                               |

Maximum location: X=7.00, Y=30.00

SAR Peak: 2.71 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.237910 |
| SAR 1g (W/Kg)  | 0.786871 |

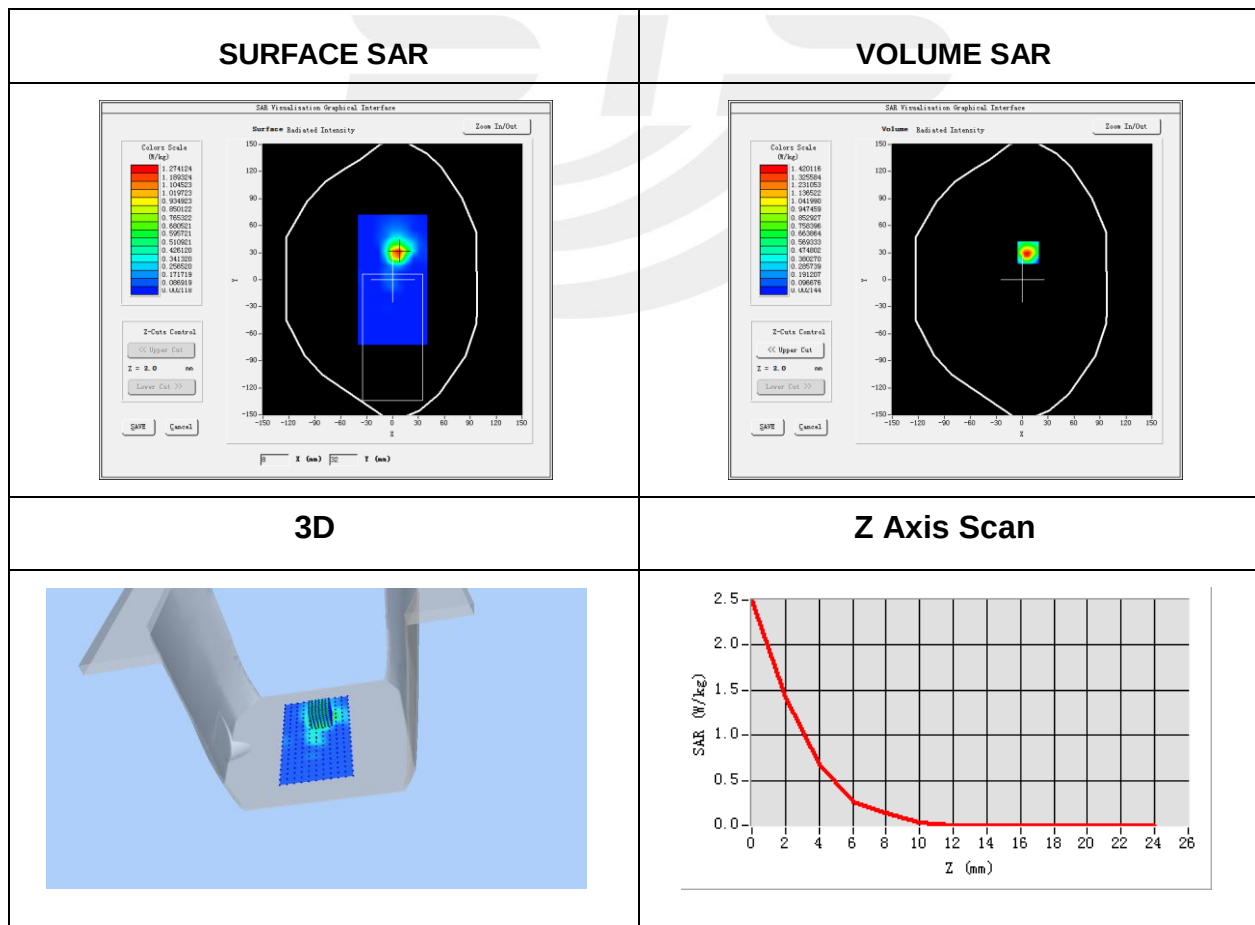





**Plot 25: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-27                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 2.21                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back                                                                |
| Band                              | IEEE 802.11a ISM                                                    |
| Antenna                           | B                                                                   |
| Signal                            | IEEE802.a (Crest factor: 1.0)                                       |
| Frequency (MHz)                   | 5580                                                                |
| Relative permittivity (real part) | 49.16                                                               |
| Conductivity (S/m)                | 5.64                                                                |
| Variation (%)                     | 2.98                                                                |

Maximum location: X=1.00, Y=-26.00

SAR Peak: 2.21 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.229386 |
| SAR 1g (W/Kg)  | 0.660883 |

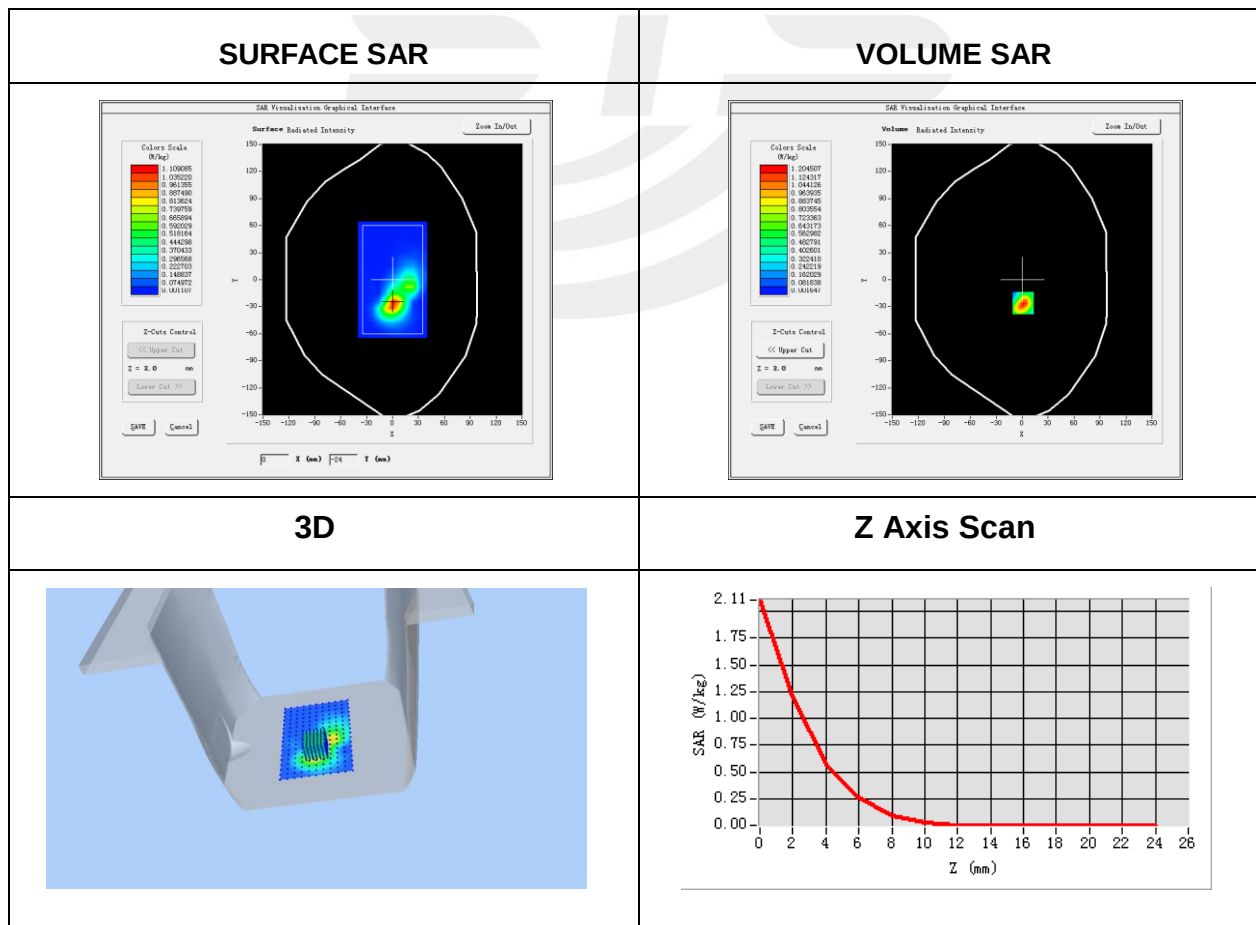



**Plot 26: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-27                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 2.21                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back Side                                                           |
| Band                              | IEEE 802.11ac ISM                                                   |
| Antenna                           | A                                                                   |
| Signal                            | IEEE802.ac (Crest factor: 1.0)                                      |
| Frequency (MHz)                   | 5510                                                                |
| Relative permittivity (real part) | 49.16                                                               |
| Conductivity (S/m)                | 5.64                                                                |
| Variation (%)                     | -3.76                                                               |

Maximum location: X=17.00, Y=-49.00

SAR Peak: 0.92 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.091045 |
| SAR 1g (W/Kg)  | 0.257212 |

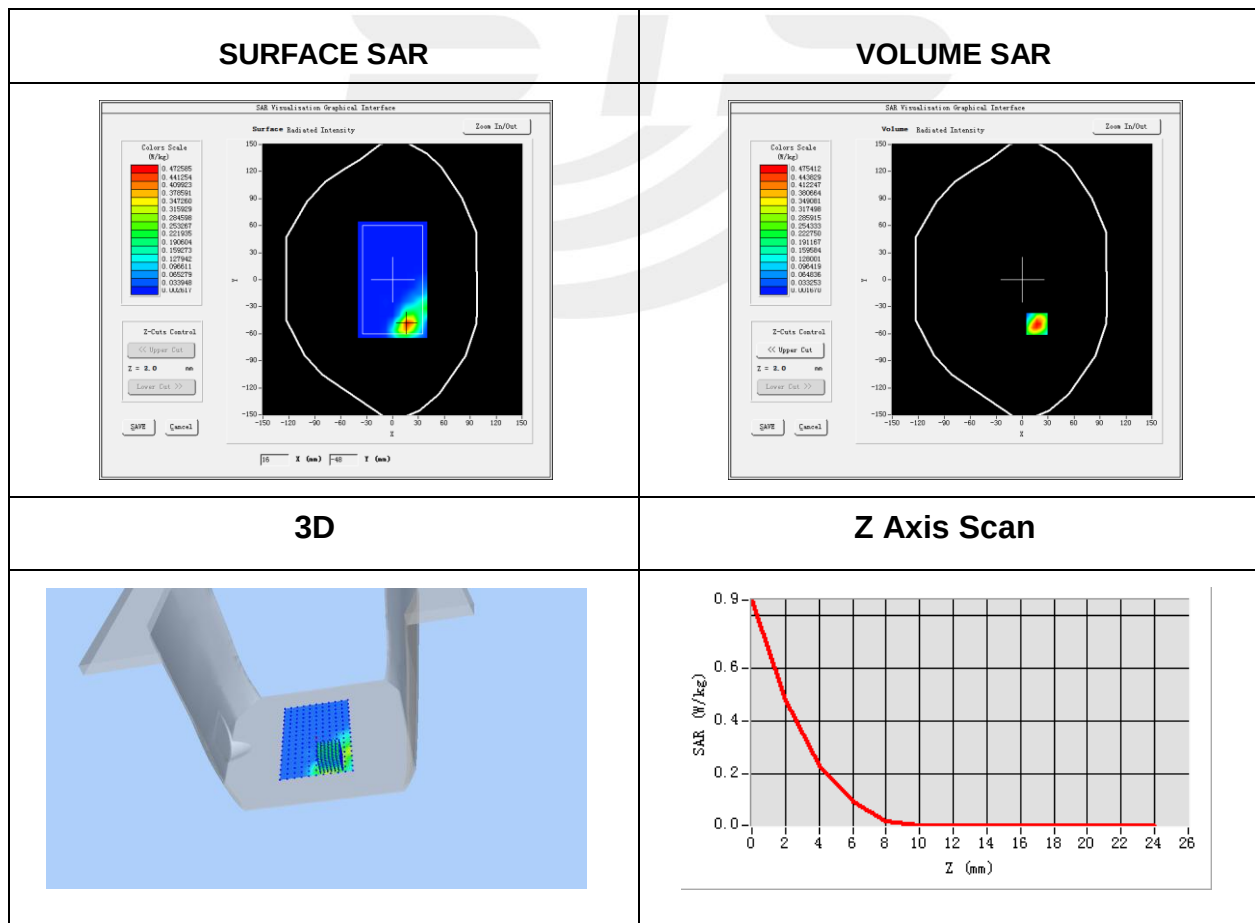


**Plot 27: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-27                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 2.21                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back Side                                                           |
| Band                              | IEEE 802.11ac ISM                                                   |
| Antenna                           | B                                                                   |
| Signal                            | IEEE802.ac (Crest factor: 1.0)                                      |
| Frequency (MHz)                   | 5510                                                                |
| Relative permittivity (real part) | 49.16                                                               |
| Conductivity (S/m)                | 5.64                                                                |
| Variation (%)                     | -0.66                                                               |

Maximum location: X=-16.00, Y=-9.00

SAR Peak: 1.19 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.101119 |
| SAR 1g (W/Kg)  | 0.330992 |

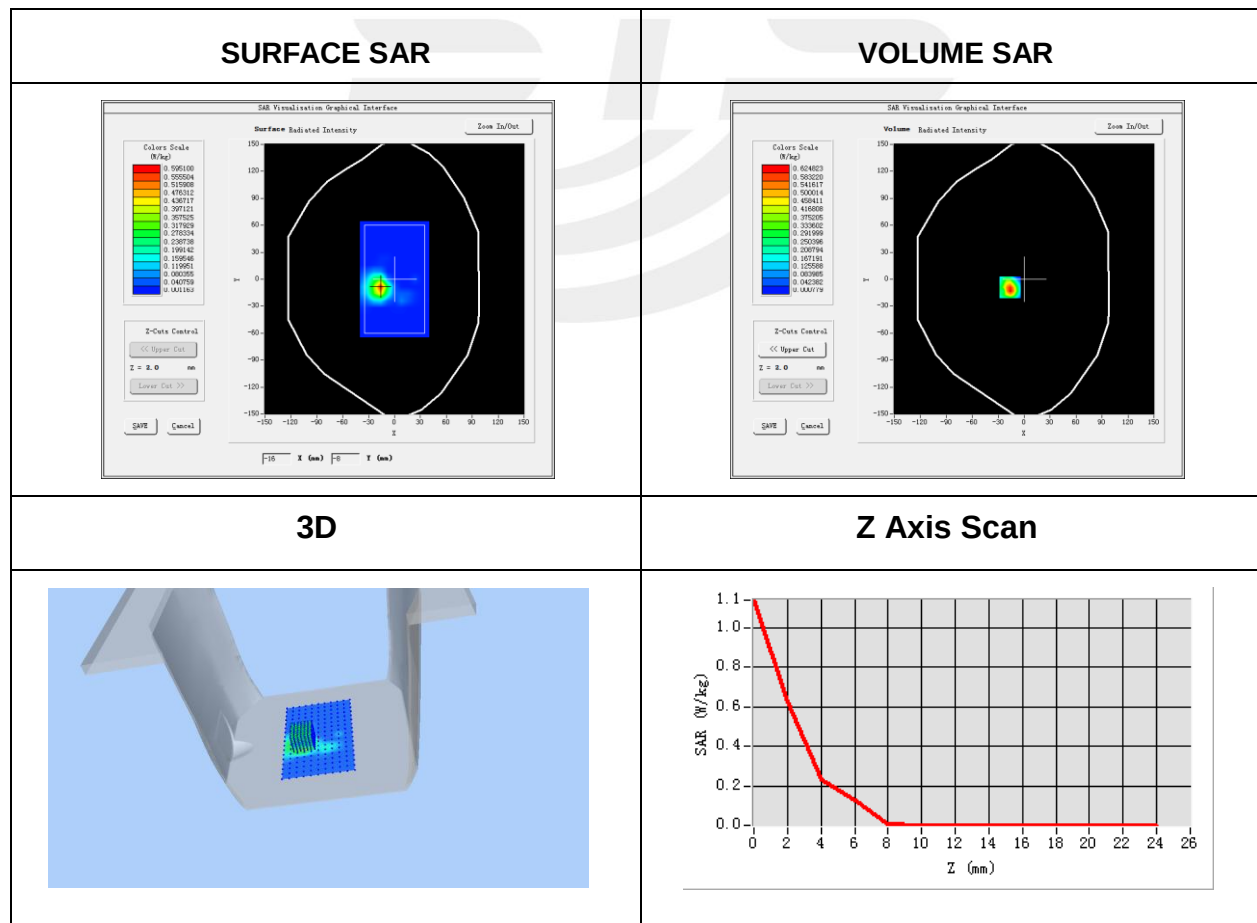




# Plot 28: DUT: Rugged Tablet PC; EUT Model: M101P-LA

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-16                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 2.16                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back Side                                                           |
| Band                              | IEEE 802.11a ISM                                                    |
| Antenna                           | A                                                                   |
| Signal                            | IEEE802.a (Crest factor: 1.0)                                       |
| Frequency (MHz)                   | 5825                                                                |
| Relative permittivity (real part) | 48.95                                                               |
| Conductivity (S/m)                | 6.14                                                                |
| Variation (%)                     | -1.86                                                               |

Maximum location: X=-6.00, Y=29.00

SAR Peak: 2.75 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.231103 |
| SAR 1g (W/Kg)  | 0.731019 |

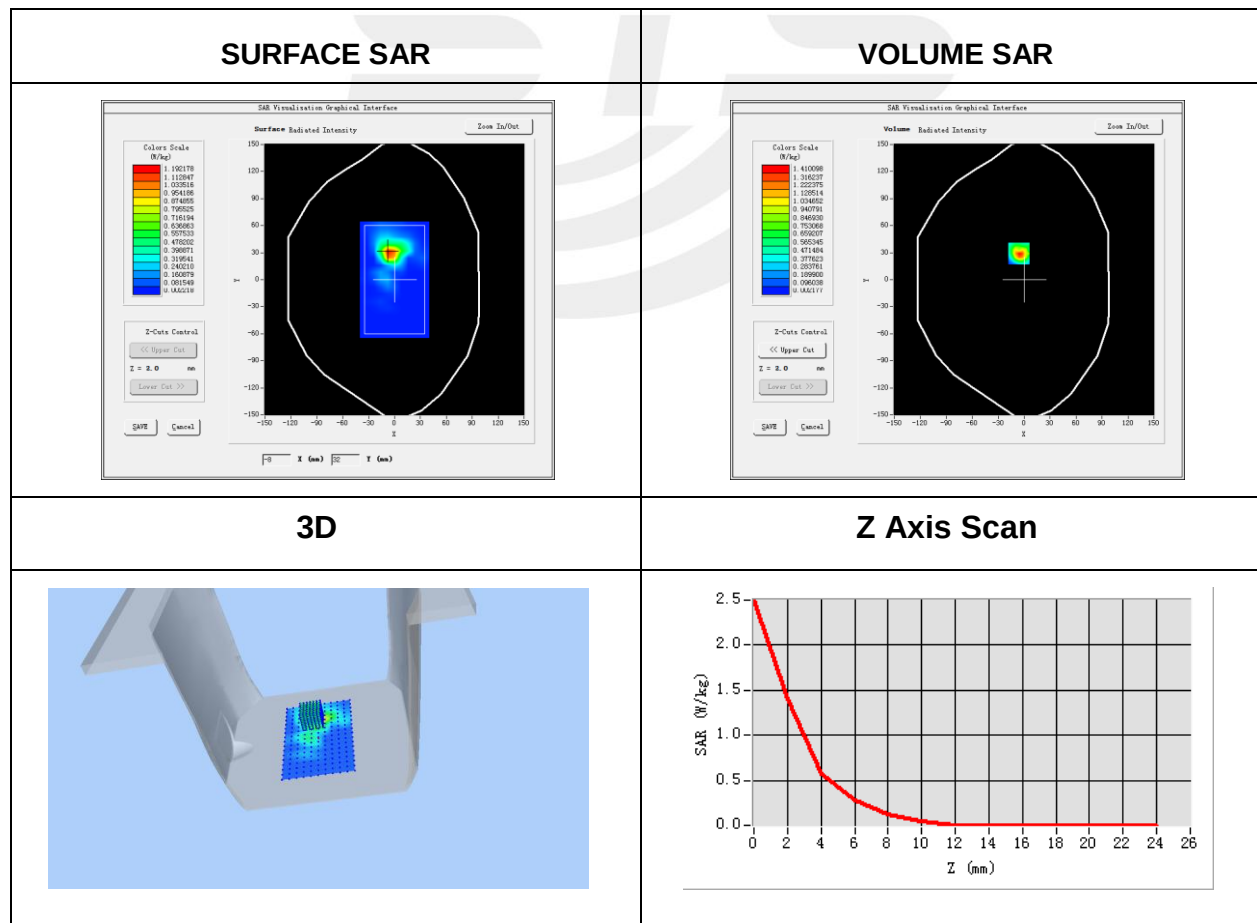



**Plot 29: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-16                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 2.16                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back                                                                |
| Band                              | IEEE 802.11a ISM                                                    |
| Antenna                           | B                                                                   |
| Signal                            | IEEE802.a (Crest factor: 1.0)                                       |
| Frequency (MHz)                   | 5825                                                                |
| Relative permittivity (real part) | 48.95                                                               |
| Conductivity (S/m)                | 6.14                                                                |
| Variation (%)                     | 2.15                                                                |

Maximum location: X=10.00, Y=-38.00

SAR Peak: 1.84 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.149639 |
| SAR 1g (W/Kg)  | 0.505407 |

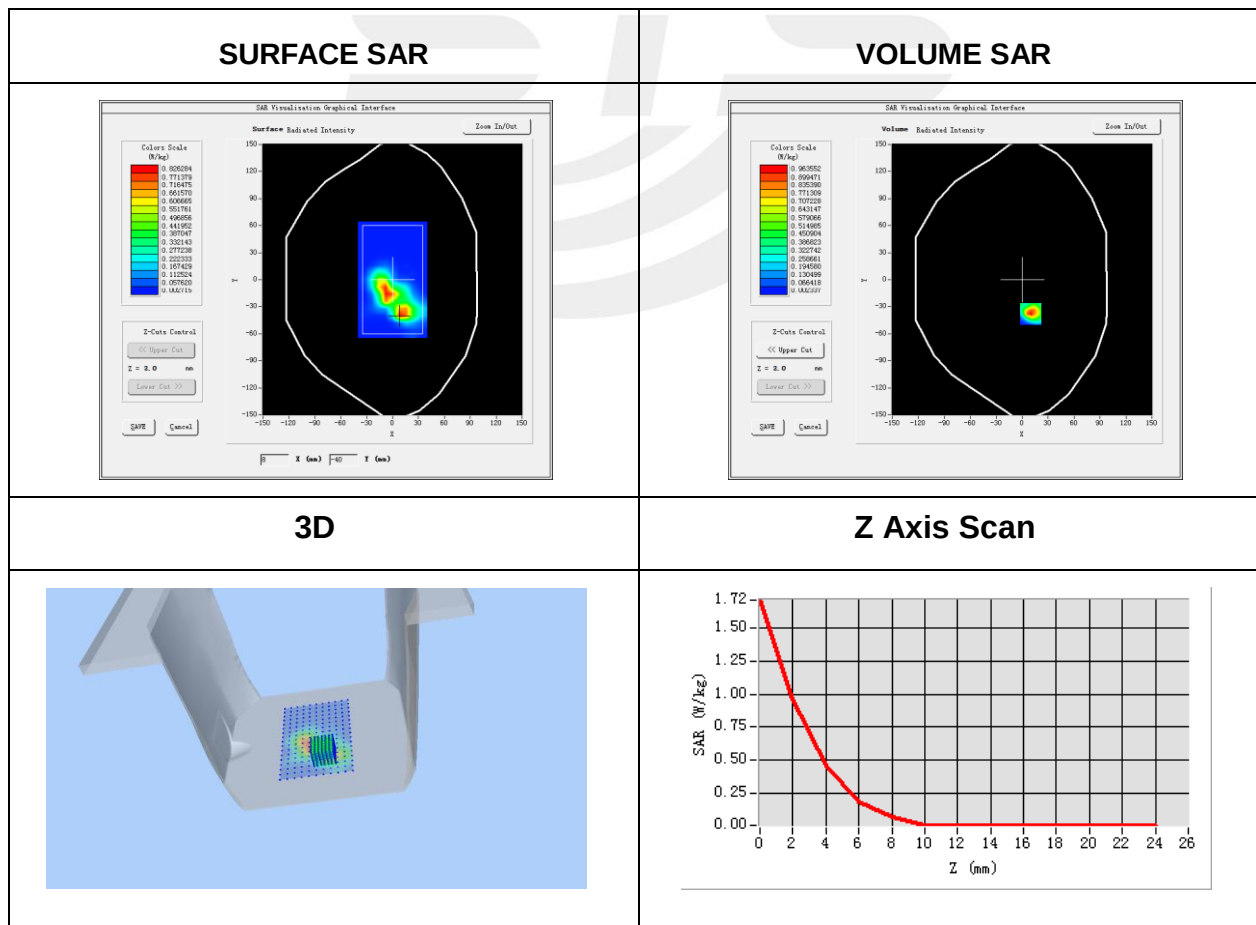



**Plot 30: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-16                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 2.16                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back Side                                                           |
| Band                              | IEEE 802.11n ISM                                                    |
| Antenna                           | A                                                                   |
| Signal                            | IEEE802.n (Crest factor: 1.0)                                       |
| Frequency (MHz)                   | 5785                                                                |
| Relative permittivity (real part) | 48.95                                                               |
| Conductivity (S/m)                | 6.14                                                                |
| Variation (%)                     | -1.19                                                               |

Maximum location: X=9.00, Y=32.00

SAR Peak: 1.49 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.114684 |
| SAR 1g (W/Kg)  | 0.391277 |

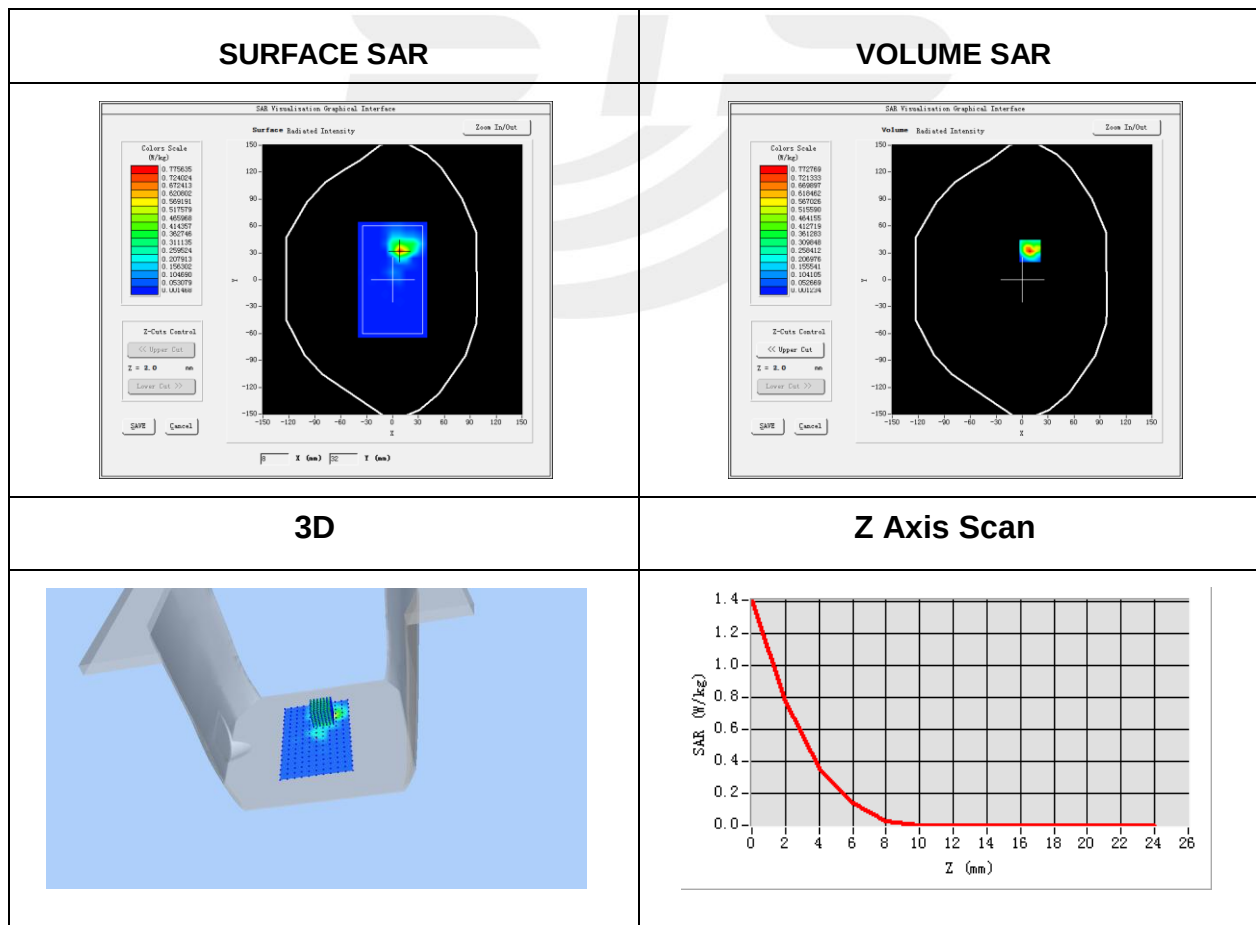


**Plot 31: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-16                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 2.16                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back Side                                                           |
| Band                              | IEEE 802.11n ISM                                                    |
| Antenna                           | B                                                                   |
| Signal                            | IEEE802.n (Crest factor: 1.0)                                       |
| Frequency (MHz)                   | 5785                                                                |
| Relative permittivity (real part) | 48.95                                                               |
| Conductivity (S/m)                | 6.14                                                                |
| Variation (%)                     | 2.73                                                                |

Maximum location: X=-10.00, Y=1.00

SAR Peak: 1.07 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.109506 |
| SAR 1g (W/Kg)  | 0.311701 |

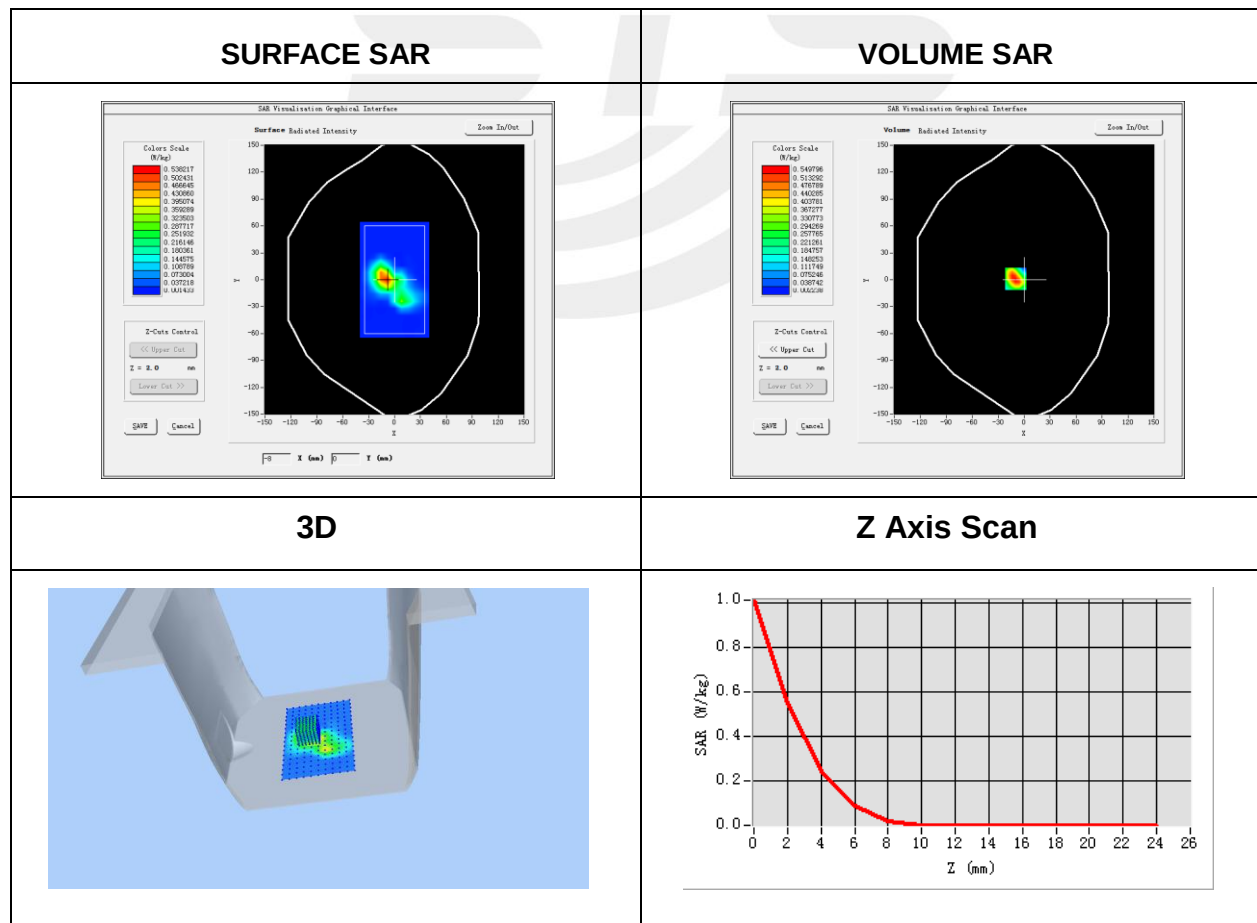





**Plot 32: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2020-03-10                                                          |
| Probe                             | SN 41/18 EPGO334                                                    |
| ConvF                             | 2.02                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| Zoom Scan                         | 7x7x12,dx=4mm dy=4mm dz=2mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Back Side                                                           |
| Band                              | Bluetooth                                                           |
| Signal                            | GSFK                                                                |
| Frequency (MHz)                   | 2441                                                                |
| Relative permittivity (real part) | 52.53                                                               |
| Conductivity (S/m)                | 1.98                                                                |
| Variation (%)                     | 2.14                                                                |

Maximum location: X=-9.00, Y=0.00

SAR Peak: 0.06 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.007641 |
| SAR 1g (W/Kg)  | 0.023270 |

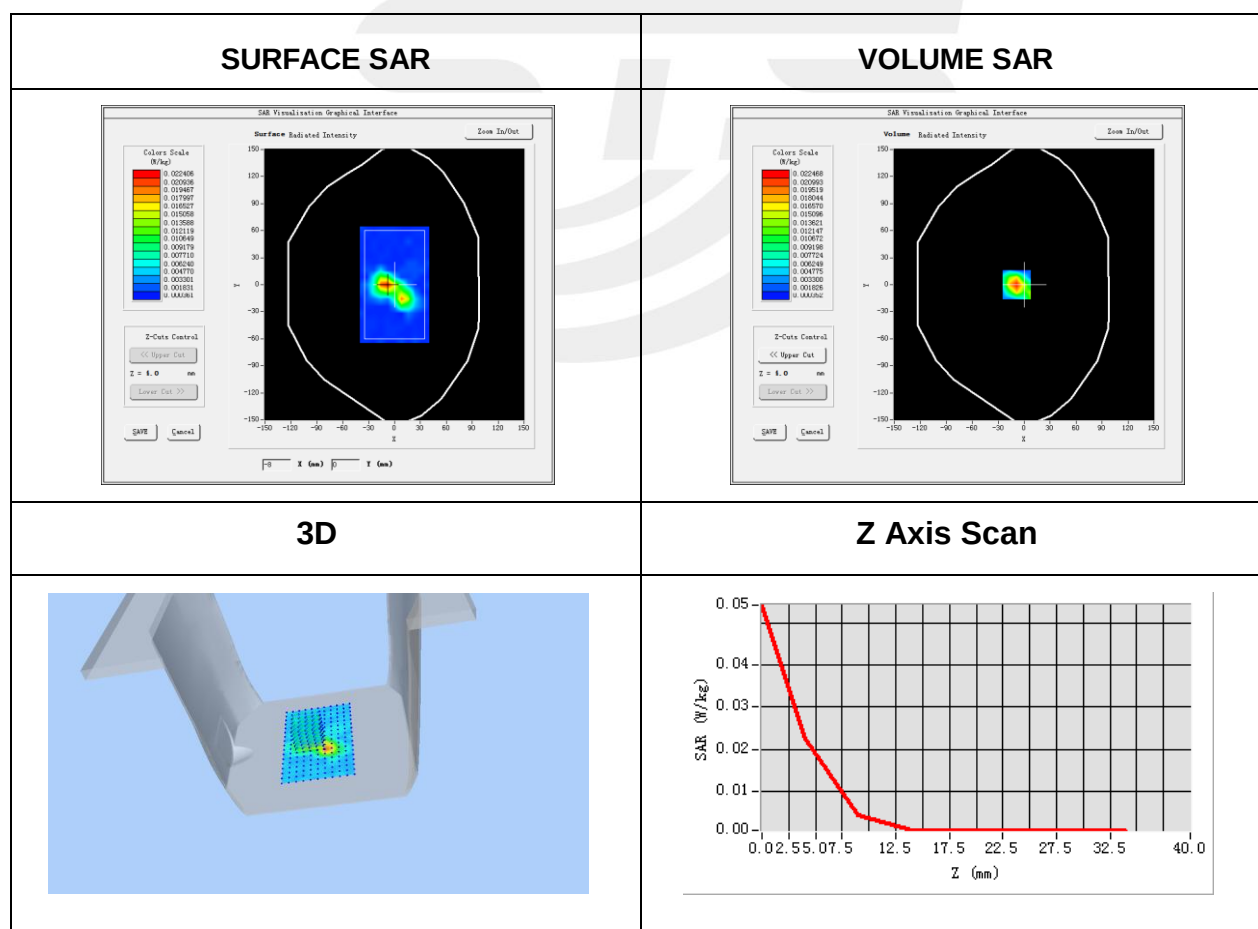


**Plot 33: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-02                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.88                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | WCDMA II                                                           |
| Channels                          | Middle                                                             |
| Signal                            | WCDMA (Crest factor: 1.0)                                          |
| Frequency (MHz)                   | 1880.0                                                             |
| Relative permittivity (real part) | 54.11                                                              |
| Conductivity (S/m)                | 1.55                                                               |
| Variation (%)                     | 1.07                                                               |

Maximum location: X=-5.00, Y=30.00

SAR Peak: 1.01 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.327921 |
| SAR 1g (W/Kg)  | 0.624667 |

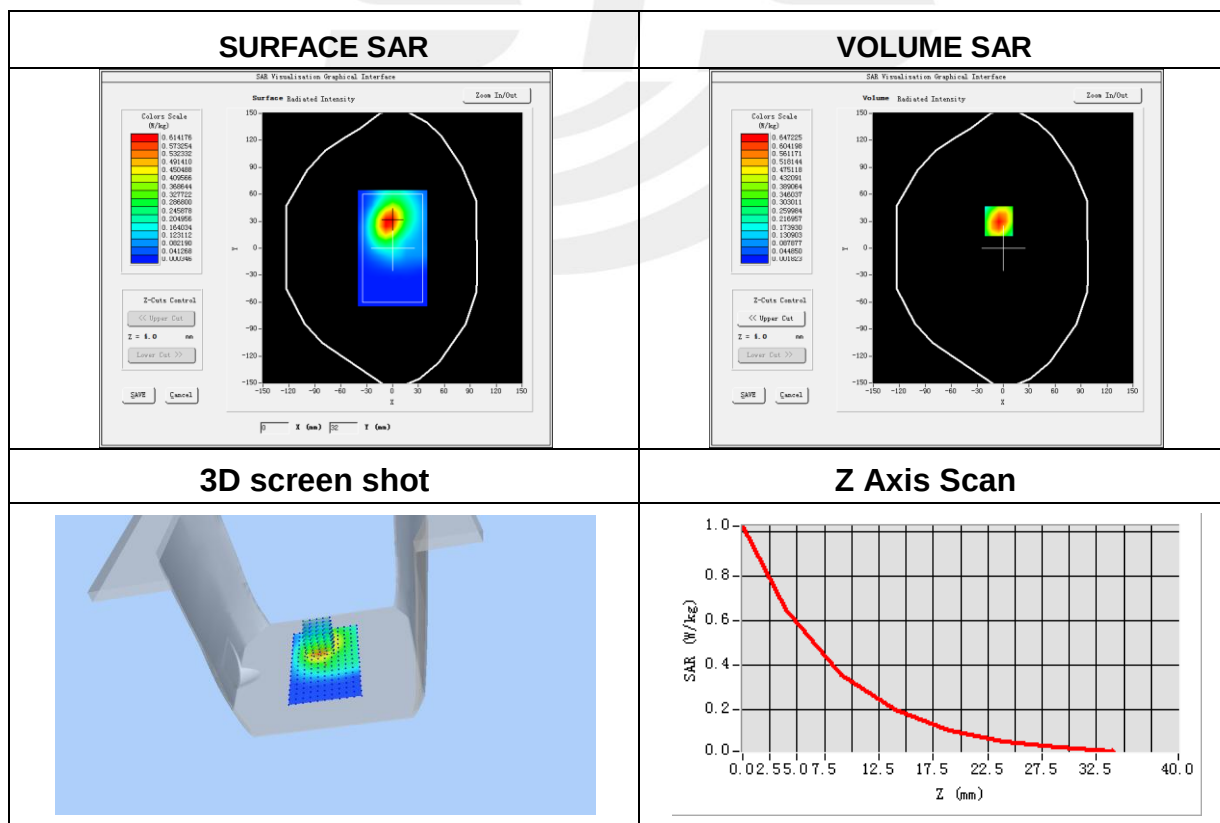


**Plot 34: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-07                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.66                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | WCDMA IV                                                           |
| Channels                          | High                                                               |
| Signal                            | WCDMA (Crest factor: 1.0)                                          |
| Frequency (MHz)                   | 1752.4                                                             |
| Relative permittivity (real part) | 53.69                                                              |
| Conductivity (S/m)                | 1.54                                                               |
| Variation (%)                     | 3.78                                                               |

Maximum location: X=-16.00, Y=16.00

SAR Peak: 1.03 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.362971 |
| SAR 1g (W/Kg)  | 0.654341 |

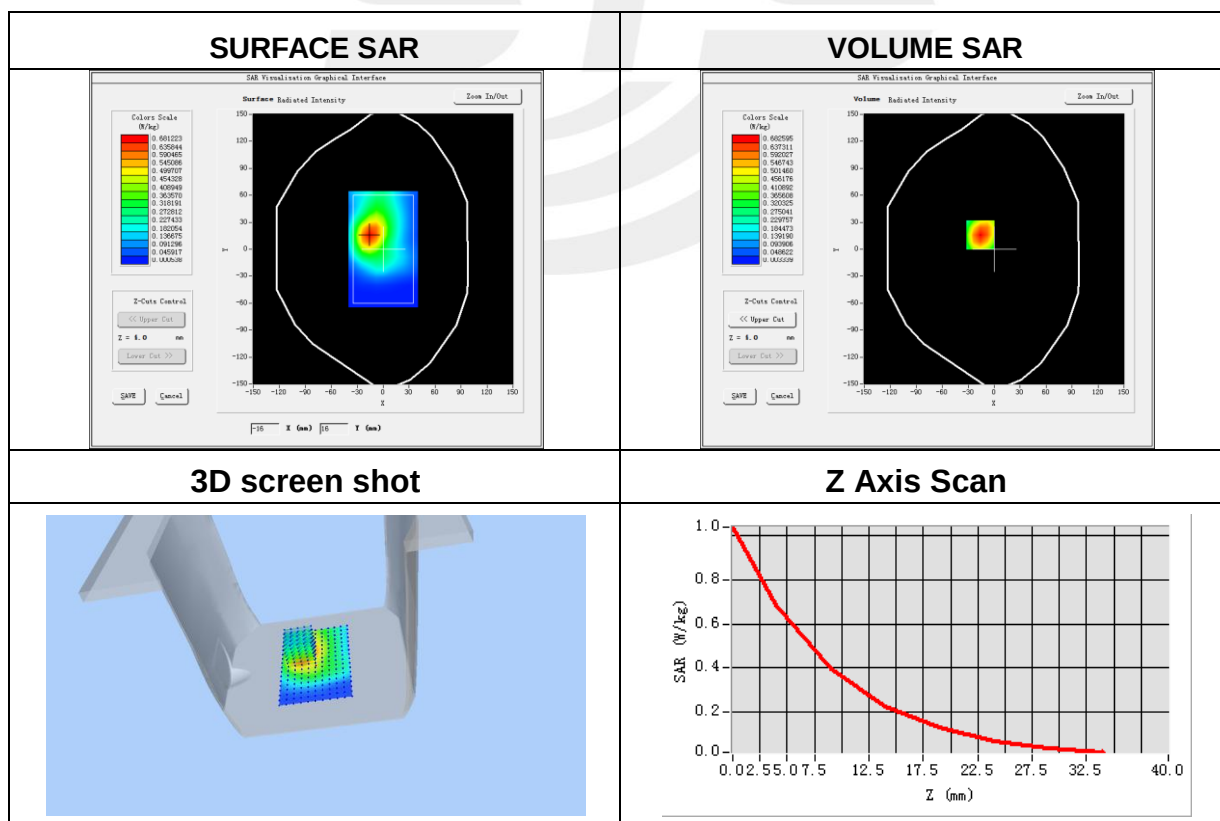


**Plot 35: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-03                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.53                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | WCDMA V                                                            |
| Channels                          | Middle                                                             |
| Signal                            | WCDMA (Crest factor: 1.0)                                          |
| Frequency (MHz)                   | 836.6                                                              |
| Relative permittivity (real part) | 54.76                                                              |
| Conductivity (S/m)                | 0.95                                                               |
| Variation (%)                     | 1.22                                                               |

Maximum location: X=20.00, Y=5.00

SAR Peak: 0.80 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.315213 |
| SAR 1g (W/Kg)  | 0.531292 |

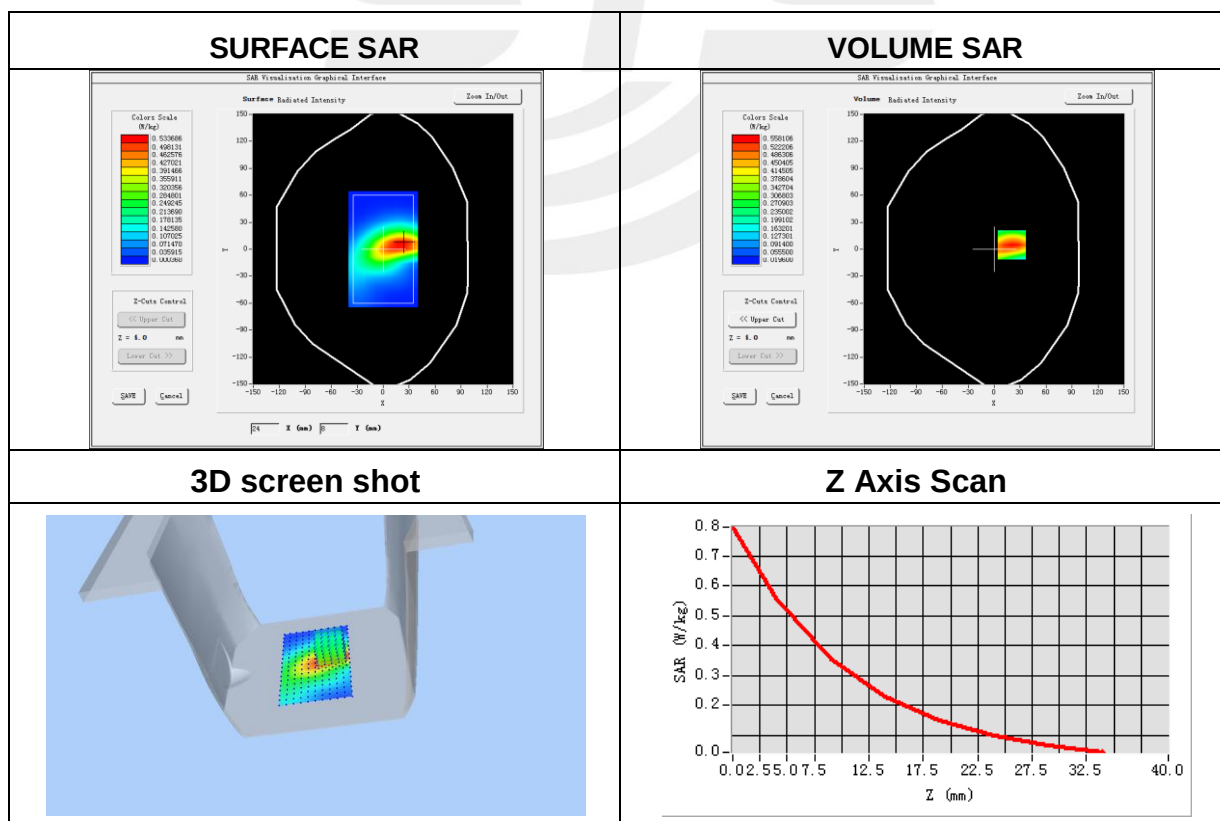




### Plot 36: DUT: Rugged Tablet PC; EUT Model: M101P-LA

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-07                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.66                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | LTE Band 4 (RB 1)                                                  |
| Channels                          | Middle                                                             |
| Signal                            | LTE (Crest factor: 1.0)                                            |
| Frequency (MHz)                   | 1732.5                                                             |
| Relative permittivity (real part) | 53.69                                                              |
| Conductivity (S/m)                | 1.54                                                               |
| Variation (%)                     | 1.10                                                               |

Maximum location: X=-3.00, Y=-12.00

SAR Peak: 0.88 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.318637 |
| SAR 1g (W/Kg)  | 0.560539 |

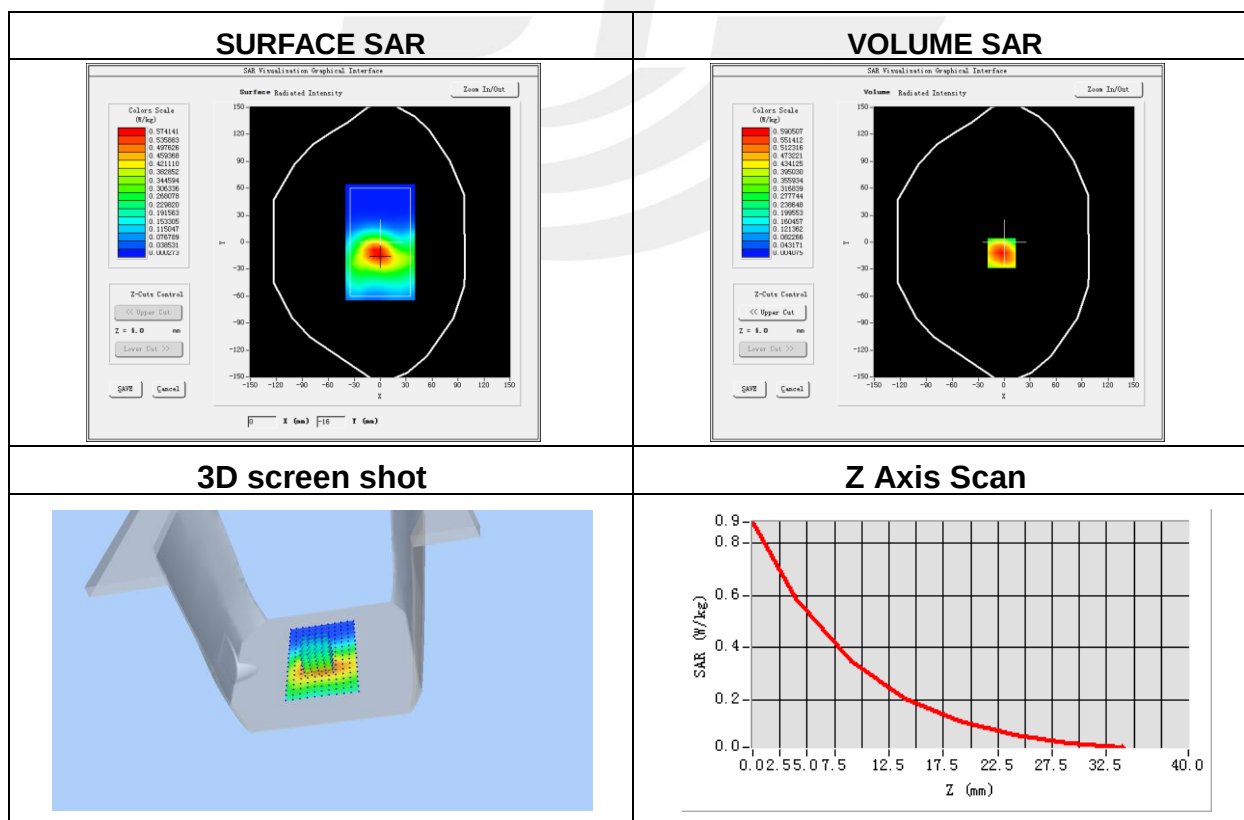



**Plot 37: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-09                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.92                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | LTE Band 7 (RB 1)                                                  |
| Channels                          | Middle                                                             |
| Signal                            | LTE (Crest factor: 1.0)                                            |
| Frequency (MHz)                   | 2560                                                               |
| Relative permittivity (real part) | 53.08                                                              |
| Conductivity (S/m)                | 2.07                                                               |
| Variation (%)                     | -1.42                                                              |

Maximum location: X=0.00, Y=-5.00

SAR Peak: 0.86 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.241600 |
| SAR 1g (W/Kg)  | 0.489829 |

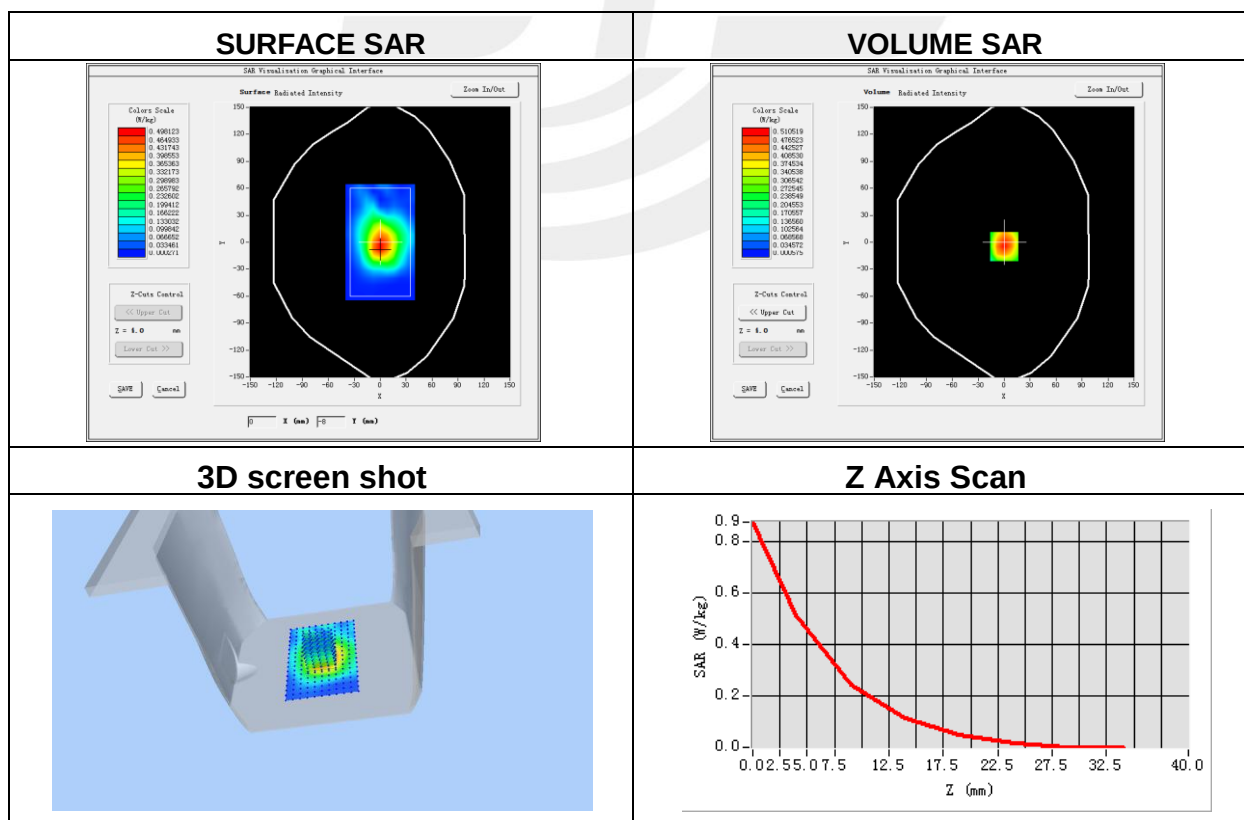



**Plot 38: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-01                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.49                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | LTE Band 12 (RB 1)                                                 |
| Channels                          | Middle                                                             |
| Signal                            | LTE (Crest factor: 1.0)                                            |
| Frequency (MHz)                   | 707.5                                                              |
| Relative permittivity (real part) | 56.32                                                              |
| Conductivity (S/m)                | 0.98                                                               |
| Variation (%)                     | 3.81                                                               |

Maximum location: X=-2.00, Y=10.00

SAR Peak: 0.77 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.329363 |
| SAR 1g (W/Kg)  | 0.529559 |

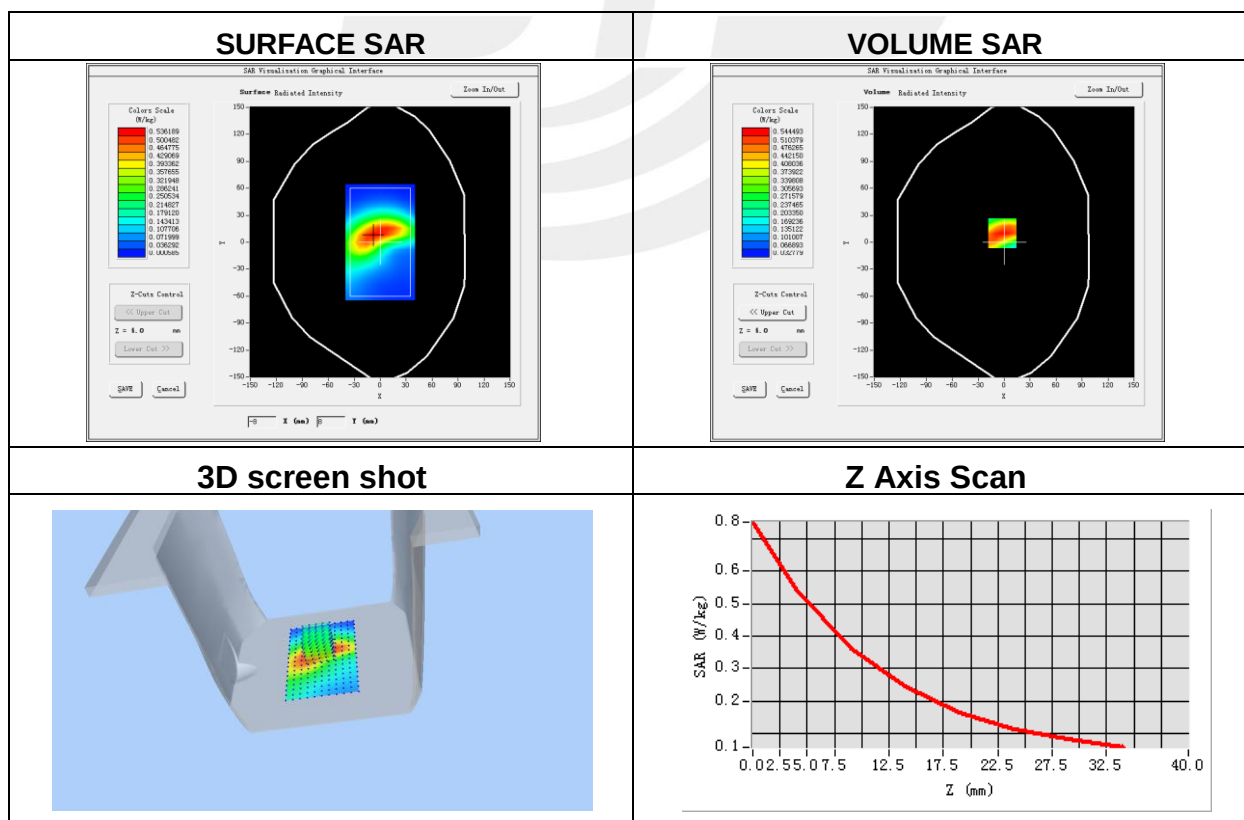





**Plot 39: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-01                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.49                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | LTE Band 13 (RB 1)                                                 |
| Channels                          | Middle                                                             |
| Signal                            | LTE (Crest factor: 1.0)                                            |
| Frequency (MHz)                   | 782                                                                |
| Relative permittivity (real part) | 56.32                                                              |
| Conductivity (S/m)                | 0.98                                                               |
| Variation (%)                     | 2.66                                                               |

Maximum location: X=3.00, Y=11.00

SAR Peak: 0.86 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.354451 |
| SAR 1g (W/Kg)  | 0.582035 |

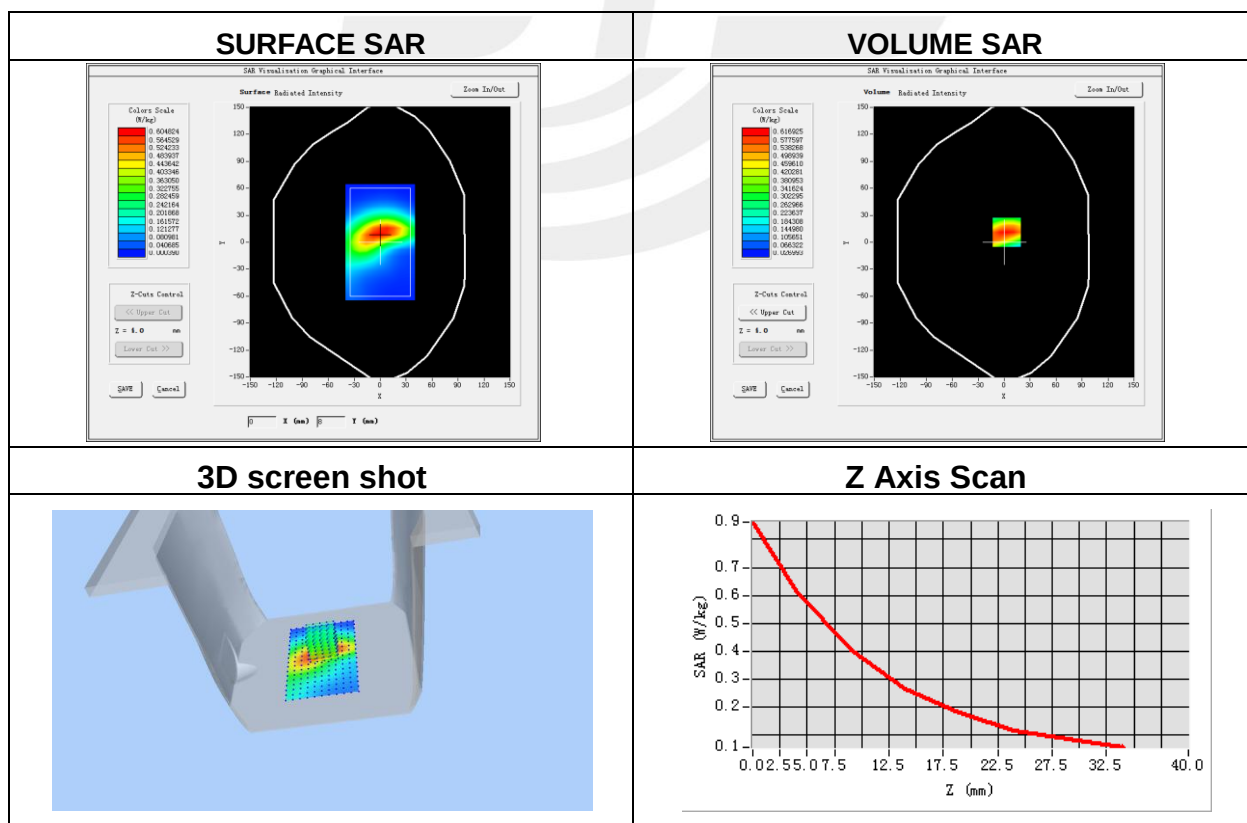


**Plot 40: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-02                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.88                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | LTE Band 25 (RB 1)                                                 |
| Channels                          | Middle                                                             |
| Signal                            | LTE (Crest factor: 1.0)                                            |
| Frequency (MHz)                   | 1882.5                                                             |
| Relative permittivity (real part) | 54.11                                                              |
| Conductivity (S/m)                | 1.55                                                               |
| Variation (%)                     | 0.09                                                               |

Maximum location: X=0.00, Y=-1.00

SAR Peak: 1.07 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.351968 |
| SAR 1g (W/Kg)  | 0.655794 |

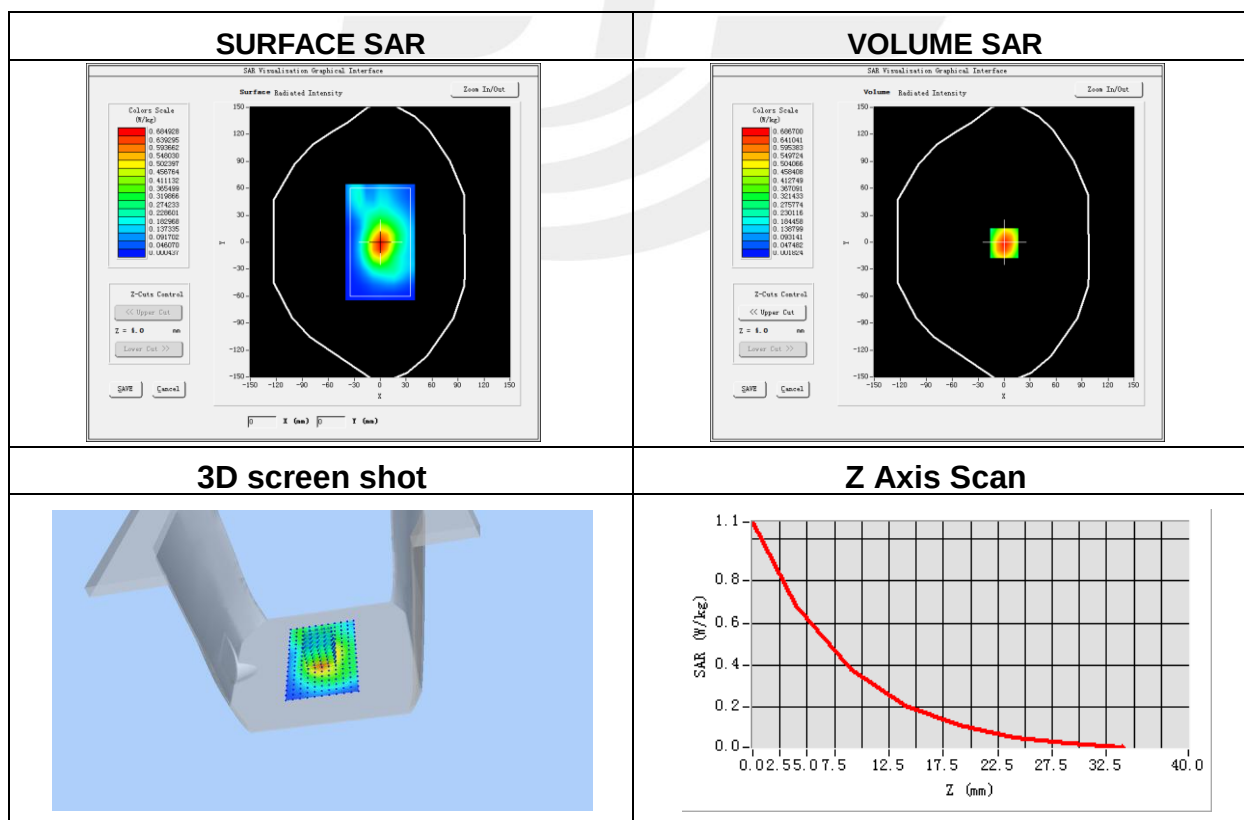


**Plot 41: DUT: Rugged Tablet PC; EUT Model: M101P-LA**

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2020-04-03                                                         |
| Probe                             | SN 41/18 EPGO334                                                   |
| ConvF                             | 1.53                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Back Side                                                          |
| Band                              | LTE Band 26 (RB 1)                                                 |
| Channels                          | Low                                                                |
| Signal                            | LTE (Crest factor: 1.0)                                            |
| Frequency (MHz)                   | 822.5                                                              |
| Relative permittivity (real part) | 54.76                                                              |
| Conductivity (S/m)                | 0.95                                                               |
| Variation (%)                     | -2.61                                                              |

Maximum location: X=-15.00, Y=31.00

SAR Peak: 0.79 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.320853 |
| SAR 1g (W/Kg)  | 0.529031 |

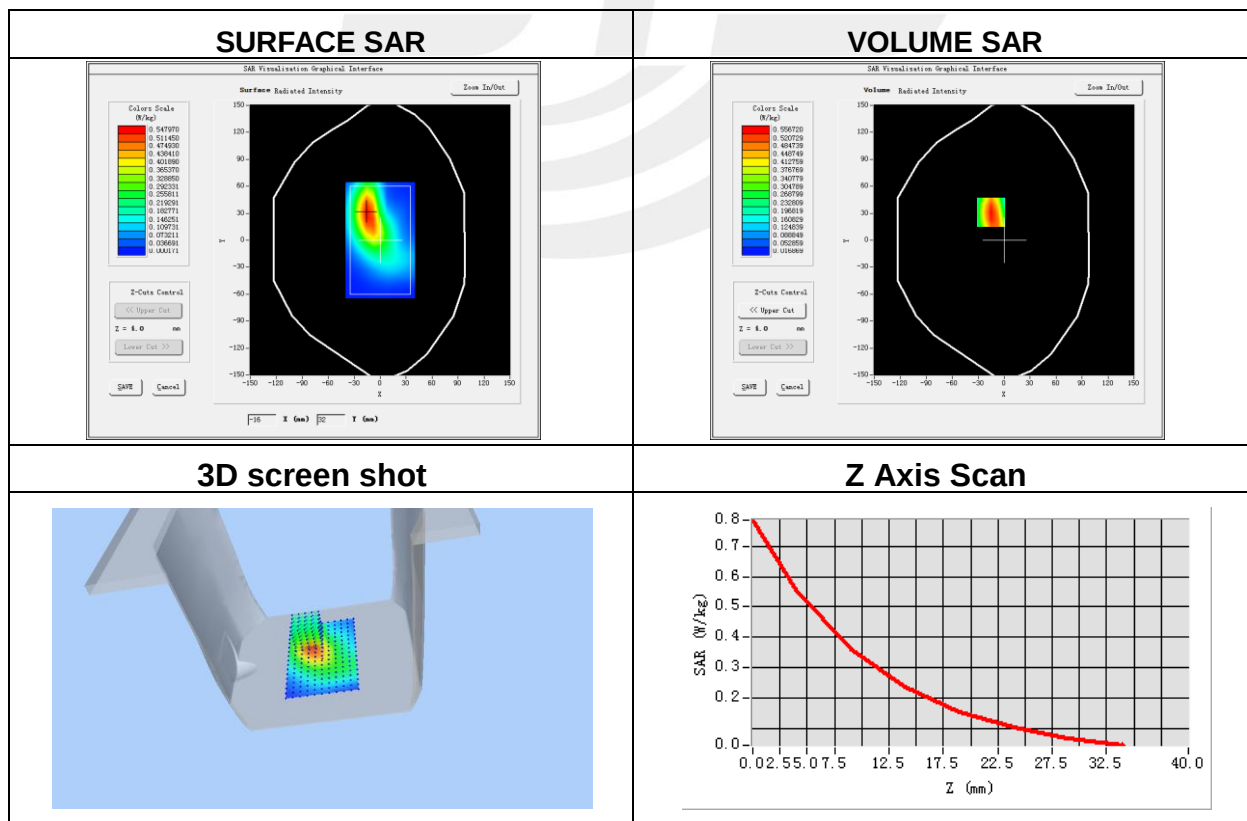



## Appendix C. Probe Calibration And Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※

