

FCC Radio Test Report

FCC ID: 2AR82-SKOW603601

This report concerns: Original Grant

Project No. : 2208C116
Equipment : IEEE 802.11b/g/n 2T2R USB Wi-Fi Module
Brand Name : N/A
Test Model : SKO.W603.6
Series Model : N/A
Applicant : Guangzhou Shikun Electronics Co., Ltd
Address : NO.6 Liankun Road, Huangpu District, Guangzhou, China
Manufacturer : Guangzhou Shikun Electronics Co., Ltd
Address : NO.6 Liankun Road, Huangpu District, Guangzhou, China
Date of Receipt : Aug. 15, 2022
Date of Test : Aug. 16, 2022 ~ Aug. 29, 2022
Issued Date : Sep. 09, 2022
Report Version : R00
Test Sample : Engineering Sample No.: DG202208169
Standard(s) : FCC CFR Title 47, Part 15, Subpart C
FCC KDB 558074 D01 15.247 Meas Guidance v05r02
FCC KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Nick Chen

Prepared by : Nick Chen

Chay. Cai

Approved by : Chay Cai



TESTING CERT #5123.02

BTL Inc.

No. 3 Jinshagang 1st Rd. Shixia, Dalang Town Dongguan City, Guangdong 523792 People's Republic of China.

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	10
2.3 PARAMETERS OF TEST SOFTWARE	11
2.4 DUTY CYCLE	12
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
2.6 SUPPORT UNITS	14
3 . AC POWER LINE CONDUCTED EMISSIONS	15
3.1 LIMIT	15
3.2 TEST PROCEDURE	15
3.3 DEVIATION FROM TEST STANDARD	15
3.4 TEST SETUP	16
3.5 EUT OPERATION CONDITIONS	16
3.6 TEST RESULTS	16
4 . RADIATED EMISSIONS	17
4.1 LIMIT	17
4.2 TEST PROCEDURE	18
4.3 DEVIATION FROM TEST STANDARD	19
4.4 TEST SETUP	19
4.5 EUT OPERATION CONDITIONS	20
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	20
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	20
4.8 TEST RESULTS - ABOVE 1000 MHZ	20
5 . MAXIMUM OUTPUT POWER	21
5.1 LIMIT	21
5.2 TEST PROCEDURE	21
5.3 DEVIATION FROM STANDARD	21
5.4 TEST SETUP	21

Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	21
5.6 TEST RESULTS	21
6 . MEASUREMENT INSTRUMENTS LIST	22
7 . EUT TEST PHOTO	24
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	29
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	32
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	37
APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ	40
APPENDIX E - MAXIMUM OUTPUT POWER	65

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2208C116	R00	Original Report.	Sep. 09, 2022	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	-----	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX E	PASS	-----
15.247(d)	Conducted Spurious Emissions	-----	PASS	-----
15.247(e)	Power Spectral Density	-----	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) The RF module of this IEEE 802.11b/g/n 2T2R USB Wi-Fi Module has been tested and certified. Please refer to the module report as listed in the below table for the test results of the RF module.

RF Module Model	Module Function	Report Number	Standard
SKO.W603.6	WLAN 2.4GHz	4789740323-1	FCC CFR Title 47, Part 15, Subpart C
	MPE	4789740323-2	FCC 47CFR & 2.1091 KDB-447498 D01 V06

There is no other hardware or electrical modification made to the applying modular transmitter itself except below: Add a set of antennas on the original basis.

Ant.	P/N	Type	Antenna Mfr.	Connector	Antenna Gain(dBi)
1	D40F-J09	PIFA	ZHONGTIAN XUN	N/A	4.93
2	D40F-J09	PIFA	ZHONGTIAN XUN	N/A	4.93

1. Thus, only the radiated spurious emissions and output power were evaluated and recorded in this report. For the test results of all other test items please refer to above module test report. The
2. Both Ant.1 and Ant.2 had been pre-tested and found the Ant.1 the worst case and recorded.
3. This EUT supports CDD, and all antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$. For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=4.93 dBi.
4. The antenna gain is provided by the manufacturer.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 3 Jinshagang 1st Rd. Shixia, Dalang Town Dongguan City, Guangdong 523792 People's Republic of China.

BTL's Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.60

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.36
		30MHz ~ 200MHz	H	3.32
		200MHz ~ 1,000MHz	V	4.08
		200MHz ~ 1,000MHz	H	3.96

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 6GHz	3.80
		6GHz ~ 18GHz	4.82

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	3.62
		26.5 ~ 40 GHz	4.00

C. Other Measurement:

Test Item	Uncertainty
Maximum Output Power	±0.95 dB
Temperature	±0.08 °C
Humidity	±1.5%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	24°C	54%	DC 5V	Jeter Wang
Radiated Emissions-9kHz to 30 MHz	25°C	55%	DC 5V	Bob Cao
Radiated Emissions-30MHz to 1000MHz	22°C	52%	DC 5V	Chen Mo
Radiated Emissions-Above 1000MHz	23°C	53%	DC 5V	Chen Mo
Maximum Output Power	23.6°C	59.7%	DC 5V	Tember Zhuang

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	IEEE 802.11b/g/n 2T2R USB Wi-Fi Module
Brand Name	N/A
Test Model	SKO.W603.6
Series Model	N/A
Model Difference(s)	N/A
Power Source	Supplied from Notebook USB port.
Power Rating	DC 5V
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps
Maximum Output Power	IEEE 802.11n(HT40): 16.27 dBm (0.0424 W)

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20) CH03 - CH09 for IEEE 802.11n(HT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Antenna Configuration:

Operating Mode	TX Mode	1TX	2TX
IEEE 802.11b		V (Ant. 1) / V (Ant. 2)	-
IEEE 802.11g		V (Ant. 1) / V (Ant. 2)	-
IEEE 802.11n(HT20)		-	V(Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)		-	V(Ant. 1 + Ant. 2)

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09
Mode 5	TX N(HT40) Mode Channel 06

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 5	TX N(HT40) Mode Channel 06

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 5	TX N(HT40) Mode Channel 06

Radiated emissions test- Above 1GHz	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09

Output Power test	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09

NOTE:

- (1) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (2) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX N(HT40) Mode Channel 06 is found to be the worst case and recorded.
- (3) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (4) For radiated emission above 1Ghz test, The polarization of Vertical and Horizontal are evaluated, the worst case is Vertical and recorded in the test report.


2.3 PARAMETERS OF TEST SOFTWARE

Test Software Version	MT7603U_QA_Tool		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	1B	1B	1B
IEEE 802.11g	1B	1B	1A
IEEE 802.11n(HT20)	1C	1C	1C
Frequency (MHz)	2422	2437	2452
IEEE 802.11n(HT40)	1A	1E	1B

2.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
 If duty cycle is $< 98\%$, duty factor shall be considered.
 The output power = measured power + duty factor.


IEEE 802.11b

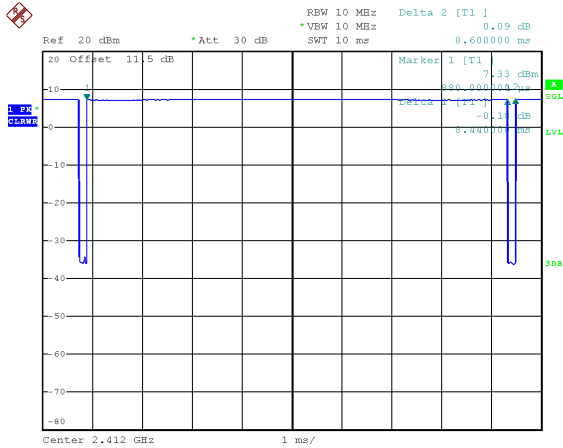

Date: 22.AUG.2022 04:01:24

Duty cycle = $8.440 \text{ ms} / 8.600 \text{ ms} = 98.14\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00$


IEEE 802.11g

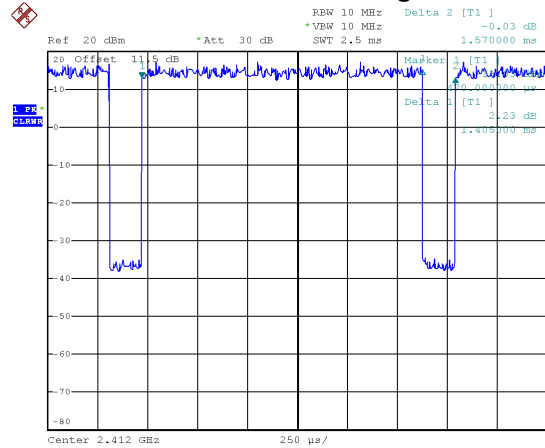

Date: 22.AUG.2022 04:01:40

Duty cycle = $1.405 \text{ ms} / 1.570 \text{ ms} = 89.49\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.48$


IEEE 802.11n(HT20)

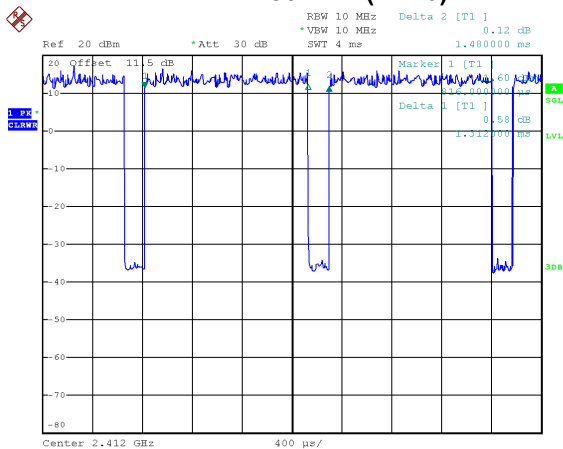

Date: 22.AUG.2022 04:01:58

Duty cycle = $1.312 \text{ ms} / 1.480 \text{ ms} = 88.65\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.52$

IEEE 802.11n(HT40)

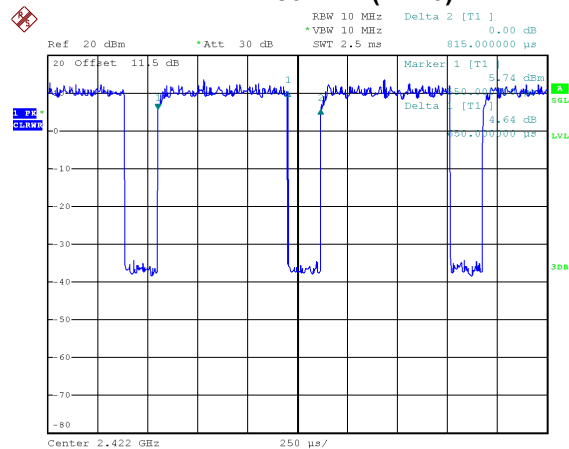

Date: 22.AUG.2022 04:02:46

Duty cycle = $0.650 \text{ ms} / 0.815 \text{ ms} = 79.75\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.98$

NOTE:

For IEEE 802.11b:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.

For IEEE 802.11g:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 712 Hz.


For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 762 Hz.

For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1538 Hz.

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

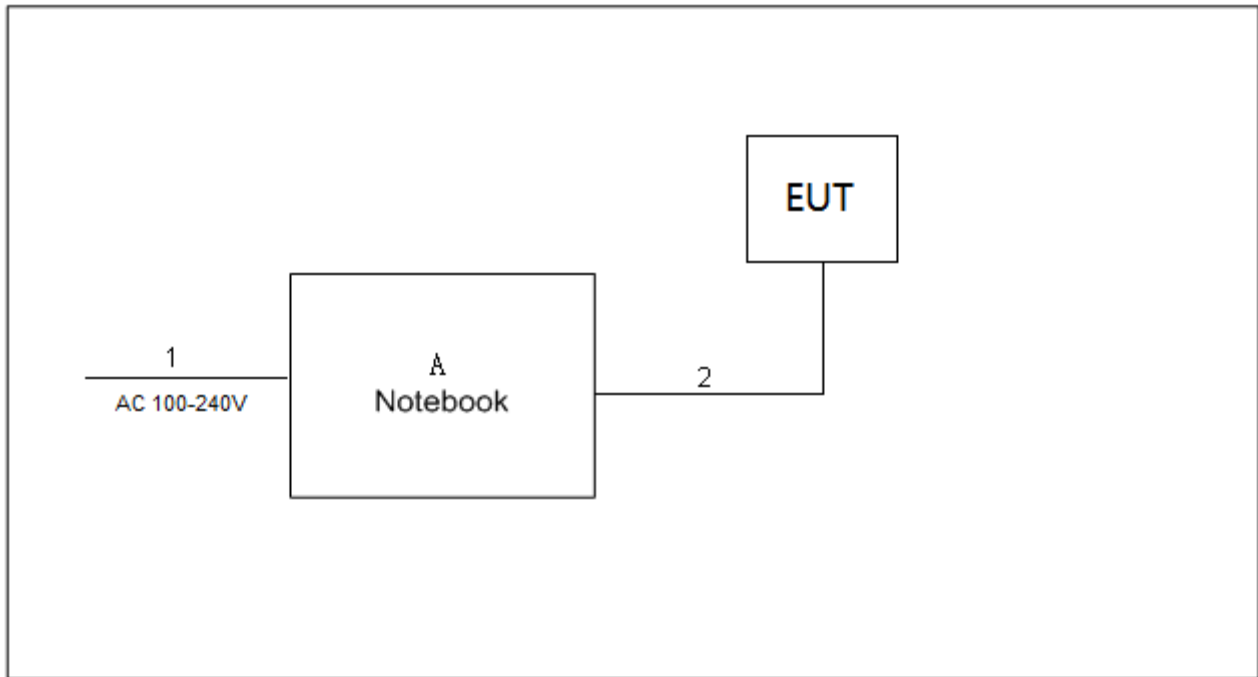

2.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Note
A	Notebook	Dell	Inspiron 15-7559	N/A	Other test items
	Notebook	Lenovo	Pro 13	N/A	Radiated Emissions-9kHz to 30 MHz

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	AC Cable	NO	NO	1.2m
2	USB Cable	NO	NO	0.8m

3. AC POWER LINE CONDUCTED EMISSIONS

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

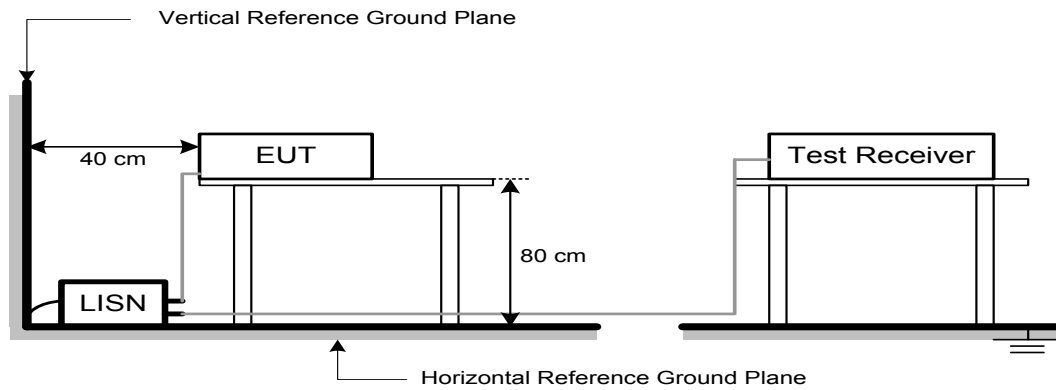

3.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item -EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

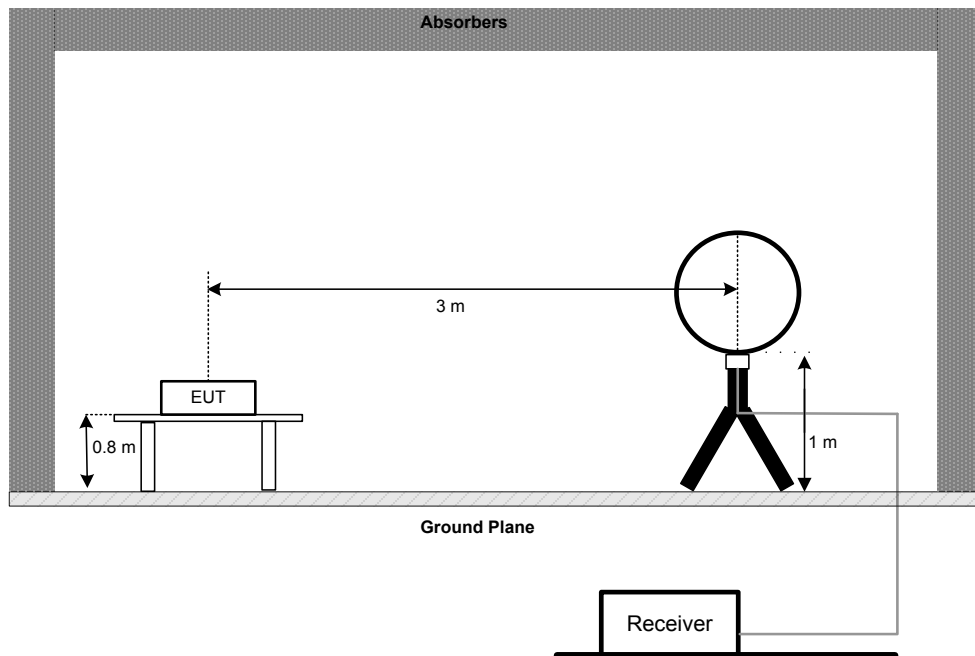

30 MHz to 1 GHz

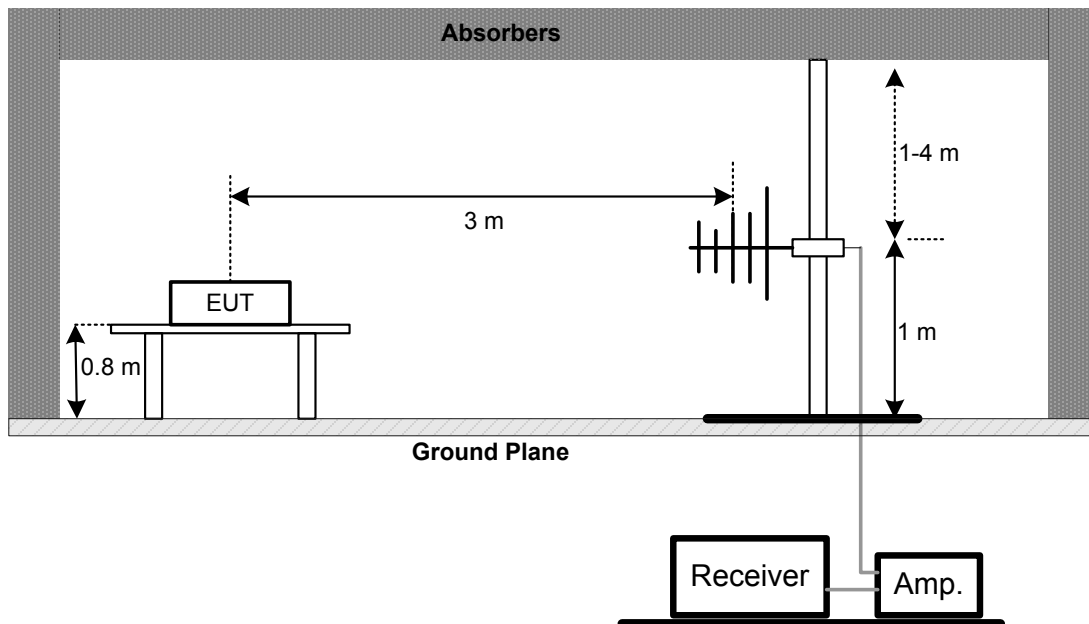

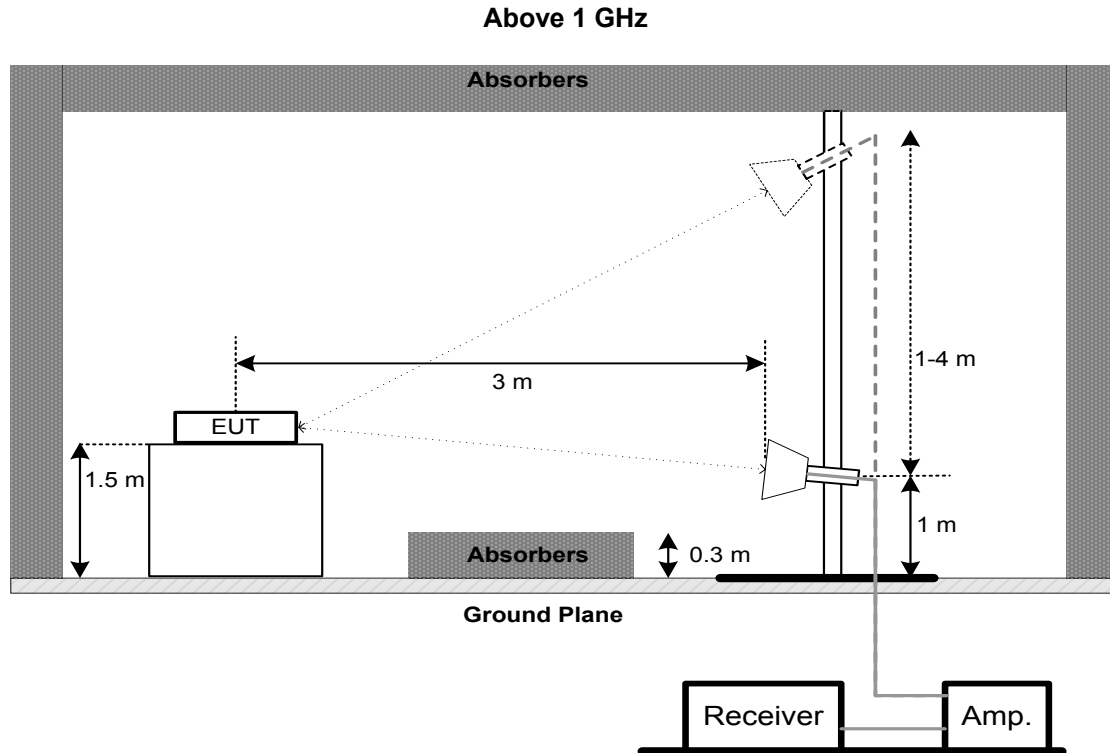

4.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. MAXIMUM OUTPUT POWER

5.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 Watt or 30.00 dBm


5.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.2.3.1 of ANSI C63.10-2013 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

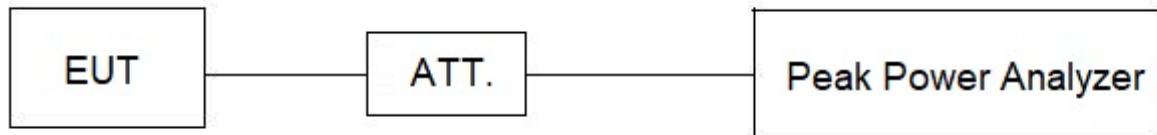

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Jan. 22, 2023
2	LISN	EMCO	3816/2	52765	Jan. 23, 2023
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Jan. 23, 2023
4	50Ω Terminator	SHX	TF5-3	15041304	Jan. 22, 2023
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 08, 2023
7	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	MXE EMI Receiver	Keysight	N9038A	MY56400091	Jan. 22, 2023
2*	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Aug. 23, 2024
3	Cable	N/A	RG 213/U(9kHz~1GHz)	N/A	Jun. 17, 2023
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	966 Chamber Room	ETS	9*6*6	N/A	Jul. 14, 2023

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 03, 2023
2	Amplifier	HP	8447D	2944A08742	Jan. 22, 2023
3	Cable	emci	LMR-400	N/A	Nov. 30, 2022
4	Controller	CT	SC100	N/A	N/A
5	Controller	MF	MF-7802	MF780208416	N/A
6	Receiver	Agilent	N9038A	MY52130039	Jan. 22, 2023
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	966 Chamber Room	RM	9*6*6	N/A	Jul. 15, 2023

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Horn Antenna	ARA	DRG-118A	16554	Apr. 18, 2023
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	May 27, 2023
3	Amplifier	Agilent	8449B	3008A02584	Jul. 03, 2023
4	Controller	CT	SC100	N/A	N/A
5	Controller	MF	MF-7802	MF780208416	N/A
6	Receiver	Agilent	N9038A	MY52130039	Jan. 22, 2023
7	EXA Spectrum Analyzer	Keysight	N9010A	MY56480488	Jan. 22, 2023
8*	Low Noise Amplifier	CONNPHY	CLN-18G40G-4330-K	619413	Jul. 05, 2025
9	Cable	Talent microwave	A81-SMAMSMAM-12.5M	N/A	Oct. 15, 2022
10	Cable	Talent microwave	A40-2.92M2.92M-2.5M	N/A	Nov. 30, 2022
11	Filter	STI	STI15-9912	N/A	Jul. 03, 2023
12	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
13	966 Chamber Room	RM	9*6*6	N/A	Jul. 15, 2023

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	Jul. 03, 2023
2	Wideband power sensor	Keysight	N1923A	MY58310004	Jul. 03, 2023
3	Attenuator	WOKEN	6SM3502	VAS1214NL	N/A
4	RF Cable	Tongkaichuan	N/A	N/A	N/A


Remark: "N/A" denotes no model name, serial no. or calibration specified.

"*" calibration period of equipment list is three year.

Except * item, all calibration period of equipment list is one year.



7. EUT TEST PHOTO

AC Power Line Conducted Emissions Test Photos

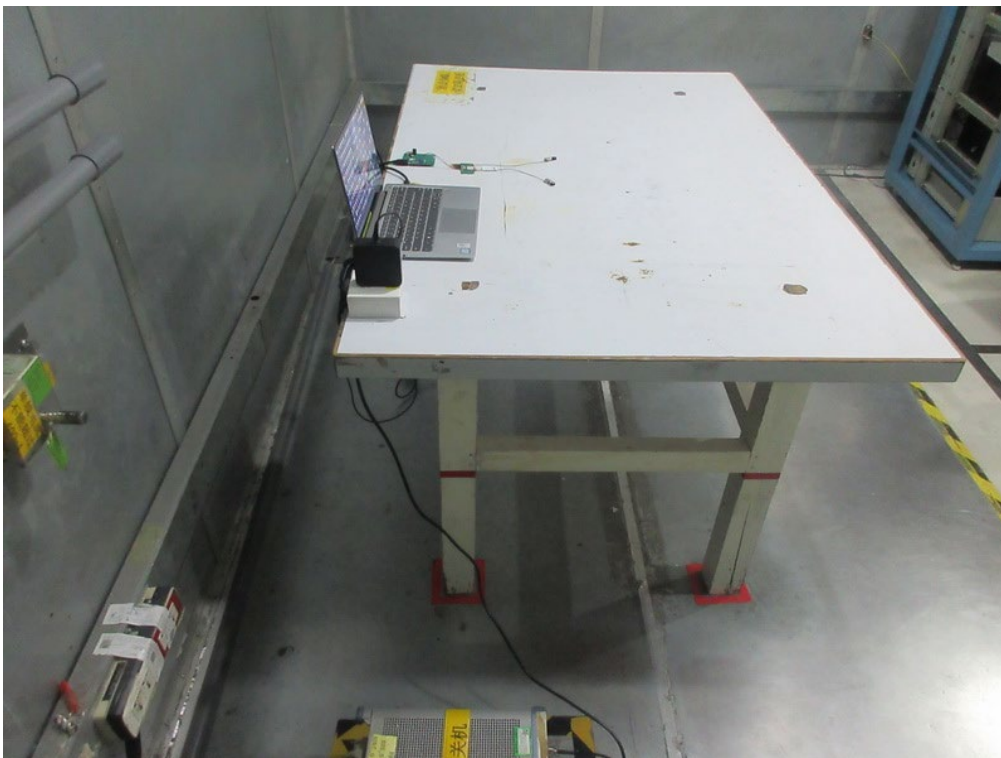



Radiated Emissions Test Photos

9 kHz to 30 MHz

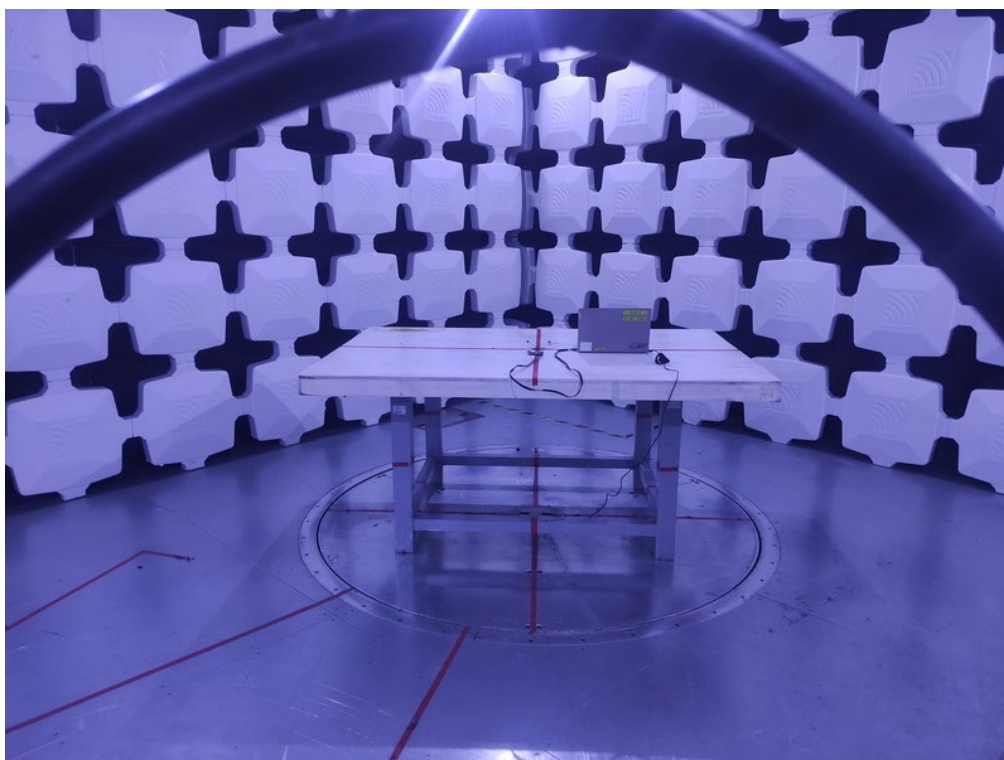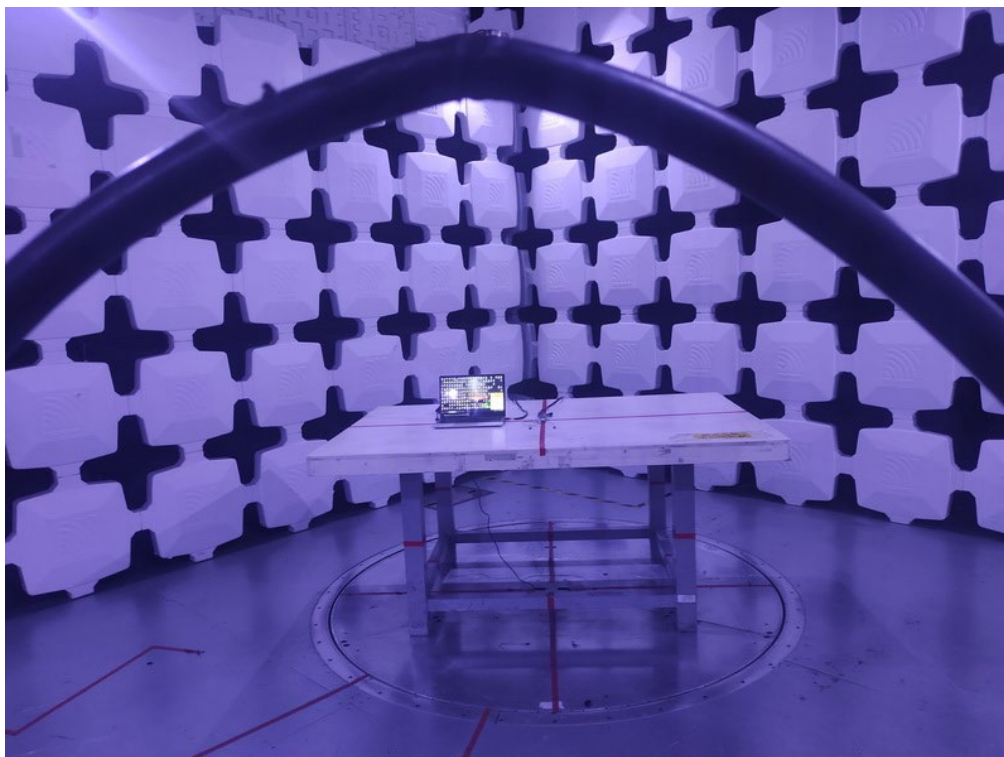

Radiated Emissions Test Photos

30 MHz to 1 GHz

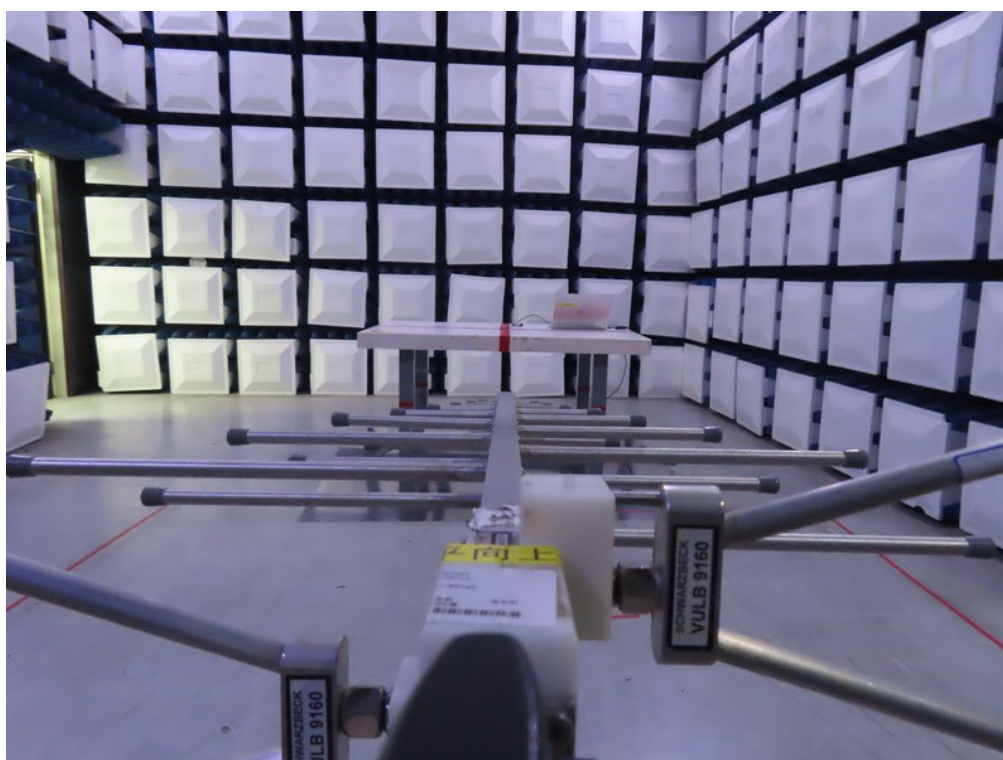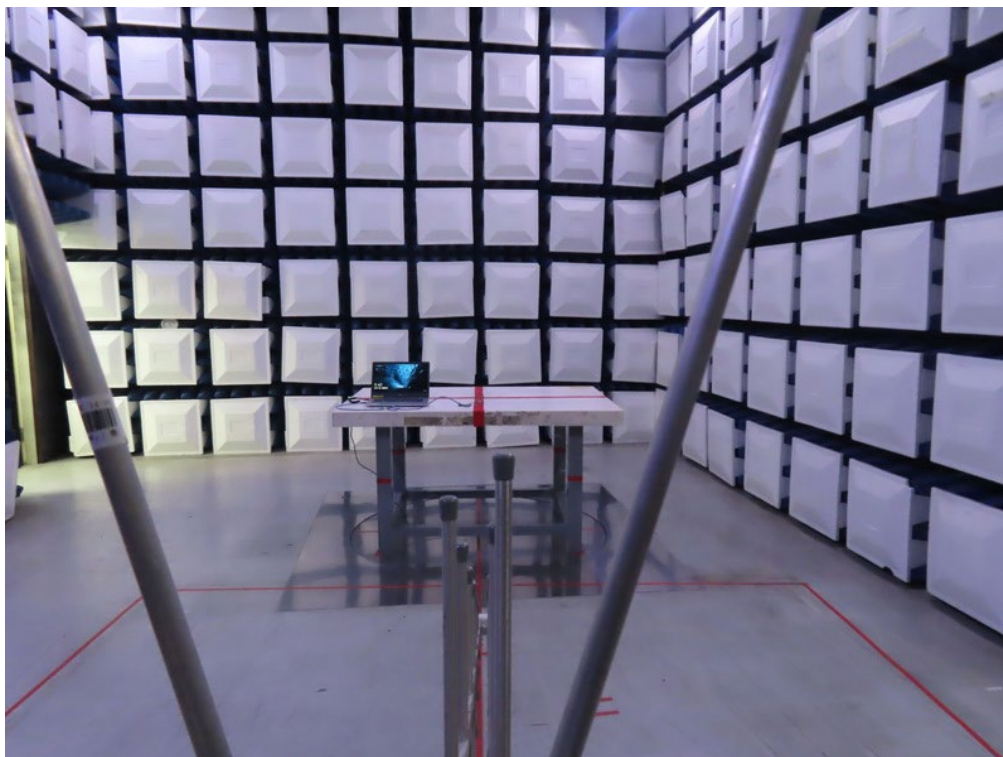


Radiated Emissions Test Photos

Above 1 GHz




Conducted Test Photos

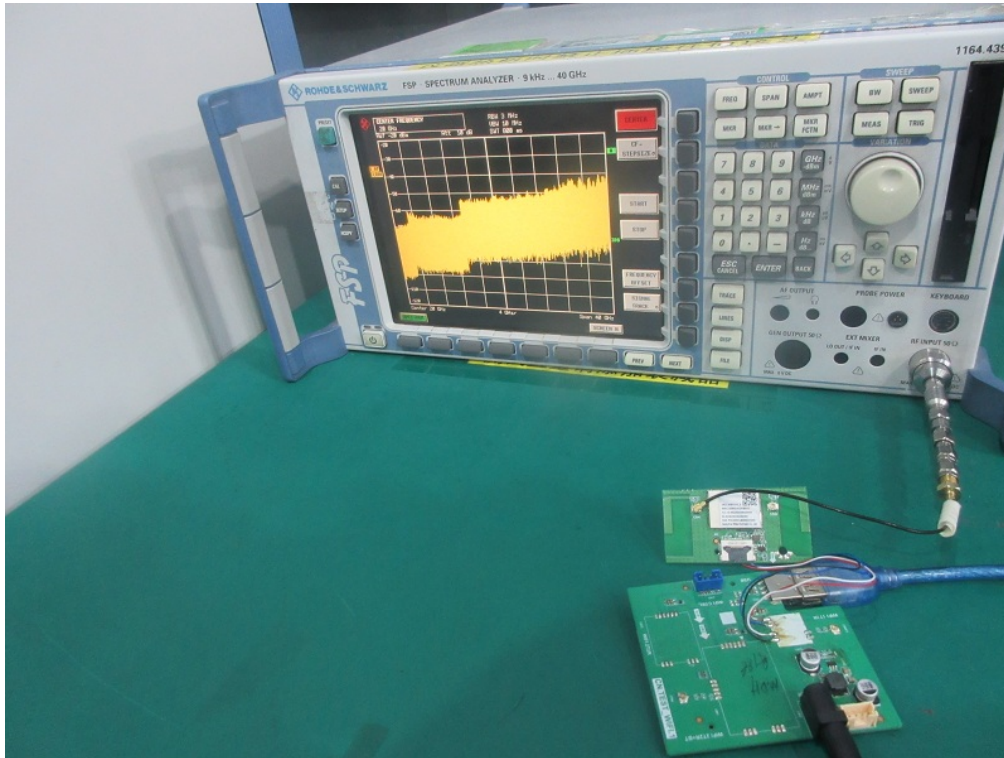

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX N(HT40) Mode Channel 06	Phase	Line
-----------	----------------------------	-------	------

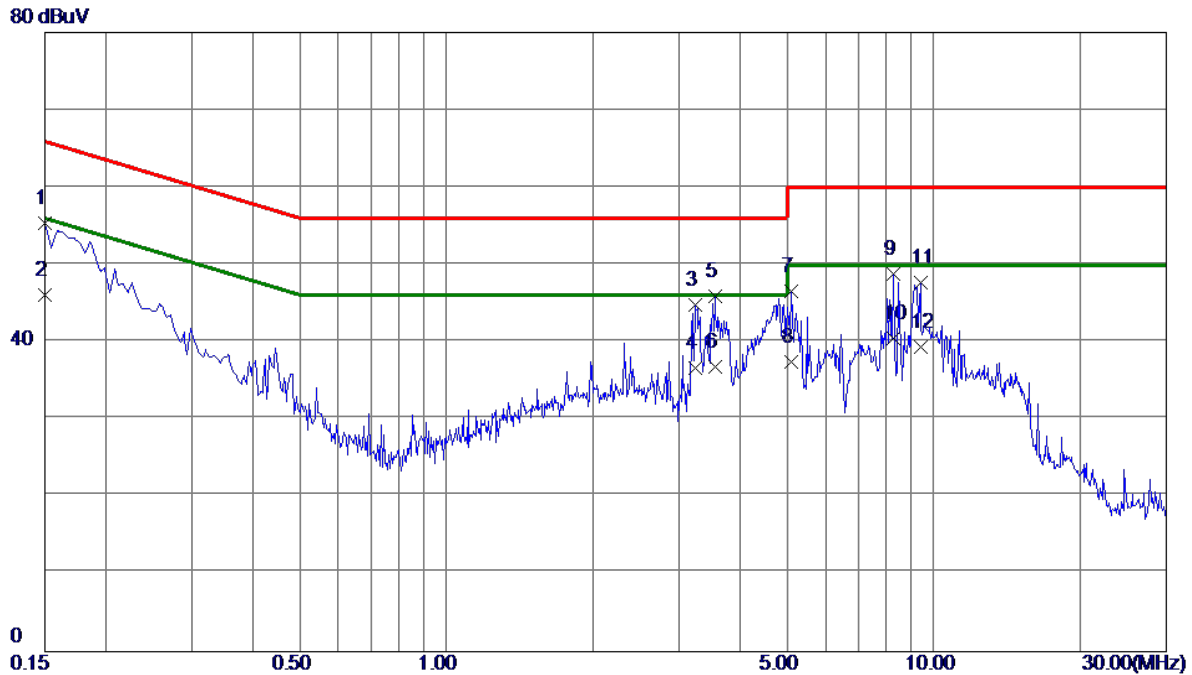


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	45.72	9.65	55.37	66.00	-10.63	QP	
2	0.1500	36.41	9.65	46.06	56.00	-9.94	AVG	
3	3.2370	34.76	9.99	44.75	56.00	-11.25	QP	
4	3.2370	26.70	9.99	36.69	46.00	-9.31	AVG	
5	3.5565	35.87	10.01	45.88	56.00	-10.12	QP	
6 *	3.5565	26.81	10.01	36.82	46.00	-9.18	AVG	
7	5.1135	36.45	10.13	46.58	60.00	-13.42	QP	
8	5.1135	27.30	10.13	37.43	50.00	-12.57	AVG	
9	8.2590	38.44	10.37	48.81	60.00	-11.19	QP	
10	8.2590	30.11	10.37	40.48	50.00	-9.52	AVG	
11	9.3840	37.18	10.44	47.62	60.00	-12.38	QP	
12	9.3840	28.90	10.44	39.34	50.00	-10.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode Channel 06	Phase	Neutral
-----------	----------------------------	-------	---------

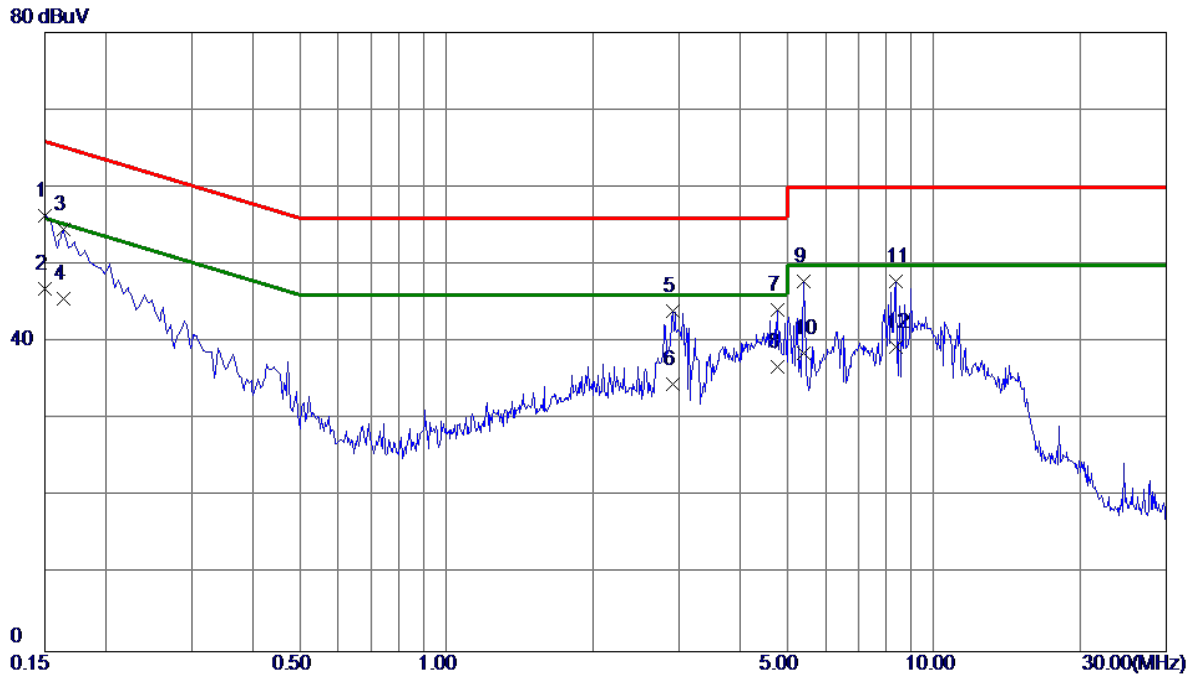


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	46.66	9.70	56.36	66.00	-9.64	QP	
2 *	0.1500	37.21	9.70	46.91	56.00	-9.09	AVG	
3	0.1635	44.84	9.71	54.55	65.28	-10.73	QP	
4	0.1635	35.90	9.71	45.61	55.28	-9.67	AVG	
5	2.9130	33.94	9.99	43.93	56.00	-12.07	QP	
6	2.9130	24.60	9.99	34.59	46.00	-11.41	AVG	
7	4.7805	34.00	10.13	44.13	56.00	-11.87	QP	
8	4.7805	26.70	10.13	36.83	46.00	-9.17	AVG	
9	5.4195	37.65	10.18	47.83	60.00	-12.17	QP	
10	5.4195	28.40	10.18	38.58	50.00	-11.42	AVG	
11	8.3445	37.41	10.39	47.80	60.00	-12.20	QP	
12	8.3445	28.90	10.39	39.29	50.00	-10.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX N(HT40) Mode Channel 06	Polarization	Ant 0°
-----------	----------------------------	--------------	--------

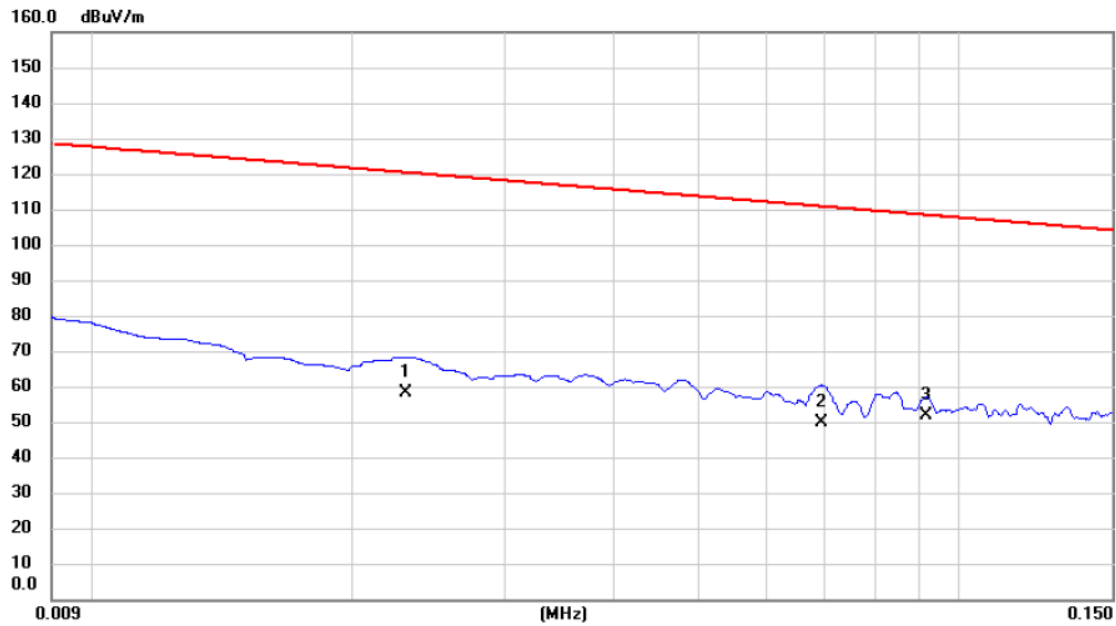


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0230	44.12	14.24	58.36	120.37	-62.01	AVG	
2		0.0694	36.25	13.64	49.89	110.78	-60.89	AVG	
3	*	0.0916	38.08	13.69	51.77	108.37	-56.60	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode Channel 06	Polarization	Ant 0°
-----------	----------------------------	--------------	--------

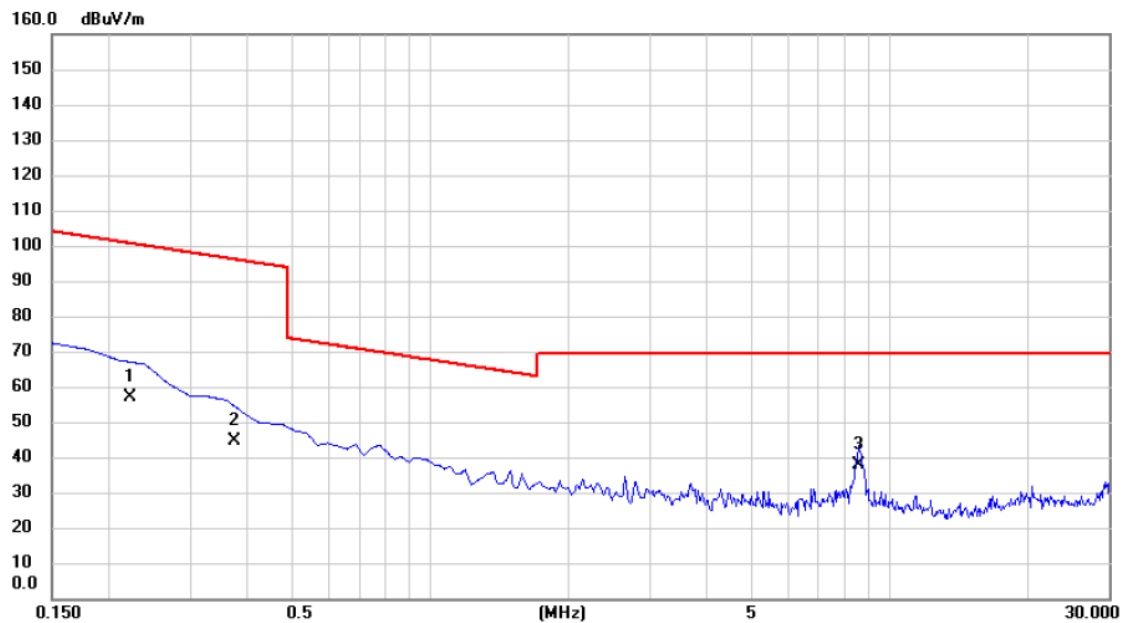


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2220	43.25	13.64	56.89	100.68	-43.79	AVG	
2		0.3751	30.98	13.46	44.44	96.12	-51.68	AVG	
3	*	8.5378	26.39	11.53	37.92	69.54	-31.62	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode Channel 06	Polarization	Ant 90°
-----------	----------------------------	--------------	---------

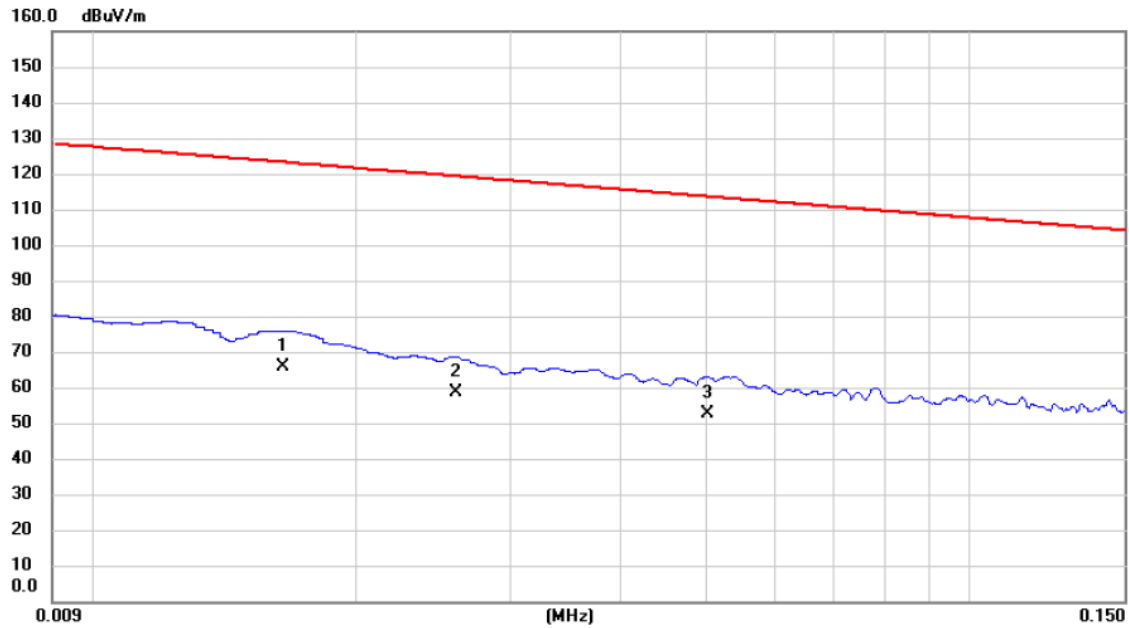


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0165	50.32	15.41	65.73	123.26	-57.53	AVG	
2		0.0260	44.25	14.17	58.42	119.31	-60.89	AVG	
3		0.0502	39.14	13.63	52.77	113.59	-60.82	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode Channel 06	Polarization	Ant 90°
-----------	----------------------------	--------------	---------

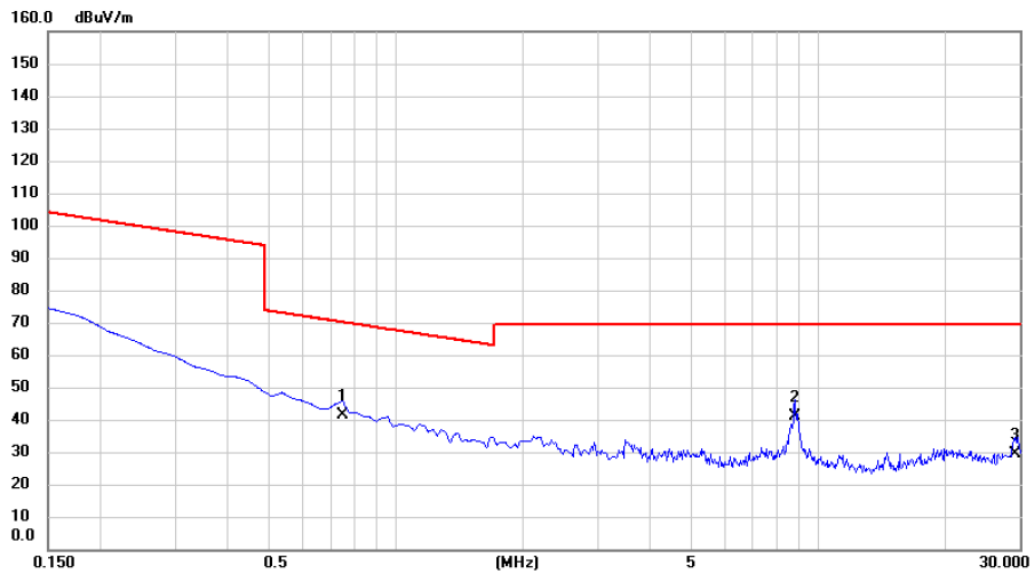

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.7470	28.36	13.05	41.41	70.14	-28.73	QP	
2 *	8.8065	29.31	11.52	40.83	69.54	-28.71	QP	
3	29.3134	14.36	14.94	29.30	69.54	-40.24	QP	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX N(HT40) Mode Channel 06	Polarization	Vertical
-----------	----------------------------	--------------	----------

80 dBuV/m

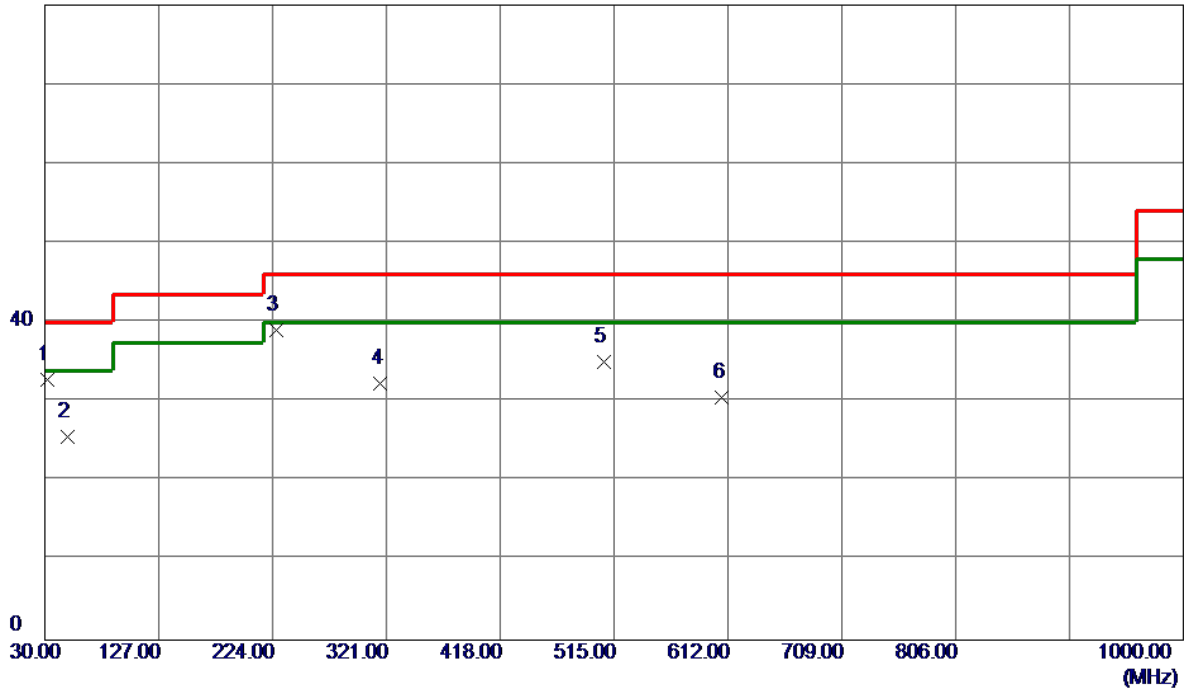


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	31.9400	48.56	-15.74	32.82	40.00	-7.18	QP	
2	49.4000	39.95	-14.29	25.66	40.00	-14.34	Peak	
3 *	226.9100	53.70	-14.59	39.11	46.00	-6.89	Peak	
4	316.1500	43.17	-10.92	32.25	46.00	-13.75	Peak	
5	506.2700	41.72	-6.71	35.01	46.00	-10.99	Peak	
6	607.1500	35.30	-4.68	30.62	46.00	-15.38	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode Channel 06	Polarization	Horizontal
-----------	----------------------------	--------------	------------

80 dBuV/m

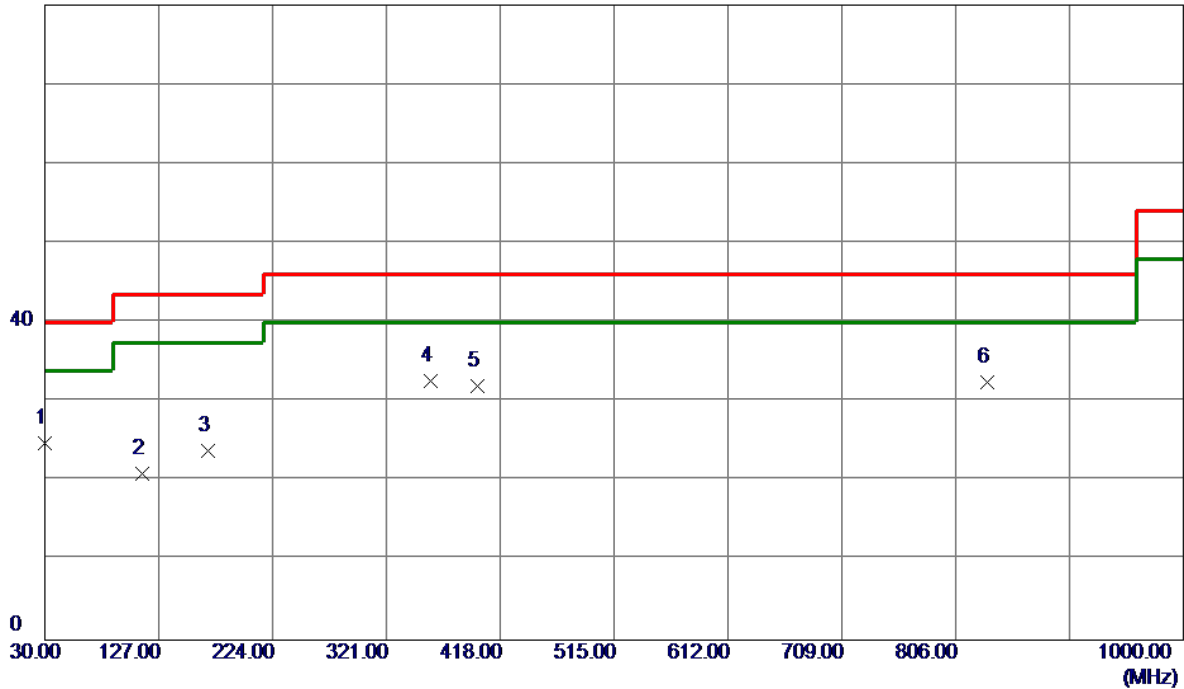

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	30.0000	40.85	-16.07	24.78	40.00	-15.22	Peak	
2	113.4200	36.11	-15.12	20.99	43.50	-22.51	Peak	
3	168.7100	36.86	-12.96	23.90	43.50	-19.60	Peak	
4 *	358.8299	42.60	-10.00	32.60	46.00	-13.40	Peak	
5	398.6000	41.02	-8.99	32.03	46.00	-13.97	Peak	
6	833.1599	33.07	-0.56	32.51	46.00	-13.49	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

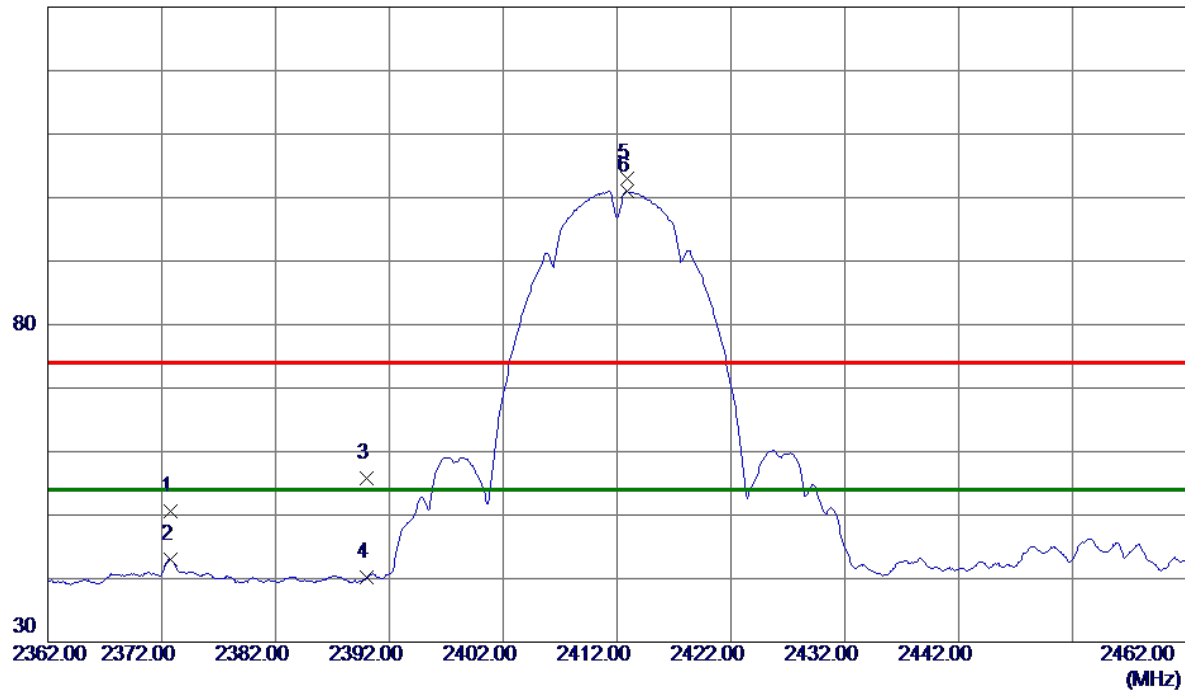


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2372.8000	43.35	7.16	50.51	74.00	-23.49	Peak	
2	2372.8000	35.88	7.16	43.04	54.00	-10.96	AVG	
3	2390.0000	48.72	7.17	55.89	74.00	-18.11	Peak	
4	2390.0000	33.00	7.17	40.17	54.00	-13.83	AVG	
5	2412.9000	95.82	7.17	102.99	74.00	28.99	Peak	No Limit
6 *	2412.9000	93.83	7.17	101.00	54.00	47.00	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

80 dBuV/m

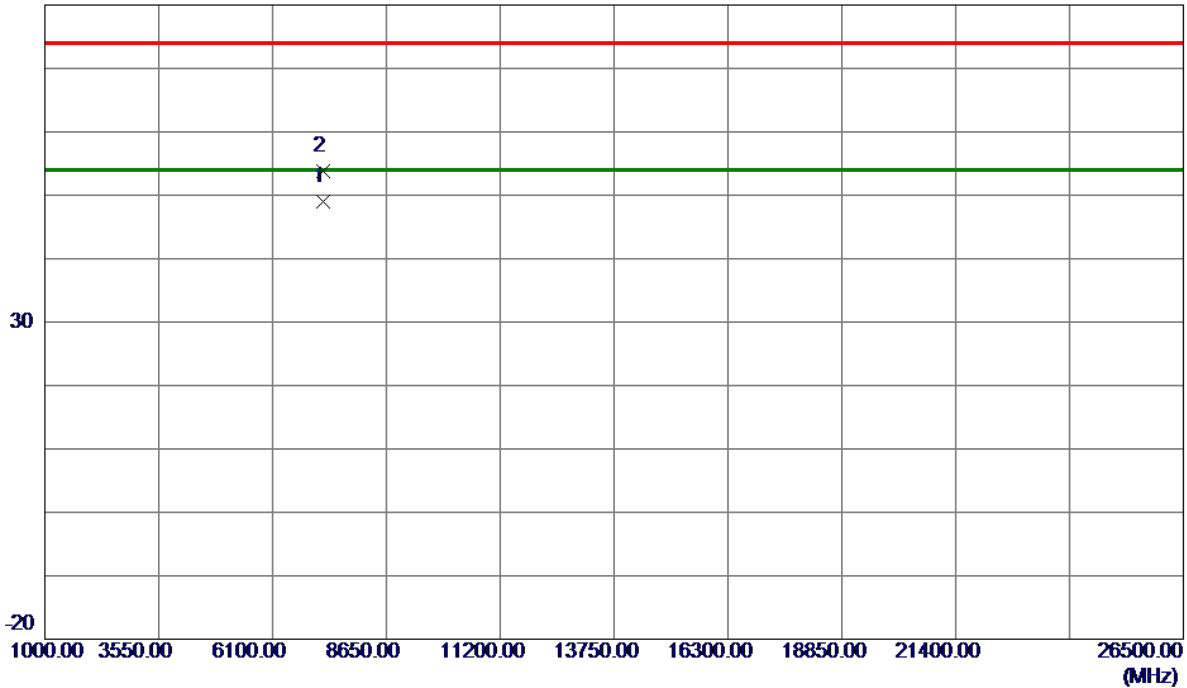


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7235.2600	39.12	9.79	48.91	54.00	-5.09	AVG	
2	7236.3600	44.00	9.79	53.79	74.00	-20.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

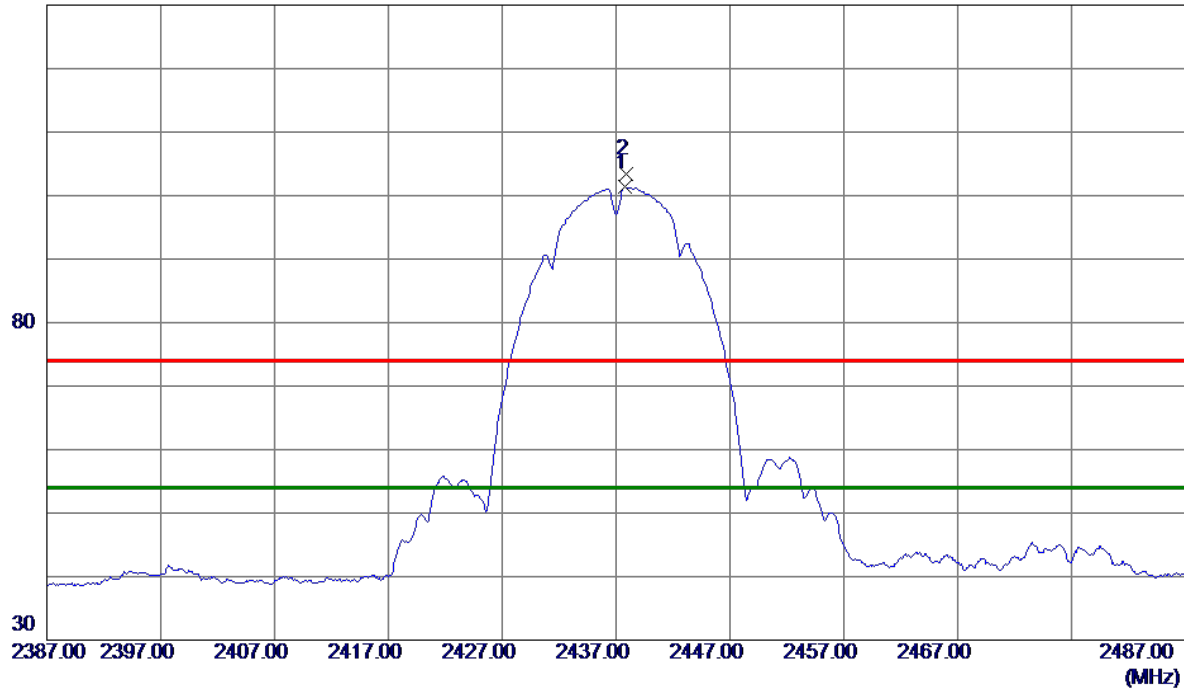


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2437.8000	94.12	7.18	101.30	54.00	47.30	AVG	No Limit
2	2437.9000	96.19	7.18	103.37	74.00	29.37	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

80 dBuV/m

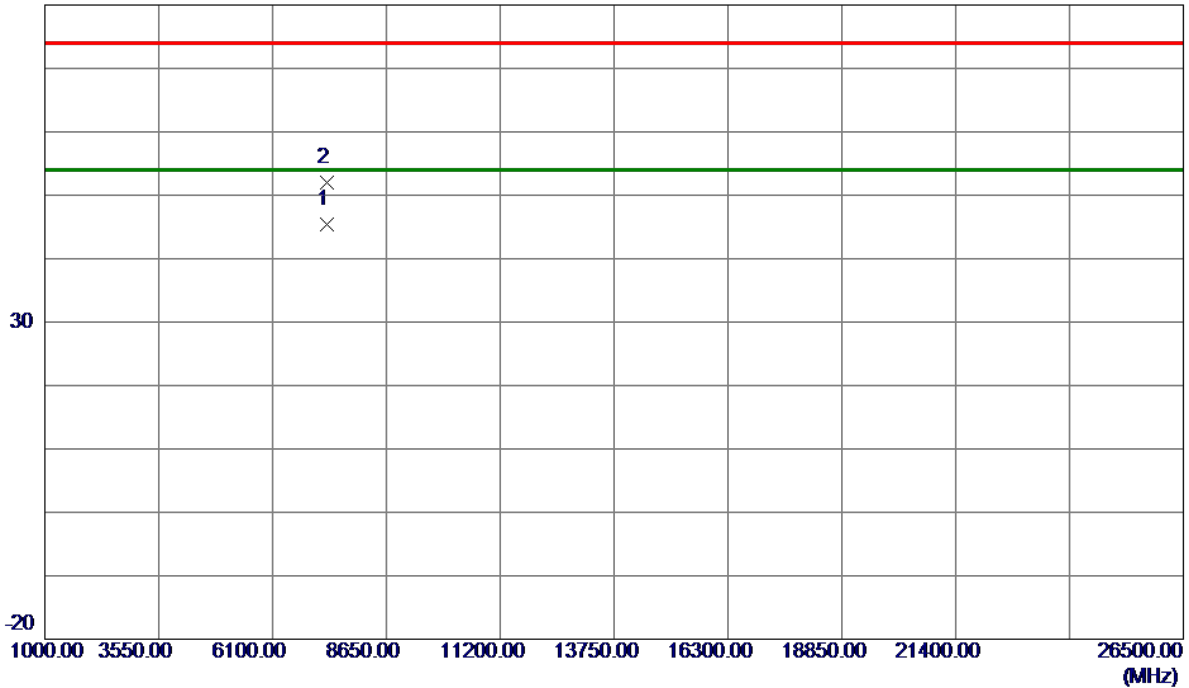


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7310.1700	35.63	9.86	45.49	54.00	-8.51	AVG	
2	7310.3000	42.07	9.86	51.93	74.00	-22.07	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

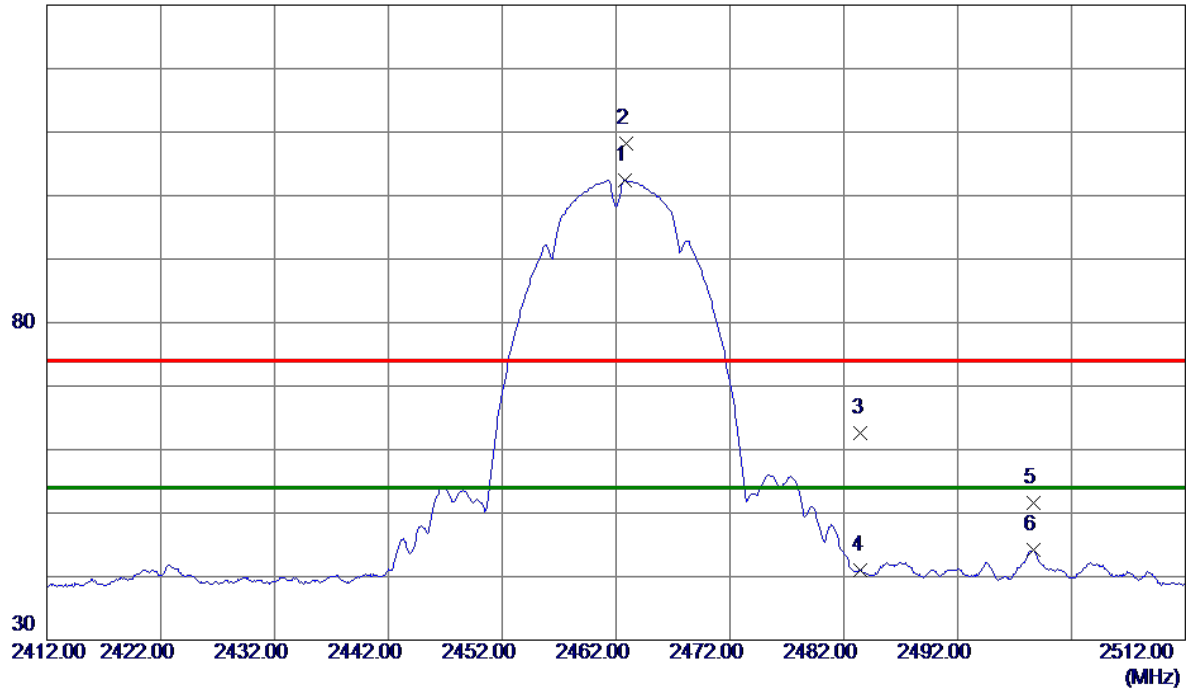


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2462.8000	95.18	7.19	102.37	54.00	48.37	AVG	No Limit
2	2462.9000	101.05	7.19	108.24	74.00	34.24	Peak	No Limit
3	2483.5000	55.47	7.19	62.66	74.00	-11.34	Peak	
4	2483.5000	33.78	7.19	40.97	54.00	-13.03	AVG	
5	2498.7000	44.43	7.19	51.62	74.00	-22.38	Peak	
6	2498.7000	36.99	7.19	44.18	54.00	-9.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

80 dBuV/m

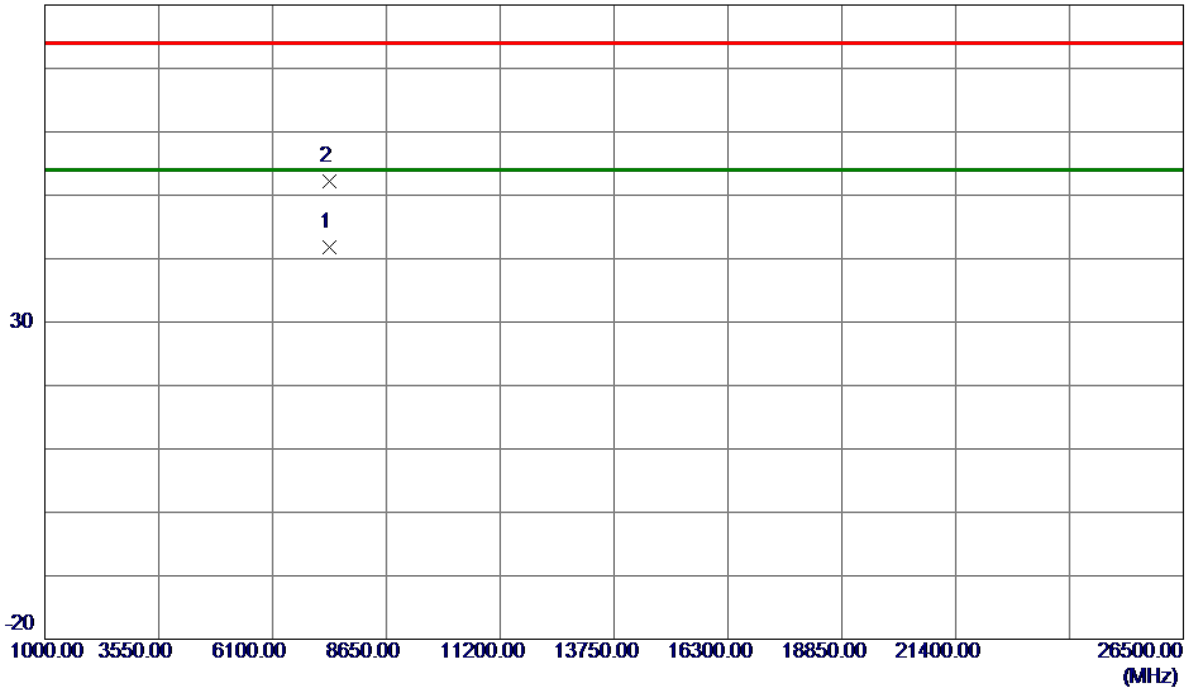


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7385.2600	31.83	9.93	41.76	54.00	-12.24	AVG	
2	7385.3500	42.26	9.93	52.19	74.00	-21.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

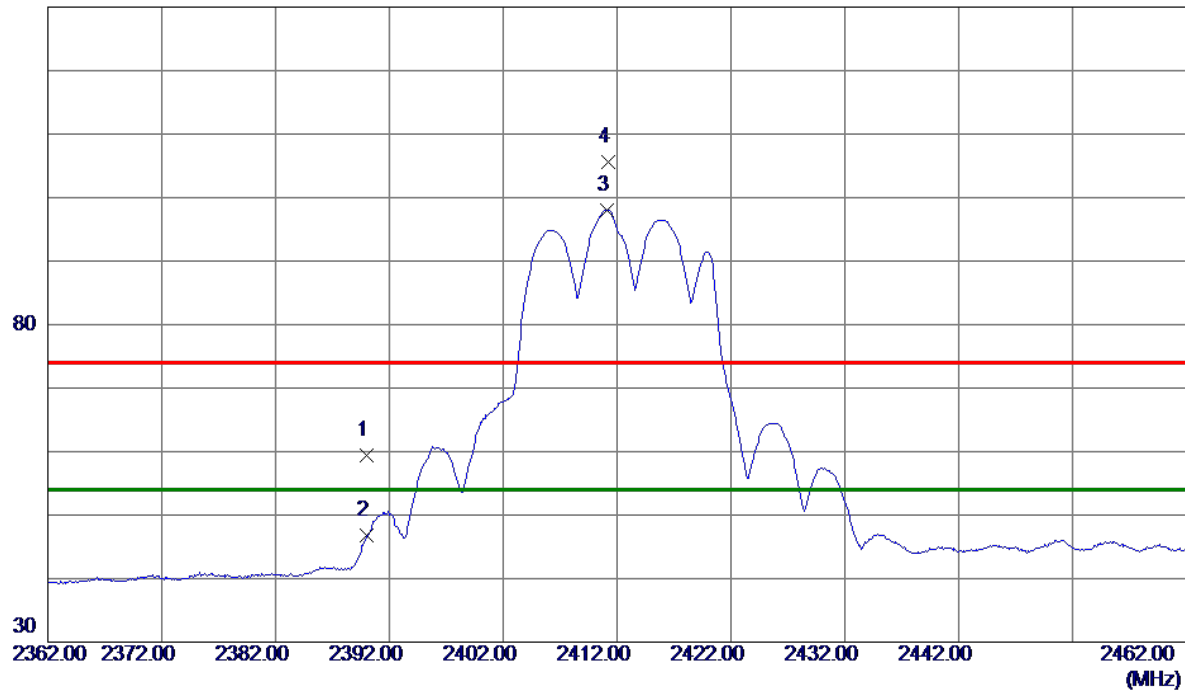


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	52.26	7.17	59.43	74.00	-14.57	Peak	
2	2390.0000	39.63	7.17	46.80	54.00	-7.20	AVG	
3 *	2411.1000	90.81	7.17	97.98	54.00	43.98	AVG	No Limit
4	2411.2000	98.43	7.17	105.60	74.00	31.60	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

80 dBuV/m

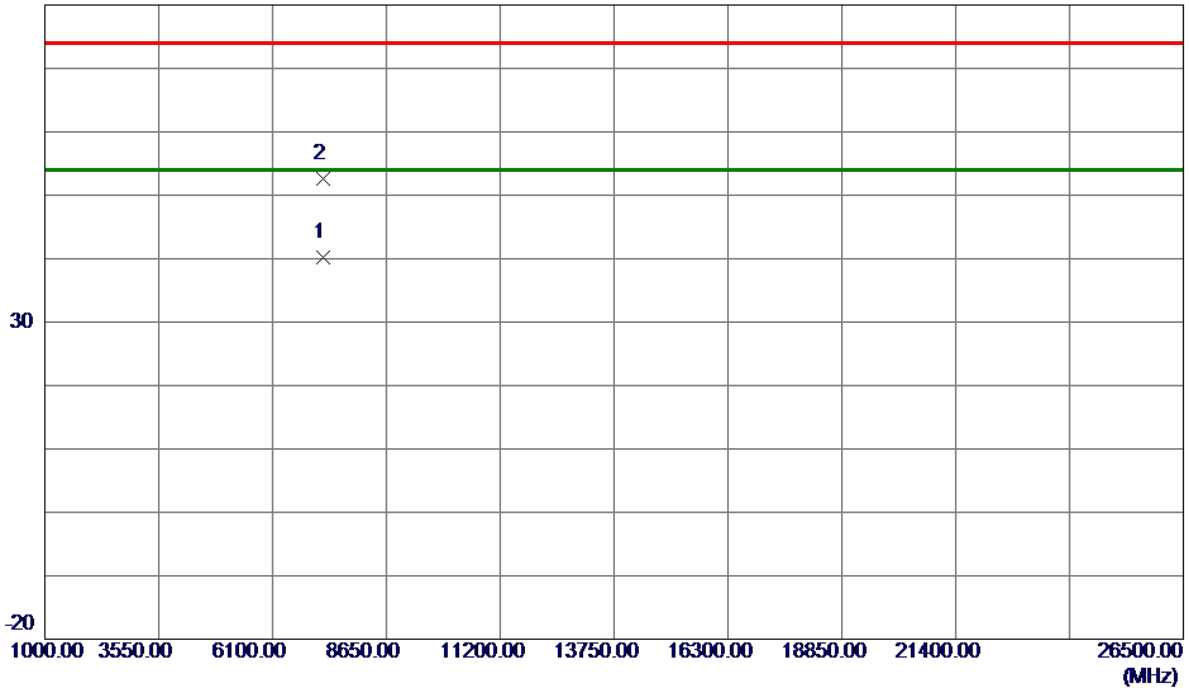


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7235.1300	30.36	9.79	40.15	54.00	-13.85	AVG	
2	7239.8300	42.78	9.80	52.58	74.00	-21.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

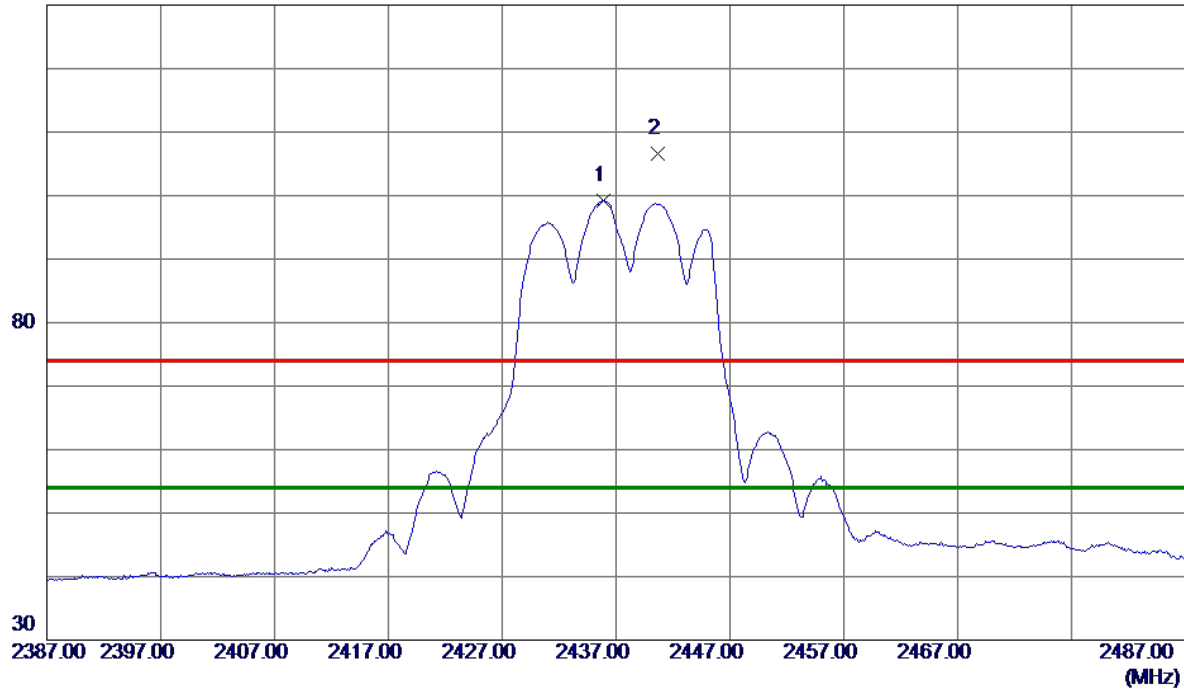


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2435.9000	91.99	7.18	99.17	54.00	45.17	AVG	No Limit
2	2440.7000	99.45	7.18	106.63	74.00	32.63	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

80 dBuV/m

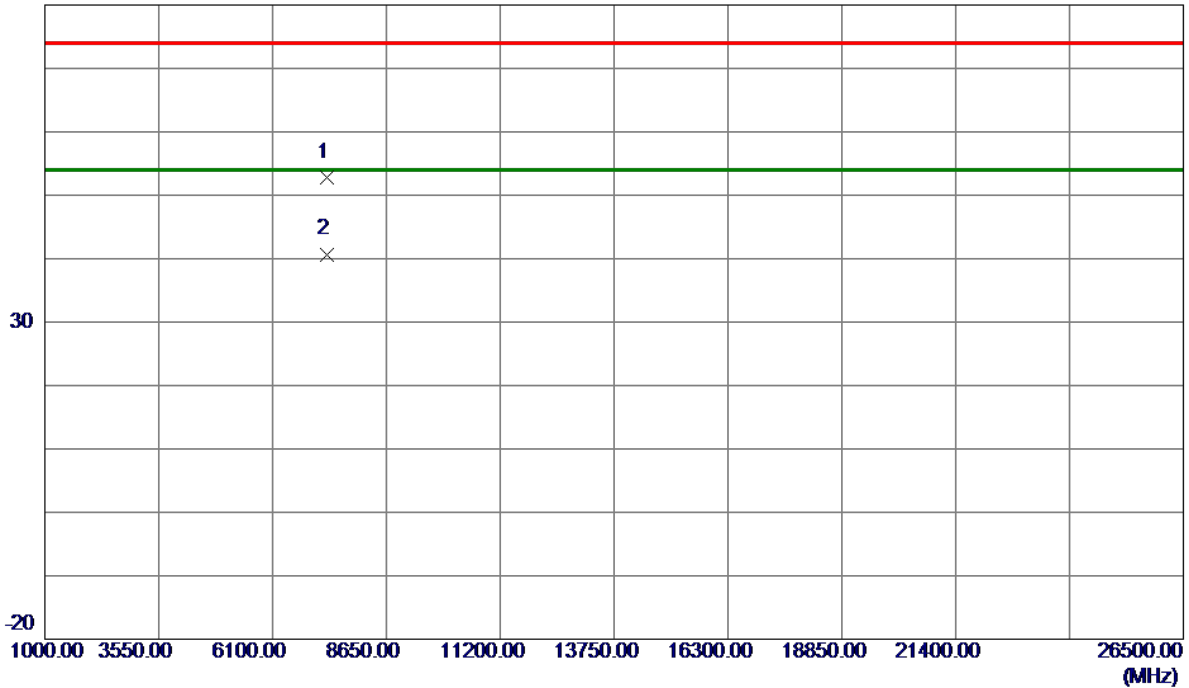


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7314.7400	42.99	9.86	52.85	74.00	-21.15	Peak	
2 *	7314.9400	30.84	9.86	40.70	54.00	-13.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

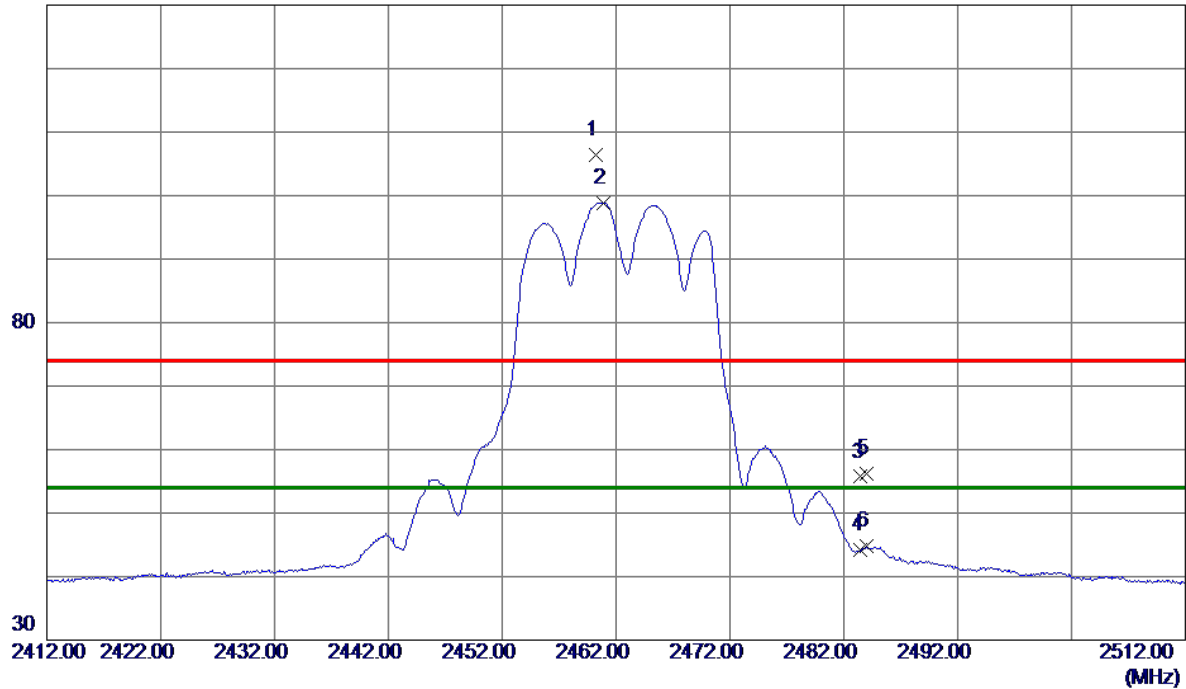


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2460.2000	99.30	7.19	106.49	74.00	32.49	Peak	No Limit
2 *	2460.9000	91.69	7.19	98.88	54.00	44.88	AVG	No Limit
3	2483.5000	48.51	7.19	55.70	74.00	-18.30	Peak	
4	2483.5000	37.06	7.19	44.25	54.00	-9.75	AVG	
5	2484.0000	48.99	7.19	56.18	74.00	-17.82	Peak	
6	2484.0000	37.53	7.19	44.72	54.00	-9.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

80 dBuV/m

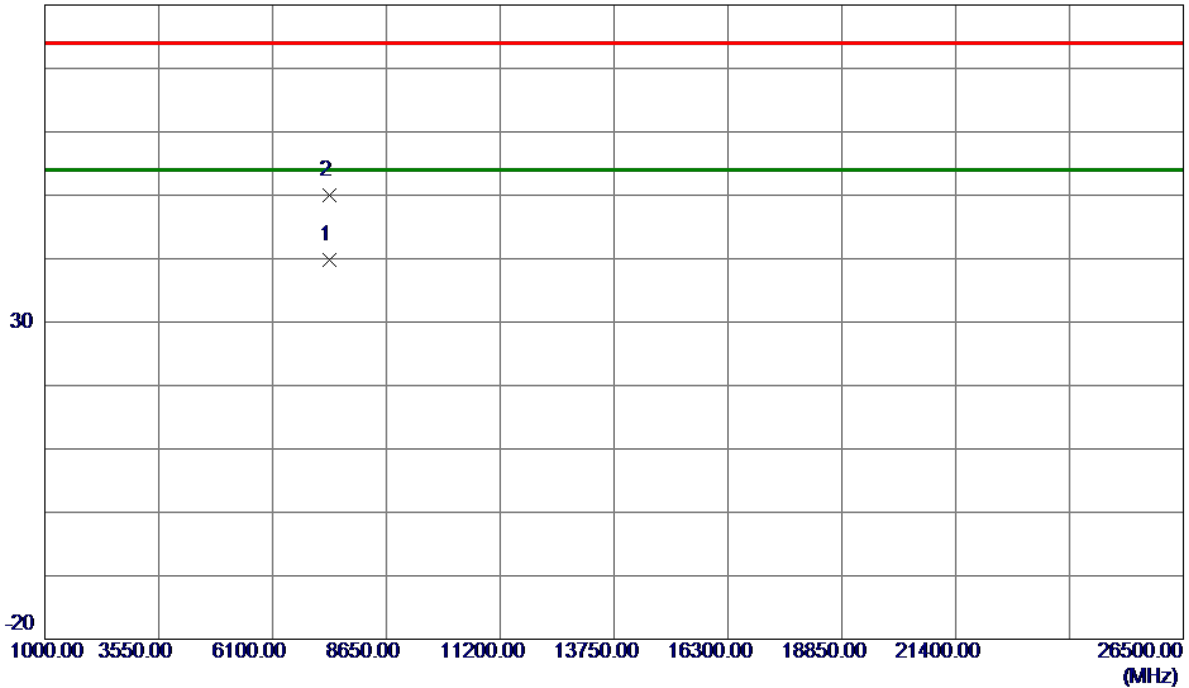


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7385.6200	29.90	9.93	39.83	54.00	-14.17	AVG	
2	7385.8500	39.98	9.93	49.91	74.00	-24.09	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

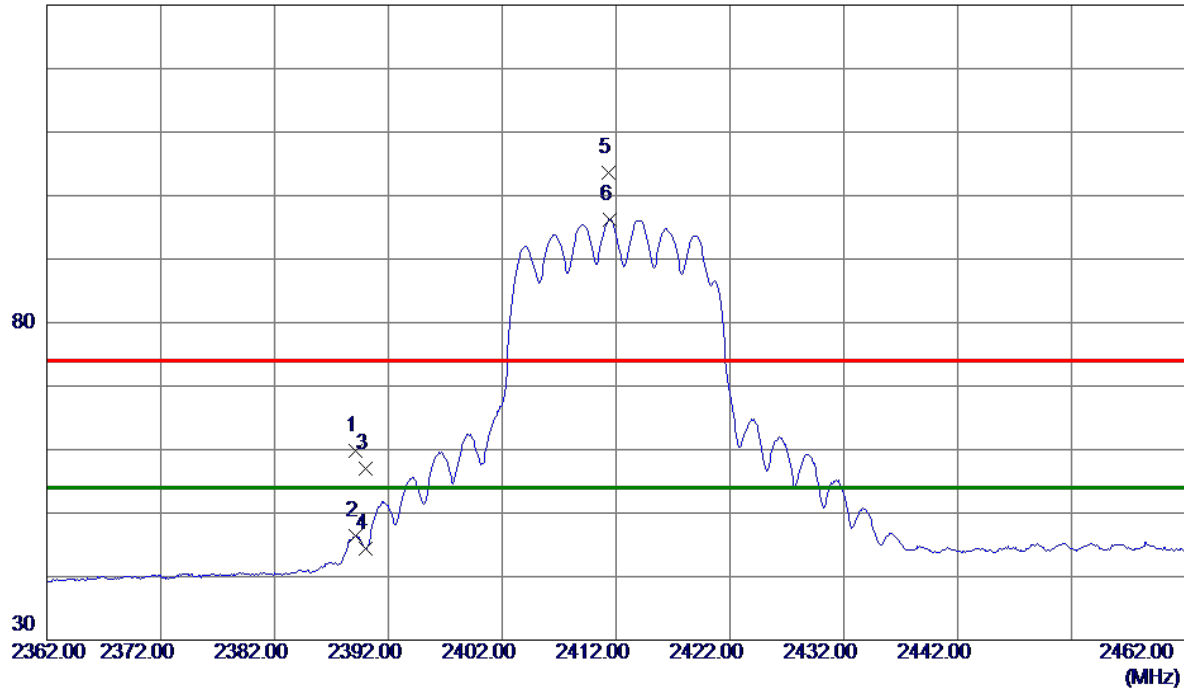


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.1000	52.63	7.17	59.80	74.00	-14.20	Peak	
2	2389.1000	39.25	7.17	46.42	54.00	-7.58	AVG	
3	2390.0000	49.88	7.17	57.05	74.00	-16.95	Peak	
4	2390.0000	37.23	7.17	44.40	54.00	-9.60	AVG	
5	2411.3000	96.41	7.17	103.58	74.00	29.58	Peak	No Limit
6 *	2411.4000	89.11	7.17	96.28	54.00	42.28	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

80 dBuV/m

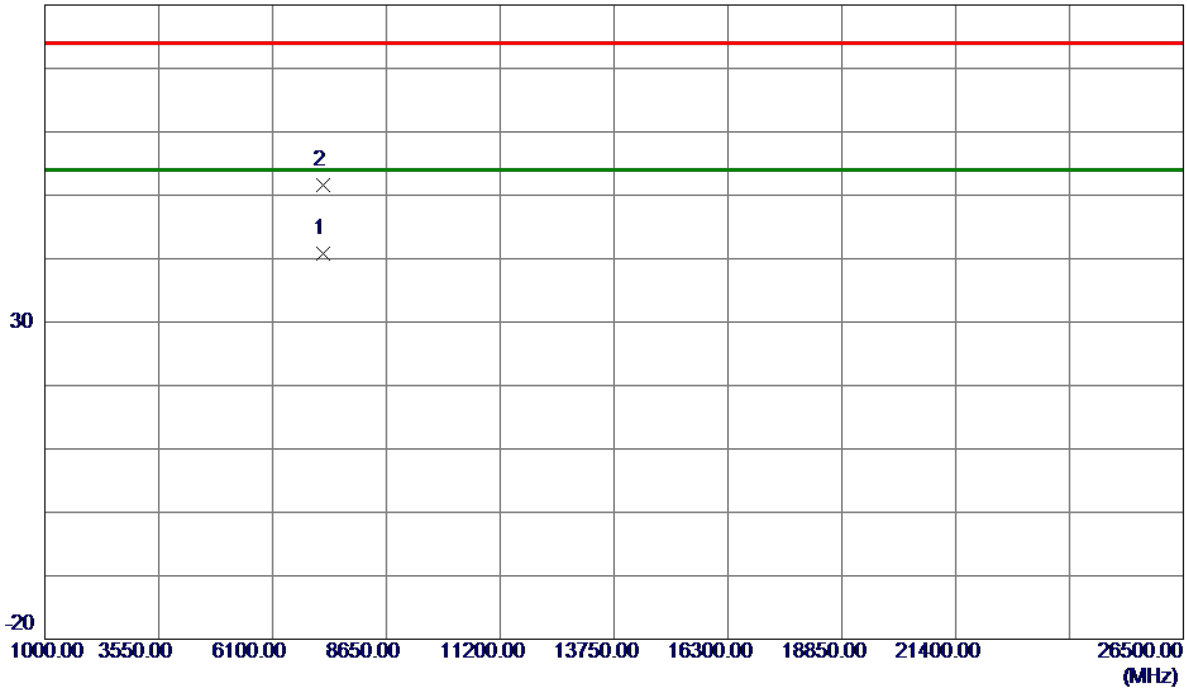


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7234.6600	30.98	9.79	40.77	54.00	-13.23	AVG	
2	7239.7900	41.86	9.80	51.66	74.00	-22.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

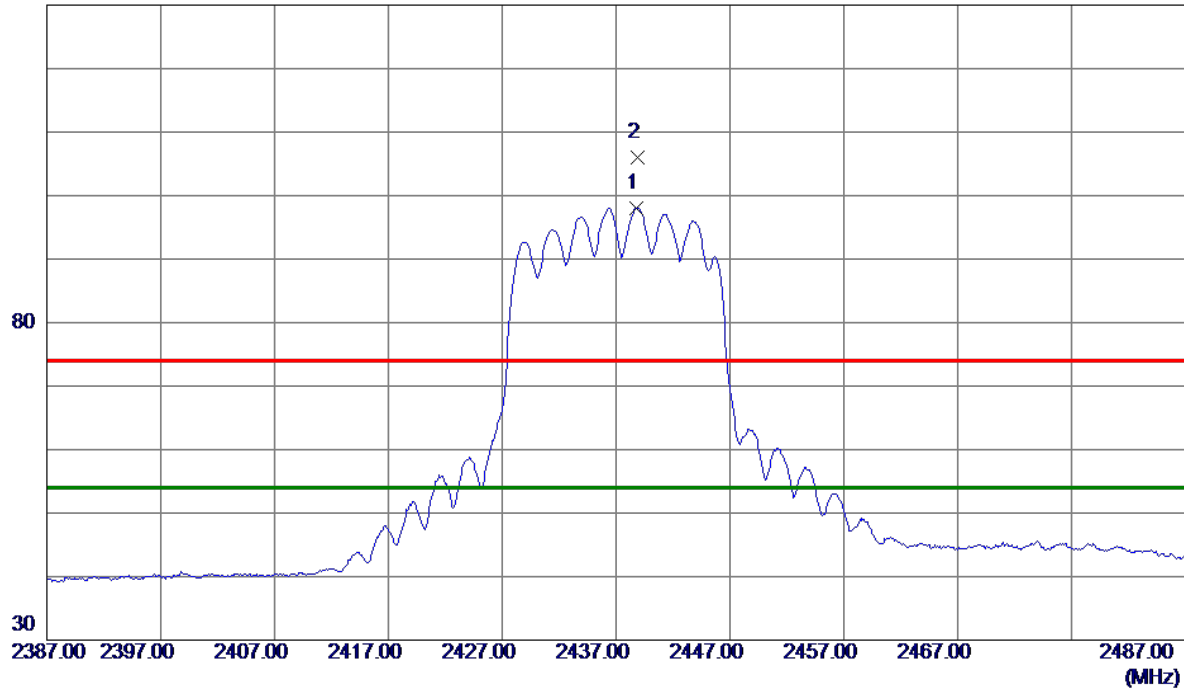


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2438.8000	90.86	7.18	98.04	54.00	44.04	AVG	No Limit
2	2438.9000	98.73	7.18	105.91	74.00	31.91	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

80 dBuV/m

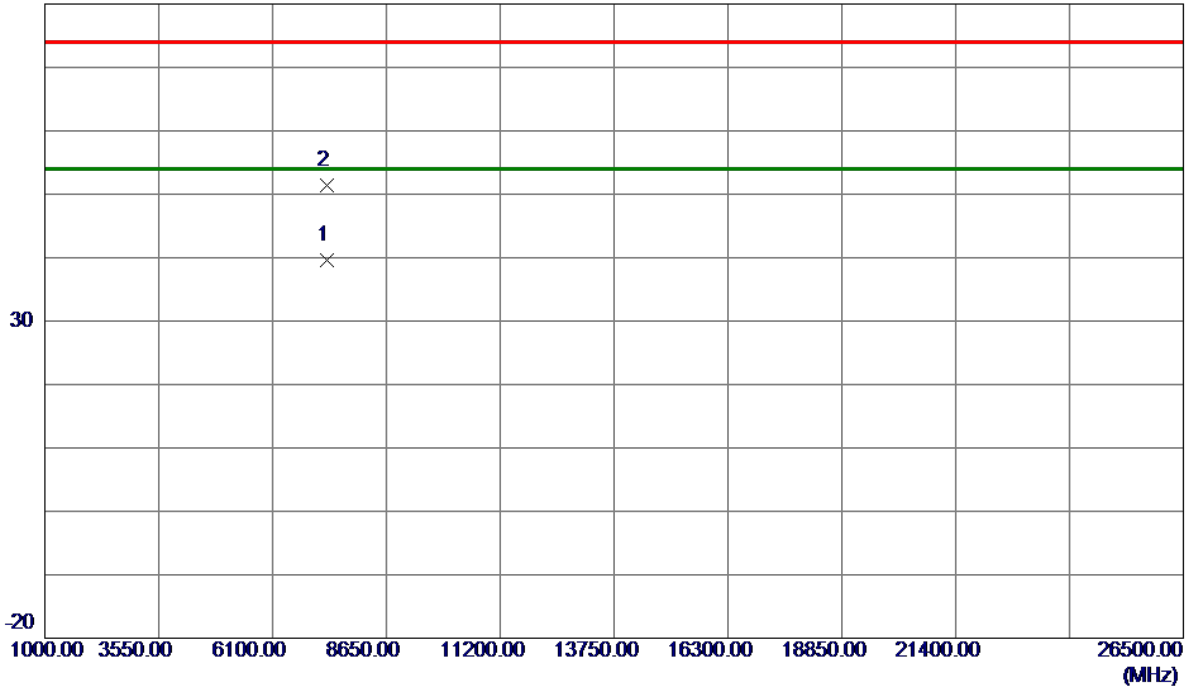


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7315.4400	29.78	9.86	39.64	54.00	-14.36	AVG	
2	7315.7500	41.53	9.86	51.39	74.00	-22.61	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

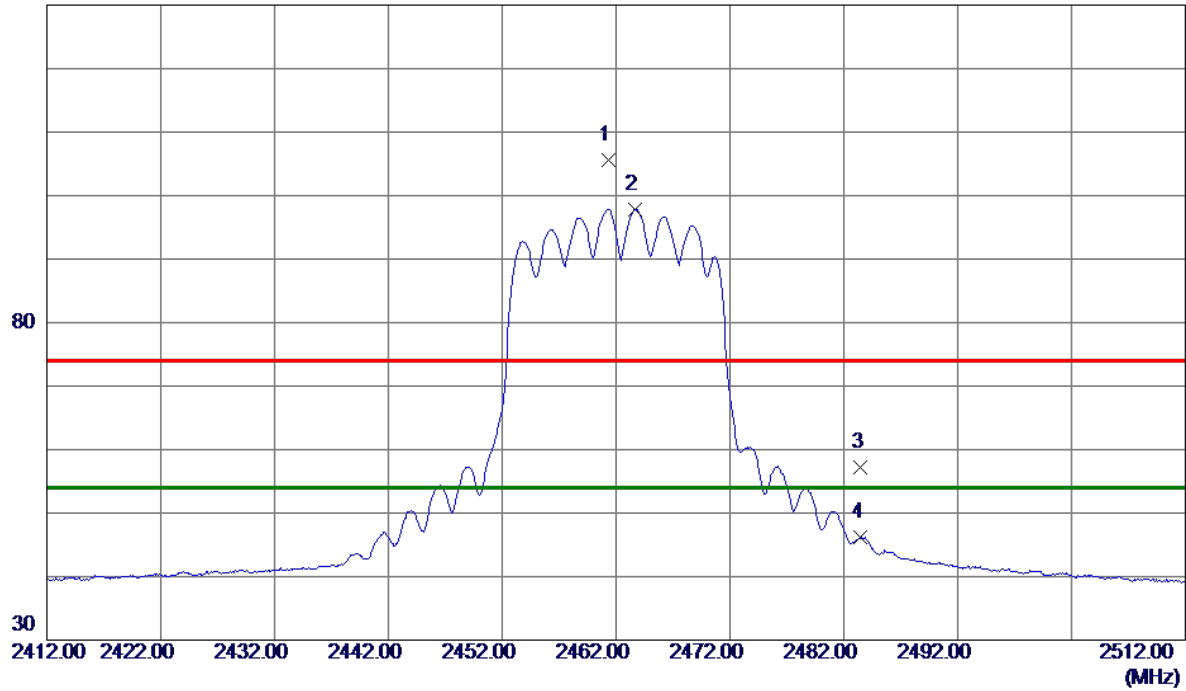


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2461.3000	98.46	7.19	105.65	74.00	31.65	Peak	No Limit
2 *	2463.7000	90.70	7.19	97.89	54.00	43.89	AVG	No Limit
3	2483.5000	50.07	7.19	57.26	74.00	-16.74	Peak	
4	2483.5000	38.92	7.19	46.11	54.00	-7.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

80 dBuV/m

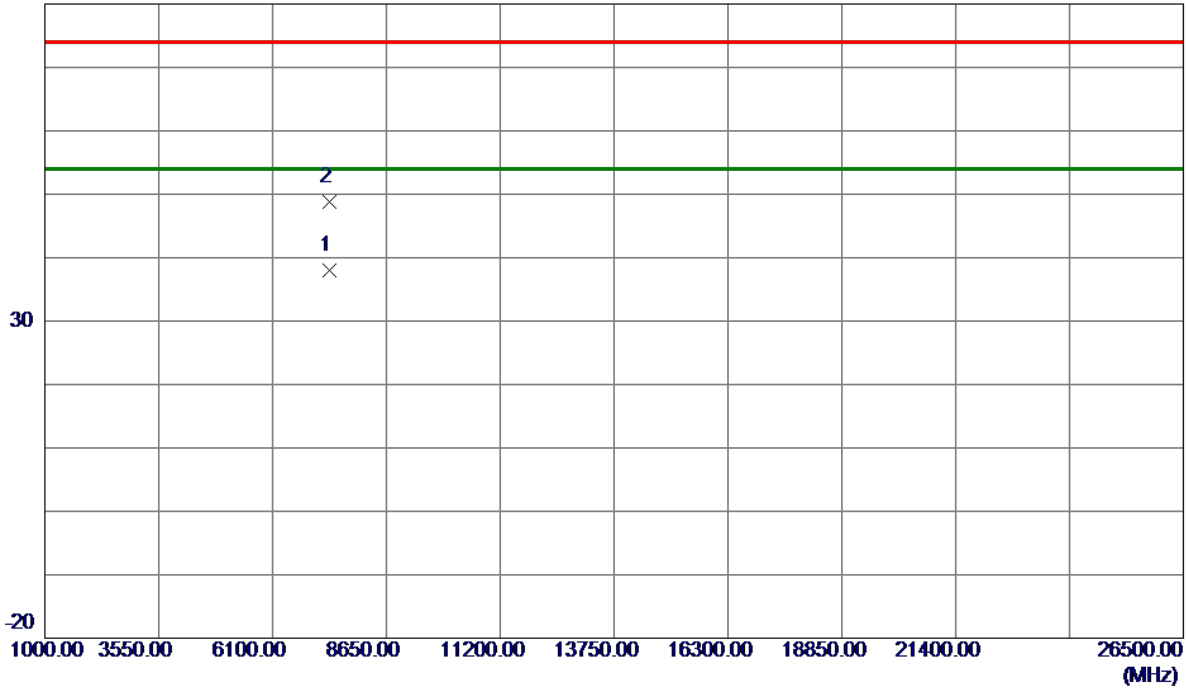


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7382.9700	28.13	9.92	38.05	54.00	-15.95	AVG	
2	7385.8800	38.87	9.93	48.80	74.00	-25.20	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

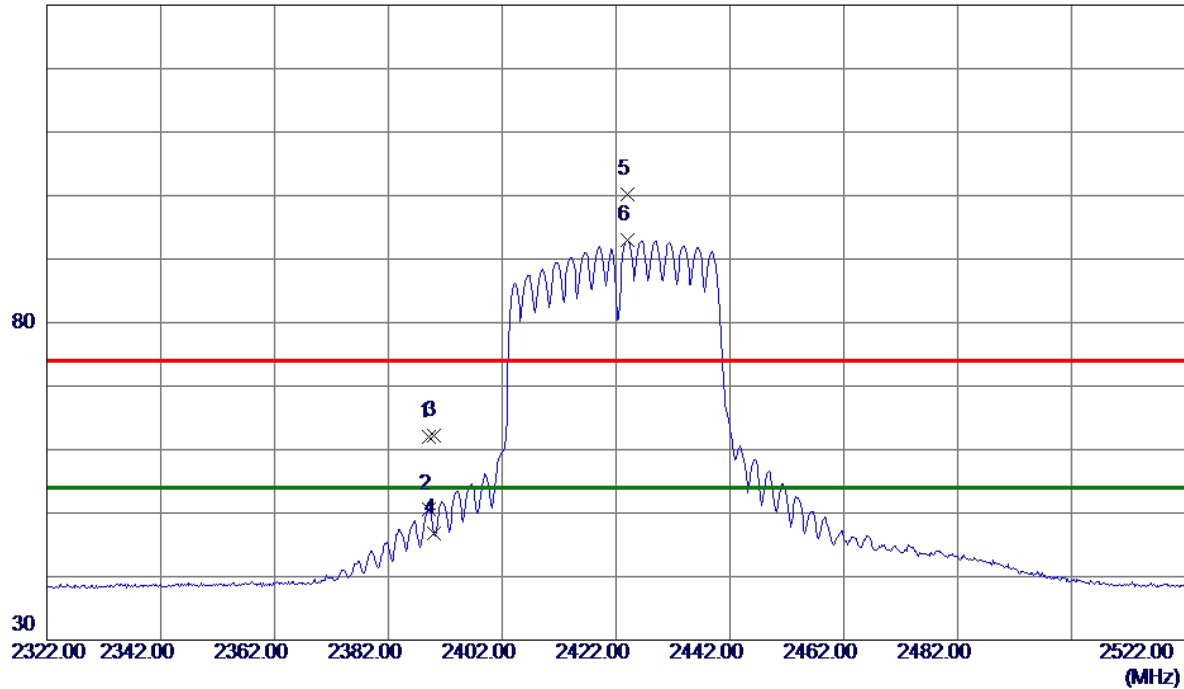


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.2000	54.85	7.17	62.02	74.00	-11.98	Peak	
2	2389.2000	43.47	7.17	50.64	54.00	-3.36	AVG	
3	2390.0000	54.95	7.17	62.12	74.00	-11.88	Peak	
4	2390.0000	39.62	7.17	46.79	54.00	-7.21	AVG	
5	2424.0000	92.97	7.18	100.15	74.00	26.15	Peak	No Limit
6 *	2424.0000	85.74	7.18	92.92	54.00	38.92	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

80 dBuV/m

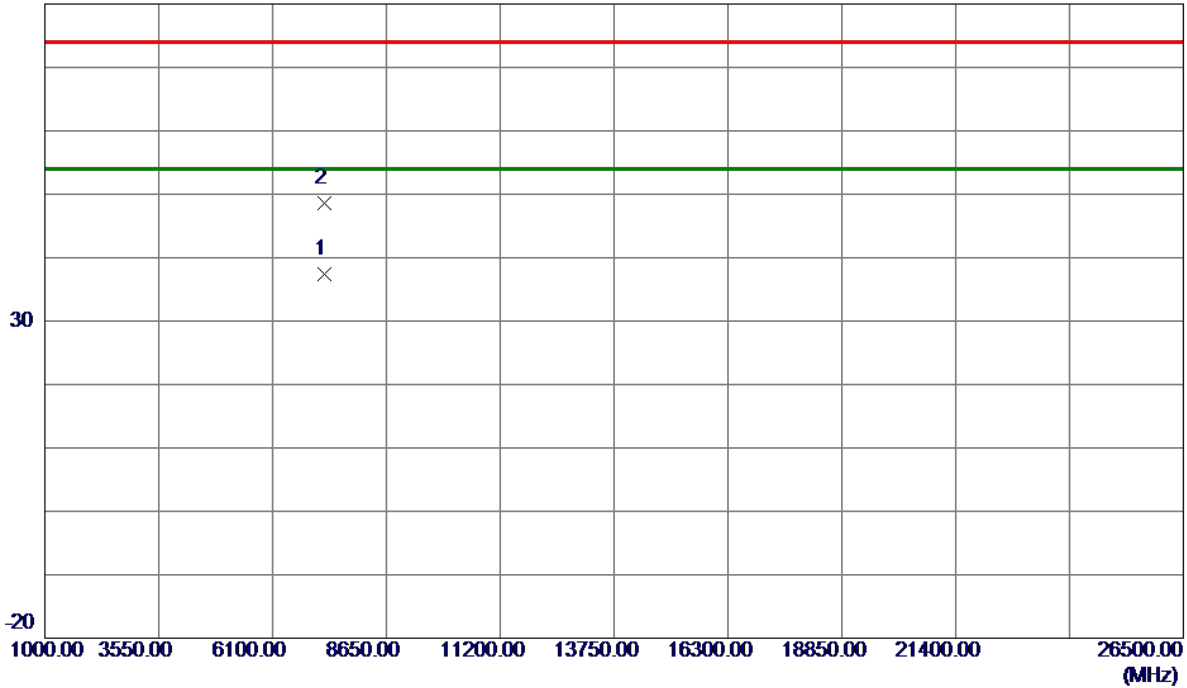


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7270.5600	27.59	9.82	37.41	54.00	-16.59	AVG	
2	7270.7600	38.78	9.82	48.60	74.00	-25.40	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

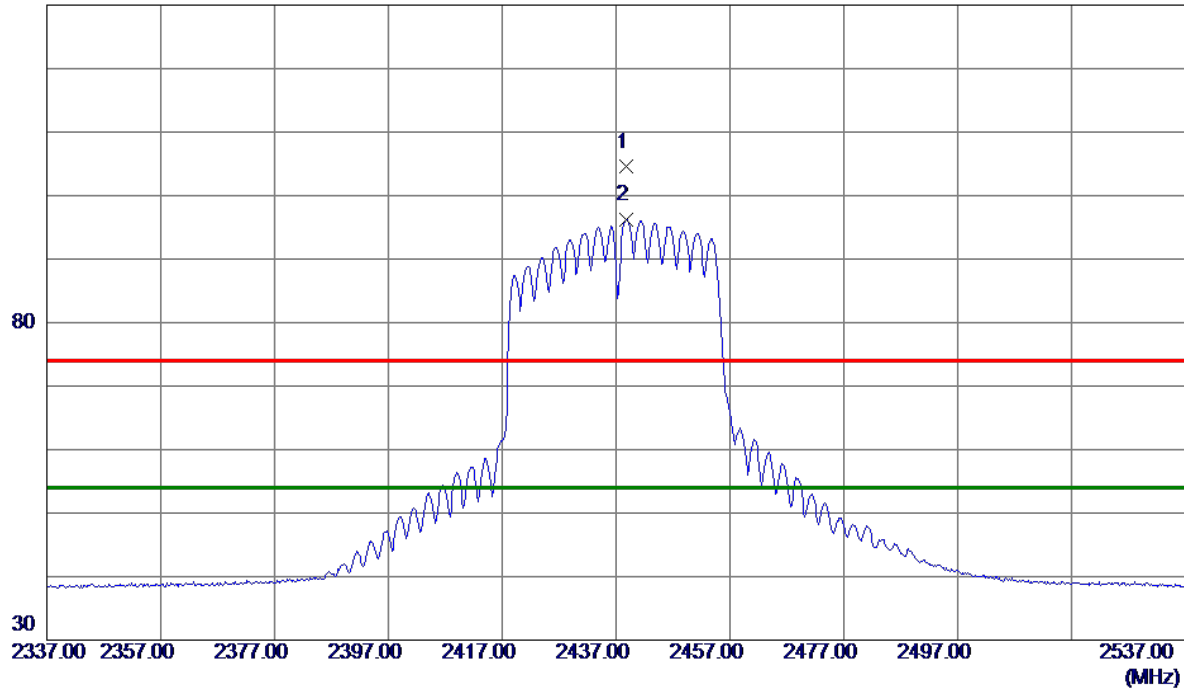


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2438.8000	97.32	7.18	104.50	74.00	30.50	Peak	No Limit
2 *	2438.8000	89.03	7.18	96.21	54.00	42.21	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

80 dBuV/m

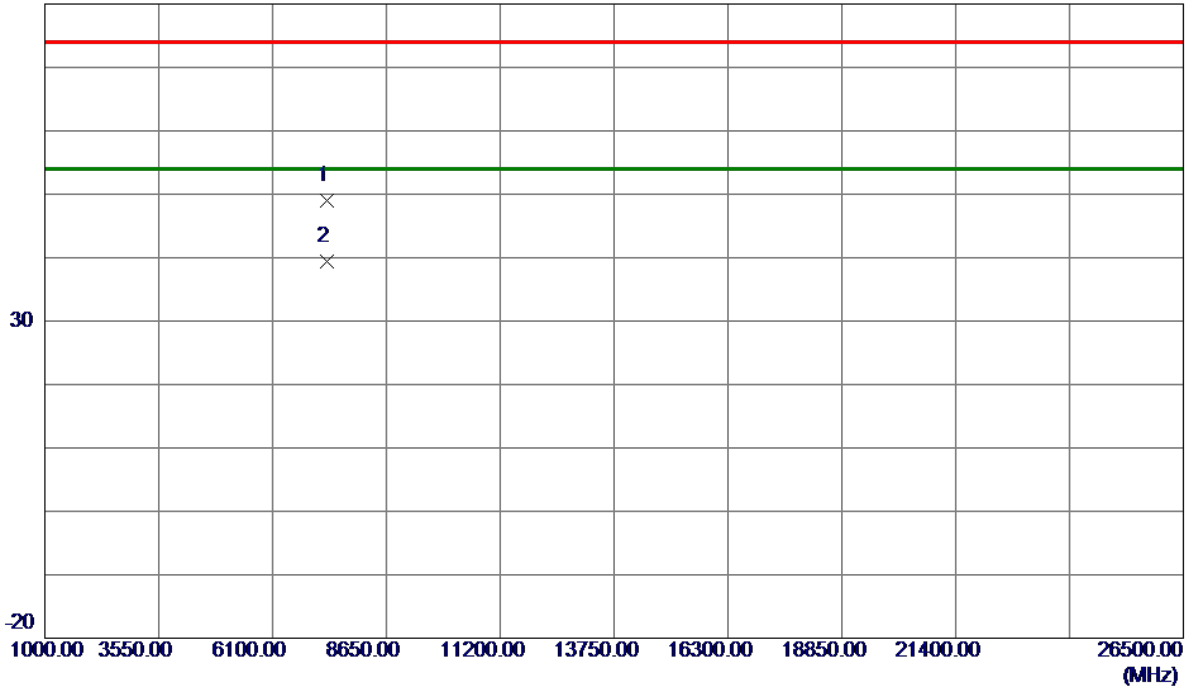


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7313.1500	39.16	9.86	49.02	74.00	-24.98	Peak	
2 *	7315.7400	29.57	9.86	39.43	54.00	-14.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

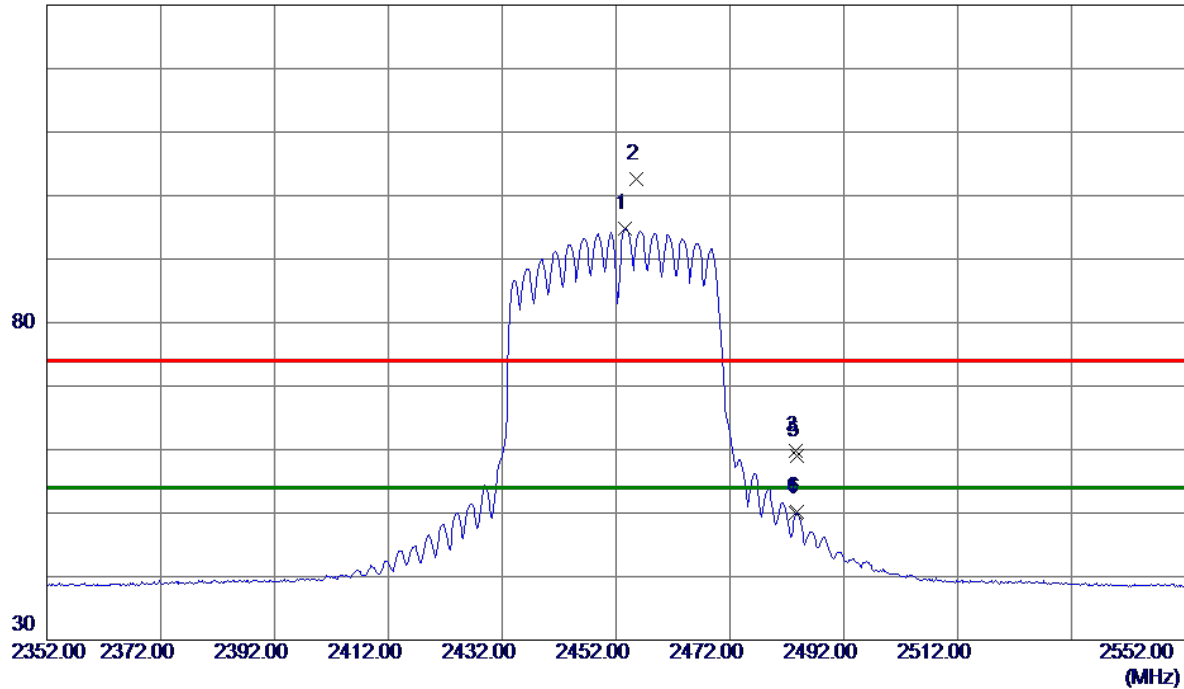


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2453.6000	87.58	7.18	94.76	54.00	40.76	AVG	No Limit
2	2455.6000	95.45	7.18	102.63	74.00	28.63	Peak	No Limit
3	2483.5000	52.60	7.19	59.79	74.00	-14.21	Peak	
4	2483.5000	42.76	7.19	49.95	54.00	-4.05	AVG	
5	2483.8000	51.79	7.19	58.98	74.00	-15.02	Peak	
6	2483.8000	43.06	7.19	50.25	54.00	-3.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

80 dBuV/m

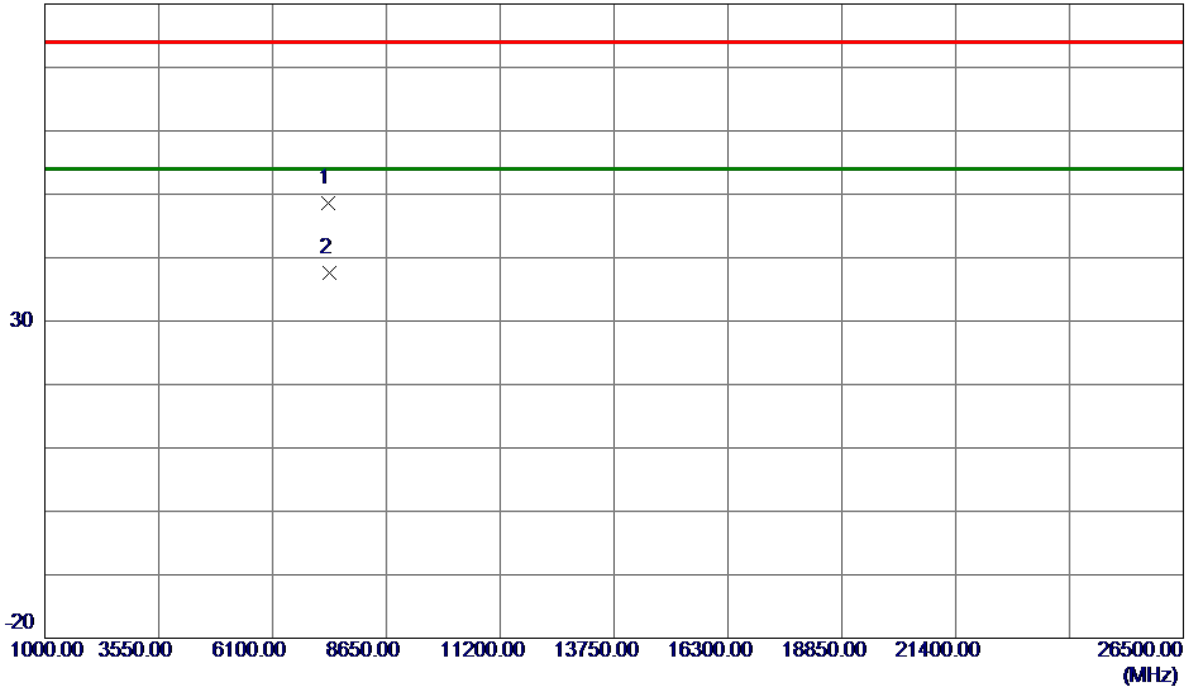

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7353.3300	38.63	9.90	48.53	74.00	-25.47	Peak	
2 *	7360.8400	27.69	9.90	37.59	54.00	-16.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - MAXIMUM OUTPUT POWER

Test Mode	TX B Mode
-----------	-----------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	15.20	0.00	15.20	30.00	1.0000	Complies
06	2437	15.21	0.00	15.21	30.00	1.0000	Complies
11	2462	15.31	0.00	15.31	30.00	1.0000	Complies

Test Mode	TX G Mode
-----------	-----------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	13.30	0.48	13.78	30.00	1.0000	Complies
06	2437	13.53	0.48	14.01	30.00	1.0000	Complies
11	2462	13.12	0.48	13.60	30.00	1.0000	Complies

Test Mode	TX N(HT20) Mode_Ant. 1
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	12.49	0.52	13.01	30.00	1.0000	Complies
06	2437	12.54	0.52	13.06	30.00	1.0000	Complies
11	2462	13.12	0.52	13.64	30.00	1.0000	Complies

Test Mode	TX N(HT20) Mode_Ant. 2
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	12.77	0.52	13.29	30.00	1.0000	Complies
06	2437	12.82	0.52	13.34	30.00	1.0000	Complies
11	2462	12.27	0.52	12.79	30.00	1.0000	Complies

Test Mode	TX N(HT20) Mode_Total
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.17	30.00	1.0000	Complies
06	2437	16.22	30.00	1.0000	Complies
11	2462	16.25	30.00	1.0000	Complies

Test Mode	TX N(HT40) Mode_Ant. 1
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	11.64	0.98	12.62	30.00	1.0000	Complies
06	2437	12.22	0.98	13.20	30.00	1.0000	Complies
09	2452	12.30	0.98	13.28	30.00	1.0000	Complies

Test Mode	TX N(HT40) Mode_Ant. 2
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	12.49	0.98	13.47	30.00	1.0000	Complies
06	2437	12.34	0.98	13.32	30.00	1.0000	Complies
09	2452	12.23	0.98	13.21	30.00	1.0000	Complies

Test Mode	TX N(HT40) Mode_Total
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.08	30.00	1.0000	Complies
06	2437	16.27	30.00	1.0000	Complies
09	2452	16.26	30.00	1.0000	Complies

End of Test Report