

FCC Test Report

Report No.: AGC12060240301FR02

FCC ID : 2AY4C-GAX01

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Mini PC

BRAND NAME : GEEKOM, geeknuc

AX8 Max, XT***Pro, XT***Max, A***, A***Pro, A***Max, AX***, AX***Pro, AX***Max, AE***, AE***Pro, AE***Max,

GT***, GT***Max, GT***Pro, XU***, XU***Pro, XU***Max,

MODEL NAME : AG***Pro, AG***Max, GT***Ultra, GT***Mega, U***Ultra,

U*** Mega, XT***Ultra, XT***Mega, IT***Ultra, IT***Mega(*= 0-9,A-Z,a-z, ""-" or blank)

APPLICANT: Shenzhen Jiteng Network Technology Co., Ltd

DATE OF ISSUE : Jul. 11, 2024

STANDARD(S) : FCC Part 15 Subpart C §15.247

REPORT VERSION :

Attestation Of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 66


Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jul. 11, 2024	Valid	Initial Release



Table of Contents

1	. General Information	5
2	. Product Information	6
	2.1 Product Technical Description	6
	2.2 Test Frequency List	6
	2.3 Related Submittal(S) / Grant (S)	7
	2.4 Test Methodology	7
	2.5 Special Accessories	7
	2.6 Equipment Modifications	7
	2.7 Antenna Requirement	7
3	. Test Environment	8
	3.1 Address of the Test Laboratory	8
	3.2 Test Facility	8
	3.3 Environmental Conditions	9
	3.4 Measurement Uncertainty	
	3.5 List of Equipment Use	10
4	.System Test Configuration	12
	4.1 EUT Configuration	12
	4.2 EUT Exercise	
	4.3 Configuration of Tested System	
	4.4 Equipment Used In Tested System	
	4.5 Summary of Test Results	14
	. Description of Test Modes	
6	. Duty Cycle Measurement	16
7	. RF Output Power Measurement	17
	7.1 Provisions Applicable	
	7.2 Measurement Procedure	
	7.3 Measurement Setup (Block Diagram of Configuration)	
	7.4 Measurement Result	18
8	. 6dB Bandwidth Measurement	20
	8.1 Provisions Applicable	
	8.2 Measurement Procedure	
	8.3 Measurement Setup (Block Diagram of Configuration)	
	8.4 Measurement Results	
9	. Power Spectral Density Measurement	
	9.1 Provisions Applicable	
	9.2 Measurement Procedure	
	9.3 Measurement Setup (Block Diagram of Configuration)	
	9.4 Measurement Results	
	0. Conducted Band Edge and Out-of-Band Emissions	
Αı	10.1 Provisions Applicable	. 28 ion
_	The first state of the second state of the sec	





10.2 Measurement Procedure	28
10.3 Measurement Setup (Block Diagram of Configuration)	28
10.4 Measurement Results	29
11. Radiated Spurious Emission	35
11.1 Measurement Limit	35
11.2 Measurement Procedure	35
11.3 Measurement Setup (Block Diagram of Configuration)	38
11.4 Measurement Result	38
12. AC Power Line Conducted Emission Test	58
12.1 Measurement Limit	58
12.2 Measurement Setup (Block Diagram of Configuration)	58
12.3 Preliminary Procedure of Line Conducted Emission Test	59
12.4 Final Procedure of Line Conducted Emission Test	59
12.5 Measurement Results	59
Appendix I: Photographs of Test Setup	66
Appendix II: Photographs of Test EUT	66



Page 5 of 66

1. General Information

Applicant	Shenzhen Jiteng Network Technology Co., Ltd
Address	Floor 7, Building B, Boton Science and Technology Park, Chaguang Road, Xili
7 1441 000	Street, Nanshan District, Shenzhen, China
Manufacturer	Shenzhen Jiteng Network Technology Co., Ltd
Address	Floor 7, Building B, Boton Science and Technology Park, Chaguang Road, Xili
Address	Street, Nanshan District, Shenzhen, China
Factory	China Greatwall Technology Group Co., Ltd.Shiyan Branch
Address	Great-Wall Computer Industry Park, Baoshi East Rd.Shiyan County, Baoan,
Addicas	Shenzhen, P.R.China
Product Designation	Mini PC
Brand Name	GEEKOM, geeknuc
Test Model	AX8 Max
Series Model(s)	XT***Pro, XT***Max, A***, A***Pro, A***Max, AX***, AX***Pro, AX***Max, AE***, AE***Pro, AE***Max, GT***Max, GT***Pro, XU***, XU***Pro, XU***Max, AG***Pro, AG***Max, GT***Ultra, GT***Mega, U***Ultra, U*** Mega, XT***Ultra, XT***Mega, IT***Ultra, IT***Mega(*= 0-9,A-Z,a-z,""-"or blank)
Difference Description	Please review the manufacturer's model difference statement
Date of receipt of test item	Mar. 14, 2024
Date of Test	Mar. 14, 2024~Jul. 11, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BLE-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Alan Duan	
	Alan Duan (Project Engineer)	Jul. 11, 2024
Reviewed By	Calin Liu	
	Calvin Liu (Reviewer)	Jul. 11, 2024
Approved By	Max Zhang	
	Max Zhang Authorized Officer	Jul. 11, 2024



Page 6 of 66

2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.2
Modulation Type	BLE ⊠GFSK 1Mbps □GFSK 2Mbps
Number of channels	40
Carrier Frequency of Each Channel	40 Channels (37 Data channels + 3 advertising channels)
Channel Separation	2 MHz
Maximum Transmitter Power	Bluetooth LE (1Mbps): 0.084dBm (0.001W)
Hardware Version	NUCPN01_MB_V20
Software Version	Windows 11
Antenna Designation	Iron Antenna
Antenna Gain	3.09dBi
Power Supply	DC 19V for by adapter

2.2 Test Frequency List

Frequency Band Channel Number		Frequency		
	0	2402 MHz		
	1	2404 MHz		
	:	:		
2400~2483.5MHz	19	2440MHz		
	:	:		
	38	2478 MHz		
	39	2480 MHz		
Note: f = 2402 + 2*k MHz, k = 0,, 39 f is the operating frequency (MHz); k is the operating channel.				



Page 7 of 66

2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2AY4C-GAX01**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 3.09dBi.



Page 8 of 66

3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 9 of 66

3.3 Environmental Conditions

	Normal Conditions		
Temperature range (℃)	15 - 35		
Relative humidity range	20 % - 75 %		
Pressure range (kPa)	86 - 106		
Power supply	DC 19V		

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%

uncertainty multiplied by a coverage factor of k=2, pro	viding a level of confidence of approximately 95 %.		
Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$		
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of spurious emissions, conducted	U _c = ±2 %		
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %		
	Uncertainty of Conducted Emission for AC Port Uncertainty of Radiated Emission below 1GHz Uncertainty of Radiated Emission above 1GHz Uncertainty of total RF power, conducted Uncertainty of RF power density, conducted Uncertainty of spurious emissions, conducted		



Report No.: AGC12060240301FR02 Page 10 of 66

3.5 List of Equipment Use

• R	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31		
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23		
\boxtimes	AGC-ER-E061	Spectrum Analyzer	Agilent	N9020A	MY52090123	2023-06-03	2024-06-02		
\boxtimes	AGC-ER-E061	Spectrum Analyzer	Agilent	N9020A	MY52090123	2024-05-28	2025-05-27		
	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31		
	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31		
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08		
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31		
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22		
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02	
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-04-02	2024-04-01	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	



Page 11 of 66

A	AC Power Line Conducted Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024-06-02
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27

• Te	Test Software					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information	
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71	
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A	
\boxtimes	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6	
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0	



Page 12 of 66

4. System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Earphone	CXT	N/A	N/A	1.2m unshielded
2	Keyboard	Dell	SK-8120	N/A	1.8m,unshielded
3	Mouse	Dell	EMS-537A	N/A	1.7m,unshielded
4	U Disc	Kingston	DT100G3	32G	N/A



Page 13 of 66

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Adapter 1#	Shenzhen Hyleton Technology Co., Ltd.	Hyleton-120W-1906320	Input: AC 100-240V 50/60Hz, 2A Output: DC 19V 6.32A	3.5m
2	Adapter 2#	SHENZHEN BSY TECHNOLOGY CO.,LTD.	BSY120S1906323D	Input: AC 100-240V 50/60Hz, 2.5A Output: DC 19V 6.32A	3.5m
3	Adapter 3#	FSP Group Inc.	FSP120-ABBU3	Input: AC 100-240V 50/60Hz, 1.4A Output: DC 19V 6.32A	3.5m



Report No.: AGC12060240301FR02 Page 14 of 66

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(3)	RF Output Power	Pass
3	§15.247 (a)(2)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density Pa	
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.209	Radiated Emission& Band Edge Pa	
7	§15.207	AC Power Line Conducted Emission Pas	




Report No.: AGC12060240301FR02 Page 15 of 66

5. Description of Test Modes

Summary Table of Test Cases				
To at the me	Data Rate / Modulation			
Test Item	Bluetooth – LE(1Mbps) / GFSK			
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(AC/DC adapter)			
Radiated & Conducted Test Cases	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(AC/DC adapter)			
1031 04303	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(AC/DC adapter)			
AC Conducted Emission	Mode 1: Bluetooth Link from AC/DC Adapter 1# Mode 2: Bluetooth Link from AC/DC Adapter 2# Mode 3: Bluetooth Link from AC/DC Adapter 3#			

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 4. Radiation test evaluation: The main test model and series models are pre-tested with 3 adapters, and the appearance of the main test model (model: AX8 Max) and the 3 adapters is recorded as the worst result; the difference in the shell of the power supply end interference part is ignored and only the appearance of the main test model (model: AX8 Max) and the 3 adapters is recorded as the worst result.
- Regarding Radiated Band Edge, as the worst result, only the main test appearance (model: AX8 Max) is r eflected with adapter 1#.

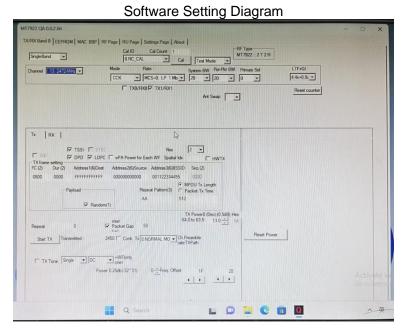



Page 16 of 66

6. Duty Cycle Measurement


The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Avg. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
BLE_1Mbps	1638.4	0.6	-1.21	0.61

Remark:

- 1. Duty Cycle factor = 10 * log (1/ Duty cycle)
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value

The test plots as follows:

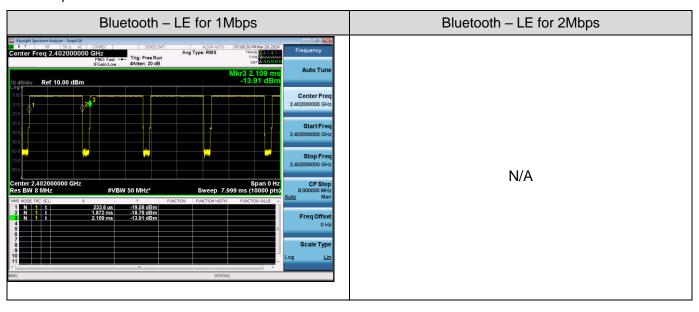



Page 17 of 66

7. RF Output Power Measurement

7.1 Provisions Applicable


For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


7.2 Measurement Procedure

- For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:
- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW≥DTS bandwidth
- 3. Set the VBW ≥ [3 x RBW].
- 4. Span ≥ [3 x RBW].
- 5. Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:
- 1. The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.


7.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

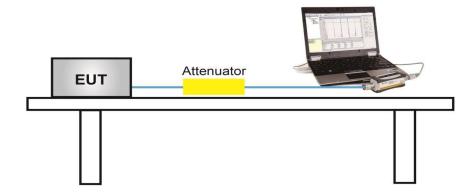






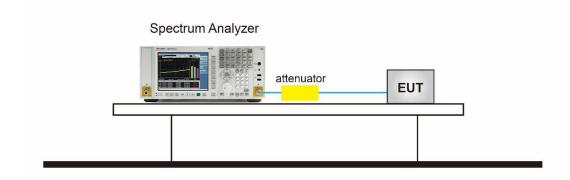


7.4 Measurement Result

Test Data of Conducted Output Power					
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
	2402	-0.174	≤30	Pass	
GFSK_1Mbps	2440	0.084	≤30	Pass	
	2480	-1.053	≤30	Pass	

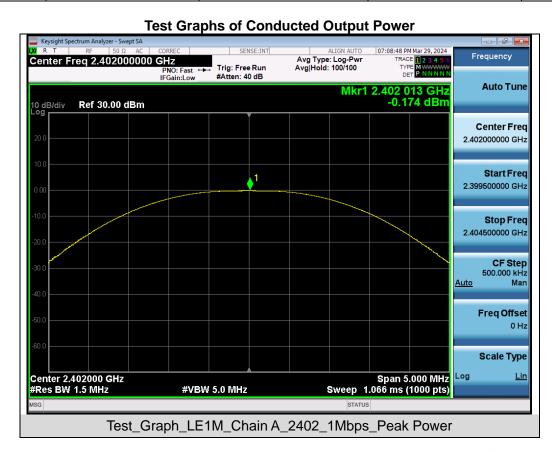





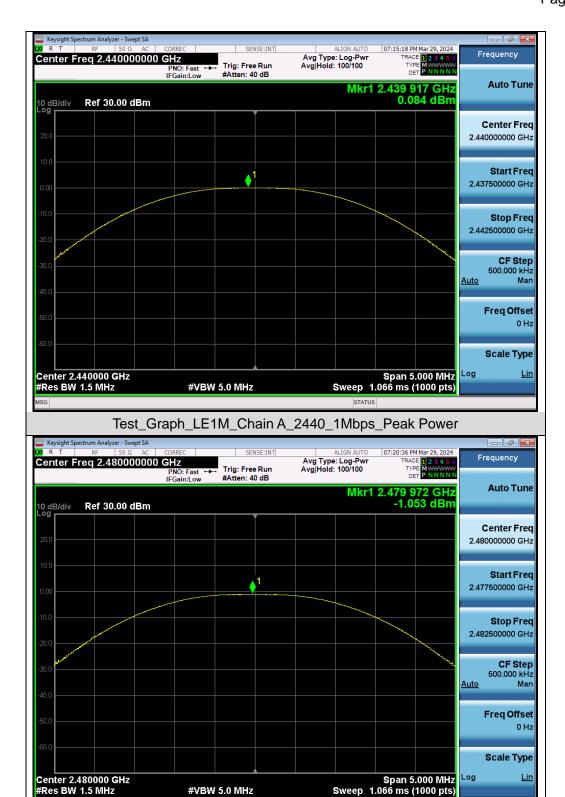

Test Graph LE1M Chain A 2480 1Mbps Peak Power

#VBW 5.0 MHz



Report No.: AGC12060240301FR02 Page 20 of 66

8. 6dB Bandwidth Measurement

8.1 Provisions Applicable


The minimum 6 dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss
 was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

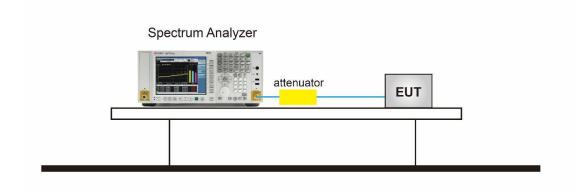



Report No.: AGC12060240301FR02 Page 21 of 66

8.4 Measurement Results


Test Data of Occupied Bandwidth and DTS Bandwidth					
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail
GFSK_1Mbps	2402	1.014	0.670	≥0.5	Pass
	2440	1.014	0.668	≥0.5	Pass
	2480	1.014	0.667	≥0.5	Pass

Test Graphs of Occupied Bandwidth 07:08:22 PM Mar 29, 2024 Radio Std: None SENSE:INT Center Freq: 2.402000000 GHz
Trig: Free Run Avg|Hol
#Atten: 30 dB Avg|Hold: 10/10 Radio Device: BTS #IFGain:Low Ref 20.00 dBm Center Frea 2.402000000 GHz Center 2.402 GHz #Res BW 30 kHz Span 3 MHz Sweep 4.133 ms **CF Step #VBW** 100 kHz 300.000 kHz Man Auto **Total Power** 6.25 dBm **Occupied Bandwidth** 1.0136 MHz Freq Offset **Transmit Freq Error** 7.040 kHz % of OBW Power 99.00 % x dB Bandwidth 1.236 MHz x dB -26.00 dB Test_Graph_LE1M_Chain A_2402_1Mbps_OBW












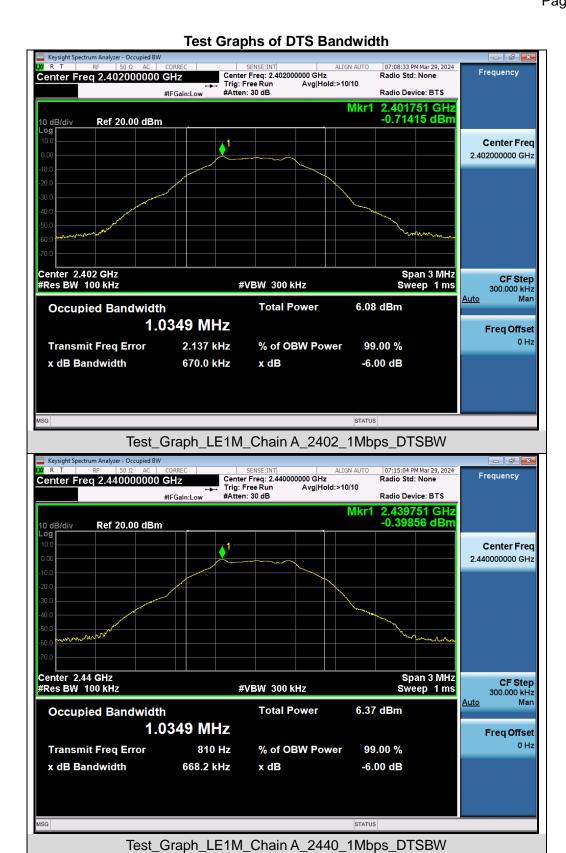









Page 25 of 66

9. Power Spectral Density Measurement

9.1 Provisions Applicable


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss
 was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- 6. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

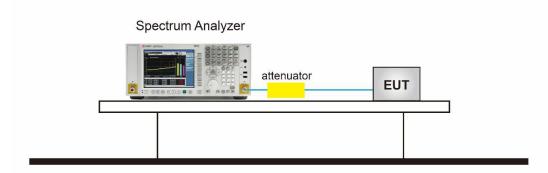




Page 26 of 66

9.4 Measurement Results


Test Data of Conducted Output Power Spectral Density				
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail
	2402	-16.516	≤8	Pass
GFSK_1Mbps	2440	-16.300	≪8	Pass
	2480	-17.394	≪8	Pass

Test Graphs of Conducted Output Power Spectral Density







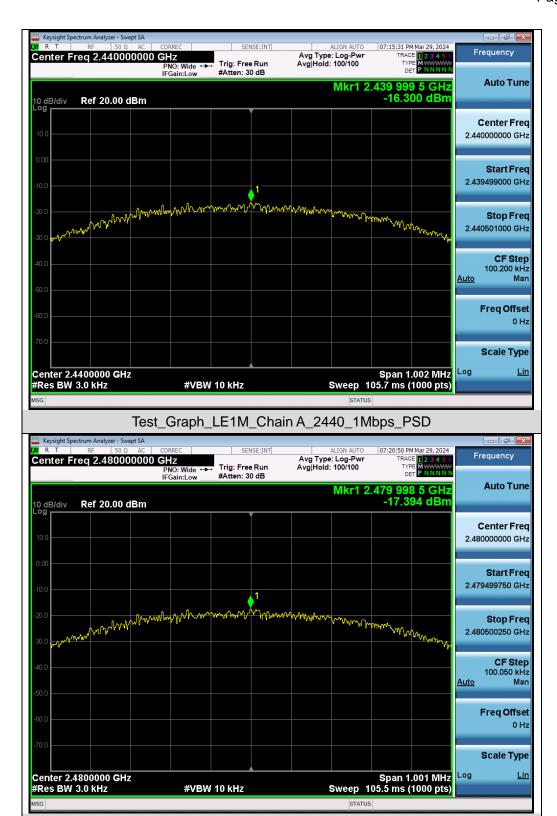

Test Graph LE1M Chain A 2480 1Mbps PSD



Page 28 of 66

10. Conducted Band Edge and Out-of-Band Emissions


10.1 Provisions Applicable


The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to ≥ 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW ≥ 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

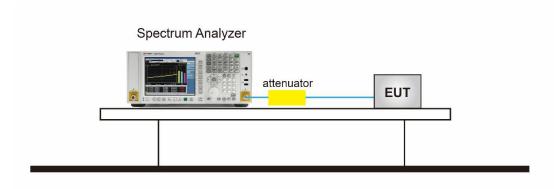







10.4 Measurement Results


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



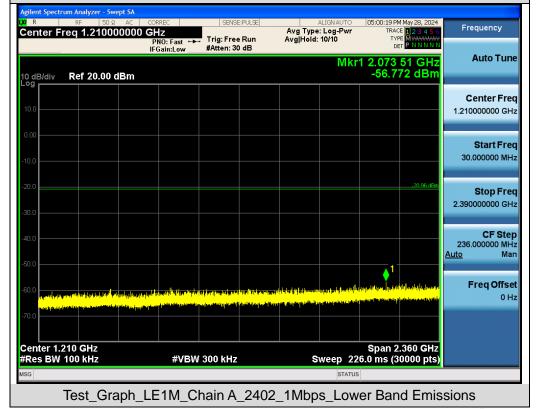





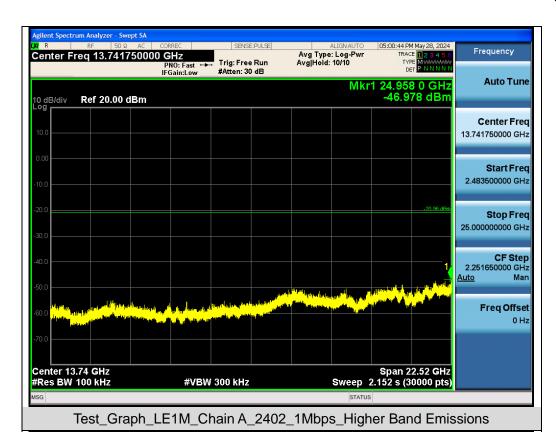






Test Graph LE1M Chain A 2440 1Mbps Reference Level






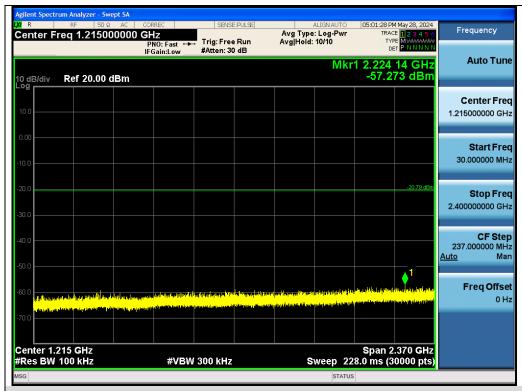




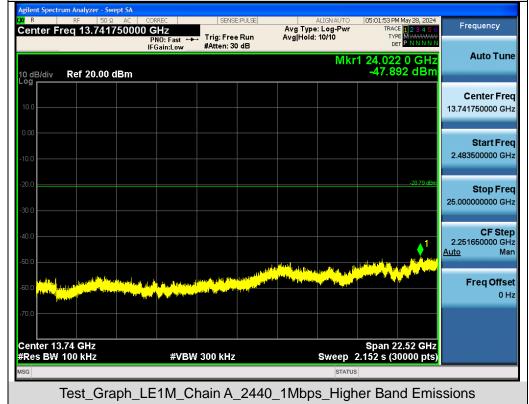










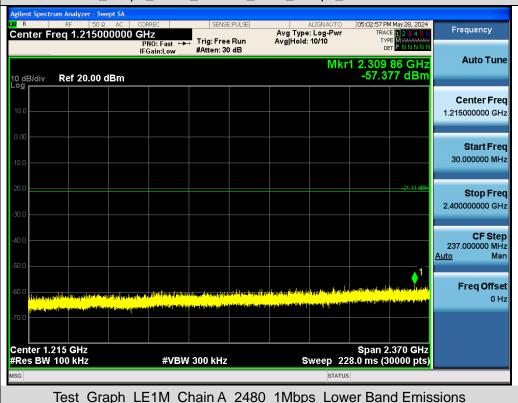






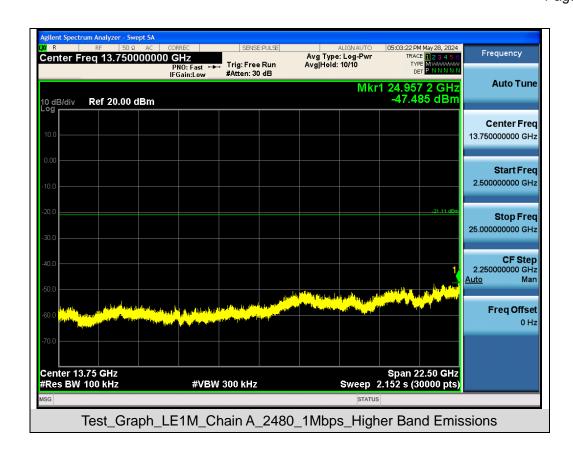





Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

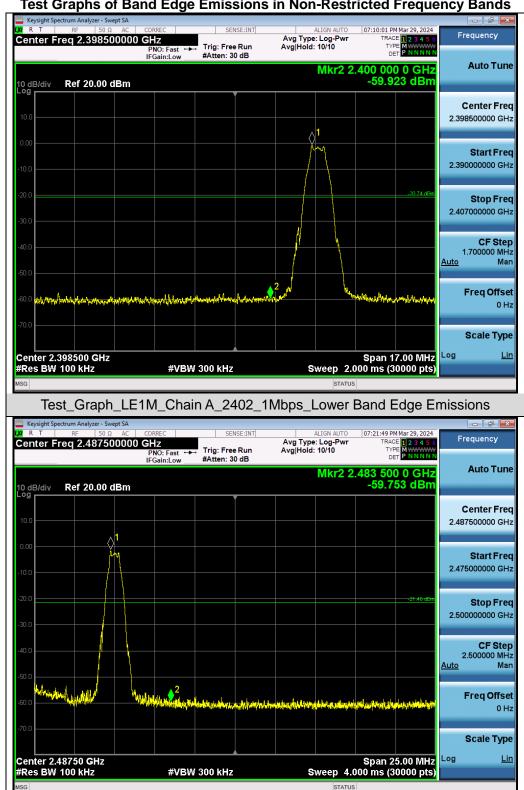

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE1M_Chain A_2480_1Mbps_Higher Band Edge Emissions



Page 35 of 66

11. Radiated Spurious Emission

11.1 Measurement Limit

FCC Part 15 209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



Report No.: AGC12060240301FR02 Page 36 of 66

pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP
Start ~Stop Frequency	1GHz~26.5GHz
Clart - Clop i requerity	1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



Page 37 of 66

Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


Average Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




11.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9kHz-30MHz

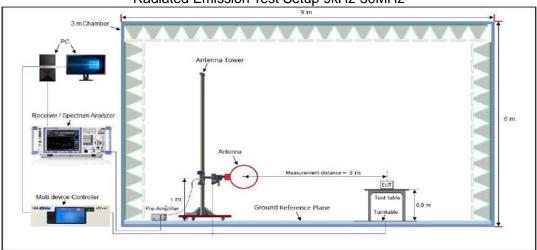

Radiated Emission Test Setup 30MHz-1000MHz

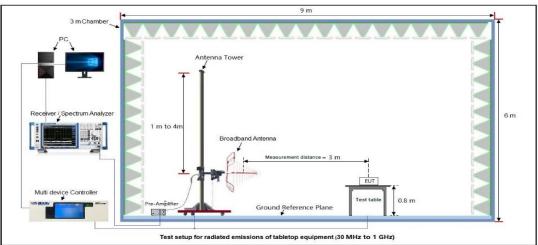

Radiated Emission Test Setup Above 1000MHz

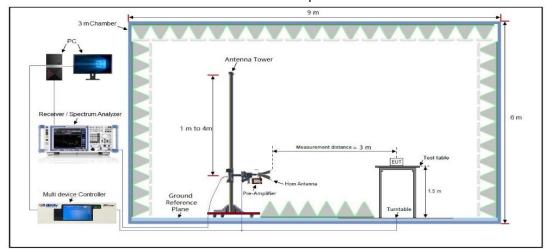

11.4 Measurement Result

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Report No.: AGC12060240301FR02 Page 39 of 66

Radiated Emission Below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz								
EUT Name Mini PC Model Name AX8 Max								
Temperature	25℃	Relative Humidity	55.4%					
Pressure	960hPa	Test Voltage	DC 19V by adapter 1#					
Test Mode	Mode 2	Antenna Polarity	Horizontal					




Peak	Data	List	Peak
------	------	------	------

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	119.8556	38.66	16.40	43.50	4.84	100	160	Horizontal
2	198.5880	36.00	14.34	43.50	7.5	100	170	Horizontal
3	248.5519	33.25	15.14	46.00	12.75	100	90	Horizontal
4	298.2681	33.69	16.36	46.00	12.31	100	220	Horizontal
5	444.8514	33.81	24.93	46.00	12.19	100	160	Horizontal
6	900.1474	38.42	31.78	46.00	7.58	100	140	Horizontal





Radiated Emission Test Results at 30MHz-1GHz								
EUT Name	Mini PC	Model Name	AX8 Max					
Temperature	25 ℃	Relative Humidity	55.4%					
Pressure	960hPa	Test Voltage	DC 19V by adapter 1#					
Test Mode Mode 2 Antenna Polarity Vertical								
72.0	40.377-		•					

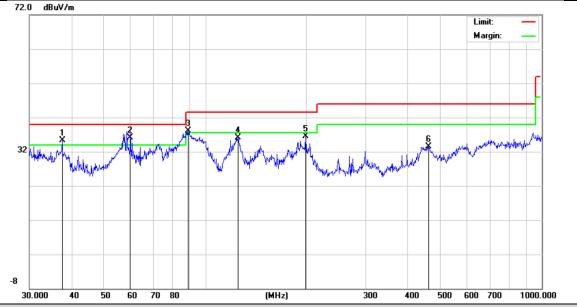

Peak Data List_Peak


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	37.5479	35.30	16.09	40.00	4.7	100	100	Vertical
2	59.8588	36.02	17.10	40.00	3.98	100	180	Vertical
3	88.9639	38.14	15.69	43.50	5.36	100	100	Vertical
4	125.0066	36.16	17.82	43.50	7.34	100	250	Vertical
5	198.5880	36.43	17.94	43.50	7.07	100	170	Vertical
6	460.7271	33.43	25.15	46.00	12.57	100	120	Vertical

RESULT: Pass




Page 41 of 66

	Radiated Emission Test Results at 30MHz-1GHz								
EUT Name	Mini PC	Model Name	AX8 Max						
Temperature	25℃	Relative Humidity	55.4%						
Pressure	960hPa	Test Voltage	DC 19V by adapter 2#						
Test Mode	Mode 2	Antenna Polarity	Horizontal						

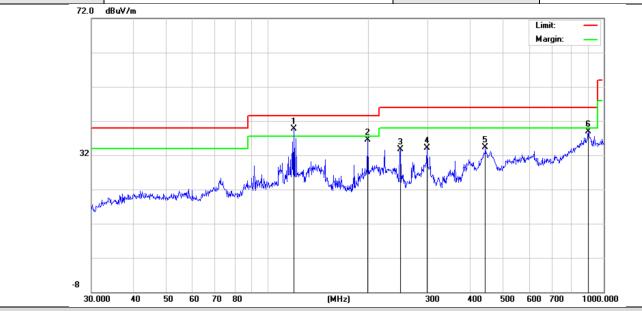

Peak Data List_Peak

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	119.8555	39.66	16.40	43.50	3.84	100	140	Horizontal
2	198.5879	36.50	14.34	43.50	7.0	100	150	Horizontal
3	248.5518	33.75	15.14	46.00	12.25	100	110	Horizontal
4	298.2681	34.19	16.36	46.00	11.81	100	90	Horizontal
5	444.8514	34.31	24.93	46.00	11.69	100	80	Horizontal
6	900.1473	38.92	31.78	46.00	7.08	100	100	Horizontal






Radiated Emission Test Results at 30MHz-1GHz								
EUT Name	Mini PC	Model Name	AX8 Max					
Temperature	25℃	Relative Humidity	55.4%					
Pressure	960hPa	Test Voltage	DC 19V by adapter 2#					
Test Mode 2 Antenna Polarity Vertical								
	M.W.	Afficilia Polarity	vertical					



Peak Data List_Peak

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.9618	33.52	13.92	40.00	6.48	100	90	Vertical
2	37.5478	34.30	16.09	40.00	5.7	100	120	Vertical
3	59.8588	36.05	17.10	40.00	3.95	100	190	Vertical
4	88.9637	37.64	15.69	43.50	5.86	100	210	Vertical
5	125.0066	35.16	17.82	43.50	8.34	100	180	Vertical
6	198.5879	36.43	17.94	43.50	7.07	100	110	Vertical

RESULT: Pass





5

6

444.8514

900.1473

Radiated Emission Test Results at 30MHz-1GHz								
EUT Name	Mini PC	AX8 Max						
Temperature	25℃	Relative Humidity	55.4%					
Pressure	960hPa	Test Voltage	DC 19V by adapter 3#					
Test Mode	Mode 2	Antenna Polarity	Horizontal					



Peak Data List_Peak Level Factor Limit Margin Height Angle Freq. NO. Polarity [MHz] [dBµV/m] [dB] [dBµV/m] [dB] [cm] 12.51 Horizontal 1 59.8588 27.16 40.00 12.84 100 160 2 118.6013 38.34 16.39 43.50 5.16 100 170 Horizontal Horizontal 3 198.5879 34.82 14.34 43.50 8.68 100 90 4 248.5518 34.37 15.14 46.00 11.63 100 220 Horizontal

46.00

46.00

12.83

6.21

100

100

160

140

Horizontal

Horizontal

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

33.17

39.79

24.93

31.78



Page 44 of 66

		Radia	ted Emiss	ion Test Res	ults at 30MHz	z-1GHz		
EUT N	ame Mir	ni PC			Model Na	me	AX8 Max	
Tempe	erature 25°	$^{\circ}$ C			Relative I	Humidity	55.4%	
Pressu	ire 960	OhPa			Test Volta	age	DC 19V by	adapter 3#
Test M	ode Mo	ode 2			Antenna	Polarity	Vertical	
	72.0 dBuV/	'm				-		
	32 had a second	40 50 60 70	ANN THE WAY THE	(MHz)	300		3 700 1000.000	1
Peak D	ata List_Pea	k						
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
		00.40	15.58	40.00	3.52	100	120	
1	36.0007	36.48	10.00	.0.00				Vertical
1 2	36.0007 37.4165	36.48	16.05	40.00	3.36	100	110	Vertical Vertical
-						100	110 80	

RESULT: Pass

178.7583

665.8034

5

6

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

18.48

27.56

35.18

37.59

2. All test modes had been pre-tested. The mode 2 is the worst case and recorded in the report.

43.50

46.00

8.32

8.41

100

100

150

160

Vertical

Vertical



Page 45 of 66

Radiated Emissions Test Results for Above 1GHz

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 1#
Test Mode	Mode 1	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4804.000	48.37	0.08	48.45	74.00	-25.55	peak
4804.000	39.68	0.08	39.76	54.00	-14.24	AVG
7206.000	49.15	2.21	51.36	74.00	-22.64	peak
7206.000	40.27	2.21	42.48	54.00	-11.52	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name		Model Name	
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 1#
Test Mode	Mode 1	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Marg n	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4804.000	49.63	0.08	49.71	74.00	-24.29	peak
4804.000	40.26	0.08	40.34	54.00	-13.66	AVG
7206.000	48.96	2.21	51.17	74.00	-22.83	peak
7206.000	41.21	2.21	43.42	54.00	-10.58	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 46 of 66

Radiated Emissions Test Results for Above 1GHz

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 1#
Test Mode	Mode 2	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4880.000	49.34	0.08	49.42	74.00	-24.58	peak
4880.000	41.01	0.08	41.09	54.00	-12.91	AVG
7320.000	48.33	2.21	50.54	74.00	-23.46	peak
7320.000	39.74	2.21	41.95	54.00	-12.05	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 1#
Test Mode	Mode 2	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4880.000	48.63	0.08	48.71	74.00	-25.29	peak
4880.000	40.39	0.08	40.47	54.00	-13.53	AVG
7320.000	49.35	2.21	51.56	74.00	-22.44	peak
7320.000	39.74	2.21	41.95	54.00	-12.05	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 47 of 66

Radiated Emissions Test Results for Above 1GHz

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 1#
Test Mode	Mode 3	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4960.000	50.14	0.22	50.36	74.00	-23.64	peak
4960.000	40.57	0.22	40.79	54.00	-13.21	AVG
7440.000	49.96	2.64	52.6	74.00	-21.40	peak
7440.000	38.75	2.64	41.39	54.00	-12.61	AVG
Domorke				<u> </u>		

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 1#
Test Mode	Mode 3	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4960.000	51.03	0.22	51.25	74.00	-22.75	peak
4960.000	41.36	0.22	41.58	54.00	-12.42	AVG
7440.000	50.96	2.64	53.6	74.00	-20.40	peak
7440.000	39.97	2.64	42.61	54.00	-11.39	AVG
Remark:						=

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 48 of 66

Radiated Emissions Test Results for Above 1GHz

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 2#
Test Mode	Mode 1	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4804.000	50.17	0.08	50.25	74.00	-23.75	peak
4804.000	41.36	0.08	41.44	54.00	-12.56	AVG
7206.000	49.34	2.21	51.55	74.00	-22.45	peak
7206.000	40.78	2.21	42.99	54.00	-11.01	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 2#
Test Mode	Mode 1	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4804.000	50.63	0.08	50.71	74.00	-23.29	peak
4804.000	40.85	0.08	40.93	54.00	-13.07	AVG
7206.000	48.77	2.21	50.98	74.00	-23.02	peak
7206.000	41.37	2.21	43.58	54.00	-10.42	AVG
Remark:	_	<u> </u>	<u> </u>	<u> </u>	<u> </u>	

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 49 of 66

Radiated Emissions Test Results for Above 1GHz

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 2#
Test Mode	Mode 2	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4880.000	49.63	0.08	49.71	74.00	-24.29	peak
4880.000	42.06	0.08	42.14	54.00	-11.86	AVG
7320.000	50.34	2.21	52.55	74.00	-21.45	peak
7320.000	40.15	2.21	42.36	54.00	-11.64	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 2#
Test Mode	Mode 2	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4880.000	50.31	0.08	50.39	74.00	-23.61	peak
4880.000	41.03	0.08	41.11	54.00	-12.89	AVG
7320.000	49.34	2.21	51.55	74.00	-22.45	peak
7320.000	39.28	2.21	41.49	54.00	-12.51	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 50 of 66

Radiated Emissions Test Results for Above 1GHz

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 2#
Test Mode	Mode 3	Antenna Polarity	Horizontal

(MHz) (dBμV) (dB) 4960.000 50.14 0.22	(dBµV/m)	(dBµV/m)	(dB)	
4060 000 50 14 0 22	E0.26	74.00		
4960.000 50.14 0.22	50.36	74.00	-23.64	peak
4960.000 40.57 0.22	40.79	54.00	-13.21	AVG
7440.000 49.96 2.64	52.6	74.00	-21.40	peak
7440.000 38.75 2.64	41.39	54.00	-12.61	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 2#
Test Mode	Mode 3	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4960.000	50.14	.22	50.36	74.00	-23.64	peak
4960.000	40.57	0.22	40.79	54.00	-13.21	AVG
7440.000	49.96	2.64	52.6	74.00	-21.40	peak
7440.000	38.75	2.64	41.39	54.00	-12.61	AVG
Remark:	<u> </u>					- · · · · · · · · · · · · · · · · · · ·

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 51 of 66

Radiated Emissions Test Results for Above 1GHz

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 3#
Test Mode	Mode 1	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4804.000	48.51	0.08	48.59	74.00	-25.41	peak
4804.000	39.17	0.08	39.25	54.00	-14.75	AVG
7206.000	49.35	2.21	51.56	74.00	-22.44	peak
7206.000	40.21	2.21	42.42	54.00	-11.58	AVG
Dana and a						_

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 3#
Test Mode	Mode 1	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Marg n	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4804.000	49.74	0.08	49.82	74.00	-24.18	peak
4804.000	38.78	0.08	38.86	54.00	-15.14	AVG
7206.000	50.04	2.21	52.25	74.00	-21.75	peak
7206.000	39.37	2.21	41.58	54.00	-12.42	AVG
Remark:						3

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 52 of 66

Radiated Emissions Test Results for Above 1GHz

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 3#
Test Mode	Mode 2	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4880.000	49.74	0.08	49.82	74.00	-24.18	peak
4880.000	40.38	0.08	40.46	54.00	-13.54	AVG
7320.000	48.53	2.21	50.74	74.00	-23.26	peak
7320.000	40.17	2.21	42.38	54.00	-11.62	AVG
Domorke						=

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 3#
Test Mode	Mode 2	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	, ,
4880.000	50.34	0.08	50.42	74.00	-23.58	peak
4880.000	41.37	0.08	41.45	54.00	-12.55	AVG
7320.000	48.53	2.21	50.74	74.00	-23.26	peak
7320.000	40.28	2.21	42.49	54.00	-11.51	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 53 of 66

Radiated Emissions Test Results for Above 1GHz

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 3#
Test Mode	Mode 3	Antenna Polarity	Horizontal

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
49.52	0.22	49.74	74.00	-24.26	peak
41.02	0.22	41.24	54.00	-12.76	AVG
48.63	2.64	51.27	74.00	-22.73	peak
40.22	2.64	42.86	54.00	-11.14	AVG
	Reading (dBµV) 49.52 41.02 48.63	Reading Factor (dBμV) (dB) 49.52 0.22 41.02 0.22 48.63 2.64	Reading Factor Level (dBμV) (dB) (dBμV/m) 49.52 0.22 49.74 41.02 0.22 41.24 48.63 2.64 51.27	Reading Level Limits (dBμV) (dB) (dBμV/m) (dBμV/m) 49.52 0.22 49.74 74.00 41.02 0.22 41.24 54.00 48.63 2.64 51.27 74.00	Reading Factor Level Limits Margin (dBμV) (dB) (dBμV/m) (dBμV/m) (dB) 49.52 0.22 49.74 74.00 -24.26 41.02 0.22 41.24 54.00 -12.76 48.63 2.64 51.27 74.00 -22.73

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V by adapter 3#
Test Mode	Mode 3	Antenna Polarity	Vertical

Г.						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4960.000	50.36	0.22	50.58	74.00	-23.42	peak
4960.000	40.37	0.22	40.59	54.00	-13.41	AVG
7440.000	50.12	2.64	52.76	74.00	-21.24	peak
7440.000	41.15	2.64	43.79	54.00	-10.21	AVG
Remark:		<u> </u>		<u> </u>	<u> </u>	

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass


Note:

- The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss – Pre-amplifier gain, Margin = Emission Level-Limit.
- The "Factor" value can be calculated automatically by software of measurement system.




EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V form adapter 1#
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

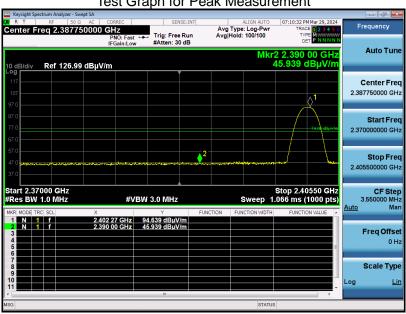



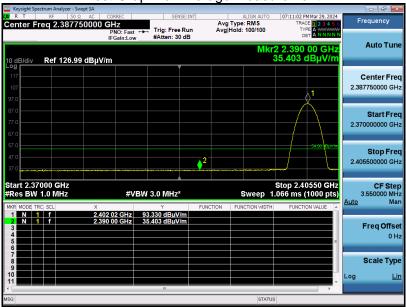


RESULT: Pass




EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V form adapter 1#
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement

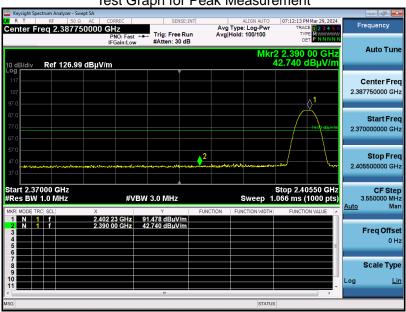



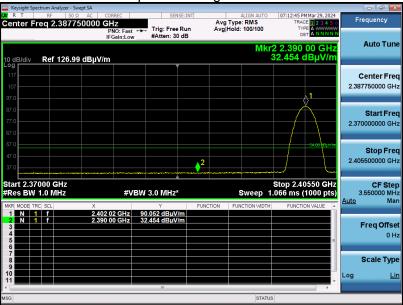

RESULT: Pass




EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V form adapter 1#
Test Mode	Mode 3	Antenna Polarity	Horizontal


Test Graph for Peak Measurement





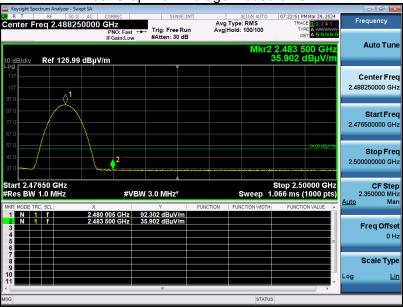


RESULT: Pass






EUT Name	Mini PC	Model Name	AX8 Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 19V form adapter 1#
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement

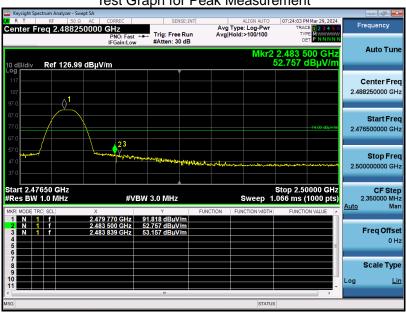



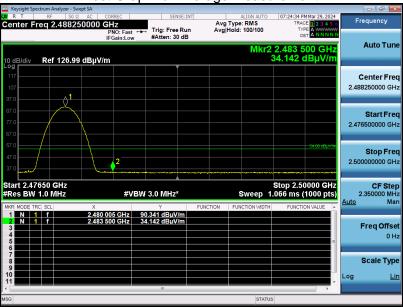

RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



Page 58 of 66

12. AC Power Line Conducted Emission Test


12.1 Measurement Limit

F	Maximum RF Line Voltage				
Frequency	Q.P. (dBµV)	Average (dBμV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2 Measurement Setup (Block Diagram of Configuration)

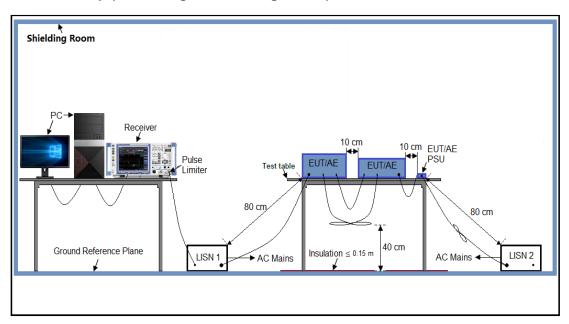



Page 59 of 66

12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 19V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- The test data of the worst case condition(s) was reported on the Summary Data page.

12.5 Measurement Results



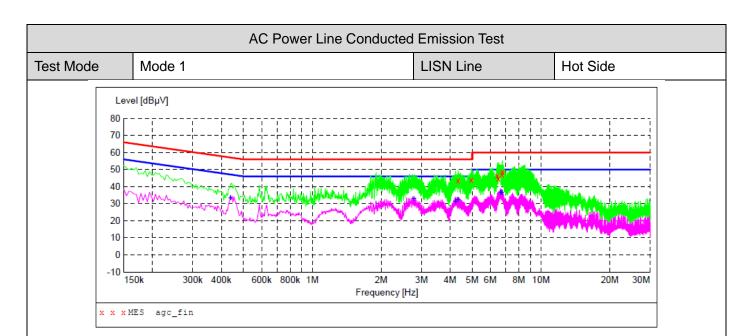

MEASUREMENT RESULT: "agc_fin"


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
4.342000 4.962000 6.446000 6.506000 6.766000 6.778000	43.50 44.00 46.30 45.00 47.10 48.90	6.3 6.5 6.5 6.5	56 56 60 60 60	12.5 12.0 13.7 15.0 12.9 11.1	QP QP QP QP QP QP	L1 L1 L1 L1 L1

MEASUREMENT RESULT: "agc_fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.438000 2.782000 4.230000 4.334000 6.646000 6.734000	33.40 32.80 31.50 32.70 36.70 36.50	6.1 6.3 6.3 6.3 6.5	47 46 46 46 50	13.2	AV AV AV AV AV	L1 L1 L1 L1 L1

RESULTATION assen signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






		AC Power	Line Condu	icted Emis	sion Test		
Test Mode	Mode 1			LISN	N Line	Neutral	Side
Lev	/el [dBμV]						.
⁸⁰ [
70		· 			iiiiii-	- - 	
60 <u>-</u> 50 -	~~~					i i	
40 -		-			4 4 4 4	4	
30	my to						السيرية الألبا
20 -		Mary Myrahamer at the		14.24.V			Jan Paulin
10 -			<u>-</u>				
0 -		+		<u>-</u>	iiiiii-	- + -	
-10 - 1	50k 300k 400k	600k 800k 1N			M 5M 6M 8M	1 10M 20	М 30М
			Frequer				
M	EASUREMENT	RESULT	: "agc_	fin"			
	Frequency	Level	Transd		Margin	Detector	Line
	MHz	dΒμV	dB	dΒμV	dB		
	8.702000	44.50	6.6	60	15.5	QP	N
	8.714000	44.80	6.6	60	15.2	QP	N
	8.758000	45.20	6.6	60	14.8	ÕР	N
		44.20	6.6	60	15.8	QP	N
		44.50	6.6	60	15.5	QP	N
	9.122000	45.80	6.6	60	14.2	QP	N
M	EASUREMENT	סדכווו יי	. "200	fin2"			
22	EASCIEFIENT	RESCEI	. agc_	11112			
	Frequency	Level	Transd	Limit	Margin	Detector	Line
	MHz	dΒμV	dB	dBµ∇	dB		
	0.458000	33.20	6.1	47	13.5	AV	N
	1.998000	28.40	6.2	46	17.6	AV	N
	4.342000	27.70	6.3	46	18.3	AV	N
	8.378000	32.80	6.6	50	17.2	VA	N
					17 (7, 7, 7	
	9.130000 9.262000	32.40 32.60	6.6 6.6	50 50	17.6 17.4	VA VA	N N

RESULT: PASS



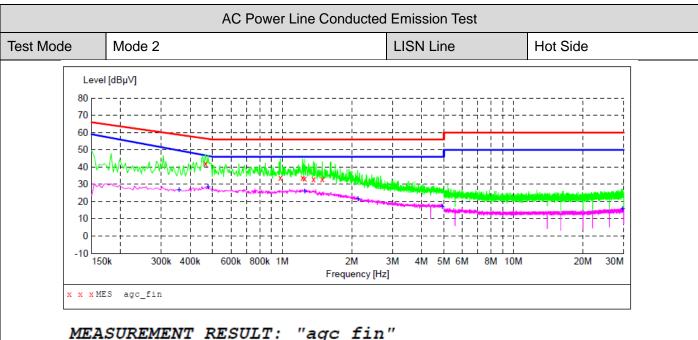

MEASUREMENT RESULT: "agc fin"


			dB		
0.466000 41.90 0.982000 33.80 1.226000 33.90 1.250000 33.60 1.366000 33.00 1.490000 33.00	6.1 6.2 6.2 6.2 6.2	57 56 56 56 56		QP QP QP QP QP OP	L1 L1 L1 L1 L1

MEASUREMENT RESULT: "agc_fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.358000 0.478000 1.250000 2.126000 4.922000 29.630000	26.80 28.50 26.10 21.50 17.30 15.70	6.1 6.2 6.2 6.3 8.3	50 47 46 46 46 50	22.8 18.0 19.9 24.5 28.7 34.3	AV AV AV AV AV	L1 L1 L1 L1 L1


RESULT: Pass



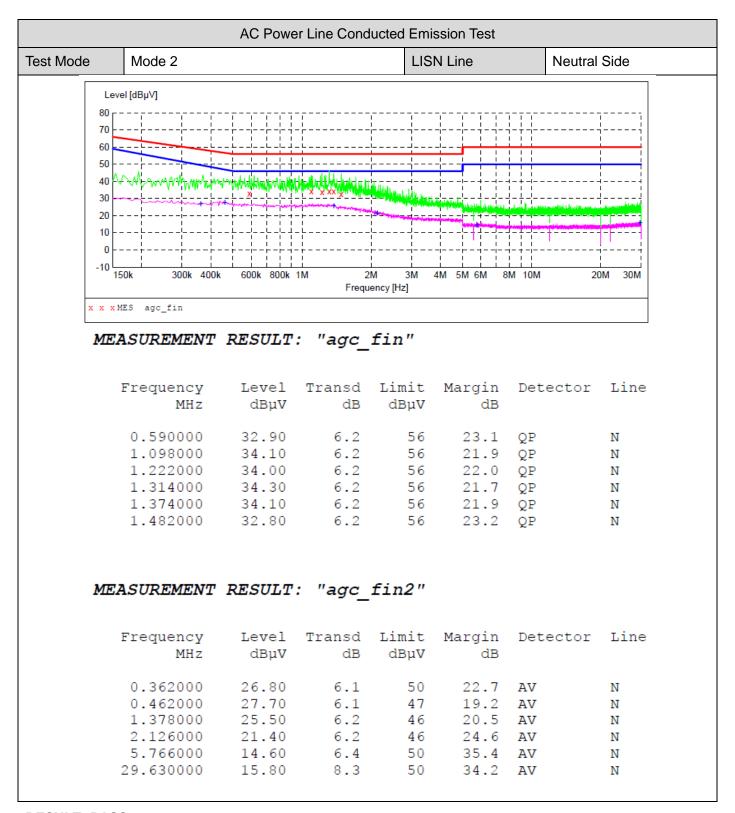

RESULT: PASS



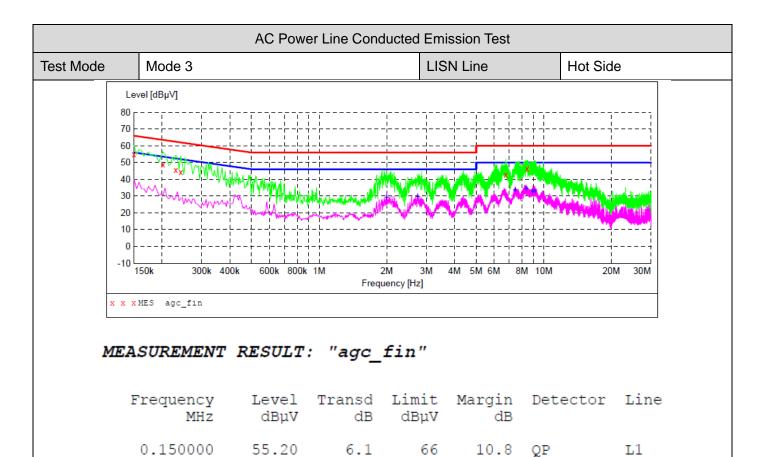

6.1

6.1

6.1

6.5

64

62

62

60

14.8

16.7

17.4

17.1

QΡ

QΡ

QΡ

QΡ

L1

L1

L1

L1 L1

8.438000	46.60	6.6	60	13.4	QΡ

48.70

45.70

44.60

42.90

MEASUREMENT RESULT: "agc fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
1.998000 2.742000 7.458000 8.342000 8.926000 9.122000	29.30 29.70 33.80 34.70 33.20 32.90	6.2 6.3 6.5 6.6 6.6	46 46 50 50 50	16.2	AV AV AV AV AV	L1 L1 L1 L1 L1

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

0.202000


0.230000

0.242000

6.778000

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



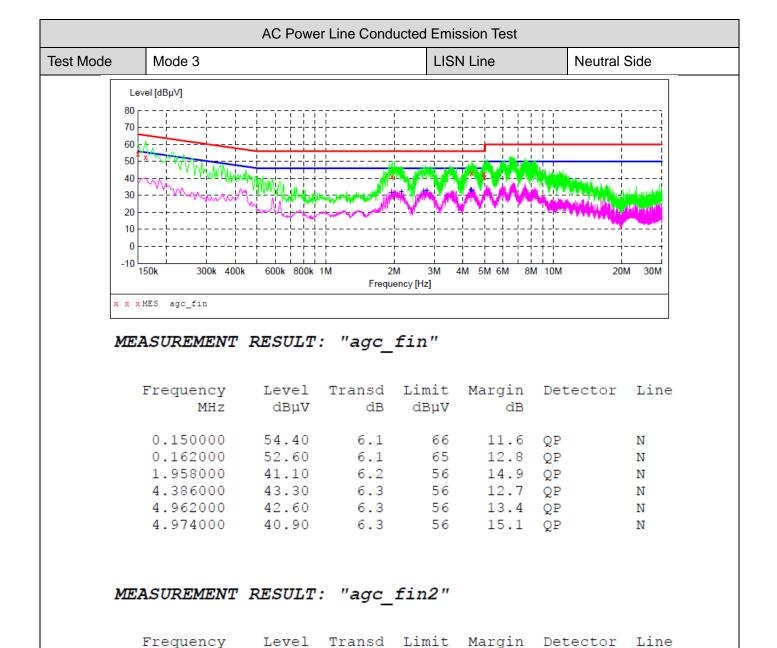

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

dΒμV

46

46

46

46

46

46

dB

ΑV

AV

AV

ΑV

ΑV

ΑV

Ν

Ν

M

Ν

N

Ν

14.3

13.8

13.6

13.2

12.5

13.0

dΒ

6.2

6.2

6.3

6.3

6.3

6.3

MHz

1.946000

2.154000

2.690000

2.786000

4.334000

4.378000

dΒμV

31.70

32.20

32.40

32.80

33.50

33.00



Page 66 of 66

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC12060240301AP03

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC12060240301AP04

----End of Report----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.