

2、 The Equipment of Active Test

Satimo 3D Chamber $6 \times 4 \times 4$ (m)

Agilent 8960 E5515c

Network analyzer-R&S ZVL



Figure 2

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

3 test

3.1 The Test of standing Wave (VSWR)

3.1.1 The Test of standing Wave (VSWR): In turn, the connection of the VSWR testing device is as follows: RES ZVL Network Analyzer / testing Line / testing tool

Actual measurement (with diagram)

3.2 Measurement of Efficiency, Power (TRP) and Sensitivity (TIS)

3.2.1 Test site:

Large-scale microwave darkroom. The test frequency range is 400MHz / 6GHz, the static range is 50cm circumferential and the reflectivity is less than -50 dB..

3.2.2 Test instrument:

Rs ZVL Network Analyzer, Agilent8960 E5515C, Standard Horn Antenna, French SATIMO-SG24SYSTEM system, Printer, etc.

3.2.3 test data : In microwave anechoic chambers, the power and sensitivity values measured are shown in the following table:

OTA Active Test:

BAND	CH	TRP (dBm)	TIS (dBm)
BT	0	9.45	-93
	39	9.61	-93
	78	9.27	-93

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

OTA Passive Efficiency&Gain Test:

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	54.21	-2.66	1.57
2410	54.62	-2.63	1.89
2420	54.93	-2.60	1.76
2430	55.44	-2.56	1.95
2440	55.68	-2.54	2.09
2450	56.19	-2.50	2.13
2460	55.26	-2.58	1.89
2470	54.77	-2.61	1.92
2480	54.63	-2.63	1.95
2490	54.01	-2.68	1.81
2500	53.24	-2.74	1.69

4、 Attachment chart

4.1 VSWR parameter diagram



www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

5、BT antenna active parameters -2402-TRP

Azimuth s	2.402 GHz - 150 Total	2.402 GHz - 120 Total	2.402 GHz -90 Total	2.402 GHz -60 Total	2.402 GHz -30 Total	2.402 GHz 0 Total	2.402 GHz 30 Total	2.402 GHz 60 Total	2.402 GHz 90 Total	2.402 GHz 120 Total	2.402 GHz 150 Total
0	4.59	2.29	0.78	-5.86	2.16	-1.57	6.9	7.02	6.57	-0.8	7.65
30	8.95	-3.25	3.3	0.86	0.96	-1.44	-0.09	5.77	7.27	5.34	3.53
60	12.05	8.98	5.72	4.24	3.67	-1.53	-1.46	4.21	4.67	2.43	5.54
90	13.14	11.71	10.07	10.14	6.25	0.08	-0.98	5.28	6.33	2.64	3.24
120	13.09	10.5	11.64	10.87	6.96	-1.03	-2.03	3.77	4.19	3.67	4.44
150	11.82	9.15	10.32	10.69	7.66	-1.1	1.6	-0.68	-2.75	-0.6	2.59
180	7.65	-0.8	6.57	7.02	6.9	-1.57	2.16	-5.86	0.78	2.29	4.59
210	3.53	5.34	7.27	5.77	-0.09	-1.44	0.96	0.86	3.3	-3.25	8.95
240	5.54	2.43	4.67	4.21	-1.46	-1.53	3.67	4.24	5.72	8.98	12.05
270	3.24	2.64	6.33	5.28	-0.98	0.08	6.25	10.14	10.07	11.71	13.14
300	4.44	3.67	4.19	3.77	-2.03	-1.03	6.96	10.87	11.64	10.5	13.09
330	2.59	-0.6	-2.75	-0.68	1.6	-1.1	7.66	10.69	10.32	9.15	11.82

5.1、BT antenna active parameters -2402-TIS

Azimuth s	2.402 GHz - 150 Total	2.402 GHz - 120 Total	2.402 GHz -90 Total	2.402 GHz -60 Total	2.402 GHz -30 Total	2.402 GHz 0 Total	2.402 GHz 30 Total	2.402 GHz 60 Total	2.402 GHz 90 Total	2.402 GHz 120 Total	2.402 GHz 150 Total
0	-90.6	-88.3	-86.79	-80.15	-88.17	-84.44	-92.92	-93.03	-92.58	-85.21	-93.66
30	-94.96	-82.76	-89.31	-86.87	-86.97	-84.58	-85.93	-91.78	-93.28	-91.35	-89.55
60	-98.06	-94.99	-91.73	-90.25	-89.69	-84.49	-84.56	-90.22	-90.68	-88.44	-91.55
90	-99.15	-97.72	-96.08	-96.15	-92.27	-86.09	-85.03	-91.29	-92.35	-88.65	-89.26
120	-99.1	-96.51	-97.65	-96.88	-92.98	-84.98	-83.98	-89.79	-90.2	-89.68	-90.45
150	-97.83	-95.16	-96.33	-96.7	-93.67	-84.91	-87.61	-85.33	-83.26	-85.41	-88.61
180	-93.66	-85.21	-92.58	-93.03	-92.92	-84.44	-88.17	-80.15	-86.79	-88.3	-90.6
210	-89.55	-91.35	-93.28	-91.78	-85.93	-84.58	-86.97	-86.87	-89.31	-82.76	-94.96
240	-91.55	-88.44	-90.68	-90.22	-84.56	-84.49	-89.69	-90.25	-91.73	-94.99	-98.06
270	-89.26	-88.65	-92.35	-91.29	-85.03	-86.09	-92.27	-96.15	-96.08	-97.72	-99.15
300	-90.45	-89.68	-90.2	-89.79	-83.98	-84.98	-92.98	-96.88	-97.65	-96.51	-99.1
330	-88.61	-85.41	-83.26	-85.33	-87.61	-84.91	-93.67	-96.7	-96.33	-95.16	-97.83

5.2、BT antenna active parameters -2441-TRP

Azimuth s	2.441 GHz - 150 Total	2.441 GHz - 120 Total	2.441 GHz -90 Total	2.441 GHz -60 Total	2.441 GHz -30 Total	2.441 GHz 0 Total	2.441 GHz 30 Total	2.441 GHz 60 Total	2.441 GHz 90 Total	2.441 GHz 120 Total	2.441 GHz 150 Total
0	3.72	1.6	0.75	-3.48	1.26	-0.32	7.07	7.54	7.39	-2.58	7.28
30	9.32	-2.24	2.54	1.98	0.23	-0.64	2.27	6	7.46	5.85	4.27
60	11.77	8.35	5.95	4.73	2.92	-3	-1.46	3.49	4.73	2.3	6.11
90	12.86	11.8	10.11	9.82	5.2	0.74	-4.38	4.87	6.55	2.53	2.96
120	13.41	10.64	11.96	11.65	7.1	-1.03	-2.08	4.62	4.32	3.7	4.1
150	11.59	9.44	10.67	10.8	8.57	-0.52	1.64	-0.84	-1.35	0.07	2.64
180	7.28	-2.58	7.39	7.54	7.07	-0.32	1.26	-3.48	0.75	1.6	3.72
210	4.27	5.85	7.46	6	2.27	-0.64	0.23	1.98	2.54	-2.24	9.32
240	6.11	2.3	4.73	3.49	-1.46	-3	2.92	4.73	5.95	8.35	11.77
270	2.96	2.53	6.55	4.87	-4.38	0.74	5.2	9.82	10.11	11.8	12.86
300	4.1	3.7	4.32	4.62	-2.08	-1.03	7.1	11.65	11.96	10.64	13.41
330	2.64	0.07	-1.35	-0.84	1.64	-0.52	8.57	10.8	10.67	9.44	11.59

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

5.3、BT antenna active parameters -2441-TIS

Azimuth s	2.441 GHz - 150 Total	2.441 GHz - 120 Total	2.441 GHz -90 Total	2.441 GHz -60 Total	2.441 GHz -30 Total	2.441 GHz 0 Total	2.441 GHz 30 Total	2.441 GHz 60 Total	2.441 GHz 90 Total	2.441 GHz 120 Total	2.441 GHz 150 Total
0	-89.96	-87.83	-86.98	-82.75	-87.49	-85.91	-93.3	-93.78	-93.63	-83.65	-93.51
30	-95.56	-83.99	-88.77	-88.21	-86.46	-85.59	-88.51	-92.23	-93.7	-92.09	-90.51
60	-98.01	-94.58	-92.19	-90.97	-89.15	-83.24	-84.78	-89.72	-90.97	-88.54	-92.34
90	-99.1	-98.04	-96.34	-96.06	-91.43	-86.98	-81.86	-91.11	-92.78	-88.77	-89.2
120	-99.65	-96.87	-98.2	-97.88	-93.34	-85.21	-84.15	-90.85	-90.56	-89.93	-90.34
150	-97.82	-95.68	-96.91	-97.03	-94.8	-85.71	-87.88	-85.39	-84.88	-86.31	-88.87
180	-93.51	-83.65	-93.63	-93.78	-93.3	-85.91	-87.49	-82.75	-86.98	-87.83	-89.96
210	-90.51	-92.09	-93.7	-92.23	-88.51	-85.59	-86.46	-88.21	-88.77	-83.99	-95.56
240	-92.34	-88.54	-90.97	-89.72	-84.78	-83.24	-89.15	-90.97	-92.19	-94.58	-98.01
270	-89.2	-88.77	-92.78	-91.11	-81.86	-86.98	-91.43	-96.06	-96.34	-98.04	-99.1
300	-90.34	-89.93	-90.56	-90.85	-84.15	-85.21	-93.34	-97.88	-98.2	-96.87	-99.65
330	-88.87	-86.31	-84.88	-85.39	-87.88	-85.71	-94.8	-97.03	-96.91	-95.68	-97.82

5.4、BT antenna active parameters-2480-TRP

Azimuth s	2.48 GHz - 150 Total	2.48 GHz - 120 Total	2.48 GHz -90 Total	2.48 GHz -60 Total	2.48 GHz -30 Total	2.48 GHz 0 Total	2.48 GHz 30 Total	2.48 GHz 60 Total	2.48 GHz 90 Total	2.48 GHz 120 Total	2.48 GHz 150 Total
0	3.35	1.06	1.13	-3.32	1.76	-0.53	5.73	7.27	7.38	-4.13	7.56
30	9.19	-1.98	1.81	3.09	0.84	-0.02	2.75	5.48	7.52	6.82	5.24
60	10.98	7.33	6.06	4.33	1.22	-0.85	-2.42	2.48	4.63	2.11	6.41
90	12.98	11.75	9.87	9.77	2.93	-0.02	-8	4.39	6.59	3.09	2.23
120	13.41	10.5	11.98	11.25	6.96	-1.36	-3.57	3.66	4.87	4.41	4.37
150	12.19	8.55	10.49	11.01	7.87	-0.59	1.81	-1.47	-1.51	-0.33	2.5
180	7.56	-4.13	7.38	7.27	5.73	-0.53	1.76	-3.32	1.13	1.06	3.35
210	5.24	6.82	7.52	5.48	2.75	-0.02	0.84	3.09	1.81	-1.98	9.19
240	6.41	2.11	4.63	2.48	-2.42	-0.85	1.22	4.33	6.06	7.33	10.98
270	2.23	3.09	6.59	4.39	-8	-0.02	2.93	9.77	9.87	11.75	12.98
300	4.37	4.41	4.87	3.66	-3.57	-1.36	6.96	11.25	11.98	10.5	13.41
330	2.5	-0.33	-1.51	-1.47	1.81	-0.59	7.87	11.01	10.49	8.55	12.19

5.5、BT antenna active parameters -2480-TIS

Azimuth s	2.48 GHz - 150 Total	2.48 GHz - 120 Total	2.48 GHz -90 Total	2.48 GHz -60 Total	2.48 GHz -30 Total	2.48 GHz 0 Total	2.48 GHz 30 Total	2.48 GHz 60 Total	2.48 GHz 90 Total	2.48 GHz 120 Total	2.48 GHz 150 Total
0	-89.67	-87.39	-87.45	-83	-88.08	-85.8	-92.05	-93.59	-93.71	-82.19	-93.88
30	-95.51	-84.35	-88.13	-89.41	-87.17	-86.31	-89.07	-91.81	-93.84	-93.14	-91.57
60	-97.31	-93.65	-92.38	-90.65	-87.54	-85.48	-83.91	-88.8	-90.95	-88.44	-92.73
90	-99.3	-98.07	-96.2	-96.09	-89.26	-86.3	-78.33	-90.72	-92.91	-89.41	-88.56
120	-99.74	-96.83	-98.3	-97.58	-93.29	-84.96	-82.75	-89.98	-91.19	-90.74	-90.7
150	-98.51	-94.88	-96.81	-97.34	-94.19	-85.74	-88.13	-84.85	-84.81	-85.99	-88.82
180	-93.88	-82.19	-93.71	-93.59	-92.05	-85.8	-88.08	-83	-87.45	-87.39	-89.67
210	-91.57	-93.14	-93.84	-91.81	-89.07	-86.31	-87.17	-89.41	-88.13	-84.35	-95.51
240	-92.73	-88.44	-90.95	-88.8	-83.91	-85.48	-87.54	-90.65	-92.38	-93.65	-97.31
270	-88.56	-89.41	-92.91	-90.72	-78.33	-86.3	-89.26	-96.09	-96.2	-98.07	-99.3
300	-90.7	-90.74	-91.19	-89.98	-82.75	-84.96	-93.29	-97.58	-98.3	-96.83	-99.74
330	-88.82	-85.99	-84.81	-84.85	-88.13	-85.74	-94.19	-97.34	-96.81	-94.88	-98.51


www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

6、Antenna passive field pattern diagram---2450MHz

unit: dBi

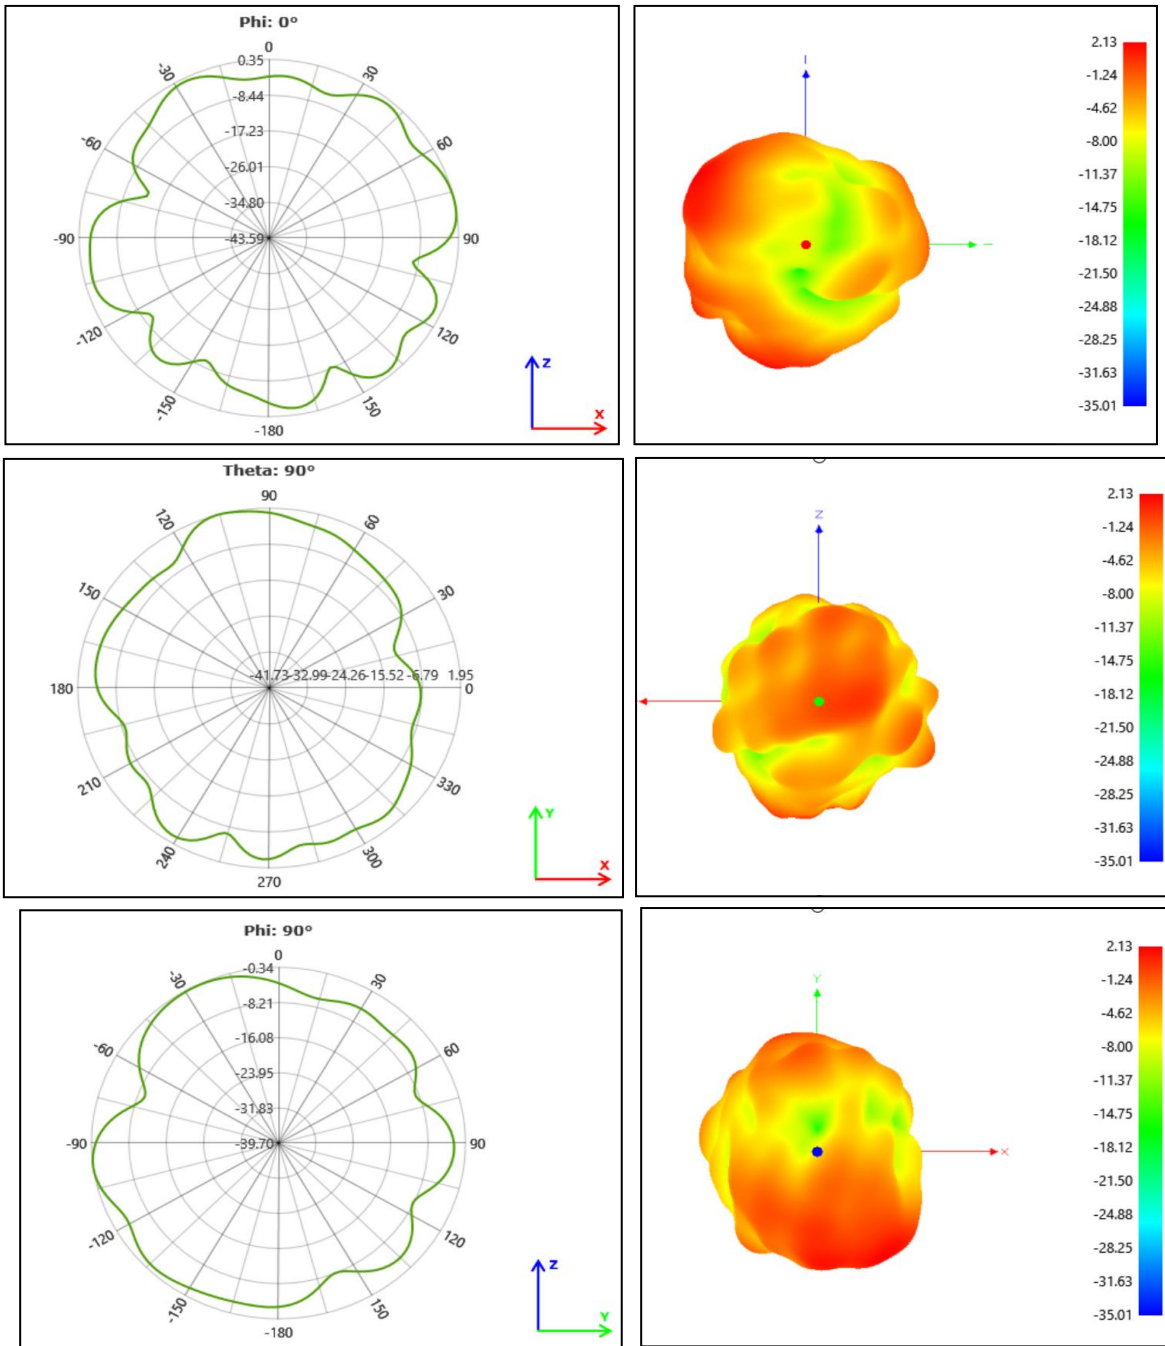


www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

7、OTA 3D field diagram: TRP

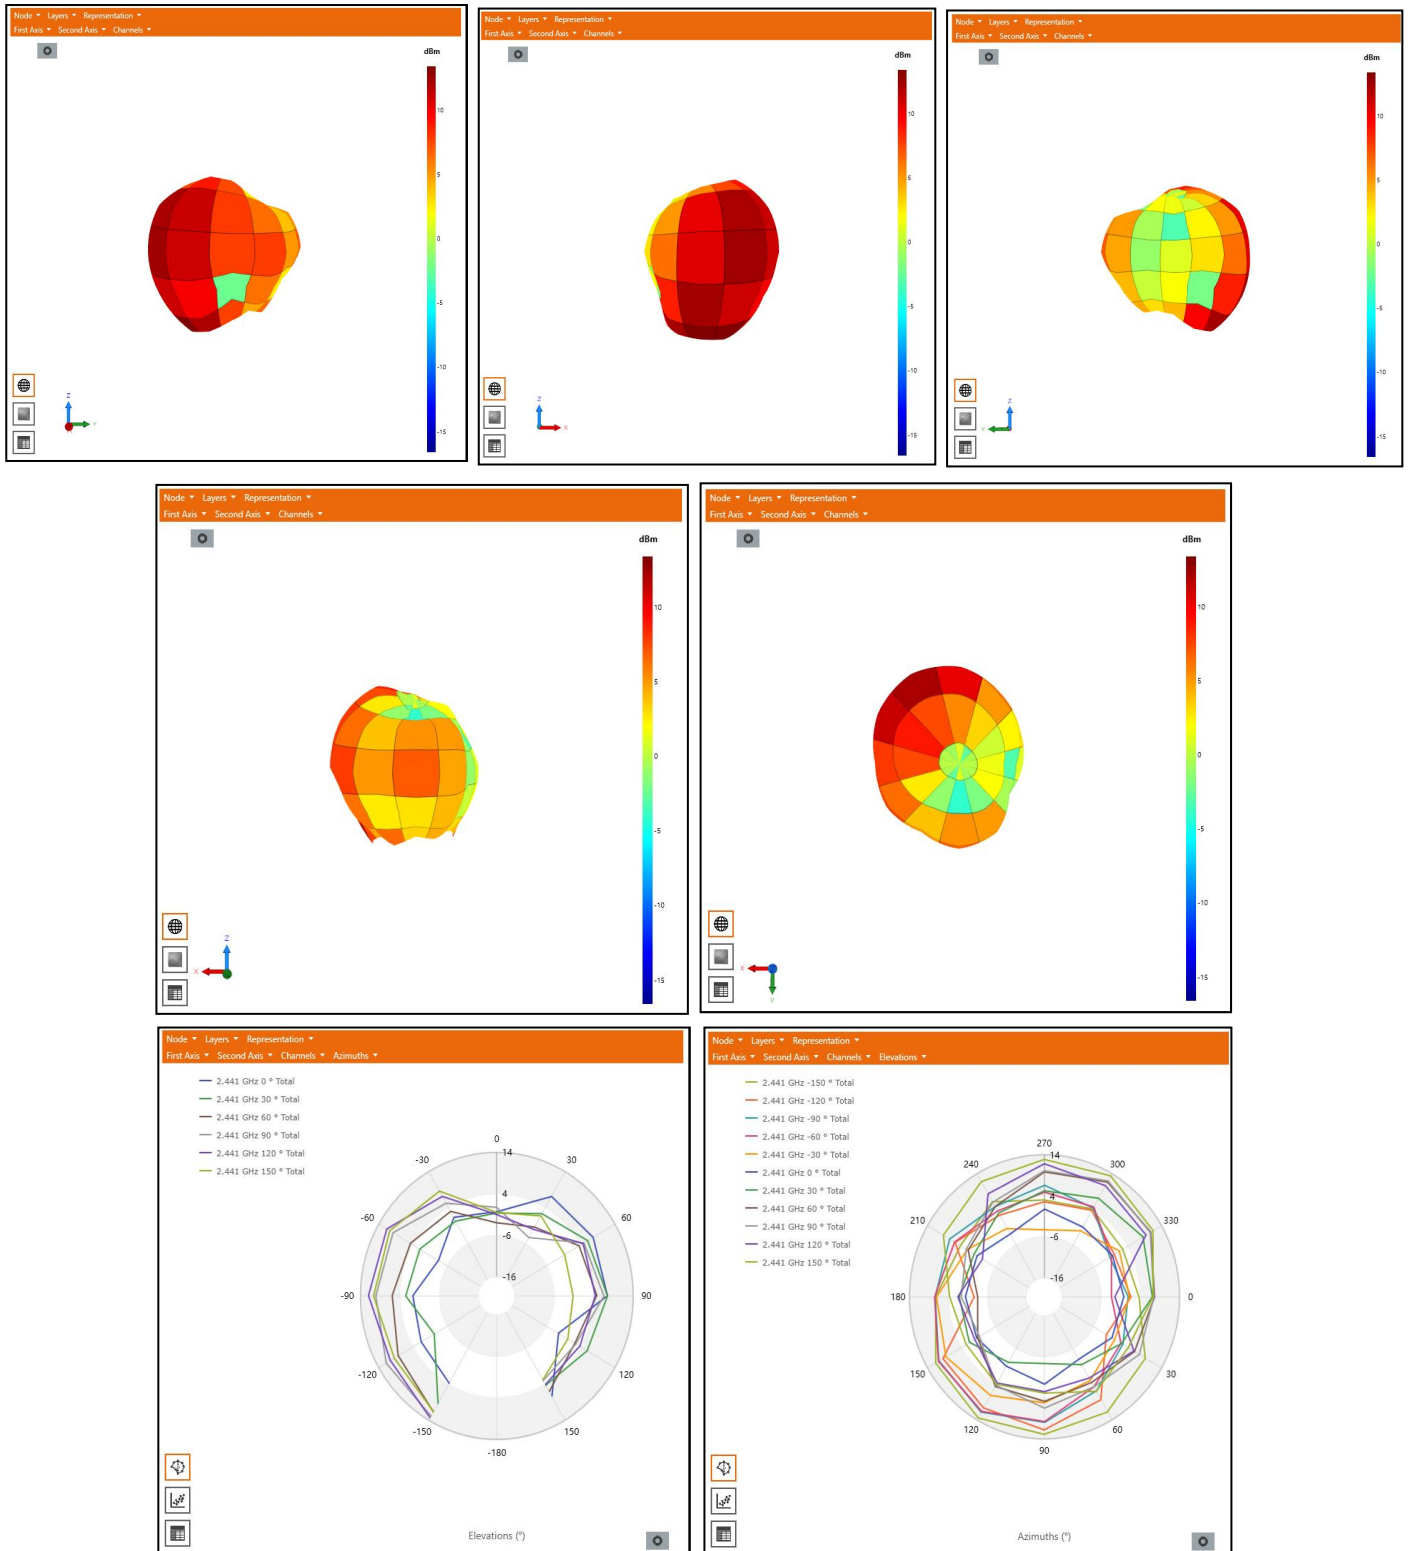


www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

OTA 3D field diagram: TIS

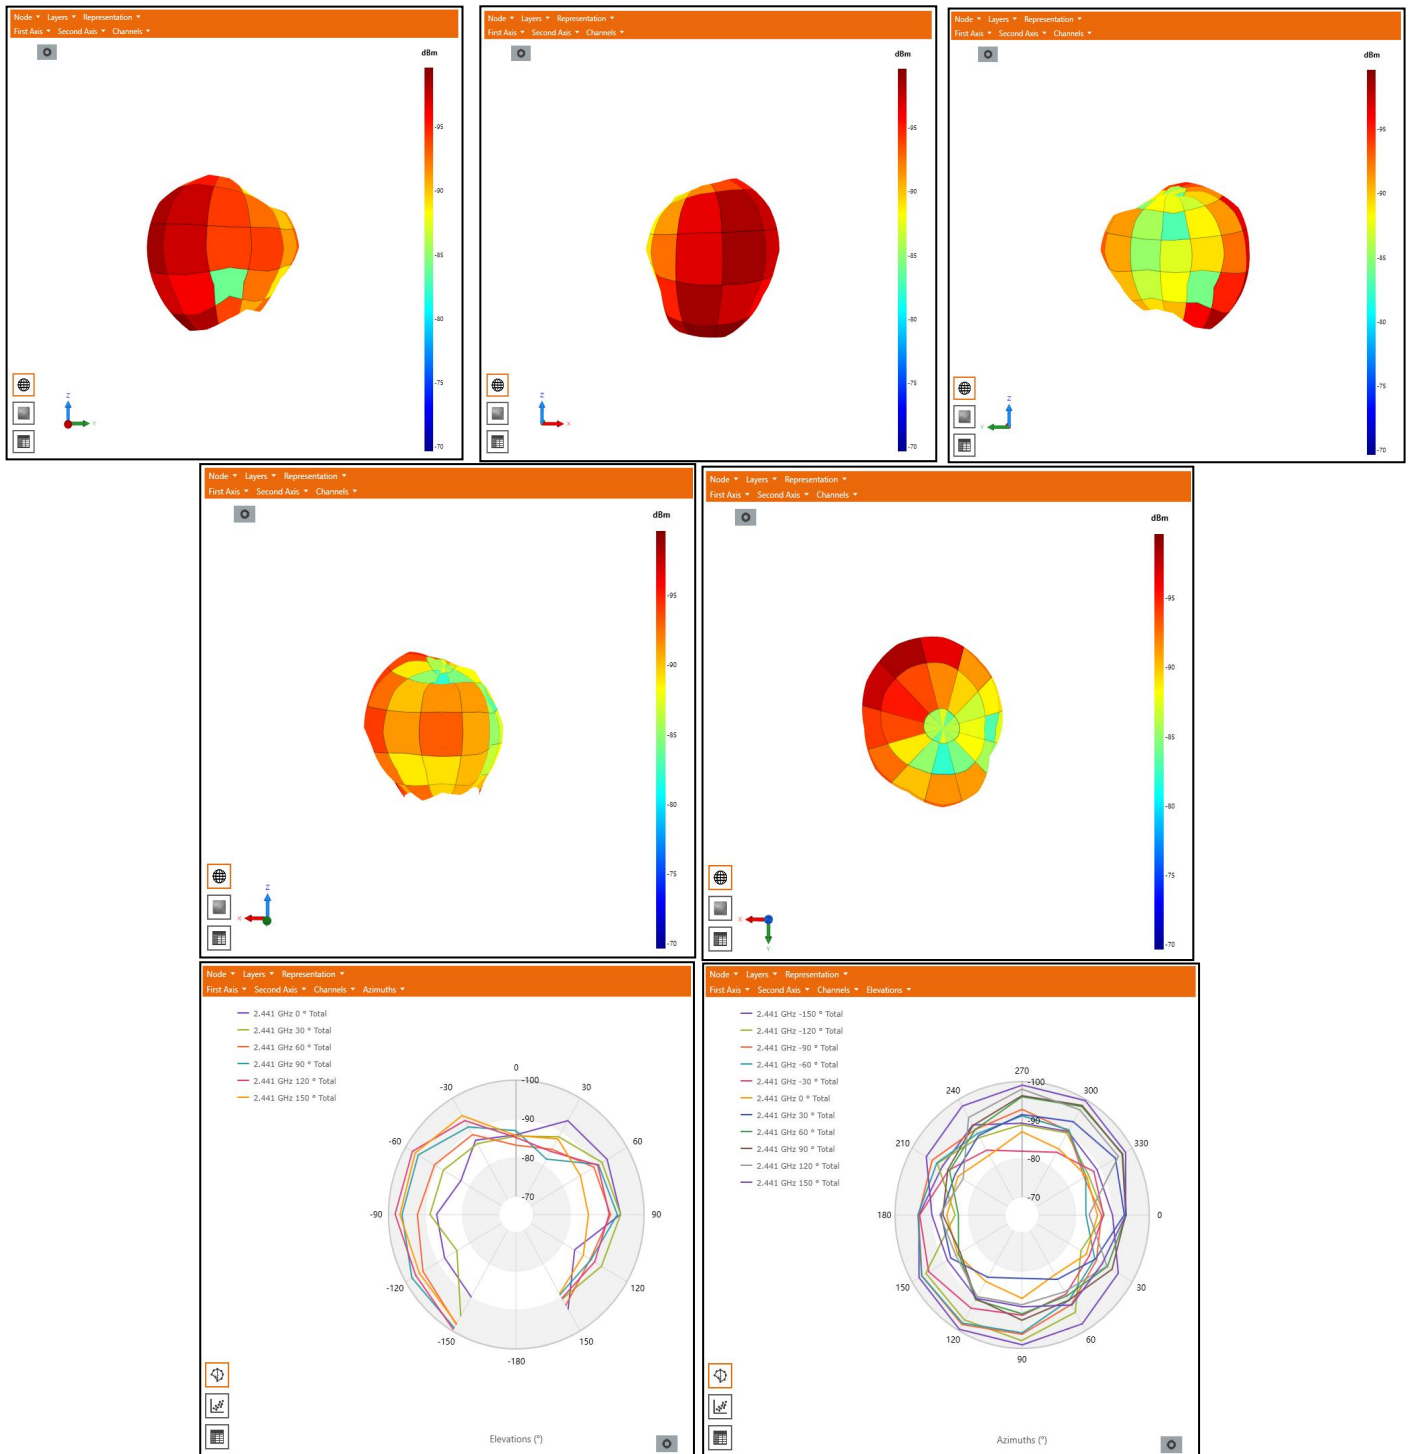


8、 conclusion:

This antenna is designed on the basis of the prototype provided by the customer, electrical parameters and structural performance have reached the technical requirements, please confirm!

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

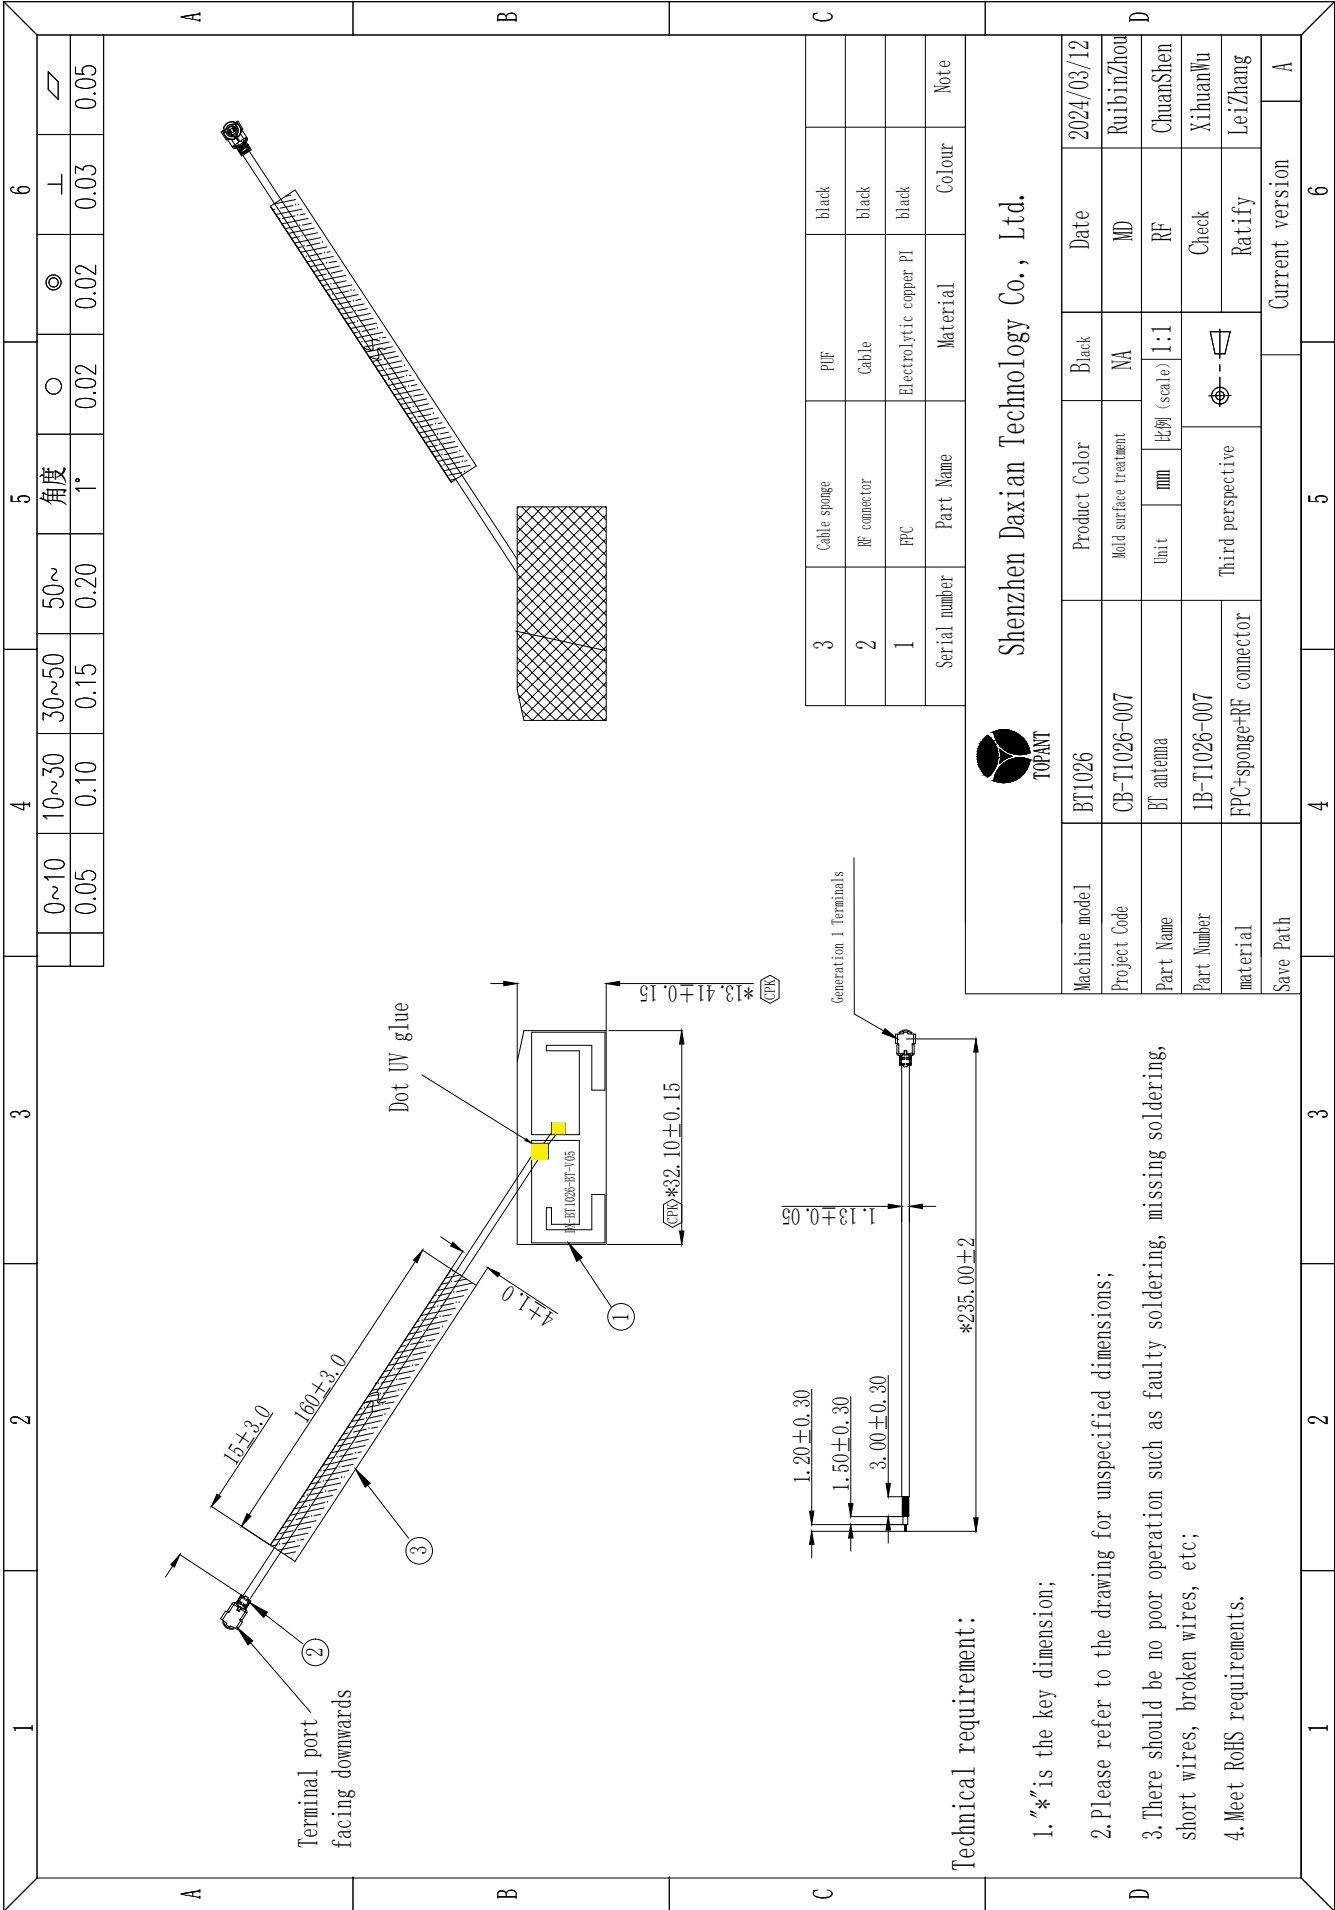

Technical requirement:

- 1. "*" is the key dimension;
- 2. Please refer to the drawing for unspecified dimensions;
- 3. There should be no poor operation such as faulty soldering, missing soldering, short wires, broken wires, etc;
- 4. Meet RoHS requirements.



Shenzhen Daxian Technology Co., Ltd.

Machine model	BT1026	Product Color	Black	Date	2024/03/12
Project Code	CB-T1026-007	Mold surface treatment	NA	MD	RuiminZhou
Part Name	BT antenna	Unit	mm	比例 (scale)	1:1
Part Number	1B-T1026-007	Third perspective		Check	ChuanShen
material	FPC+sponge+RF connector			RF	XihuanWu
Save Path				Ratify	LeiZhang
Current version					A

3	Cable sponge	PIF	black		
2	RF connector	Cable	black		
1	FPC	Electrolytic copper PI	black		
Serial number	Part Name	Material	Colour	Note	