



Shenzhen Yingjia Chuang electronic technology Co., LTD

<http://www.szsyjc.com>

APPROVAL SHEET

CUSTOMER NAME 客户名称		
CUSTOMER P/N 客户料号		
PART NAME 品 名	2.4G 板载天线 2.4G Onboard antenna	
P/ N 料 号		
APPROVAL REV. 版 次	A0	
DELIVERY DATE 送样日期	2023 年 11 月 20 日 November 20, 2023	
PREPARED BY 承 办	Wu Jiaxiong	
CHECKED BY 审 核	Fang Wenfeng	
APPROVED BY 核 准	Xiao Han	
Customer Approved 客 户 承 认		
Prepared By 承 办	Checked By 审 核	Approved By 核 准

总部地址：深圳市光明区马田街道油麻岗路 11 号宏域光明谷 C 栋

Headquarters Address: Building C, Hongyu Guangming Valley, No. 11, Youma Gang Road, Matan Street, Guangming District, Shenzhen City

东莞分厂：东莞市桥头镇石水口银河三路 2 号英佳创产业园

Dongguan Branch: Yingjiachuang Industrial Park, No. 2 Yinhe 3rd Road, Shishuikou, Qiaotou Town, Dongguan City

杭州办事处：杭州市滨江区物联网街 369 号大华江虹国际创新园 B 栋 212

Hangzhou Office: 212, Building B, Dahua Jianghong International Innovation Park, No. 369 Internet of Things Street, Binjiang District, Hangzhou

绵阳办事处：四川省绵阳市高新区绵兴东路 35 号万向高新国际 4F-34 号

Mianyang Office: No. 4F-34 Wanxiang High-tech International, No. 35 Mianxing East Road, Gaoxin District, Mianyang City, Sichuan Province

电话：0755-27810060

传真：0755-27810057

网址：<http://www.szsyjc.com>



目录 (Catalogue)

1. 封面 (Cover)	1
2. 目录 (Catalogue)	2
3. 履历表 (Resume)	3
4. 产品平面图 (Antenna plan)	4
5. 天线技术参数 (Antenna technical parameters)	5
6. 天线实物图 (Antenna attachment position diagram)	5
7. 天线性能测试图 (Antenna performance test diagram)	5
8. 2D.3D (2.4G) 测试数据 (2D.3D (2.4G) test data)	5-6
9. OTA 有源测试数据统计 (OTA active test data statistics)	7




履历表（Resume）：

版本 Version	变更内容及更改原因 Changes and reasons	发行 publish	发行 publish
A/0	初版发行（Issued）	2023 年 11 月 20 日 （November 20, 2023）	



天线平面图 (Antenna plan) :

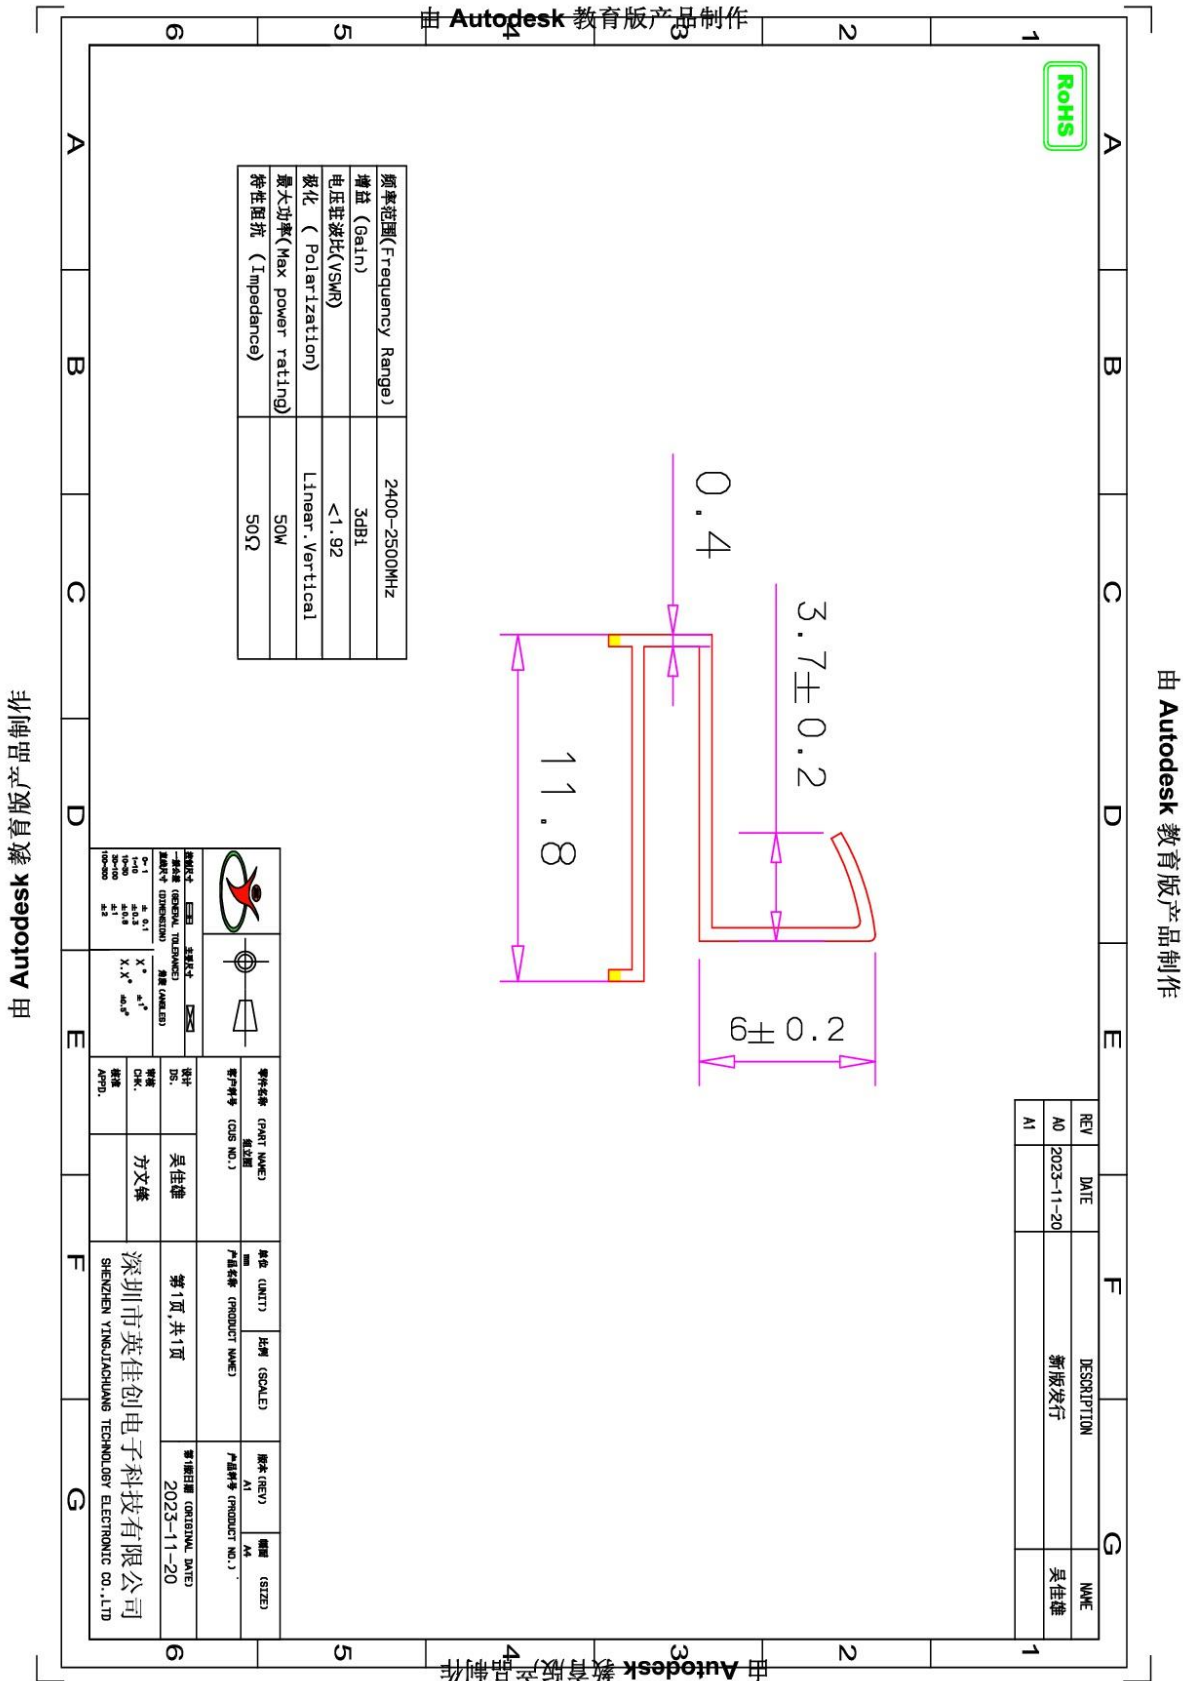




天线技术参数及环境测试 (Antenna technical parameters and environmental testing) :

电气技术参数 (Electrical technical parameter)			
电性能指标 (Mechanical Specifications)			
频率范围 Frequency Range	2400-2500MHz	工作温度 Working Temperature	-20℃~+70℃
电压驻波比 VSWR	<1.92	工作湿度 Working Humidity	20%~80%
输入阻抗 Input Impedance	50 Ω	方向 Direction	All
增益 Gain	BLE: 3.13 dBi 2.4G WIFI: 3.05 dBi		

天线实物图 (antenna physical picture) :



天线性能测试图 Antenna performance test diagram:

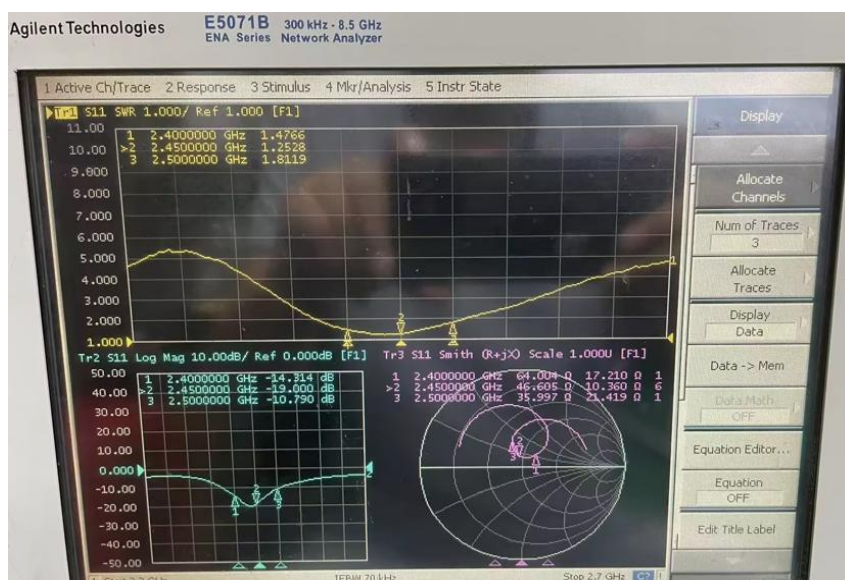


2D、3D 测试数据 (2D and 3D test data (2.4G)) :


Frequency	Efficiency (%)	Gain. (dBi)
2400MHz	52.48	1.79
2410MHz	52.00	2.07
2420MHz	52.00	2.19
2430MHz	49.32	2.48
2440MHz	48.75	2.72
2450MHz	45.92	2.88
2460MHz	45.29	3.05
2470MHz	42.85	3.13
2480MHz	41.50	3.16
2490MHz	40.18	3.21
2500MHz	40.55	3.25




Phi 0 2D:

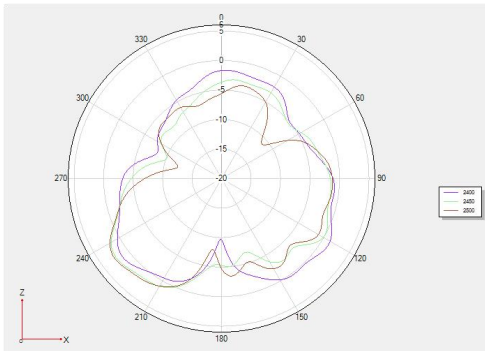




Phi 90 2D:

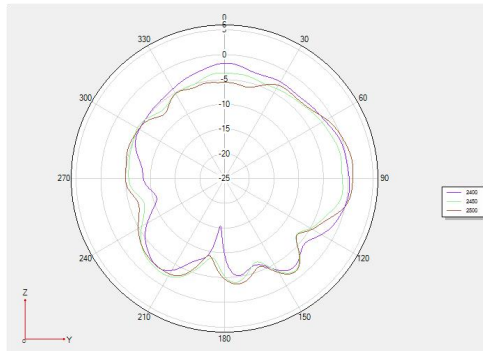




Theta 90 2D:

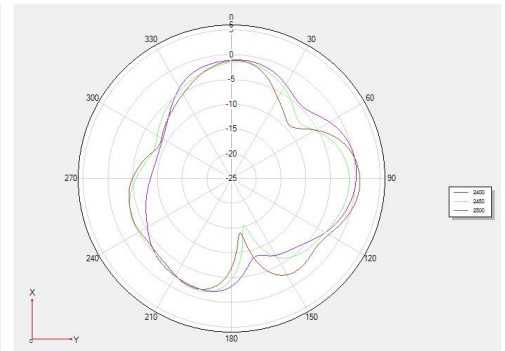




3D 2400:

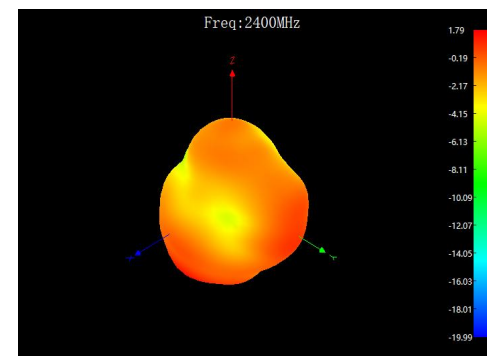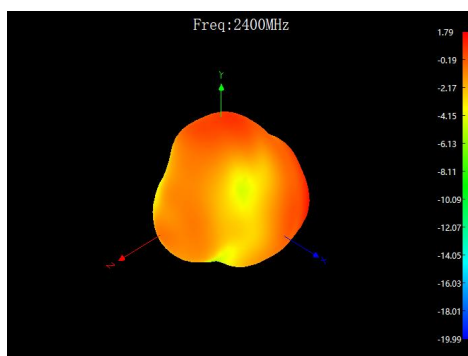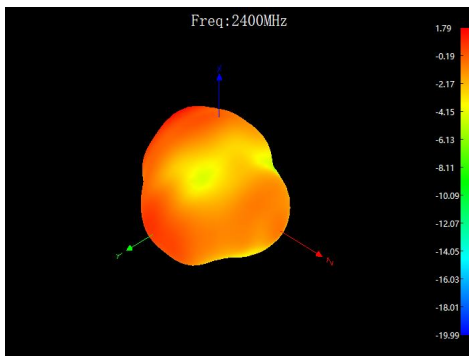

3D 2450:

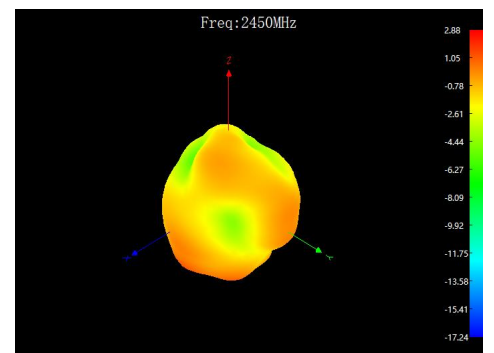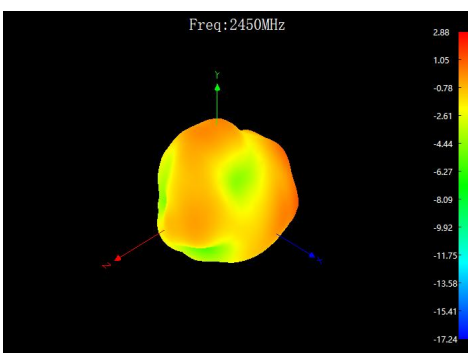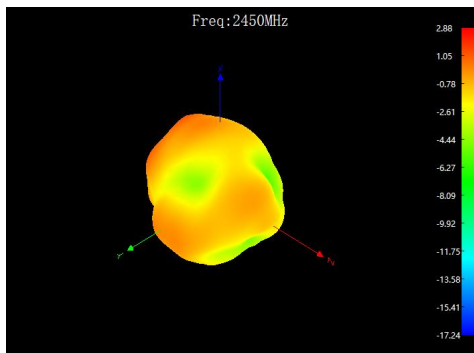

3D 2500:

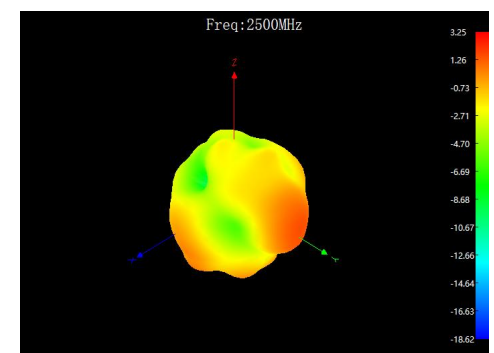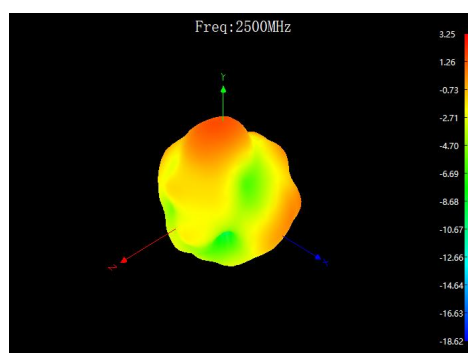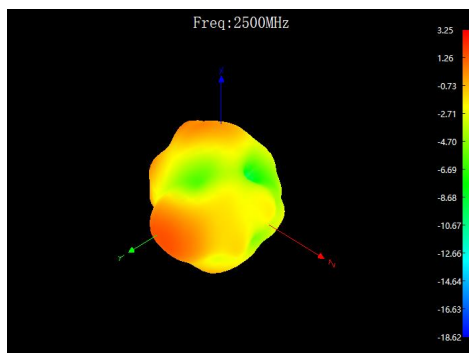



OTA 有源测试数据统计（OTA active test data statistics）：

Item	Measurement	Band	Channel	Frequency	Total
1	TRP	WIFI_B (11M)	1	2412	16.16
2	TRP	WIFI_B (11M)	6	2437	16.42
3	TRP	WIFI_B (11M)	11	2462	15.58
4	TIS(EIRP)	WIFI_B (11M)	1	2412	-75.73
5	TIS(EIRP)	WIFI_B (11M)	6	2437	-81.18
6	TIS(EIRP)	WIFI_B (11M)	11	2462	-76.78
7	TRP	WIFI_G (54M)	1	2412	13.6
8	TRP	WIFI_G (54M)	6	2437	13.18
9	TRP	WIFI_G (54M)	11	2462	12.65
10	TIS(EIRP)	WIFI_G (54M)	1	2412	-59.91
11	TIS(EIRP)	WIFI_G (54M)	6	2437	-67.42
12	TIS(EIRP)	WIFI_G (54M)	11	2462	-65.77
13	TRP	WIFI_N_ISM (65M)	1	2412	13.12
14	TRP	WIFI_N_ISM (65M)	6	2437	12.99
15	TRP	WIFI_N_ISM (65M)	11	2462	12.54
16	TIS(EIRP)	WIFI_N_ISM (65M)	1	2412	-58.4
17	TIS(EIRP)	WIFI_N_ISM (65M)	6	2437	-66.58
18	TIS(EIRP)	WIFI_N_ISM (65M)	11	2462	-65.21