

## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15.247

Report Reference No.....: **MTEB23080119-R**

FCC ID.....: **2A3IW-R2-4K**

Compiled by

( position+printed name+signature)..: File administrators Alisa Luo




Supervised by

( position+printed name+signature)..: Test Engineer Sunny Deng



Approved by

( position+printed name+signature)..: Manager Yvette Zhou



Date of issue.....: **Aug. 08,2023**

**Representative Laboratory Name.:** **Shenzhen Most Technology Service Co., Ltd.**

Address.....: No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park,  
Nanshan, Shenzhen, Guangdong, China.

**Applicant's name.....:** **Aarna Sales Corporation**

Address.....: 1940 N Municipal Way, UNIT 2020, Round Lake, IL 60073

**Test specification.....:**

Standard.....: **FCC Part 15.247**

TRF Originator.....: Shenzhen Most Technology Service Co., Ltd.

**Shenzhen Most Technology Service Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description.....:** Car Dash Camera

Trade Mark.....: ROVE

Model/Type reference.....: R2-4K

Listed Models .....: N/A

Modulation Type.....: b: DSSS ,CCK

g/n/ax: BPSK,QPSK,QAM

Operation Frequency.....: 802.11b/802.11g/802.11n(H20)/ 802.11ax(H20): 2412MHz~2462MHz  
802.11n(H40)/ 802.11ax(H40): 2422MHz~2452MHz

Rating.....: DC 5V (by USB Port)  
DC 5V (by Car Charger)

Hardware version.....: A1

Software version .....: ROVE R2-4K 9-1-2023 V7

Result.....: **PASS**

TEST REPORT

Equipment under Test : Car Dash Camera

Model /Type : R2-4K

Listed Models : N/A

Remark : N/A.

Applicant : **Aarna Sales Corporation**

Address : 1940 N Municipal Way, UNIT 2020, Round Lake, IL 60073

Manufacturer : **Shenzhen Samoon Technology Co.,Ltd**

Address : Floor 6, Building 7, Zhongyuntai Science and Technology Industrial  
Factory, Songbai Road, Shiyan Street, Baoan District, Shenzhen  
China

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b>1</b>	<b>REVISION HISTORY .....</b>	<b>4</b>
<b>2</b>	<b>TEST STANDARDS .....</b>	<b>5</b>
<b>3</b>	<b>SUMMARY .....</b>	<b>6</b>
3.1	General Remarks	6
3.2	Product Description	6
3.3	Equipment Under Test	6
3.4	Short description of the Equipment under Test (EUT)	6
3.5	EUT operation mode	6
3.6	Block Diagram of Test Setup	7
3.7	Test Item (Equipment Under Test) Description*	7
3.8	Auxiliary Equipment (AE) Description	7
3.9	Antenna Information*	7
3.10	Related Submittal(s) / Grant (s)	7
3.11	Modifications	8
3.12	EUT configuration	8
<b>4</b>	<b>TEST ENVIRONMENT .....</b>	<b>9</b>
4.1	Address of the test laboratory	9
4.2	Test Facility	9
4.3	Environmental conditions	9
4.4	Test Description	10
4.5	Statement of the measurement uncertainty	10
4.6	Equipments Used during the Test	11
<b>5</b>	<b>TEST CONDITIONS AND RESULTS .....</b>	<b>12</b>
5.1	AC Power Conducted Emission	12
5.2	Radiated Emission	15
5.3	Band Edge Compliance of RF Emission	20
5.4	Maximum Conducted Output Power	45
5.5	Power Spectral Density	46
5.6	6dB Bandwidth	47
5.7	Out-of-band Emissions	48
5.8	Duty Cycle Information	49
5.9	Antenna Requirement	50
<b>6</b>	<b>TEST SETUP PHOTOS OF THE EUT .....</b>	<b>51</b>
<b>7</b>	<b>PHOTOS OF THE EUT .....</b>	<b>52</b>
	APPENDIX I. Conducted Peak Output Power	53
	APPENDIX II. 99% Bandwidth	55
	APPENDIX III. 6dB Bandwidth	59
	APPENDIX IV. Conducted Out Of Band Emission	63
	APPENDIX V. Duty Cycle	73
	APPENDIX VI. Power Spectral Density	83

1 Revision History

Revision	Issue Date	Revisions	Revised By
00	2023-08-08	Initial Issue	Alisa Luo

## **2 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 v05r02](#): Guidance for Compliance Measurements on Digital Transmission Systems (DTS) ,Frequency Hopping Spread Spectrum System(HFSS), and Hybrid System Devices Operating Under §15.247 of The FCC rules.

### 3 SUMMARY

#### 3.1 General Remarks

Date of receipt of test sample	:	2023.07.23
Testing commenced on	:	2023.07.24
Testing concluded on	:	2023.08.08

#### 3.2 Product Description

Product Name:	Car Dash Camera
Model/Type reference:	R2-4K
Power Supply:	DC 5V (by USB Port) DC 5V (by Car Charger)
Testing sample ID:	MTYP02221
<b>WIFI :</b>	
Supported type:	802.11b/802.11g/802.11n(H20)/802.11n(H40) /802.11ax(H20) /802.11ax(H40)
Modulation:	b: DSSS ,CCK g/n/ax: BPSK,QPSK,QAM
Operation frequency:	802.11b/802.11g/802.11n(H20)/ 802.11ax(H20): 2412MHz~2462MHz 802.11n(H40)/ 802.11ax(H40): 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n (H20)/802.11ax(H20): 11 802.11n (H40)/802.11ax(H40): 7
Channel separation:	5MHz
Antenna type:	Internal Antenna
Antenna gain:	2.68dBi

#### 3.3 Equipment Under Test

##### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 230V / 50 Hz	<input type="radio"/> 120V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 5V (by USB Port)  
DC 5V (by Car Charger)

#### 3.4 Short description of the Equipment under Test (EUT)

This is a Car Dash Camera.  
For more details, refer to the user's manual of the EUT.


#### 3.5 EUT operation mode

The application provider specific test software(AT command) to control sample in continuous TX and RX (Duty Cycle >98%) for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n(20)/n(40)/ax(20)/ax(40): Thirteen channels are provided to the EUT.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

### 3.6 Block Diagram of Test Setup

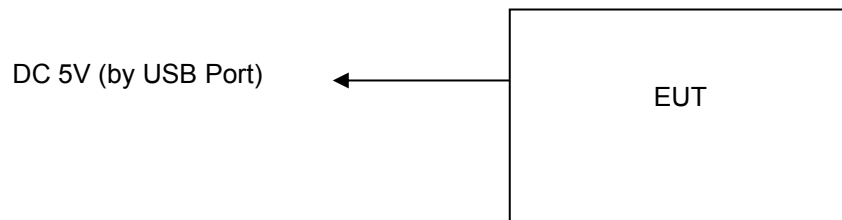

### 3.7 Test Item (Equipment Under Test) Description\*

Short designation	EUT Name	EUT Description	Serial number	Hardware status	Software status
EUT A	/	/	/	/	/
EUT B	/	/	/	/	/

\*: declared by the applicant. According to customers information EUTs A and B are the same devices.

### 3.8 Auxiliary Equipment (AE) Description

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE 1	Adapter	/	MDY-08-EH	/
AE 2	/	/	/	/

### 3.9 Antenna Information\*

Short designation	Antenna Name	Antenna Type	Frequency Range	Serial number	Antenna Peak Gain
Antenna 1	---	Internal Antenna	2.4 – 2.5 GHz	---	2.68dBi
Antenna 2					

\*: declared by the applicant.

### 3.10 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: A4C-10011B** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

### 3.11 Modifications

No modifications were implemented to meet testing criteria.

### 3.12 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

○ - supplied by the manufacturer

● - Supplied by the lab

●	ADAPTER	M/N:	MDY-08-EH
		Manufacturer:	Xiaomi Communications Co.,Ltd



## 4 TEST ENVIRONMENT

### 4.1 Address of the test laboratory

#### **Shenzhen Most Technology Service Co., Ltd.**

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.  
The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

### 4.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### **FCC-Registration No.: 0031192610**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

#### **A2LA-Lab Cert. No.: 6343.01**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### 4.3 Environmental conditions

Radiated Emission:

Temperature:	24 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

AC Main Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

#### 4.4 Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	N/A
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

#### Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9KHz~1GHz& Radiated Emission 1GHz~10 <sup>th</sup> Harmonic	11b/DSSS	1 Mbps	1/6/11
	11g/OFDM	6 Mbps	1/6/11
	11n(20MHz)/OFDM	6.5Mbps	1/6/11
	11n(40MHz)/OFDM	6.5Mbps	3/6/9
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM	6.5Mbps	1/11
	11n(40MHz)/OFDM	6.5Mbps	3/9

#### 4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18~40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)
6dB Bandwidth & 99% Bandwidth	/	5%	(1)
Maximum Conducted Output Power	/	0.80dB	(1)
Spurious RF Conducted Emission	/	1.6dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.6 Equipments Used during the Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware versions	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	100093	/	2023/03/17	1 Year
2	Three-phase artificial power network	Schwarzback Mess	NNLK8129	8129178	/	2023/03/17	1 Year
3.	Receiver	R&S	ESCI	100492	V3.0-10-2	2023/03/17	1 Year
4	Receiver	R&S	ESPI	101202	V3.0-10-2	2023/03/17	1 Year
5	Spectrum analyzer	Agilent	9020A	MT-E306	A14.16	2023/03/17	1 Year
6	Bilong Antenna	Sunol Sciences	JB3	A121206	/	2023/03/17	1 Year
7	Horn antenna	HF Antenna	HF Antenna	MT-E158	/	2023/03/17	1 Year
8	Loop antenna	Beijing Daze	ZN30900B	/	/	2023/03/17	1 Year
9	Horn antenna	R&S	OBH100400	26999002	/	2023/03/17	1 Year
10	Wireless Communication Test Set	R&S	CMW500	/	CMW-BASE-3.7.21	2023/03/17	1 Year
11	Spectrum analyzer	R&S	FSP	100019	V4.40 SP2	2023/03/17	1 Year
12	High gain antenna	Schwarzbeck	LB-180400KF	MT-E389	/	2023/03/17	1 Year
13	Preamplifier	Schwarzbeck	BBV 9743	MT-E390	/	2023/03/17	1 Year
14	Pre-amplifier	EMCI	EMC051845S E	MT-E391	/	2023/03/17	1 Year
15	Pre-amplifier	Agilent	83051A	MT-E392	/	2023/03/17	1 Year
16	High pass filter unit	Tonscend	JS0806-F	MT-E393	/	2023/03/17	1 Year
17	RF Cable(below1GHz)	Times	9kHz-1GHz	MT-E394	/	2023/03/17	1 Year
18	RF Cable(above 1GHz)	Times	1-40G	MT-E395	/	2023/03/17	1 Year
19	RF Cable (9KHz-40GHz)	Tonscend	170660	N/A	/	2023/03/17	1 Year

Note: The Cal.Interval was one year.

## 5 TEST CONDITIONS AND RESULTS

### 5.1 AC Power Conducted Emission

#### TEST CONFIGURATION

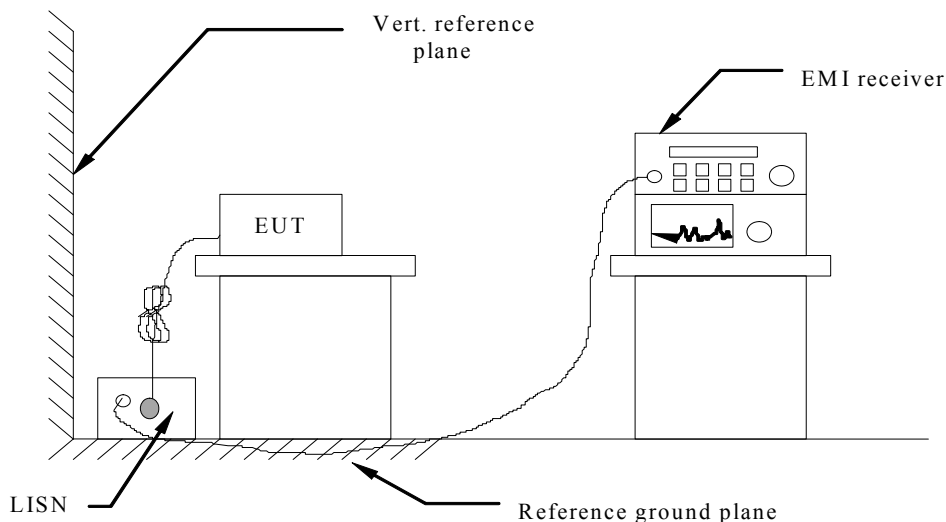

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 5V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :


Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


\* Decreases with the logarithm of the frequency.

#### TEST RESULTS

## Remark:

1.WIFI modes were test at 802.11b/802.11g/802.11n (H20) /802.11n (H40) , 802.11ax(H20) /802.11 ax (H40) (Low, Middle, and High channel); only the worst result of 802.11b Middle Channel was reported as below:

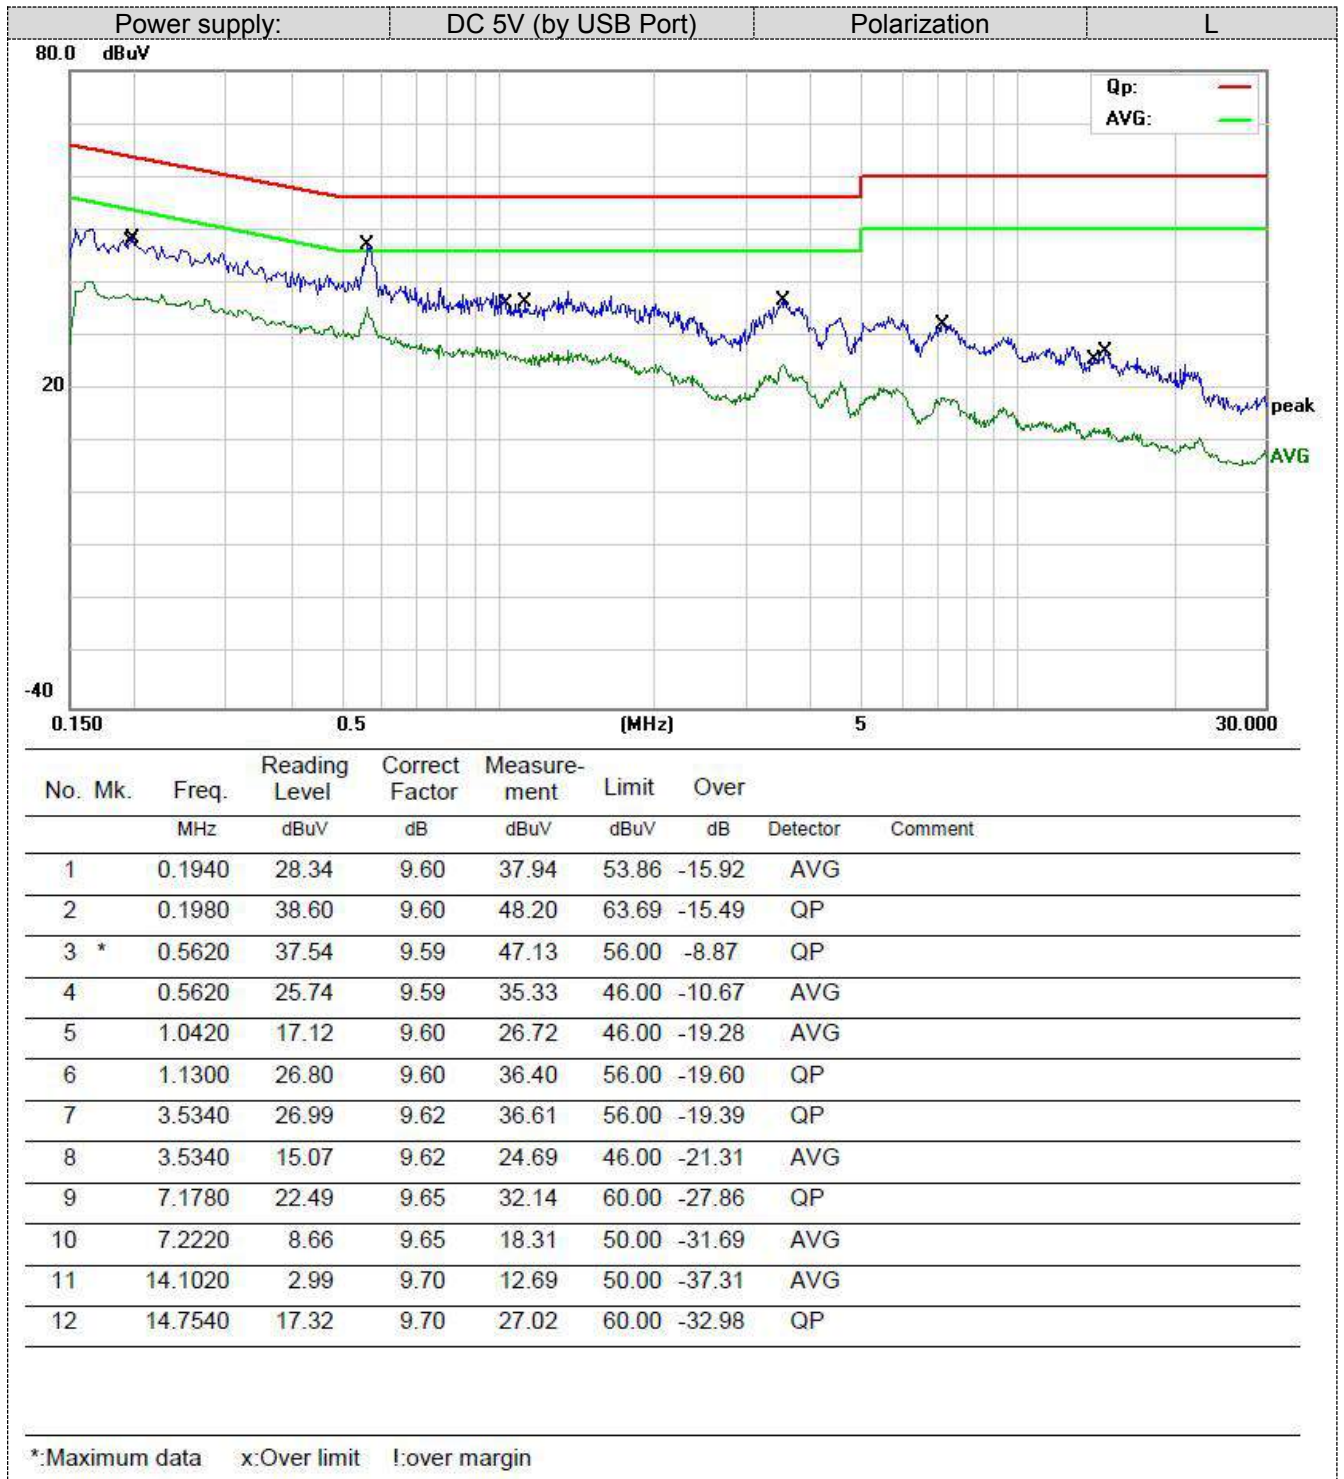


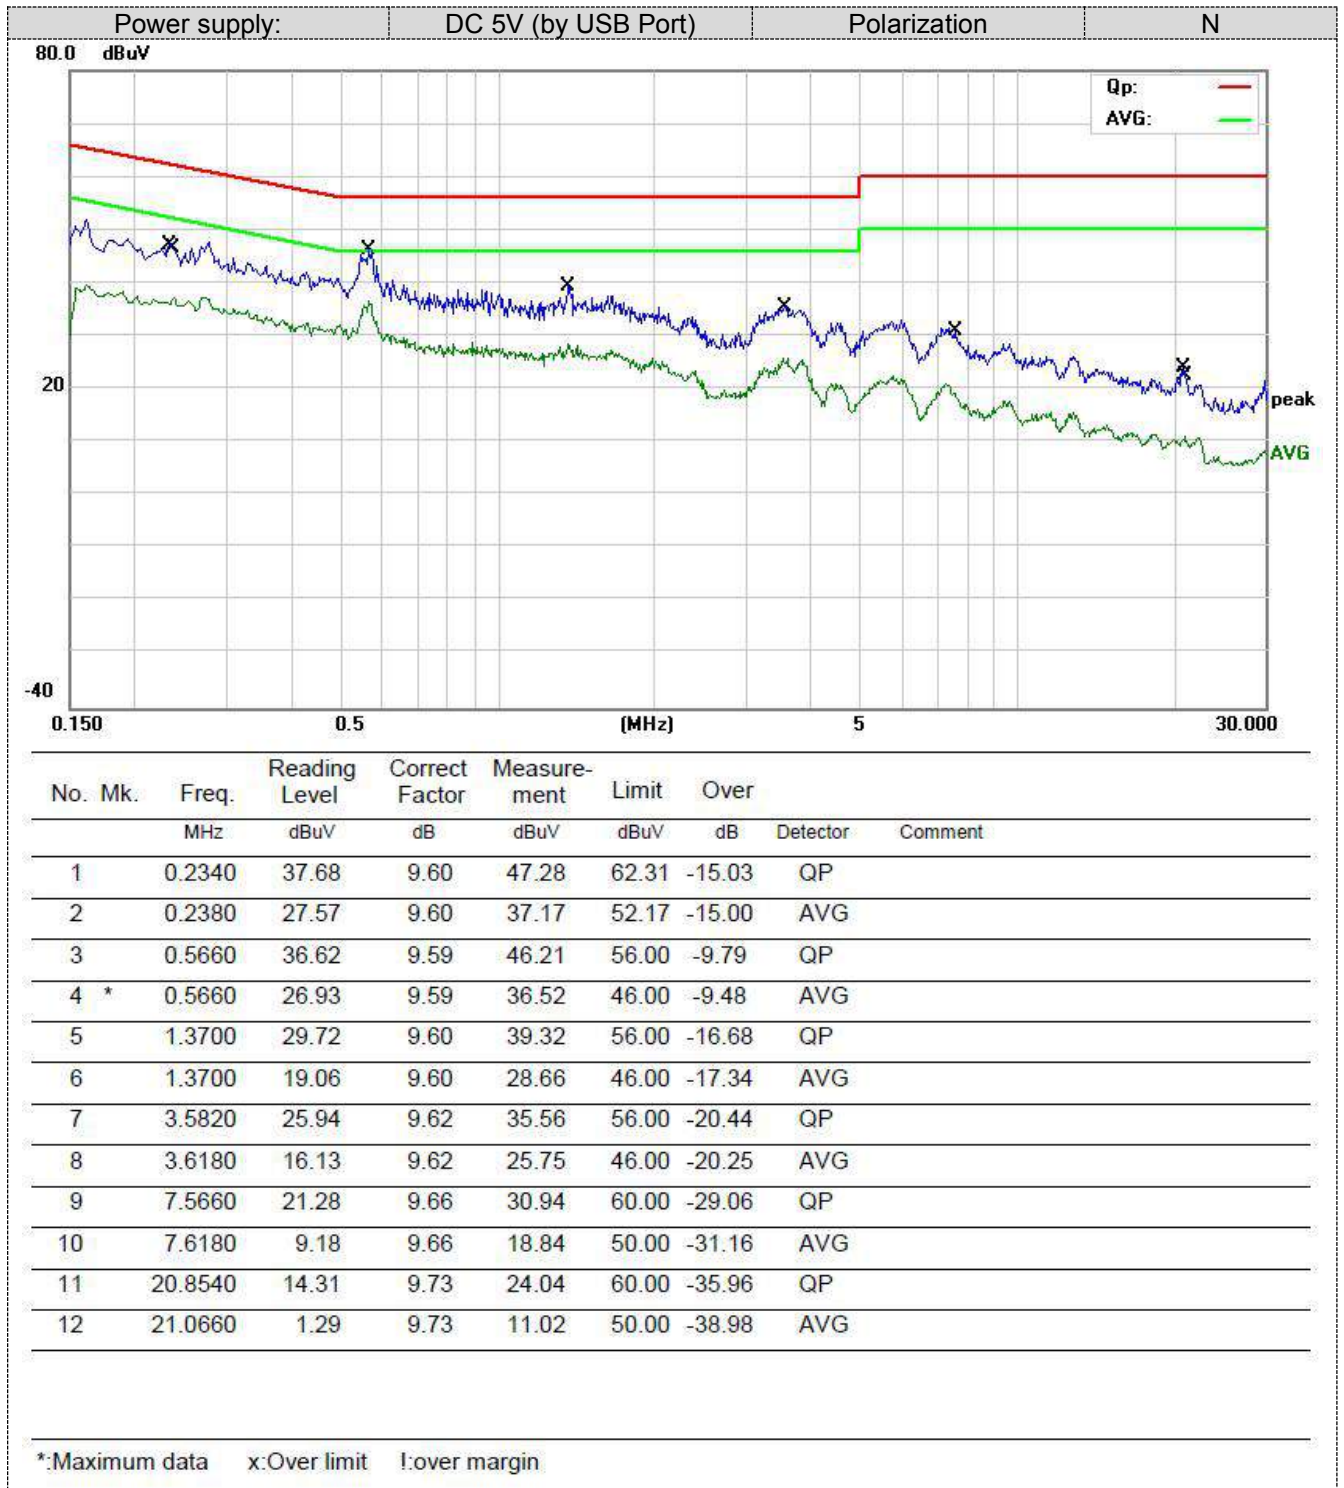


## 5.2 Radiated Emission

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

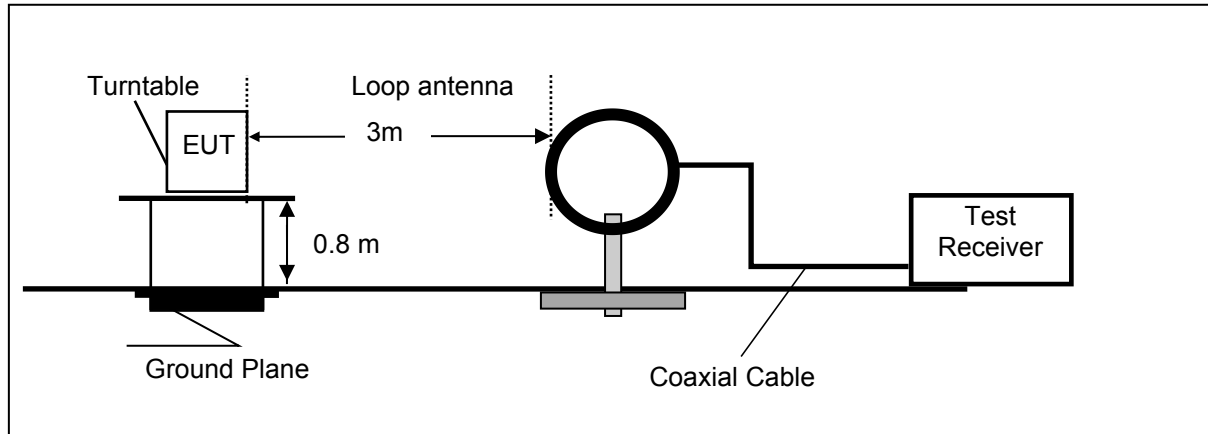

Frequency range 30MHz – 1000MHz

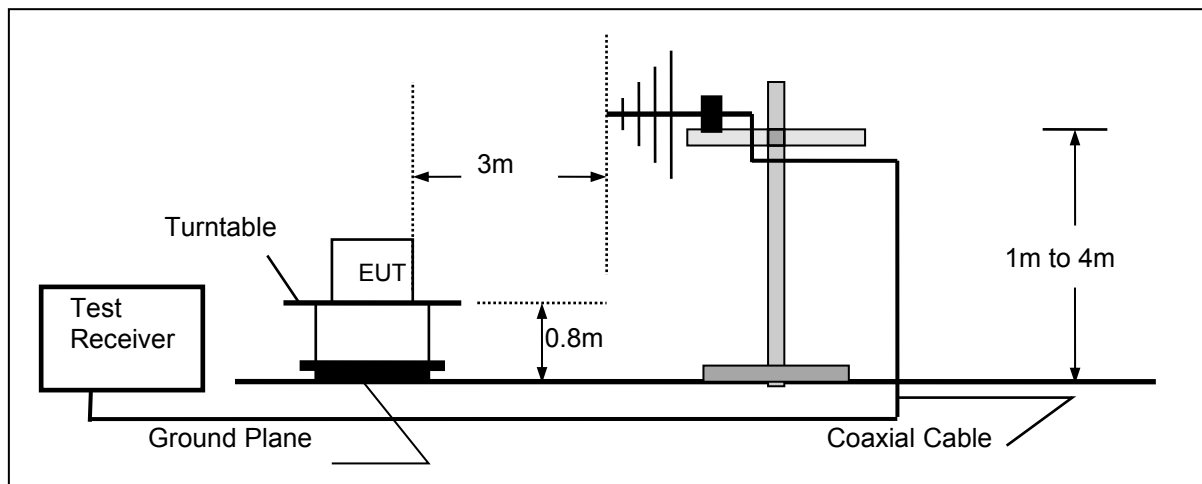

Frequency range above 1GHz-25GHz

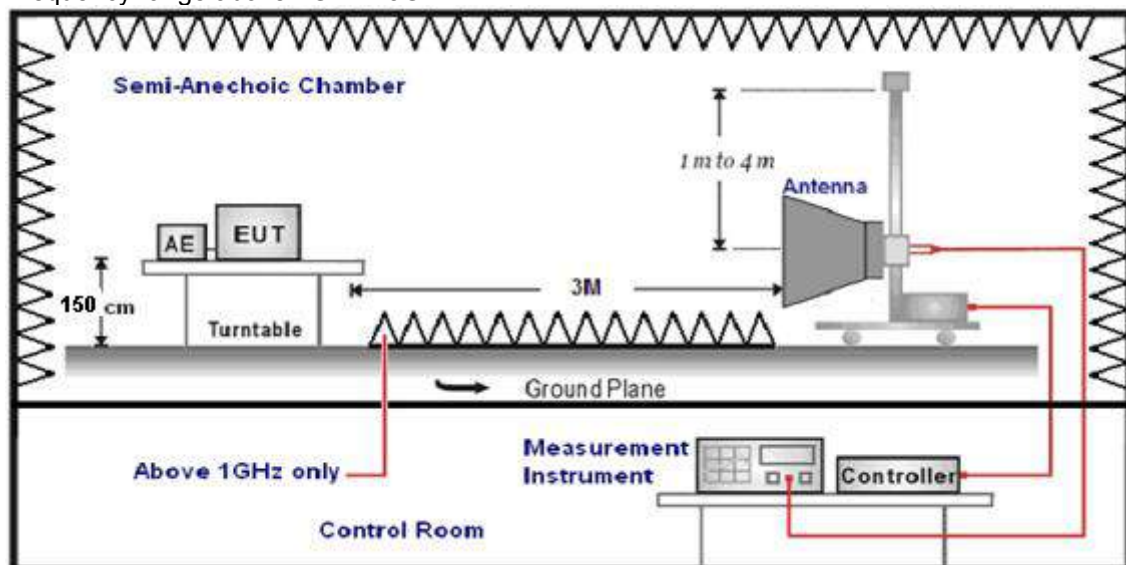

**TEST PROCEDURE**

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

**RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.


Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500



**TEST RESULTS**


Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. All three channels (lowest/middle/highest) of each mode were measured below 1GHz and recorded worst case at 802.11b low channel.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
4. Remark: Result=Reading value+Factor

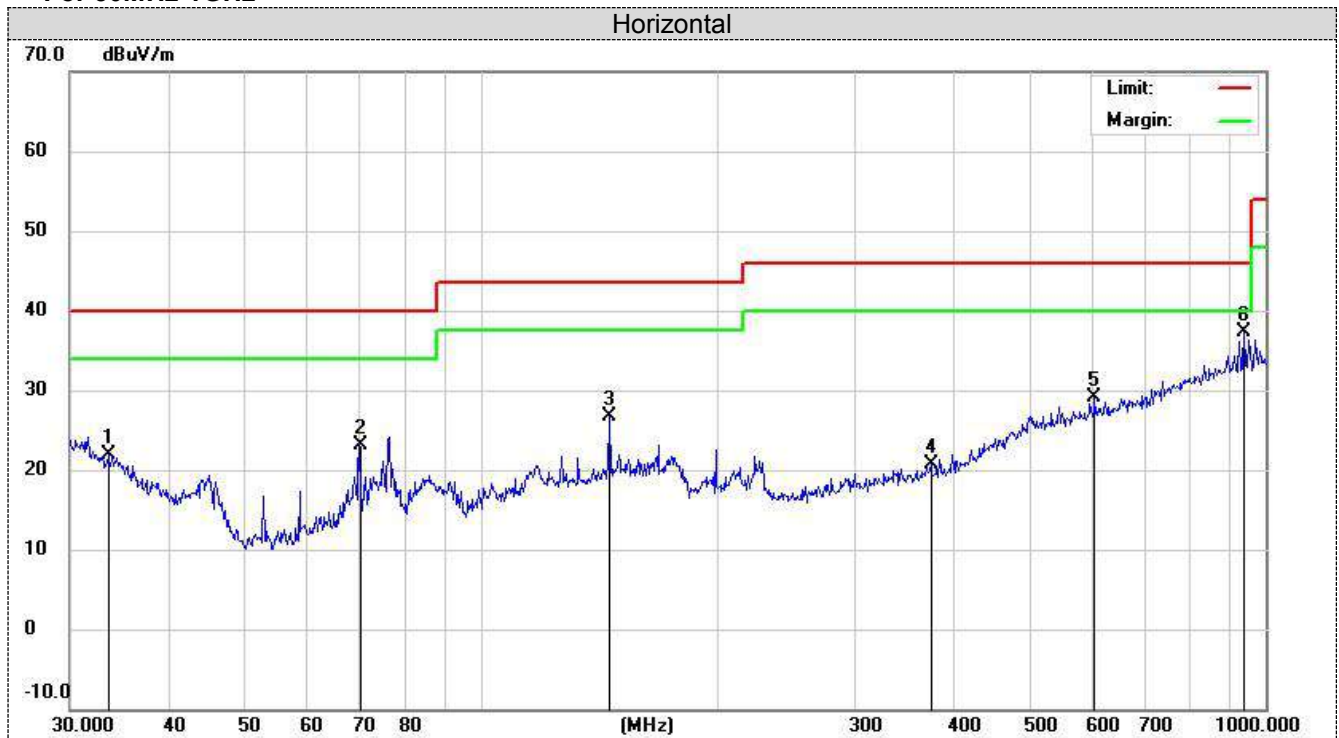**For 30MHz-1GHz**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		33.5624	3.44	18.48	21.92	40.00	-18.08	QP	100	20
2		70.0903	13.89	9.31	23.20	40.00	-16.80	QP	100	90
3		145.8611	9.55	17.16	26.71	43.50	-16.79	QP	100	120
4		374.6225	3.85	16.92	20.77	46.00	-25.23	QP	100	300
5		605.6592	5.30	23.87	29.17	46.00	-16.83	QP	100	320
6	*	938.8326	7.85	29.39	37.24	46.00	-8.76	QP	100	355

\*:Maximum data    x:Over limit    !:over margin

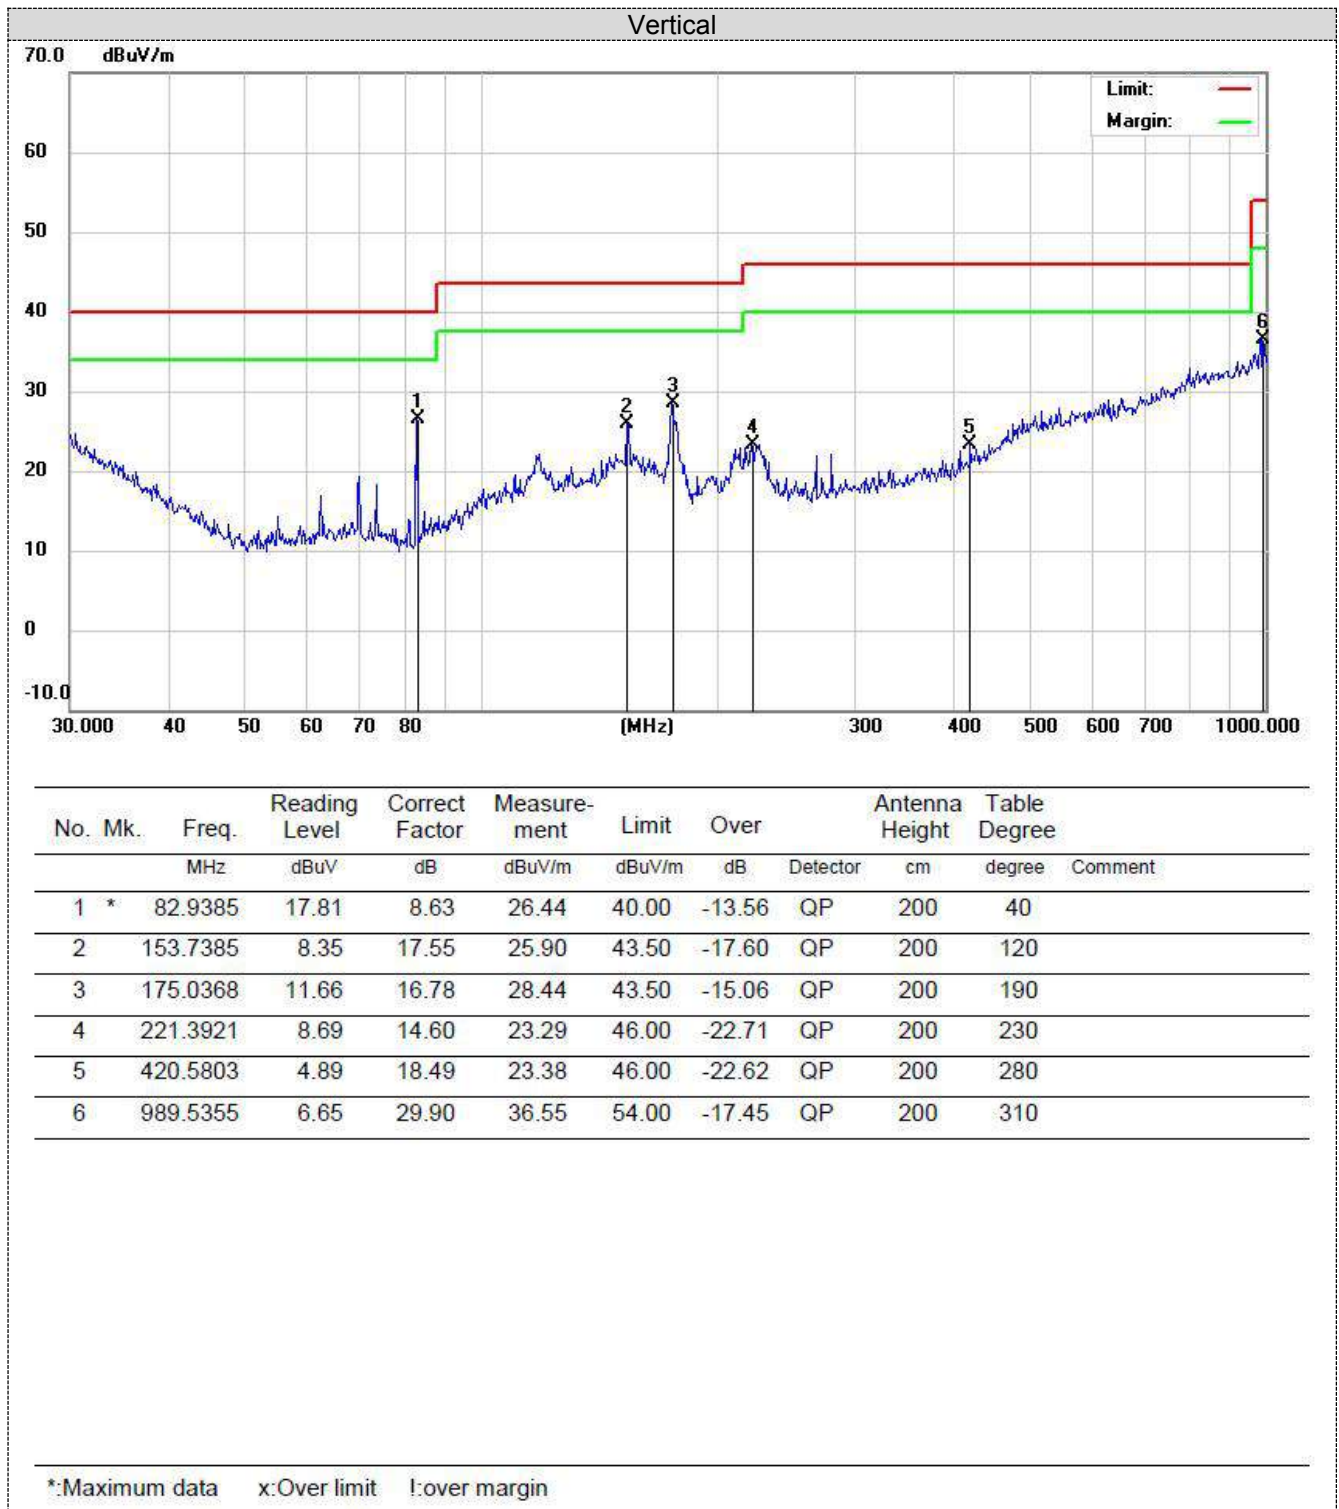

**For 1GHz to 25GHz**

Note: 802.11b/802.11g/802.11n (H20) /802.11n (H40) , 802.11ax(H20) /802.11 ax (H40) all have been tested, only worse case 802.11b mode is reported

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
<b>802.11b-2412MHz</b>									
V	4824	55.16	30.28	7.01	36.5	55.95	74	18.05	PK
V	4824	44.74	30.28	7.01	36.5	45.53	54	8.47	AV
H	4824	54.37	30.28	7.01	36.5	55.16	74	18.84	PK
H	4824	41	30.28	7.01	36.5	41.79	54	12.21	AV
V	7236	44.98	36.59	8.91	35.3	55.18	74	18.82	PK
V	7236	30.24	36.59	8.91	35.3	40.44	54	13.56	AV
H	7236	43.37	36.59	8.91	35.3	53.57	74	20.43	PK
H	7236	29.86	36.59	8.91	35.3	40.06	54	13.94	AV
<b>802.11b -2437MHz</b>									
V	4874	56.81	30.36	7.62	36.5	58.29	74	15.71	PK
V	4874	40.33	30.36	7.62	36.5	41.81	54	12.19	AV
H	4874	54.21	30.36	7.62	36.5	55.69	74	18.31	PK
H	4874	42.02	30.36	7.62	36.5	43.5	54	10.5	AV
V	7311	40.15	36.61	8.84	35.3	50.3	74	23.7	PK
V	7311	29.38	36.61	8.84	35.3	39.53	54	14.47	AV
H	7311	39.63	36.61	8.84	35.3	49.78	74	24.22	PK
H	7311	30.35	36.61	8.84	35.3	40.5	54	13.5	AV
<b>802.11b -2462MHz</b>									
V	4924	54.59	30.43	7.94	36.2	56.76	74	17.24	PK
V	4924	42.02	30.43	7.94	36.2	44.19	54	9.81	AV
H	4924	57.53	30.43	7.94	36.2	59.7	74	14.3	PK
H	4924	40.84	30.43	7.94	36.2	43.01	54	10.99	AV
V	7386	40.21	36.78	8.45	35.3	50.14	74	23.86	PK
V	7386	30.7	36.78	8.45	35.3	40.63	54	13.37	AV
H	7386	41.2	36.78	8.45	35.3	51.13	74	22.87	PK
H	7386	29.99	36.78	8.45	35.3	39.92	54	14.08	AV

Note:


- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

### 5.3 Band Edge Compliance of RF Emission

#### TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### TEST CONFIGURATION

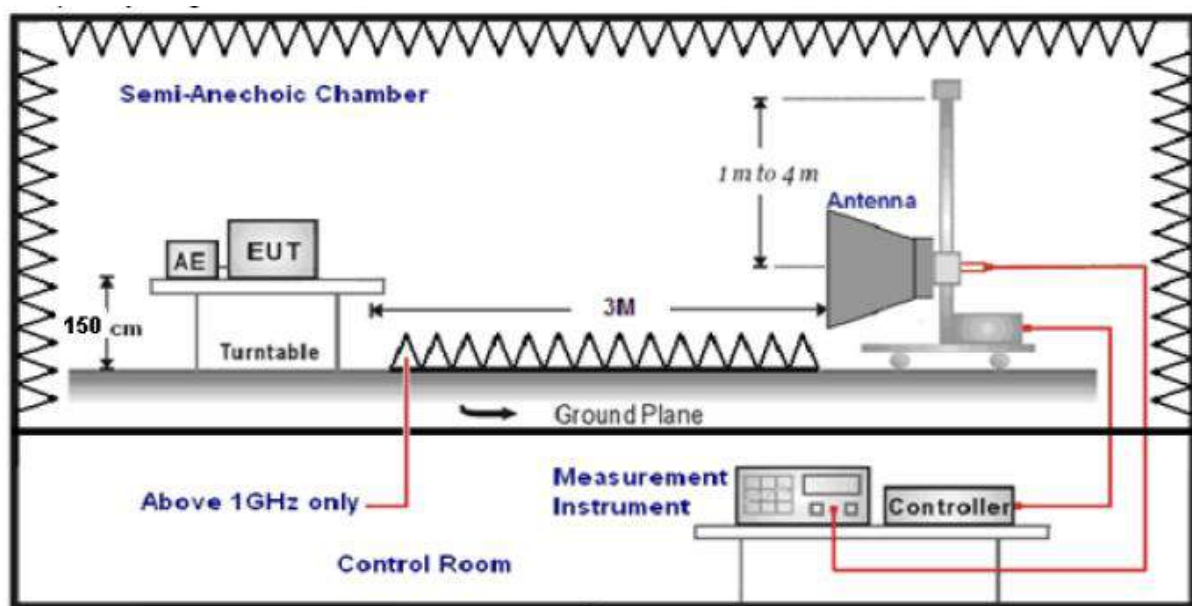

#### TEST PROCEDURE

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:


Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak


#### LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)


Results of Band Edges Test (Radiated)

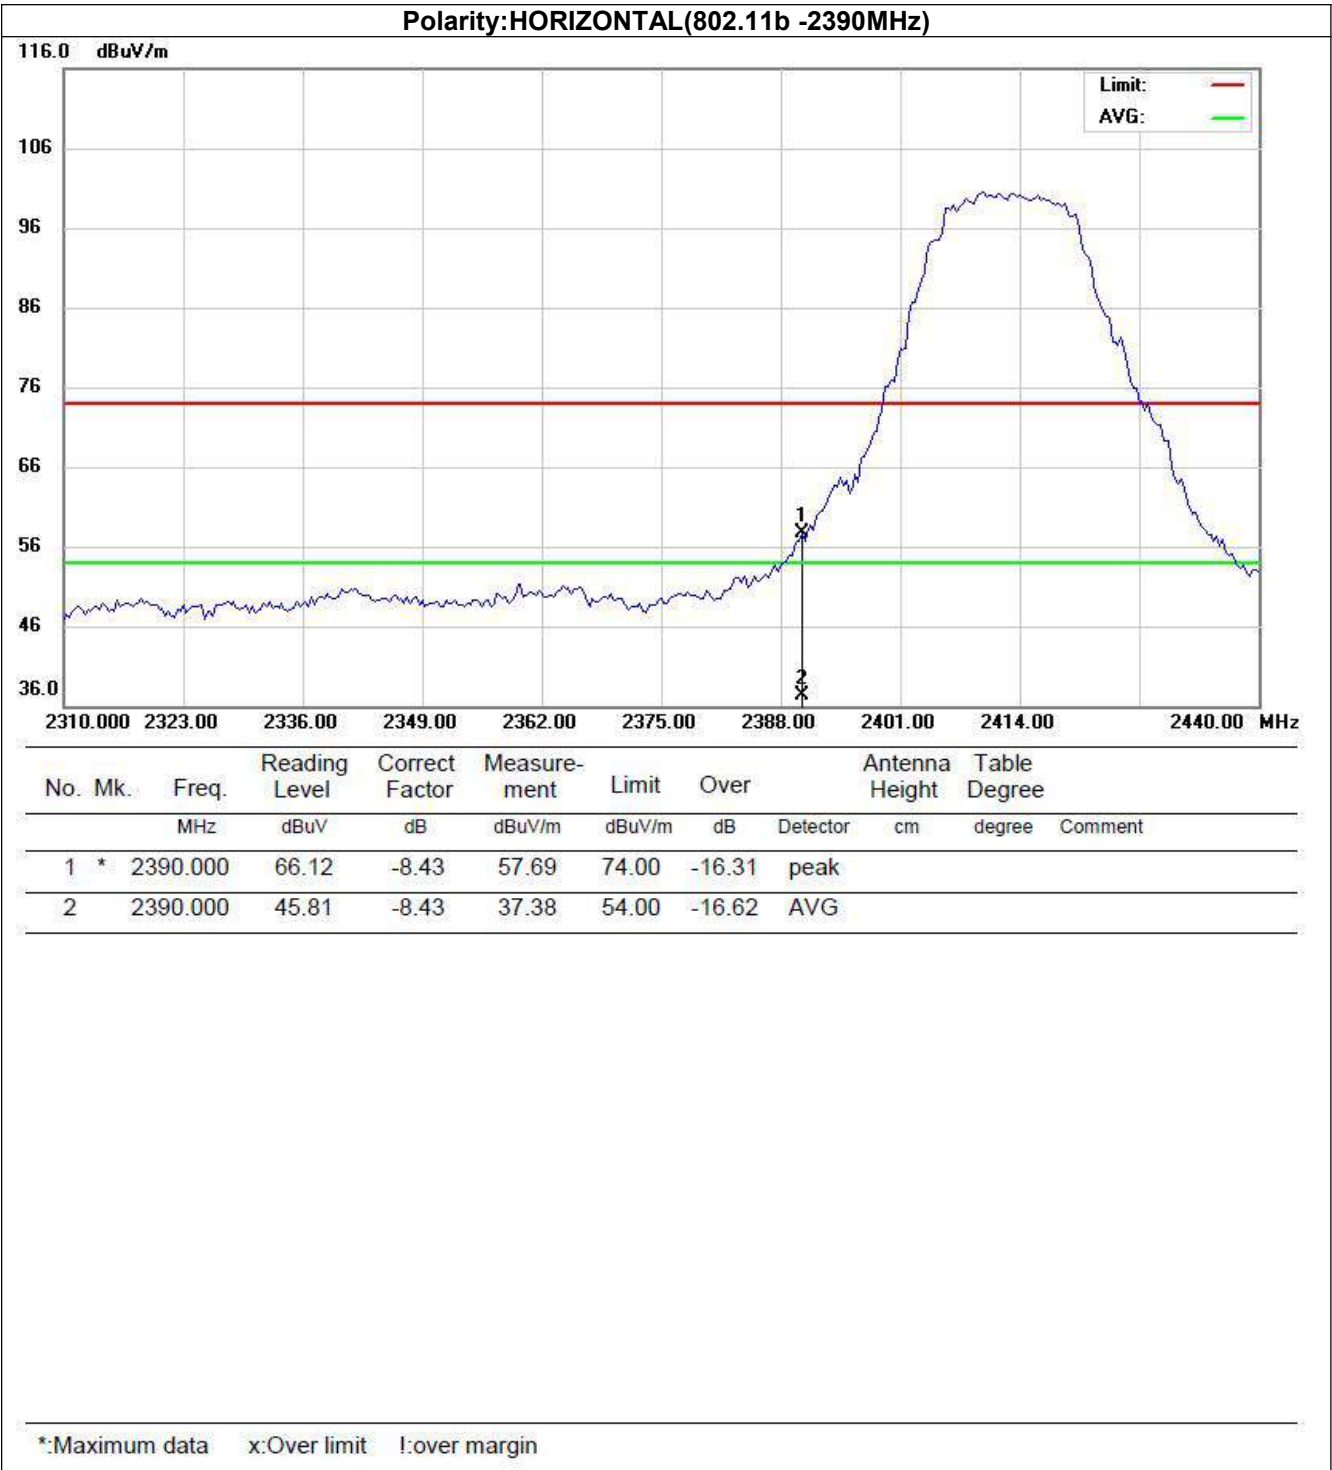

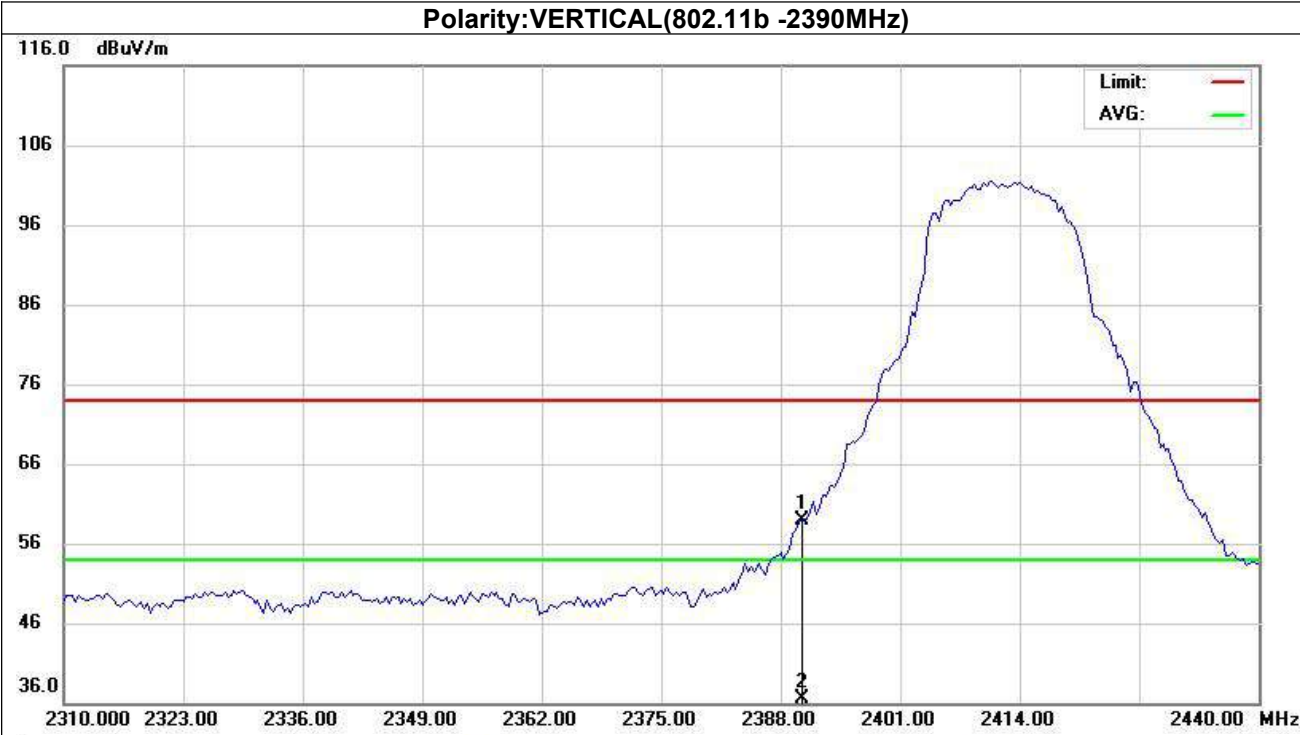


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2390.000	67.41	-8.43	58.98	74.00	-15.02			peak
2		2390.000	45.00	-8.43	36.57	54.00	-17.43			AVG

\*:Maximum data    x:Over limit    !:over margin

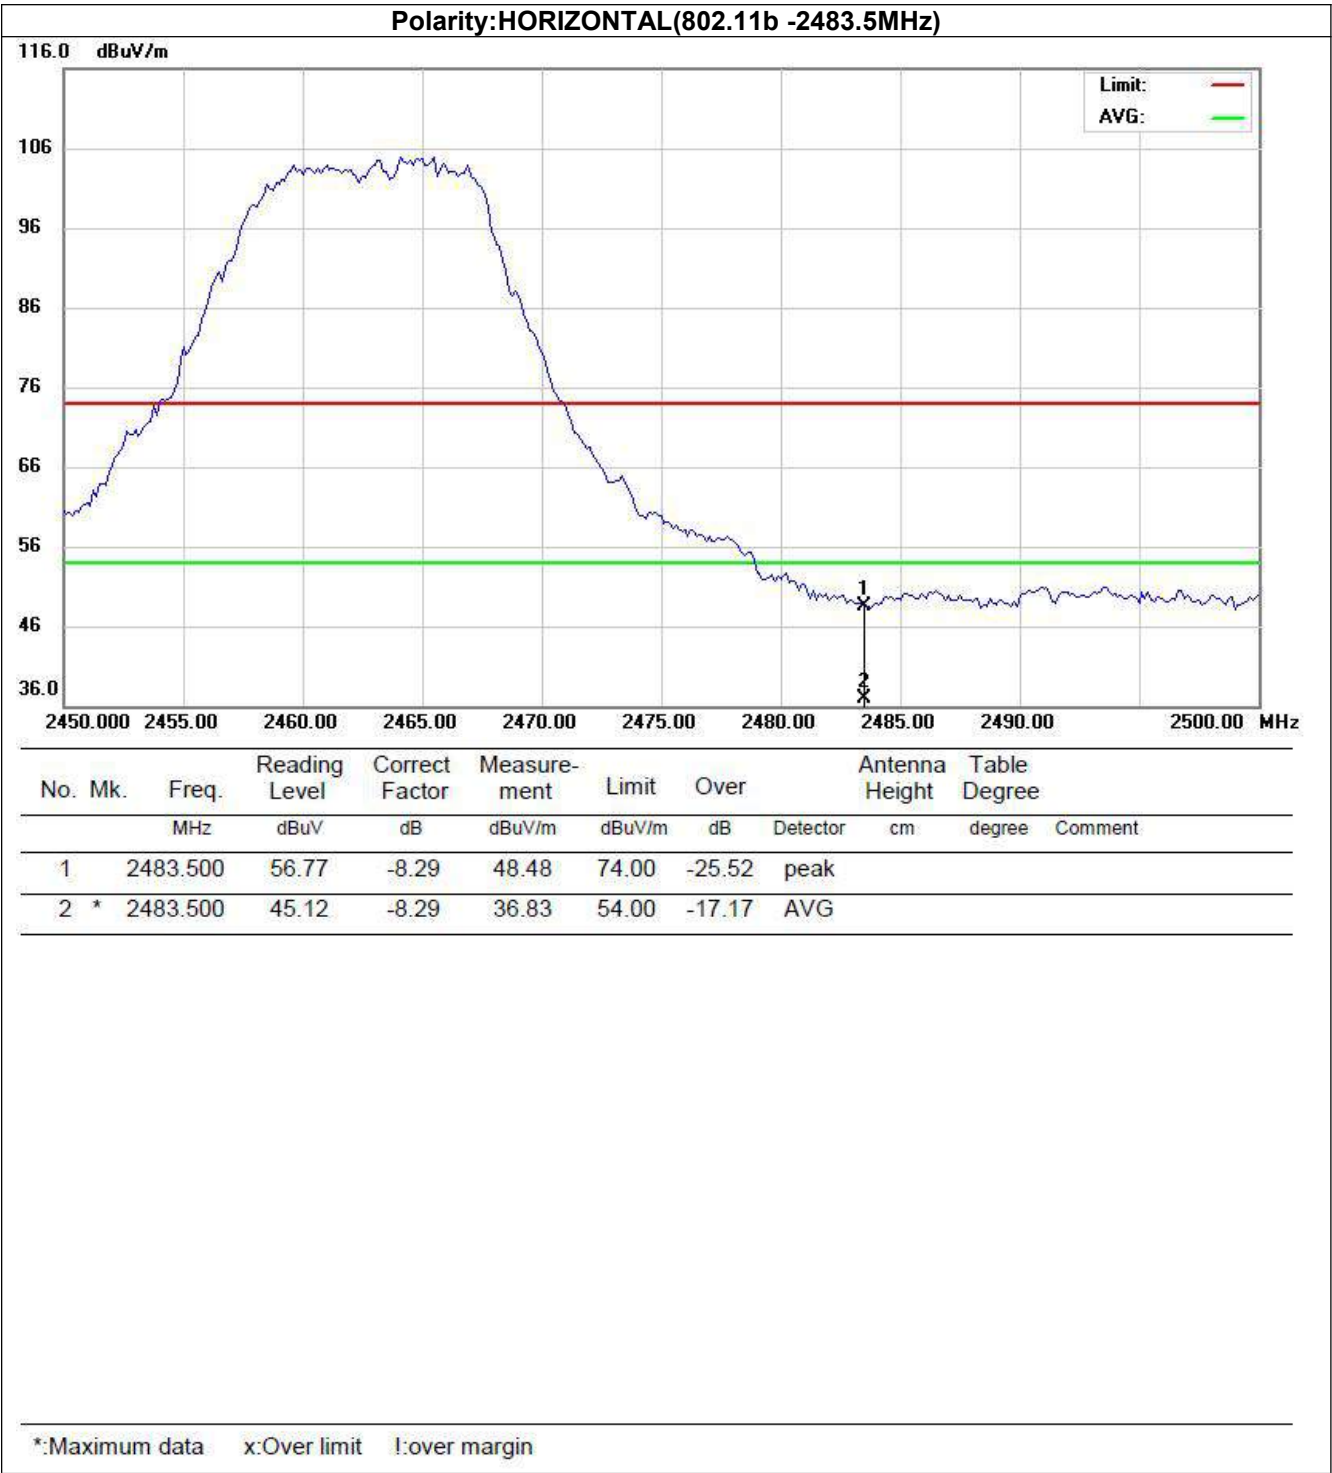




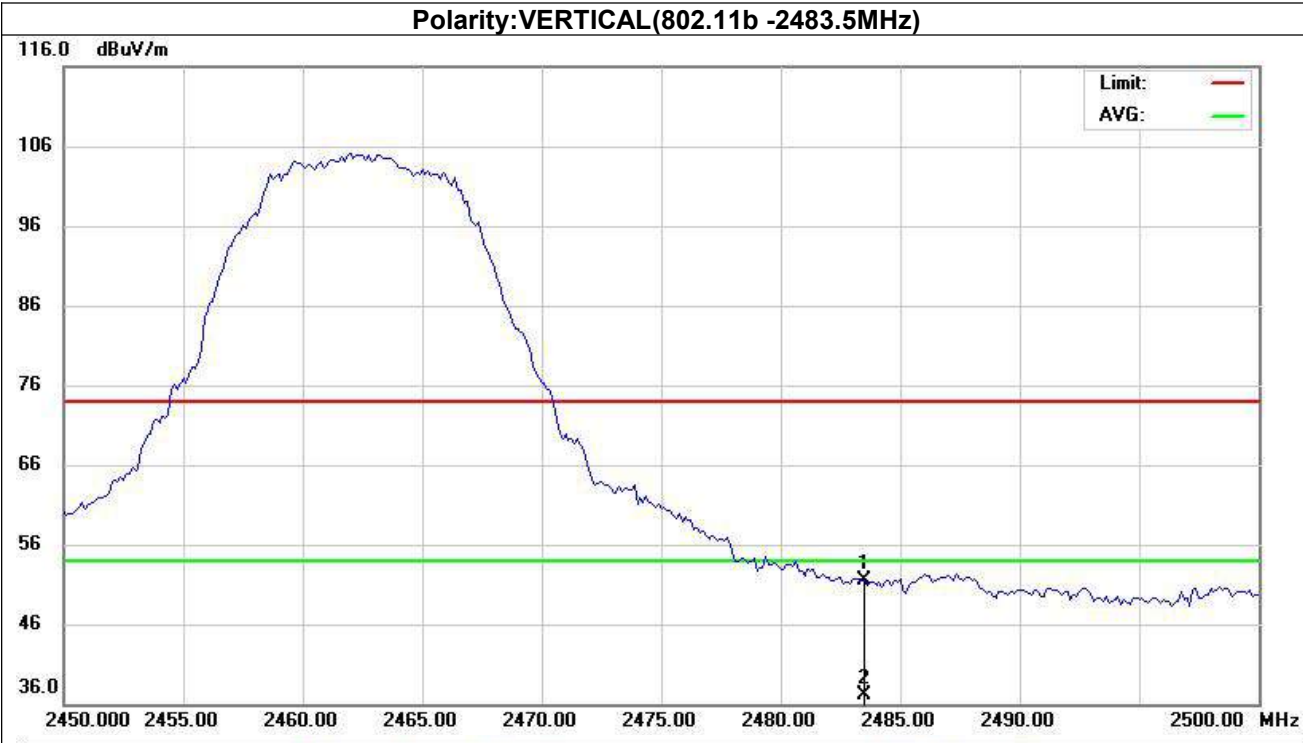



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	59.77	-8.29	51.48	74.00	-22.52	peak		
2	*	2483.500	45.36	-8.29	37.07	54.00	-16.93	AVG		

\*:Maximum data    x:Over limit    !:over margin




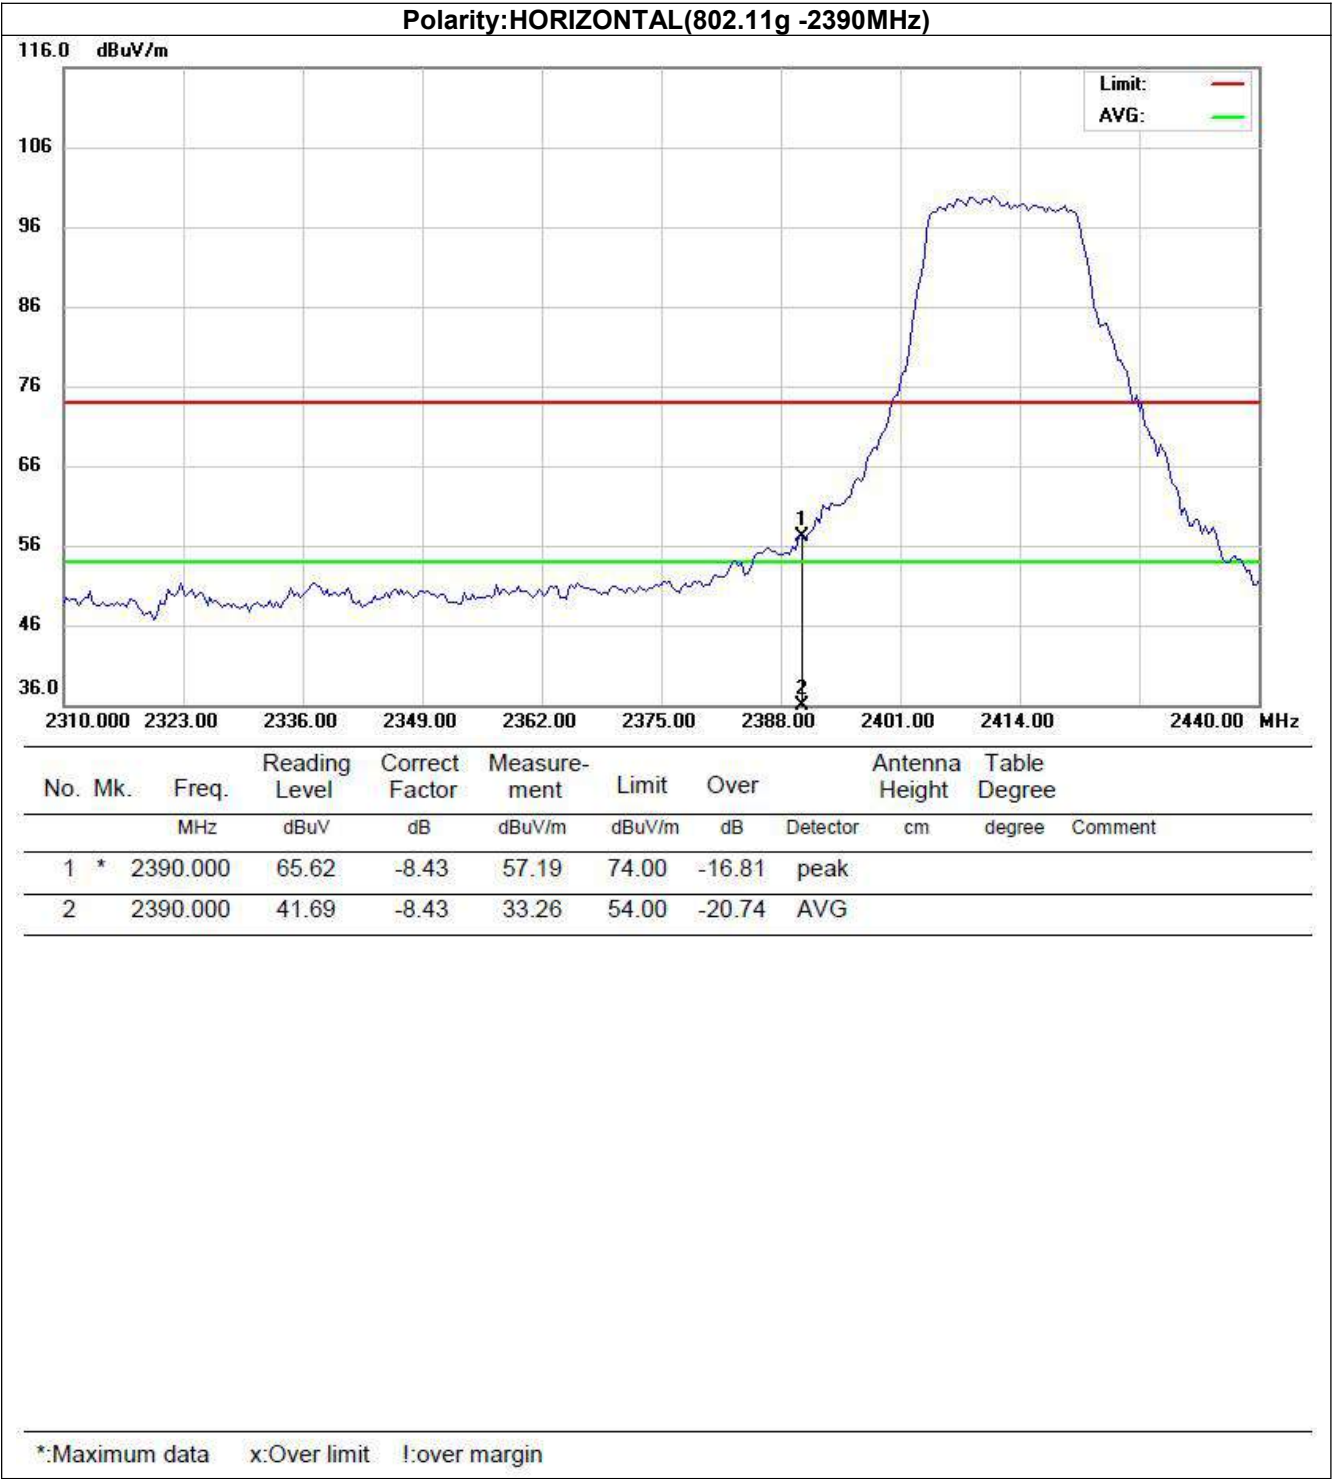


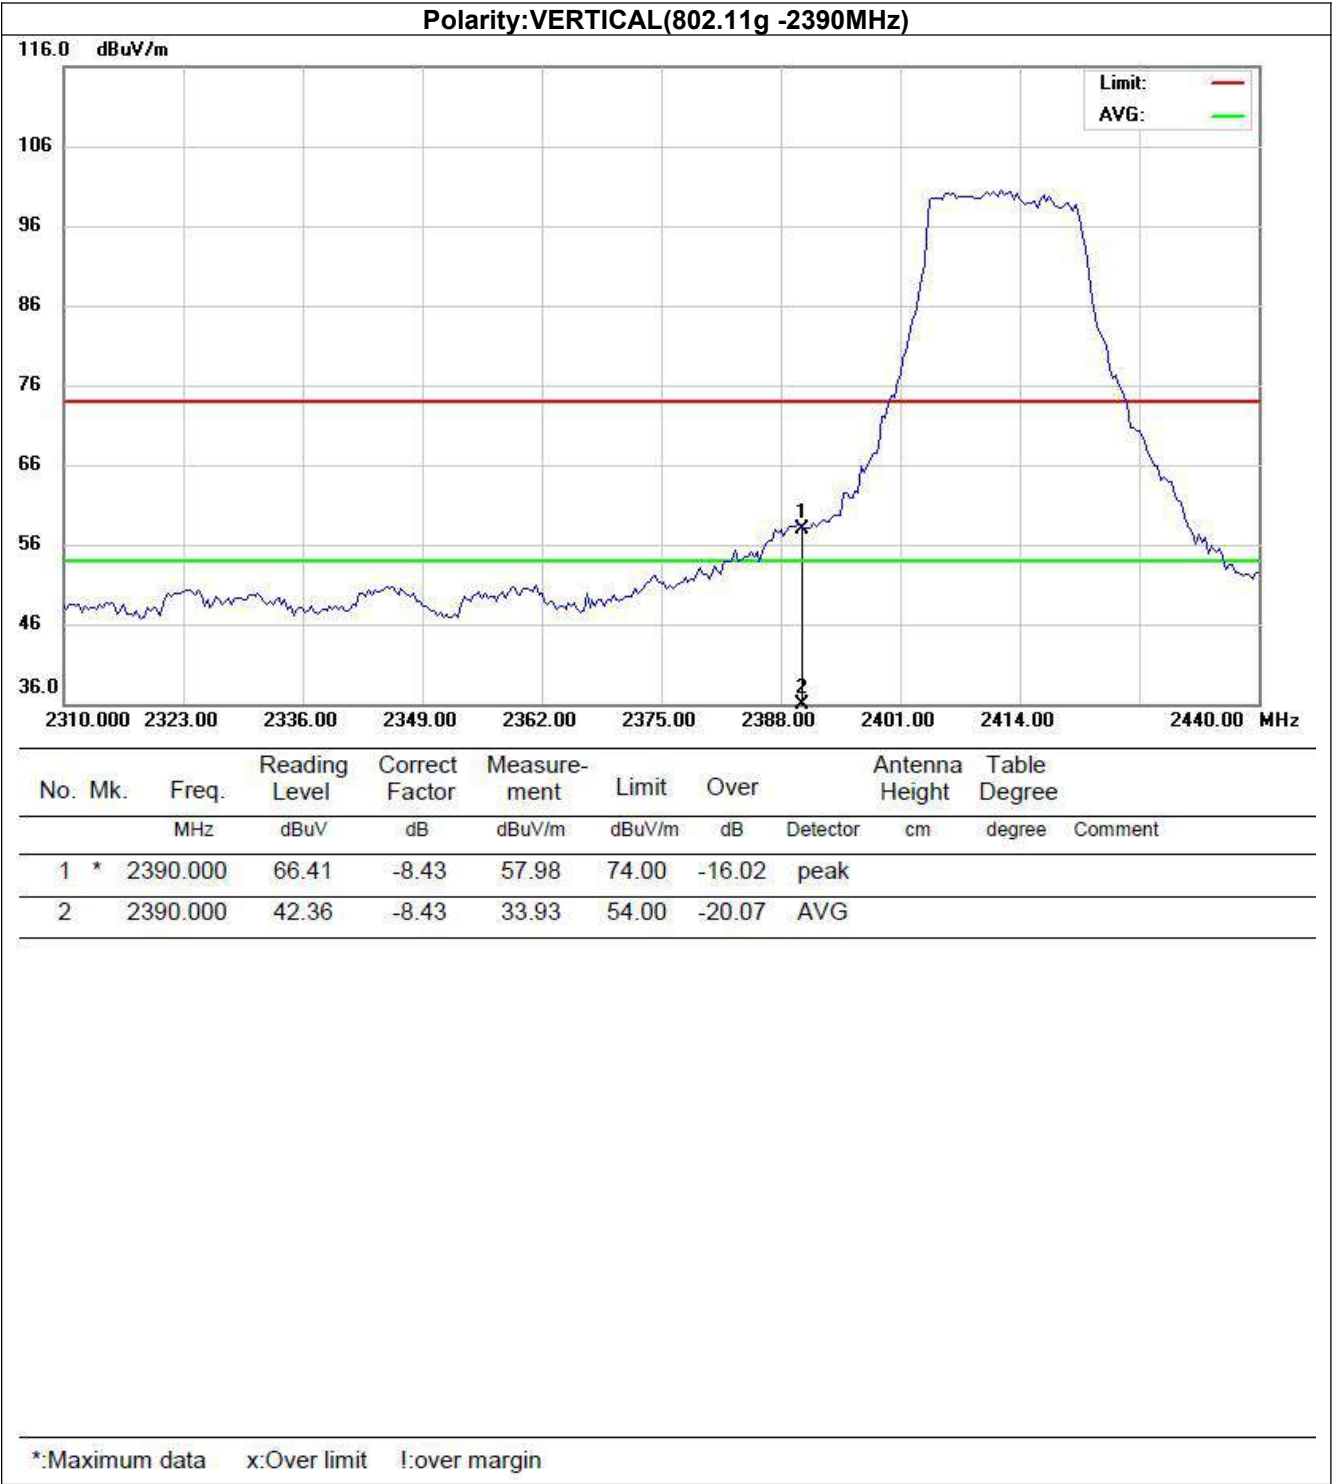


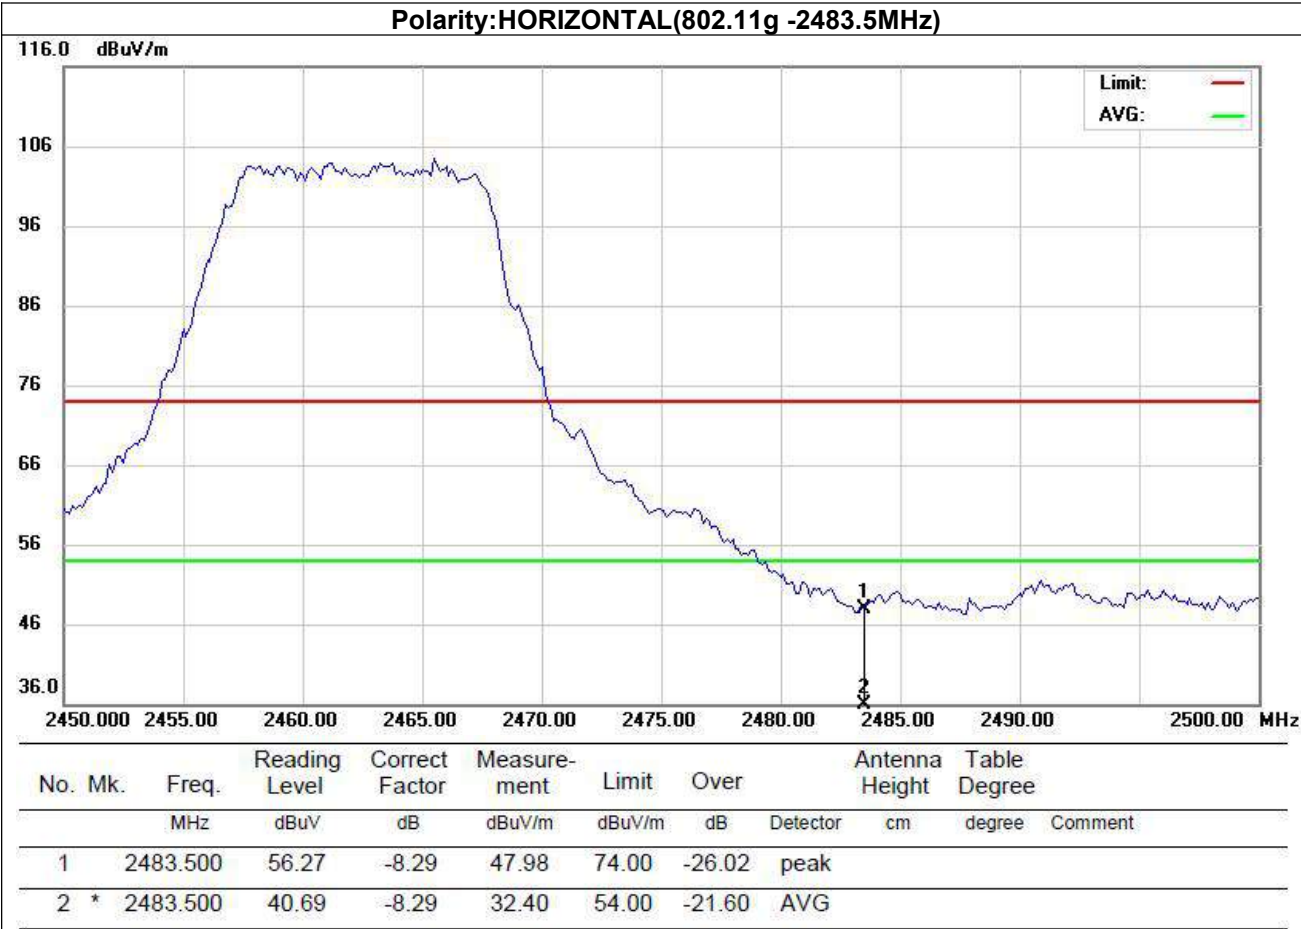


\*:Maximum data    x:Over limit    !:over margin

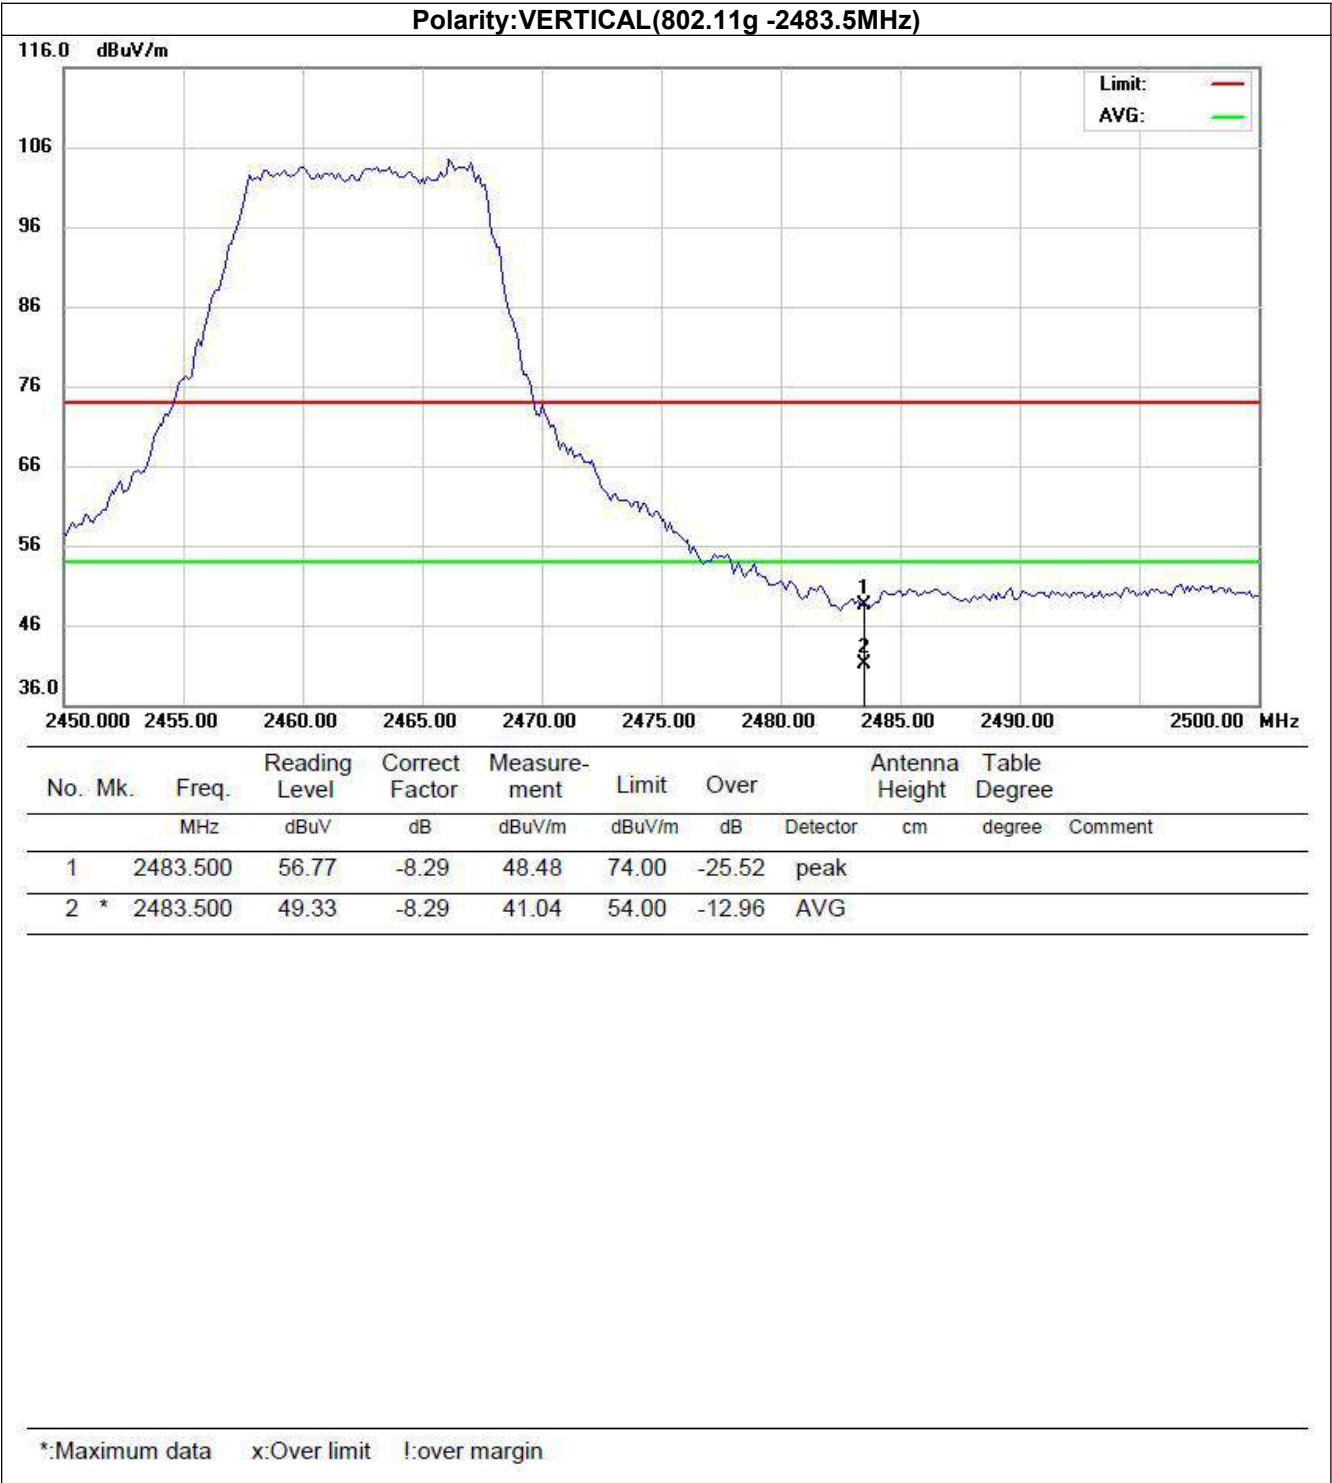


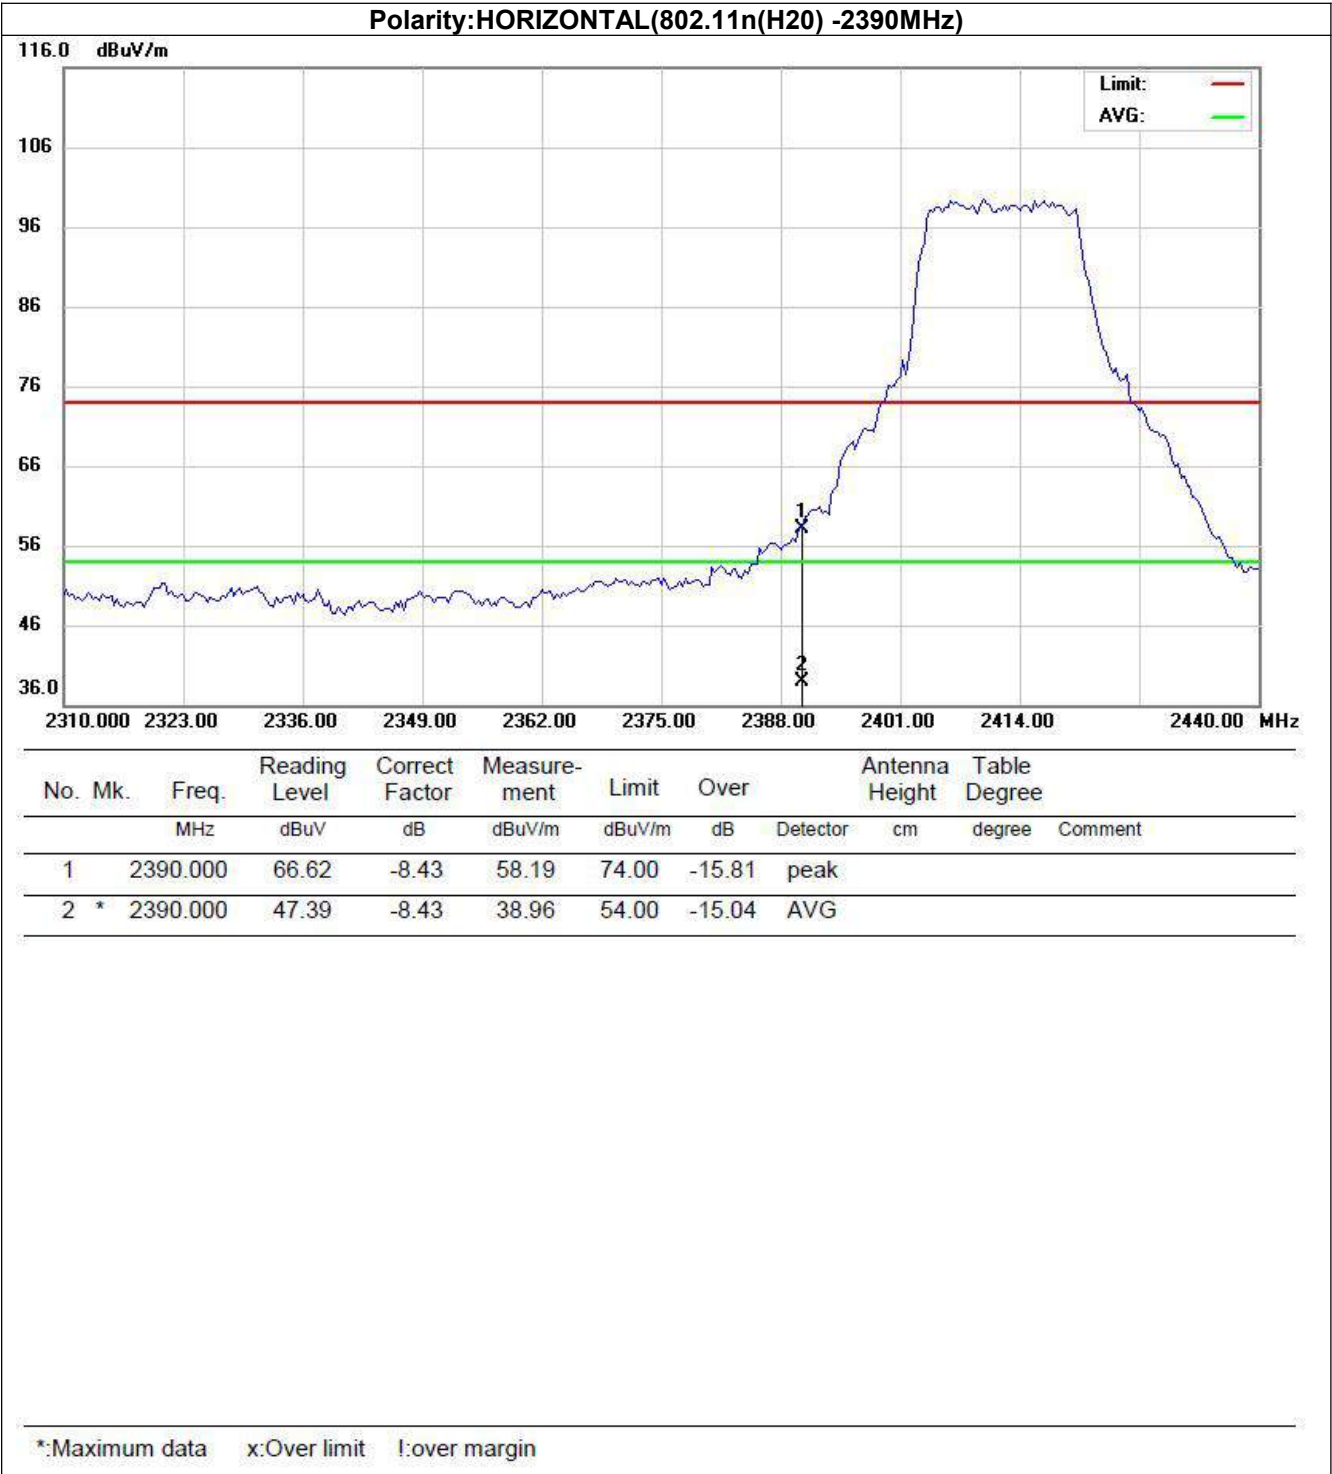

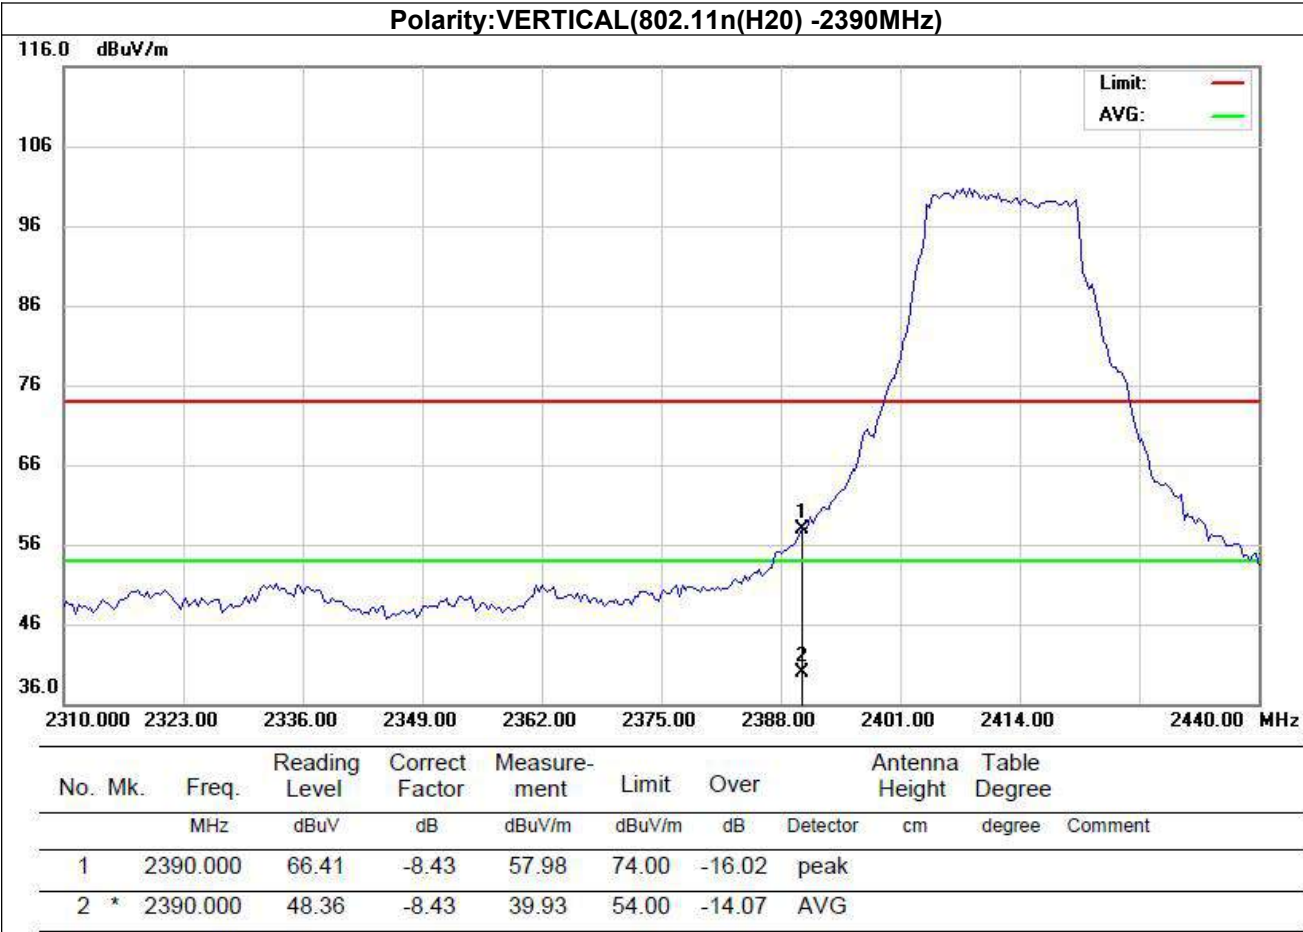


\*:Maximum data    x:Over limit    !:over margin

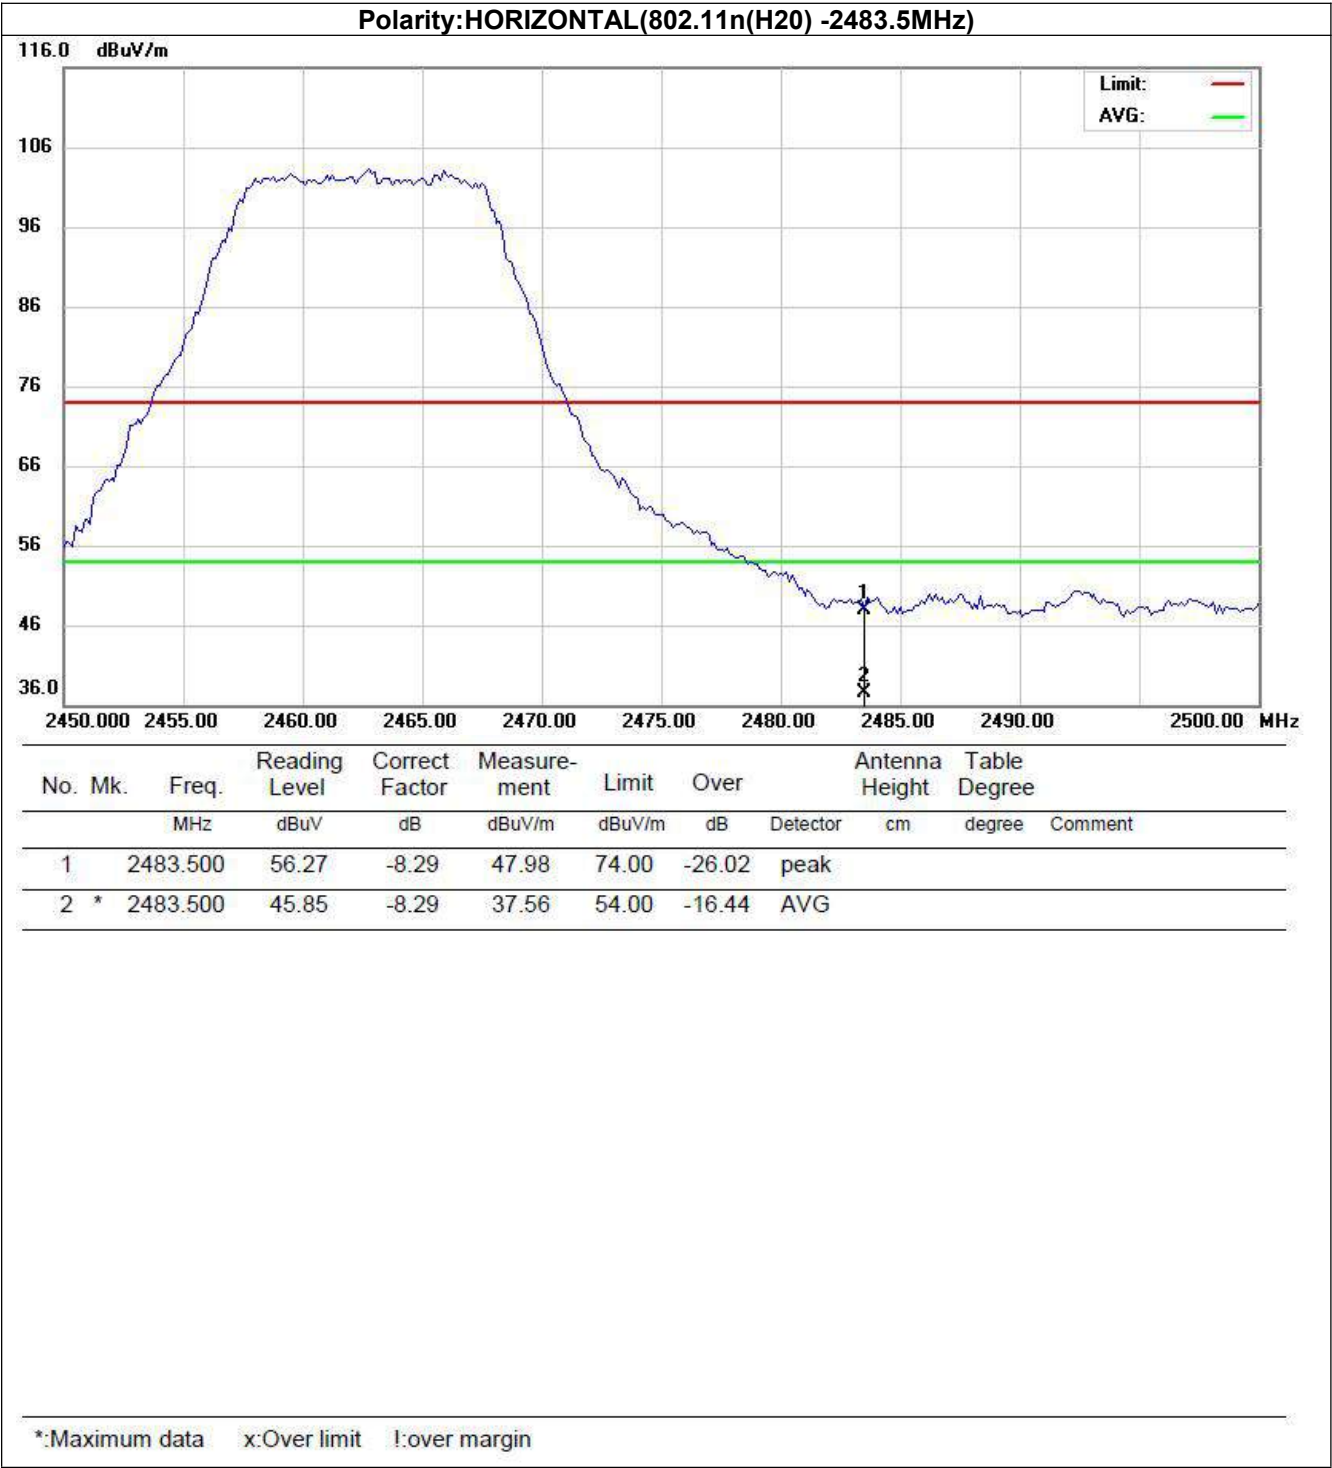


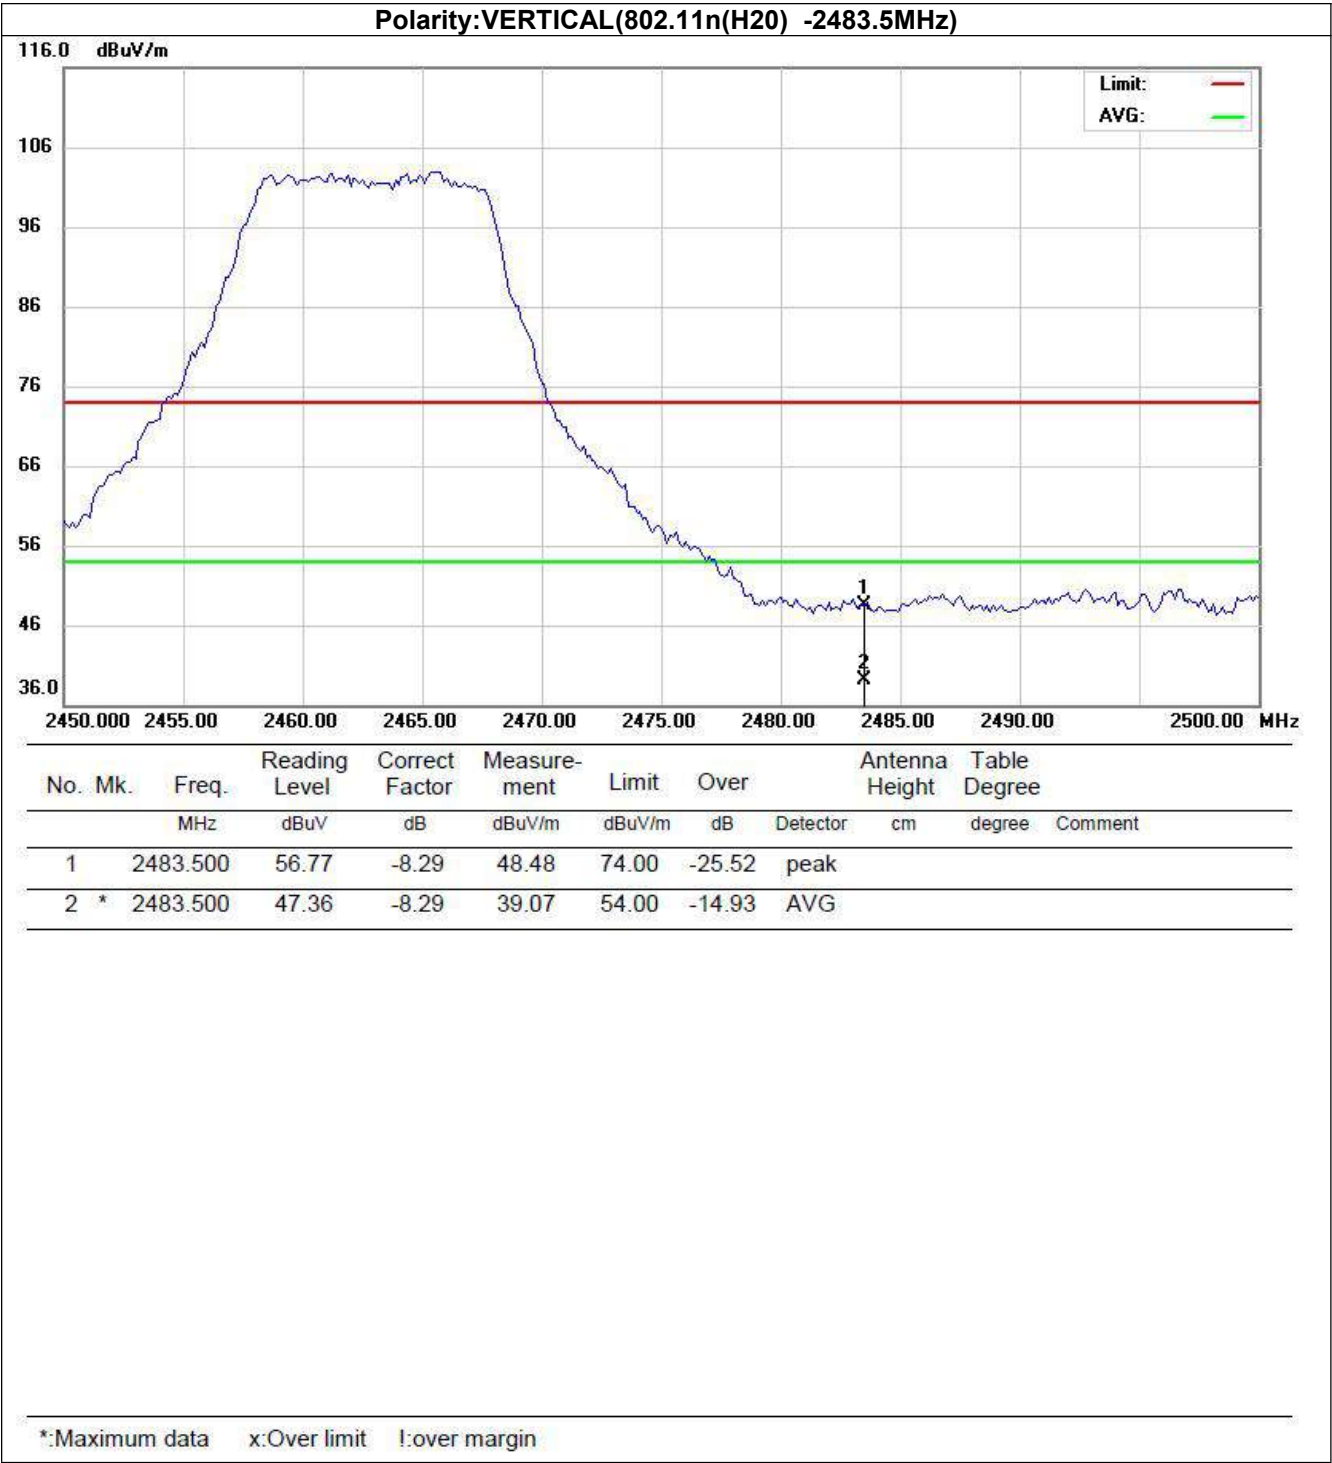




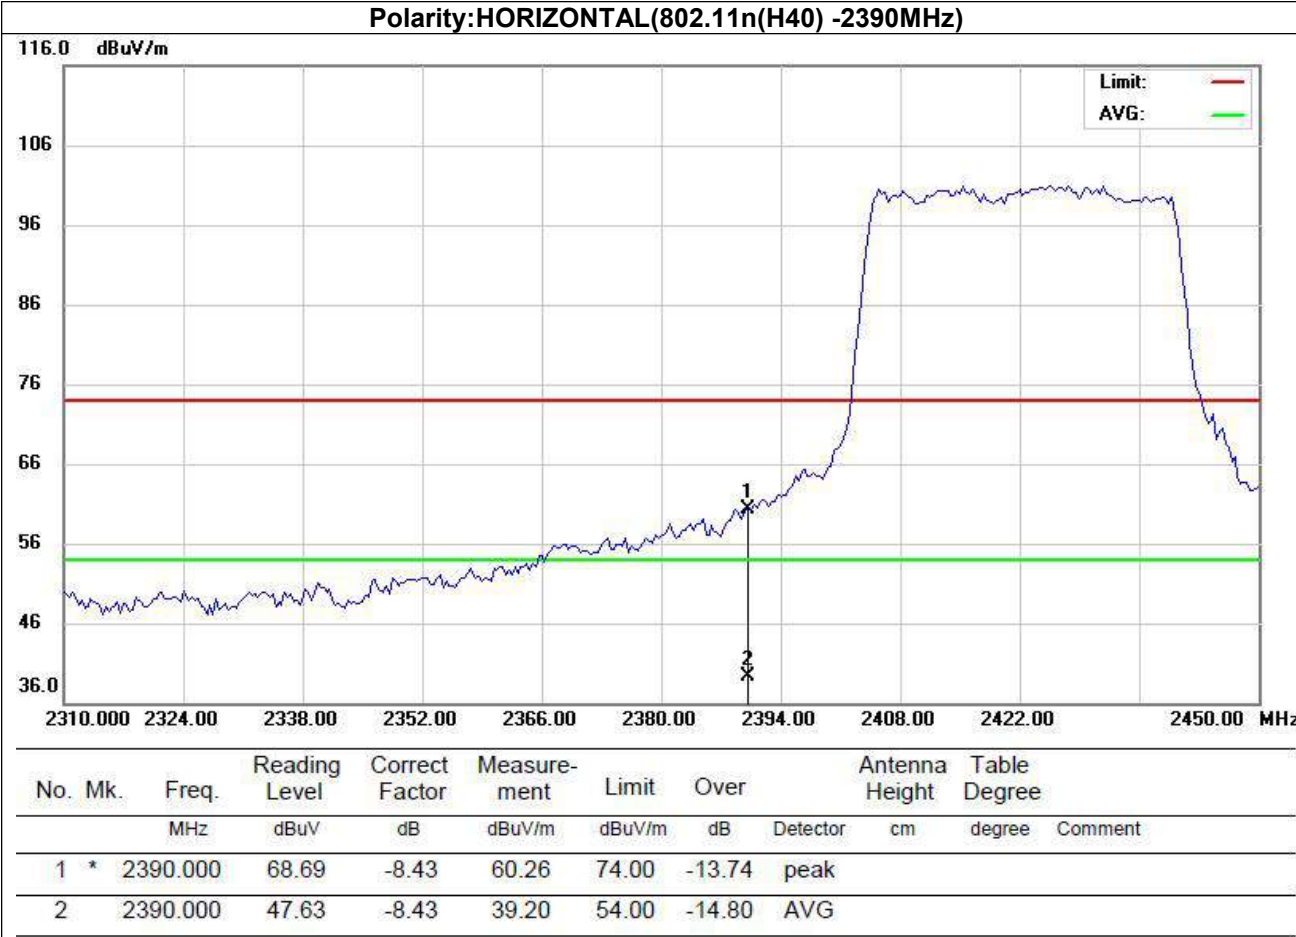



\*:Maximum data    x:Over limit    !:over margin

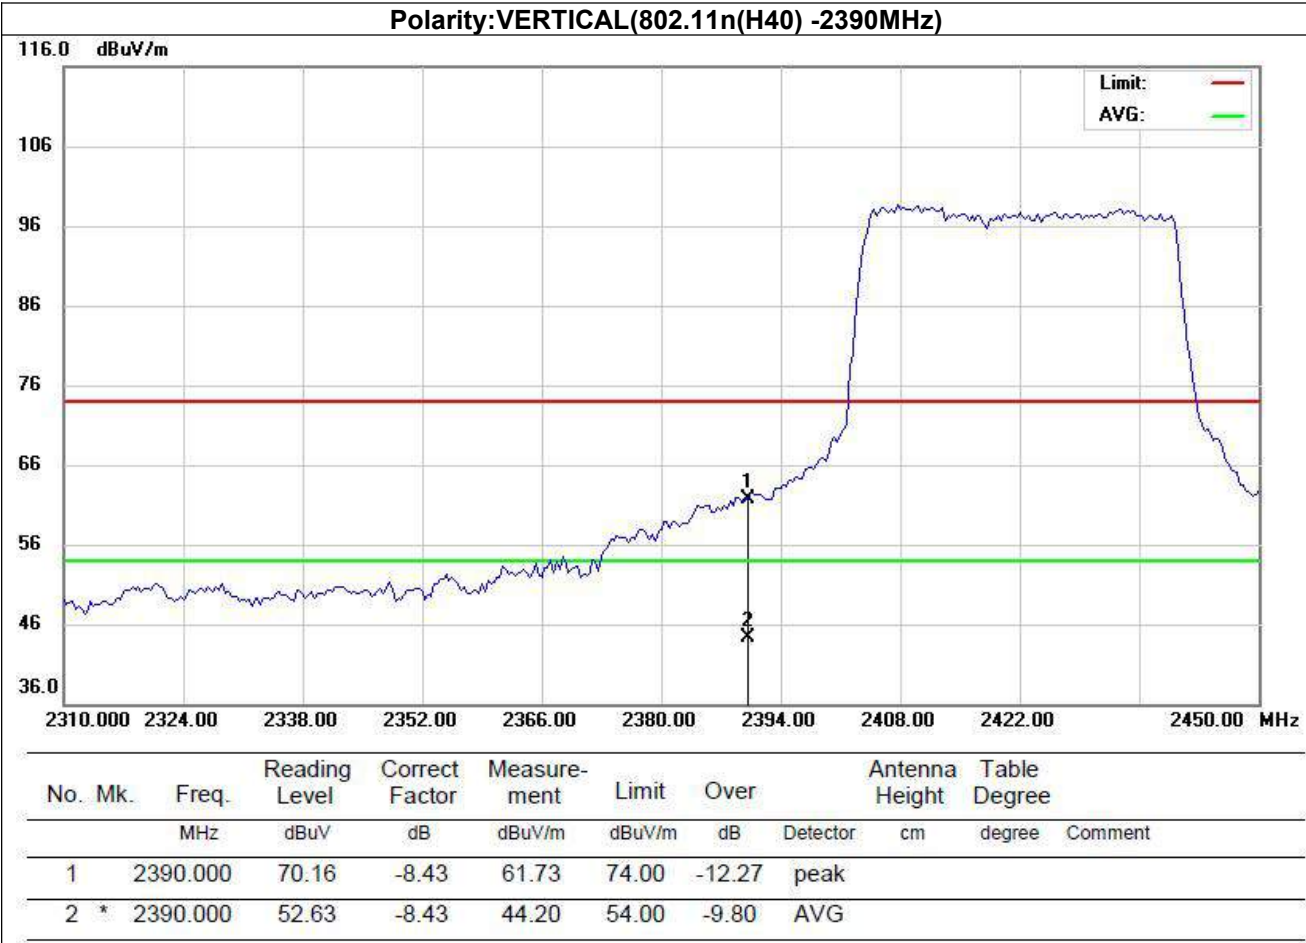


\*:Maximum data    x:Over limit    !:over margin

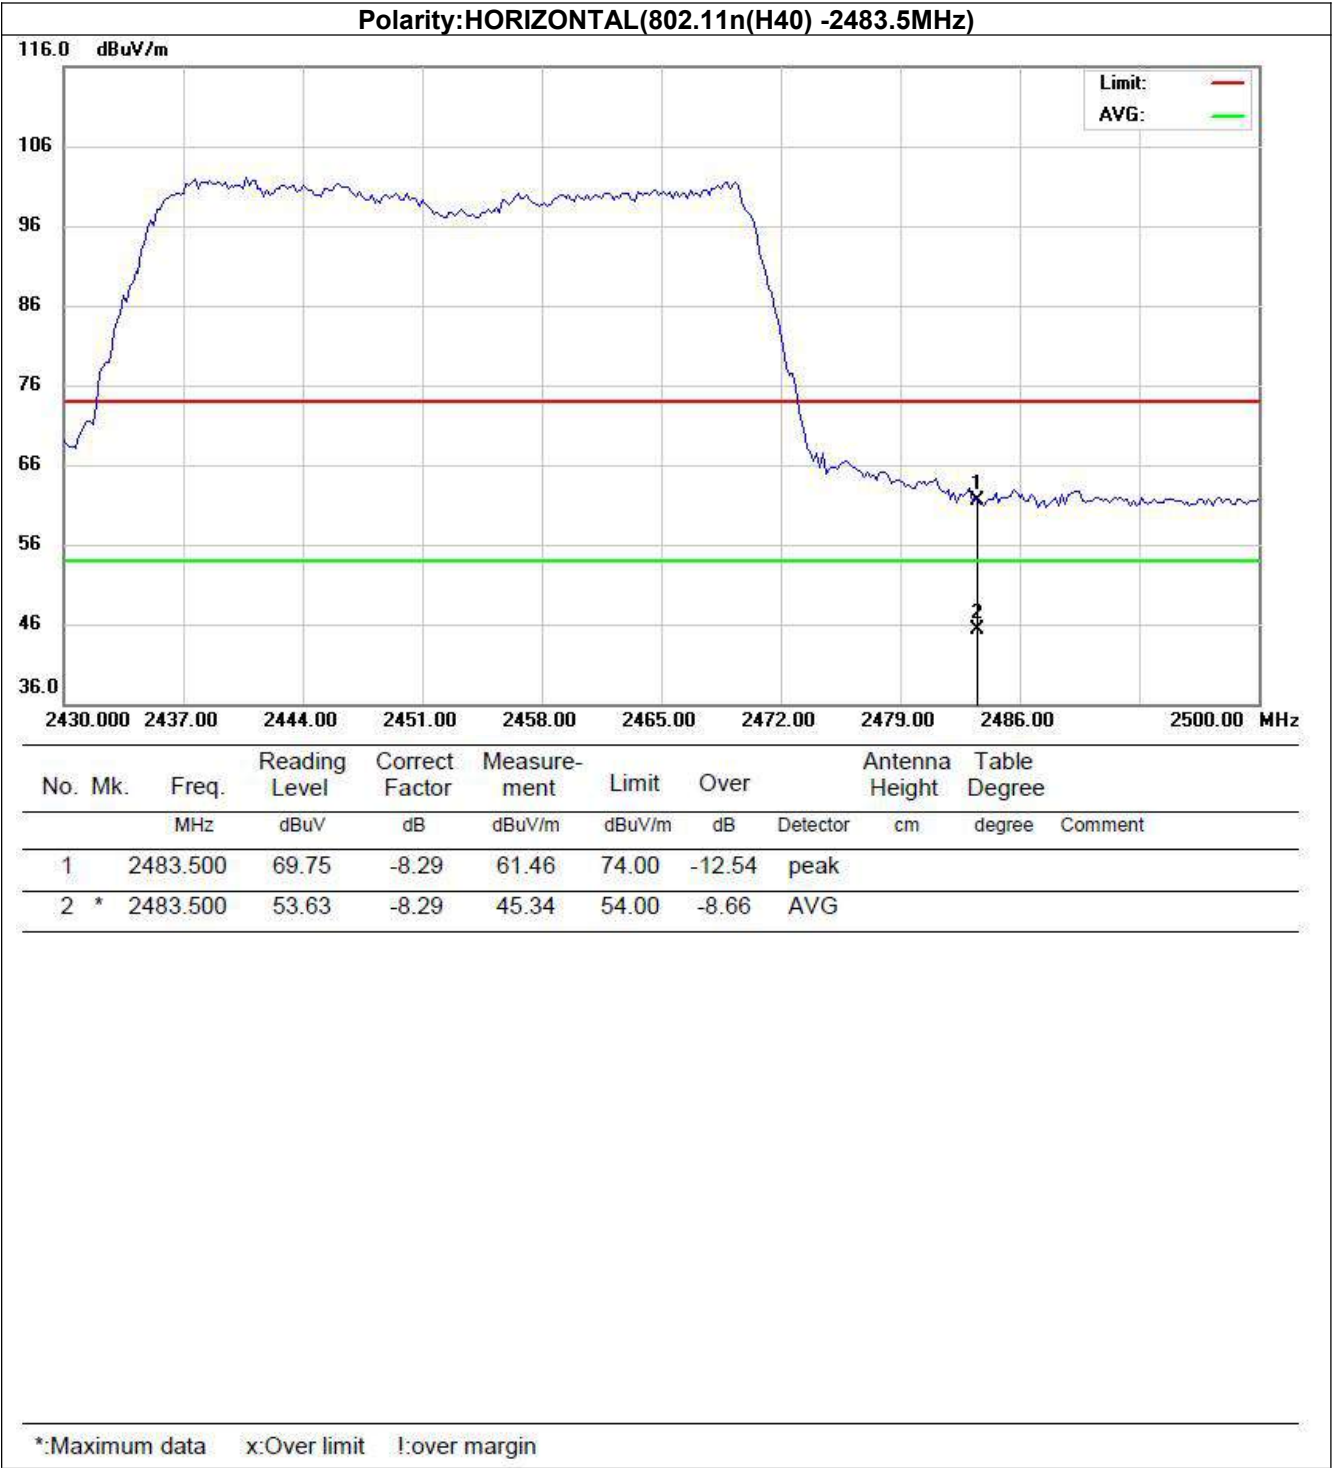


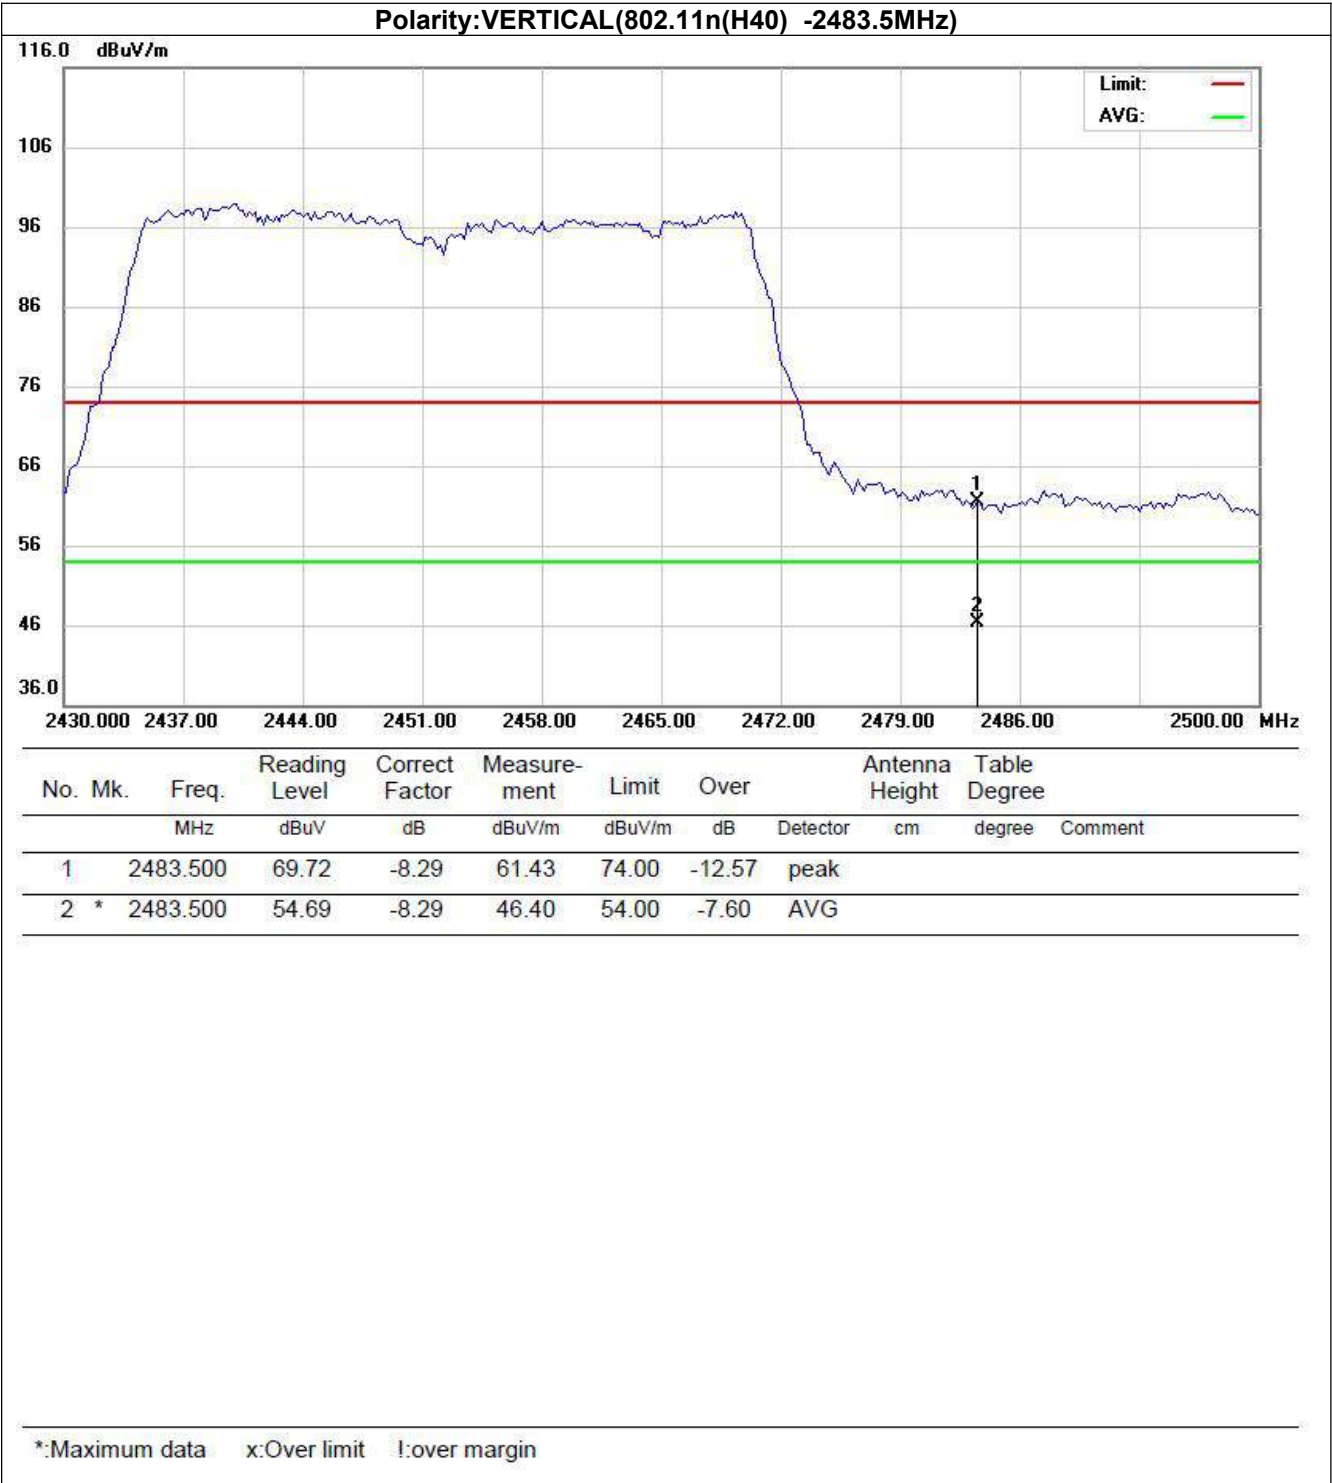


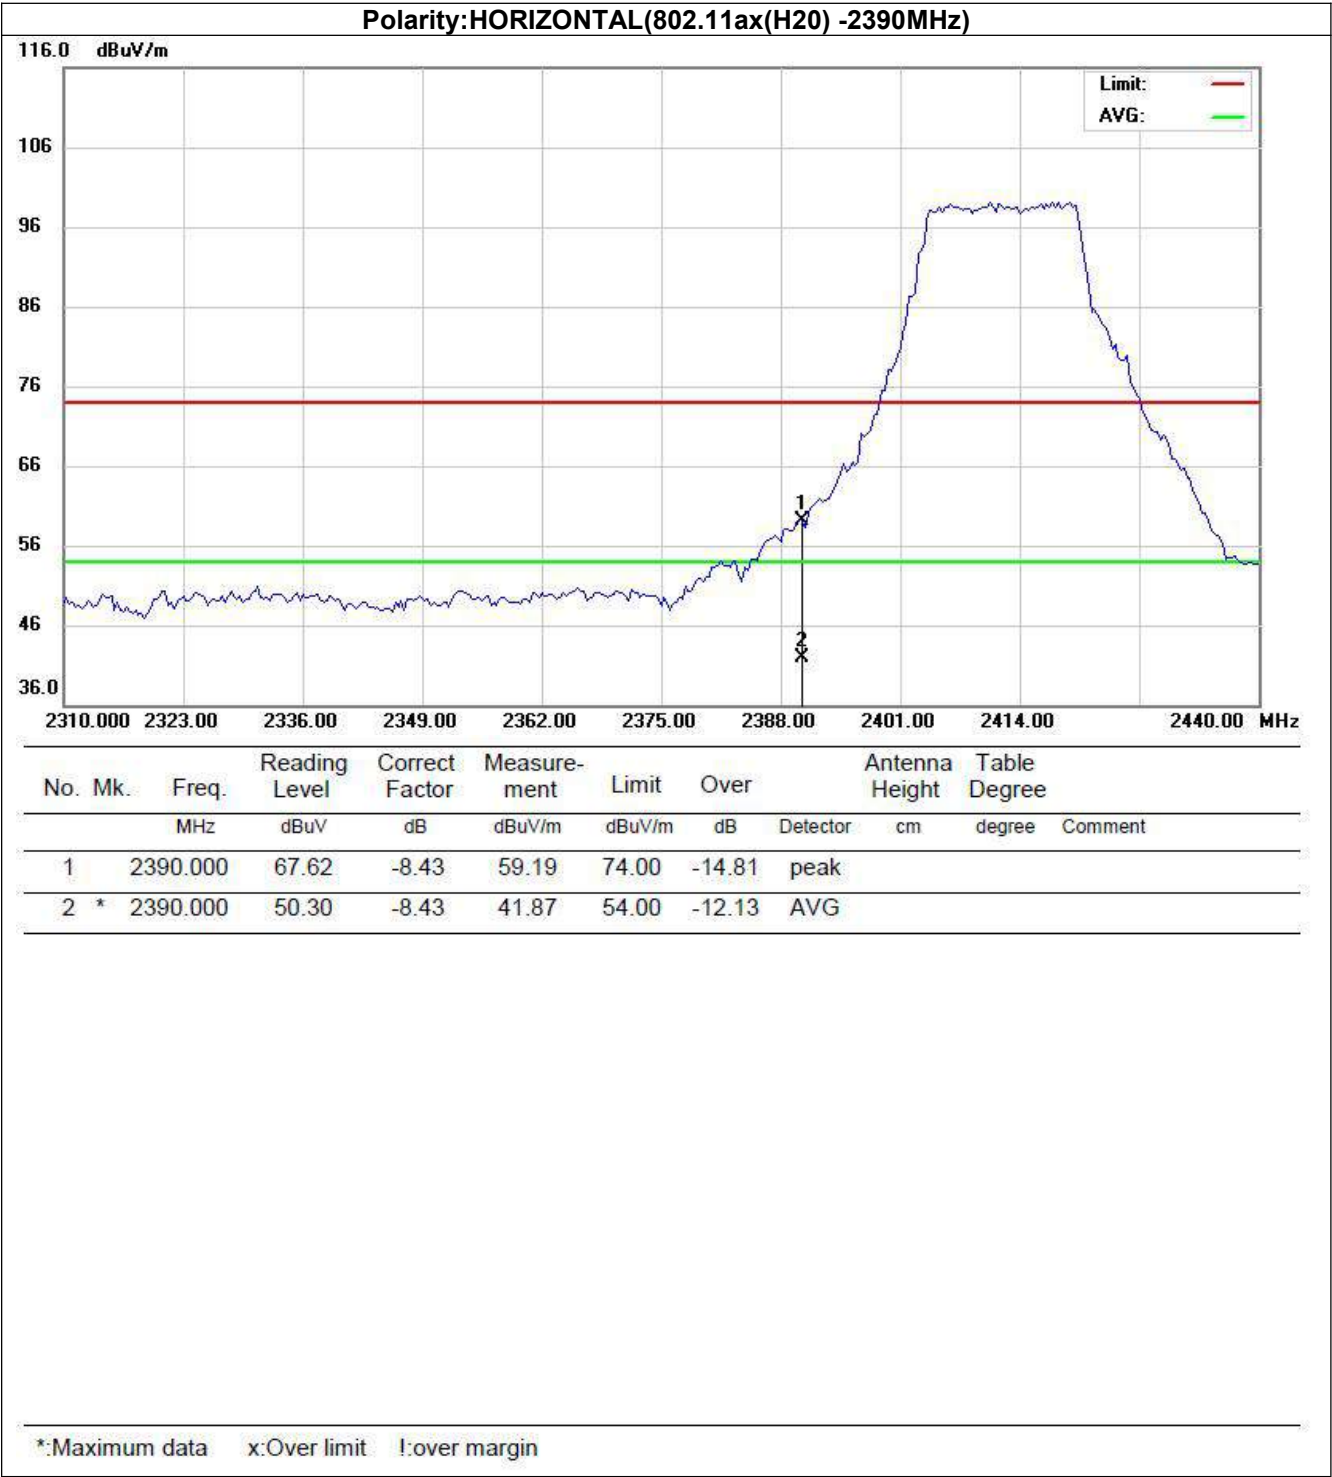

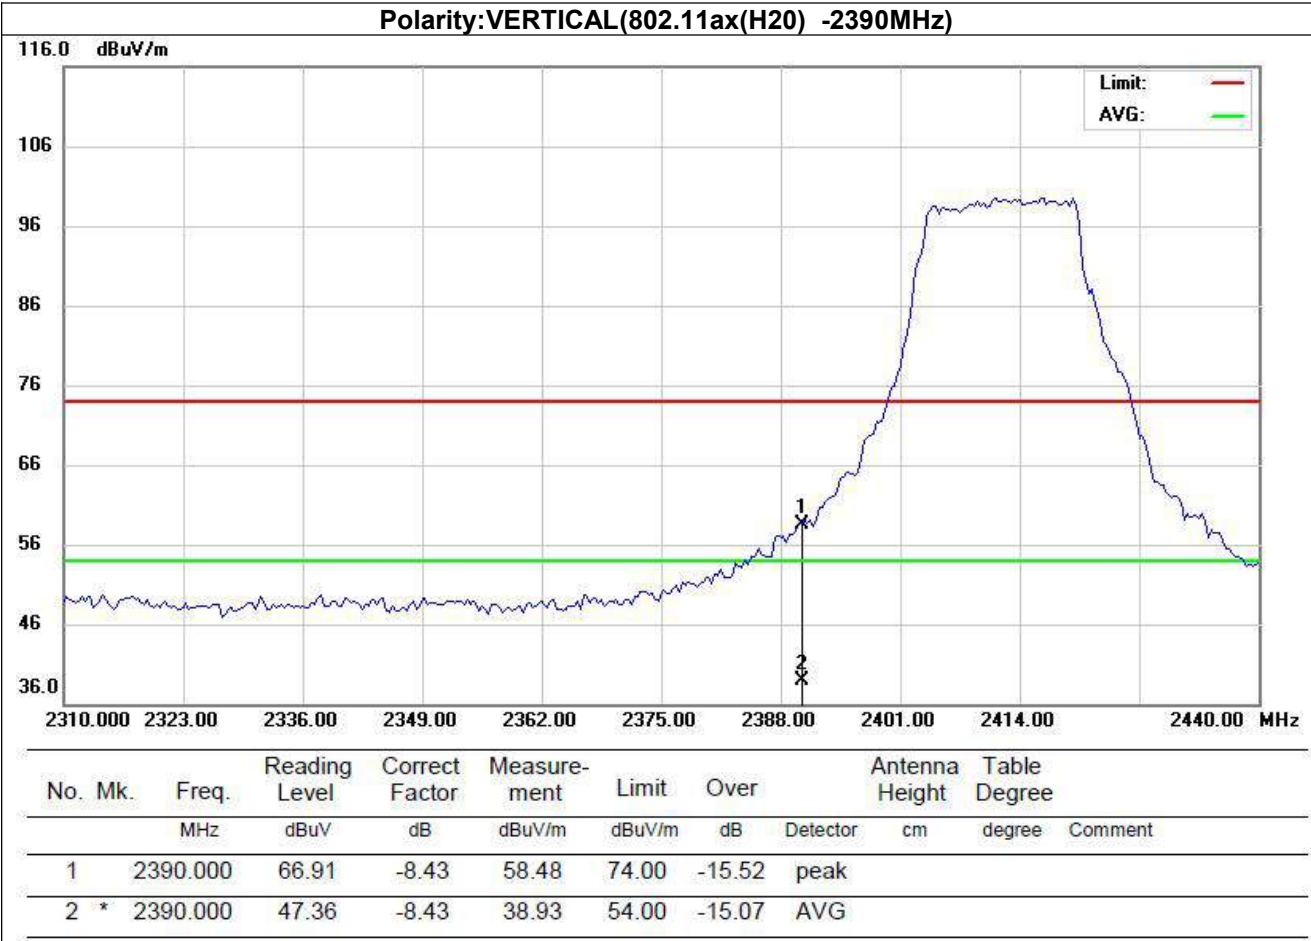



\*:Maximum data    x:Over limit    !:over margin

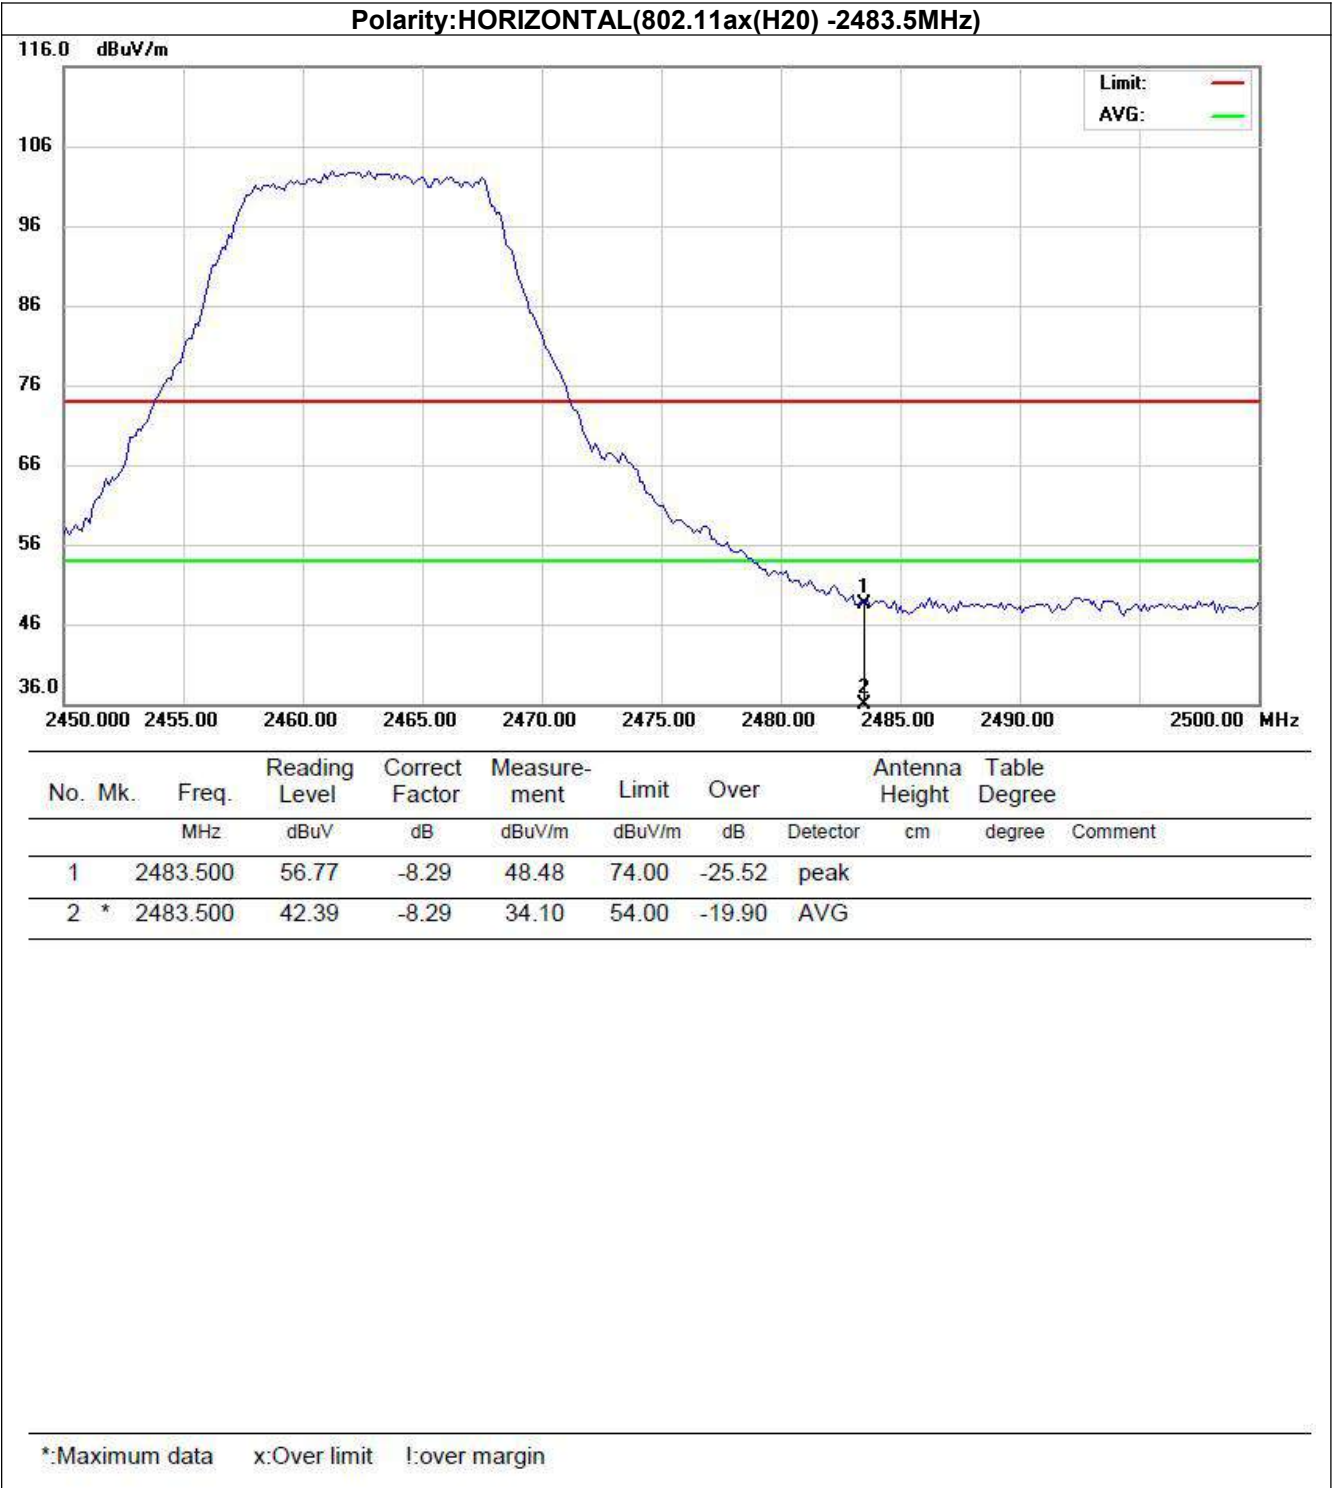

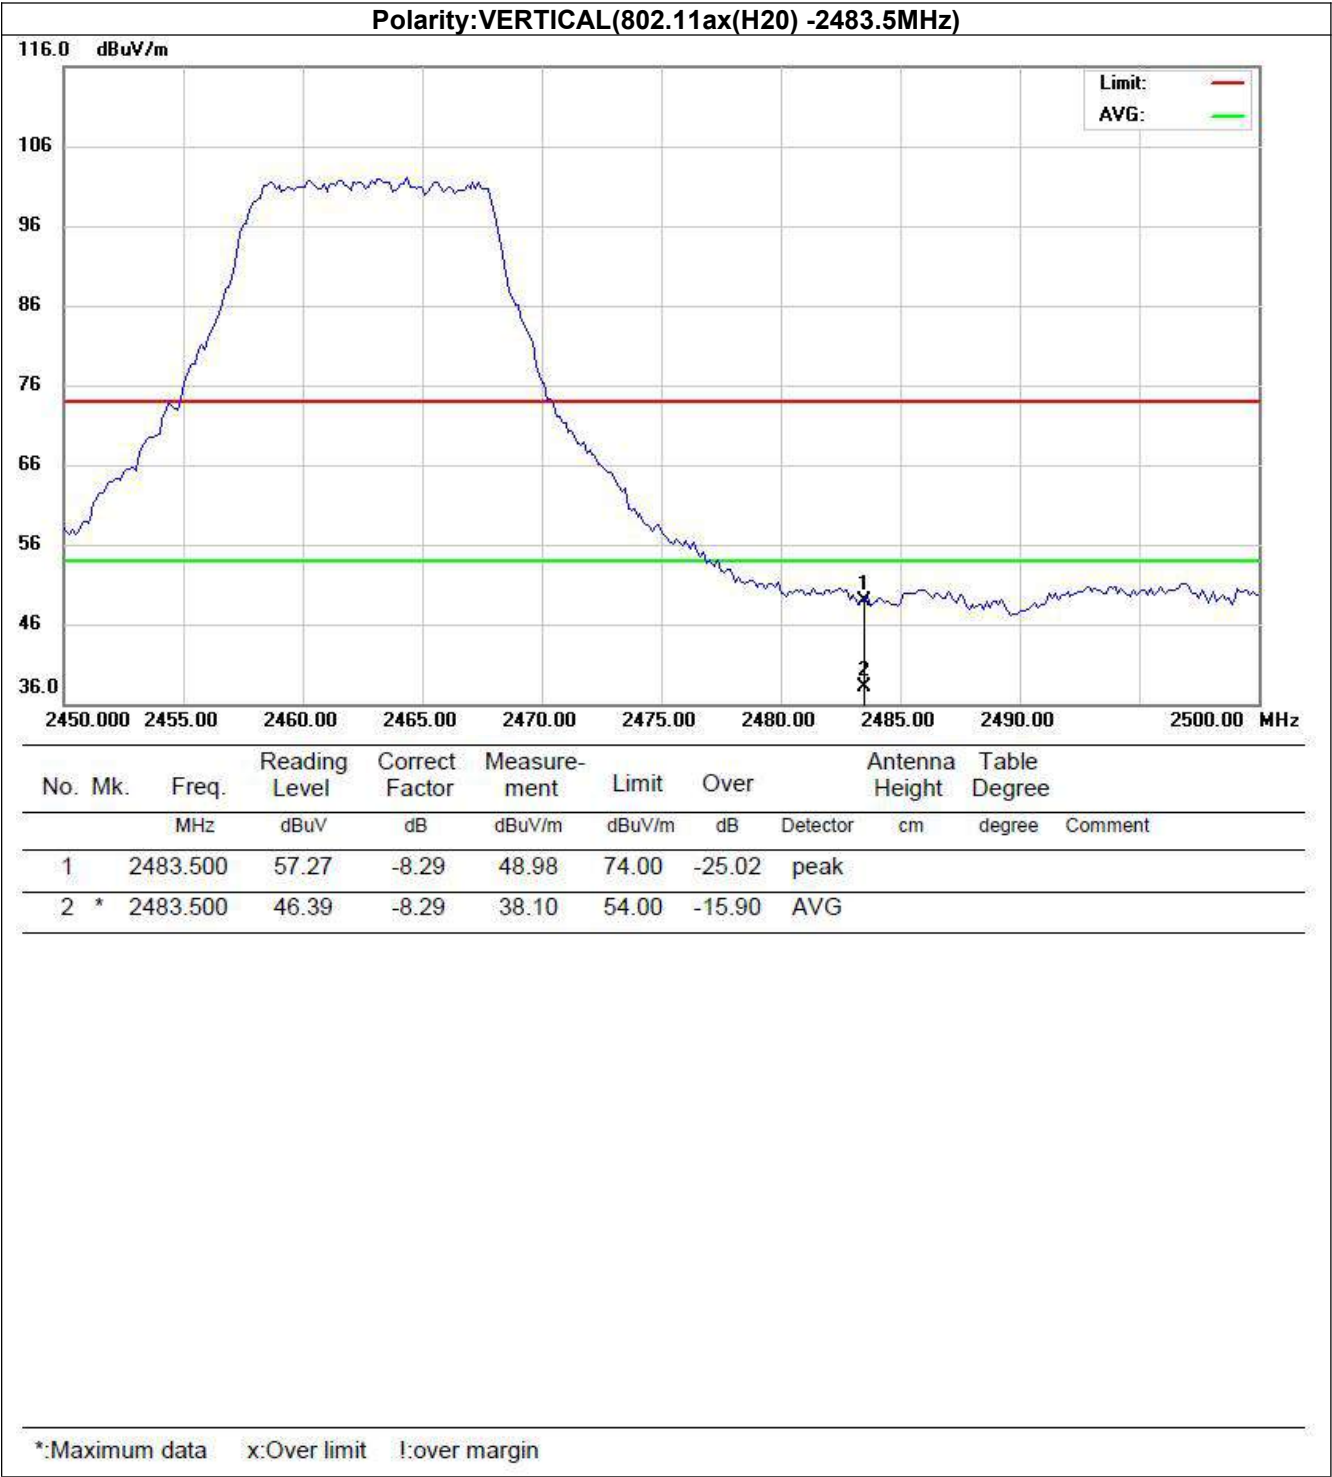




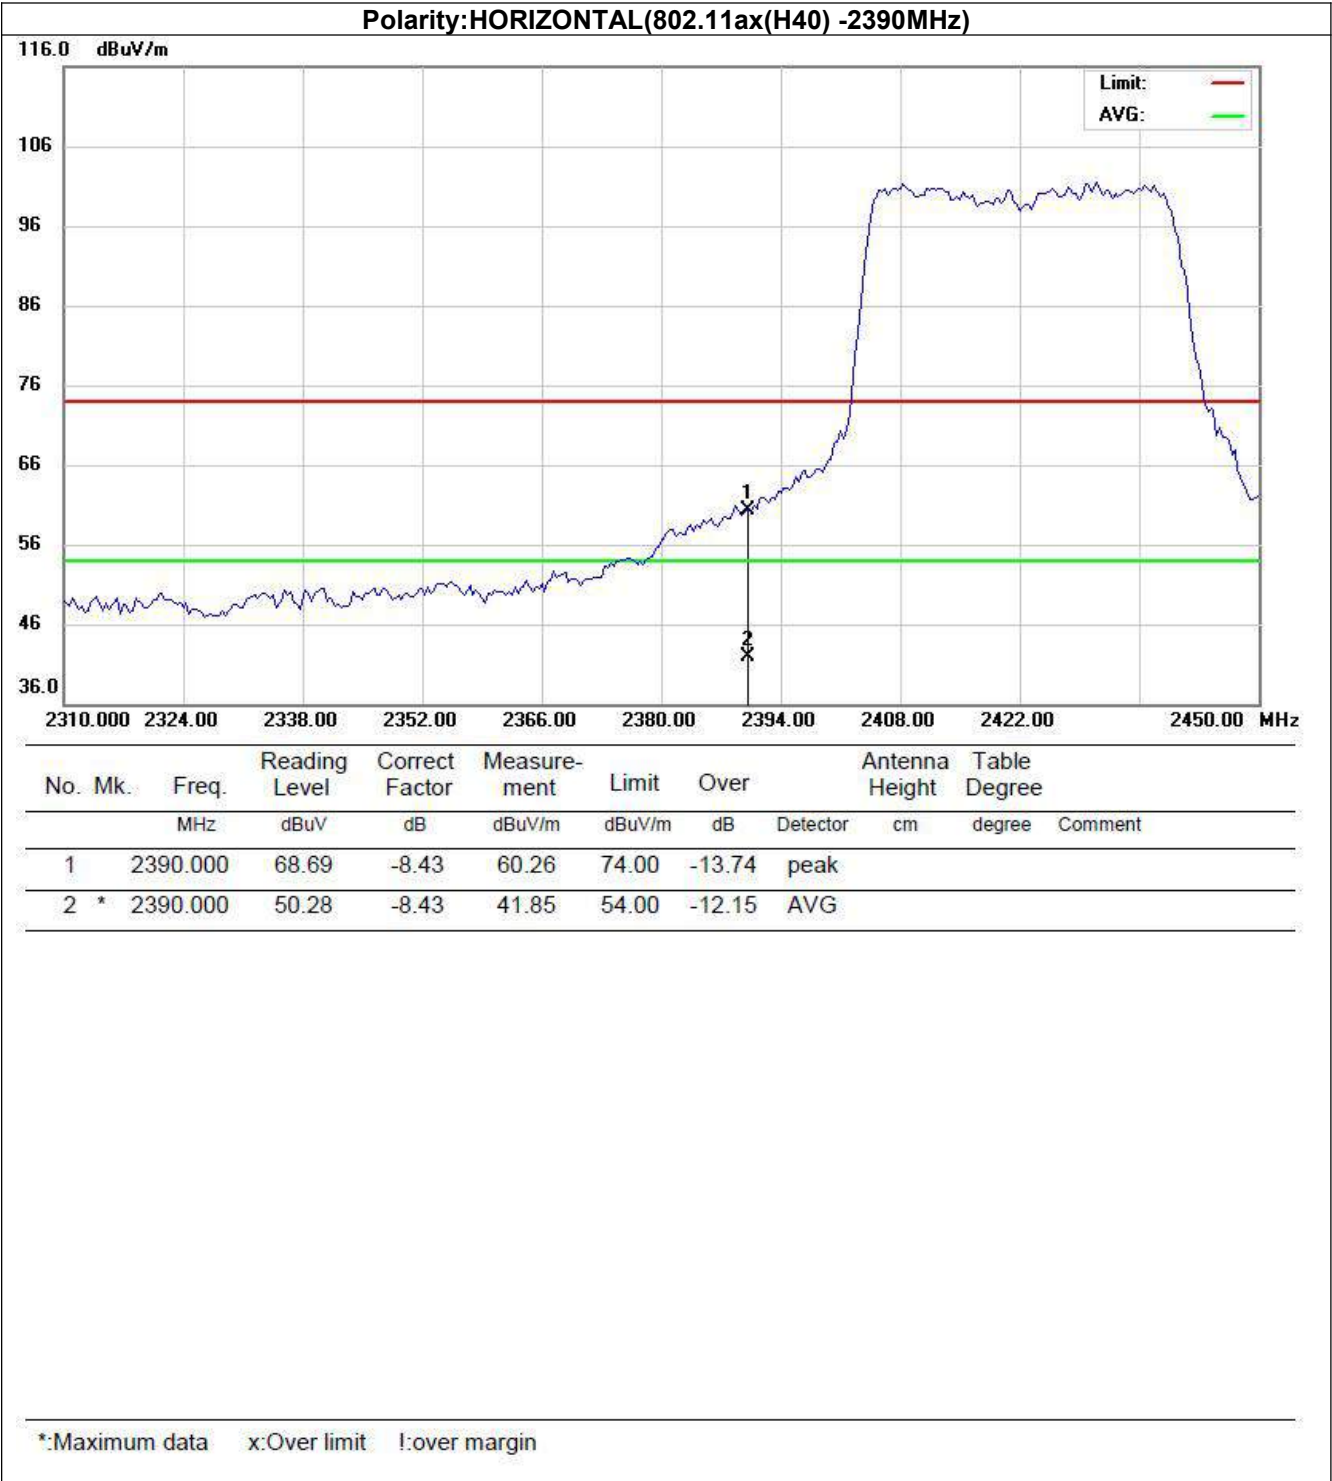

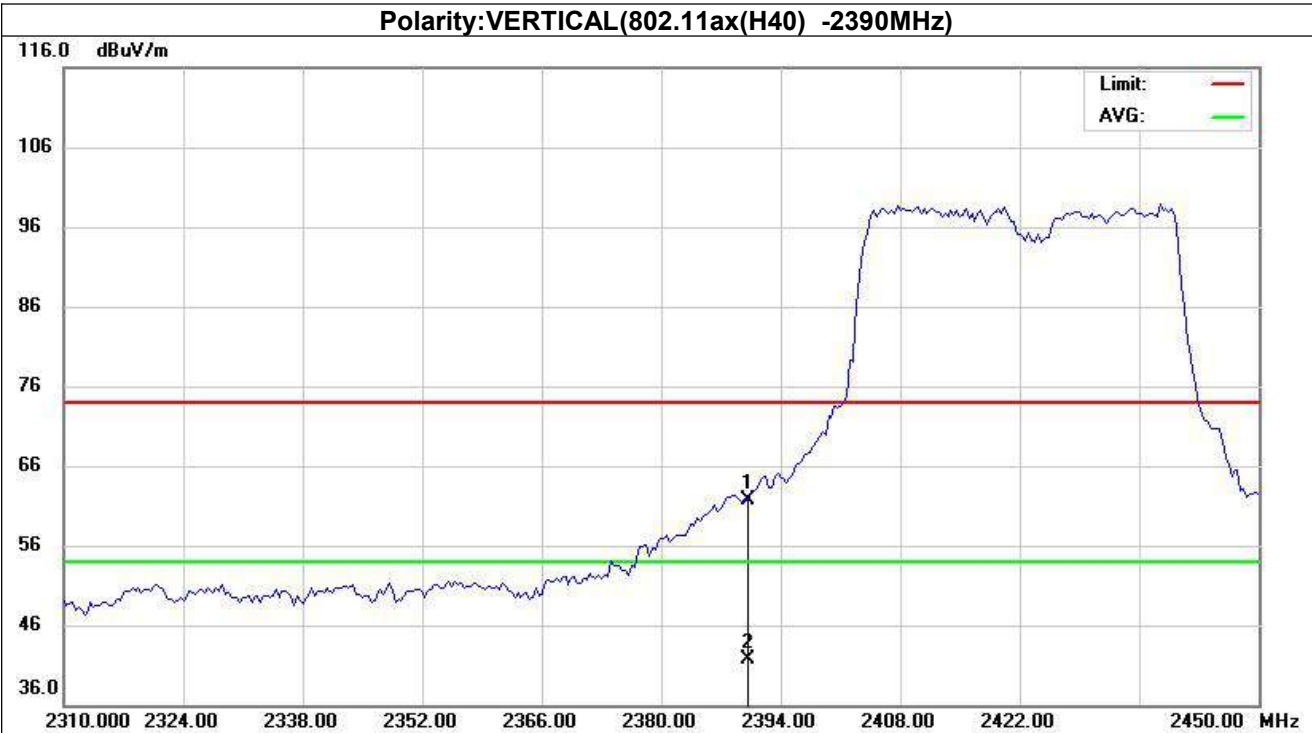


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	70.16	-8.43	61.73	74.00	-12.27	peak		
2	*	2390.000	50.21	-8.43	41.78	54.00	-12.22	AVG		

\*:Maximum data    x:Over limit    !:over margin

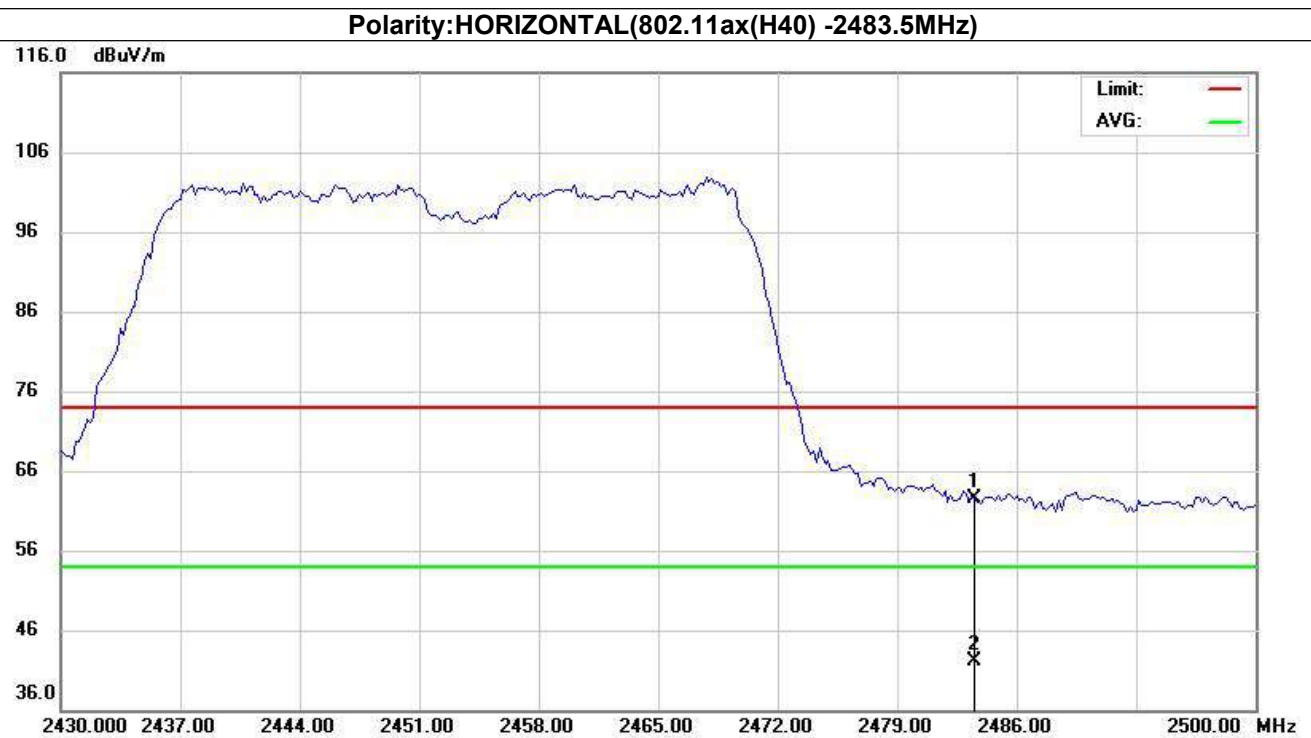

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2483.500	70.75	-8.29	62.46	74.00	-11.54	peak		
2		2483.500	50.30	-8.29	42.01	54.00	-11.99	AVG		

\*:Maximum data    x:Over limit    !:over margin

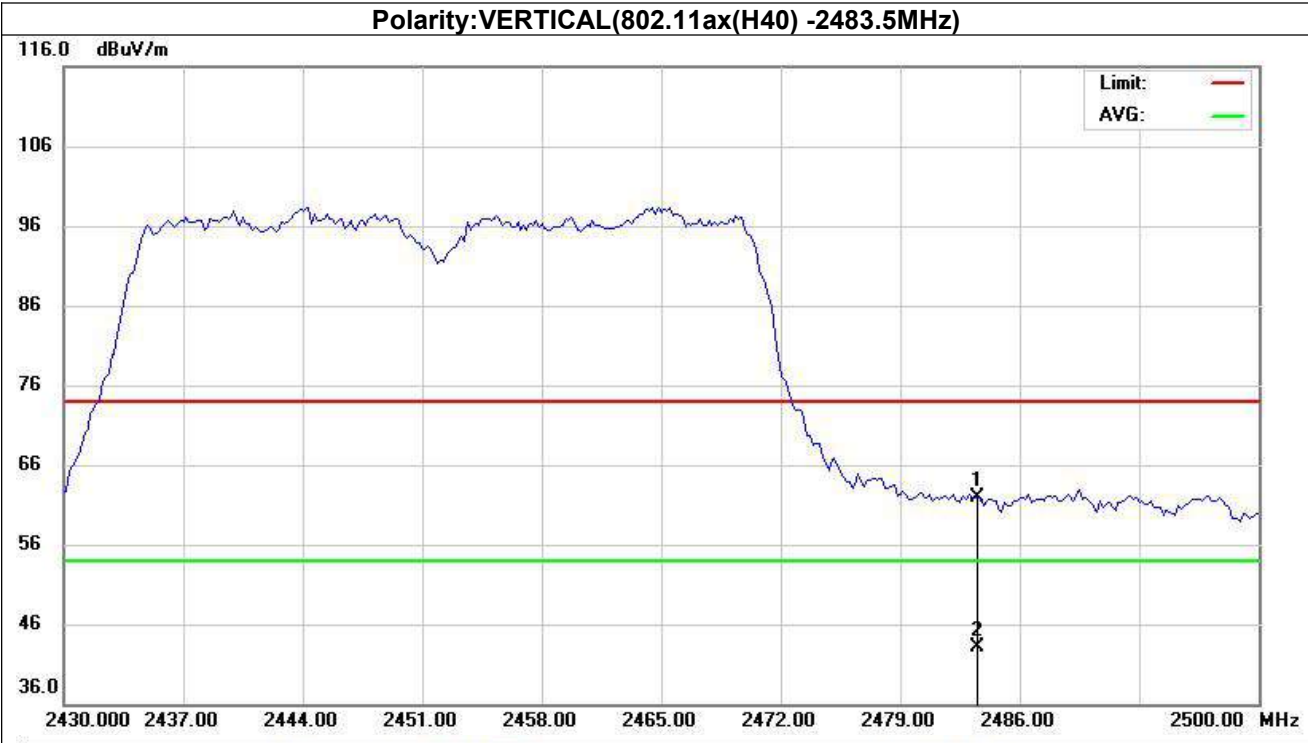

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2483.500	70.22	-8.29	61.93	74.00	-12.07	peak		
2	*	2483.500	51.36	-8.29	43.07	54.00	-10.93	AVG		

\*:Maximum data    x:Over limit    l:over margin

## 5.4 Maximum Conducted Output Power


### Limit

The Maximum Peak Output Power Measurement is 30dBm.

### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

### Test Configuration



### Test Results

See Appendix I

## 5.5 Power Spectral Density

### Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW  $\geq 3$  kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

### Test Configuration



### Test Results

See Appendix VI

## 5.6 6dB Bandwidth


### Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

### Test Configuration



### Test Results

See Appendix III

## 5.7 Out-of-band Emissions

### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

### Test Configuration



### Test Results

See Appendix IV



## **5.8 Duty Cycle Information**

See Appendix V

## 5.9 Antenna Requirement

### Standard Applicable

**For intentional device, according to FCC 47 CFR Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

**FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):**

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### Test Result:

The directional gains of antenna used for transmitting is 2.68dBi, and the antenna is and Internal Antenna and no consideration of replacement. Please see EUT photo for details.

Results: Compliance.

## 6 Test Setup Photos of the EUT



## **7 Photos of the EUT**

See related photo report.

## APPENDIX I. Conducted Peak Output Power

### Test Result

Conducted peak output power

Mode	Channel	Ant. 0 (dBm)	Ant. 1 (dBm)	Ant. 2 (dBm)	Ant. 3 (dBm)	Total (dBm)	Limit (dBm)	Result
IEEE 802.11b	1	27.93				N/A	30	PASS
	6	27.32				N/A	30	PASS
	11	27.47				N/A	30	PASS
IEEE 802.11g	1	25.33				N/A	30	PASS
	6	24.84				N/A	30	PASS
	11	24.95				N/A	30	PASS
IEEE 802.11n_20	1	28.56				N/A	30	PASS
	6	28.05				N/A	30	PASS
	11	28.04				N/A	30	PASS
IEEE 802.11n_40	3	28.41				N/A	30	PASS
	6	28.23				N/A	30	PASS
	9	28.15				N/A	30	PASS
IEEE 802.11ax_20	1	24.14				N/A	30	PASS
	6	25.34				N/A	30	PASS
	11	22.58				N/A	30	PASS
IEEE 802.11ax_40	3	21.35				N/A	30	PASS
	6	24.64				N/A	30	PASS
	9	23.31				N/A	30	PASS

### ISED EIRP

Mode	Channel	Ant. 0 (dBm)	Ant. 1 (dBm)	Ant. 2 (dBm)	EIRP	Total (dBm)	Limit (dBm)	Result
IEEE 802.11b	1	27.93			30.61	N/A	36.02	PASS
	6	27.32			30	N/A	36.02	PASS
	11	27.47			30.15	N/A	36.02	PASS
IEEE 802.11g	1	25.33			28.01	N/A	36.02	PASS
	6	24.84			27.52	N/A	36.02	PASS
	11	24.95			27.63	N/A	36.02	PASS
IEEE 802.11n_20	1	28.56			31.24	N/A	36.02	PASS
	6	28.05			30.73	N/A	36.02	PASS
	11	28.04			30.72	N/A	36.02	PASS
IEEE 802.11n_40	3	28.41			31.09	N/A	36.02	PASS
	6	28.23			30.91	N/A	36.02	PASS
	9	28.15			30.83	N/A	36.02	PASS
IEEE	1	24.14			26.82	N/A	36.02	PASS


802.11 ax_20	6	25.34			28.02	N/A	36.02	PASS
	11	22.58			25.26	N/A	36.02	PASS
IEEE 802.11 ax_40	3	21.35			24.03	N/A	36.02	PASS
	6	24.64			27.32	N/A	36.02	PASS
	9	23.31			25.99	N/A	36.02	PASS

## APPENDIX II. 99% Bandwidth

### Test Result


Mode	Channel	RU & Index	Ant.	99% BW (MHz)
IEEE 802.11b	1	N/A	0	11.290
	6			11.267
	11			11.305
IEEE 802.11g	1			16.752
	6			16.759
	11			16.811
IEEE 802.11n_20	1			18.285
	6			18.332
	11			18.271
IEEE 802.11n_40	3			36.905
	6			37.024
	9			37.050
IEEE 802.11ax_20	1	SU		19.243
	6			19.296
	11			19.285
IEEE 802.11ax_40	3			38.153
	6			38.301
	9			38.202

### Test Graphs

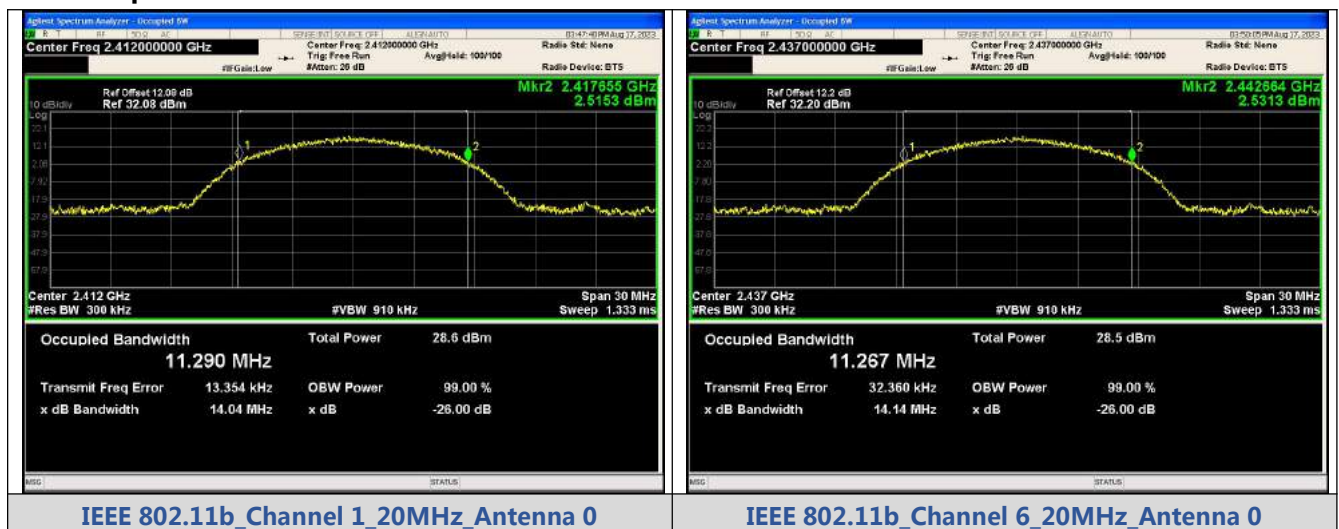




IEEE 802.11b\_Channel 11\_20MHz\_Antenna 0

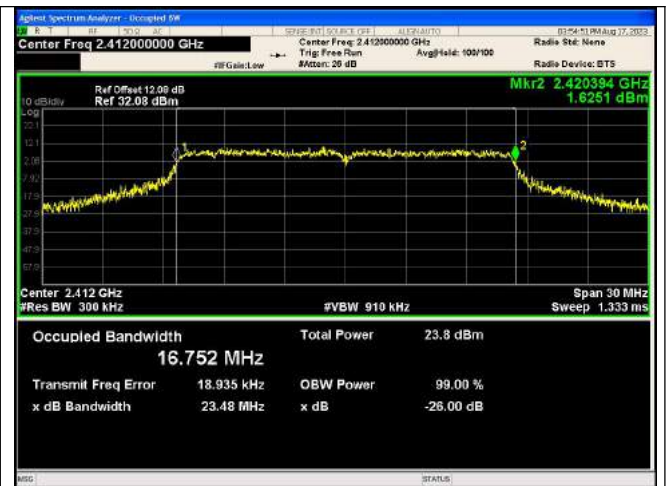


IEEE 802.11g\_Channel 1\_20MHz\_Antenna 0

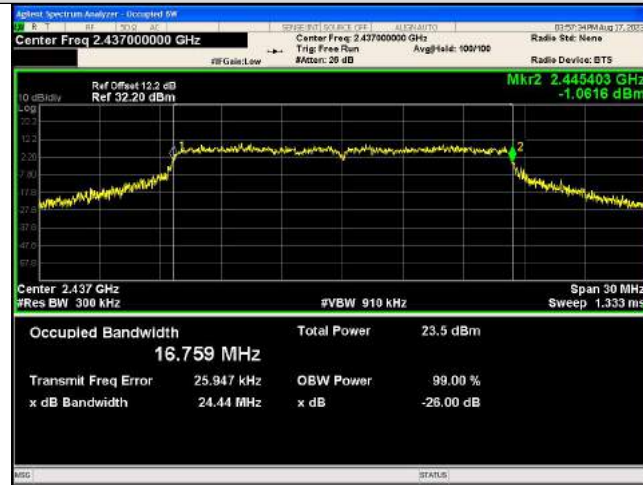

IEEE 802.11g\_Channel 6\_20MHz\_Antenna 0



IEEE 802.11g\_Channel 11\_20MHz\_Antenna 0

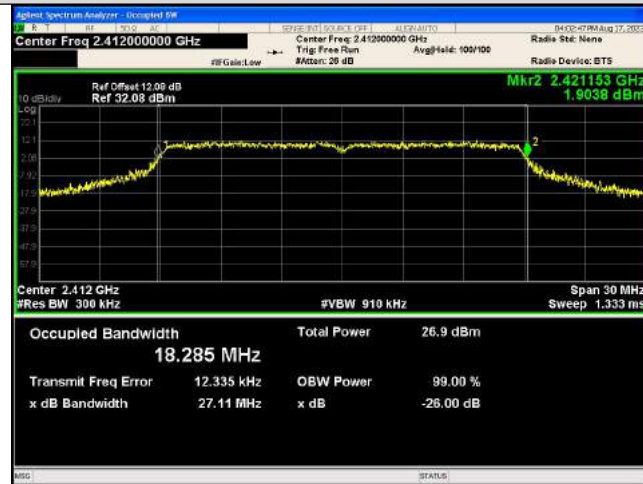

IEEE 802.11n\_Channel 1\_20MHz\_Antenna 0



IEEE 802.11n\_Channel 6\_20MHz\_Antenna 0






IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0




IEEE 802.11n\_Channel 3\_40MHz\_Antenna 0

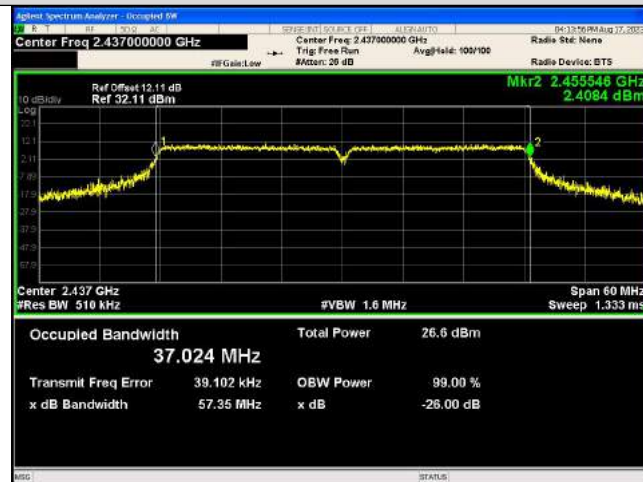


IEEE 802.11n\_Channel 6\_40MHz\_Antenna 0




IEEE 802.11n\_Channel 9\_40MHz\_Antenna 0

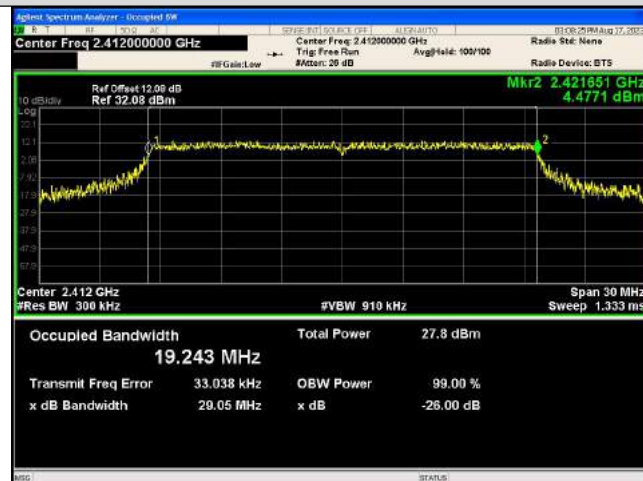
IEEE 802.11ax\_Channel 1\_20MHz\_Antenna  
0\_RU&Index SUIEEE 802.11ax\_Channel 6\_20MHz\_Antenna  
0\_RU&Index SU

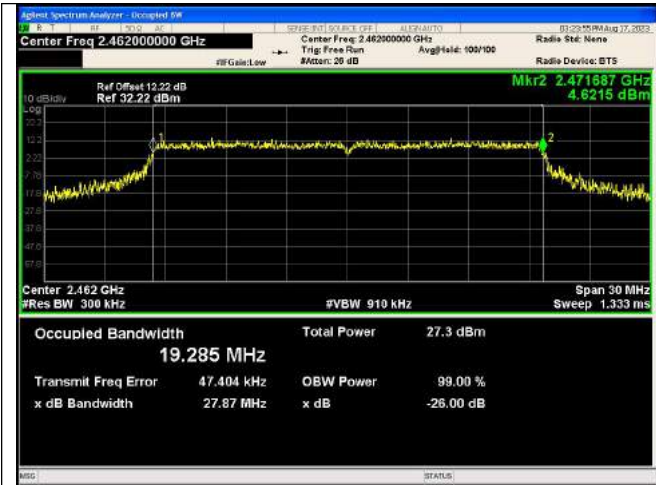


IEEE 802.11ax\_Channel 11\_20MHz\_Antenna  
0\_RU&Index SU

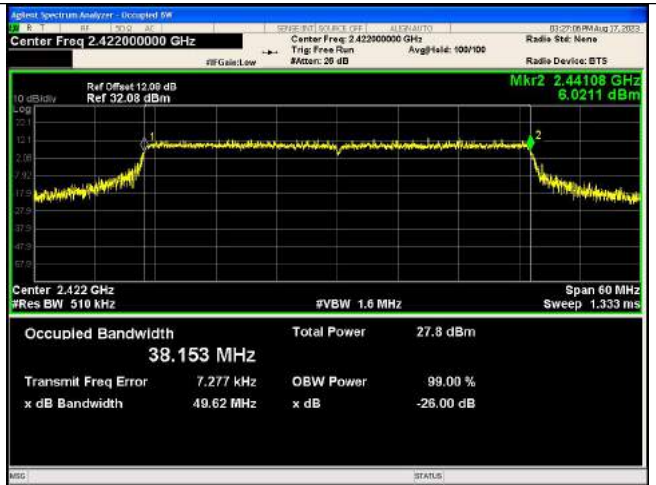

IEEE 802.11ax\_Channel 3\_40MHz\_Antenna  
0\_RU&Index SU

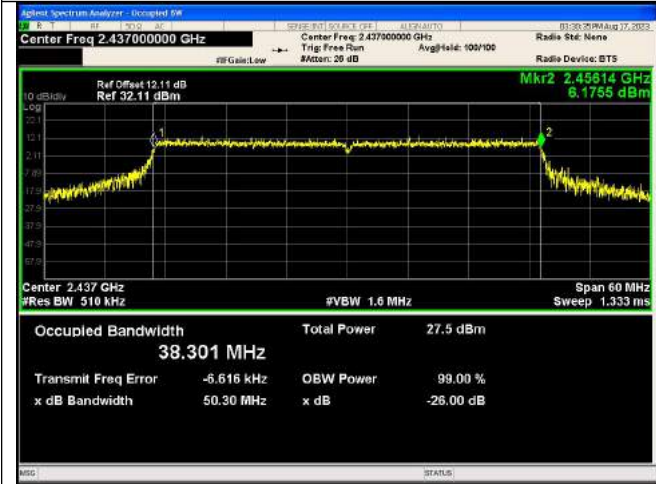

IEEE 802.11ax\_Channel 6\_40MHz\_Antenna  
0\_RU&Index SU

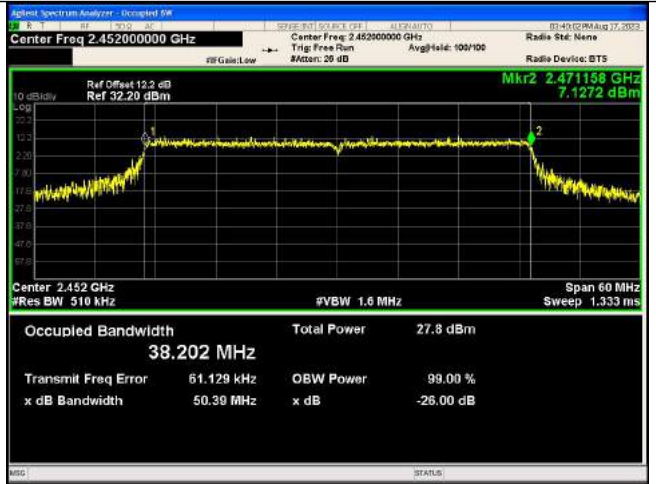


IEEE 802.11ax\_Channel 9\_40MHz\_Antenna  
0\_RU&Index SU






## APPENDIX III. 6dB Bandwidth


## Test Result

Mode	Channel	RU & Index	Ant.	Center Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
IEEE 802.11b	1	N/A	0	2412	7.367	0.5	PASS
	6			2437	6.430		PASS
	11			2462	6.455		PASS
IEEE 802.11g	1			2412	16.44		PASS
	6			2437	16.47		PASS
	11			2462	16.47		PASS
IEEE 802.11n_20	1			2412	17.56		PASS
	6			2437	17.58		PASS
	11			2462	17.56		PASS
IEEE 802.11n_40	3			2422	36.33		PASS
	6			2437	36.34		PASS
	9			2452	36.35		PASS
IEEE 802.11ax_20	1	SU		2412	18.95		PASS
	6			2437	18.97		PASS
	11			2462	19.00		PASS
IEEE 802.11ax_40	3			2422	38.09		PASS
	6			2437	38.10		PASS
	9			2452	38.00		PASS


## Test Graphs

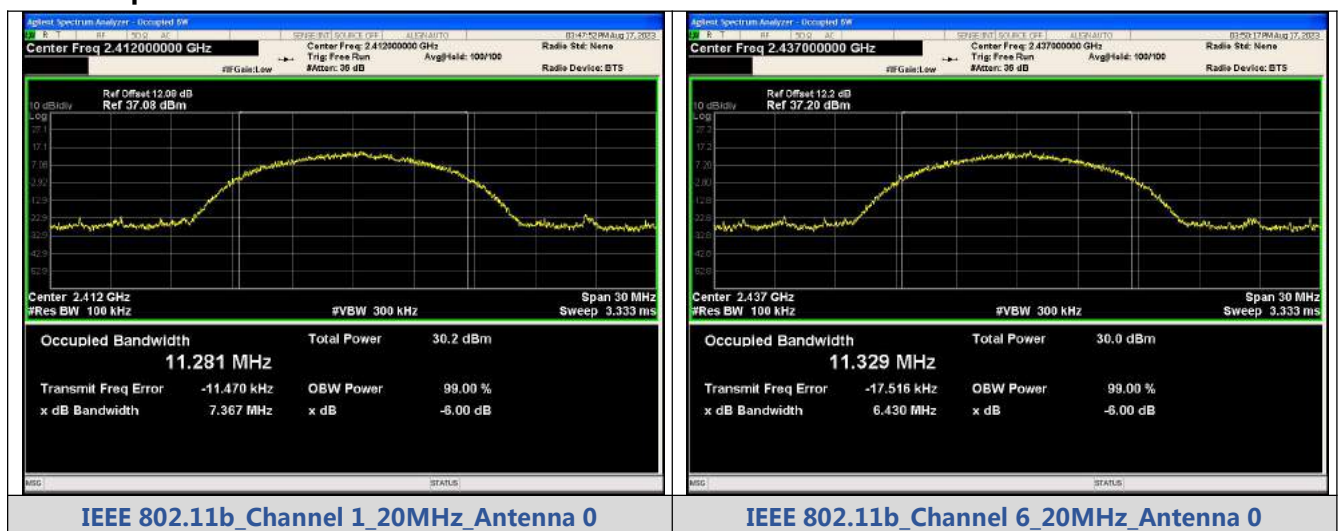

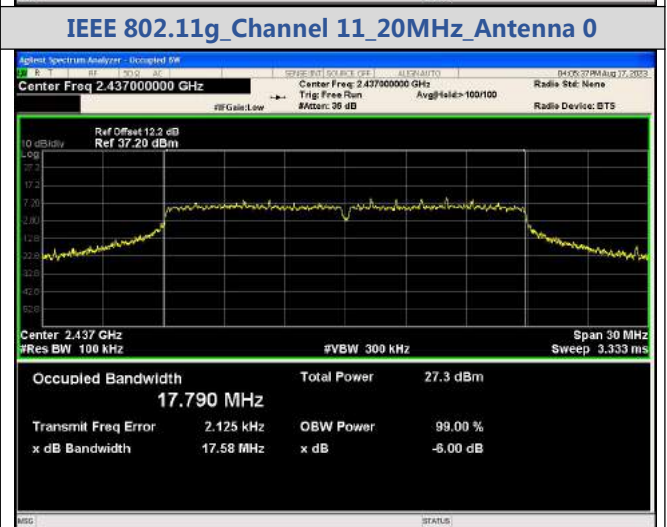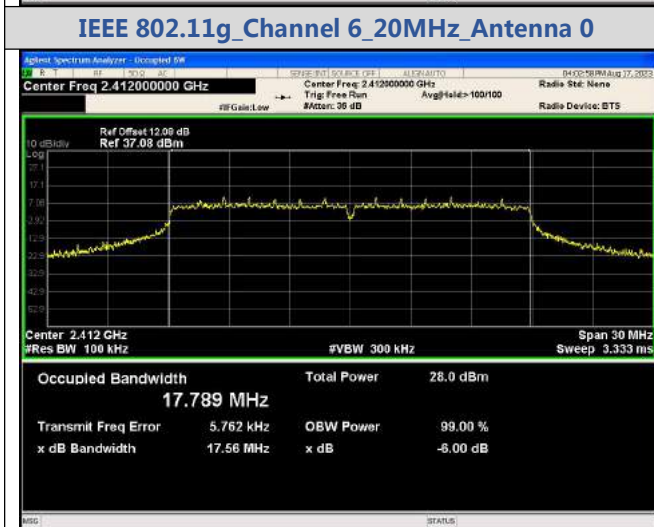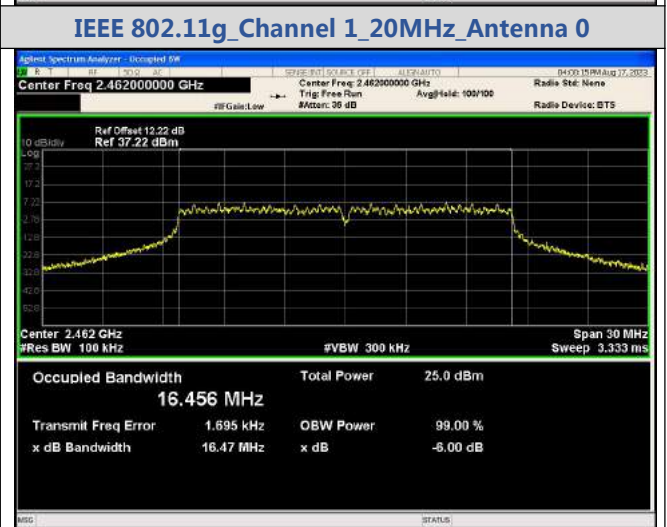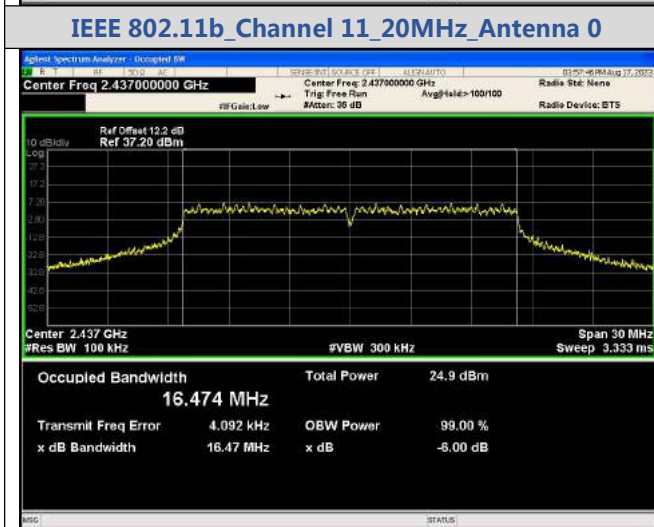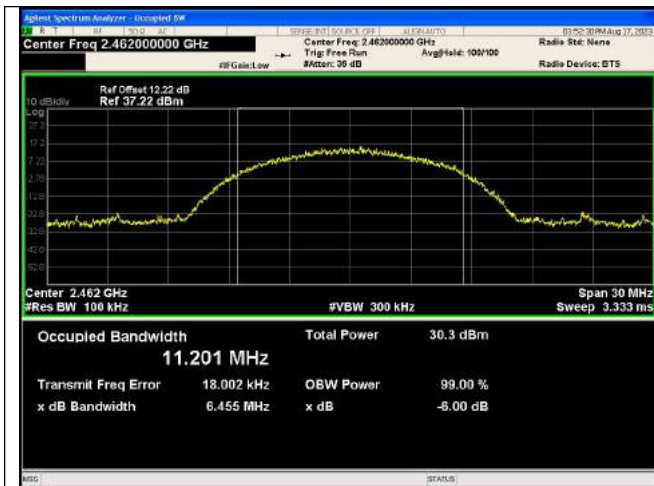

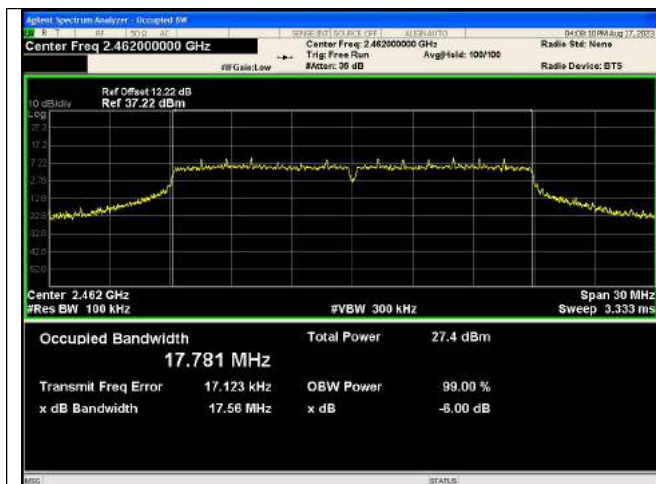


IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0

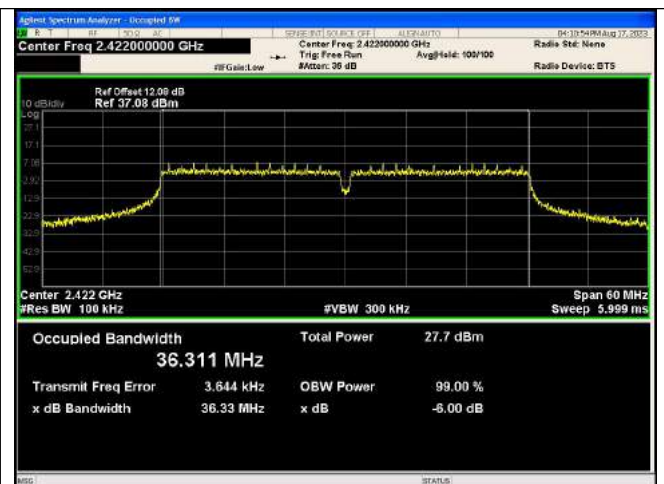



IEEE 802.11n\_Channel 3\_40MHz\_Antenna 0




IEEE 802.11n\_Channel 6\_40MHz\_Antenna 0

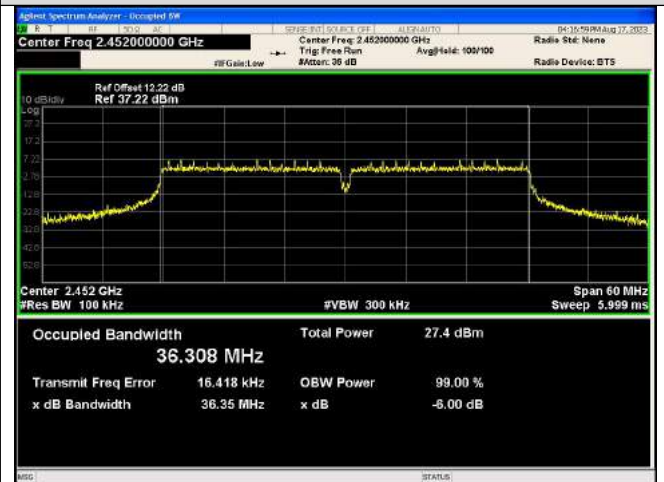


IEEE 802.11n\_Channel 9\_40MHz\_Antenna 0

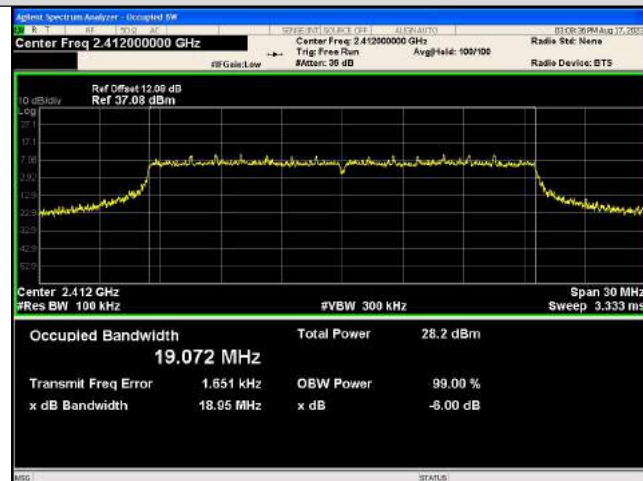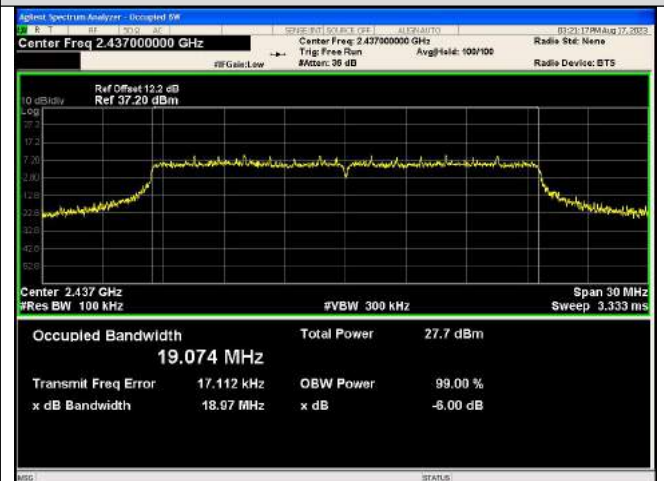IEEE 802.11ax\_Channel 1\_20MHz\_Antenna  
0\_RU&Index SUIEEE 802.11ax\_Channel 6\_20MHz\_Antenna  
0\_RU&Index SU




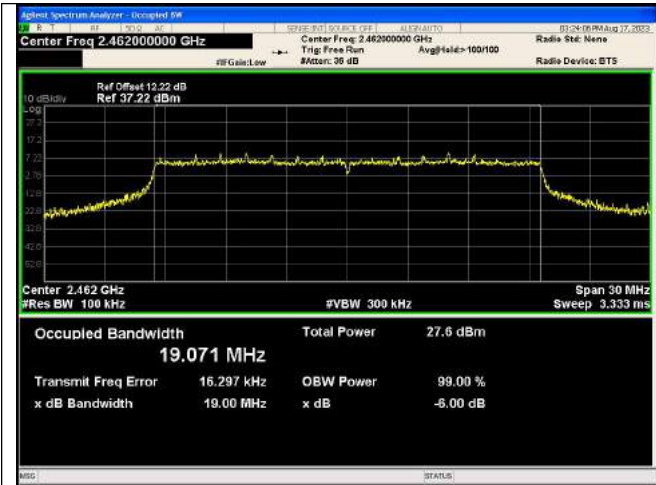


IEEE 802.11ax\_Channel 11\_20MHz\_Antenna  
0\_RU&Index SU

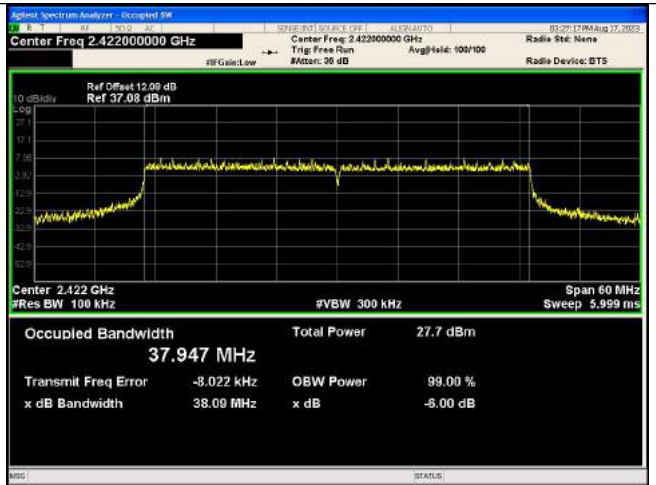

IEEE 802.11ax\_Channel 3\_40MHz\_Antenna  
0\_RU&Index SU

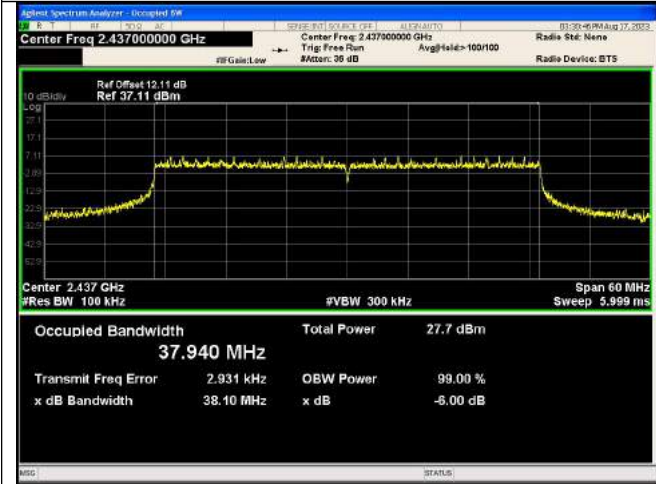

IEEE 802.11ax\_Channel 6\_40MHz\_Antenna  
0\_RU&Index SU

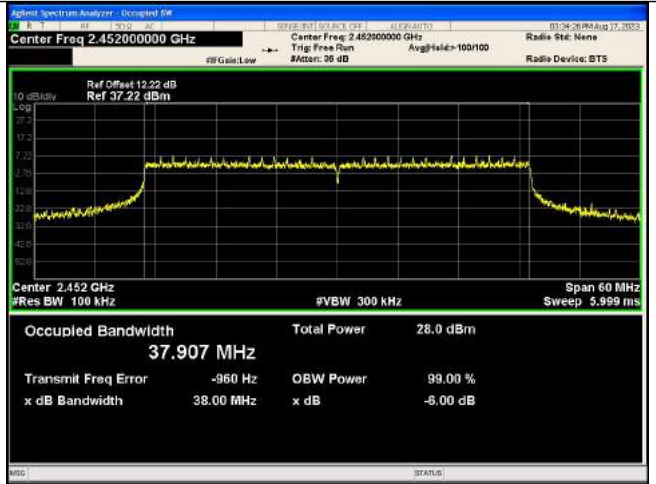

IEEE 802.11ax\_Channel 9\_40MHz\_Antenna  
0\_RU&Index SU

## APPENDIX IV. Conducted Out Of Band Emission

## Test Result

Mode	Channel	RU & Index	Ant.	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
IEEE 802.11b	1	N/A	0	2400.00	-25.074	-4.67	-20.404	PASS
				2396.45	-22.759	-4.67	-18.090	PASS
				4825.60	-48.274	-4.67	-43.604	PASS
				7240.90	-55.763	-4.67	-51.093	PASS
				9642.40	-58.450	-4.67	-53.780	PASS
	6			24945.7	-41.638	-4.67	-36.968	PASS
				4873.05	-47.960	-4.96	-43.000	PASS
				7312.68	-56.973	-4.96	-52.013	PASS
				9767.92	-57.606	-4.96	-52.646	PASS
				24890.1	-41.970	-4.96	-37.010	PASS
	11			2483.50	-40.112	-4.71	-35	PASS
				4923.62	-48.233	-4.71	-43.523	PASS
				7390.09	-55.519	-4.71	-50.809	PASS
				9850.32	-57.396	-4.71	-52.686	PASS
				24875.1	-40.403	-4.71	-35.693	PASS
IEEE 802.11g	1			2400.00	-22.604	-12.7	-10	PASS
				4819.99	-54.243	-12.7	-41.543	PASS
				7250.88	-56.533	-12.7	-43.833	PASS
				9653.05	-57.616	-12.7	-44.916	PASS
				24935.7	-40.492	-12.7	-27.792	PASS
	6			4874.30	-52.287	-12.97	-39.317	PASS
				7320.80	-56.733	-12.97	-43.764	PASS
				9739.83	-57.336	-12.97	-44.366	PASS
				24911.4	-40.913	-12.97	-27.943	PASS
				2483.50	-40.962	-12.82	-28	PASS
	11			4924.24	-53.263	-12.82	-40.443	PASS
				7370.12	-57.191	-12.82	-44.371	PASS
				9861.56	-56.583	-12.82	-43.763	PASS
				24884.5	-41.213	-12.82	-28.393	PASS
				IEEE 802.11n_20	1	2400.00	-17.867	-9.32
2398.92	-15.856					-9.32	-6.536	PASS
4831.20	-51.313					-9.32	-41.993	PASS
7234.00	-56.093					-9.32	-46.773	PASS
9635.60	-57.650					-9.32	-48.330	PASS
24928.2	-41.215					-9.32	-31.895	PASS
6	4874.30				-50.379	-9.63	-40.748	PASS

	11	SU	7304.57	-56.517	-9.63	-46.887	PASS		
			9763.55	-56.911	-9.63	-47.281	PASS		
			24960.0	-40.820	-9.63	-31.190	PASS		
			2483.50	-30.016	-10.03	-20	PASS		
			4925.49	-51.888	-10.03	-41.858	PASS		
			7403.20	-57.081	-10.03	-47.051	PASS		
			9845.95	-56.899	-10.03	-46.869	PASS		
			24903.9	-41.220	-10.03	-31.190	PASS		
IEEE 802.11n_40	3		2400.00	-18.258	-12.58	-6	PASS		
			4845.58	-53.318	-12.58	-40.738	PASS		
			7243.39	-56.734	-12.58	-44.154	PASS		
			9702.37	-56.109	-12.58	-43.529	PASS		
			24953.2	-41.014	-12.58	-28.434	PASS		
			4880.54	-52.797	-12.81	-39.986	PASS		
	6		7305.19	-56.234	-12.81	-43.424	PASS		
			9779.16	-57.380	-12.81	-44.570	PASS		
			24912.0	-41.670	-12.81	-28.860	PASS		
			2483.50	-27.467	-12.92	-15	PASS		
			4898.02	-53.091	-12.92	-40.171	PASS		
			7340.15	-57.152	-12.92	-44.232	PASS		
			9770.42	-56.834	-12.92	-43.914	PASS		
			24936.3	-40.855	-12.92	-27.935	PASS		
			9	2400.00	-16.843	-9.24	-8	PASS	
				4823.74	-49.674	-9.24	-40.434	PASS	
7226.53	-57.757			-9.24	-48.517	PASS			
9648.68	-58.162			-9.24	-48.922	PASS			
24932.6	-41.888			-9.24	-32.648	PASS			
4873.05	-47.208			-9.69	-37.518	PASS			
IEEE 802.11ax_20	6		7310.81	-56.123	-9.69	-46.433	PASS		
			9756.06	-56.656	-9.69	-46.966	PASS		
			24962.5	-41.962	-9.69	-32.272	PASS		
			2483.50	-26.819	-9.89	-17	PASS		
	11		4917.38	-53.334	-9.89	-43.444	PASS		
			7366.37	-57.354	-9.89	-47.464	PASS		
			9843.46	-57.063	-9.89	-47.173	PASS		
			24922.6	-41.485	-9.89	-31.595	PASS		
			IEEE 802.11ax_40	3	2400.00	-18.320	-12.88	-5	PASS
					4826.86	-53.132	-12.88	-40.252	PASS
					7229.66	-56.261	-12.88	-43.381	PASS
					9693.01	-57.337	-12.88	-44.457	PASS
24932.0	-41.050				-12.88	-28.170	PASS		
4868.06	-53.448				-12.83	-40.618	PASS		
6	7290.21			-56.535	-12.83	-43.705	PASS		
	9773.54			-56.566	-12.83	-43.736	PASS		
	24947.6			-41.318	-12.83	-28.488	PASS		
	9			2483.50	-26.222	-12.74	-13	PASS	




				4886.79	-54.889	-12.74	-42.149	PASS
				7332.66	-56.206	-12.74	-43.466	PASS
				9779.16	-56.547	-12.74	-43.807	PASS
				24938.2	-40.775	-12.74	-28.035	PASS


Test Graphs



In-Band Reference Level  
IEEE 802.11b\_Channel 1\_20MHz\_Antenna 0

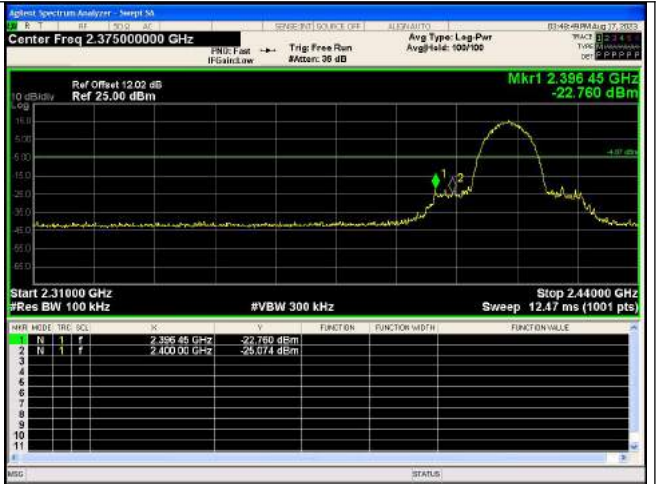

Out Of Band Emission  
IEEE 802.11b\_Channel 1\_20MHz\_Antenna 0

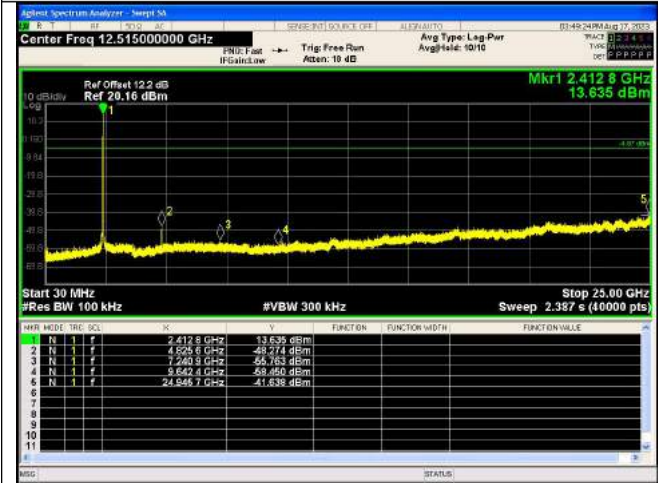

Spurious Emission  
IEEE 802.11b\_Channel 1\_20MHz\_Antenna 0



In-Band Reference Level  
IEEE 802.11b\_Channel 6\_20MHz\_Antenna 0




Spurious Emissions  
IEEE 802.11b\_Channel 6\_20MHz\_Antenna 0



In-Band Reference Level  
IEEE 802.11b\_Channel 11\_20MHz\_Antenna 0



Out Of Band Emission  
IEEE 802.11b\_Channel 11\_20MHz\_Antenna 0

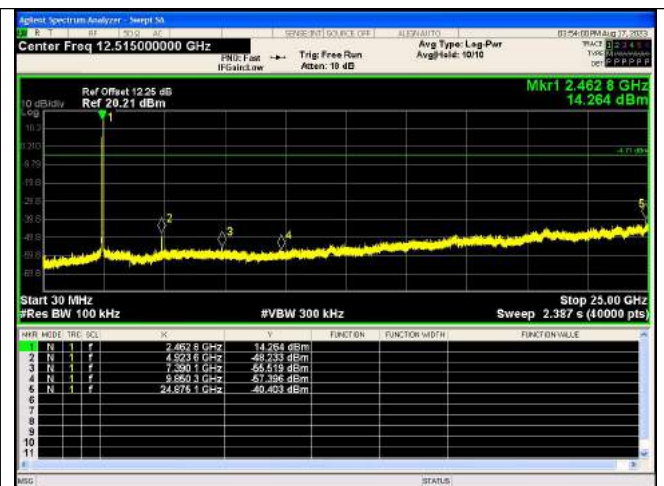


Spurious Emission  
IEEE 802.11b\_Channel 11\_20MHz\_Antenna 0




In-Band Reference Level  
IEEE 802.11g\_Channel 1\_20MHz\_Antenna 0




Out Of Band Emission  
IEEE 802.11g\_Channel 1\_20MHz\_Antenna 0

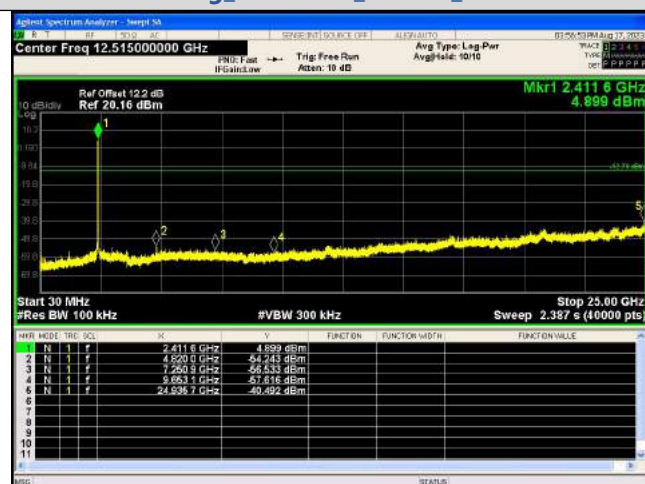


Spurious Emission  
IEEE 802.11g\_Channel 1\_20MHz\_Antenna 0

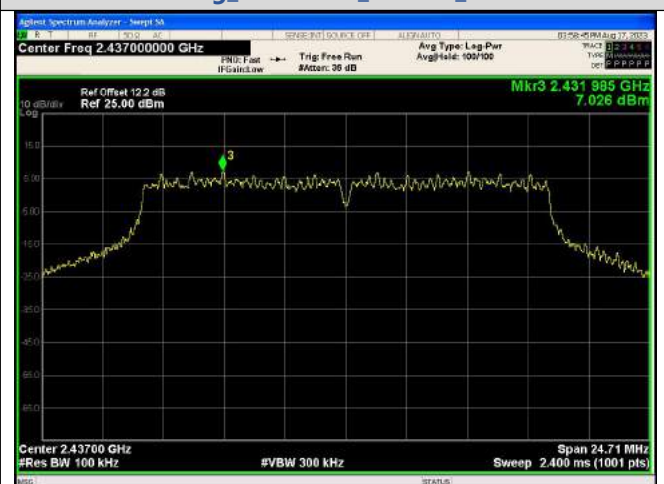

In-Band Reference Level  
IEEE 802.11g\_Channel 6\_20MHz\_Antenna 0

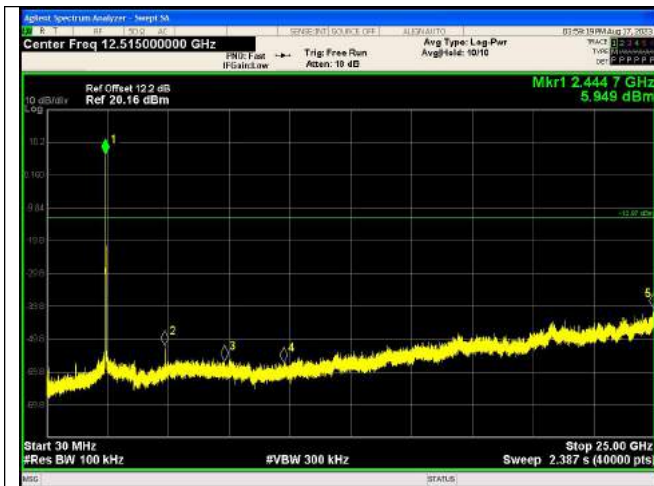


Spurious Emissions  
IEEE 802.11g\_Channel 6\_20MHz\_Antenna 0

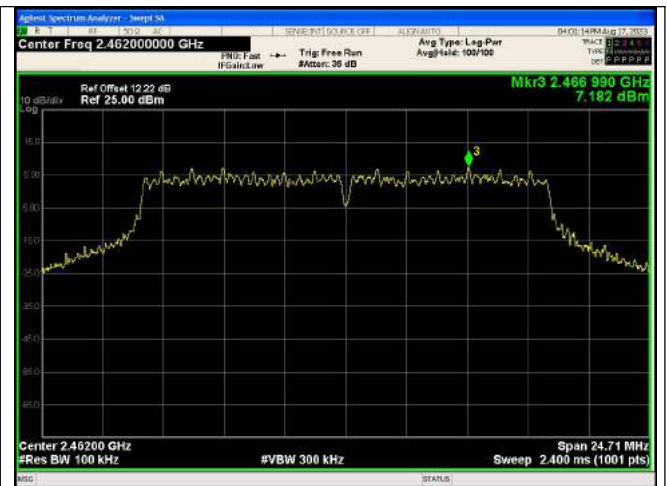

In-Band Reference Level  
IEEE 802.11g\_Channel 11\_20MHz\_Antenna 0



Out Of Band Emission  
IEEE 802.11g\_Channel 11\_20MHz\_Antenna 0

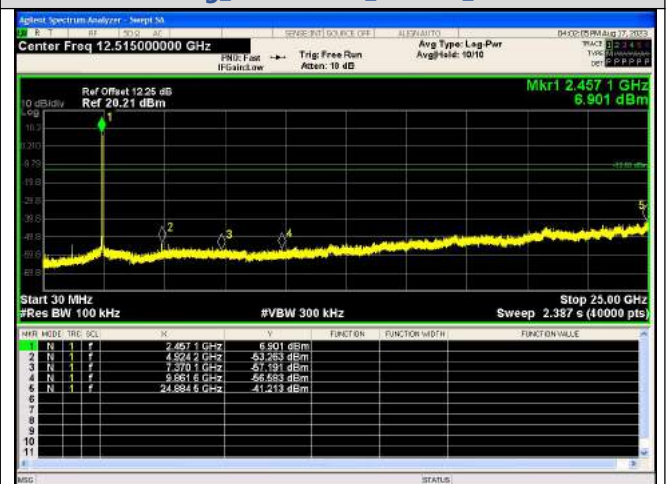

Spurious Emission  
IEEE 802.11g\_Channel 11\_20MHz\_Antenna 0




In-Band Reference Level  
IEEE 802.11n\_Channel 1\_20MHz\_Antenna 0



Out Of Band Emission  
IEEE 802.11n\_Channel 1\_20MHz\_Antenna 0



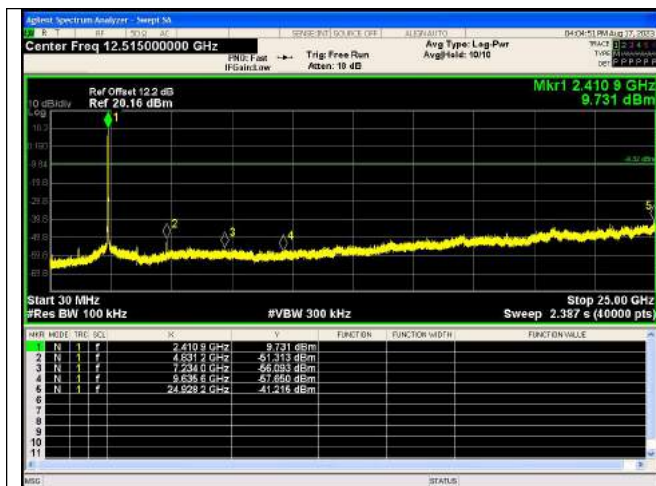

Spurious Emission  
IEEE 802.11n\_Channel 1\_20MHz\_Antenna 0



In-Band Reference Level  
IEEE 802.11n\_Channel 6\_20MHz\_Antenna 0




Spurious Emissions  
IEEE 802.11n\_Channel 6\_20MHz\_Antenna 0



In-Band Reference Level  
IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0



Out Of Band Emission  
IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0

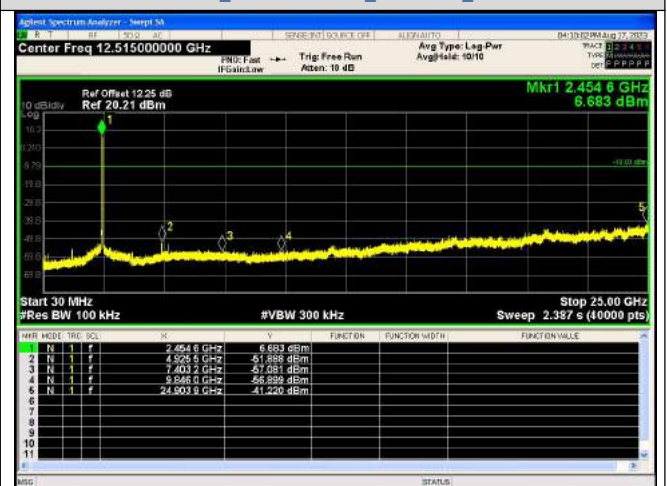


Spurious Emission  
IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0



In-Band Reference Level  
IEEE 802.11n\_Channel 3\_40MHz\_Antenna 0




Out Of Band Emission  
IEEE 802.11n\_Channel 3\_40MHz\_Antenna 0

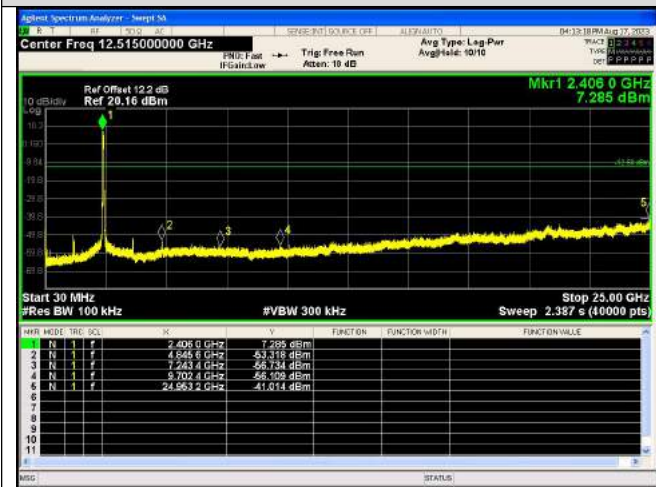

Spurious Emission  
IEEE 802.11n\_Channel 3\_40MHz\_Antenna 0



In-Band Reference Level  
IEEE 802.11n\_Channel 6\_40MHz\_Antenna 0

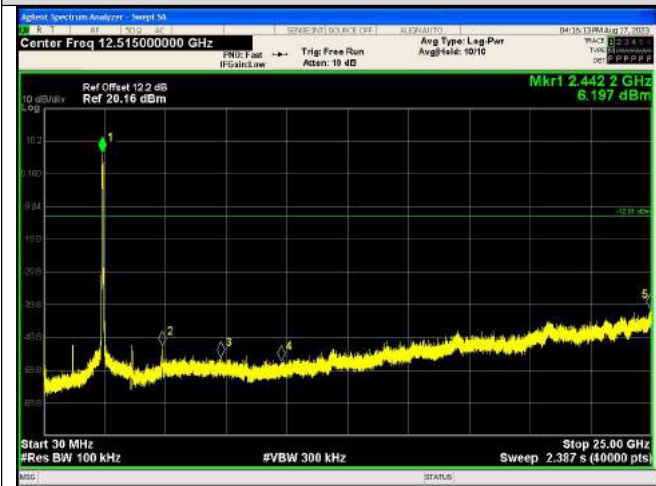


Spurious Emissions  
IEEE 802.11n\_Channel 6\_40MHz\_Antenna 0



In-Band Reference Level  
IEEE 802.11n\_Channel 9\_40MHz\_Antenna 0



Out Of Band Emission  
IEEE 802.11n\_Channel 9\_40MHz\_Antenna 0

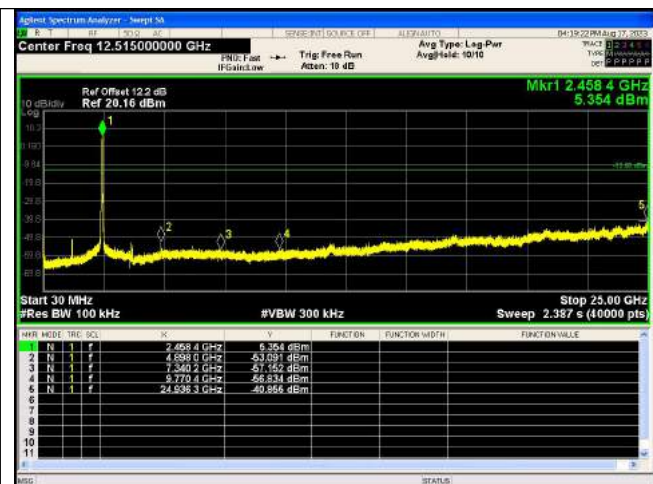


Spurious Emission  
IEEE 802.11n\_Channel 9\_40MHz\_Antenna 0



In-Band Reference Level  
IEEE 802.11ax\_Channel 1\_20MHz\_Antenna  
0\_RU&Index SU



Out Of Band Emission  
IEEE 802.11ax\_Channel 1\_20MHz\_Antenna  
0\_RU&Index SU

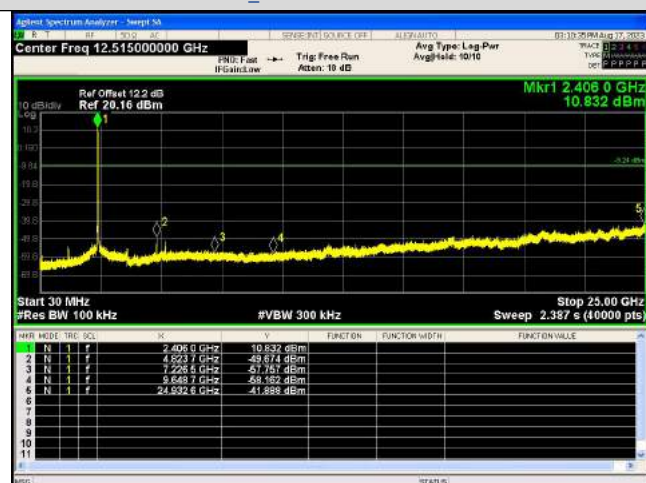


Spurious Emission  
IEEE 802.11ax\_Channel 1\_20MHz\_Antenna  
0\_RU&Index SU



In-Band Reference Level  
IEEE 802.11ax\_Channel 6\_20MHz\_Antenna  
0\_RU&Index SU



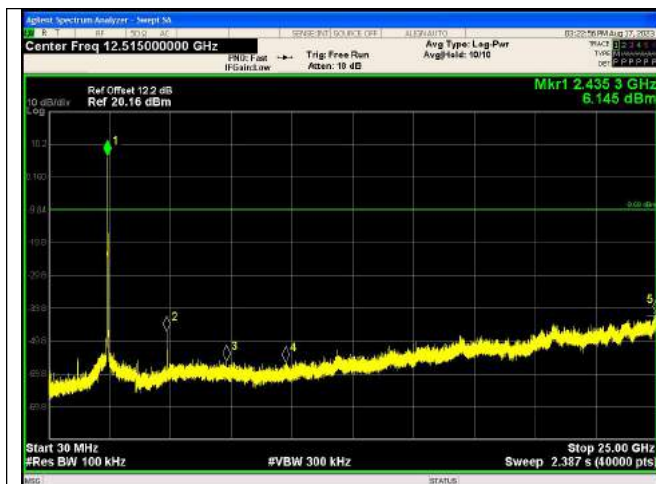


**Spurious Emissions**  
IEEE 802.11ax\_Channel 6\_20MHz\_Antenna  
0\_RU&Index SU




**In-Band Reference Level**  
IEEE 802.11ax\_Channel 11\_20MHz\_Antenna  
0\_RU&Index SU




**Out Of Band Emission**  
IEEE 802.11ax\_Channel 11\_20MHz\_Antenna  
0\_RU&Index SU

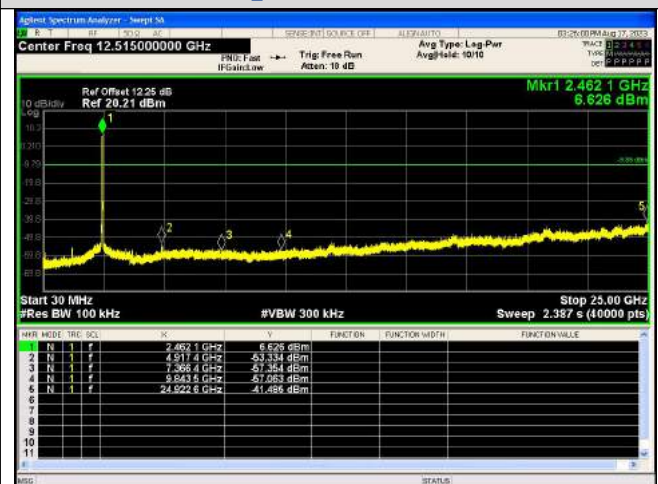


**Spurious Emission**  
IEEE 802.11ax\_Channel 11\_20MHz\_Antenna  
0\_RU&Index SU

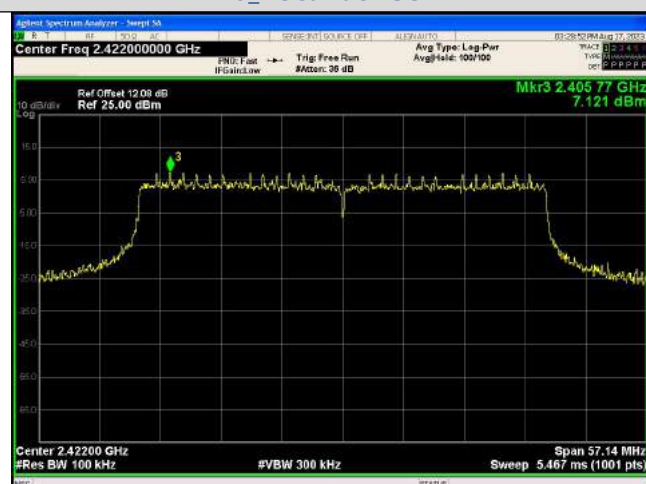

**In-Band Reference Level**  
IEEE 802.11ax\_Channel 3\_40MHz\_Antenna  
0\_RU&Index SU

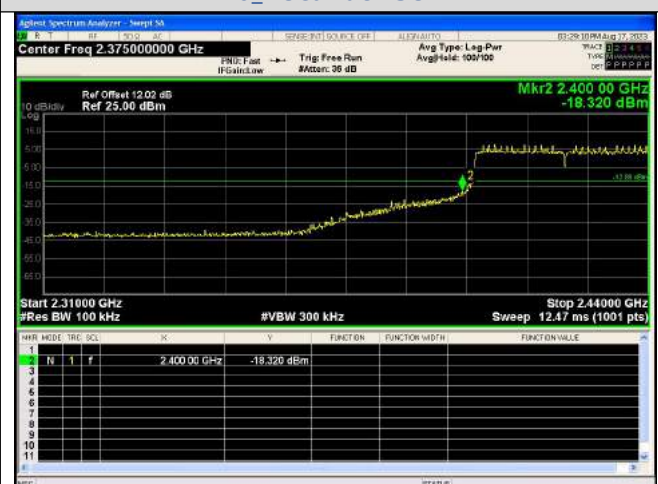


**Out Of Band Emission**  
IEEE 802.11ax\_Channel 3\_40MHz\_Antenna  
0\_RU&Index SU

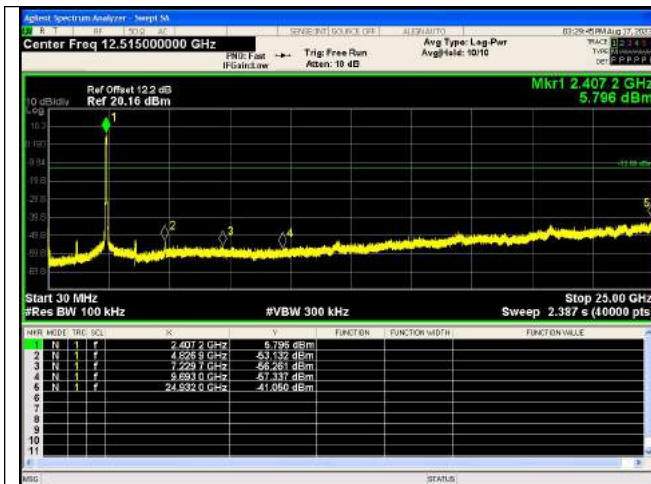


Spurious Emission  
IEEE 802.11ax\_Channel 3\_40MHz\_Antenna  
0\_RU&Index SU



In-Band Reference Level  
IEEE 802.11ax\_Channel 6\_40MHz\_Antenna  
0\_RU&Index SU

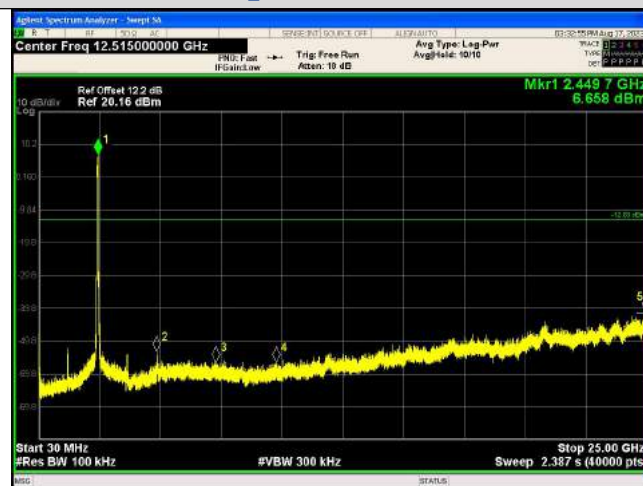


Spurious Emissions  
IEEE 802.11ax\_Channel 6\_40MHz\_Antenna  
0\_RU&Index SU

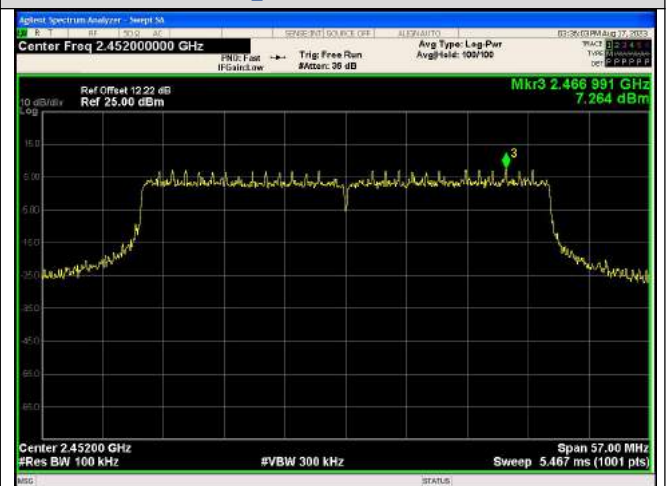

In-Band Reference Level  
IEEE 802.11ax\_Channel 9\_40MHz\_Antenna  
0\_RU&Index SU



Out Of Band Emission  
IEEE 802.11ax\_Channel 9\_40MHz\_Antenna  
0\_RU&Index SU

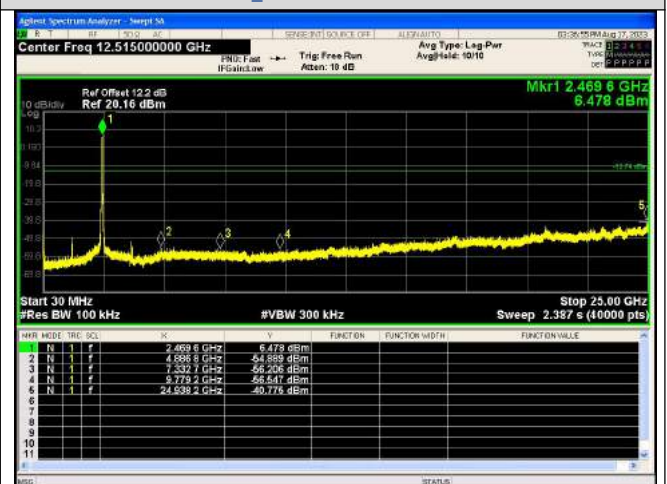

Spurious Emission  
IEEE 802.11ax\_Channel 9\_40MHz\_Antenna  
0\_RU&Index SU




## APPENDIX V. Duty Cycle


## Test Result

Mode	Data rates	Channel	RU & Index	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle (linear)	Duty Cycle Factor (dB)
IEEE 802.11b	11	1	N/A	1.193	1.617	73.76	0.7376	1.3218
		6		1.193	1.635	72.95	0.7295	1.3697
		11		1.188	1.309	90.78	0.9078	0.4201
IEEE 802.11g	54	1		0.252	0.707	35.58	0.3558	4.4879
		6		0.248	0.359	69.08	0.6908	1.6065
		11		0.248	0.359	69.08	0.6908	1.6065
IEEE 802.11n_20	MCS 7	1		1.910	2.321	82.31	0.8231	0.8455
		6		1.910	2.285	83.59	0.8359	0.7785
		11		1.915	2.260	84.75	0.8475	0.7186
IEEE 802.11n_40		3		0.945	1.044	90.55	0.9055	0.4311
		6		0.953	1.388	68.61	0.6861	1.6361
		9		0.945	1.044	90.55	0.9055	0.4311
IEEE 802.11ax_20	MCS 11	1	SU	1.460	1.830	79.75	0.7975	0.9827
		6		1.460	1.848	78.98	0.7898	1.0248
		11		1.460	1.925	75.85	0.7585	1.2004
IEEE 802.11ax_40		3		0.761	1.176	64.68	0.6468	1.8923
		6		0.760	1.140	66.69	0.6669	1.7594
		9		0.760	1.185	64.14	0.6414	1.9287


## Test Graphs

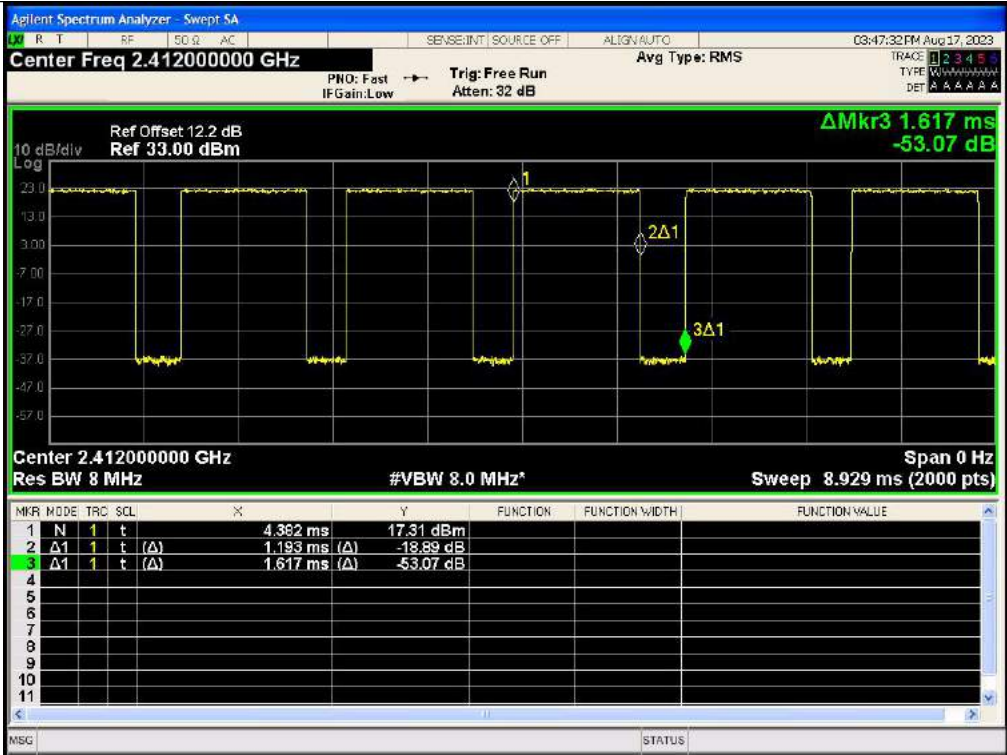


IEEE 802.11b\_20MHz\_Channel 1

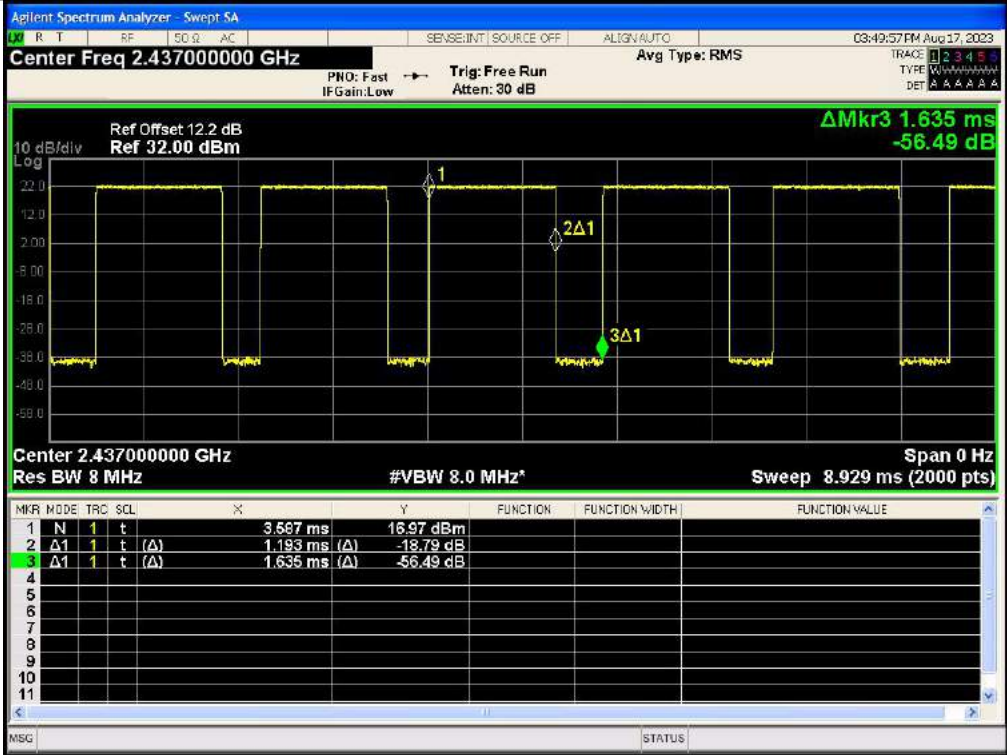


IEEE 802.11b\_20MHz\_Channel 6

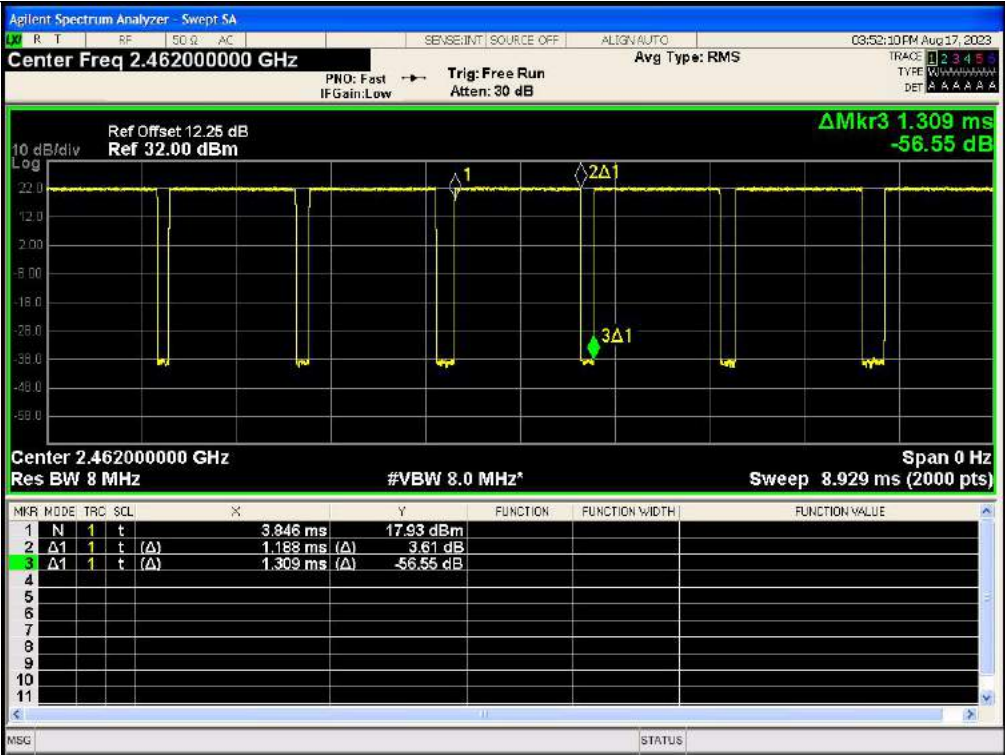


IEEE 802.11b\_20MHz\_Channel 11

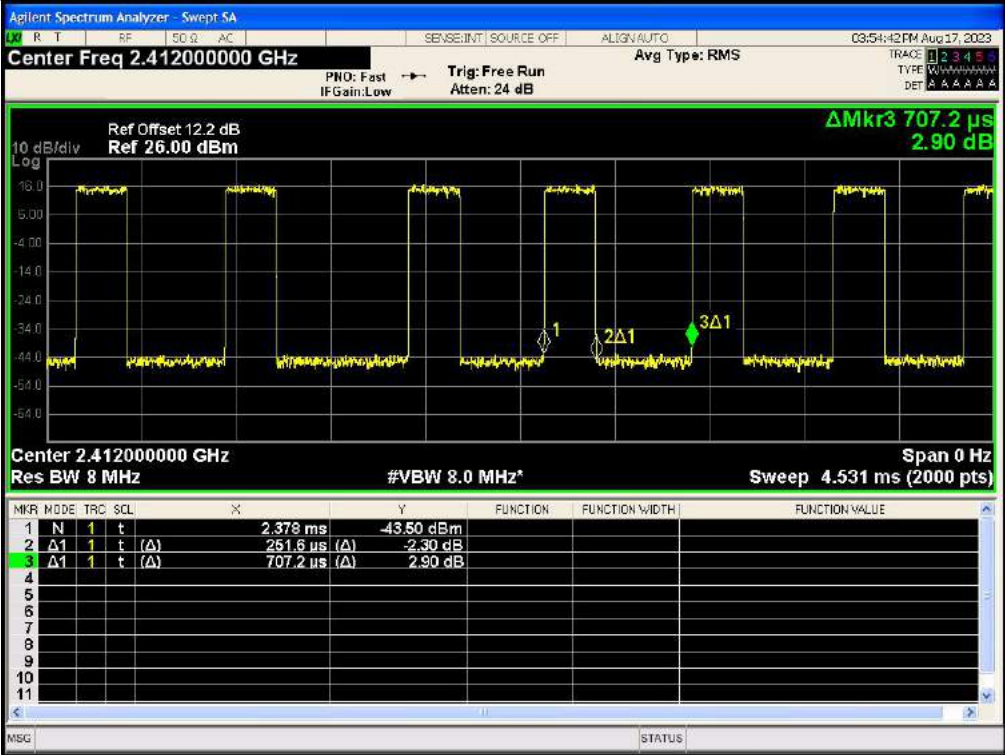


IEEE 802.11g\_20MHz\_Channel 1

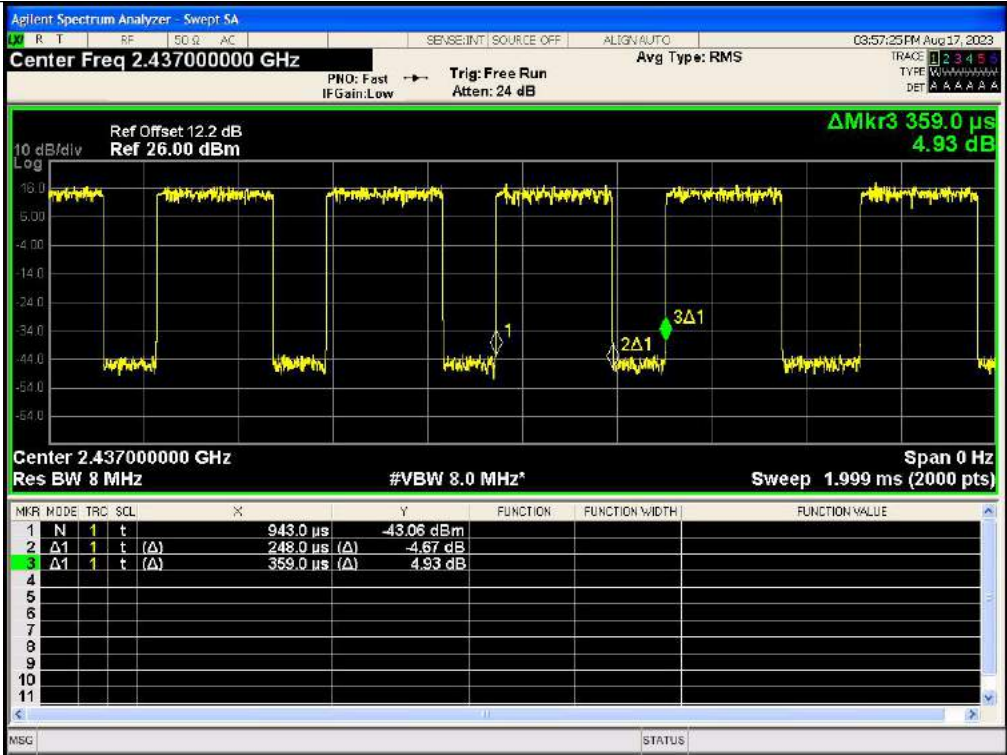


IEEE 802.11g\_20MHz\_Channel 6

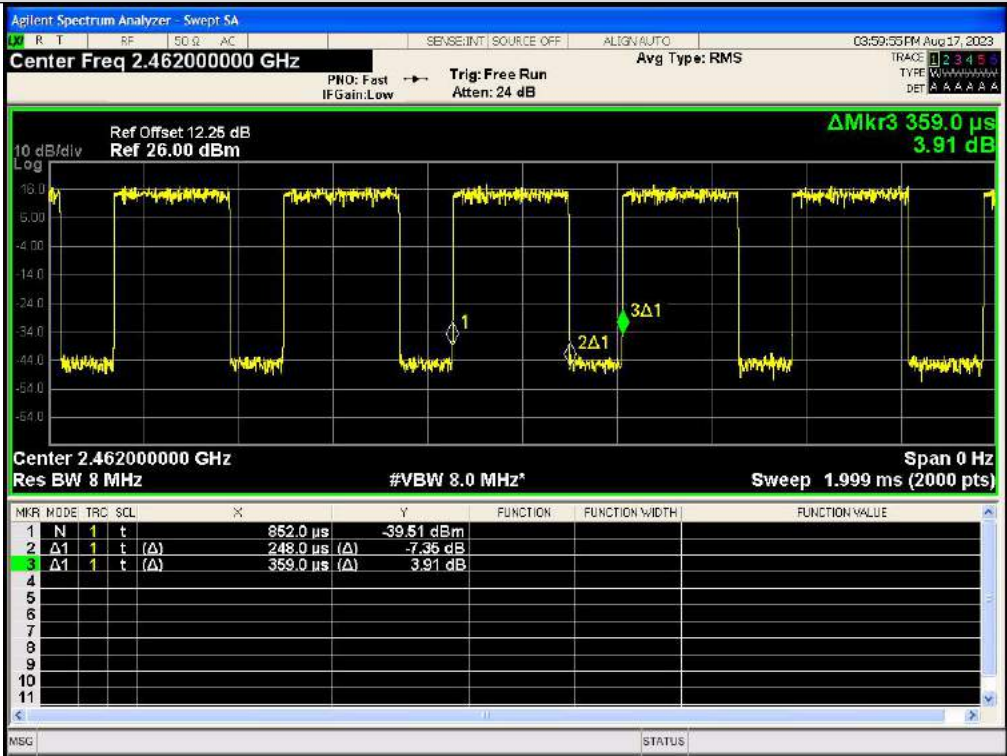

IEEE 802.11g\_20MHz\_Channel 11

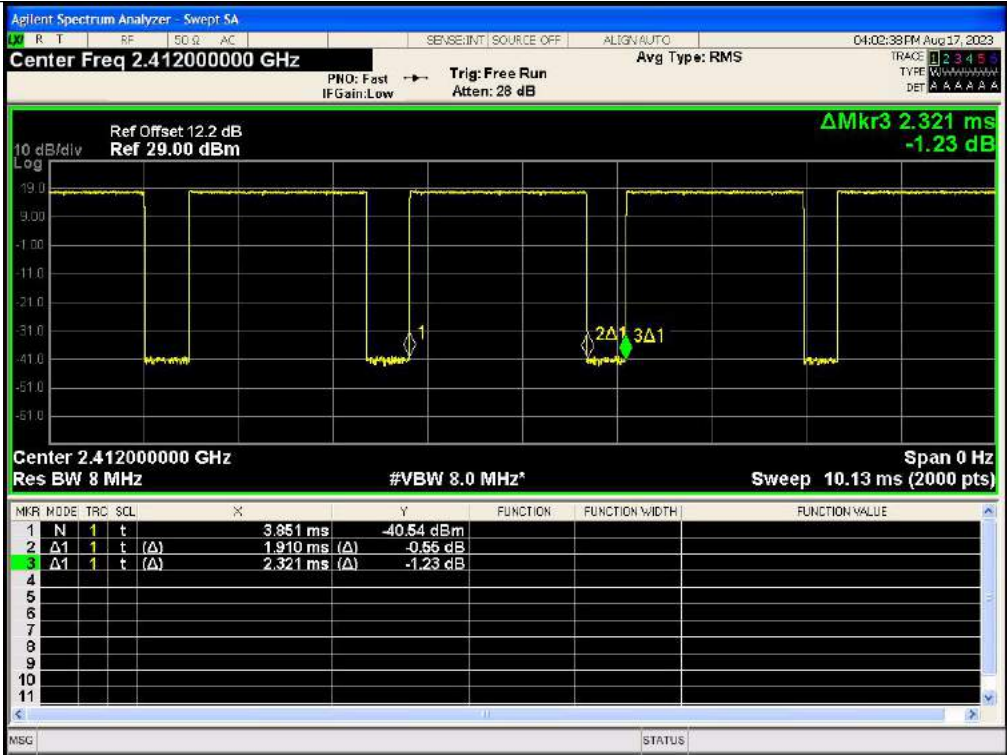


IEEE 802.11n\_20MHz\_Channel 1

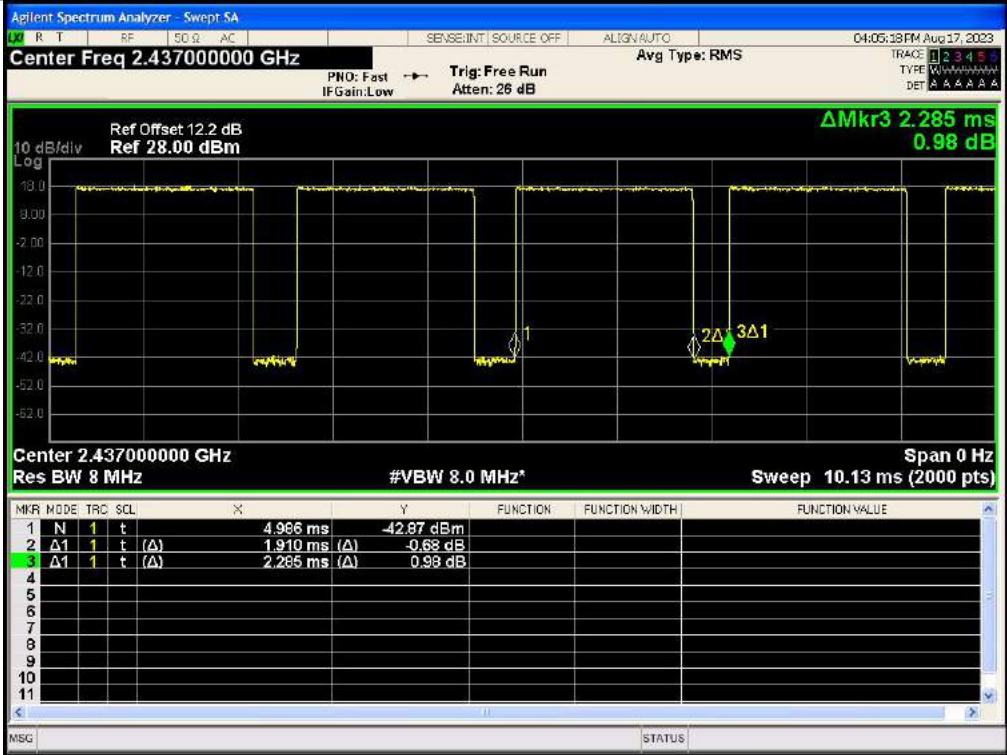


IEEE 802.11n\_20MHz\_Channel 6




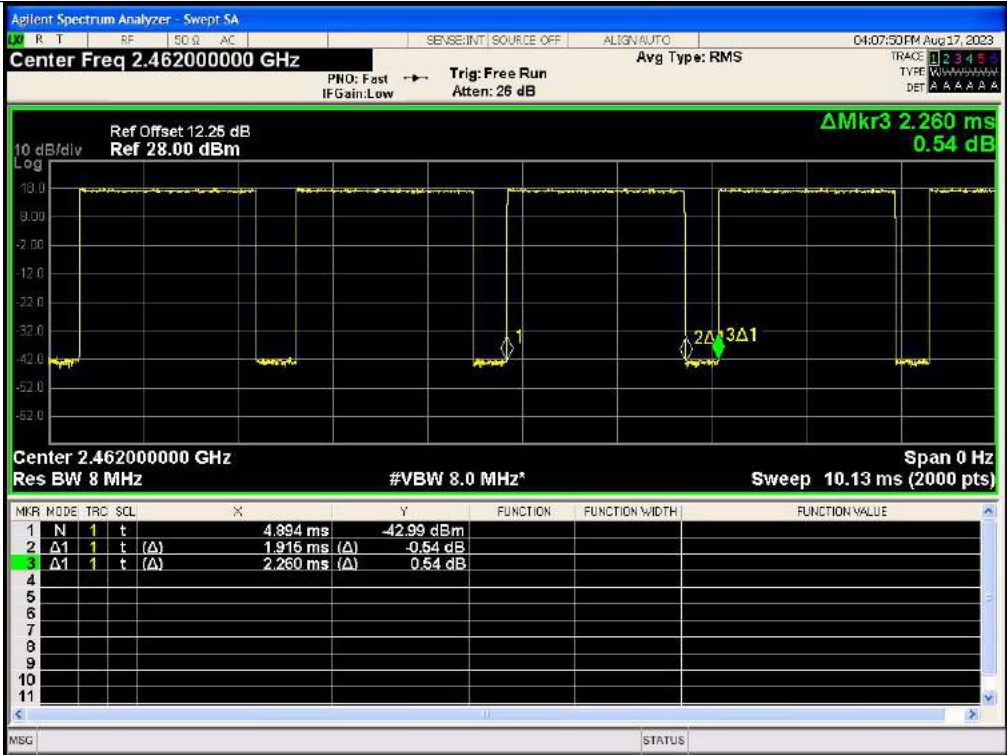


IEEE 802.11n\_20MHz\_Channel 11

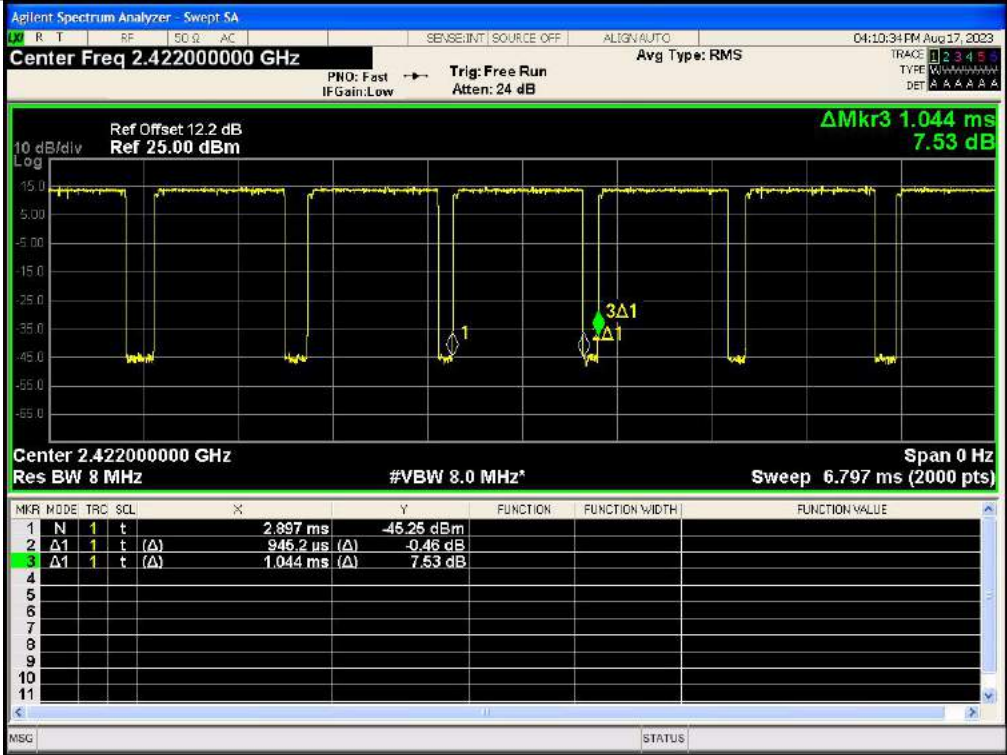


IEEE 802.11n\_40MHz\_Channel 3

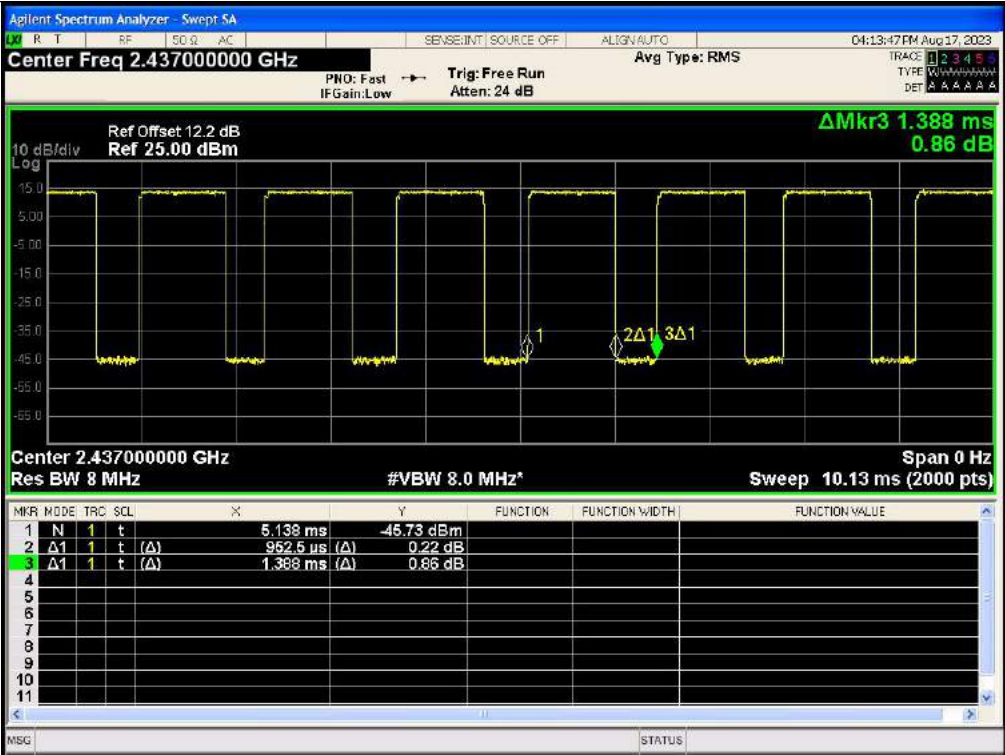


IEEE 802.11n\_40MHz\_Channel 6

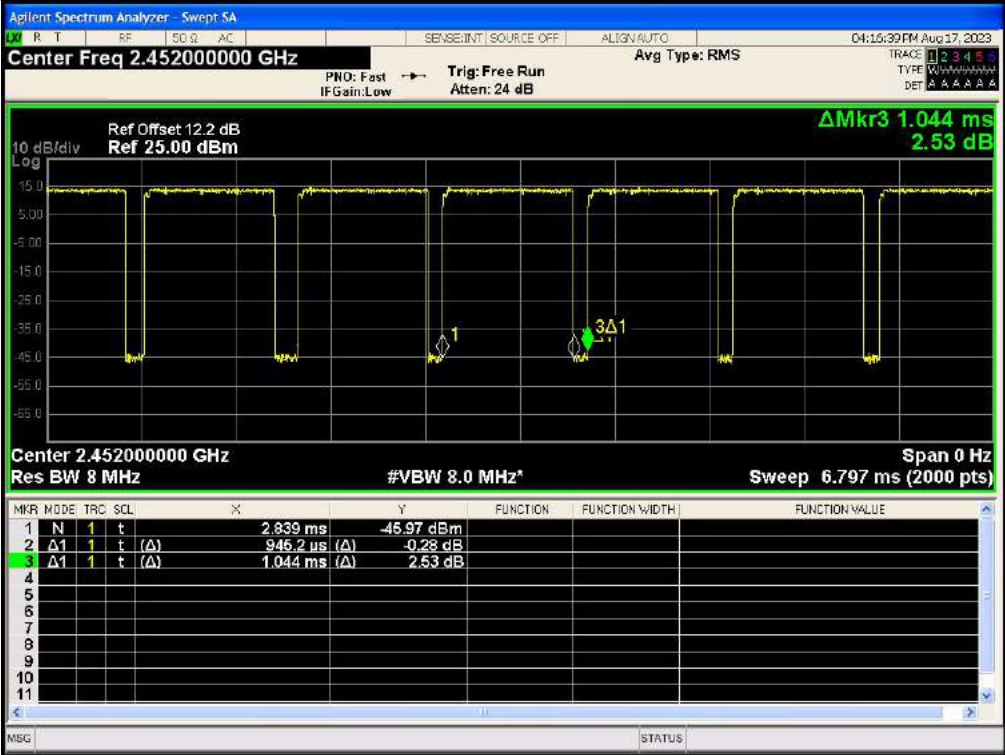

IEEE 802.11n\_40MHz\_Channel 9

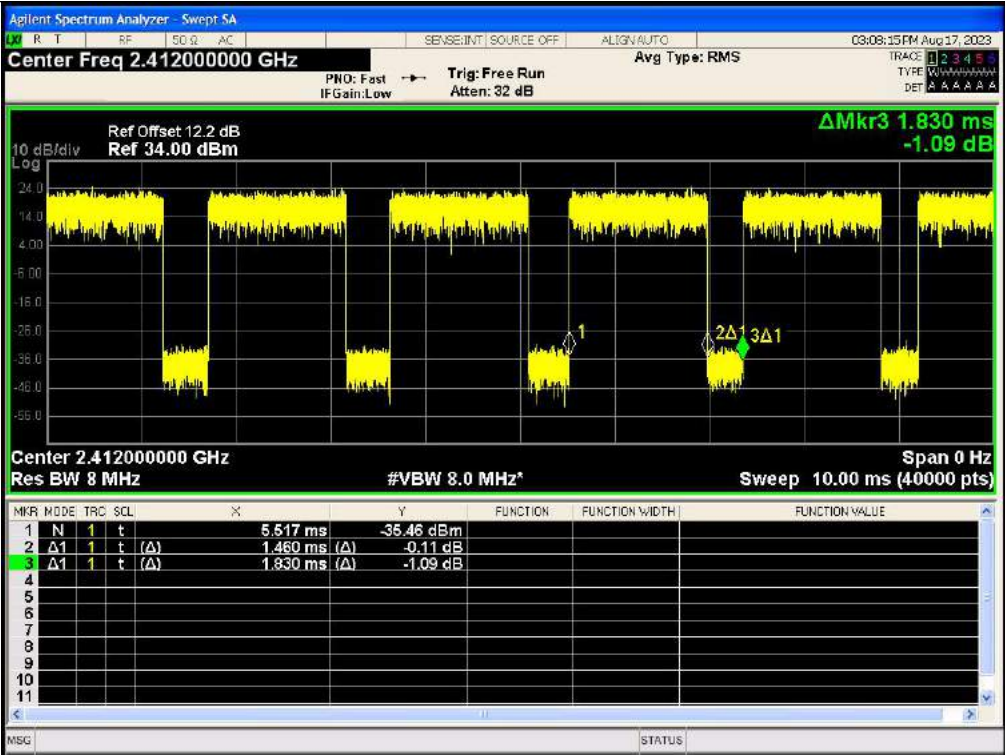


IEEE 802.11ax\_20MHz\_Channel 1

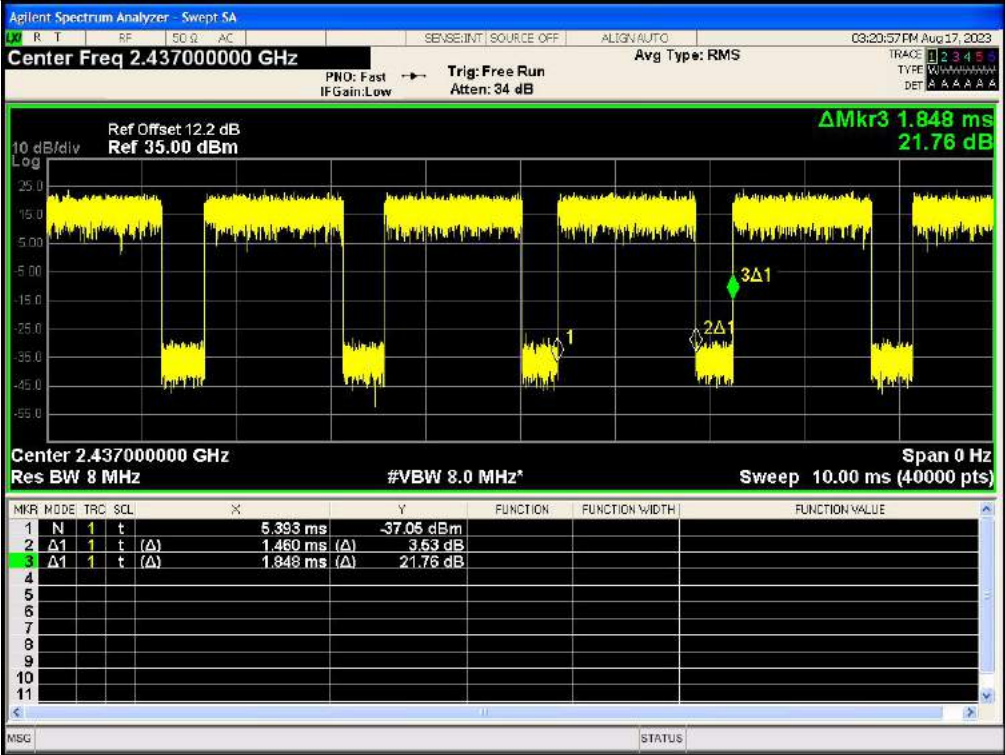


IEEE 802.11ax\_20MHz\_Channel 6




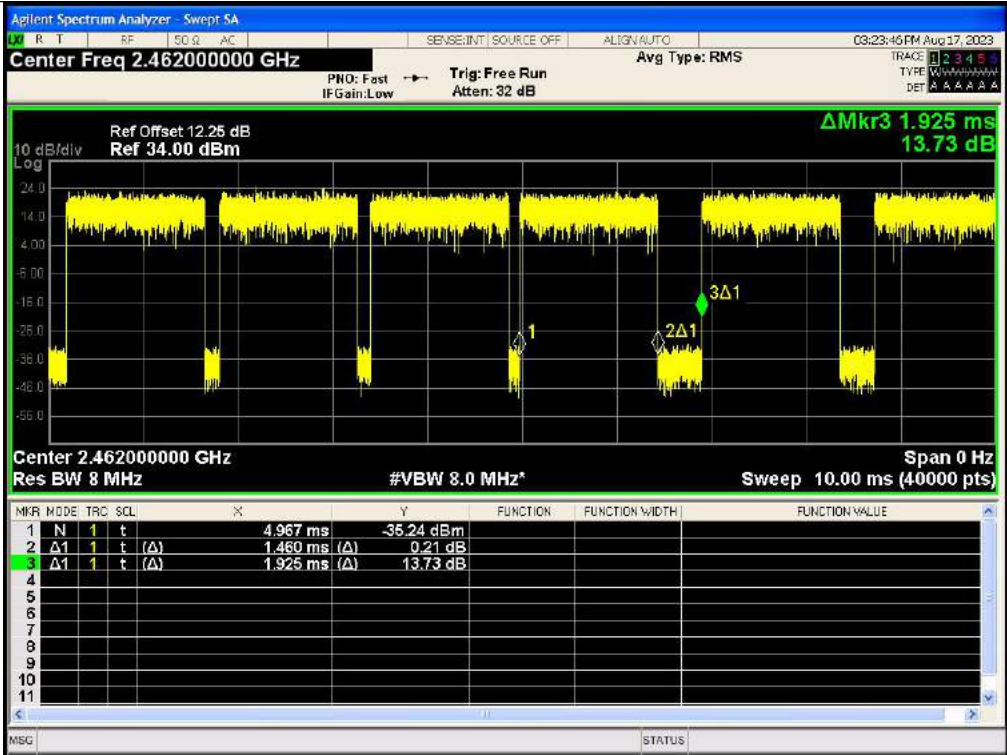


IEEE 802.11ax\_20MHz\_Channel 11

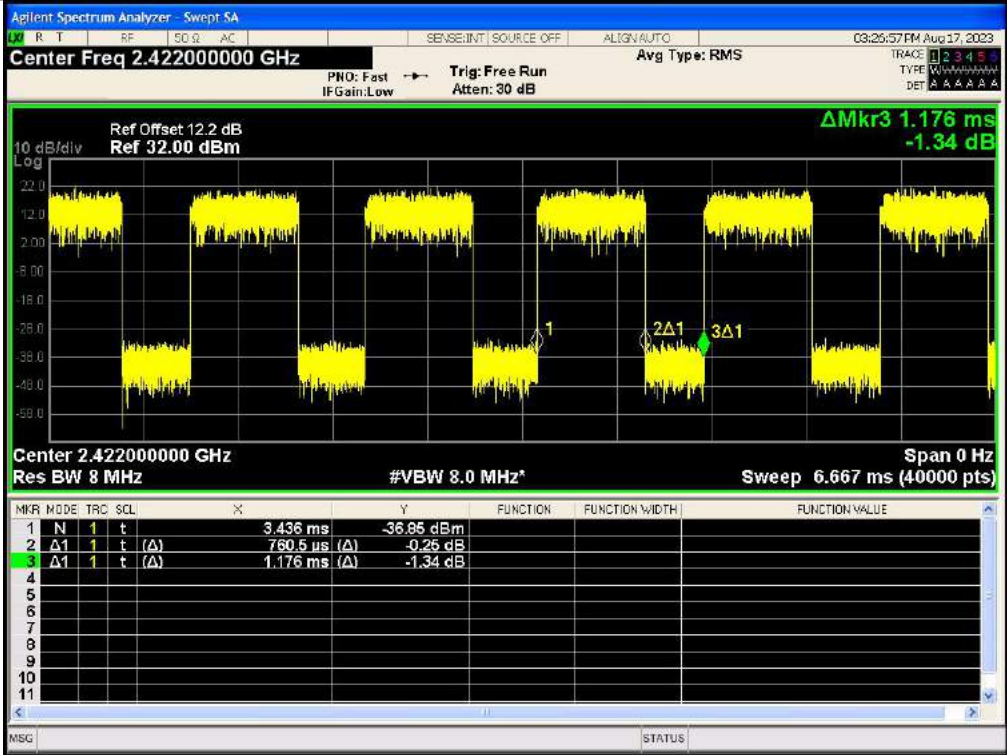

IEEE 802.11ax\_40MHz\_Channel 3

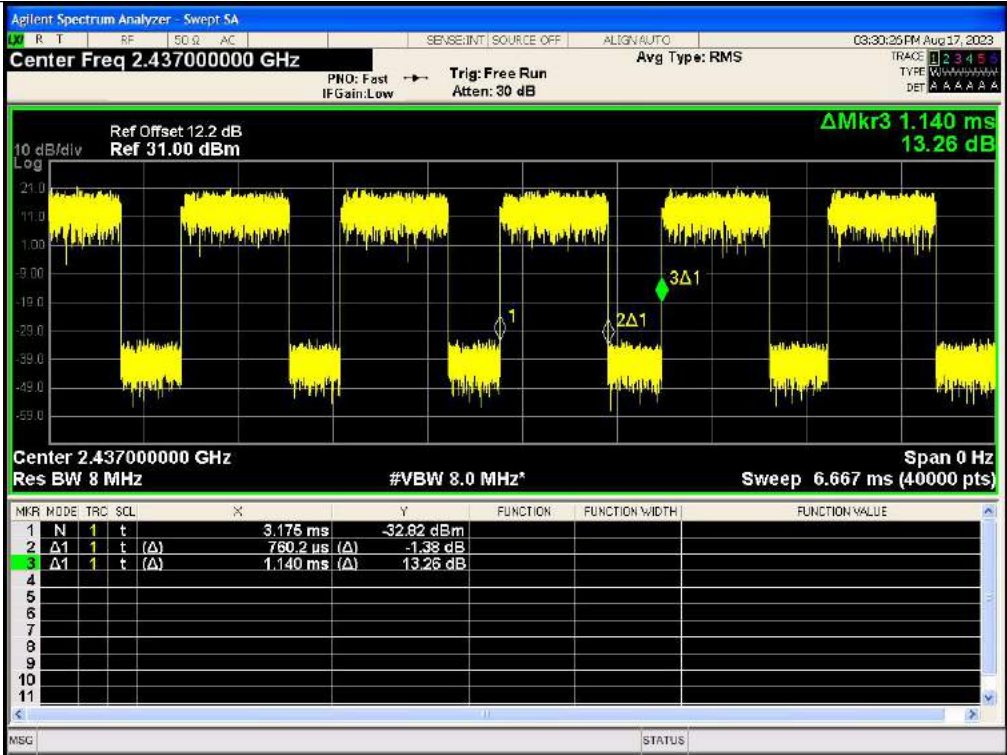

IEEE 802.11ax\_40MHz\_Channel 6

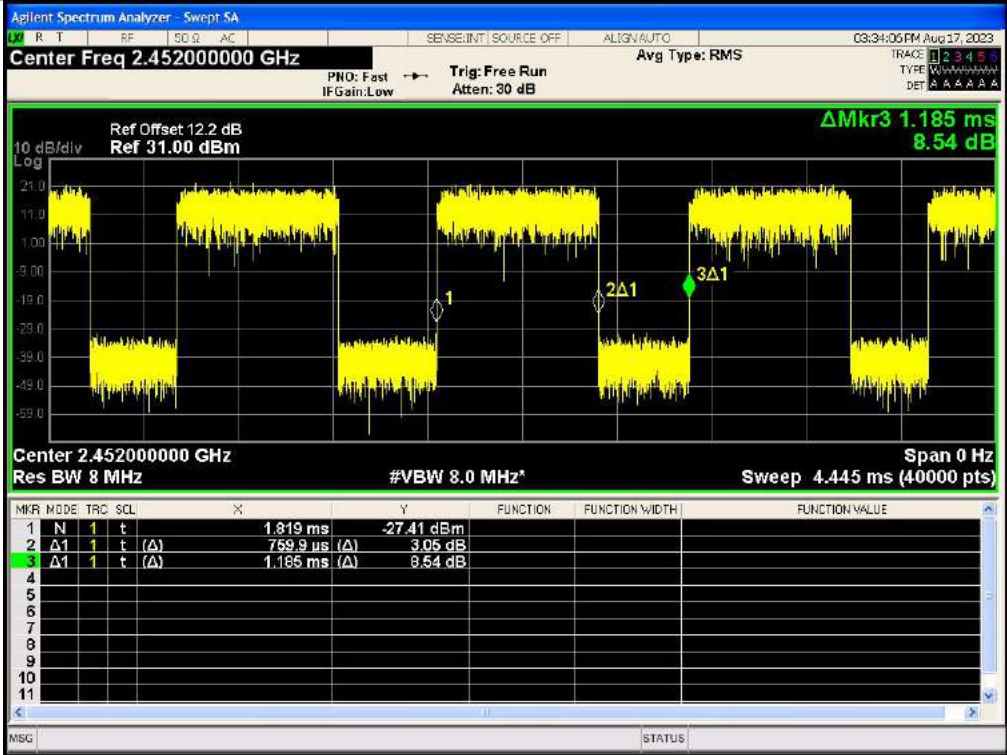


IEEE 802.11ax\_40MHz\_Channel 9


## APPENDIX VI. Power Spectral Density

### Test Result


Mode	Channel	RU & Index	PSD (dBm/3kHz) Ant. 0	Limit (dBm/3kHz)	Result
IEEE 802.11b	1	N/A	1.034	8	PASS
	6		-0.321		PASS
	11		0.230		PASS
IEEE 802.11g	1		-7.907		PASS
	6		-7.604		PASS
	11		-8.071		PASS
IEEE 802.11n_20	1		-3.159		PASS
	6		-4.713		PASS
	11		-4.022		PASS
IEEE 802.11n_40	3		-6.547		PASS
	6		-7.174		PASS
	9		-7.562		PASS
IEEE 802.11ax_20	1	SU	-4.785		PASS
	6		-5.314		PASS
	11		-5.152		PASS
IEEE 802.11ax_40	3		-7.560		PASS
	6		-8.037		PASS
	9		-8.059		PASS

### Test Graphs

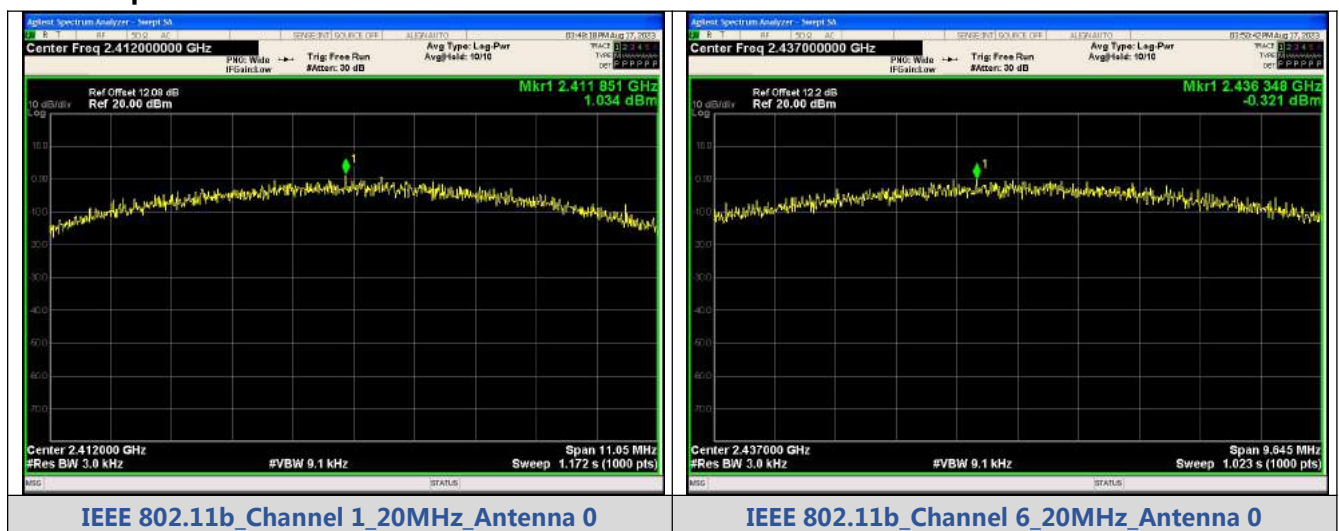

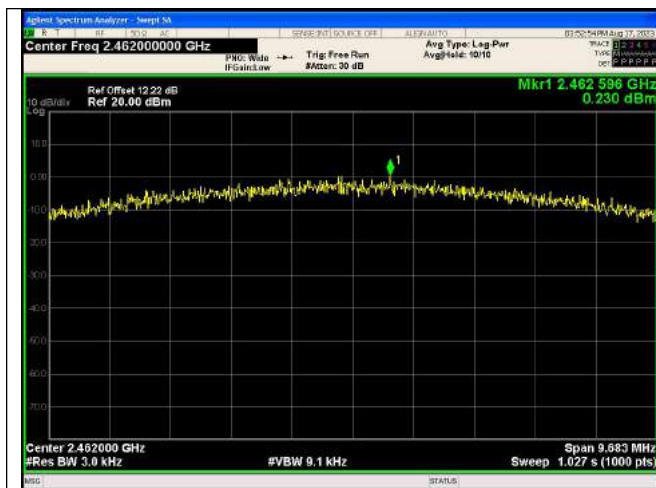


IEEE 802.11b\_Channel 11\_20MHz\_Antenna 0

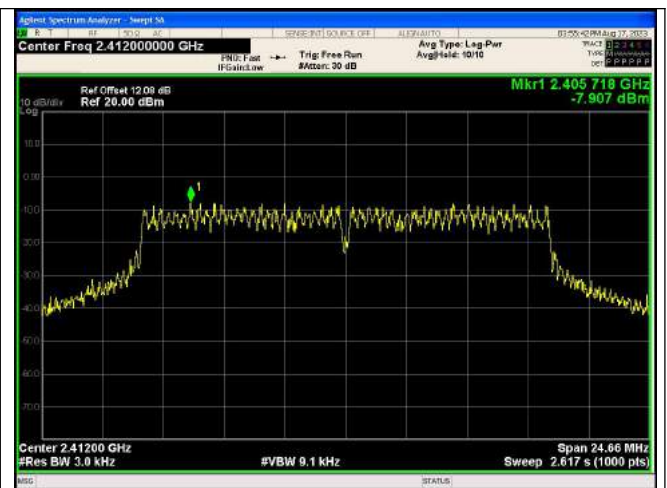

IEEE 802.11g\_Channel 1\_20MHz\_Antenna 0




IEEE 802.11g\_Channel 6\_20MHz\_Antenna 0

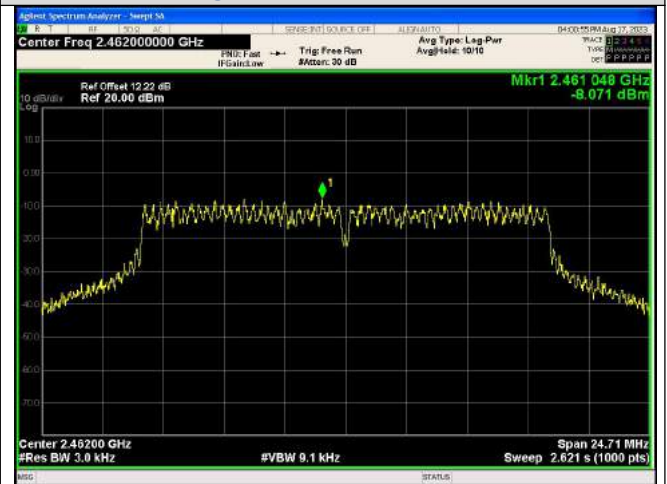

IEEE 802.11g\_Channel 11\_20MHz\_Antenna 0



IEEE 802.11n\_Channel 1\_20MHz\_Antenna 0

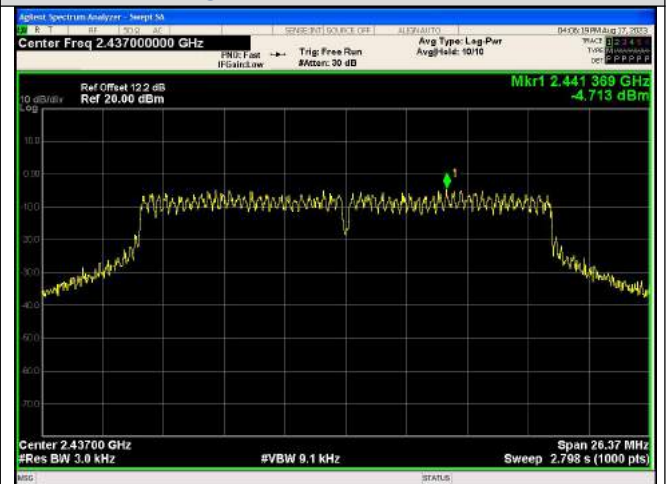


IEEE 802.11n\_Channel 6\_20MHz\_Antenna 0






IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0

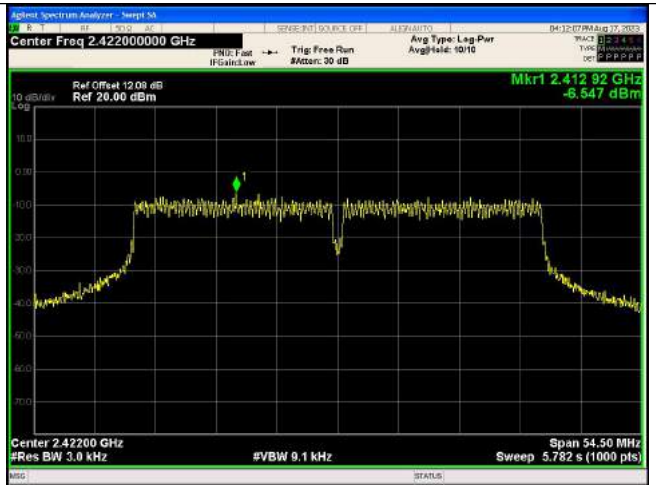

IEEE 802.11n\_Channel 3\_40MHz\_Antenna 0



IEEE 802.11n\_Channel 6\_40MHz\_Antenna 0

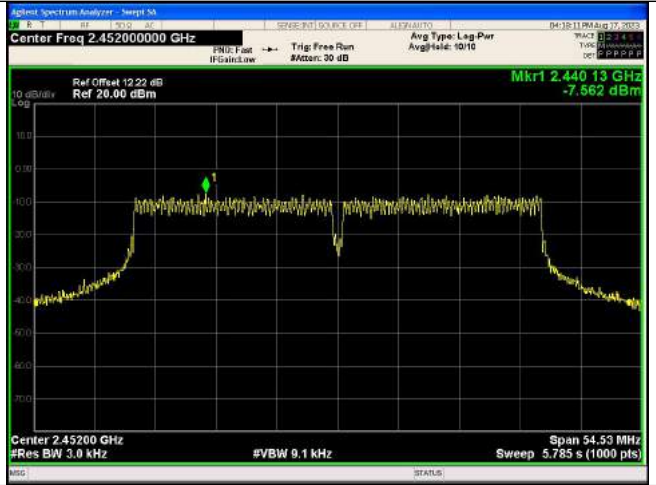

IEEE 802.11n\_Channel 9\_40MHz\_Antenna 0




IEEE 802.11ax\_Channel 1\_20MHz\_Antenna  
0\_RU&Index SU



IEEE 802.11ax\_Channel 6\_20MHz\_Antenna  
0\_RU&Index SU




IEEE 802.11ax\_Channel 11\_20MHz\_Antenna  
0\_RU&Index SU

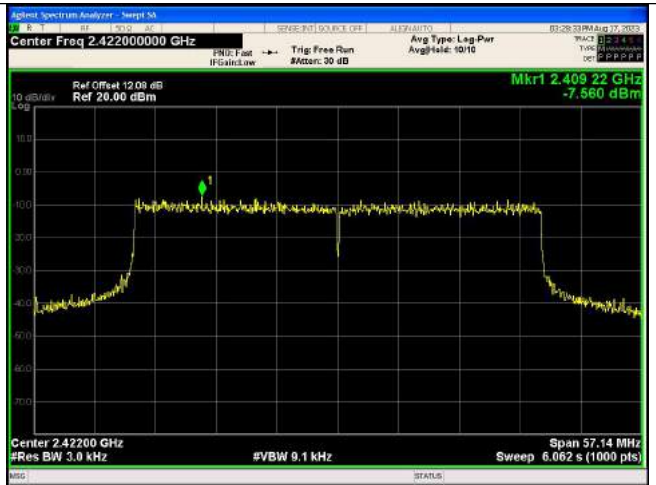

IEEE 802.11ax\_Channel 3\_40MHz\_Antenna  
0\_RU&Index SU



IEEE 802.11ax\_Channel 6\_40MHz\_Antenna  
0\_RU&Index SU

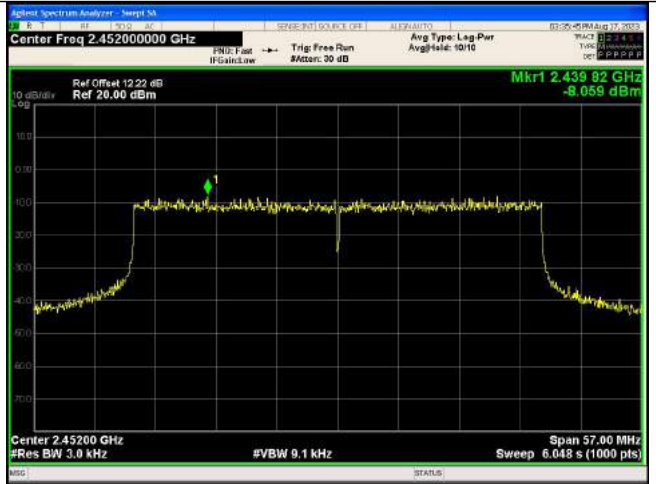

IEEE 802.11ax\_Channel 9\_40MHz\_Antenna  
0\_RU&Index SU

\*\*\*\*\* End of Report \*\*\*\*\*