



The Photos of SAR test

No. I19Z60845-SEM04

For

Samsung Electronics Co Ltd

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Modelname: SM-T295C

With

Hardware Version: REV0.4

Software Version: T295CZCU0ASEA

FCC ID: ZCASMT295C



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504


Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

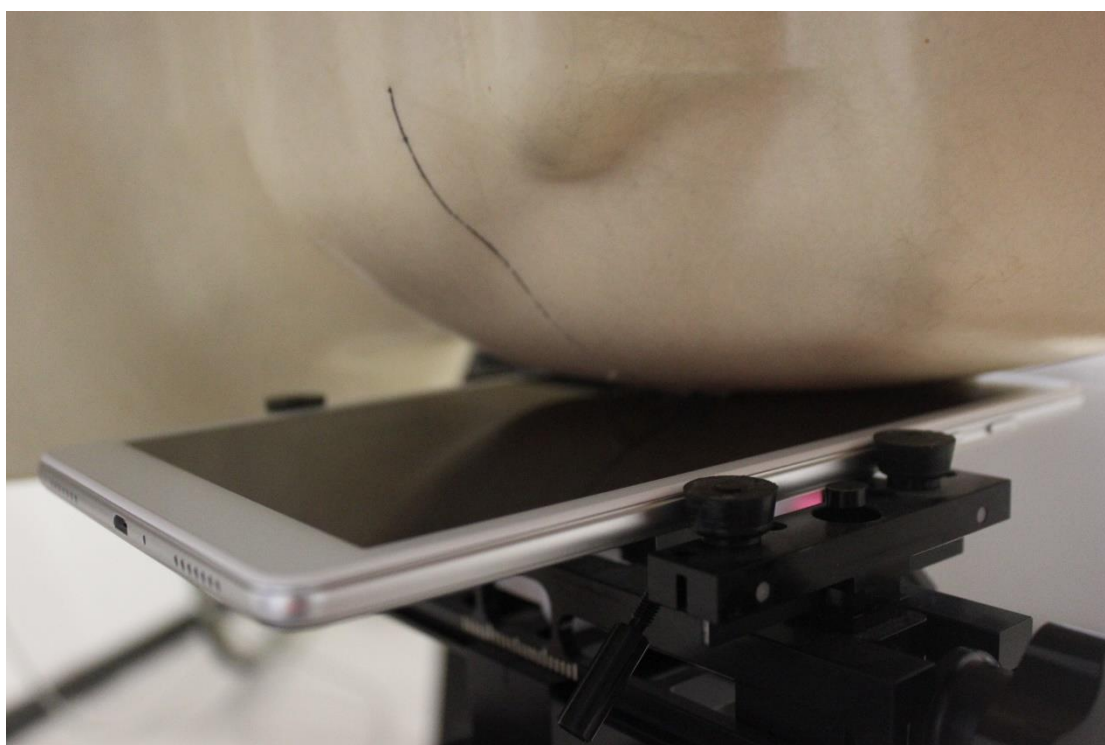


Picture 2: Left Hand Touch Cheek Position

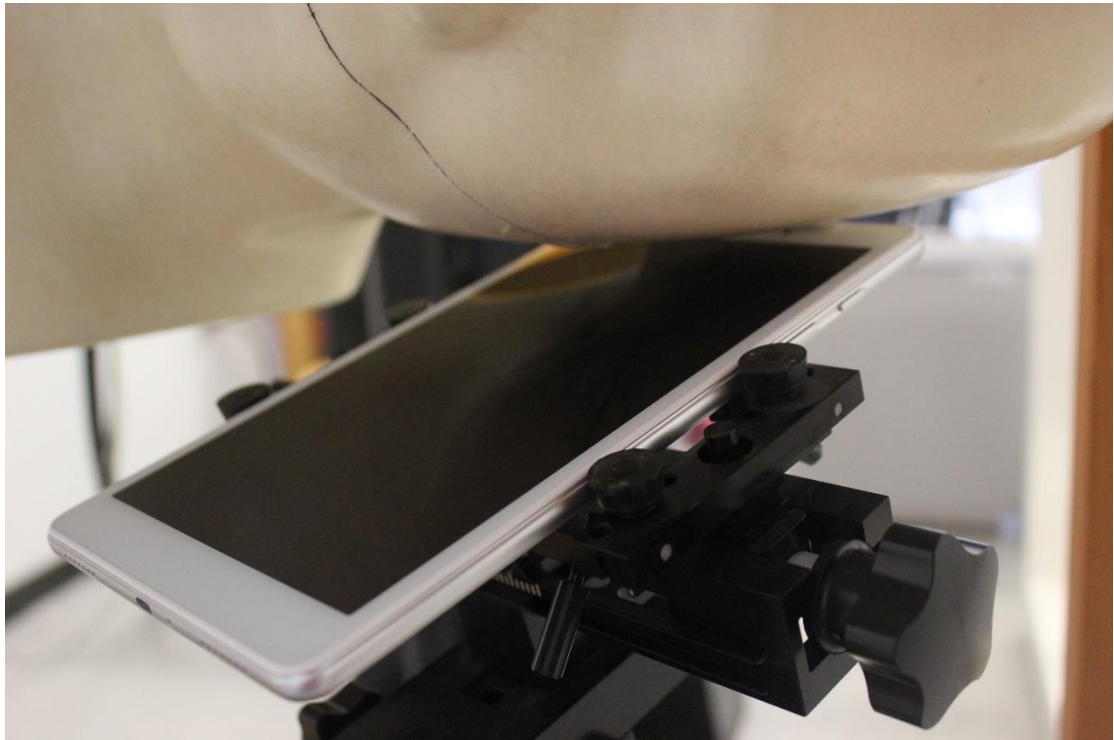

Picture 3: Left Hand Tilt 15° Position

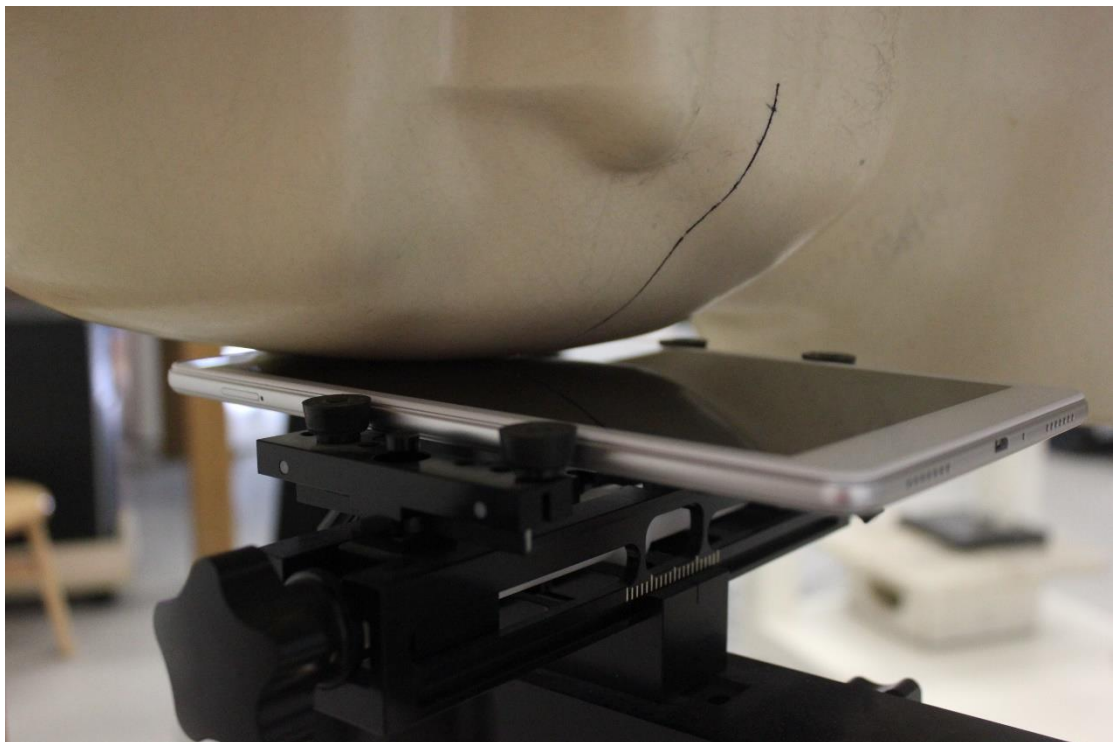


Picture 4: Right Hand Touch Cheek Position

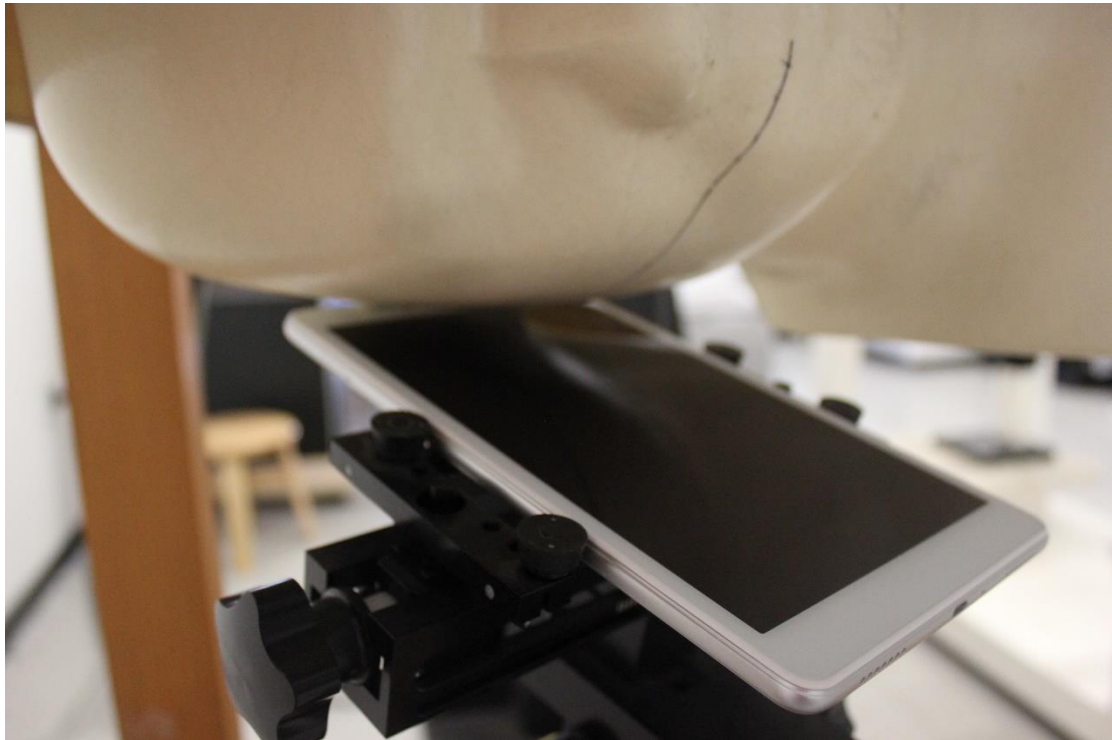

Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 9 test positions all with the distance =0/4/14/19/29/mm between the EUT and the phantom bottom:

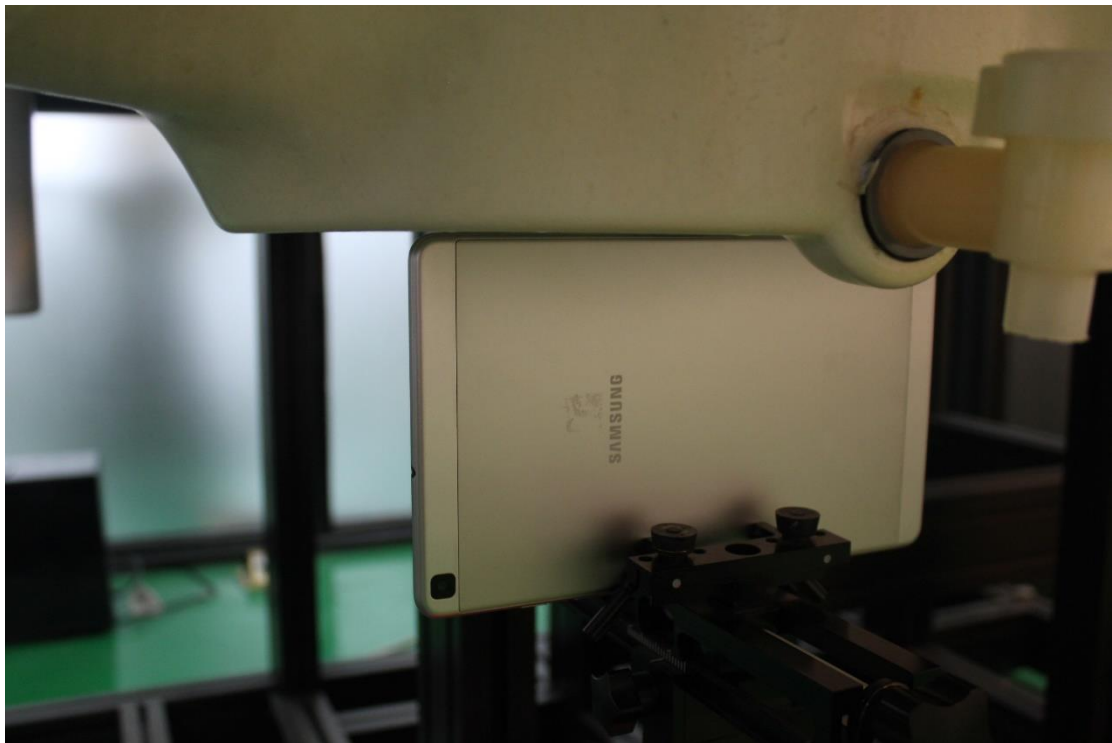


Picture 6: Left 0mm




Picture 7: Left 14mm

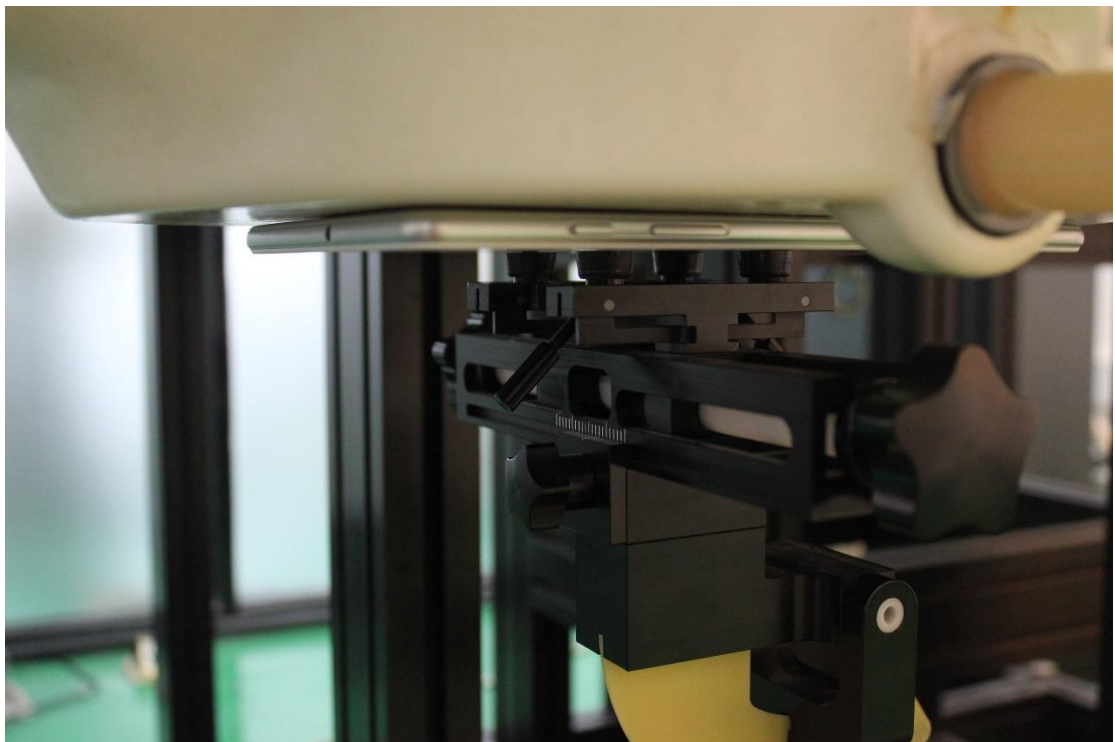


Picture 8: Rear 0mm

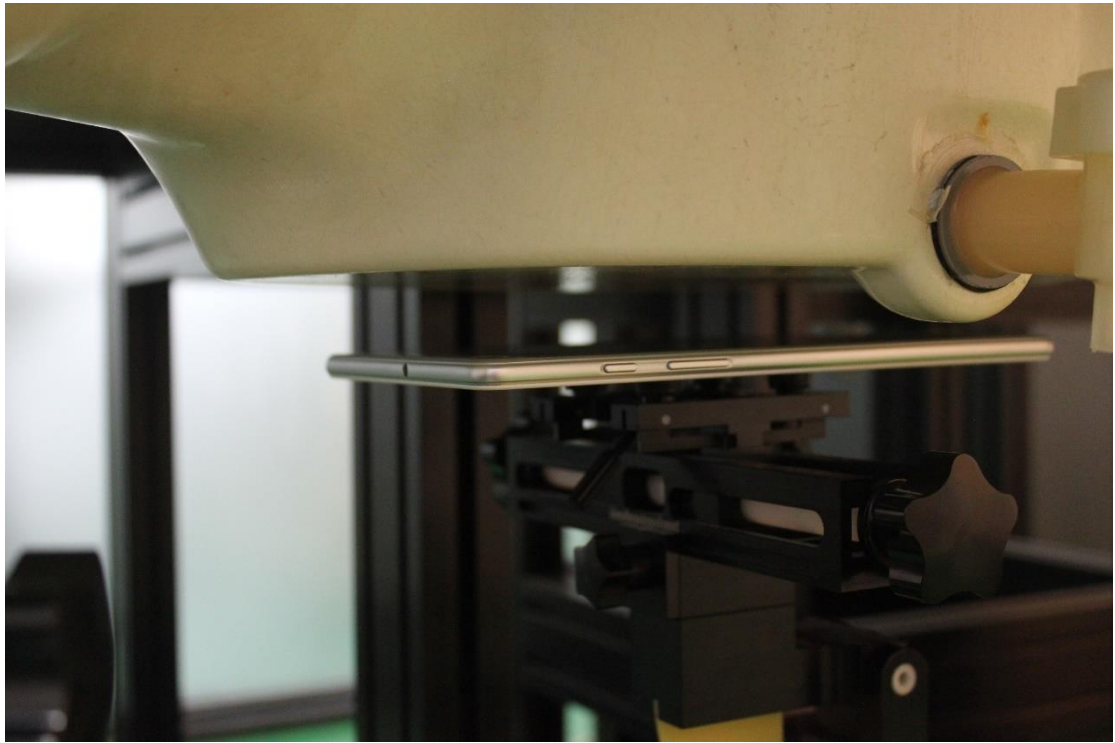


Picture 9: Rear 19mm

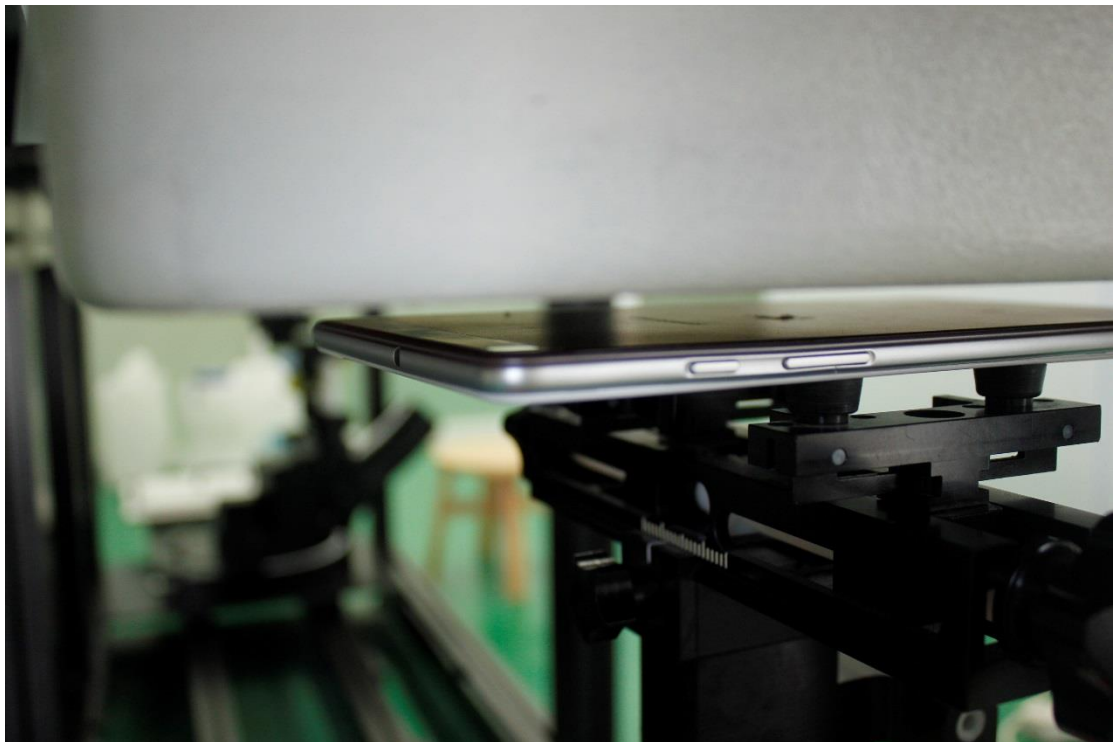


Picture 10: Rear 9mm

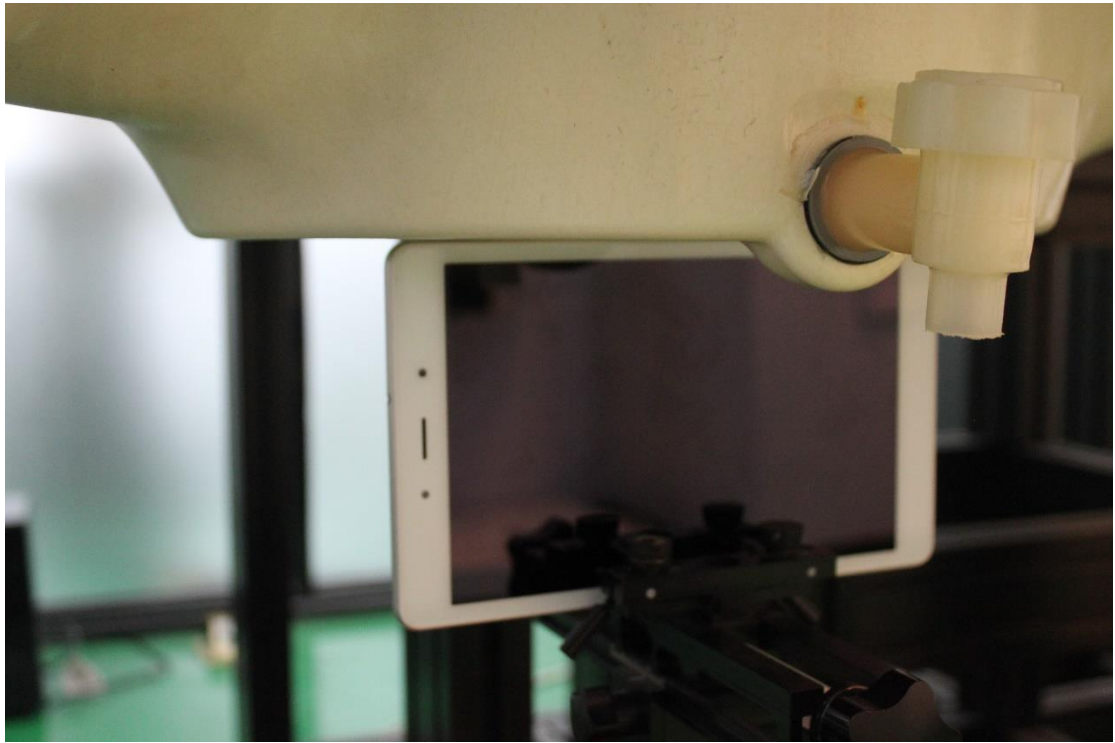


Picture 11: Right 0mm

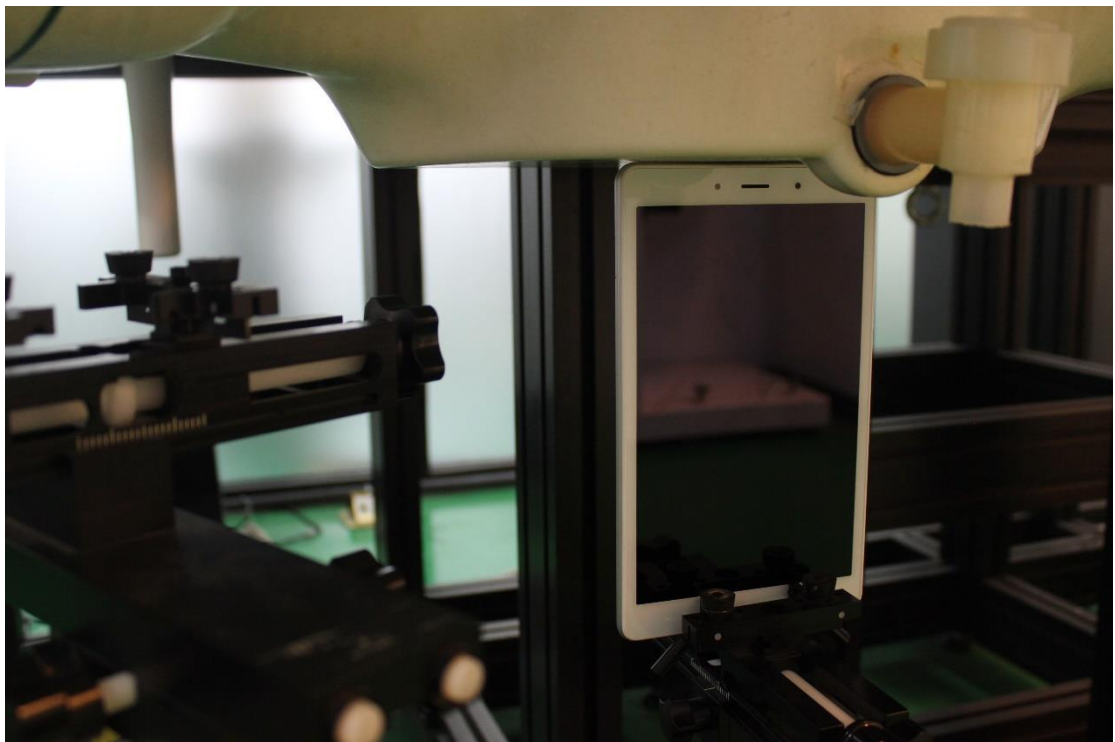

Picture 12: Top 0mm

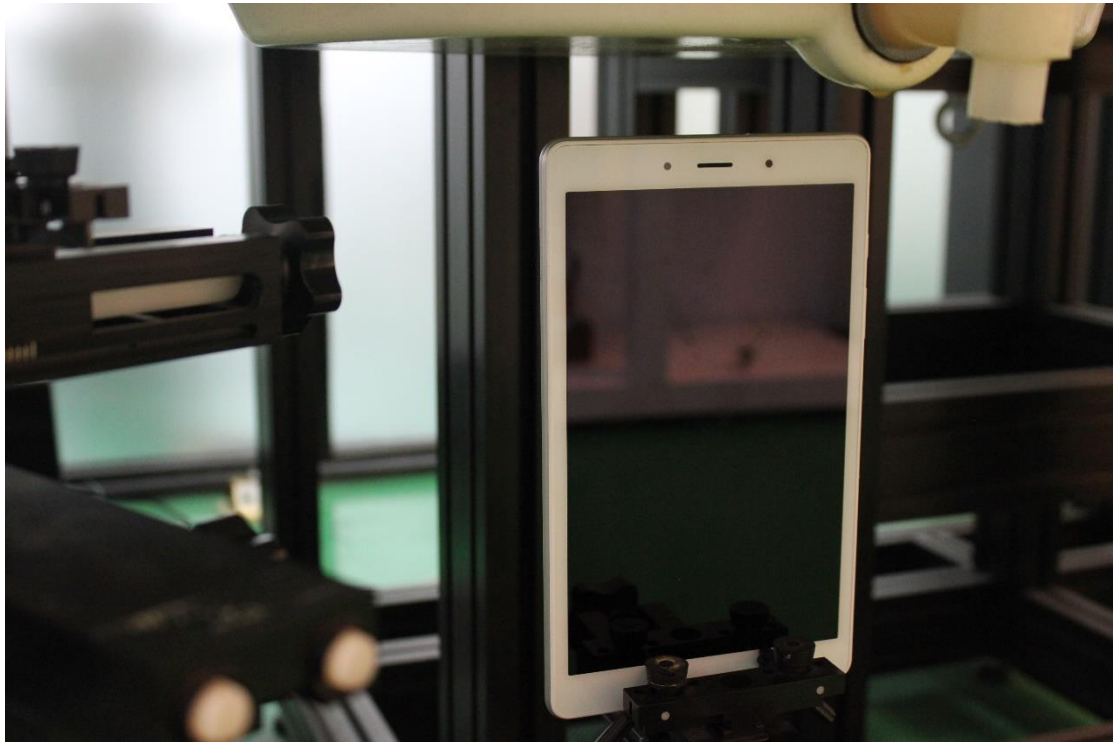

Picture 13: Top 4mm

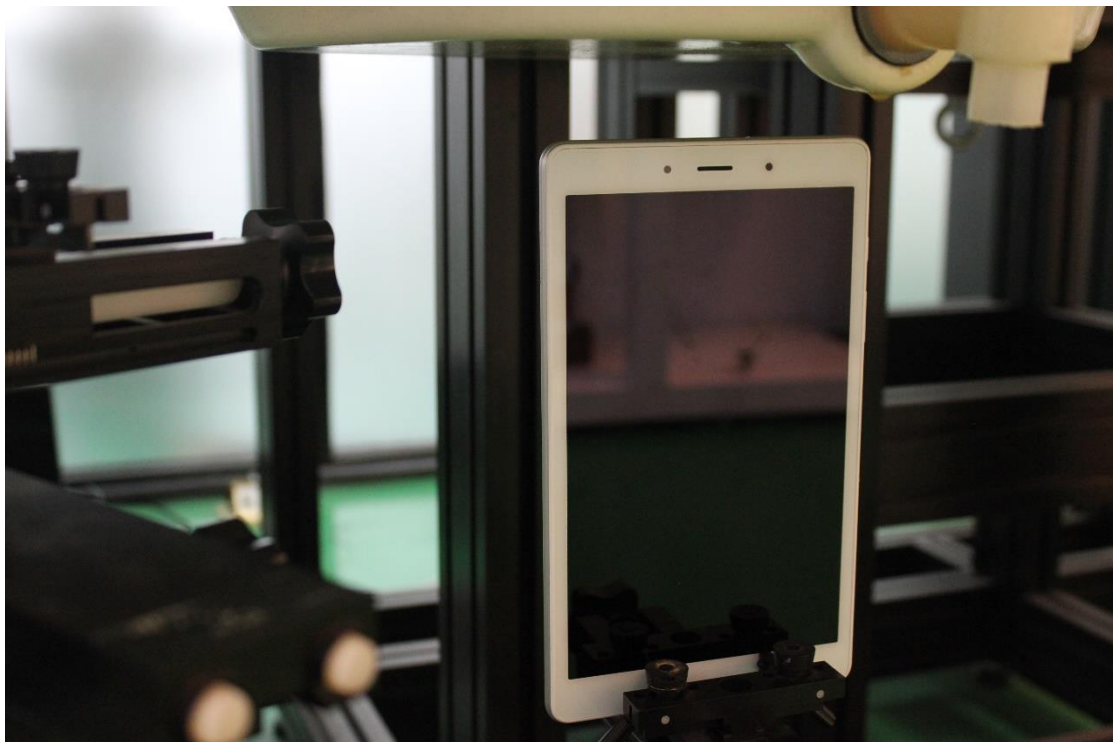

Picture 14: Top 29mm