

TEST REPORT

Reference No..... : WTH23X05102867W003
FCC ID : 2A7HY-DGE6
Applicant : Dragonglass Technology (SHENZHEN) Co., Ltd.
Address : Floor 4, No. 128, Potou Du West Road, Longxi community, Longgang street,
Longgang District, Shenzhen, Guangdong
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : Repeater
Model No..... : DGE6
Standards : FCC Part 15.247
Date of Receipt sample : 2023-05-12
Date of Test..... : 2023-05-12 to 2023-06-14
Date of Issue : 2023-06-14
Test Report Form No. : WTX_Part 15_247W
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

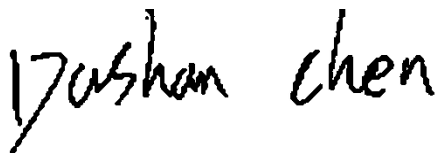

Dashan Chen

Approved by:



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS.....	10
3. ANTENNA REQUIREMENT.....	11
3.1 STANDARD APPLICABLE	11
3.2 EVALUATION INFORMATION	11
4. POWER SPECTRAL DENSITY.....	12
4.1 STANDARD APPLICABLE	12
4.2 TEST SETUP BLOCK DIAGRAM	12
4.3 TEST PROCEDURE.....	12
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	12
5. DTS BANDWIDTH	13
5.1 STANDARD APPLICABLE	13
5.2 TEST SETUP BLOCK DIAGRAM	13
5.3 TEST PROCEDURE	13
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	13
6. RF OUTPUT POWER.....	14
6.1 STANDARD APPLICABLE	14
6.2 TEST SETUP BLOCK DIAGRAM	14
6.3 TEST PROCEDURE	14
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	14
7. FIELD STRENGTH OF SPURIOUS EMISSIONS.....	15
7.1 STANDARD APPLICABLE	15
7.2 TEST PROCEDURE	15
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	17
8. OUT OF BAND EMISSIONS.....	24
8.1 STANDARD APPLICABLE	24
8.2 TEST PROCEDURE	24
8.3 SUMMARY OF TEST RESULTS/PLOTS.....	25
9. CONDUCTED EMISSIONS	42
9.1 TEST PROCEDURE	42
9.2 BASIC TEST SETUP BLOCK DIAGRAM	42
9.3 TEST RECEIVER SETUP	42
9.4 SUMMARY OF TEST RESULTS/PLOTS.....	42
APPENDIX SUMMARY	45
APPENDIX A.....	46
APPENDIX B.....	55
APPENDIX C.....	64
APPENDIX D.....	73
APPENDIX PHOTOGRAPHS.....	90

Report version

Version No.	Date of issue	Description
Rev.00	2023-06-14	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Repeater
Trade Name:	Dragonglass
Model No.:	DGE6
Adding Model:	/
Rated Voltage:	AC120V
Battery Capacity:	/
Power Adapter:	/
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	Antenna 1 :14.34dBm (Conducted) Antenna 2 :14.55dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	FPC Antenna
Antenna Gain:	3.12dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz
Note: The 2.4GHz WIFI has two antennas and support Multiple Outputs for 802.11n mode for this report; Antenna 1 Gain is 3.12dBi; Antenna 2 Gain is 3.12dBi; For this function is belong to Correlated Categorization equipment According to KDB 662911, for same directional gain. Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi = $3.12 + 10 \log(2)$ dBi = 6.13dBi		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Network Cable	1.0	Unshielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Router	TP-LINK	TL-WR842N	13809116014

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2023-02-25	2024-02-24
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2023-02-25	2024-02-24
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2023-02-25	2024-02-24
WTXE1004A 1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2023-02-25	2024-02-24
☒ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2023-02-25	2024-02-24
WTXE1007A 1001	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2023-02-25	2024-02-24
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2023-02-25	2024-02-24
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-20	2026-03-19
☒ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2023-02-25	2024-02-24
WTXE1007A 1001	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2023-02-25	2024-02-24
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	14918	2023-02-25	2024-02-24
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2021-03-19	2024-03-18
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2021-03-19	2024-03-18
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2023-02-25	2024-02-24
☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2024-04-08
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A101 79	2023-02-25	2024-02-24

WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2023-02-25	2024-02-24
☐ Chamber C: Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2024-05-27
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2023-02-25	2024-02-24
☐ Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
WTXE1103A 1005	Horn Antenna	POAM	RTF-11A	LP228060 221	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2023-02-25	2024-02-24
☒ Conducted Room 1#						
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2023-02-25	2024-02-24
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2023-02-25	2024-02-24
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-224	2023-02-25	2024-02-24
☐ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2023-02-25	2024-02-24
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2023-02-25	2024-02-24

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information


This product has two FPC Antennas, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram

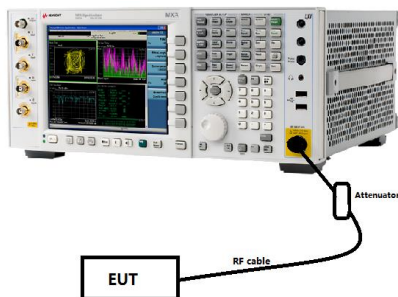

4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

4.4 Summary of Test Results/Plots


Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram

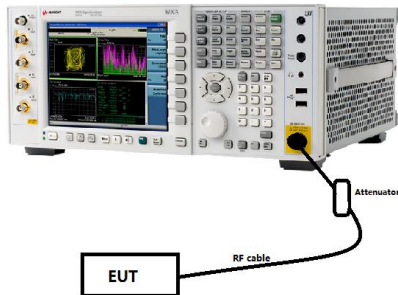

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots


Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram

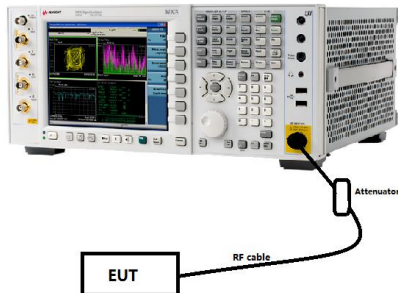

6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- Set span to at least 1.5 times the OBW.
- Set RBW = 1-5% of the OBW, not to exceed 1MHz.
- Set VBW $\geq 3 \times$ RBW.
- Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This gives bin-to-bin spacing $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

7.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

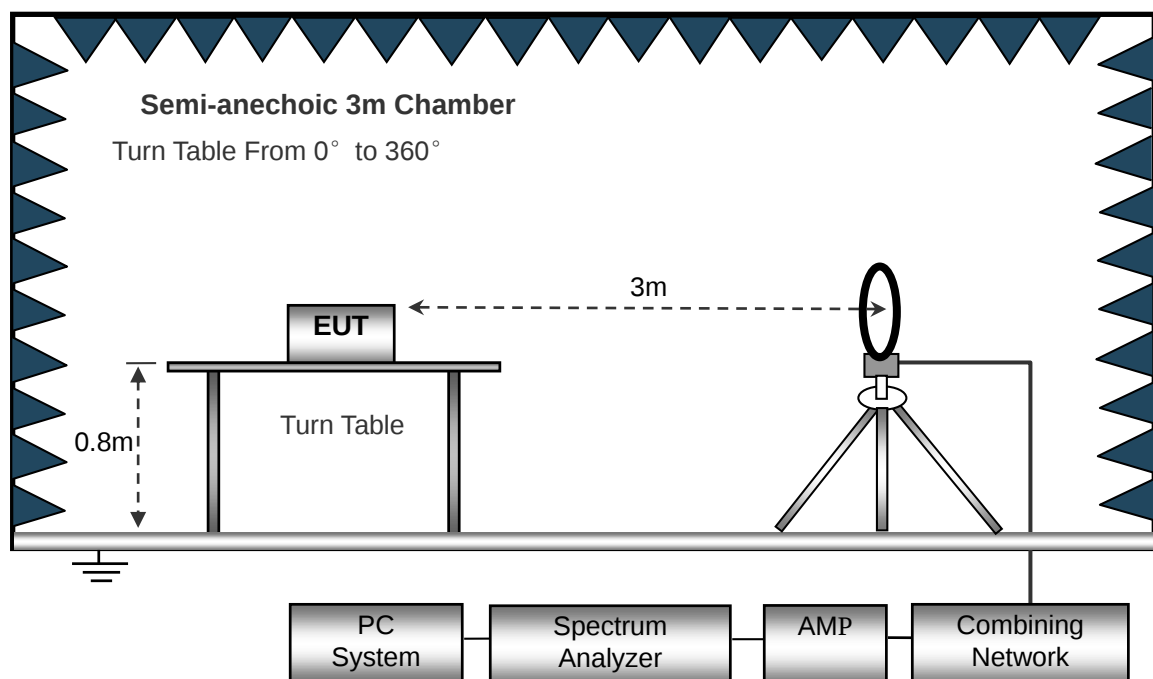

The test setup for emission measurement from 30MHz to 1GHz.

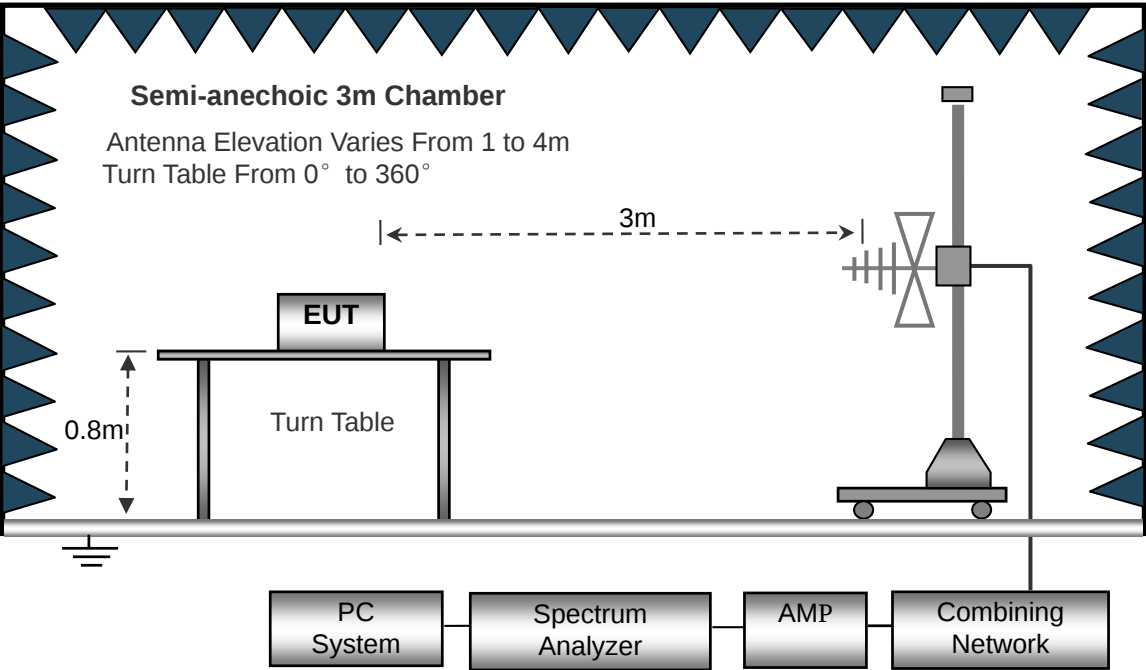

The test setup for emission measurement above 1GHz.

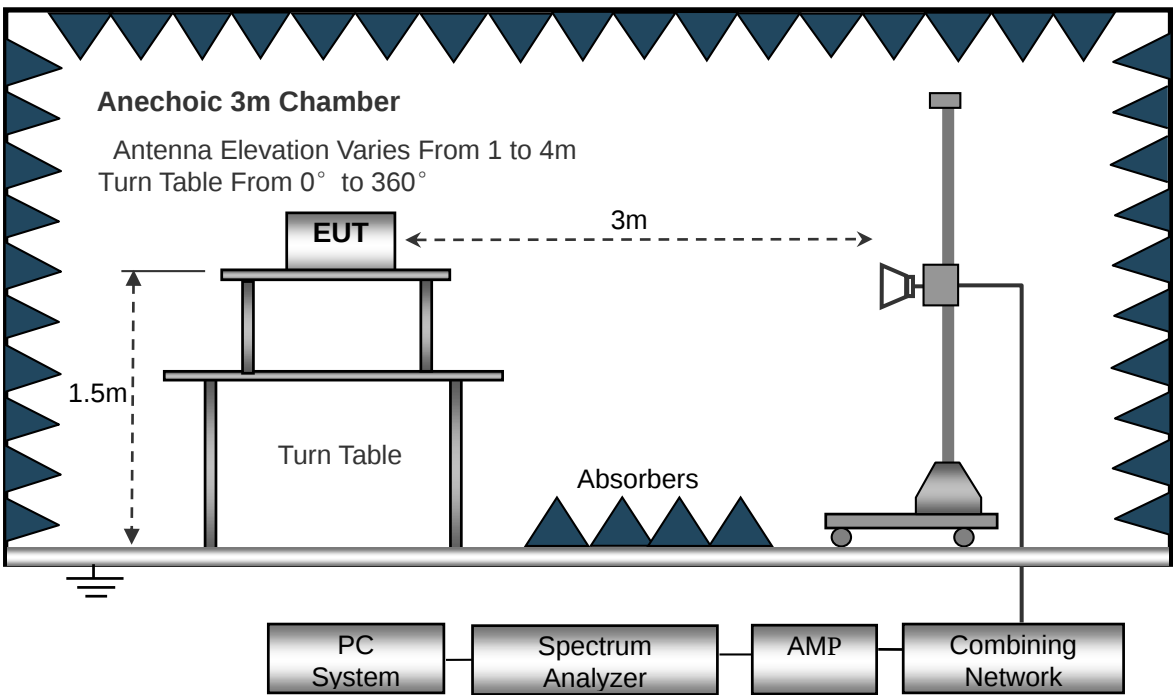

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

7.4 Summary of Test Results/Plots

Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported. All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b_11Mbps) is recorded in this report.


- Spurious Emissions Below 1GHz
- Antenna 1

802.11b_11Mbps			
Test Channel	Low(worst case)	Polarity:	Horizontal

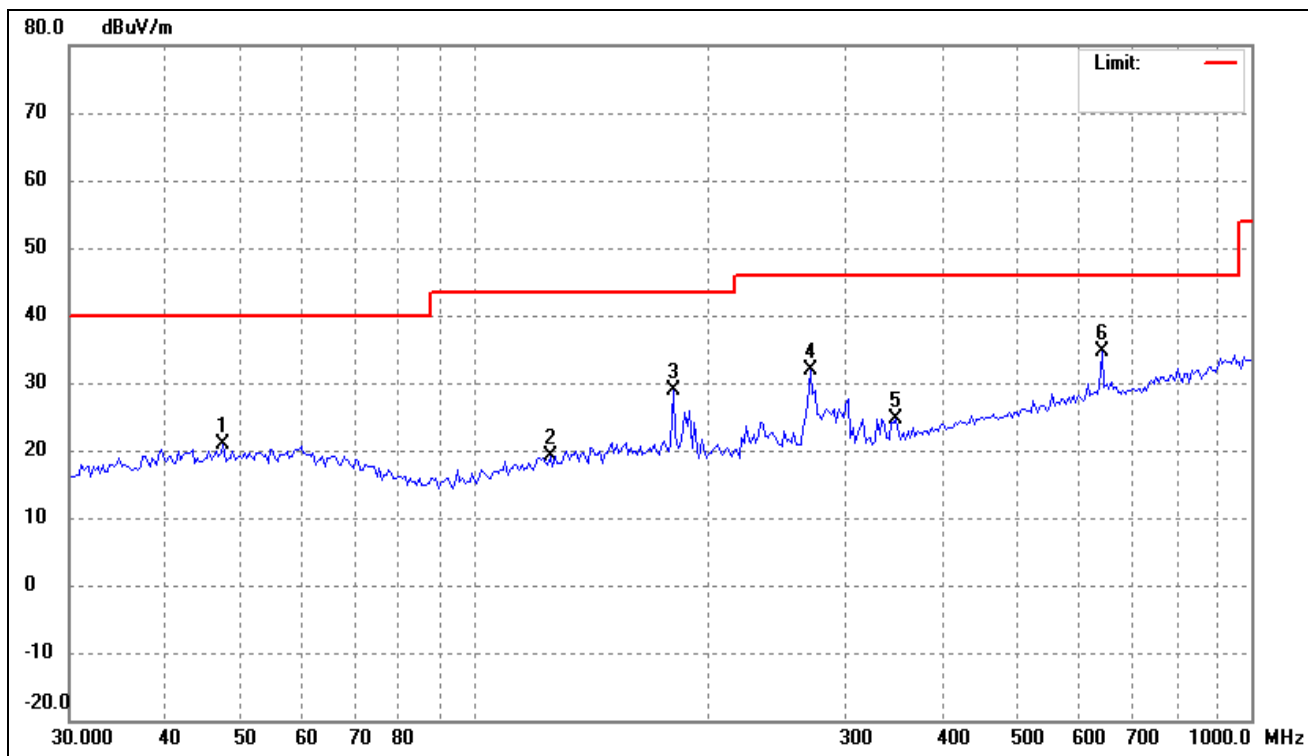

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	47.3688	29.10	-8.29	20.81	40.00	-19.19	-	-	peak
2	124.9249	29.39	-10.19	19.20	43.50	-24.30	-	-	peak
3	180.0304	39.09	-10.32	28.77	43.50	-14.73	-	-	peak
4	270.6162	41.25	-9.30	31.95	46.00	-14.05	-	-	peak
5	348.5145	31.80	-7.14	24.66	46.00	-21.34	-	-	peak
6	642.2923	35.85	-1.33	34.52	46.00	-11.48	-	-	peak

802.11b_11Mbps			
Test Channel	Low(worst case)	Polarity:	Vertical

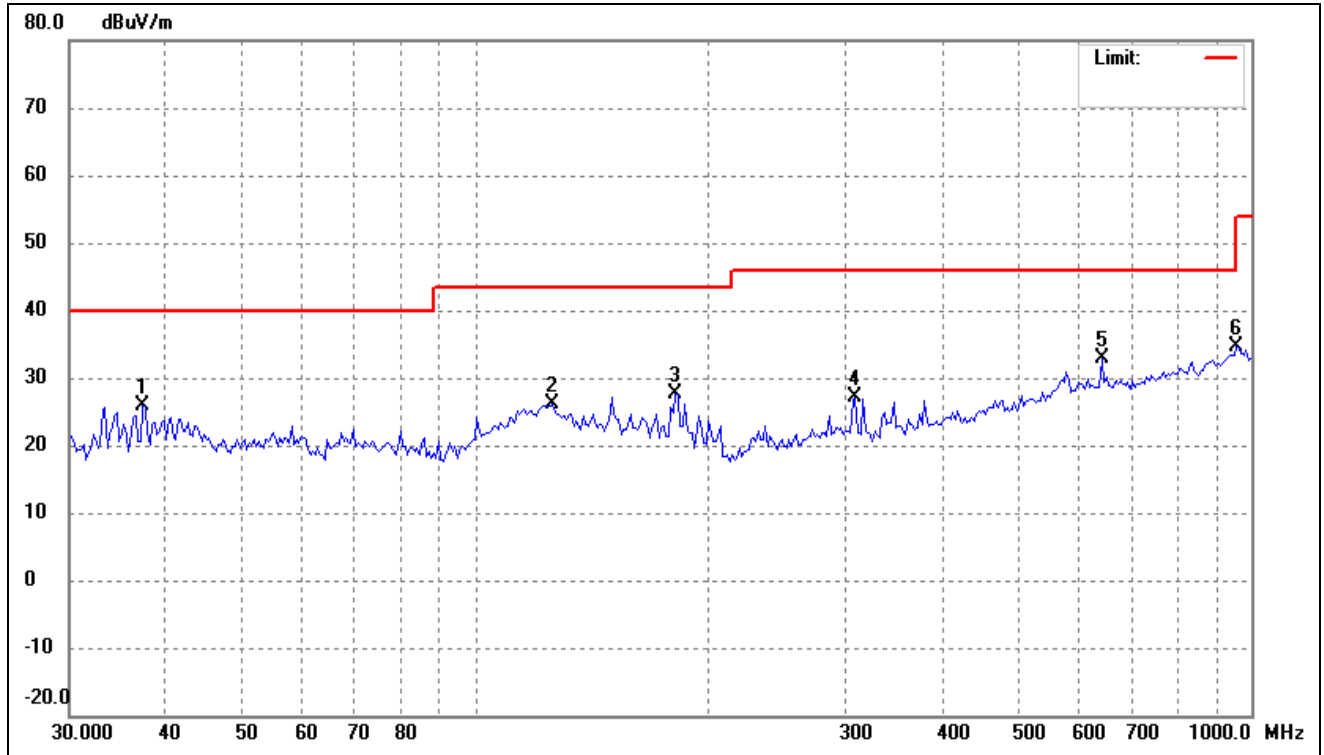


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	37.3017	34.93	-9.06	25.87	40.00	-14.13	-	-	peak
2	125.8059	36.15	-10.14	26.01	43.50	-17.49	-	-	peak
3	181.3000	38.03	-10.46	27.57	43.50	-15.93	-	-	peak
4	309.2710	35.14	-8.00	27.14	46.00	-18.86	-	-	peak
5	642.2923	34.25	-1.33	32.92	46.00	-13.08	-	-	peak
6	958.7135	32.35	2.26	34.61	46.00	-11.39	-	-	peak

➤ Antenna 2


802.11b_11Mbps

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

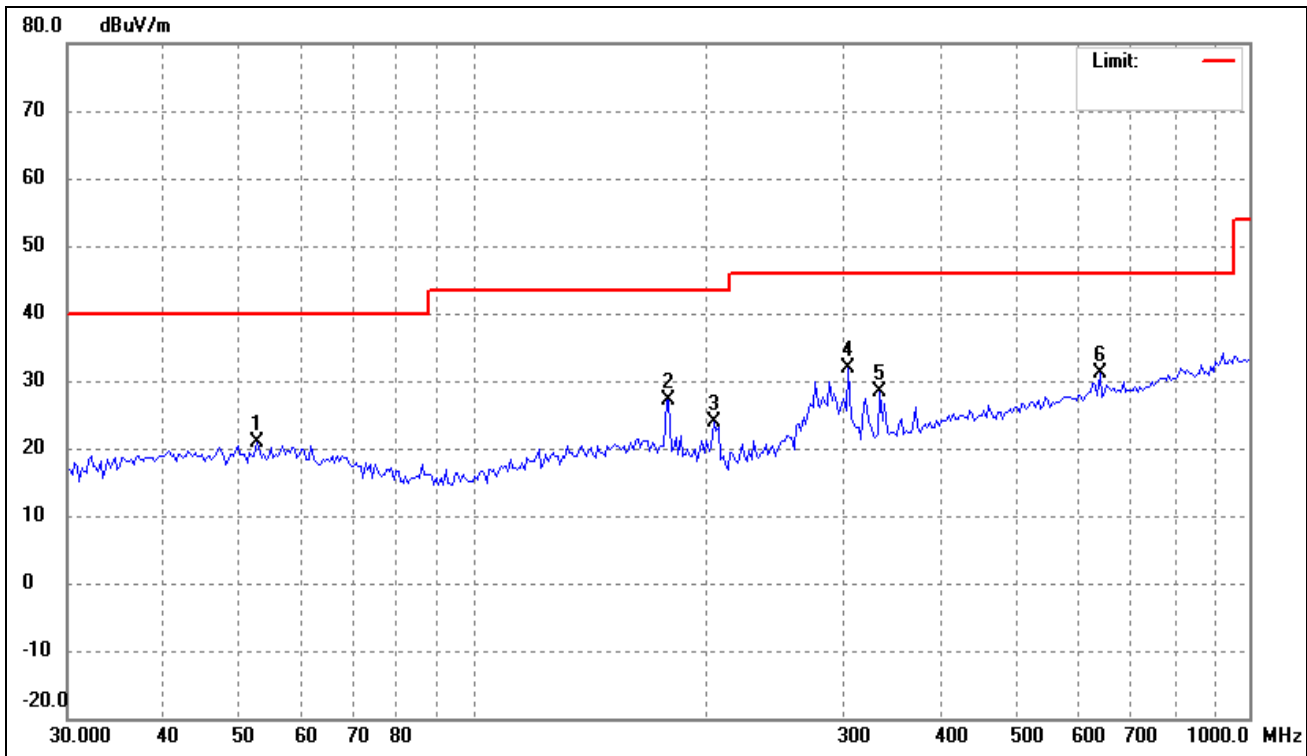

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	52.6345	29.28	-8.37	20.91	40.00	-19.09	-	-	peak
2	178.7697	37.36	-10.14	27.22	43.50	-16.28	-	-	peak
3	204.3052	36.04	-12.06	23.98	43.50	-19.52	-	-	peak
4	304.9548	39.96	-8.12	31.84	46.00	-14.16	-	-	peak
5	334.1255	35.75	-7.39	28.36	46.00	-17.64	-	-	peak
6	642.2923	32.47	-1.33	31.14	46.00	-14.86	-	-	peak

802.11b_11Mbps			
Test Channel	Low(worst case)	Polarity:	Vertical

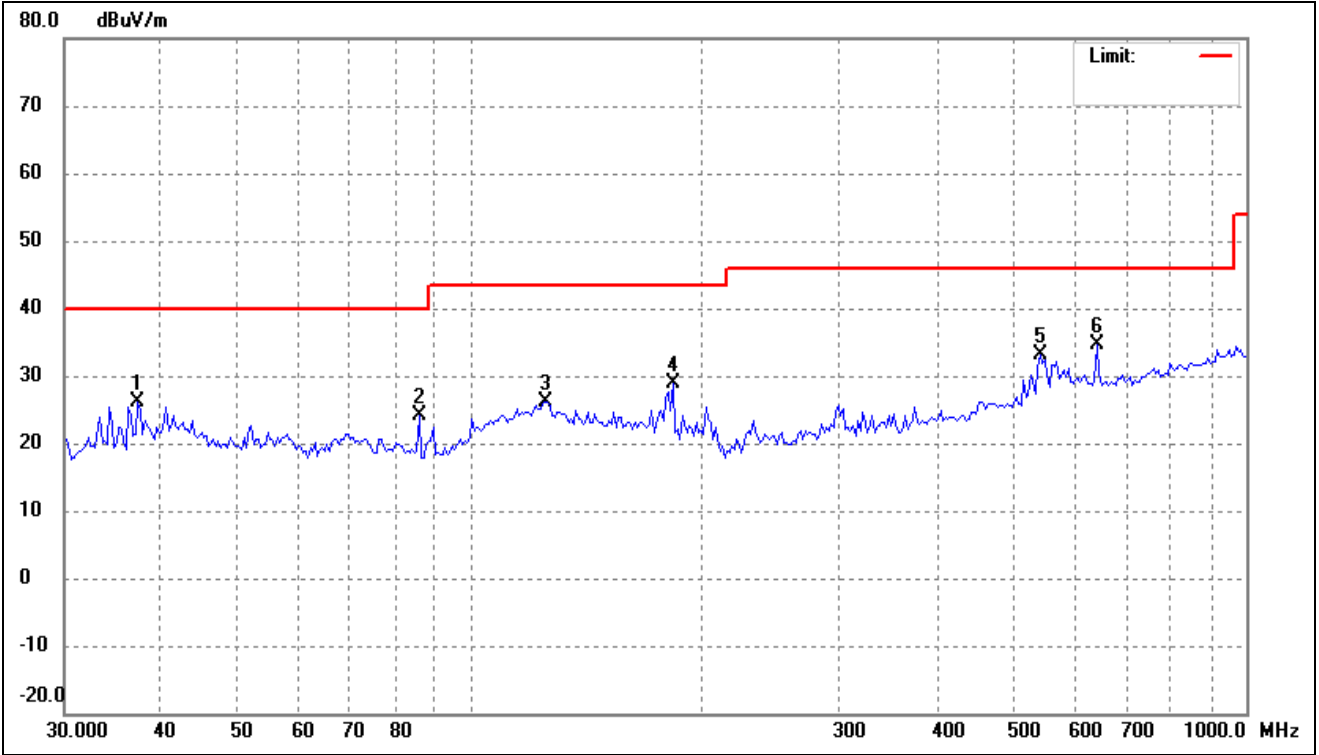

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	37.3017	35.27	-9.06	26.21	40.00	-13.79	-	-	peak
2	86.0796	37.13	-13.04	24.09	40.00	-15.91	-	-	peak
3	124.9249	36.38	-10.19	26.19	43.50	-17.31	-	-	peak
4	182.5785	39.56	-10.60	28.96	43.50	-14.54	-	-	peak
5	542.6104	36.18	-3.05	33.13	46.00	-12.87	-	-	peak
6	642.2923	35.89	-1.33	34.56	46.00	-11.44	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- Test Mode: 802.11b_11Mbps
- Antenna 1

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	55.97	-12.64	43.33	74.00	-30.67	H	PK
7236.000	54.67	-6.29	48.38	74.00	-25.62	H	PK
4820.583	59.69	-12.64	47.05	74.00	-26.95	V	PK
7236.000	54.11	-6.29	47.82	74.00	-26.18	V	PK
Middle Channel-2437MHz							
4870.396	59.14	-12.58	46.56	74.00	-27.44	H	PK
7311.000	54.44	-6.48	47.96	74.00	-26.04	H	PK
4870.396	60.82	-12.58	48.24	74.00	-25.76	V	PK
7311.000	55.60	-6.48	49.12	74.00	-24.88	V	PK
High Channel-2462MHz							
4920.723	60.79	-12.50	48.29	74.00	-25.71	H	PK
7386.000	54.42	-6.68	47.74	74.00	-26.26	H	PK
4920.723	62.88	-12.50	50.38	74.00	-23.62	V	PK
7386.000	54.14	-6.68	47.46	74.00	-26.54	V	PK

➤ Antenna 2

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4820.583	58.34	-12.64	45.70	74.00	-28.30	H	PK
7236.000	54.54	-6.29	48.25	74.00	-25.75	H	PK
4820.583	59.29	-12.64	46.65	74.00	-27.35	V	PK
7236.000	55.04	-6.29	48.75	74.00	-25.25	V	PK
Middle Channel-2437MHz							
4870.396	58.29	-12.58	45.71	74.00	-28.29	H	PK
7311.000	54.75	-6.48	48.27	74.00	-25.73	H	PK
4870.396	59.90	-12.58	47.32	74.00	-26.68	V	PK
7311.000	54.87	-6.48	48.39	74.00	-25.61	V	PK
High Channel-2462MHz							
4920.723	59.45	-12.50	46.95	74.00	-27.05	H	PK
7386.000	53.95	-6.68	47.27	74.00	-26.73	H	PK
4920.723	61.43	-12.50	48.93	74.00	-25.07	V	PK
7386.000	54.20	-6.68	47.52	74.00	-26.48	V	PK

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission

must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots


- Radiated test
- Antenna 1

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal(worst case)

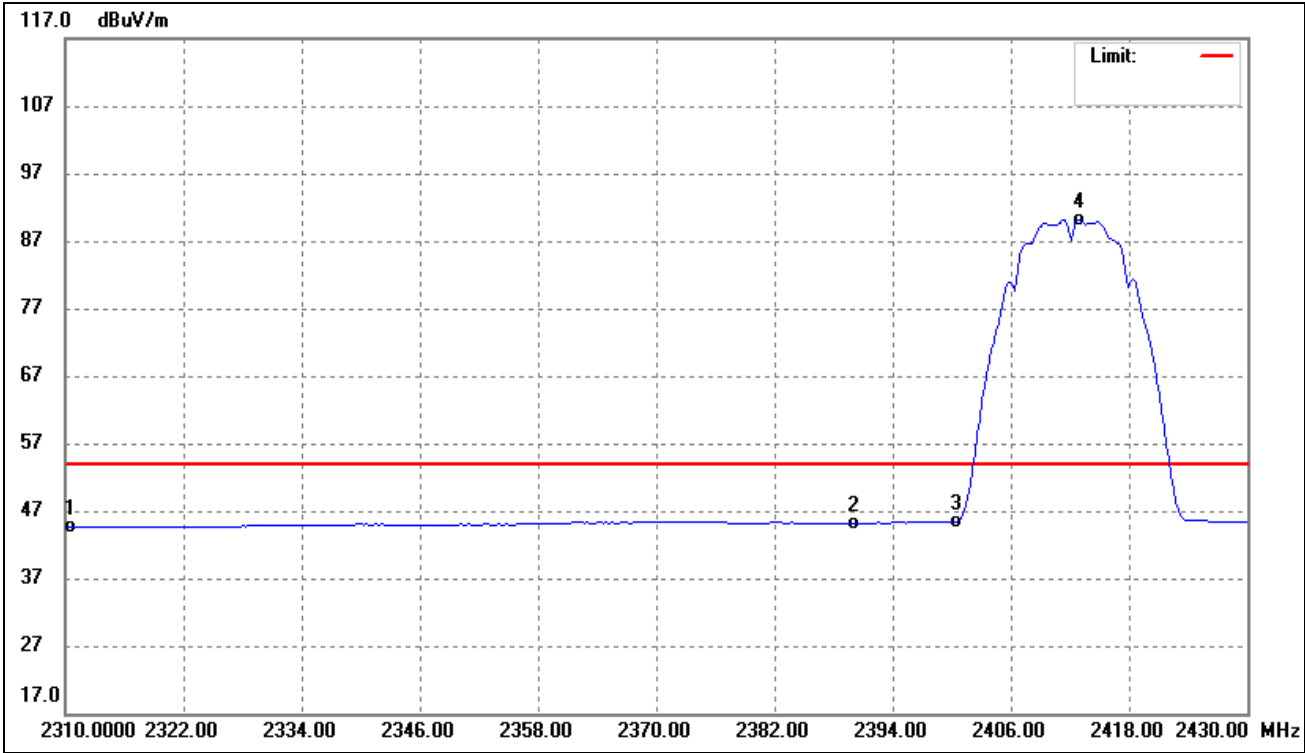


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.71	0.98	44.69	54.00	-9.31	Average Detector
	2310.000	57.72	0.98	58.70	74.00	-15.30	Peak Detector
2	2390.000	44.12	1.13	45.25	54.00	-8.75	Average Detector
	2390.000	56.42	1.13	57.55	74.00	-16.45	Peak Detector
3	2400.000	44.25	1.15	45.40	Delta=44.84dBc		Average Detector
4	2412.926	89.06	1.18	90.24			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal(worst case)

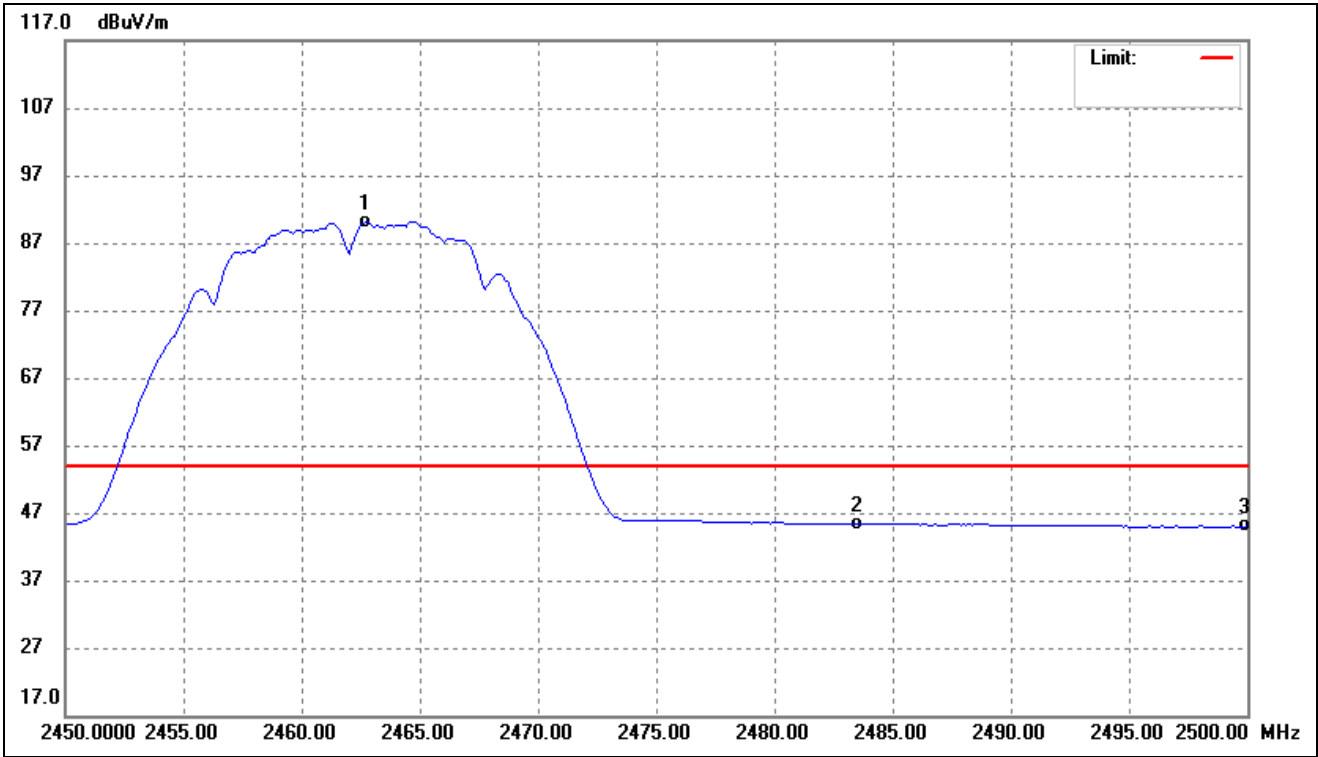


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.725	88.85	1.27	90.12	/	/	Average Detector
	2463.026	96.04	1.27	97.31	/	/	Peak Detector
2	2483.500	44.05	1.32	45.37	54.00	-8.63	Average Detector
	2483.500	56.68	1.32	58.00	74.00	-16.00	Peak Detector
3	2500.000	43.66	1.35	45.01	54.00	-8.99	Average Detector
	2500.000	56.83	1.35	58.18	74.00	-15.82	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Horizontal(worst case)

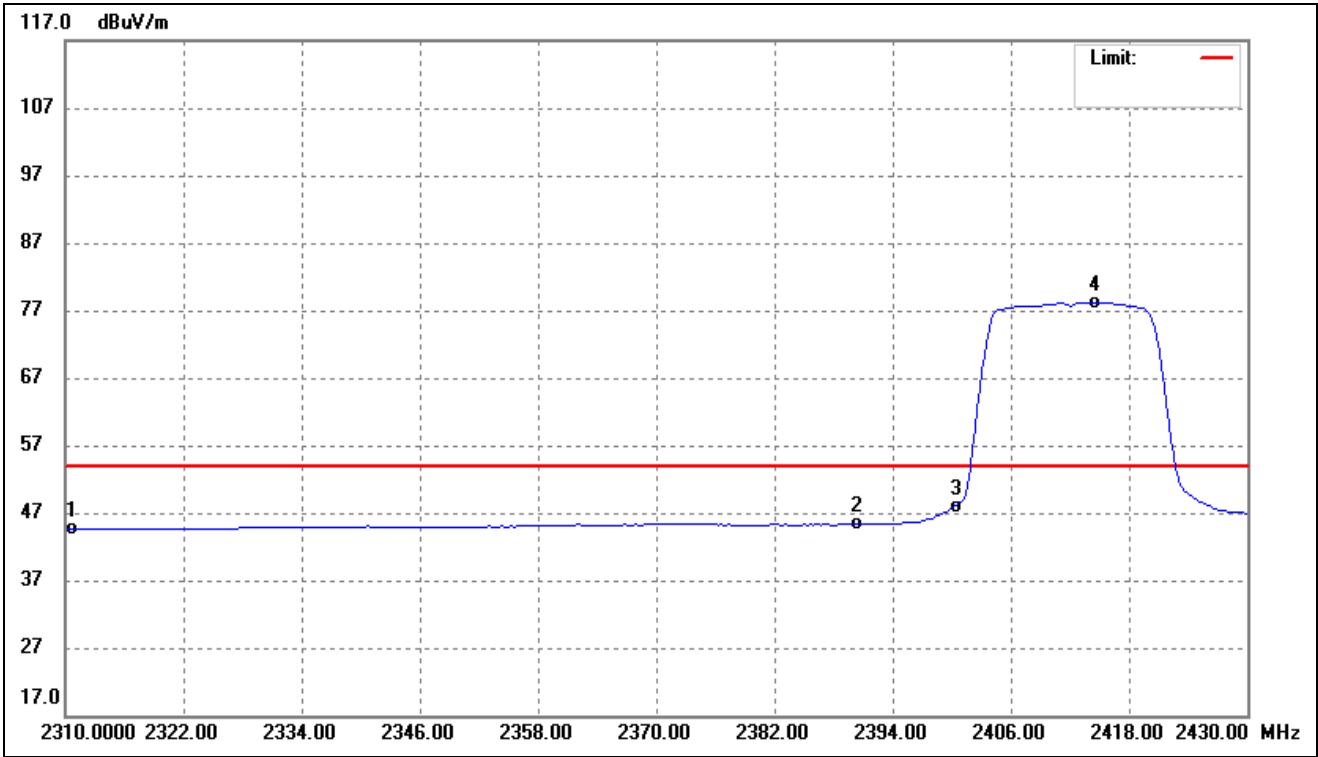


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.72	0.98	44.70	54.00	-9.30	Average Detector
	2310.000	56.44	0.98	57.42	74.00	-16.58	Peak Detector
2	2390.000	44.14	1.13	45.27	54.00	-8.73	Average Detector
	2390.000	56.66	1.13	57.79	74.00	-16.21	Peak Detector
3	2400.000	46.68	1.15	47.83	Delta=30.30dBc		Average Detector
4	2414.609	76.95	1.18	78.13			Average Detector

802.11g_54Mbps			
Test Channel	High	Polarity:	Horizontal(worst case)

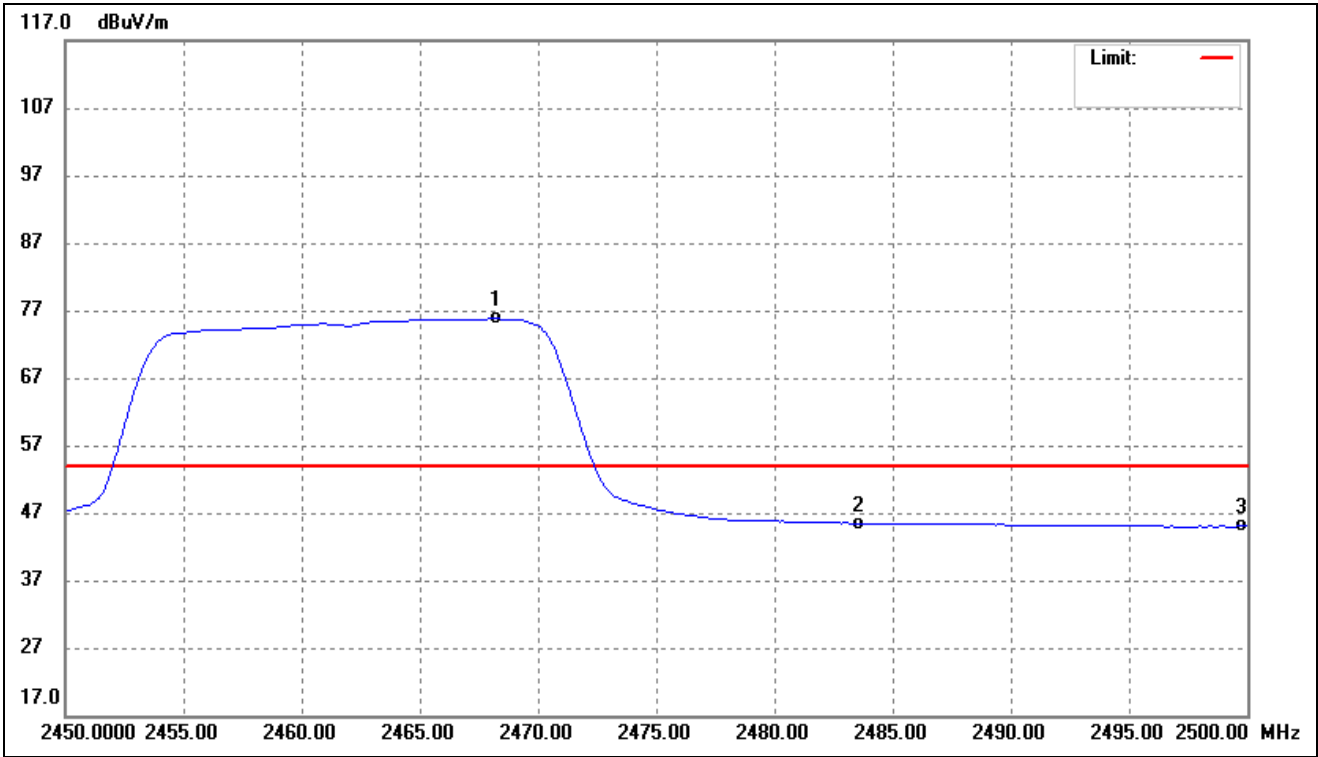


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2468.136	74.54	1.28	75.82	/	/	Average Detector
	2467.535	96.19	1.28	97.47	/	/	Peak Detector
2	2483.500	44.17	1.32	45.49	54.00	-8.51	Average Detector
	2483.500	56.94	1.32	58.26	74.00	-15.74	Peak Detector
3	2500.000	43.67	1.35	45.02	54.00	-8.98	Average Detector
	2500.000	57.33	1.35	58.68	74.00	-15.32	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Horizontal(worst case)

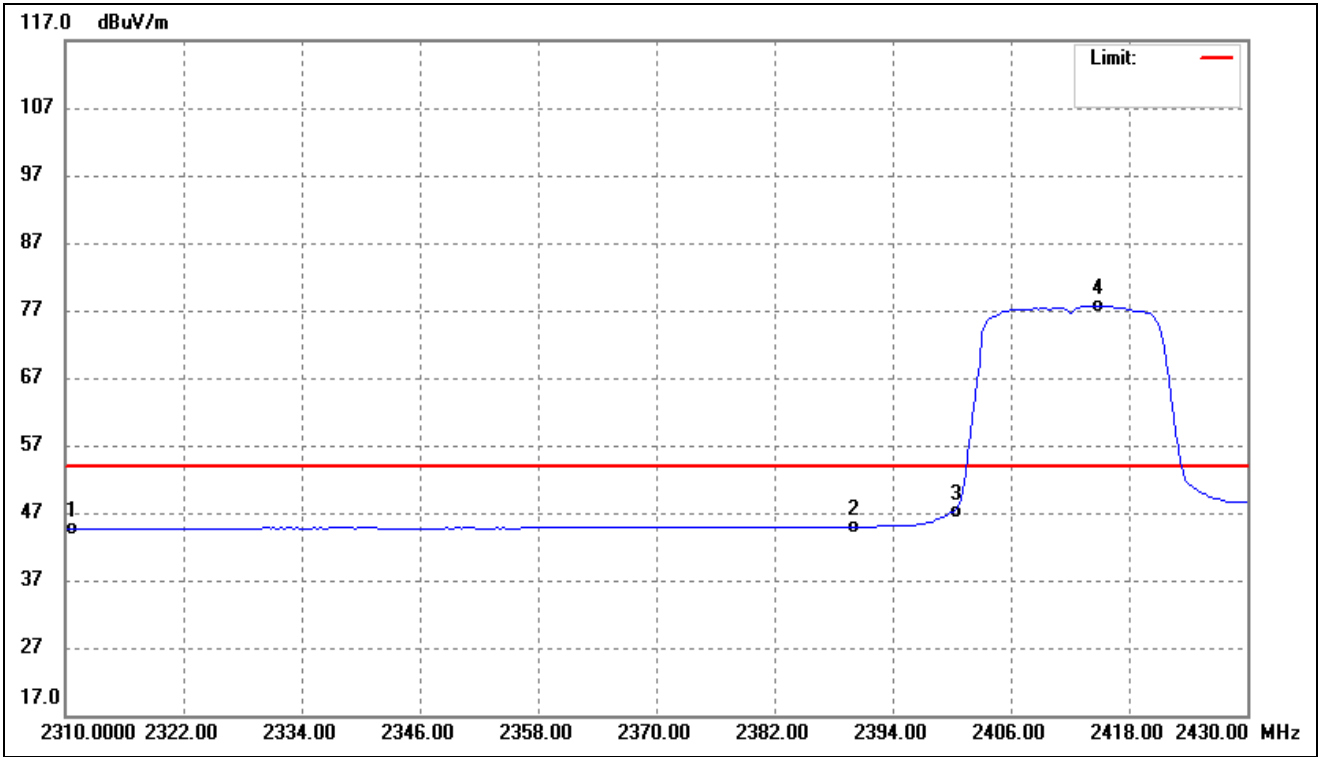


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.63	0.98	44.61	54.00	-9.39	Average Detector
	2310.000	56.62	0.98	57.60	74.00	-16.40	Peak Detector
2	2390.000	43.82	1.13	44.95	54.00	-9.05	Average Detector
	2390.000	56.53	1.13	57.66	74.00	-16.34	Peak Detector
3	2400.000	46.07	1.15	47.22	Delta=30.38dBc		Average Detector
4	2414.850	76.42	1.18	77.60			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Horizontal(worst case)

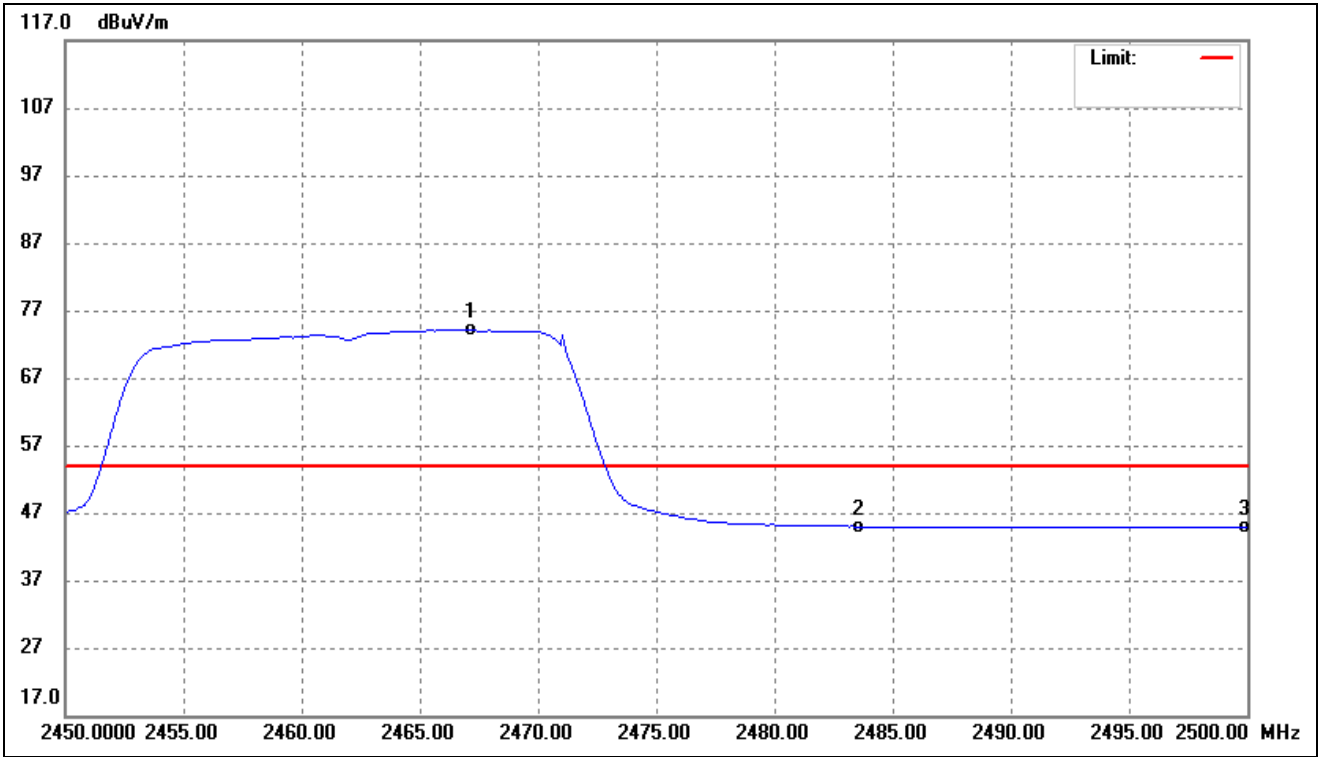


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2467.134	72.82	1.28	74.10	/	/	Average Detector
	2468.036	94.89	1.28	96.17	/	/	Peak Detector
2	2483.500	43.68	1.32	45.00	54.00	-9.00	Average Detector
	2483.500	56.67	1.32	57.99	74.00	-16.01	Peak Detector
3	2500.000	43.46	1.35	44.81	54.00	-9.19	Average Detector
	2500.000	55.99	1.35	57.34	74.00	-16.66	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Horizontal(worst case)

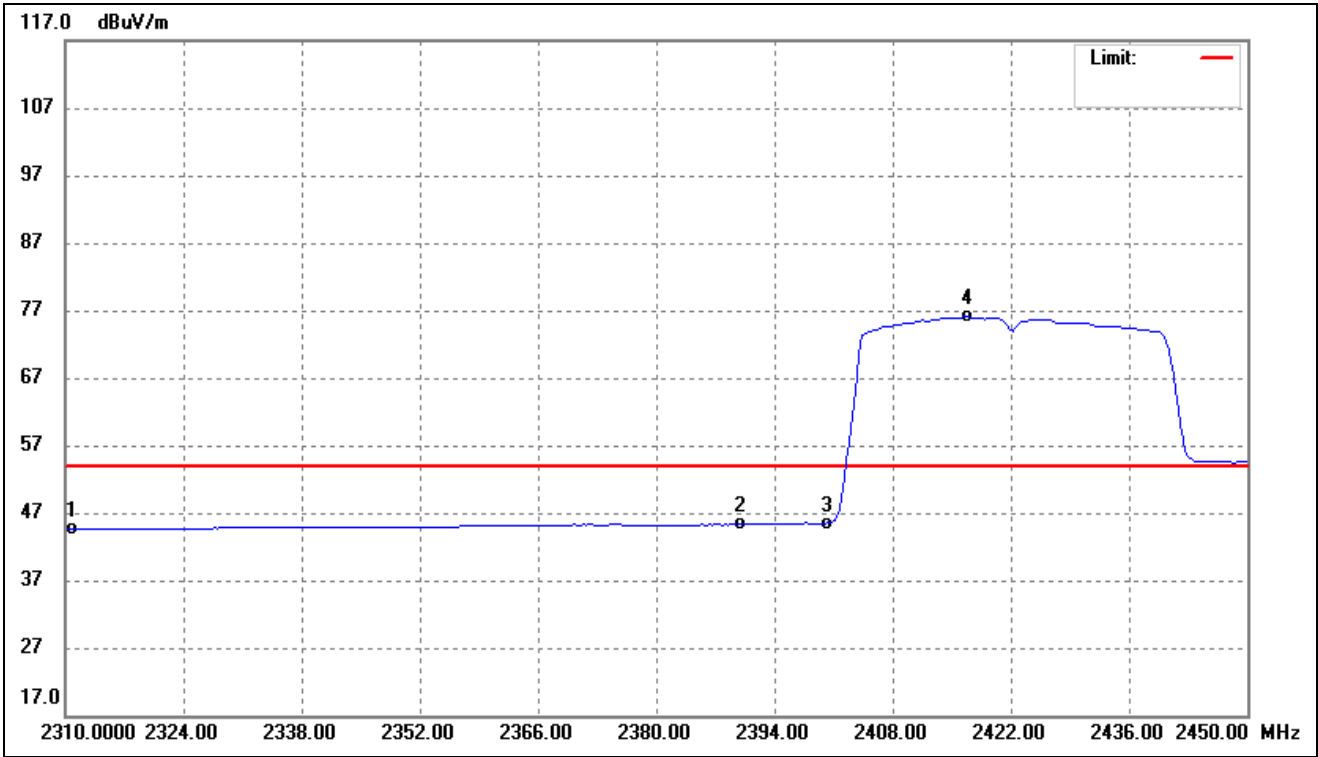

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.69	0.98	44.67	54.00	-9.33	Average Detector
	2310.000	55.81	0.98	56.79	74.00	-17.21	Peak Detector
2	2390.000	44.15	1.13	45.28	54.00	-8.72	Average Detector
	2390.000	57.31	1.13	58.44	74.00	-15.56	Peak Detector
3	2400.000	44.35	1.15	45.50	Delta=30.52dBc		Average Detector
4	2416.613	74.83	1.19	76.02			Average Detector


802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Horizontal(worst case)

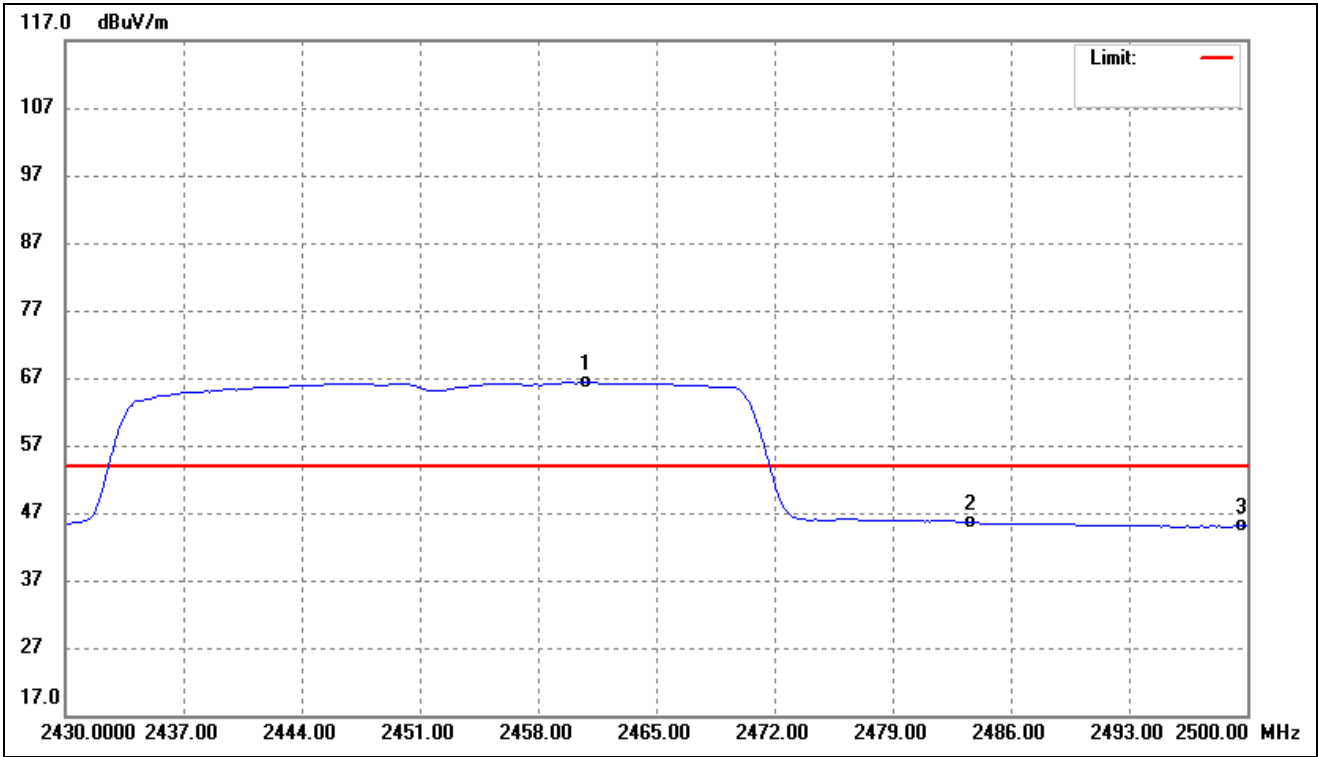

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.862	65.18	1.27	66.45	/	/	Average Detector
	2447.395	92.38	1.24	93.62	/	/	Peak Detector
2	2483.500	44.27	1.32	45.59	54.00	-8.41	Average Detector
	2483.500	57.66	1.32	58.98	74.00	-15.02	Peak Detector
3	2500.000	43.67	1.35	45.02	54.00	-8.98	Average Detector
	2500.000	56.19	1.35	57.54	74.00	-16.46	Peak Detector


➤ Antenna 2

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal(worst case)

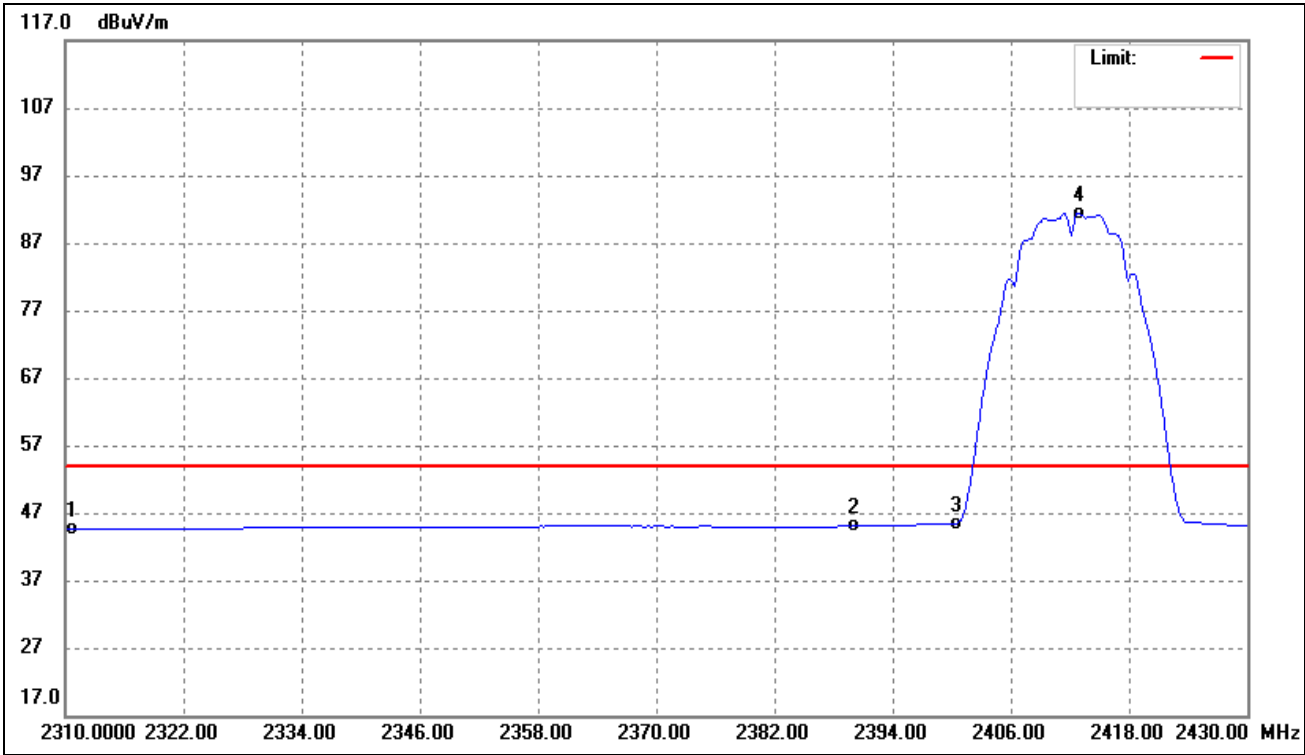


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.74	0.98	44.72	54.00	-9.28	Average Detector
	2310.000	56.96	0.98	57.94	74.00	-16.06	Peak Detector
2	2390.000	43.91	1.13	45.04	54.00	-8.96	Average Detector
	2390.000	57.47	1.13	58.60	74.00	-15.40	Peak Detector
3	2400.000	44.15	1.15	45.30	Delta=46.19dBc		Average Detector
4	2412.926	90.31	1.18	91.49			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal(worst case)

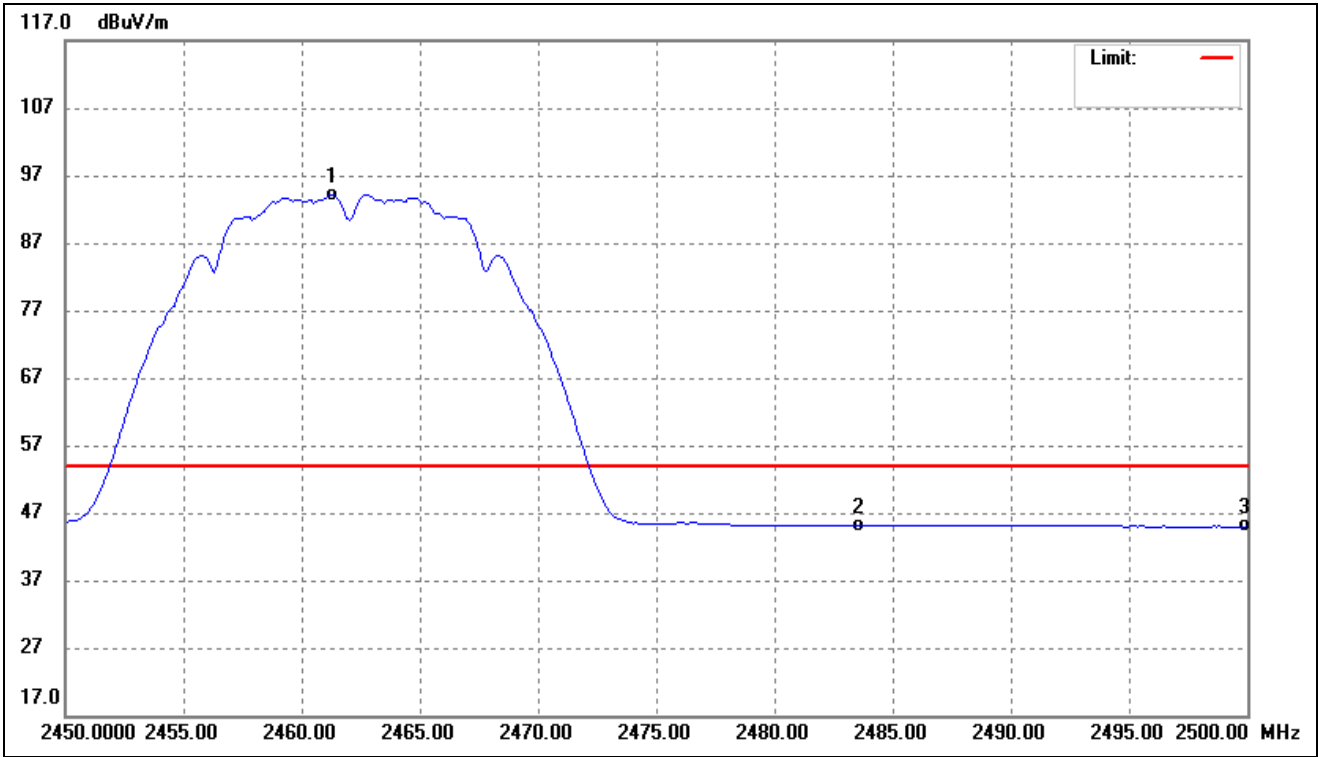


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.222	92.84	1.27	94.11	/	/	Average Detector
	2462.926	97.63	1.27	98.90	/	/	Peak Detector
2	2483.500	43.82	1.32	45.14	54.00	-8.86	Average Detector
	2483.500	56.26	1.32	57.58	74.00	-16.42	Peak Detector
3	2500.000	43.66	1.35	45.01	54.00	-8.99	Average Detector
	2500.000	56.63	1.35	57.98	74.00	-16.02	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Horizontal(worst case)

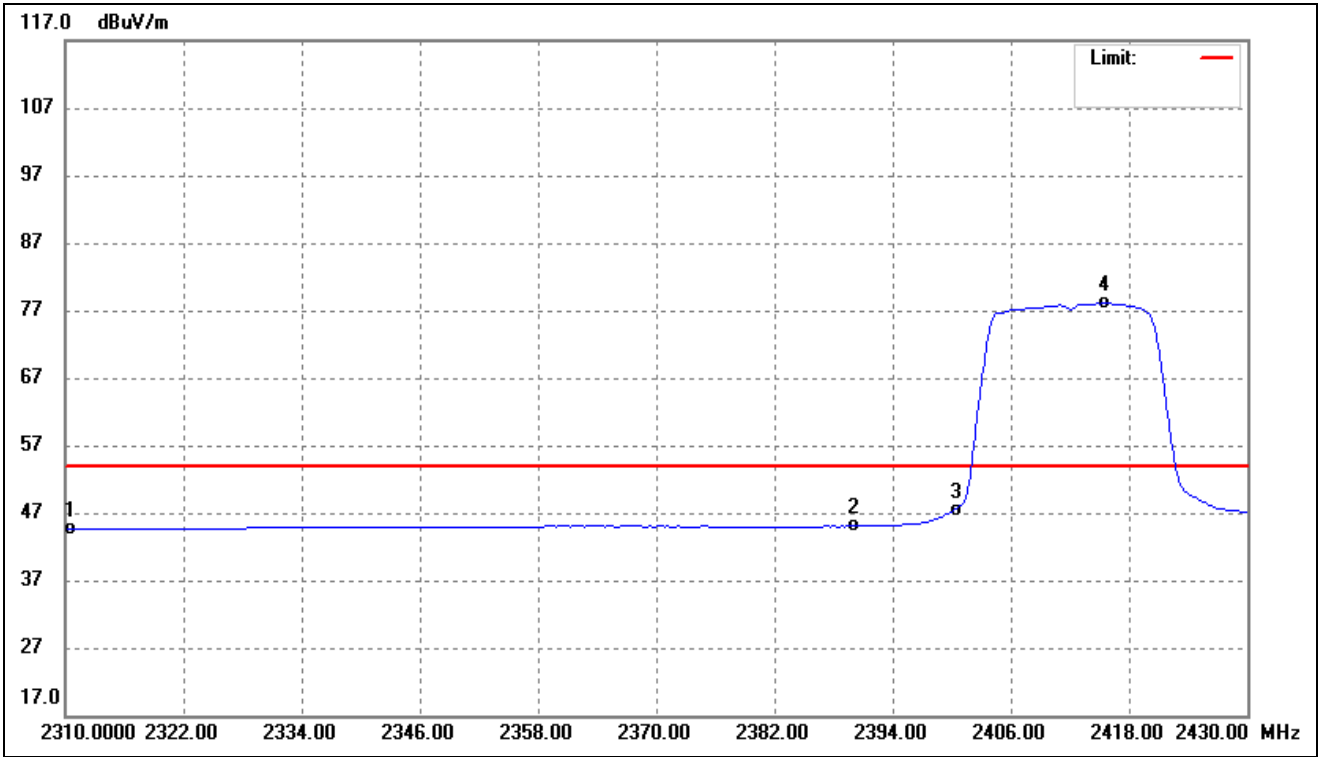


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.72	0.98	44.70	54.00	-9.30	Average Detector
	2310.000	56.61	0.98	57.59	74.00	-16.41	Peak Detector
2	2390.000	43.91	1.13	45.04	54.00	-8.96	Average Detector
	2390.000	57.41	1.13	58.54	74.00	-15.46	Peak Detector
3	2400.000	46.18	1.15	47.33	Delta=30.73dBc		Average Detector
4	2415.571	76.88	1.18	78.06			Average Detector

802.11g_54Mbps			
Test Channel	High	Polarity:	Horizontal(worst case)

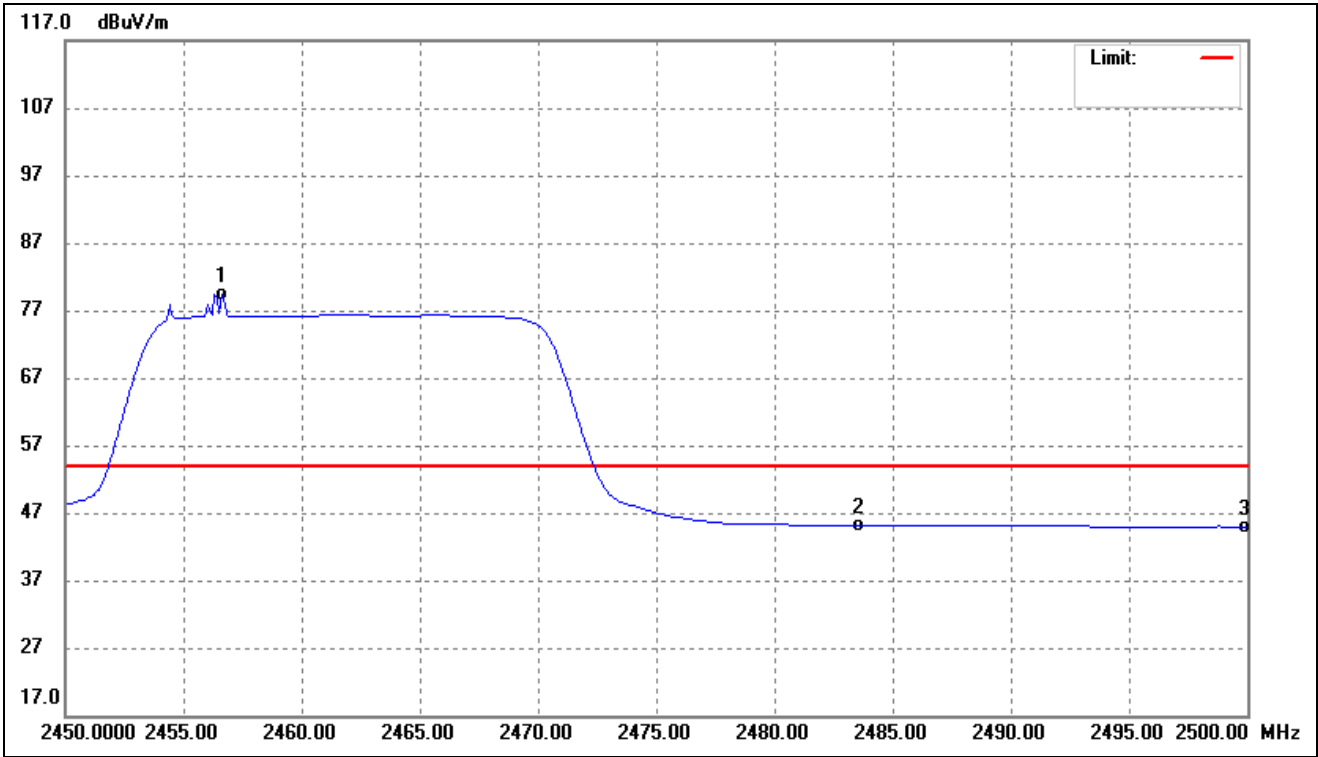


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2456.613	78.07	1.26	79.33	/	/	Average Detector
	2458.818	97.58	1.27	98.85	/	/	Peak Detector
2	2483.500	43.82	1.32	45.14	54.00	-8.86	Average Detector
	2483.500	56.36	1.32	57.68	74.00	-16.32	Peak Detector
3	2500.000	43.61	1.35	44.96	54.00	-9.04	Average Detector
	2500.000	56.05	1.35	57.40	74.00	-16.60	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Horizontal(worst case)

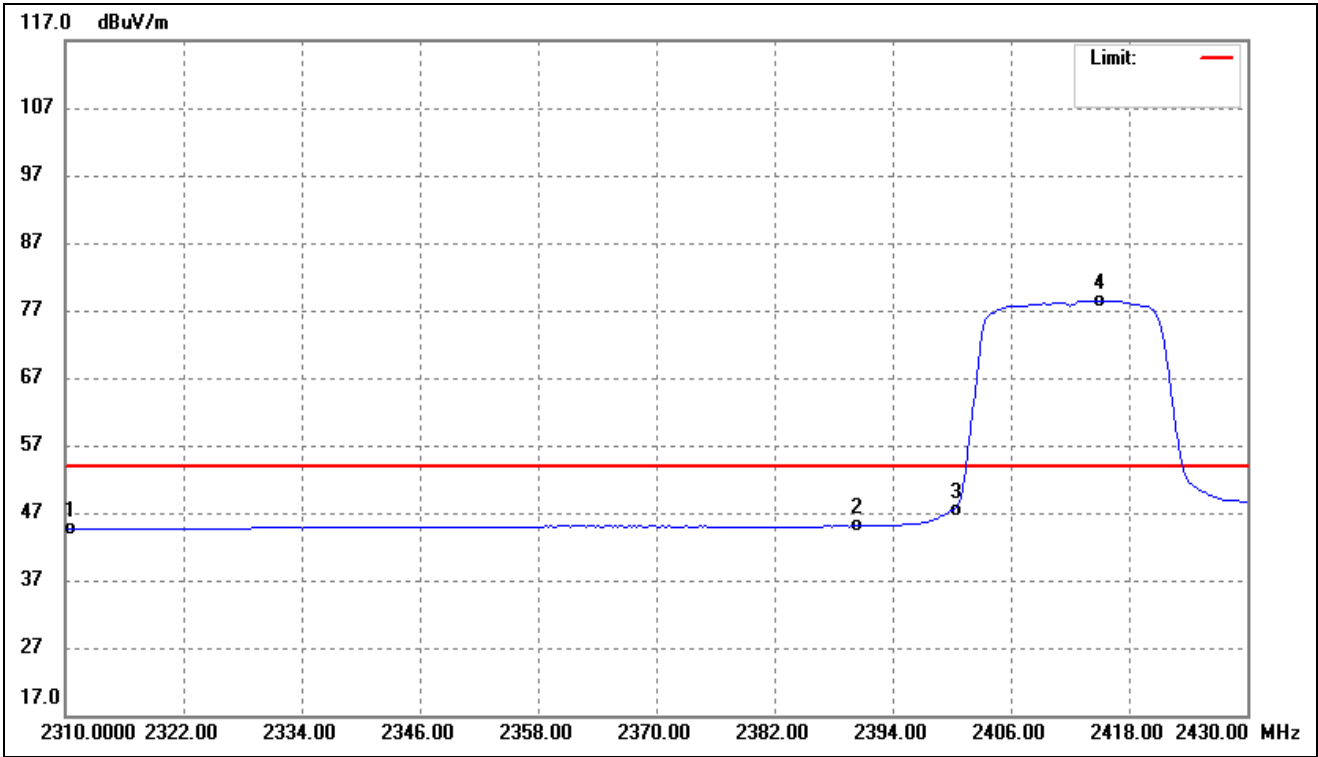


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.70	0.98	44.68	54.00	-9.32	Average Detector
	2310.000	57.19	0.98	58.17	74.00	-15.83	Peak Detector
2	2390.000	43.93	1.13	45.06	54.00	-8.94	Average Detector
	2390.000	56.98	1.13	58.11	74.00	-15.89	Peak Detector
3	2400.000	46.31	1.15	47.46	Delta=31.03dBc		Average Detector
4	2415.090	77.31	1.18	78.49			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Horizontal(worst case)

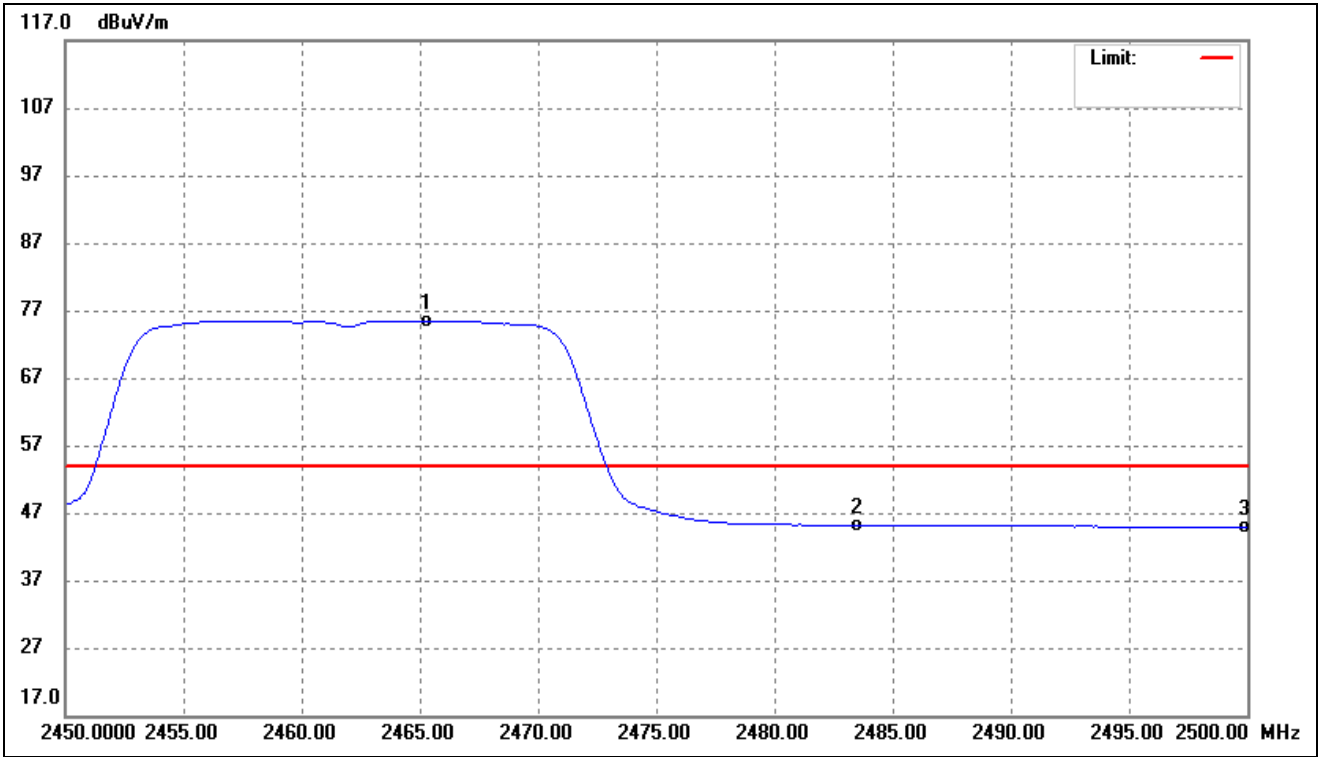


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2465.331	74.23	1.27	75.50	/	/	Average Detector
	2463.928	96.47	1.27	97.74	/	/	Peak Detector
2	2483.500	43.82	1.32	45.14	54.00	-8.86	Average Detector
	2483.500	57.40	1.32	58.72	74.00	-15.28	Peak Detector
3	2500.000	43.65	1.35	45.00	54.00	-9.00	Average Detector
	2500.000	55.89	1.35	57.24	74.00	-16.76	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Horizontal(worst case)

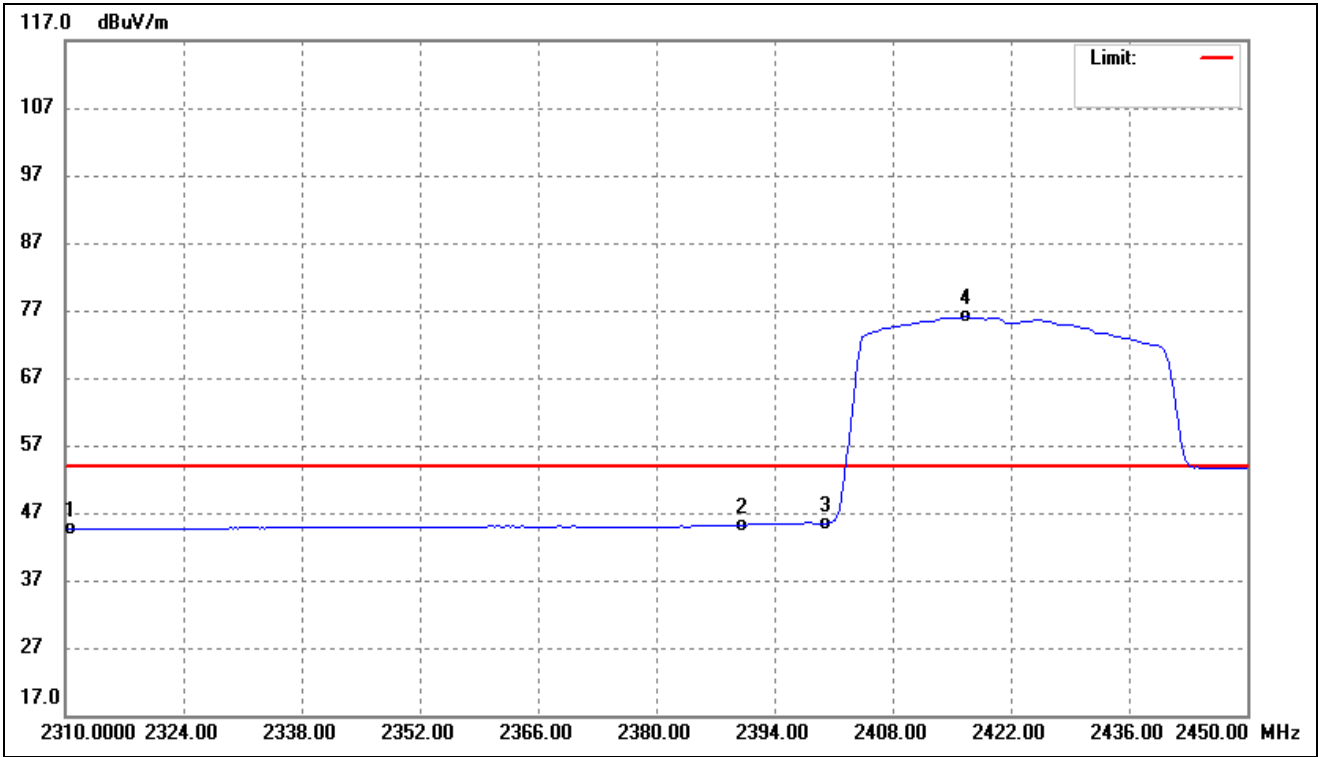

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.65	0.98	44.63	54.00	-9.37	Average Detector
	2310.000	56.41	0.98	57.39	74.00	-16.61	Peak Detector
2	2390.000	44.04	1.13	45.17	54.00	-8.83	Average Detector
	2390.000	58.07	1.13	59.20	74.00	-14.80	Peak Detector
3	2400.000	44.35	1.15	45.50	Delta=30.52dBc		Average Detector
4	2416.613	74.83	1.19	76.02			Average Detector

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Horizontal(worst case)

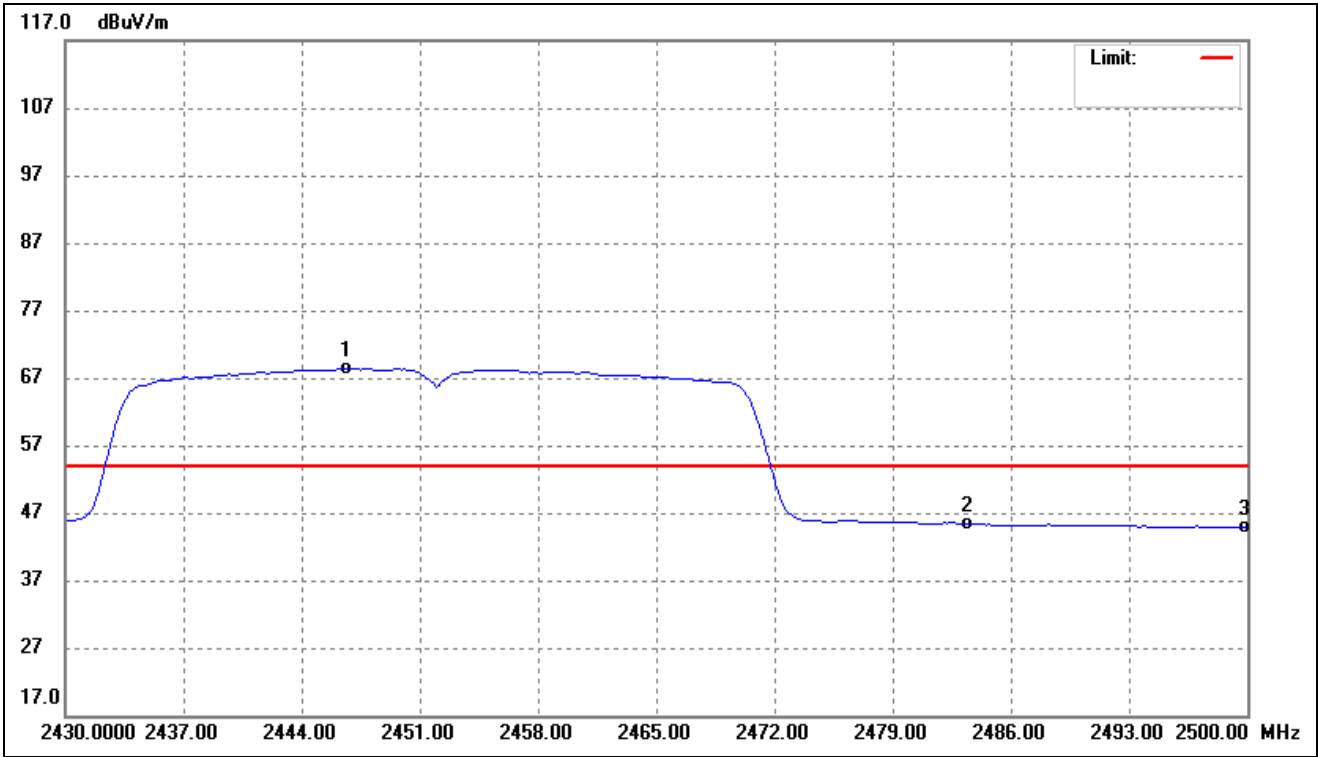

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2446.693	67.07	1.24	68.31	/	/	Average Detector
	2447.395	96.04	1.24	97.28	/	/	Peak Detector
2	2483.500	44.02	1.32	45.34	54.00	-8.66	Average Detector
	2483.500	56.98	1.32	58.30	74.00	-15.70	Peak Detector
3	2500.000	43.65	1.35	45.00	54.00	-9.00	Average Detector
	2500.000	56.15	1.35	57.50	74.00	-16.50	Peak Detector

➤ Conducted test
Please refer to Appendix D


9. Conducted Emissions

9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram

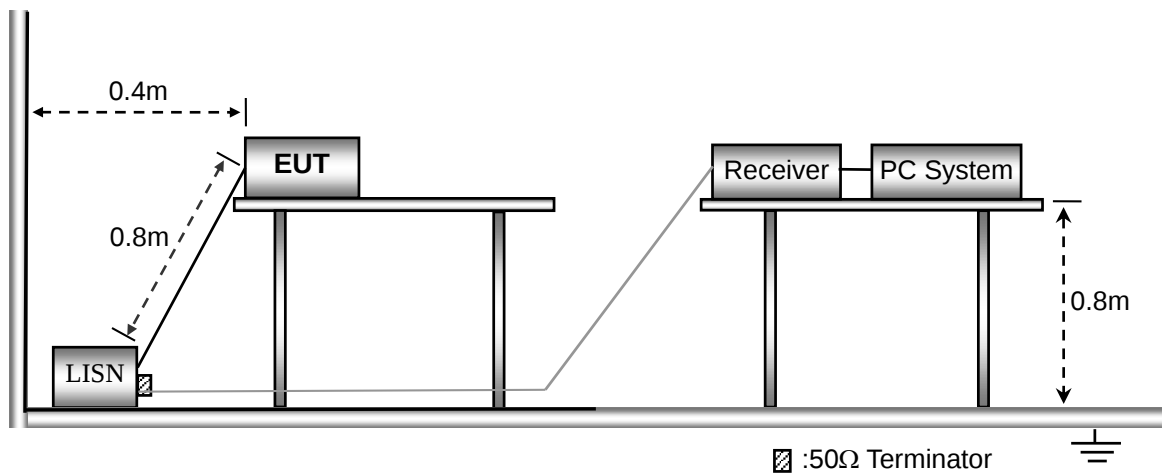


9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal


9.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

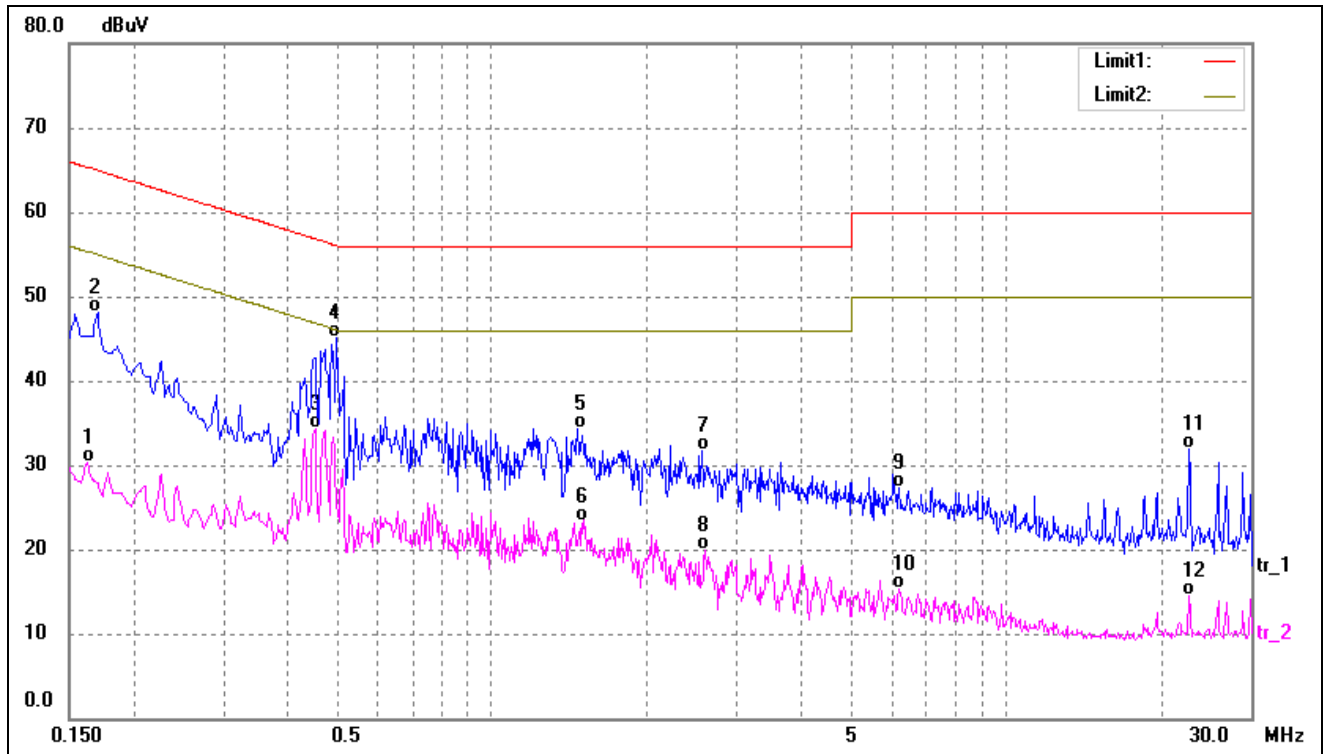

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	19.96	10.40	30.36	55.36	-25.00	AVG
2	0.1700	37.75	10.40	48.15	64.96	-16.81	QP
3	0.4500	24.09	10.25	34.34	46.87	-12.53	AVG
4*	0.4980	34.92	10.23	45.15	56.03	-10.88	QP
5	1.4660	24.15	10.23	34.38	56.00	-21.62	QP
6	1.5060	13.16	10.24	23.40	46.00	-22.60	AVG
7	2.5660	21.29	10.34	31.63	56.00	-24.37	QP
8	2.5980	9.49	10.34	19.83	46.00	-26.17	AVG
9	6.1979	17.02	10.38	27.40	60.00	-32.60	QP
10	6.1979	4.98	10.38	15.36	50.00	-34.64	AVG
11	22.7620	21.59	10.33	31.92	60.00	-28.08	QP
12	22.7620	4.09	10.33	14.42	50.00	-35.58	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

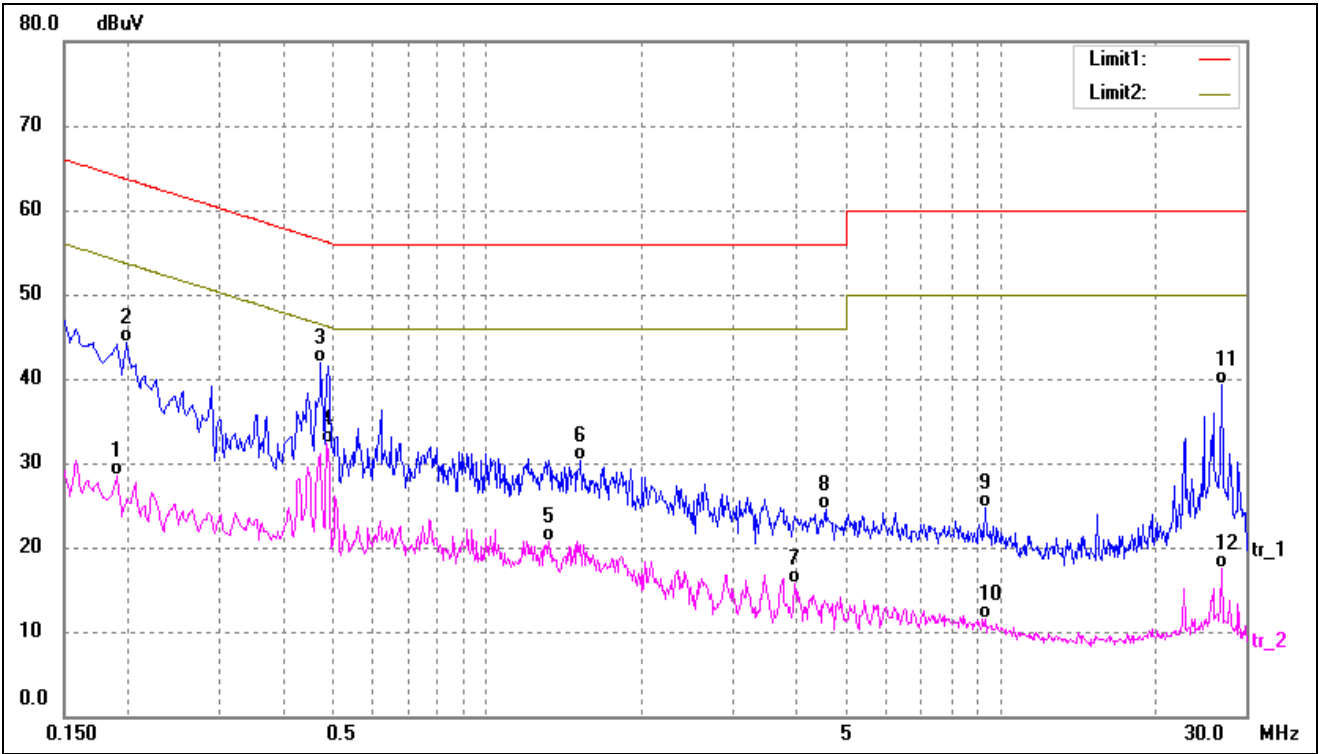

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1900	18.19	10.39	28.58	54.03	-25.45	AVG
2	0.1980	33.93	10.39	44.32	63.69	-19.37	QP
3	0.4740	31.68	10.24	41.92	56.44	-14.52	QP
4*	0.4860	22.15	10.23	32.38	46.24	-13.86	AVG
5	1.3180	10.53	10.20	20.73	46.00	-25.27	AVG
6	1.5260	19.97	10.24	30.21	56.00	-25.79	QP
7	3.9780	5.33	10.36	15.69	46.00	-30.31	AVG
8	4.5660	14.11	10.37	24.48	56.00	-31.52	QP
9	9.3139	14.28	10.38	24.66	60.00	-35.34	QP
10	9.3139	1.20	10.38	11.58	50.00	-38.42	AVG
11	26.9140	28.97	10.30	39.27	60.00	-20.73	QP
12	26.9140	7.22	10.30	17.52	50.00	-32.48	AVG

APPENDIX SUMMARY



Project No.	WTH23X05102867W	Test Engineer	Elin Su
Start date	2023/6/3	Finish date	2023/6/3
Temperature	23℃	Humidity	62%
RF specifications	WIFI-2.4G		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant



APPENDIX A

Power Spectral Density					
Test Mode	Test Channel MHz	Test Result(dBm/3kHz)		Total dBm	Limit dBm/3kHz
		Antenna 1	Antenna 2		
802.11b_1Mbps	2412	-17.15	-21.28	/	8
	2437	-20.63	-20.10	/	8
	2462	-19.94	-19.97	/	8
802.11g_6Mbps	2412	-21.80	-25.86	/	8
	2437	-20.74	-20.03	/	8
	2462	-20.42	-25.08	/	8
802.11n-HT20_MCS0	2412	-26.15	-25.33	-22.71	8
	2437	-27.19	-26.35	-23.74	8
	2462	-26.60	-26.09	-23.33	8
802.11n-HT40_MCS0	2422	-22.98	-28.82	-21.97	8
	2437	-24.79	-29.17	-23.44	8
	2452	-28.52	-28.87	-25.68	8



Antenna 1

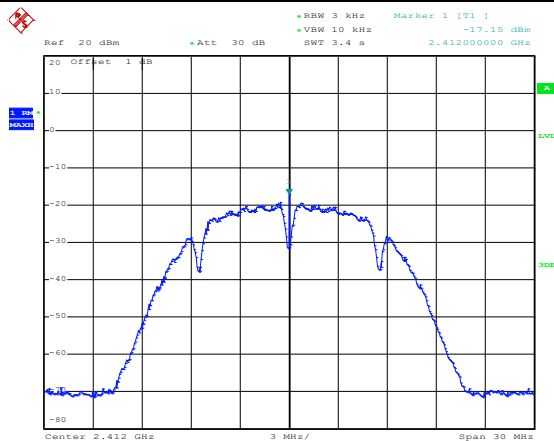

Date: 3.JUN.2023 14:26:15


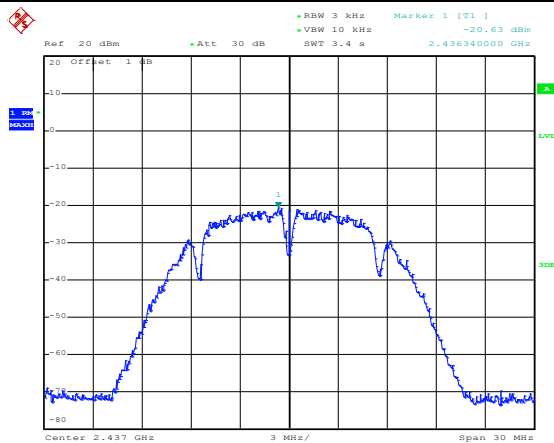



Date: 3.JUN.2023 14:26:48

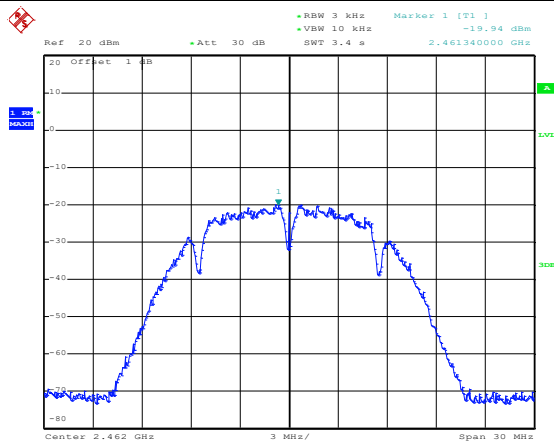




Date: 3.JUN.2023 14:27:52




802.11g-Low	Ref 20 dBm Att 30 dB RBW 3 kHz VBW 10 kHz SWT 3.4 s Marker 1 [T1] -21.80 dBm 2.41200000 GHz Center 2.412 GHz 3 MHz/ Span 30 MHz Date: 3.JUN.2023 16:31:14
802.11g-Middle	Ref 20 dBm Att 30 dB RBW 3 kHz VBW 10 kHz SWT 3.4 s Marker 1 [T1] -20.74 dBm 2.43700000 GHz Center 2.437 GHz 3 MHz/ Span 30 MHz Date: 3.JUN.2023 14:29:25
802.11g-High	Ref 20 dBm Att 30 dB RBW 3 kHz VBW 10 kHz SWT 3.4 s Marker 1 [T1] -20.42 dBm 2.46200000 GHz Center 2.462 GHz 3 MHz/ Span 30 MHz Date: 3.JUN.2023 14:30:50

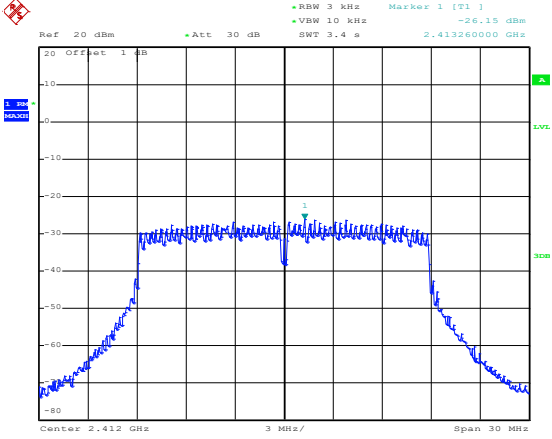
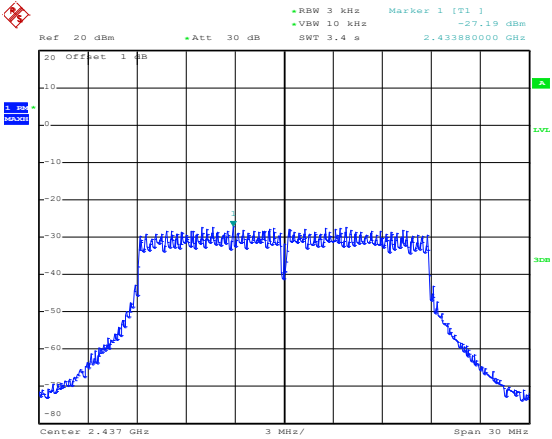
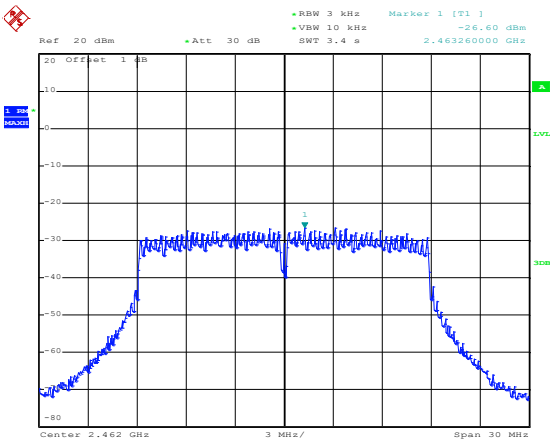
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 3 kHz VBW 10 kHz Marker 1 [T1] -26.15 dBm 2.413260000 GHz Center 2.412 GHz 3 MHz/ Span 30 MHz Date: 3.JUN.2023 14:31:39
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 3 kHz VBW 10 kHz Marker 1 [T1] -27.19 dBm 2.433880000 GHz Center 2.437 GHz 3 MHz/ Span 30 MHz Date: 3.JUN.2023 14:32:10
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 3 kHz VBW 10 kHz Marker 1 [T1] -26.60 dBm 2.463260000 GHz Center 2.462 GHz 3 MHz/ Span 30 MHz Date: 3.JUN.2023 14:32:48




Channel	Plot	Date
802.11n-HT40-Low		3.JUN.2023 14:34:13
802.11n-HT40-Middle		3.JUN.2023 14:35:01
802.11n-HT40-High		3.JUN.2023 14:35:35

Antenna 2

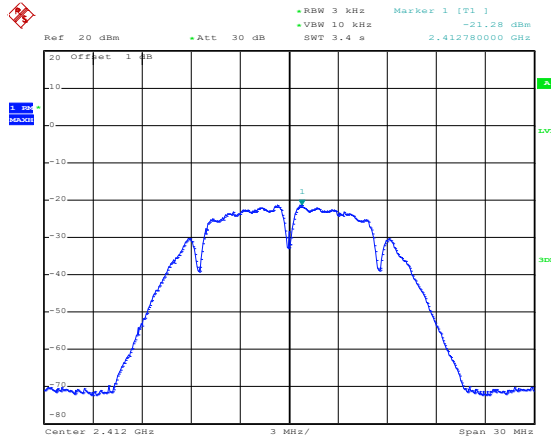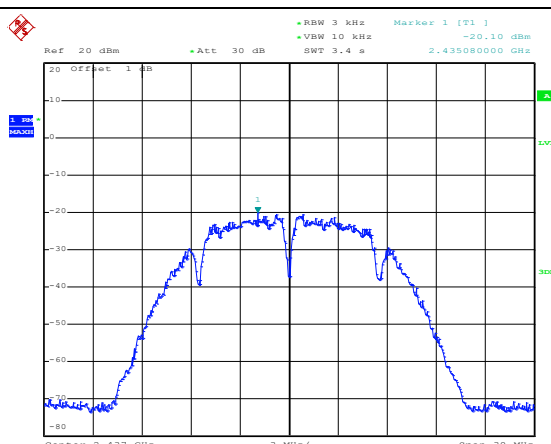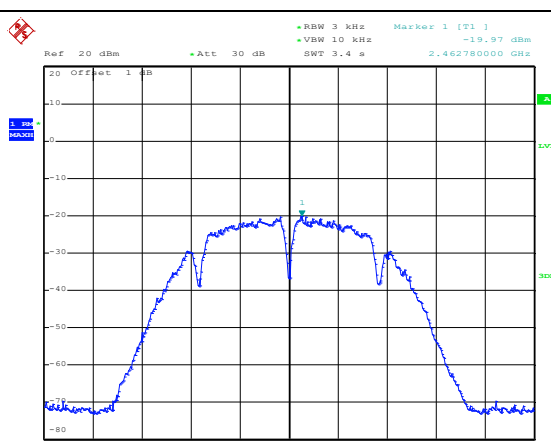802.11b-Low	 Ref: 20 dBm Att: 30 dB RBW: 3 kHz VBW: 10 kHz Marker 1 [T1] -21.28 dBm 2.412780000 GHz Center: 2.412 GHz Span: 30 MHz Date: 3.JUN.2023 15:51:07
802.11b-Middle	 Ref: 20 dBm Att: 30 dB RBW: 3 kHz VBW: 10 kHz Marker 1 [T1] -20.10 dBm 2.435080000 GHz Center: 2.437 GHz Span: 30 MHz Date: 3.JUN.2023 15:52:23
802.11b-High	 Ref: 20 dBm Att: 30 dB RBW: 3 kHz VBW: 10 kHz Marker 1 [T1] -19.97 dBm 2.462780000 GHz Center: 2.462 GHz Span: 30 MHz Date: 3.JUN.2023 15:53:00

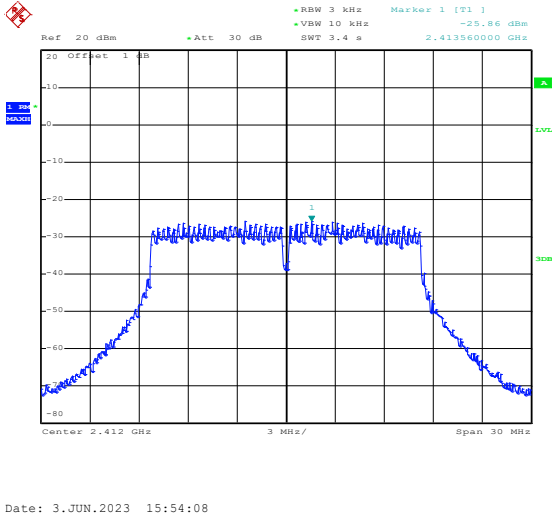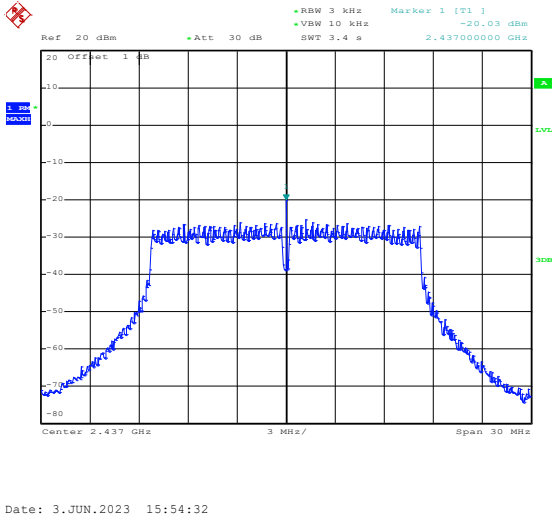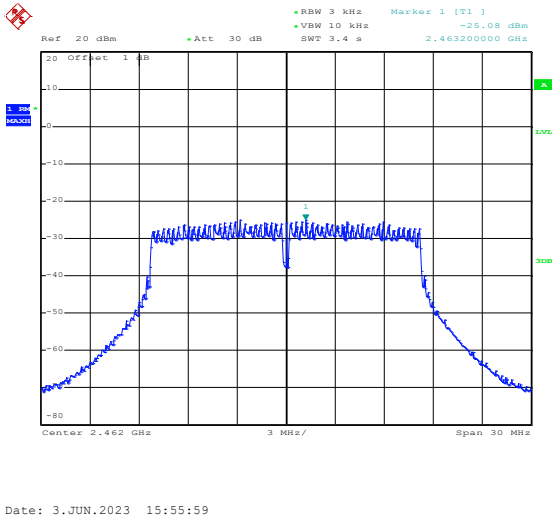802.11g-Low	 Ref 20 dBm Att 30 dB RBW 3 kHz VBW 10 kHz SWT 3.4 s Marker 1 [T1] -25.86 dBm 2.413560000 GHz Center 2.412 GHz 3 MHz/ Span 30 MHz Date: 3.JUN.2023 15:54:08
802.11g-Middle	 Ref 20 dBm Att 30 dB RBW 3 kHz VBW 10 kHz SWT 3.4 s Marker 1 [T1] -20.03 dBm 2.437000000 GHz Center 2.437 GHz 3 MHz/ Span 30 MHz Date: 3.JUN.2023 15:54:32
802.11g-High	 Ref 20 dBm Att 30 dB RBW 3 kHz VBW 10 kHz SWT 3.4 s Marker 1 [T1] -25.08 dBm 2.463200000 GHz Center 2.462 GHz 3 MHz/ Span 30 MHz Date: 3.JUN.2023 15:55:59

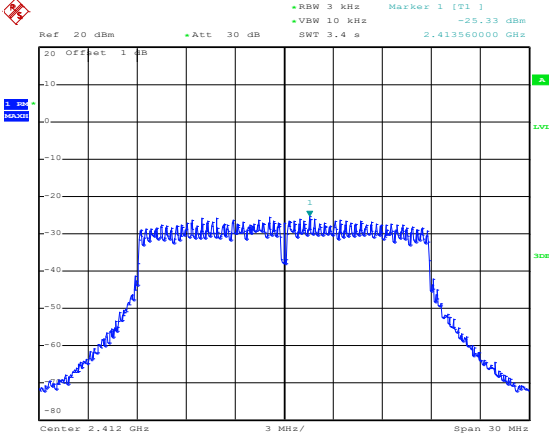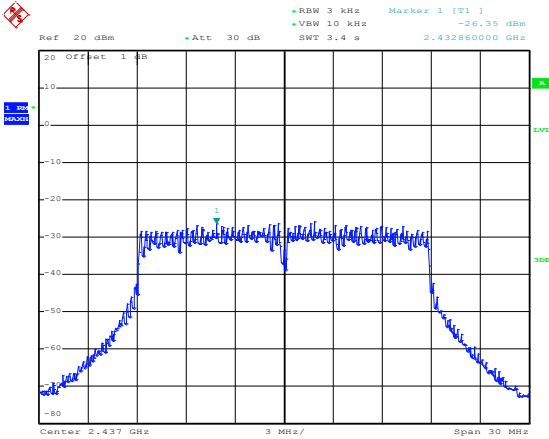
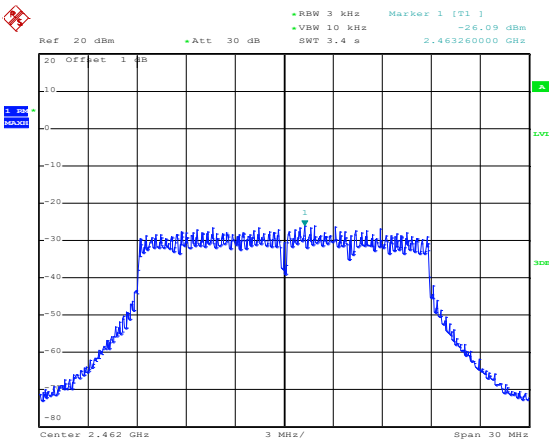
802.11n-HT20-Low	 Date: 3.JUN.2023 15:57:22
802.11n-HT20-Middle	 Date: 3.JUN.2023 15:57:50
802.11n-HT20-High	 Date: 3.JUN.2023 15:58:12

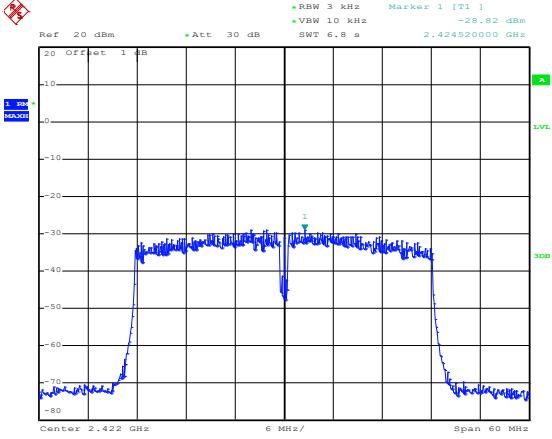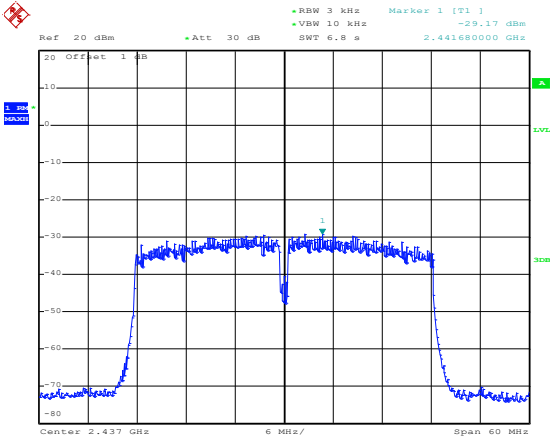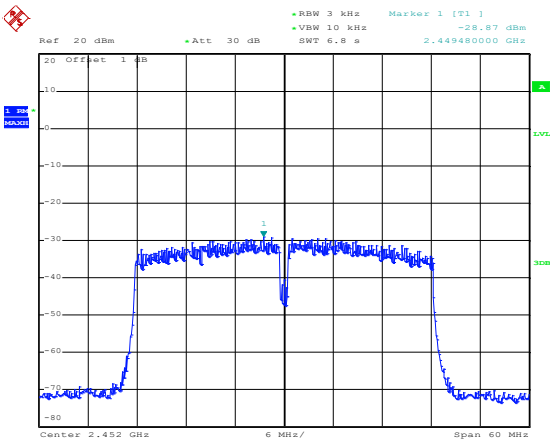802.11n-HT40-Low	 Ref 20 dBm Att 30 dB RBW 3 kHz VBW 10 kHz Marker 1 [T1] -28.82 dBm 2.424520000 GHz Center 2.422 GHz 6 MHz/ Span 60 MHz Date: 3.JUN.2023 15:59:27
802.11n-HT40-Middle	 Ref 20 dBm Att 30 dB RBW 3 kHz VBW 10 kHz Marker 1 [T1] -29.17 dBm 2.441680000 GHz Center 2.437 GHz 6 MHz/ Span 60 MHz Date: 3.JUN.2023 16:00:00
802.11n-HT40-High	 Ref 20 dBm Att 30 dB RBW 3 kHz VBW 10 kHz Marker 1 [T1] -28.87 dBm 2.449480000 GHz Center 2.452 GHz 6 MHz/ Span 60 MHz Date: 3.JUN.2023 16:00:33



APPENDIX B

DTS Bandwidth				
Test Mode	Test Channel MHz	Test Result(MHz)		Limit kHz
		Antenna 1	Antenna 2	
802.11b_1Mbps	2412	9.52	10.24	≥500
	2437	10.24	10.24	≥500
	2462	10.24	10.24	≥500
802.11g_6Mbps	2412	16.48	16.32	≥500
	2437	16.48	16.48	≥500
	2462	16.32	16.48	≥500
802.11n-HT20_MCS0	2412	17.60	17.68	≥500
	2437	17.52	17.52	≥500
	2462	17.28	17.52	≥500
802.11n-HT40_MCS0	2422	35.68	35.52	≥500
	2437	35.20	35.68	≥500
	2452	35.68	35.52	≥500



Antenna 1

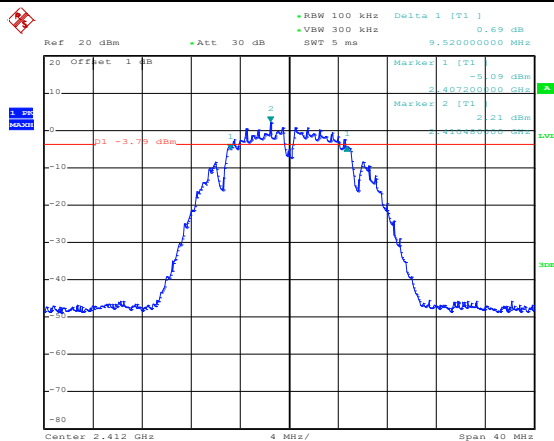




Date: 3.JUN.2023 14:39:09


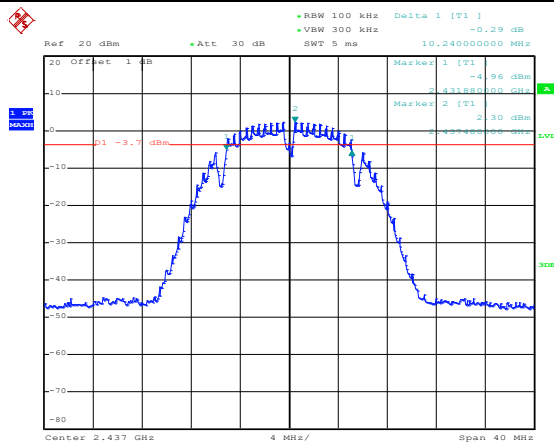






Date: 3.JUN.2023 14:48:37

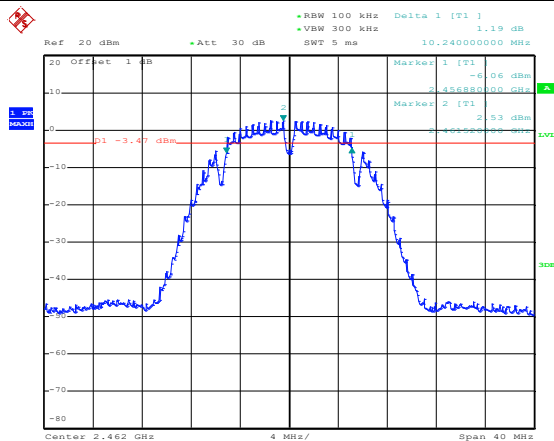



Date: 3.JUN.2023 14:49:48

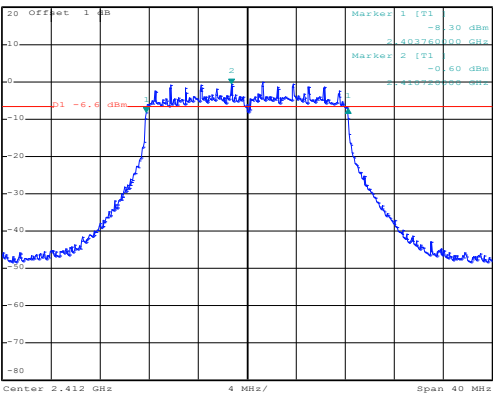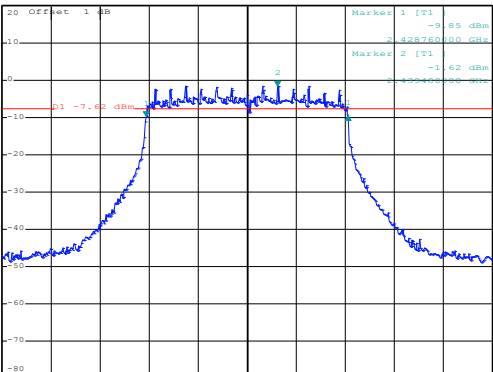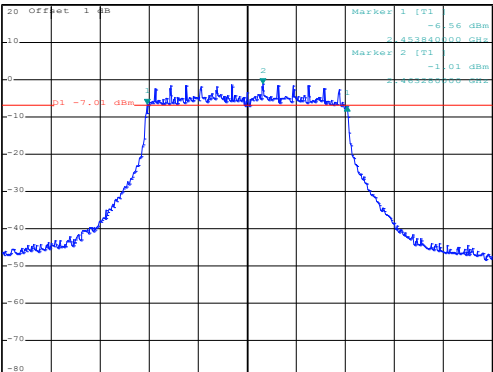802.11g-Low	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 1.17 dB •VBW 300 kHz SWT 5 ms 16.48000000 MHz Marker 1 [T1] -8.30 dBm Marker 2 [T1] -0.60 dBm LVL -12.17 dBm Center 2.412 GHz 4 MHz/ Span 40 MHz Date: 3.JUN.2023 16:31:56
802.11g-Middle	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 0.30 dB •VBW 300 kHz SWT 5 ms 16.48000000 MHz Marker 1 [T1] -9.85 dBm Marker 2 [T1] -1.62 dBm LVL -12.03 dBm Center 2.437 GHz 4 MHz/ Span 40 MHz Date: 3.JUN.2023 14:53:07
802.11g-High	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] -0.61 dB •VBW 300 kHz SWT 5 ms 16.32000000 MHz Marker 1 [T1] -6.56 dBm Marker 2 [T1] -1.01 dBm LVL -12.01 dBm Center 2.462 GHz 4 MHz/ Span 40 MHz Date: 3.JUN.2023 14:55:52

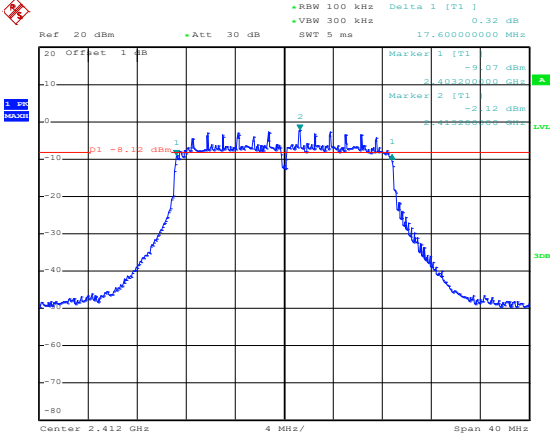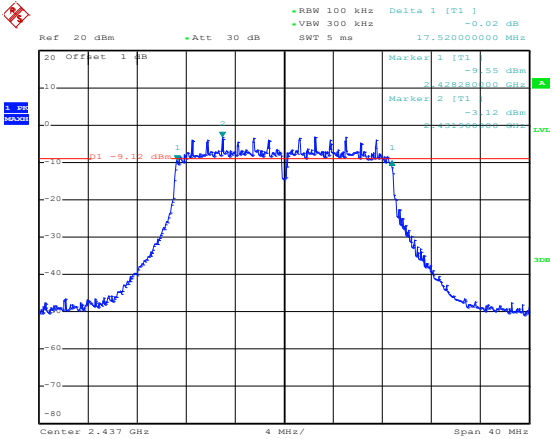
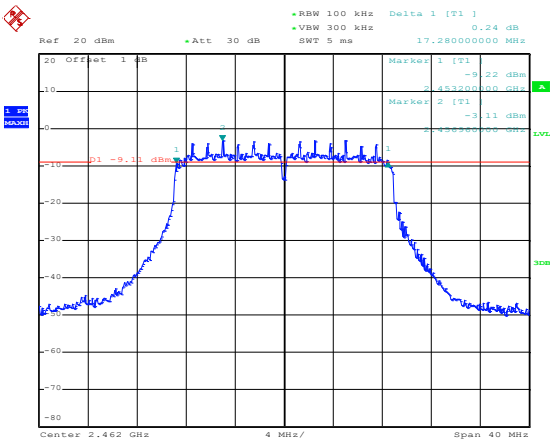
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz Delta 1 [T1] 0.32 dB SWT 5 ms 17.600000000 MHz Marker 1 [T1] -9.07 dBm 2.412000000 GHz Marker 2 [T1] -2.12 dBm 2.412000000 GHz Center 2.412 GHz 4 MHz/ Span 40 MHz Date: 3.JUN.2023 14:58:10
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz Delta 1 [T1] -0.02 dB SWT 5 ms 17.520000000 MHz Marker 1 [T1] -9.55 dBm 2.437000000 GHz Marker 2 [T1] -3.12 dBm 2.437000000 GHz Center 2.437 GHz 4 MHz/ Span 40 MHz Date: 3.JUN.2023 14:59:00
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz Delta 1 [T1] 0.24 dB SWT 5 ms 17.280000000 MHz Marker 1 [T1] -9.22 dBm 2.462000000 GHz Marker 2 [T1] -3.11 dBm 2.462000000 GHz Center 2.462 GHz 4 MHz/ Span 40 MHz Date: 3.JUN.2023 15:00:20

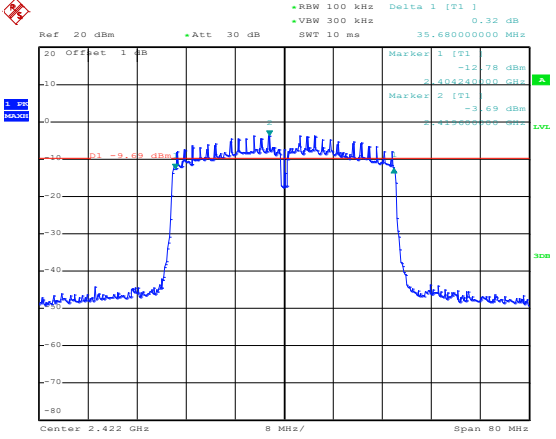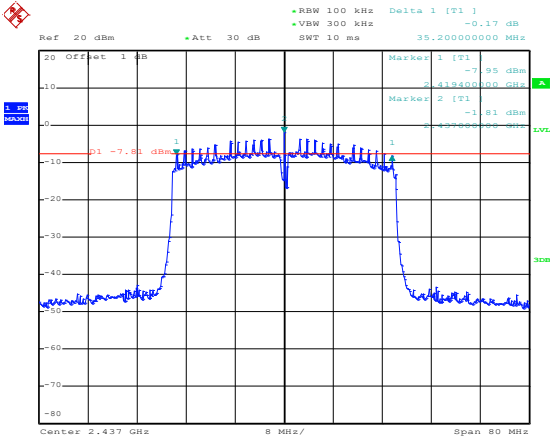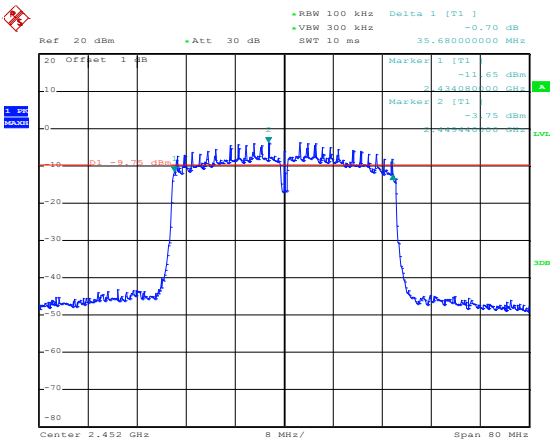802.11n-HT40-Low	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] 0.32 dB SWT 10 ms 35.68000000 MHz Marker 1 [T1] -12.78 dBm 2.42200000 GHz Marker 2 [T1] -3.69 dBm 2.42200000 GHz Center 2.422 GHz 8 MHz/ Span 80 MHz Date: 3 JUN 2023 15:01:30
802.11n-HT40-Middle	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] -0.17 dB SWT 10 ms 35.20000000 MHz Marker 1 [T1] -7.95 dBm 2.43700000 GHz Marker 2 [T1] -1.81 dBm 2.43700000 GHz Center 2.437 GHz 8 MHz/ Span 80 MHz Date: 3 JUN 2023 15:02:15
802.11n-HT40-High	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] -0.70 dB SWT 10 ms 35.68000000 MHz Marker 1 [T1] -11.65 dBm 2.45200000 GHz Marker 2 [T1] -3.75 dBm 2.45200000 GHz Center 2.452 GHz 8 MHz/ Span 80 MHz Date: 3 JUN 2023 15:03:25



Antenna 2

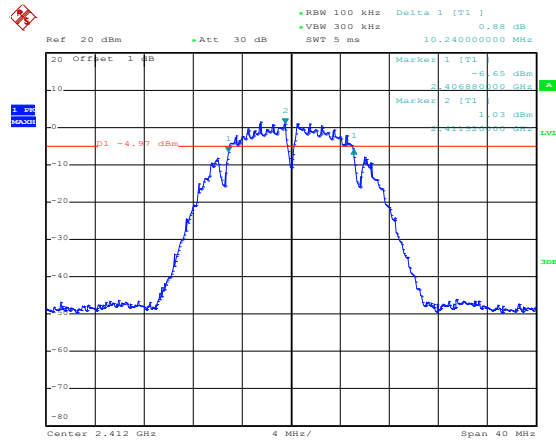




Date: 3.JUN.2023 16:03:09


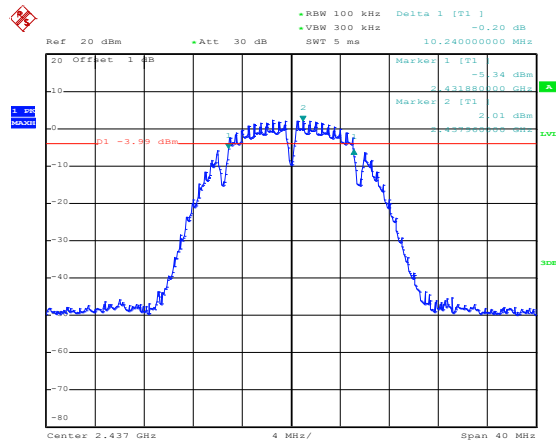






Date: 3.JUN.2023 16:03:54

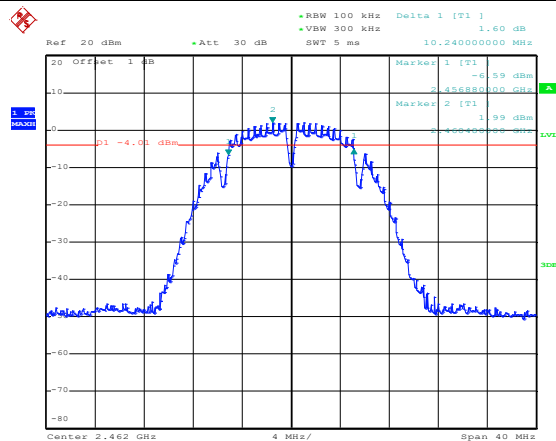

Date: 3.JUN.2023 16:04:33

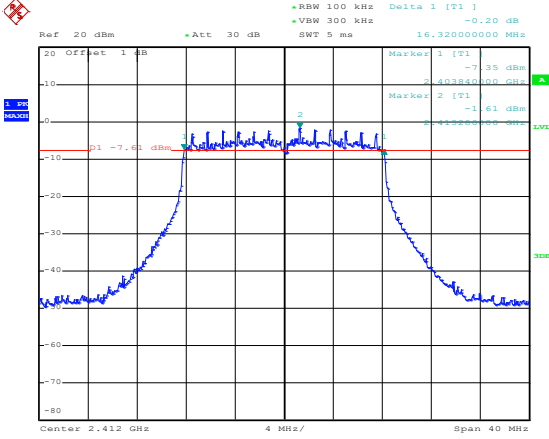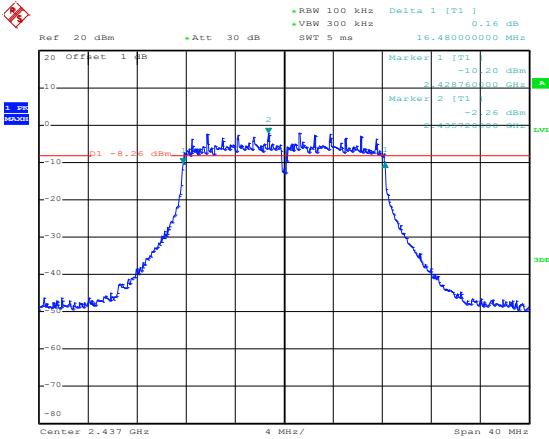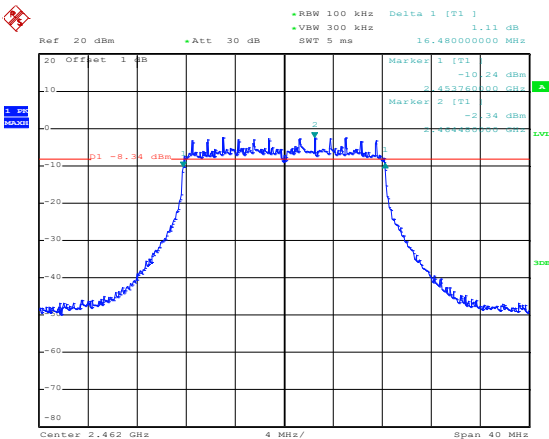802.11g-Low	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] -0.20 dB SWT 5 ms 16.320000000 MHz Marker 1 [T1] -7.35 dBm Marker 2 [T1] -1.61 dBm Center 2.412 GHz 4 MHz/ Span 40 MHz Date: 3.JUN.2023 16:07:03
802.11g-Middle	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] 0.16 dB SWT 5 ms 16.480000000 MHz Marker 1 [T1] -10.20 dBm Marker 2 [T1] -2.26 dBm Center 2.437 GHz 4 MHz/ Span 40 MHz Date: 3.JUN.2023 16:08:17
802.11g-High	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] 1.11 dB SWT 5 ms 16.480000000 MHz Marker 1 [T1] -10.24 dBm Marker 2 [T1] -2.34 dBm Center 2.462 GHz 4 MHz/ Span 40 MHz Date: 3.JUN.2023 16:09:06

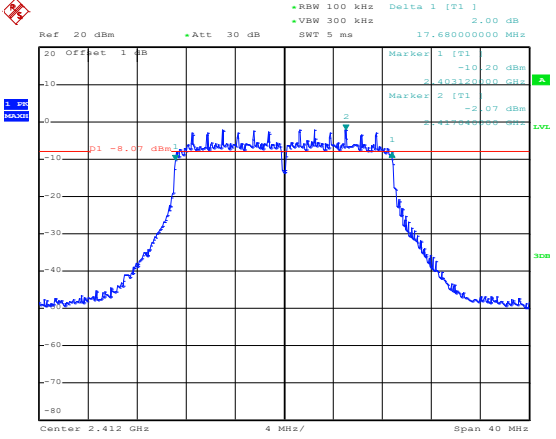
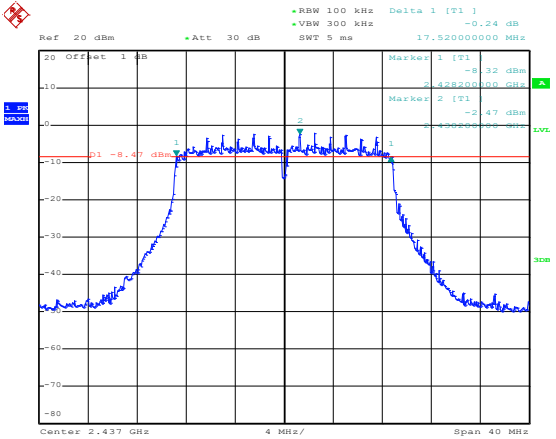
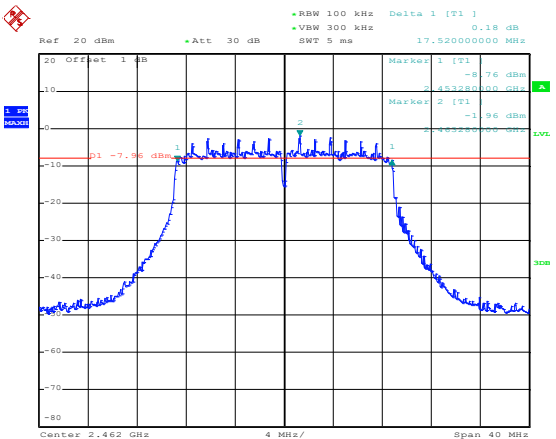
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] 2.00 dB SWT 5 ms 17.680000000 MHz Marker 1 [T1] -10.20 dBm Marker 2 [T1] -8.07 dBm Center 2.412 GHz 4 MHz/ Span 40 MHz Date: 3.JUN.2023 16:10:06
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] -0.24 dB SWT 5 ms 17.520000000 MHz Marker 1 [T1] -10.32 dBm Marker 2 [T1] -8.47 dBm Center 2.437 GHz 4 MHz/ Span 40 MHz Date: 3.JUN.2023 16:10:37
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] 0.18 dB SWT 5 ms 17.520000000 MHz Marker 1 [T1] -8.76 dBm Marker 2 [T1] -7.96 dBm Center 2.462 GHz 4 MHz/ Span 40 MHz Date: 3.JUN.2023 16:11:18

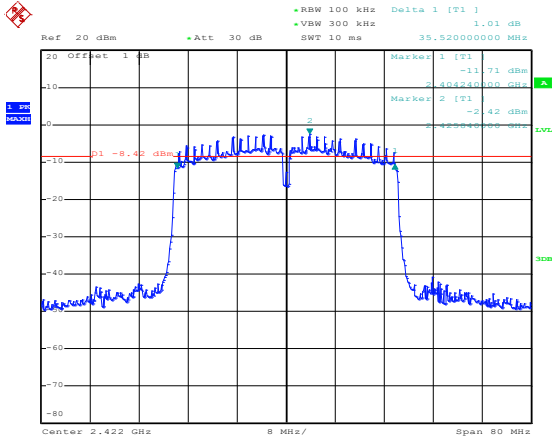
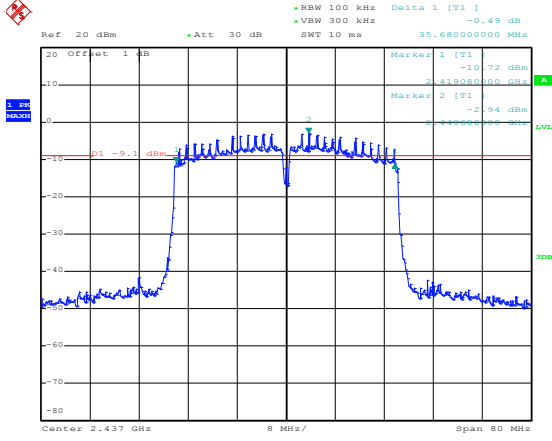
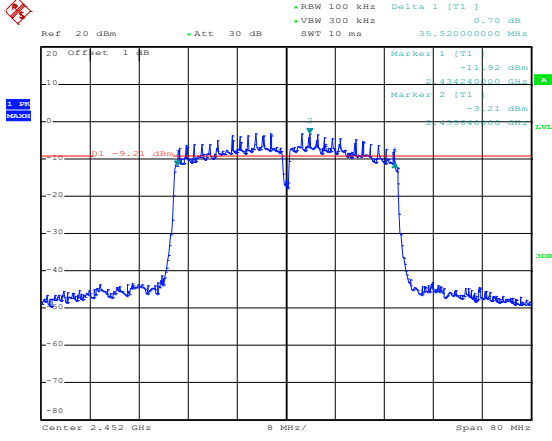
802.11n-HT40-Low	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] 1.01 dB Marker 1 [T1] -11.71 dBm Marker 2 [T1] -2.42 dBm D1 -9.45 dBm Center 2.422 GHz 8 MHz/ Span 80 MHz Date: 3 JUN 2023 16:12:17
802.11n-HT40-Middle	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] -0.49 dB Marker 1 [T1] -10.72 dBm Marker 2 [T1] -2.94 dBm D1 -9.1 dBm Center 2.437 GHz 8 MHz/ Span 80 MHz Date: 3 JUN 2023 16:13:00
802.11n-HT40-High	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] 0.70 dB Marker 1 [T1] -11.92 dBm Marker 2 [T1] -3.21 dBm D1 -9.21 dBm Center 2.452 GHz 8 MHz/ Span 80 MHz Date: 3 JUN 2023 16:13:42




APPENDIX C




RF Output Power					
Test Mode	Frequency MHz	Antenna 1 dBm	Antenna 2 dBm	Total Power dBm	Limit dBm
802.11b _1Mbps	2412	14.27	14.29	/	30.00
	2437	14.08	14.55	/	30.00
	2462	14.34	14.34	/	30.00
802.11g _6Mbps	2412	13.92	13.42	/	30.00
	2437	13.37	13.17	/	30.00
	2462	13.27	13.08	/	30.00
802.11n HT20_MCS0	2412	12.77	12.79	15.79	29.87
	2437	12.13	12.13	15.14	29.87
	2462	12.29	12.06	15.19	29.87
802.11n HT40_MCS0	2422	11.17	11.05	14.12	29.87
	2437	11.09	11.20	14.16	29.87
	2452	11.26	11.11	14.20	29.87

Antenna 1

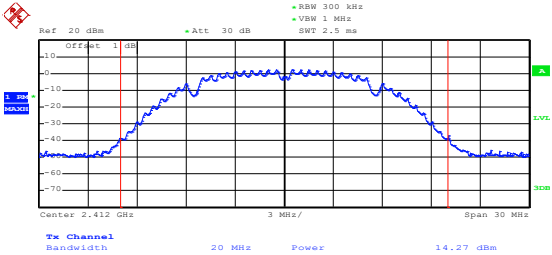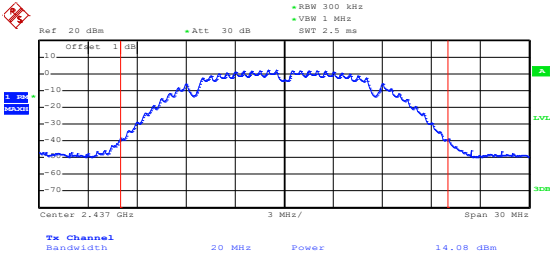
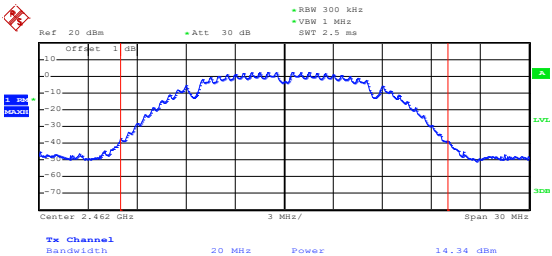
802.11b-Low	 Ref: 20 dBm Att: 30 dB RBW: 300 kHz VSW: 1 MHz SWT: 2.5 ms Center 2.412 GHz Span 30 MHz Tx Channel Bandwidth 20 MHz Power 14.27 dBm Date: 3.JUN.2023 14:06:45
802.11b-Middle	 Ref: 20 dBm Att: 30 dB RBW: 300 kHz VSW: 1 MHz SWT: 2.5 ms Center 2.437 GHz Span 30 MHz Tx Channel Bandwidth 20 MHz Power 14.08 dBm Date: 3.JUN.2023 14:07:35
802.11b-High	 Ref: 20 dBm Att: 30 dB RBW: 300 kHz VSW: 1 MHz SWT: 2.5 ms Center 2.462 GHz Span 30 MHz Tx Channel Bandwidth 20 MHz Power 14.34 dBm Date: 3.JUN.2023 14:08:52

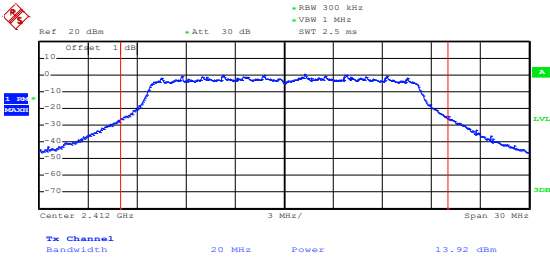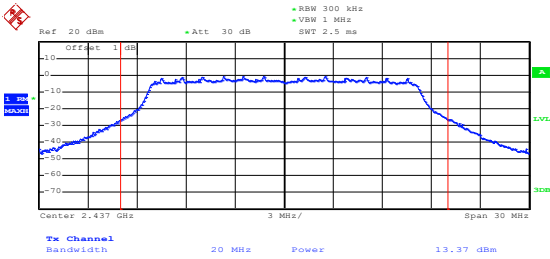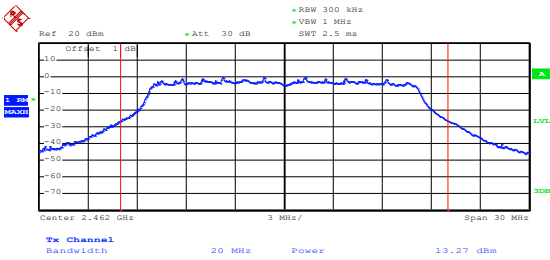802.11g-Low	 Date: 3.JUN.2023 16:30:36
802.11g-Middle	 Date: 3.JUN.2023 14:11:38
802.11g-High	 Date: 3.JUN.2023 14:12:53

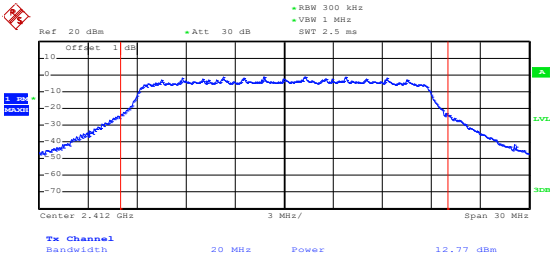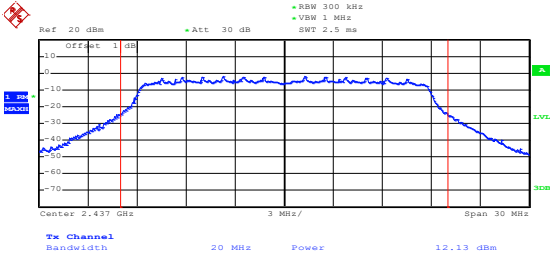
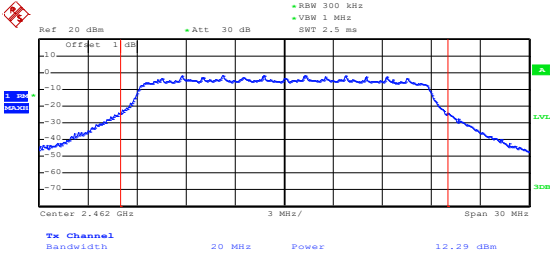
802.11n-HT20-Low	 Date: 3.JUN.2023 14:14:36
802.11n-HT20-Middle	 Date: 3.JUN.2023 14:15:50
802.11n-HT20-High	 Date: 3.JUN.2023 14:16:49

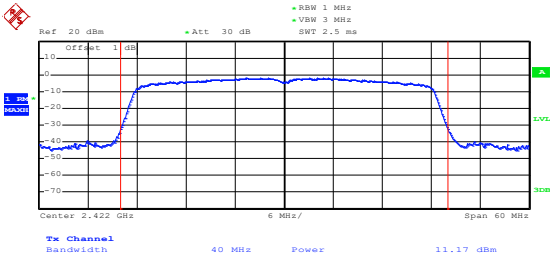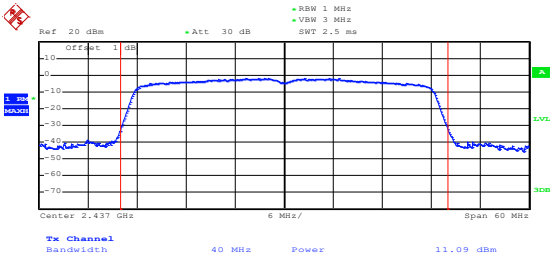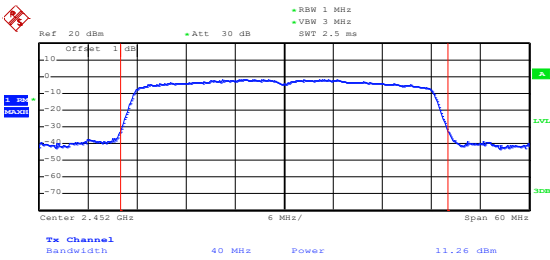802.11n-HT40-Low	 Date: 3.JUN.2023 14:19:50
802.11n-HT40-Middle	 Date: 3.JUN.2023 14:20:21
802.11n-HT40-High	 Date: 3.JUN.2023 14:21:15



Antenna 2

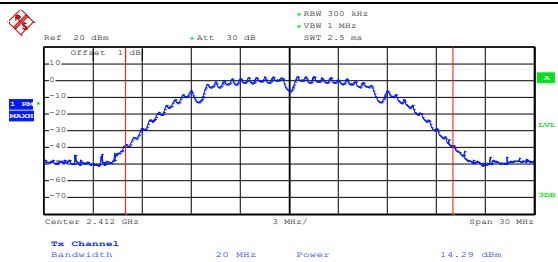




Date: 3.JUN.2023 15:34:15


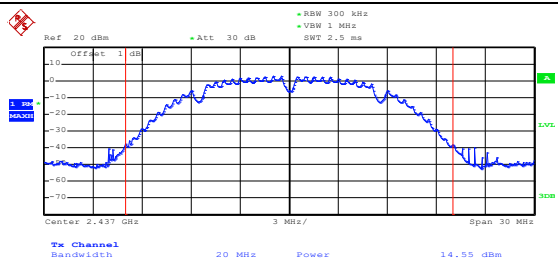






Date: 3.JUN.2023 15:35:49

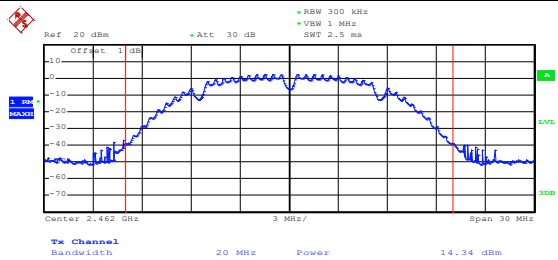

Date: 3.JUN.2023 15:36:22

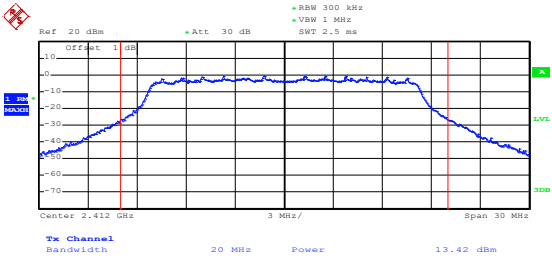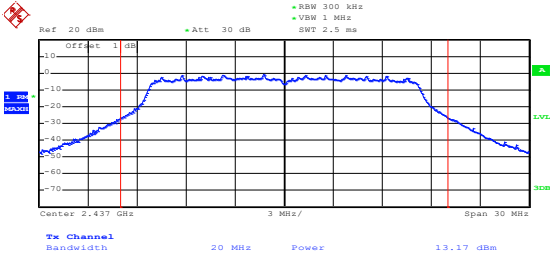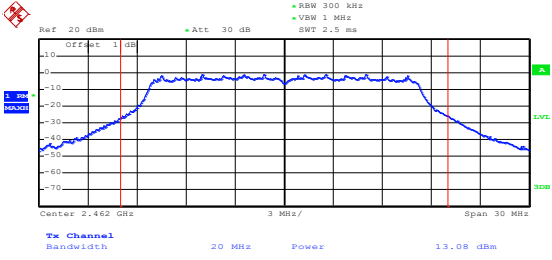802.11g-Low	 Date: 3.JUN.2023 15:38:35
802.11g-Middle	 Date: 3.JUN.2023 15:39:14
802.11g-High	 Date: 3.JUN.2023 15:39:51

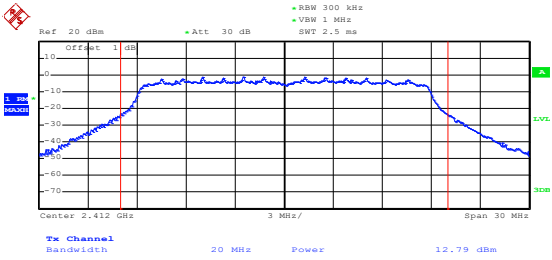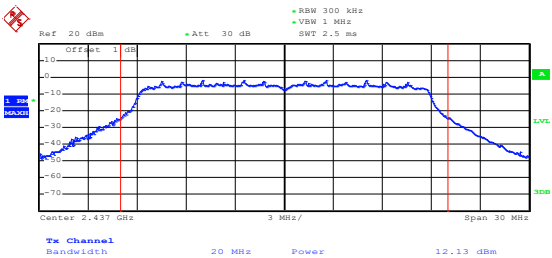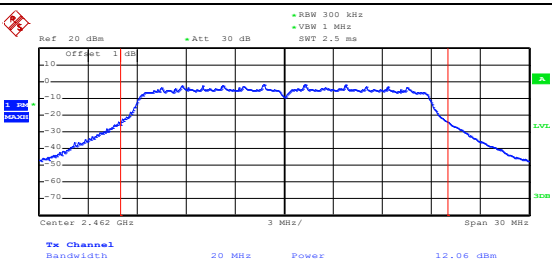802.11n-HT20-Low	 Date: 3.JUN.2023 15:41:32
802.11n-HT20-Middle	 Date: 3.JUN.2023 15:42:09
802.11n-HT20-High	 Date: 3.JUN.2023 15:42:44

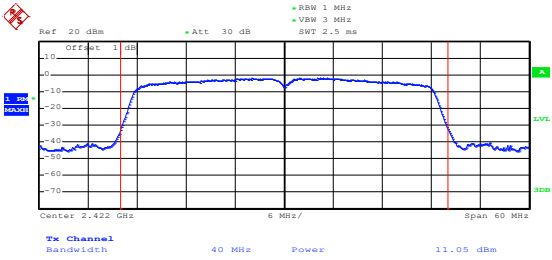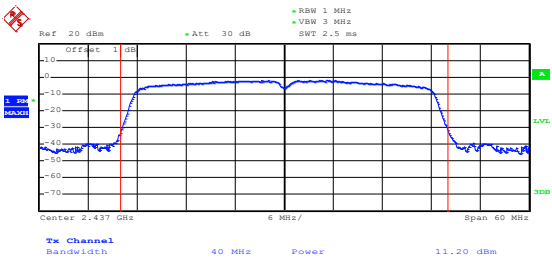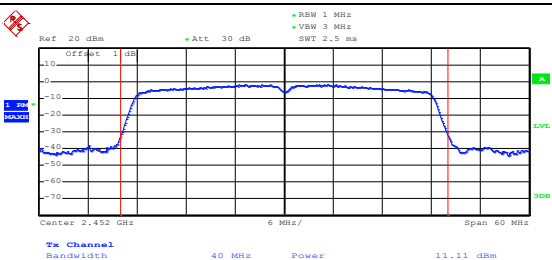
802.11n-HT40-Low	 Date: 3.JUN.2023 15:44:34
802.11n-HT40-Middle	 Date: 3.JUN.2023 15:44:56
802.11n-HT40-High	 Date: 3.JUN.2023 15:45:28

APPENDIX D


Conducted Out of Band Emissions

Antenna 1

802.11b-Low


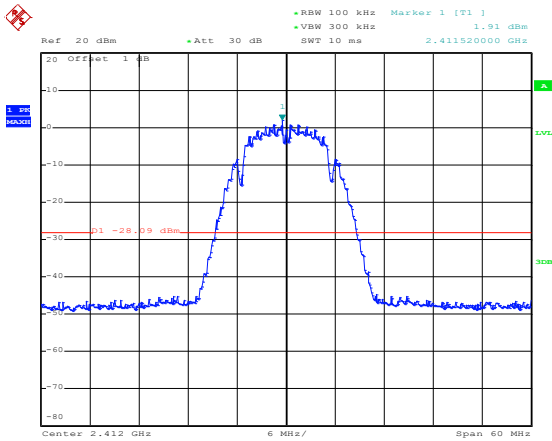


Date: 3.JUN.2023 15:06:57

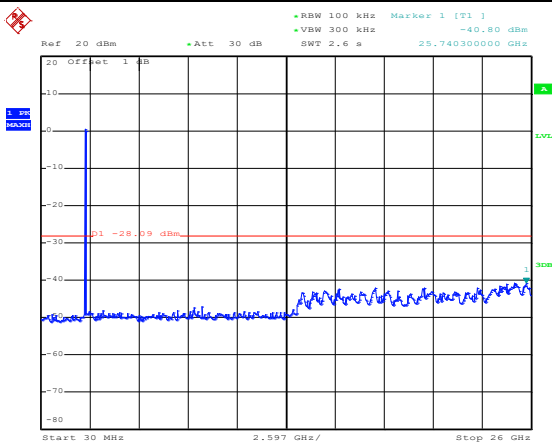





Date: 3.JUN.2023 15:07:52

802.11b-Middle

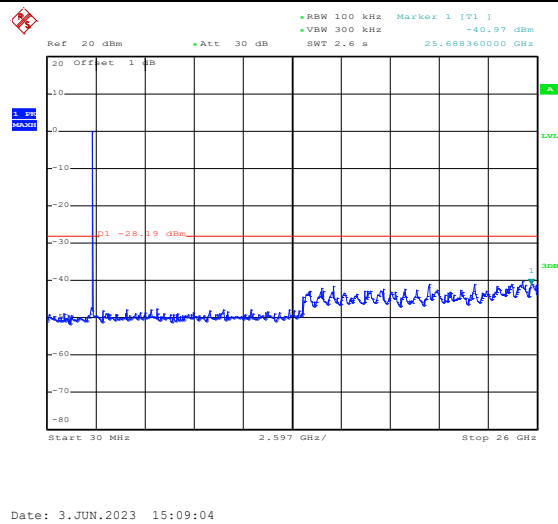
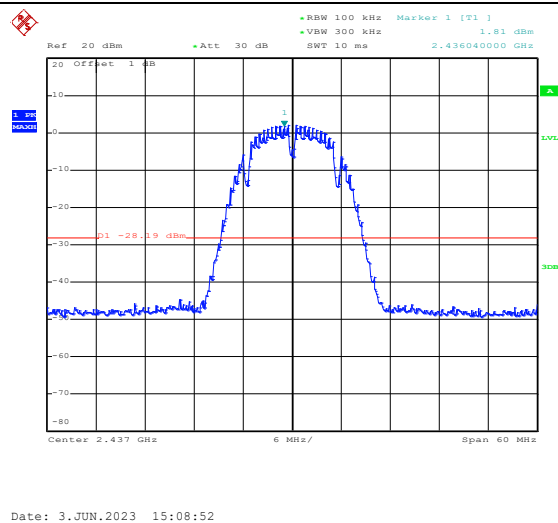


802.11b-High

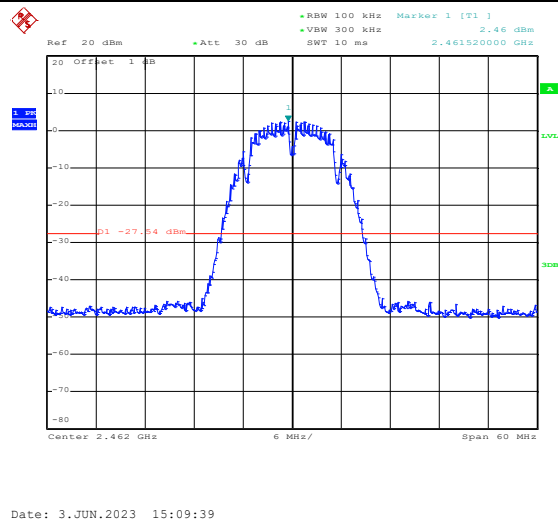


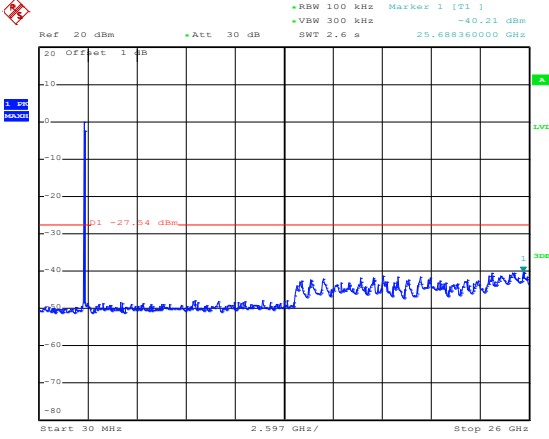
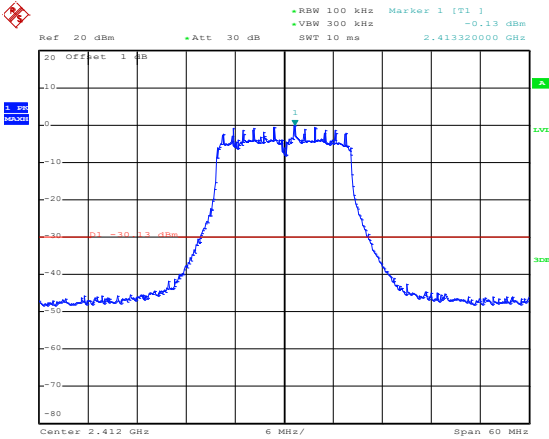
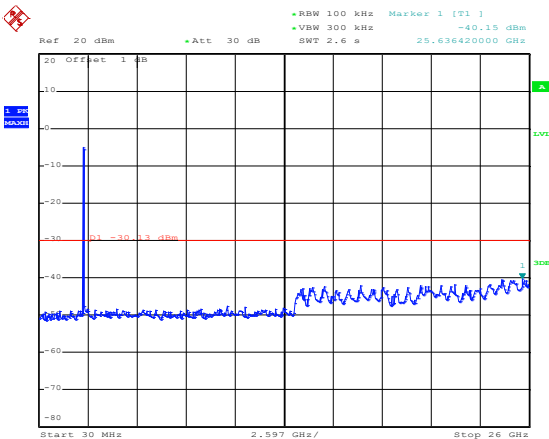
	 Date: 3.JUN.2023 15:09:51
802.11g-Low	 Date: 3.JUN.2023 16:33:48
	 Date: 3.JUN.2023 16:34:02

802.11g-Middle

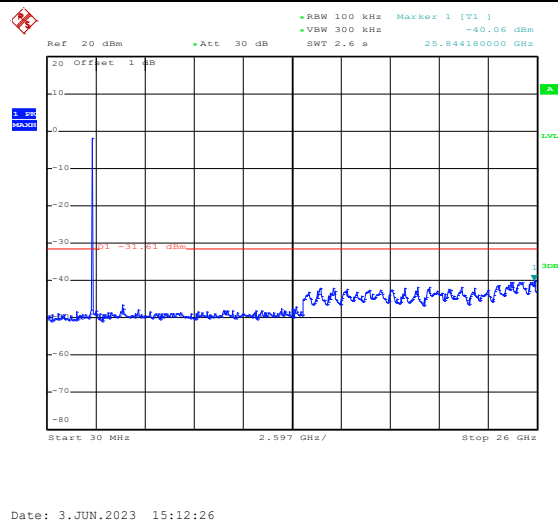
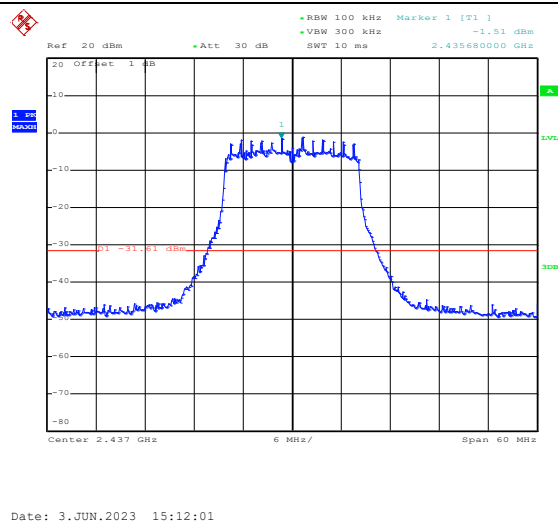


802.11g-High

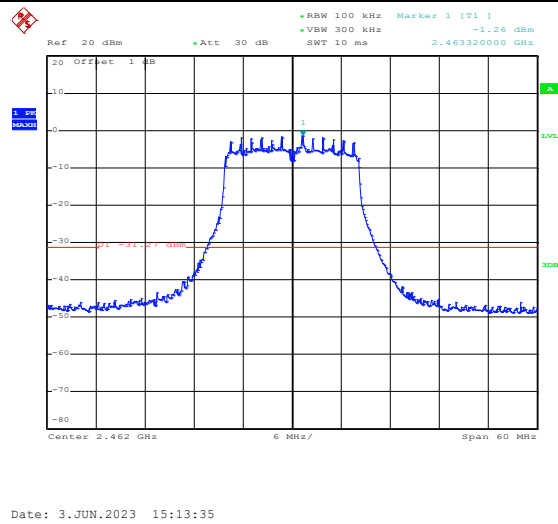


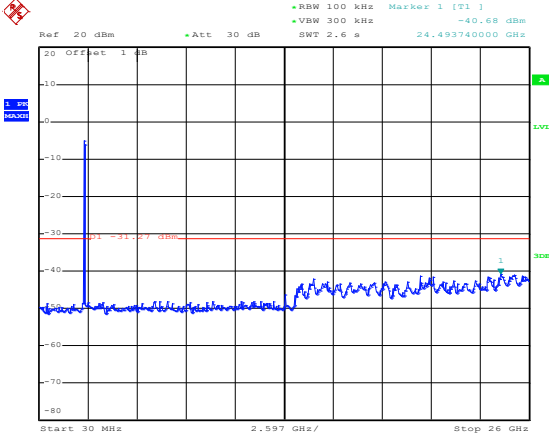
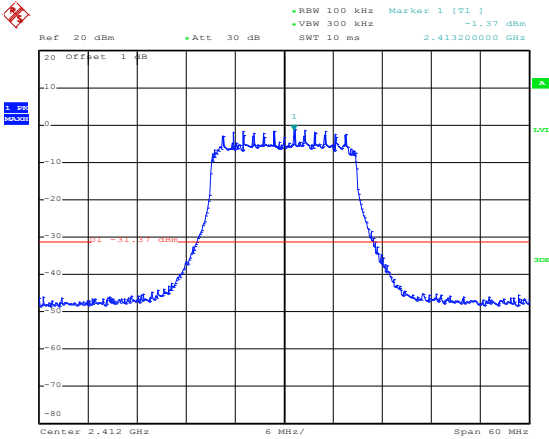
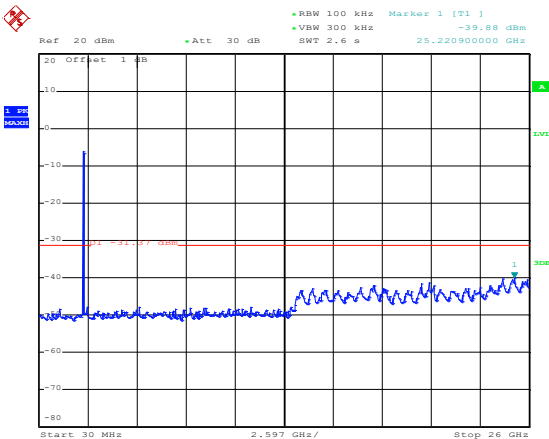
	 Ref 20 dBm Att 30 dB RBW 100 kHz Marker 1 [T1] -40.68 dBm VBW 300 kHz SWT 2.6 s 24.493740000 GHz Start 30 MHz 2.597 GHz/ Stop 26 GHz Date: 3.JUN.2023 15:13:52
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 100 kHz Marker 1 [T1] -1.37 dBm VBW 300 kHz SWT 10 ms 2.413200000 GHz Center 2.412 GHz 6 MHz/ Span 60 MHz Date: 3.JUN.2023 15:15:47
	 Ref 20 dBm Att 30 dB RBW 100 kHz Marker 1 [T1] -39.88 dBm VBW 300 kHz SWT 2.6 s 25.220900000 GHz Start 30 MHz 2.597 GHz/ Stop 26 GHz Date: 3.JUN.2023 15:15:59

802.11n-HT20-Middle

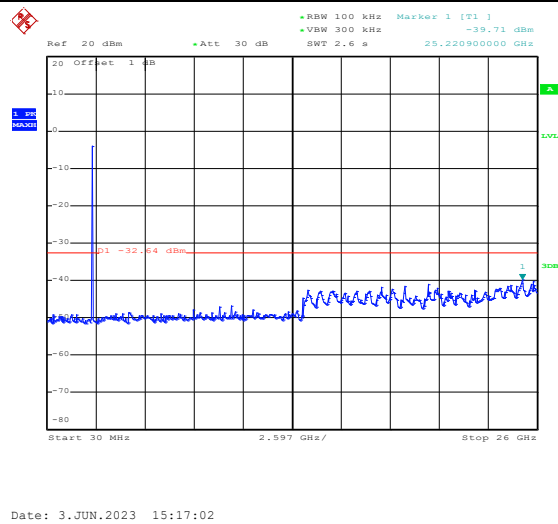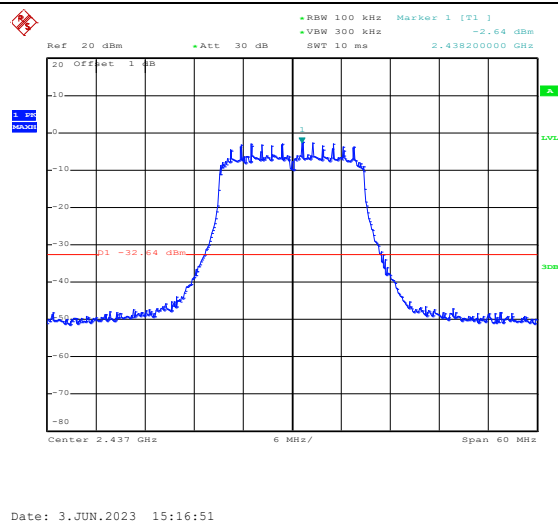


802.11n-HT20-High

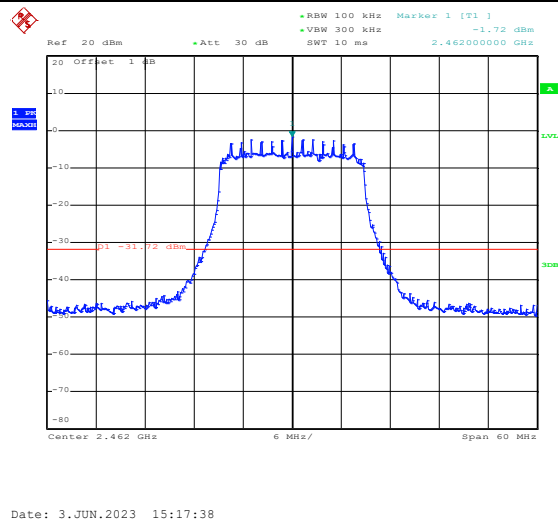


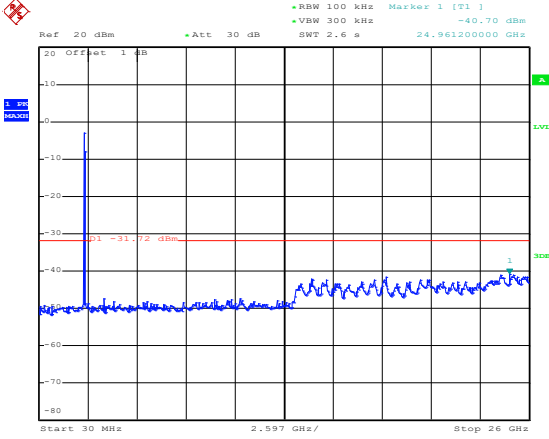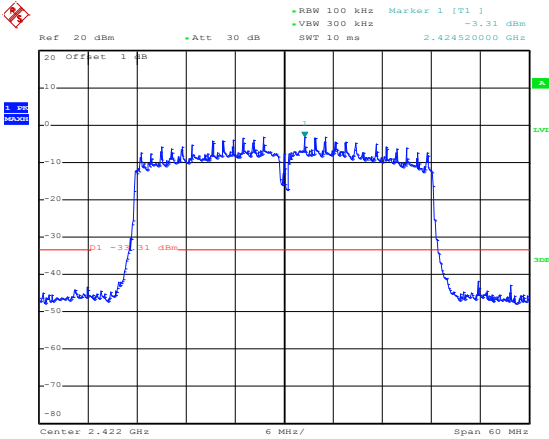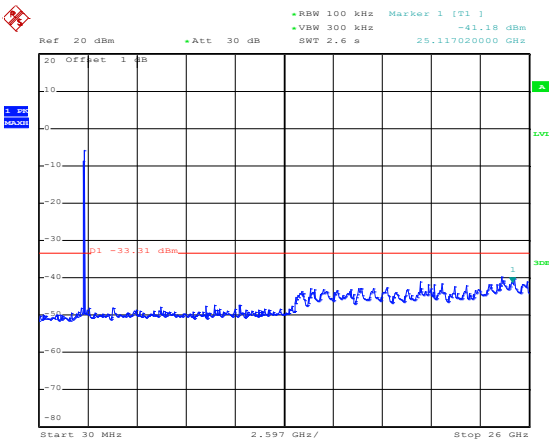
	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Marker 1 [T1] -40.70 dBm •VBW 300 kHz SWT 2.6 s 24.96120000 GHz 20 Offset 1 dB Start 30 MHz 2.597 GHz/ Stop 26 GHz Date: 3.JUN.2023 15:17:53
802.11n-HT40-Low	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Marker 1 [T1] -3.31 dBm •VBW 300 kHz SWT 10 ms 2.424520000 GHz 20 Offset 1 dB Center 2.422 GHz 6 MHz/ Span 60 MHz Date: 3.JUN.2023 15:18:46
	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Marker 1 [T1] -41.18 dBm •VBW 300 kHz SWT 2.6 s 25.117020000 GHz 20 Offset 1 dB Start 30 MHz 2.597 GHz/ Stop 26 GHz Date: 3.JUN.2023 15:18:58

802.11n-HT40-Middle

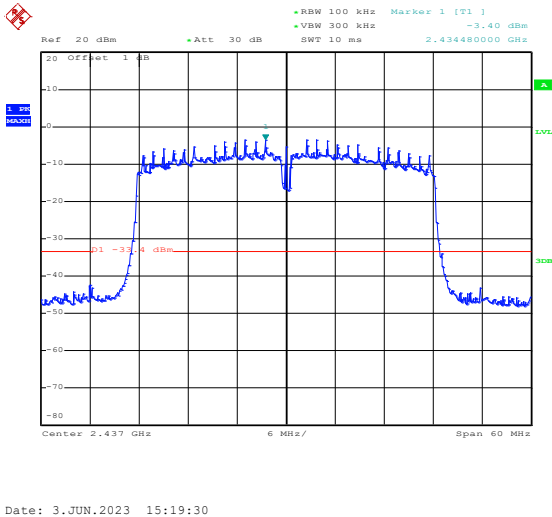


802.11n-HT40-High

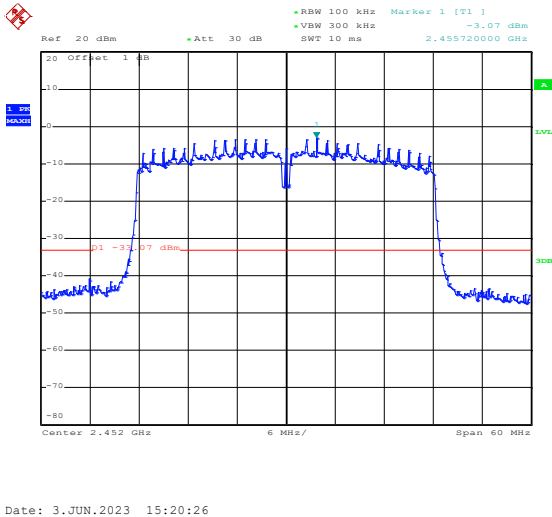

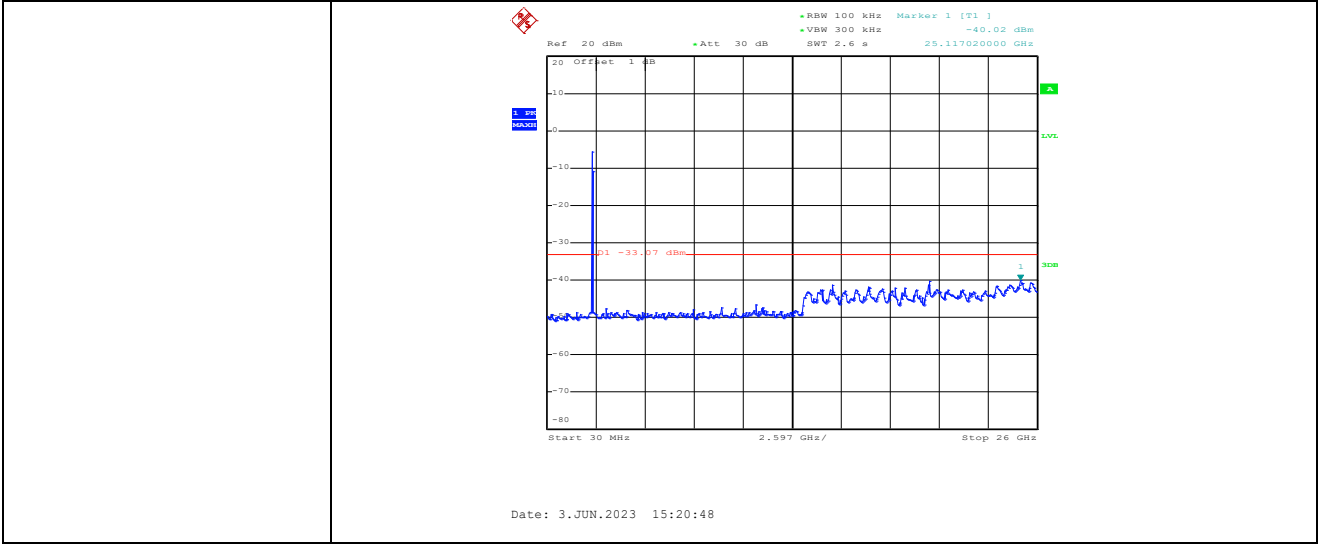


Antenna 2

802.11b-Low

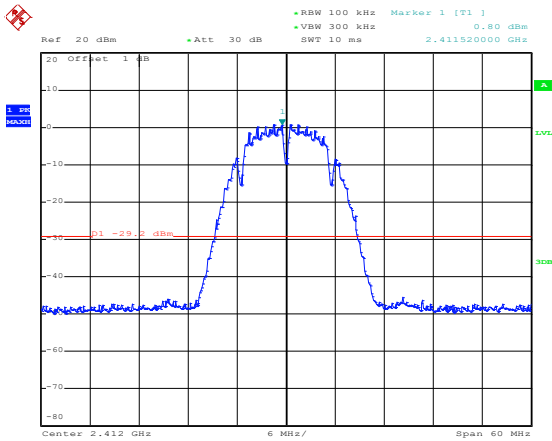


Date: 3.JUN.2023 16:16:06



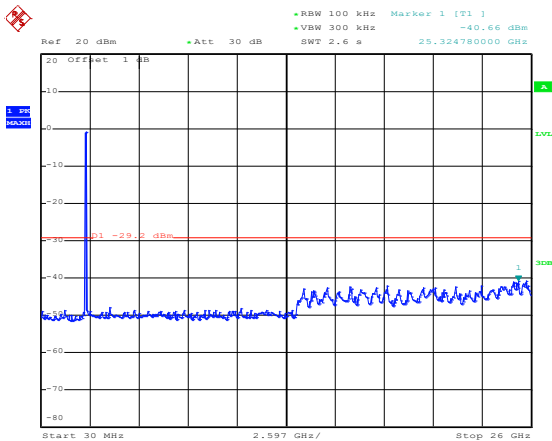


Date: 3.JUN.2023 16:16:15



802.11b-Middle

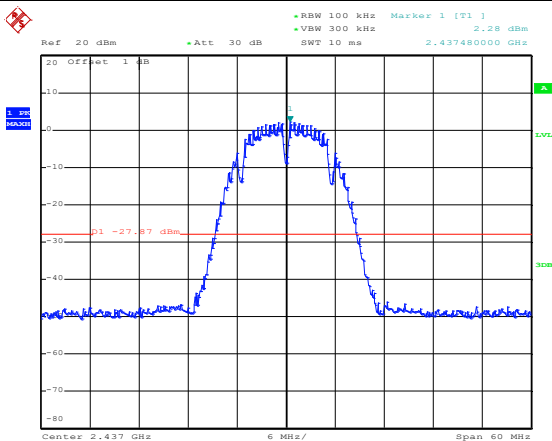


Date: 3.JUN.2023 16:16:45

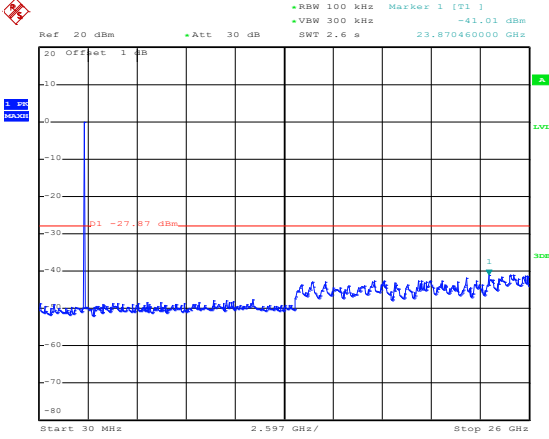
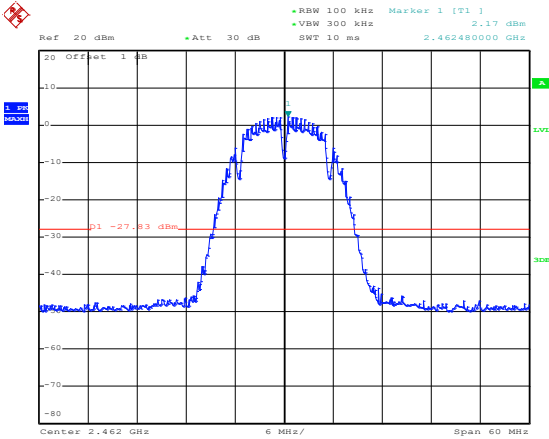
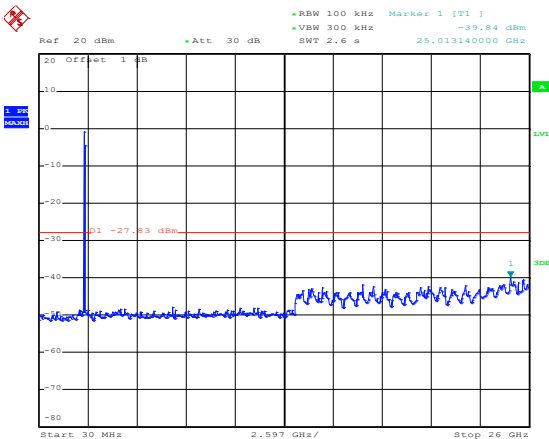
	 Date: 3.JUN.2023 16:16:54
802.11b-High	 Date: 3.JUN.2023 16:17:36
	 Date: 3.JUN.2023 16:17:46

802.11g-Low

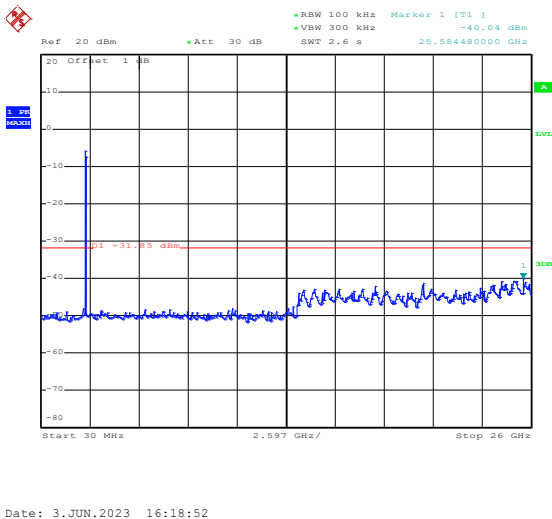
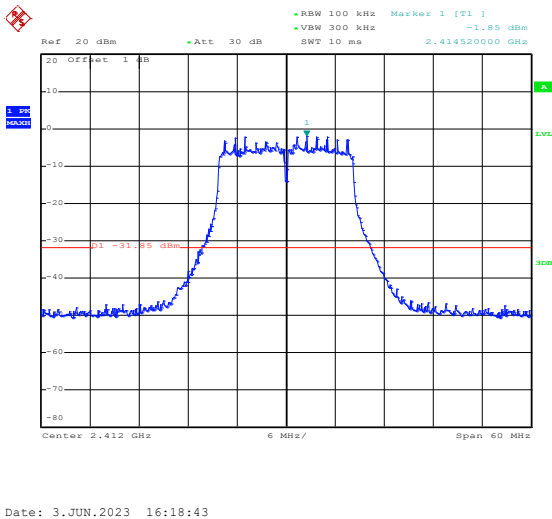


802.11g-Middle

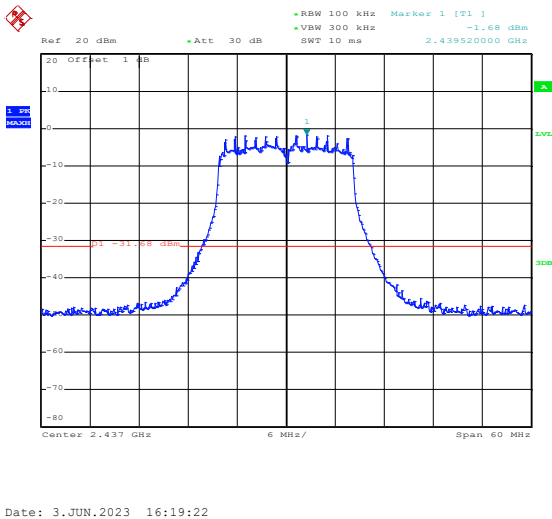


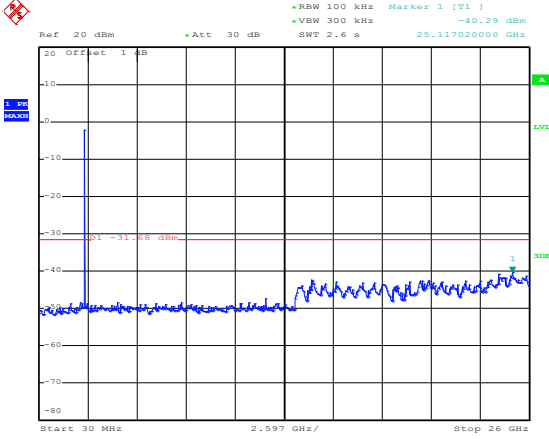
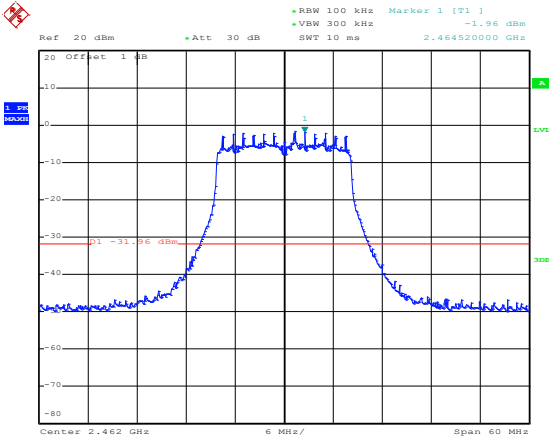
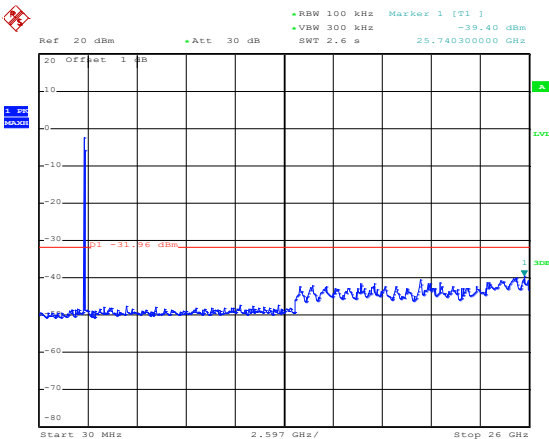
	 Date: 3.JUN.2023 16:19:31
802.11g-High	 Date: 3.JUN.2023 16:20:08
	 Date: 3.JUN.2023 16:20:38

802.11n-HT20-Low

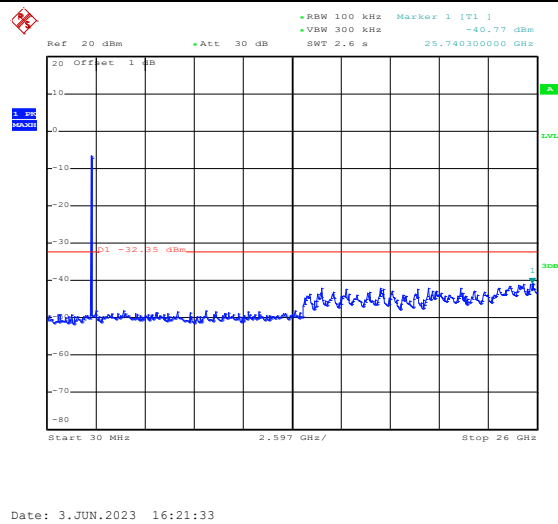
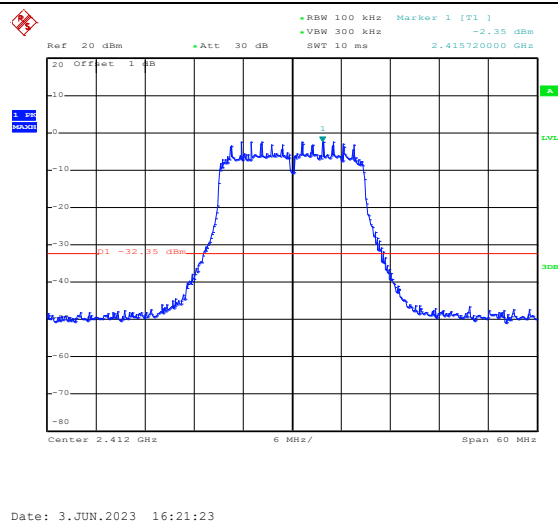


802.11n-HT20-Middle

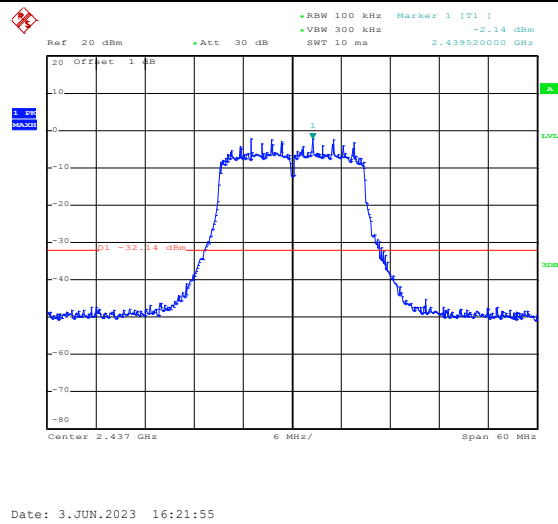


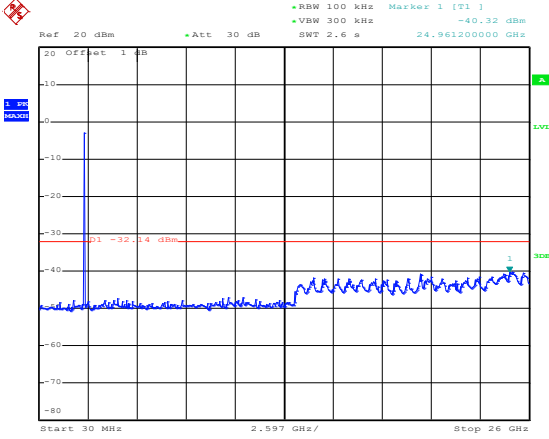
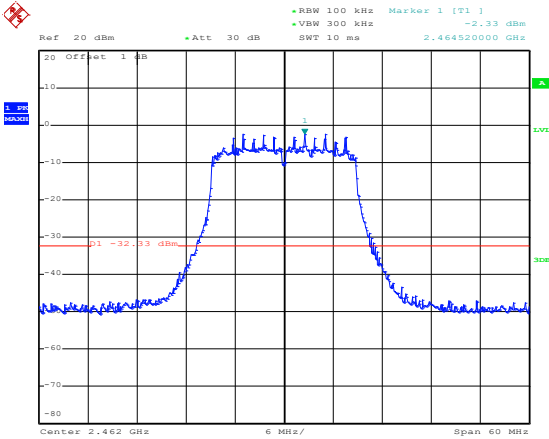
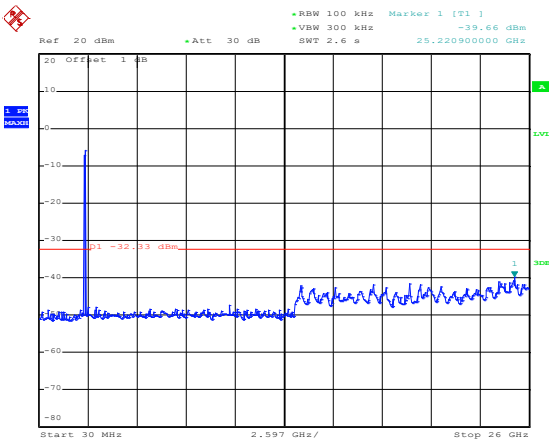
	 Date: 3.JUN.2023 16:22:27
802.11n-HT20-High	 Date: 3.JUN.2023 16:22:55
	 Date: 3.JUN.2023 16:23:04

802.11n-HT40-Low

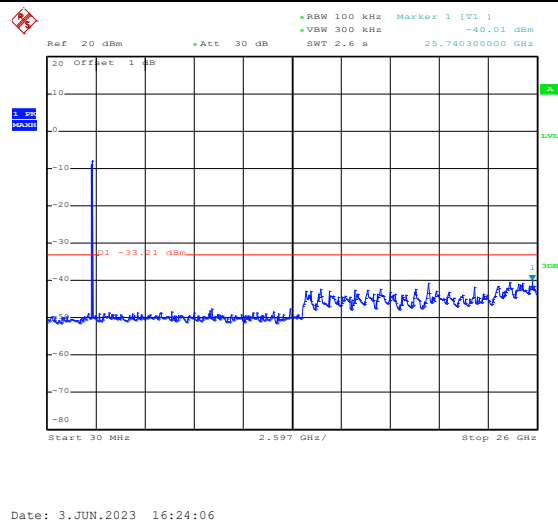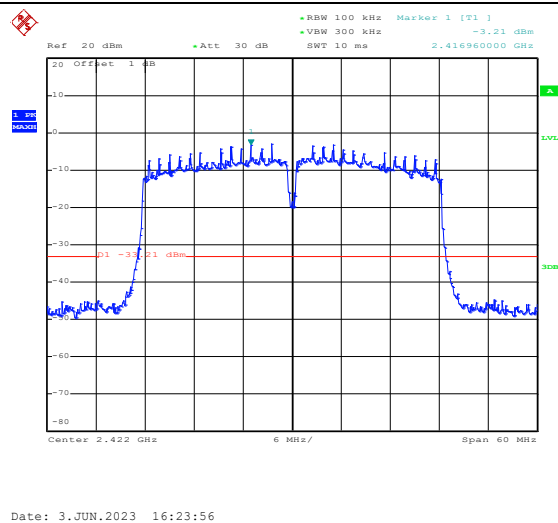

802.11n-HT40-Middle

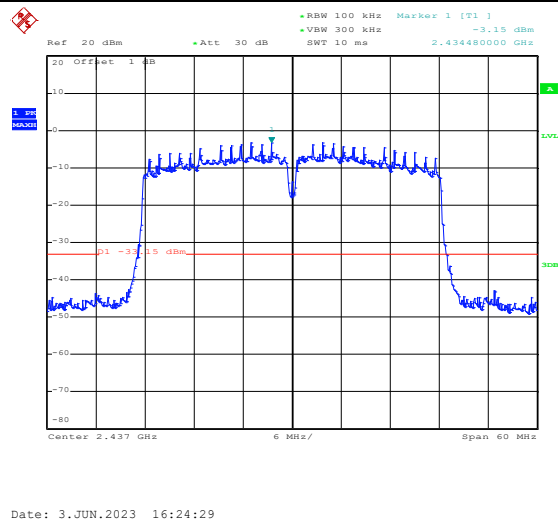

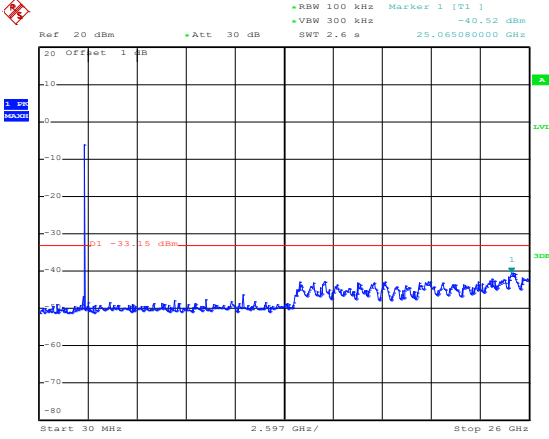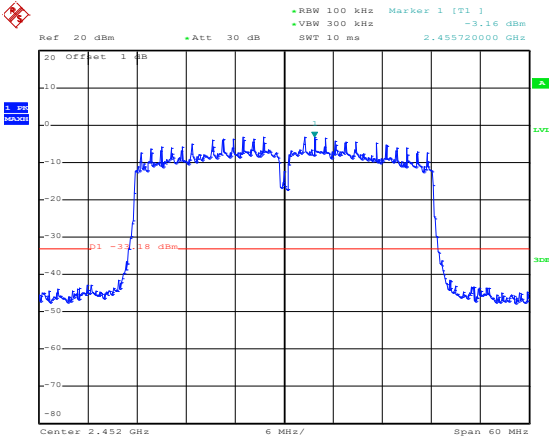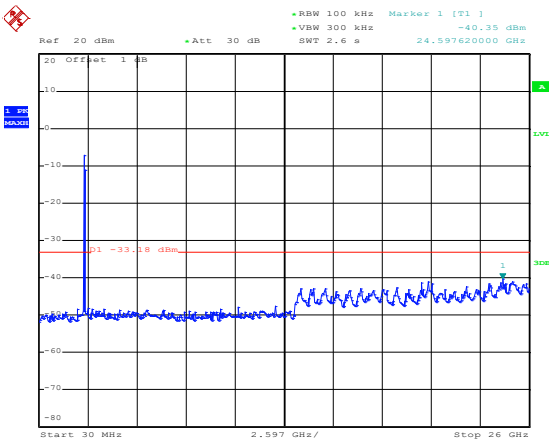	 Date: 3.JUN.2023 16:24:39
802.11n-HT40-High	 Date: 3.JUN.2023 16:25:30
	 Date: 3.JUN.2023 16:25:41

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****