

#01_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch1;Aux Ant

Communication System: WLAN 2.4GHz; Frequency: 2412.0 ; Duty Cycle: 1:1.012

Medium: HSL_2450_220522 Medium parameters used: $f = 2412.0$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.41, 8.41, 8.41); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10415-AAA
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (70.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 12.0 mm

SAR (1g) = 0.525 W/kg; SAR (10g) = 0.266 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.569 W/kg; SAR (10g) = 0.299 W/kg;

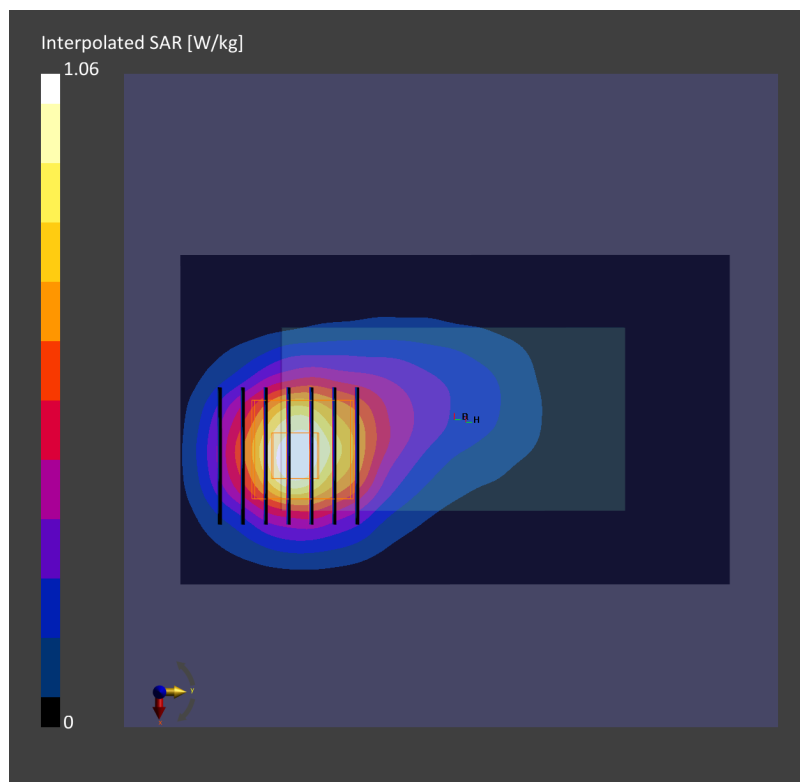

#02_WLAN5GHz_802.11ac-VHT160 MCS0_Left side_5mm_Ch50;Main Ant

Communication System: WLAN 5GHz; Frequency: 5250.0 ; Duty Cycle: 1:1.022

Medium: HSL_5250_220518 Medium parameters used: $f = 5250.0$ MHz; $\sigma = 4.60$ S/m; $\epsilon_r = 35.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(5.45, 5.45, 5.45); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10554-AAD
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.601 W/kg; SAR (10g) = 0.169 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.06 dB

SAR (1g) = 0.679 W/kg; SAR (10g) = 0.181 W/kg;

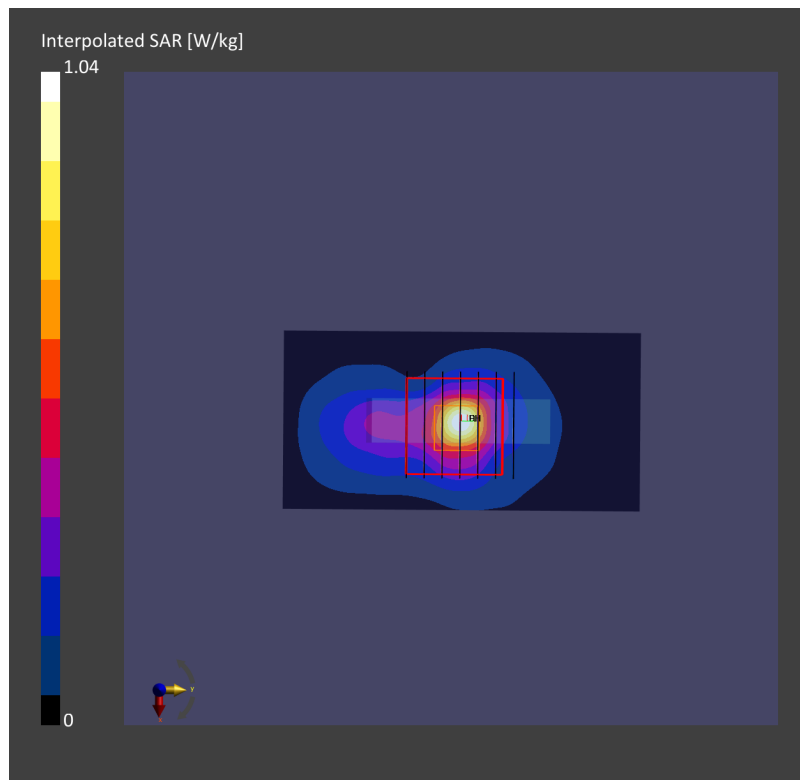

#03_WLAN5GHz_802.11ac-VHT160 MCS0_Left side_5mm_Ch114;Aux Ant

Communication System: WLAN 5GHz; Frequency: 5570.0 ; Duty Cycle: 1:1.022

Medium: HSL_5600_220518 Medium parameters used: $f = 5570.0$ MHz; $\sigma = 4.97$ S/m; $\epsilon_r = 34.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(4.75, 4.75, 4.75); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10554-AAD
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.490 W/kg; SAR (10g) = 0.146 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.527 W/kg; SAR (10g) = 0.147 W/kg;

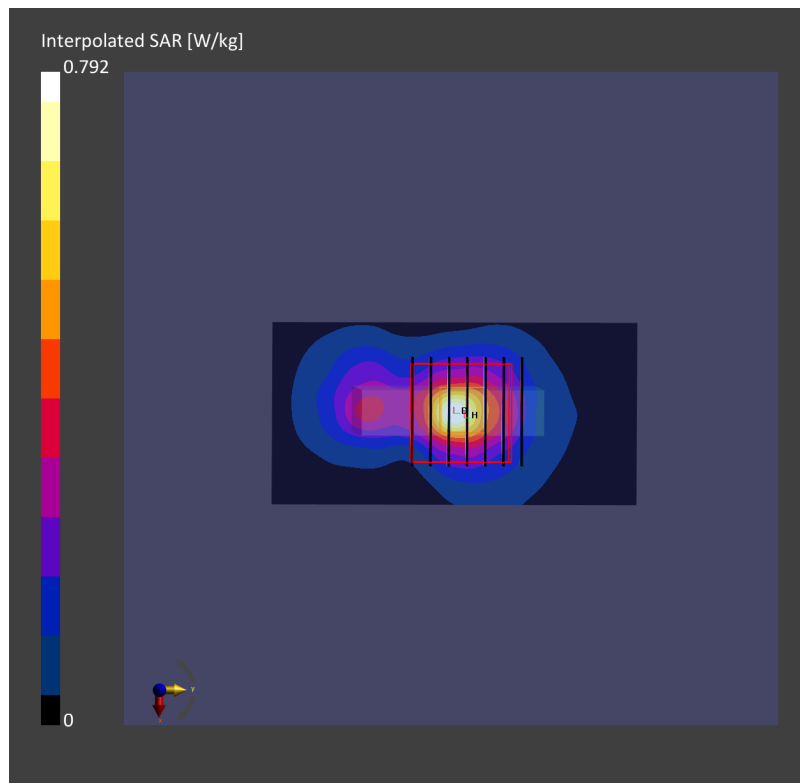

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Left side_5mm_Ch155;Main Ant

Communication System: WLAN 5GHz; Frequency: 5775.0 ; Duty Cycle: 1:1.022

Medium: HSL_5750_220518 Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.21$ S/m; $\epsilon_r = 34.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(5.0, 5.0, 5.0); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10544-AAC
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.403 W/kg; SAR (10g) = 0.122 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.498 W/kg; SAR (10g) = 0.128 W/kg;

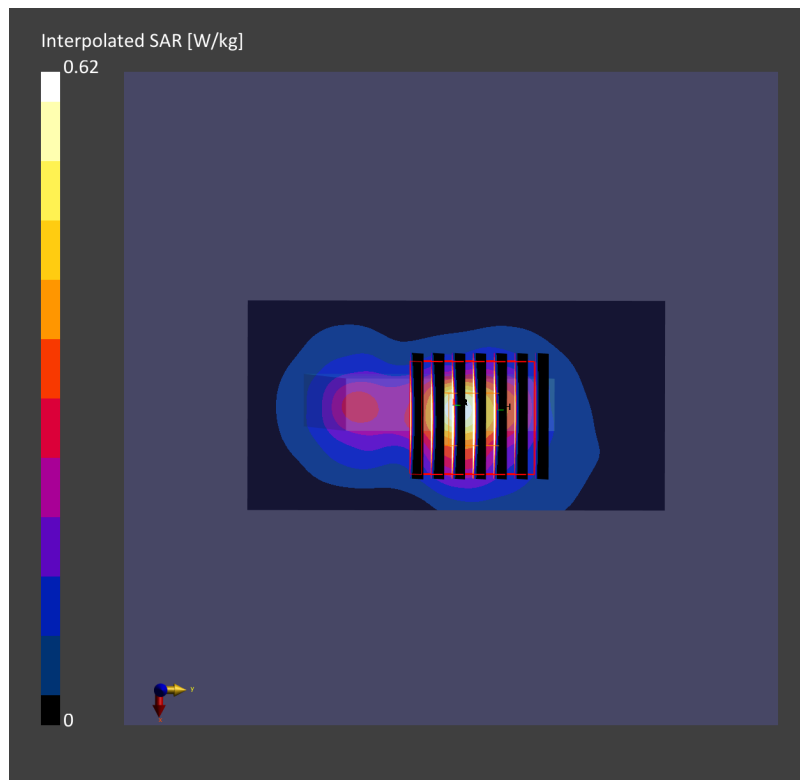

#05_Bluetooth_1Mbps_Back_5mm_Ch39;Aux Ant

Communication System: ISM 2.4 GHz Band; Frequency: 2441.0 ; Duty Cycle: 1:1.135

Medium: HSL_2450_220522 Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.41, 8.41, 8.41); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: Bluetooth, 10032-CAA
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (70.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 12.0 mm

SAR (1g) = 0.162 W/kg; SAR (10g) = 0.083 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.00 dB

SAR (1g) = 0.175 W/kg; SAR (10g) = 0.090 W/kg;

