

FCC Co-Location Test Report

FCC ID : SWX-UAP6L

Equipment : UniFi Network UAP6 Lite

Model No. : UAP6-Lite

Brand Name : UBIQUITI

Applicant : Ubiquiti Inc.

Address : 685 Third Avenue, New York, New York 10017

USA

Standard : 47 CFR FCC Part 15.247

47 CFR FCC Part 15.407

Received Date : Mar. 03, 2020

Tested Date : Apr. 16 ~ Apr. 20, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Chen / Assistant Manager Gary Chang / Manager

Testing Laboratory

Report No.: FR030302CO Page: 1 of 16



Table of Contents

1	GENERAL DESCRIPTION	5
1.1		
	Information	
1.2	The Equipment List	6
1.3	Test Standards	
1.4	Deviation from Test Standard and Measurement Procedure	7
1.5	Measurement Uncertainty	7
2	TEST CONFIGURATION	7
2.1	Testing Condition	
2.2	The Worst Test Modes and Channel Details	8
3	TRANSMITTER TEST RESULTS	9
3.1	Unwanted Emissions into Restricted Frequency Bands	9
4	TEST LABORATORY INFORMATION	16



Release Record

Report No.	Version	Description	Issued Date
FR030302CO	Rev. 01	Initial issue	Apr. 23, 2020

Report No.: FR030302CO Page: 3 of 16



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d)			
15.407(b)	Radiated Emissions	[dBuV/m at 3m]: 69.18MHz 39.51 (Margin -0.49dB) - QP	Pass
15.209		(waigin or loab) q	

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Report No.: FR030302CO Page: 4 of 16



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

Operating Frequency	802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac/ax: 5180 MHz ~ 5240 MHz; 5745 ~ 5825 MHz
Modulation Type	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac/ax: OFDM/OFDMA- BPSK, QPSK, 16QAM, 64QAM, 256QAM and 1024QAM)

1.1.2 Antenna Details

Ant.	Time		Antenna Gain (dBi)		
No.	Туре	Connector	2400~2483.5MHz	5150~5250 MHz	5725~5850 MHz
1	Internal antenna	I-PEX	3.8	4	4
2	Internal antenna	I-PEX	3.8	4	4

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	48Vdc from PoE

Report No.: FR030302CO Page: 5 of 16



1.2 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 17, 2019	Dec. 16, 2020
Receiver	R&S	ESR3	101657	Feb. 14, 2020	Feb. 13, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 12, 2019	Jul. 11, 2020
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 12, 2019	Dec. 11, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020
Preamplifier	EMC	EMC02325	980225	Jul. 09, 2019	Jul. 08, 2020
Preamplifier	Agilent	83017A	MY39501308	Oct. 08, 2019	Oct. 07, 2020
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020
RF Cable	EMC	EMC104-SM-SM-80 00	181106	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 07, 2019	Oct. 06, 2020
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 07, 2019	Oct. 06, 2020
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 07, 2019	Oct. 06, 2020
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Oct. 07, 2019	Oct. 06, 2020
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Test Item	RF Conducted					
Test Site	(TH01-WS)					
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until	
Spectrum Analyzer	R&S	FSV40	101498	Dec. 17, 2019	Dec. 16, 2020	
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 12, 2019	Dec. 11, 2020	
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020	
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020	
DC POWER SOURCE	GW INSTEK	GPC-6030D	GES855395	Oct. 29, 2019	Oct. 28, 2020	
AC POWER SOURCE	APC	AFC-500W	F312060012	Dec. 02, 2019	Dec. 01, 2020	
Measurement Software	-	SENSE-15247_DTS	V5.10	NA	NA	

Report No.: FR030302CO Page: 6 of 16



1.3 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

47 CFR FCC Part 15.407

ANSI C63.10-2013

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

1.4 Deviation from Test Standard and Measurement Procedure

None

1.5 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty			
Parameters	Uncertainty		
Radiated emission ≤ 1GHz	±3.41 dB		
Radiated emission > 1GHz	±4.59 dB		

Report No.: FR030302CO Page: 7 of 16



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH01-WS	23-24°C / 65-67%	Akun Chung Roger Lu

FCC Designation No.: TW2732FCC site registration No.: 181692

➤ ISED#: 10807A

➤ CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Channel	Data Rate		
Radiated Emissions	11n HT20 + 11a	CH6 + CH149	MCS 0 + 6Mbps		
Conducted Emissions	1111 H120 + 11a	CH0 + CH149			
NOTE: The selected channel is the maximum power channel of Wi-Fi mode.					

Report No.: FR030302CO Page: 8 of 16



3 Transmitter Test Results

3.1 Unwanted Emissions into Restricted Frequency Bands

3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit					
Frequency Range (MHz)	Measure Distance (m)				
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300		
0.490~1.705	24000/F(kHz)	33.8 - 23	30		
1.705~30.0	30	29	30		
30~88	100	40	3		
88~216	150	43.5	3		
216~960	200	46	3		
Above 960	500	54	3		

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2**:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.1.2 Test Procedures

- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR030302CO Page: 9 of 16




3.1.3 Test Setup

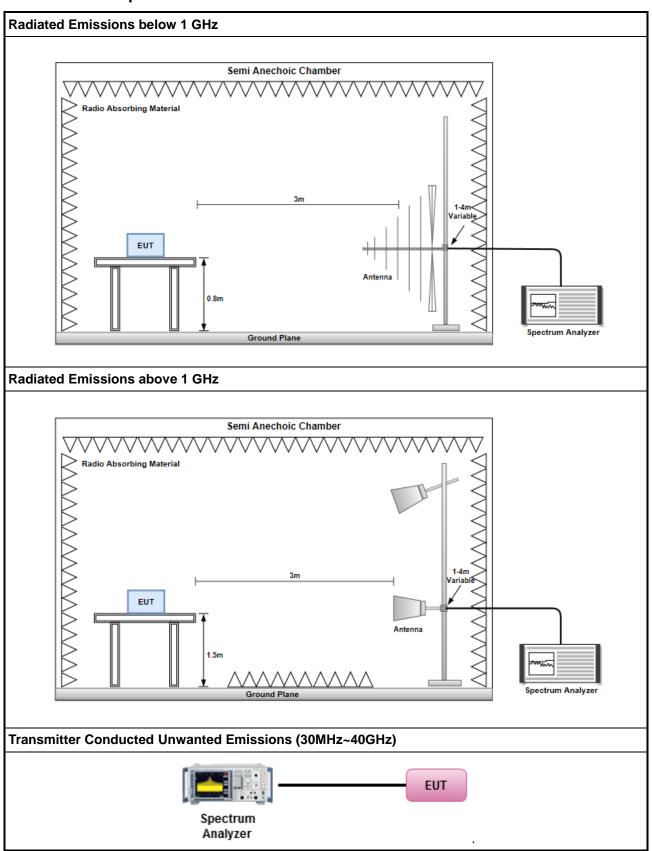

Report No.: FR030302CO Page: 10 of 16



3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

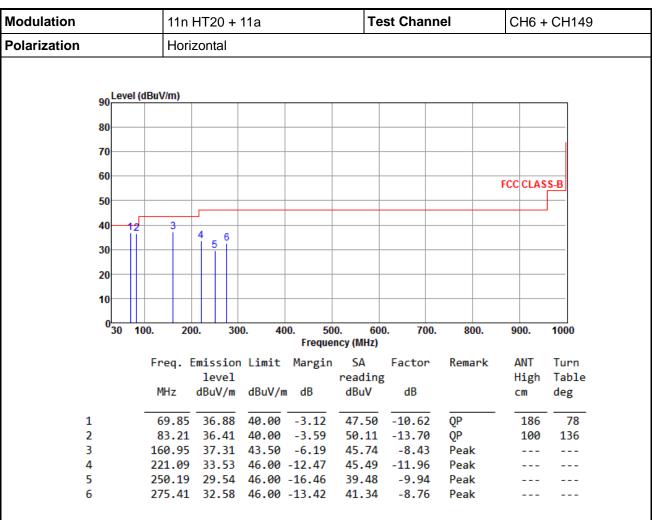

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR030302CO Page: 11 of 16



Modulation	11n HT20 + 11a	Test Channel	CH6 + CH149						
Polarization	Vertical								
90 Level (dBu) 80 70 60 50 40 2 3			FCC CLASS-B						
10									
030 100.	200. 300. 400. 500 Frequer	. 600. 700. 800. cy (MHz)	900. 1000						
	req. Emission Limit Margin level MHz dBuV/m dBuV/m dB	SA Factor Remark reading dBuV dB	ANT Turn High Table cm deg						
	39.56 38.89 40.00 -1.11	47.61 -8.72 QP	100 56						
	46.53 38.87 40.00 -1.13	47.23 -8.36 QP	100 50						
L	59.18 39.51 40.00 -0.49	50.01 -10.50 QP	100 148						
	59.01 33.00 43.50 -10.50 10.42 31.52 43.50 -11.98	41.32 -8.32 Peak 43.58 -12.06 Peak							
	17.12 27.06 46.00 -18.94	34.53 -7.47 Peak							

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR030302CO Page: 12 of 16



3.1.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

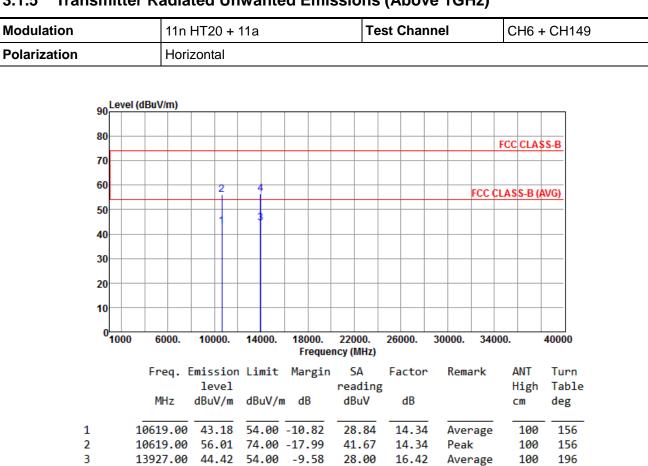

40.08

16.42

Peak

100

196

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

13927.00 56.50 74.00 -17.50

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR030302CO Page: 13 of 16



1 2

3

Modulation		11r	n HT20 + 1	l1a		T	est Cha	nnel		С	H6 -	+ CH149		
Polarization		Ve	Vertical											
	90 Lev	vel (dBuV/m)												
	80													
										FCC	CLAS	SS-B		
	70													
	60		2	4					FCC	CLAS	S-B (#	AVG)		
	50													
	40													
	30													
	20													
	10													
	0100	6000.	10000.	14000.	18000. Freque	22000. ncy (MHz)	26000.	30000.	340	000.		40000		
		Freq.	Emission level	Limit	Margin	SA readin	Factor	r Rem	ark		NT High	Turn Table		
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB				m	deg		

28.73

40.93

27.91

39.98

14.34

14.34

16.42

16.42

Average

Average

Peak

Peak

100

100

100

100

163

163

193

193

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain

10619.00 43.07 54.00 -10.93

10619.00 55.27 74.00 -18.73

13927.00 44.33 54.00 -9.67


13927.00 56.40 74.00 -17.60


Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR030302CO Page: 14 of 16



3.1.6 Conducted Emissions (30MHz~40GHz)

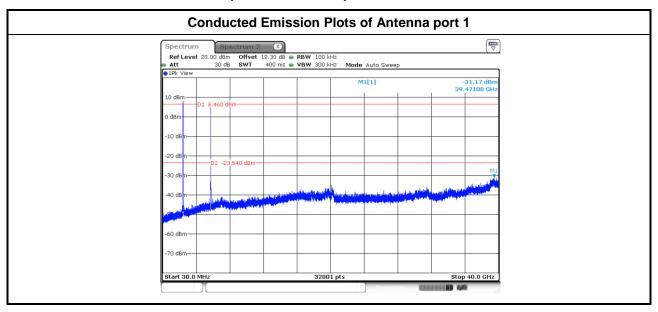

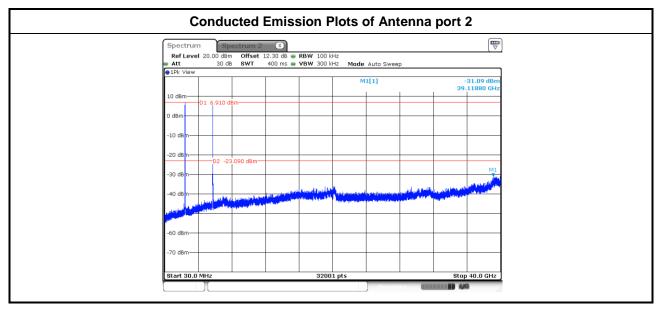

Report No.: FR030302CO Page: 15 of 16



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C..

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==

Report No.: FR030302CO Page: 16 of 16