





FR1 N77 / 80MHz / CP OFDM / 64QAM

Highest Channel


1RB0

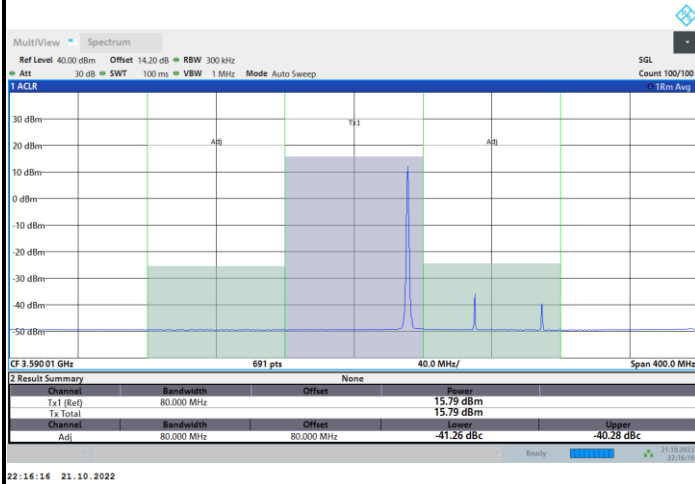

1RBmax

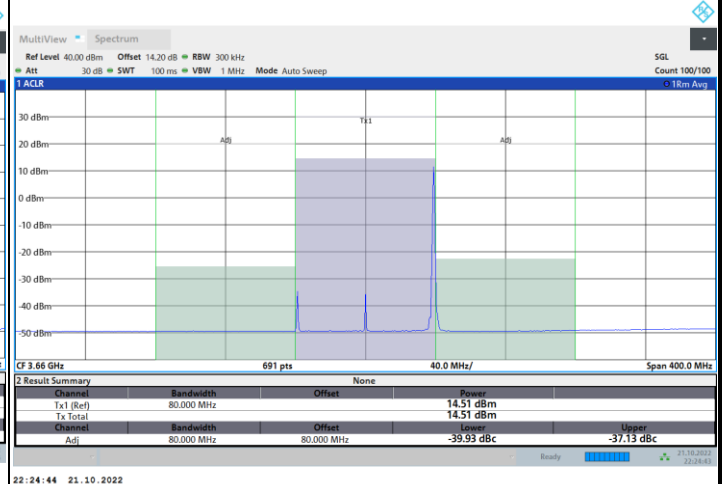

Full RB

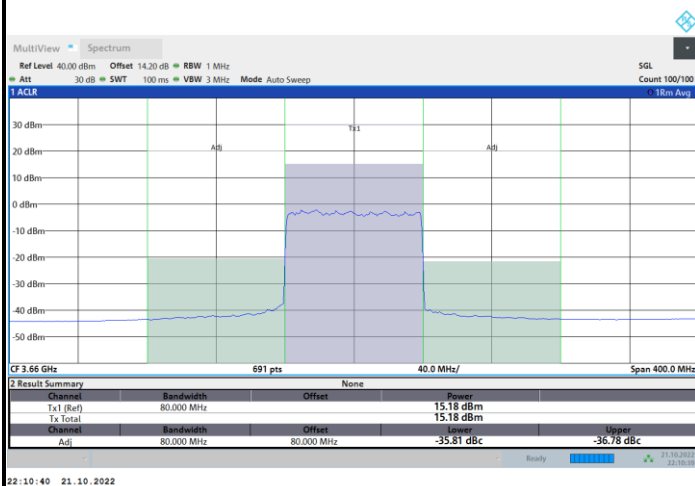





FR1 N77 / 80MHz / CP OFDM / 256QAM

Lowest Channel

1RB0

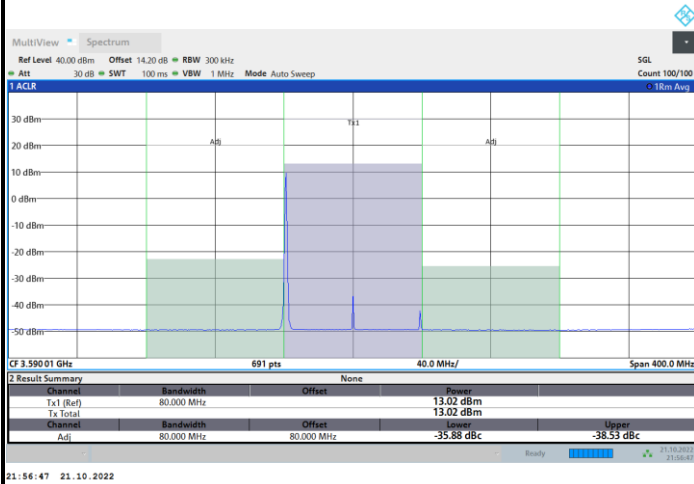

1RBmax

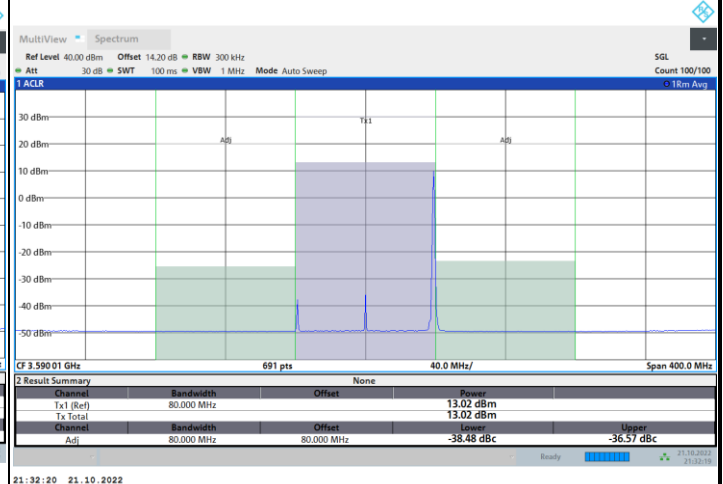

Full RB







FR1 N77 / 80MHz / CP OFDM / 256QAM

Middle Channel


1RB0

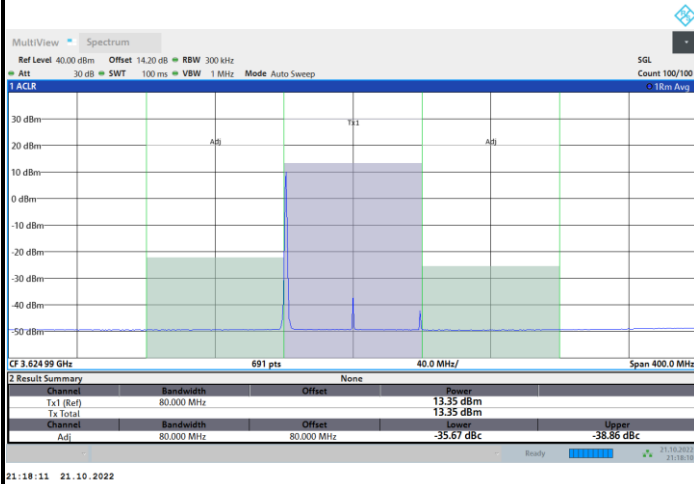

1RBmax

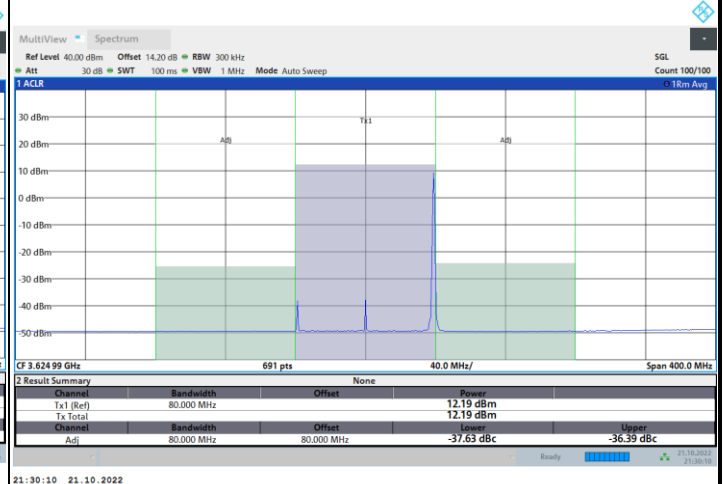

Full RB

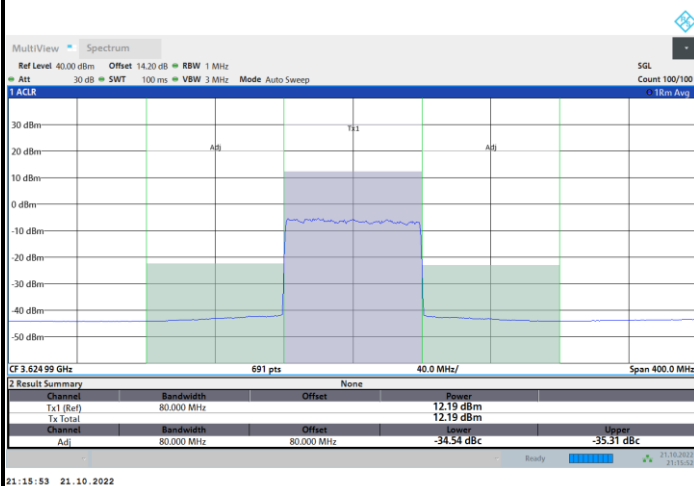





FR1 N77 / 80MHz / CP OFDM / 256QAM

Highest Channel


1RB0

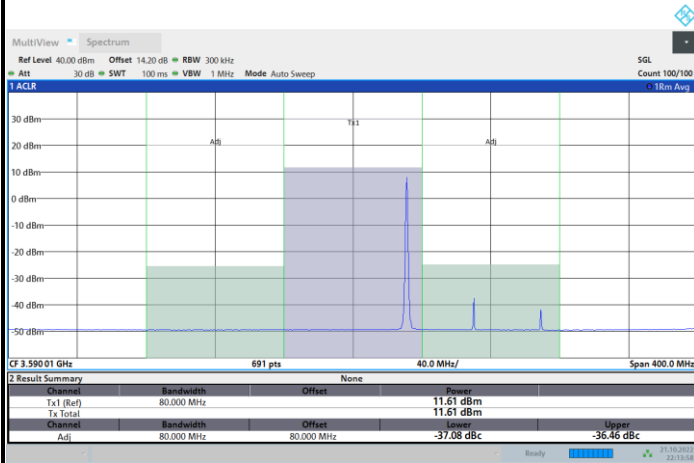

1RBmax

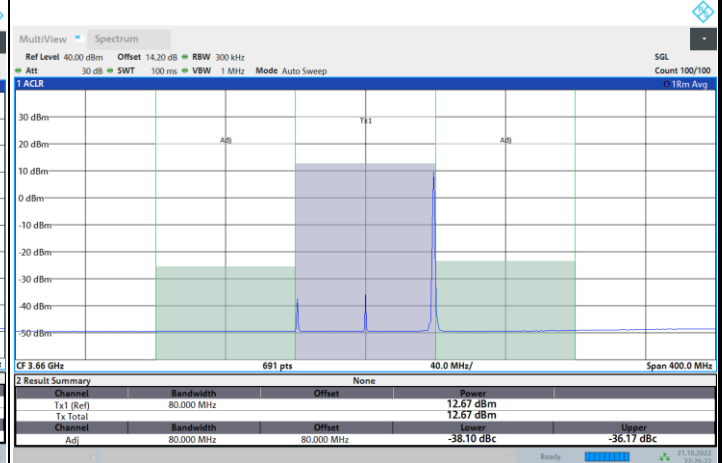

Full RB

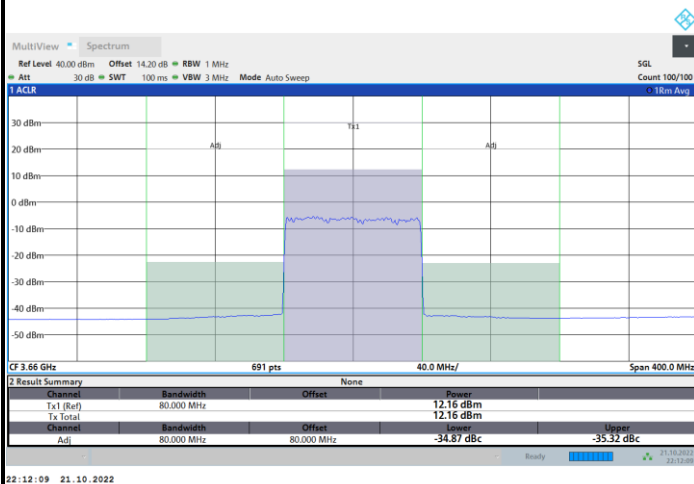





FR1 N77 / 90MHz / CP OFDM / QPSK

Lowest Channel


1RB0

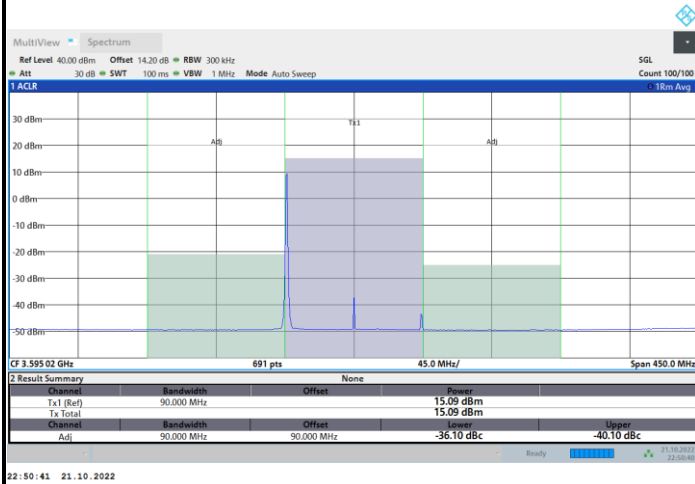

1RBmax

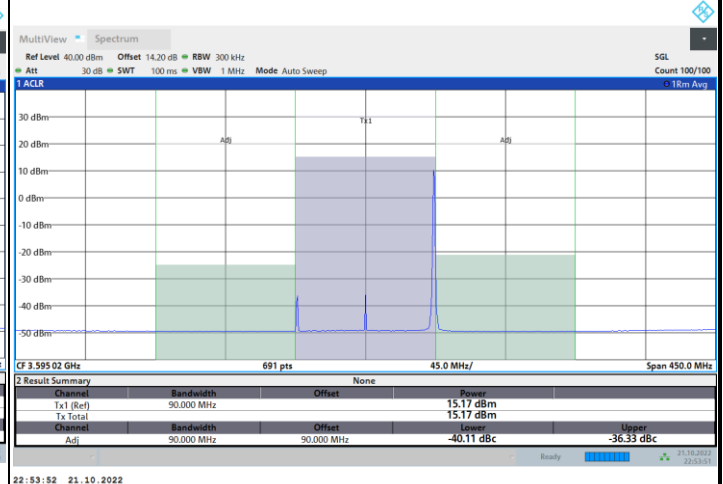

Full RB

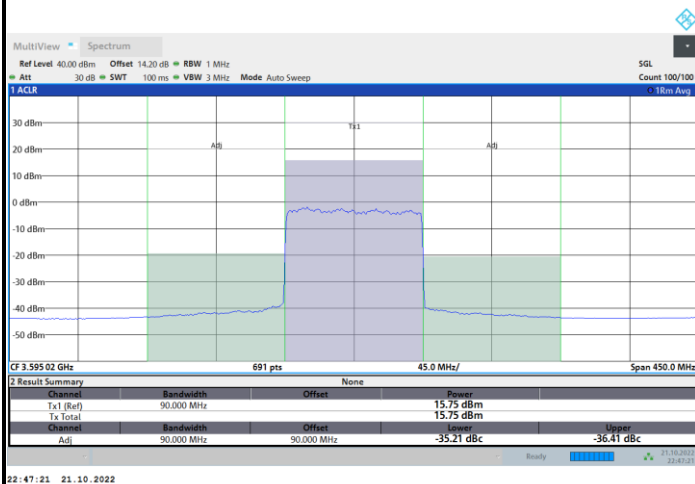





FR1 N77 / 90MHz / CP OFDM / QPSK

Middle Channel

1RB0

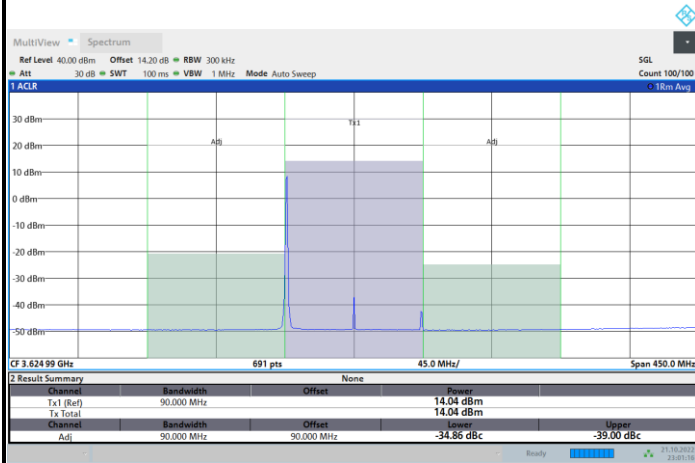

1RBmax

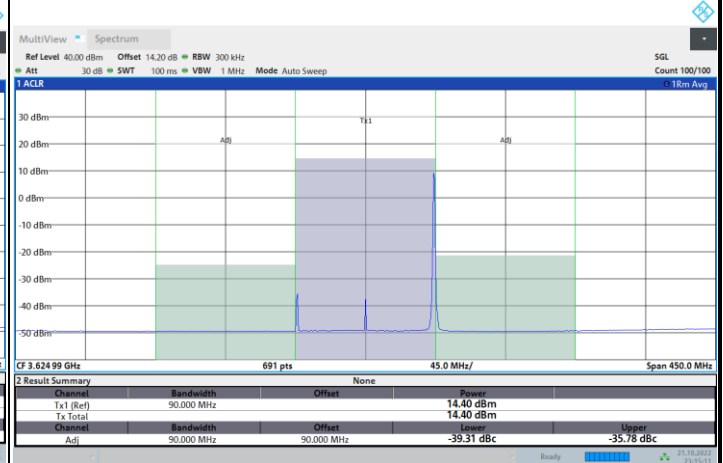

Full RB







FR1 N77 / 90MHz / CP OFDM / QPSK

Highest Channel


1RB0

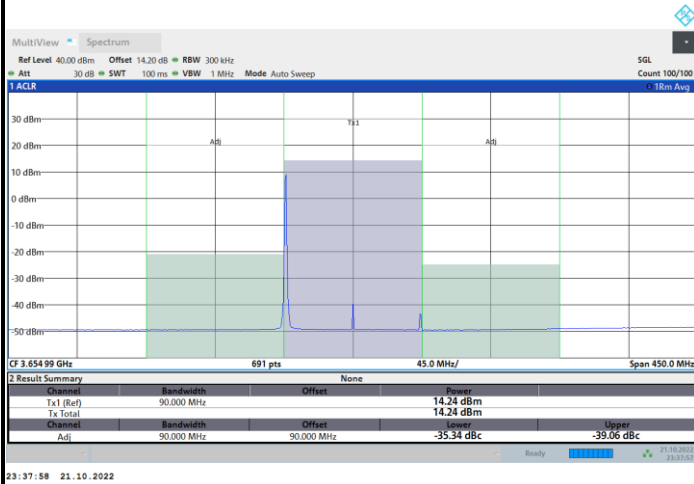

1RBmax

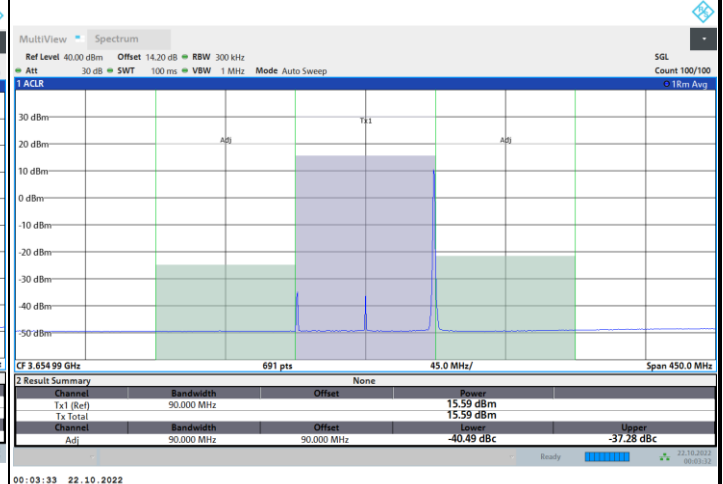

Full RB

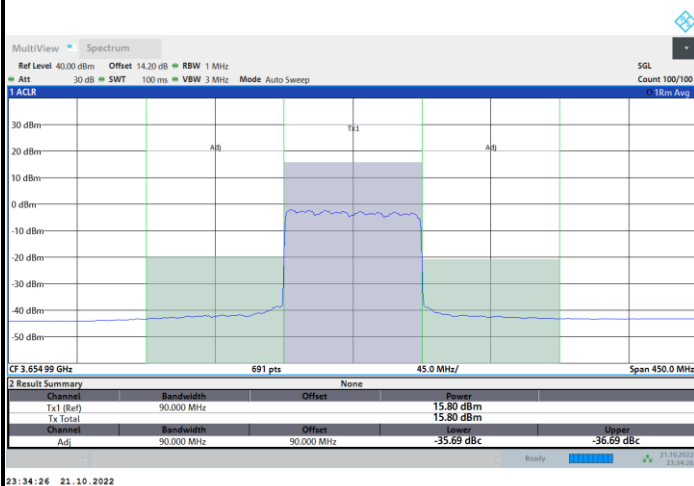





FR1 N77 / 90MHz / CP OFDM / 16QAM

Lowest Channel


1RB0

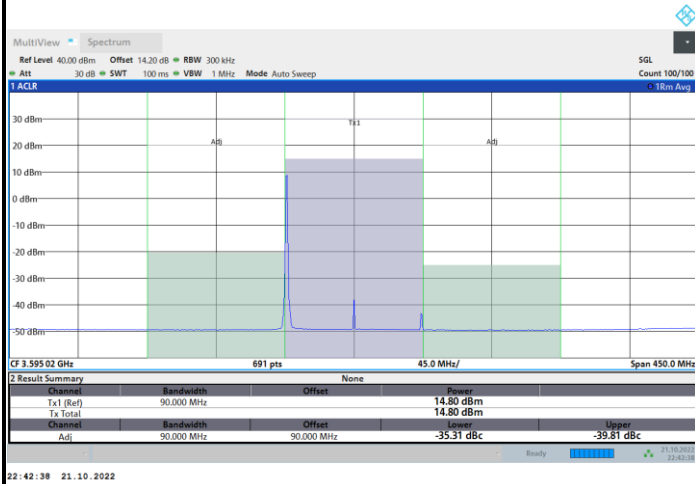

1RBmax

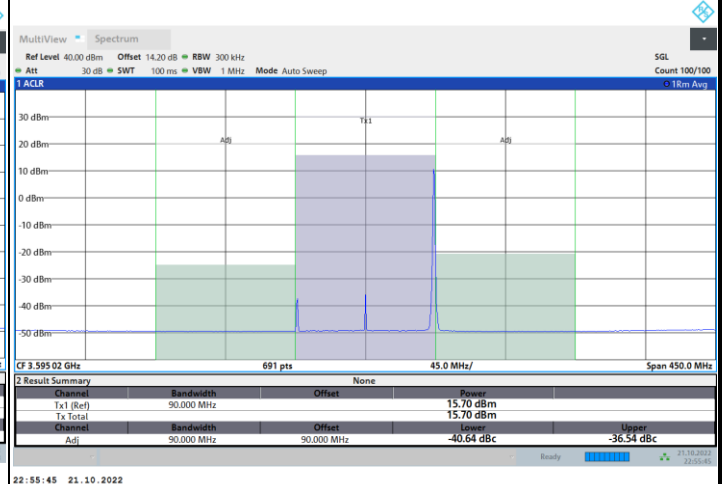

Full RB

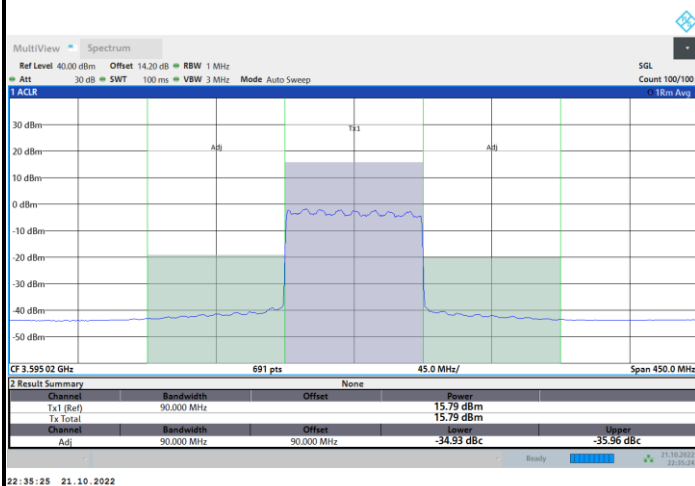





FR1 N77 / 90MHz / CP OFDM / 16QAM

Middle Channel


1RB0


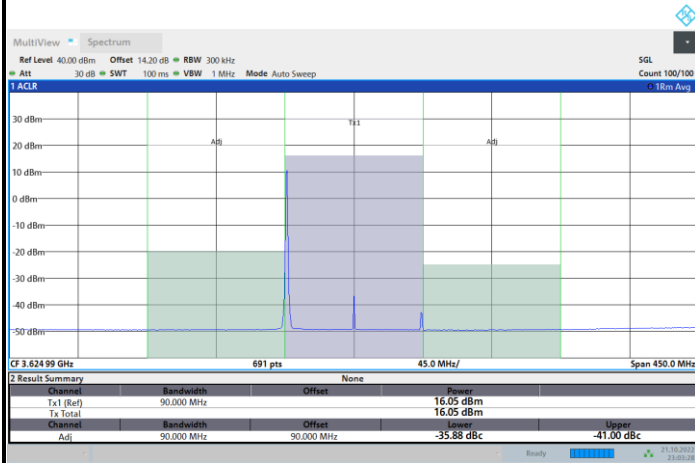


1RBmax

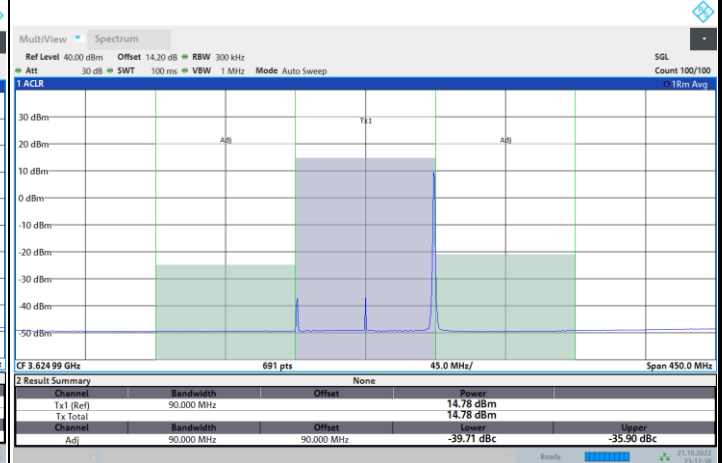

Full RB

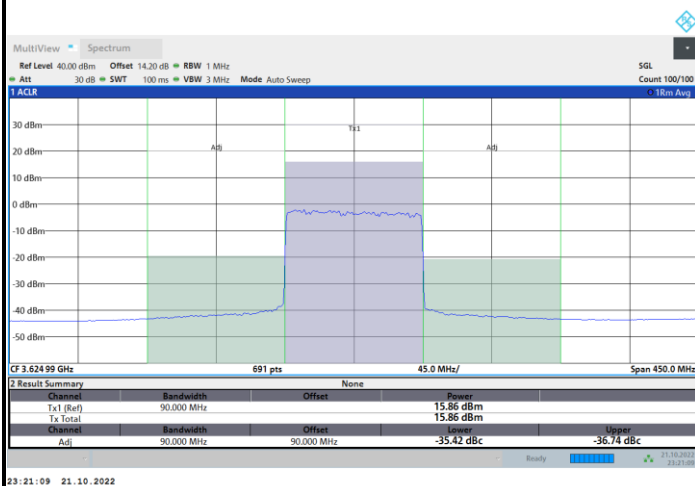

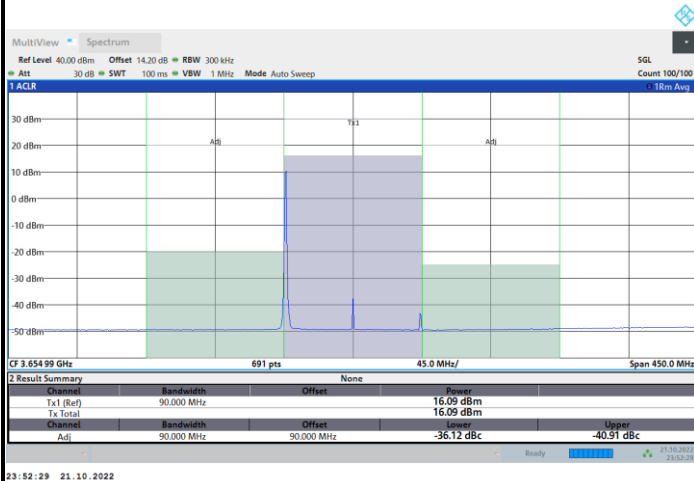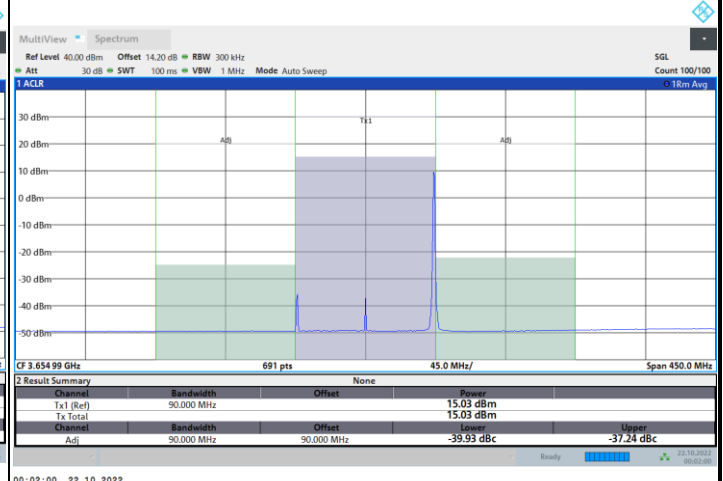
**FR1 N77 / 90MHz / CP OFDM / 16QAM****Highest Channel****1RB0****1RBmax****Full RB**




FR1 N77 / 90MHz / CP OFDM / 64QAM

Lowest Channel


1RB0

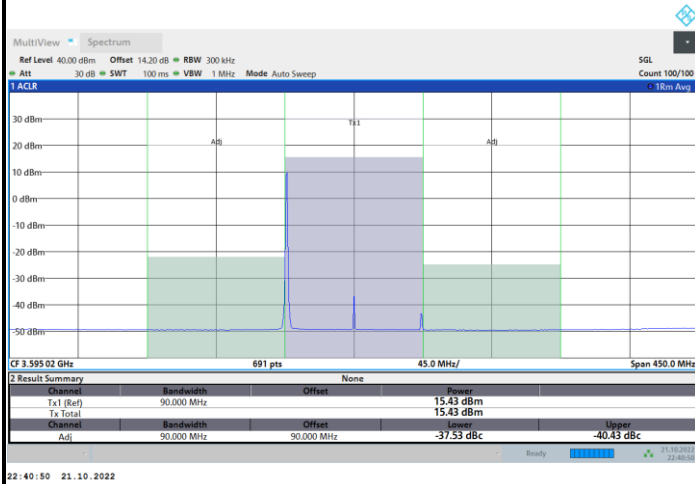

1RBmax

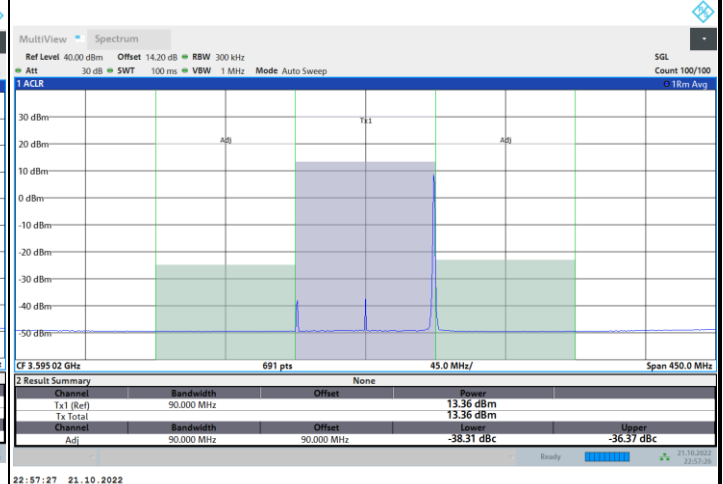

Full RB

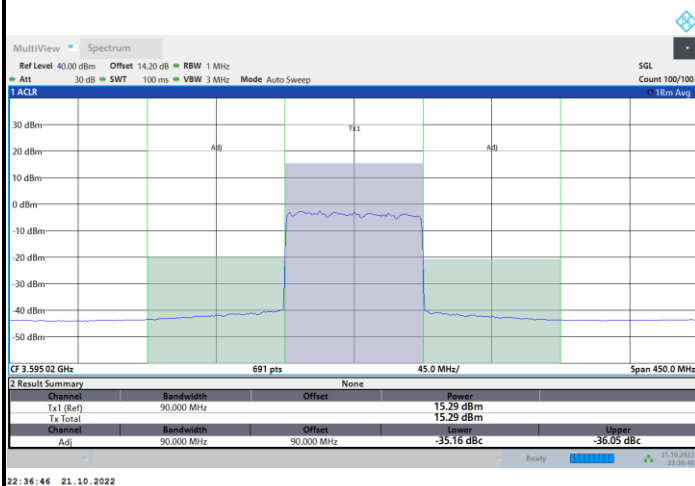





FR1 N77 / 90MHz / CP OFDM / 64QAM

Middle Channel


1RB0

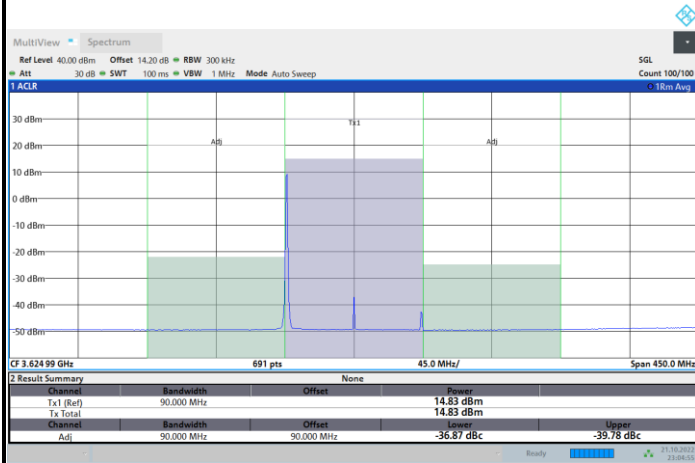

1RBmax

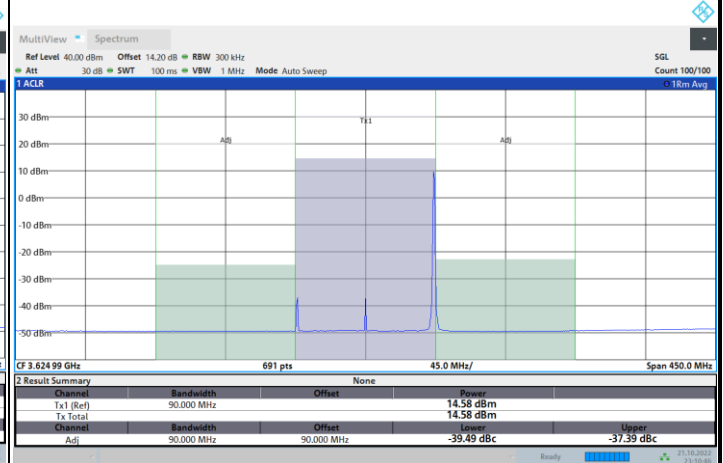

Full RB

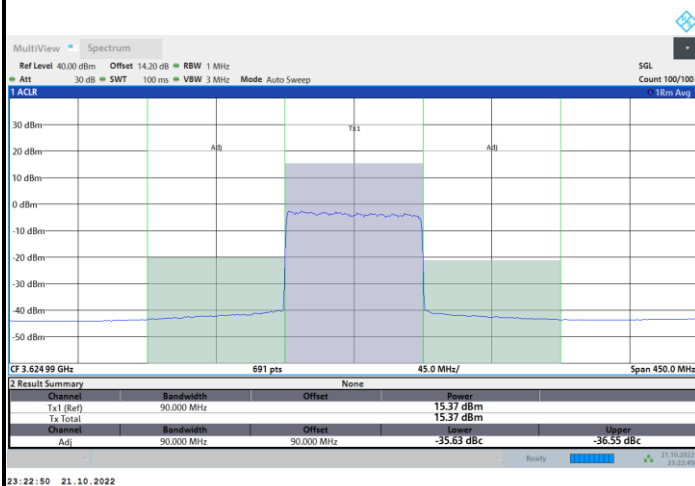





FR1 N77 / 90MHz / CP OFDM / 64QAM

Highest Channel


1RB0

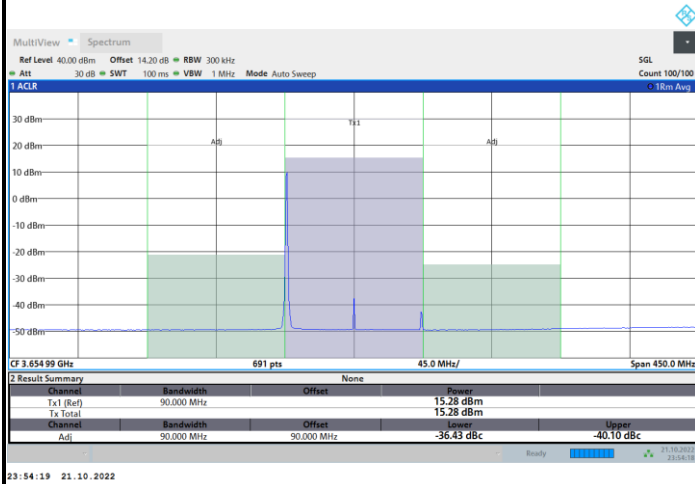

1RBmax

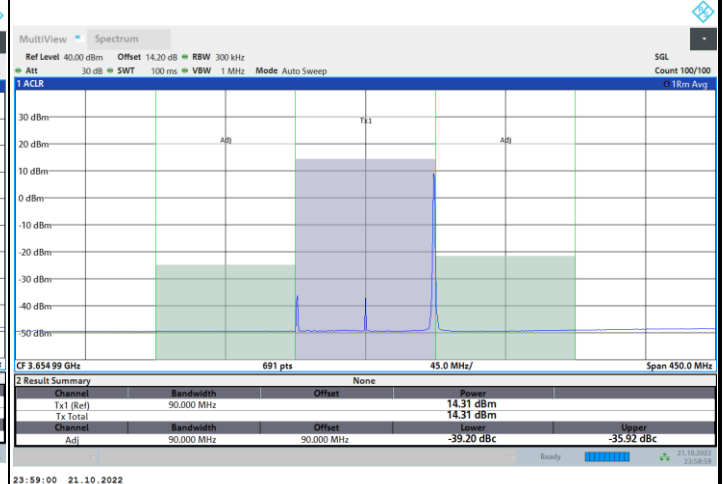

Full RB

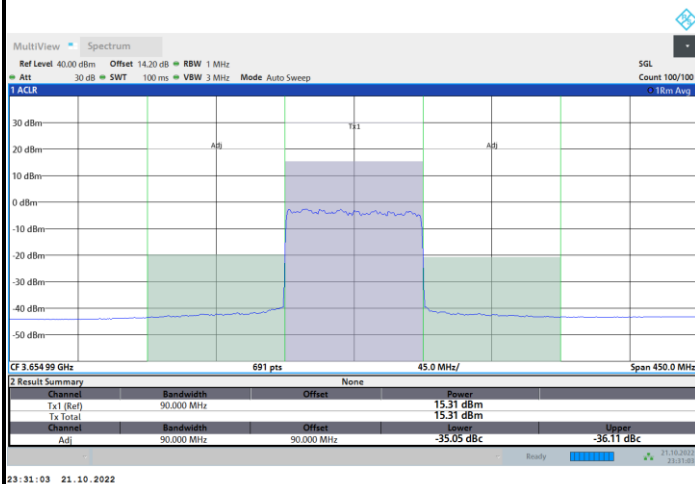





FR1 N77 / 90MHz / CP OFDM / 256QAM

Lowest Channel


1RB0

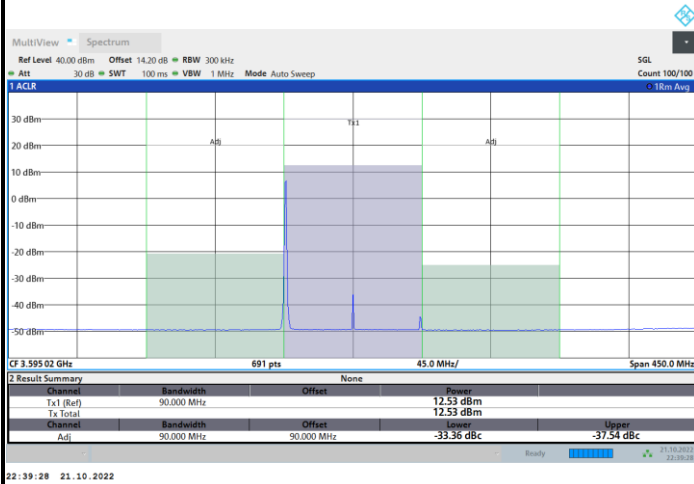

1RBmax

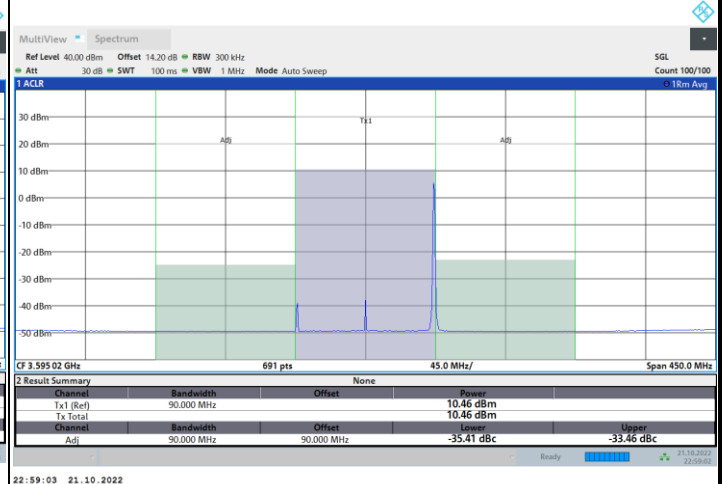

Full RB

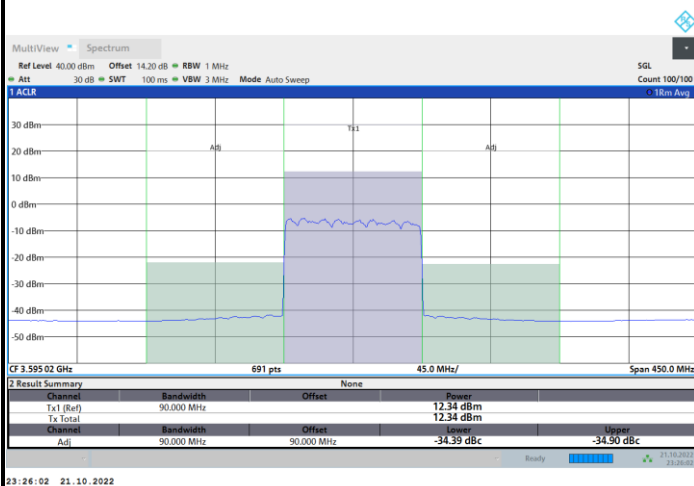





FR1 N77 / 90MHz / CP OFDM / 256QAM

Middle Channel


1RB0

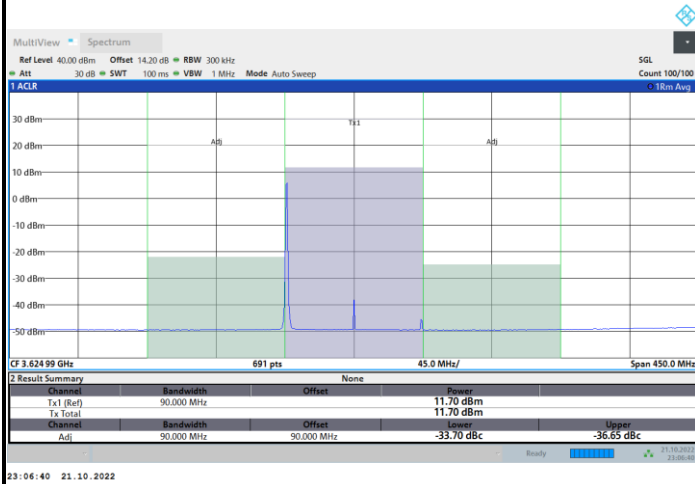

1RBmax

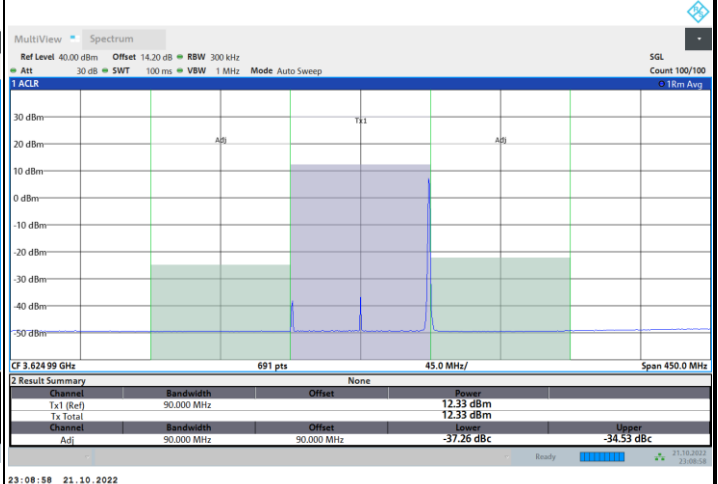

Full RB

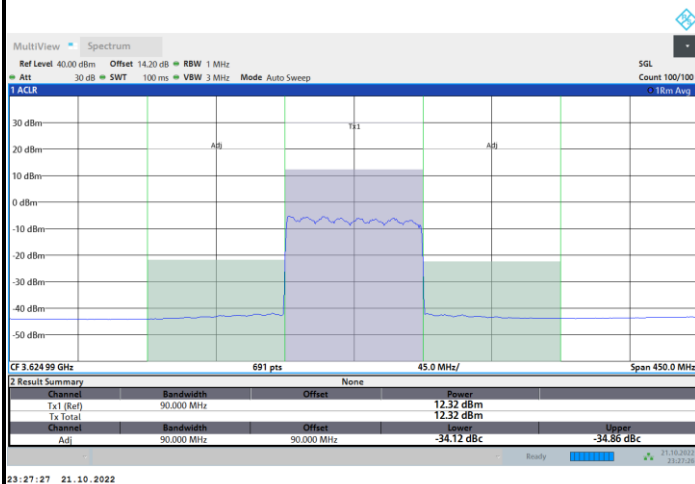





FR1 N77 / 90MHz / CP OFDM / 256QAM

Highest Channel


1RB0

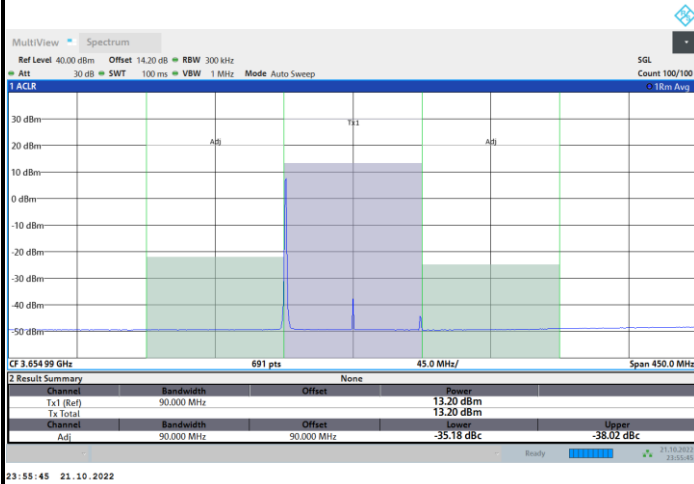

1RBmax

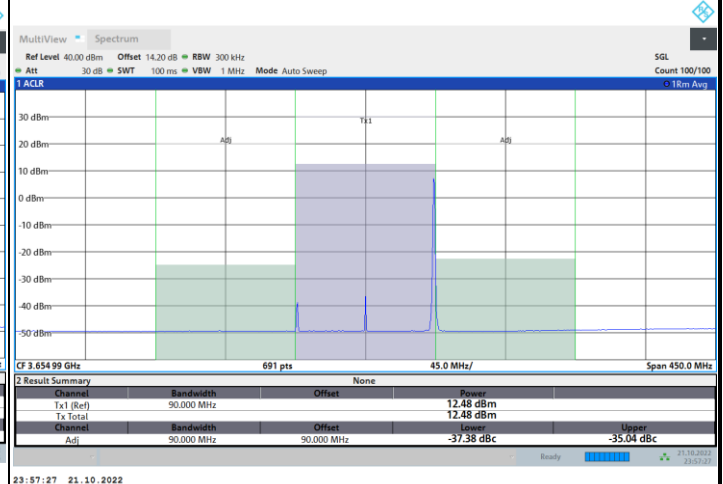

Full RB

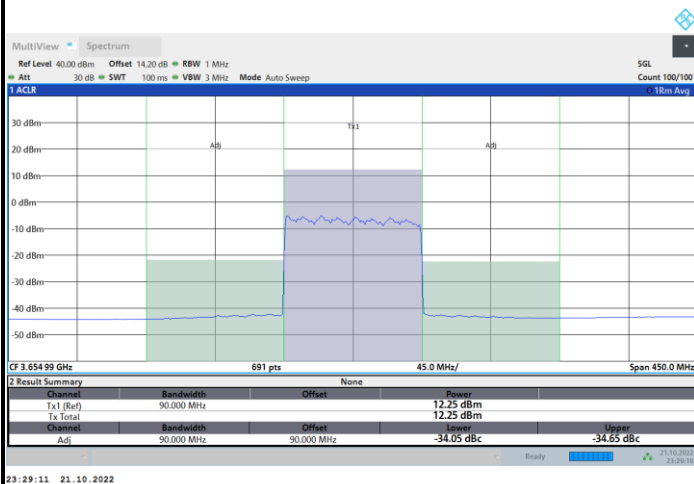




FR1 N77 / 100MHz / CP OFDM / QPSK


Lowest Channel

1RB0

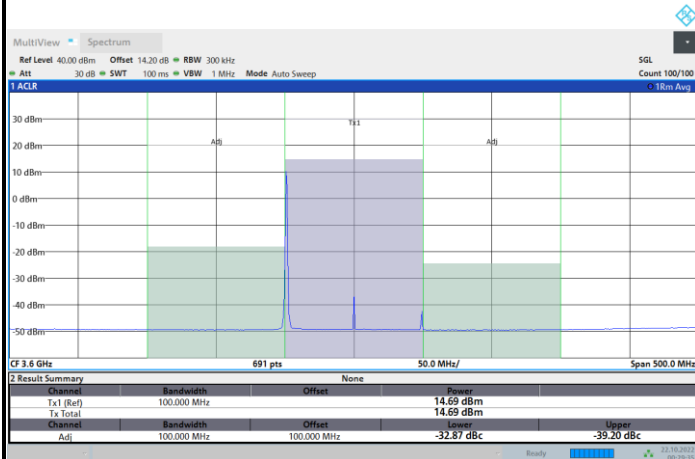


00:29:36 22.10.2022

1RBmax

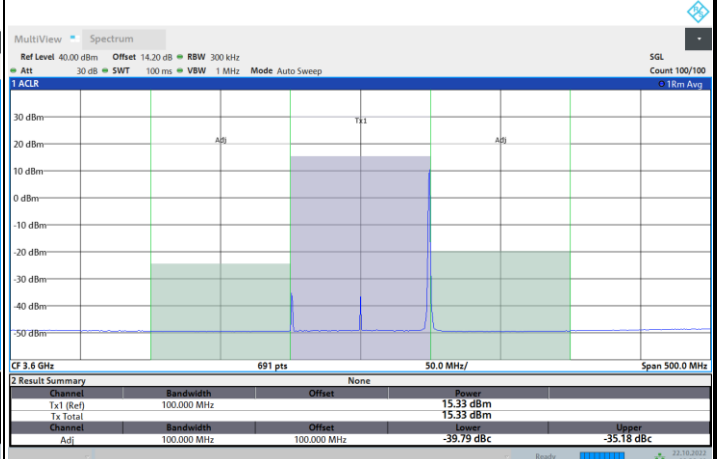

00:39:41 22.10.2022

Full RB

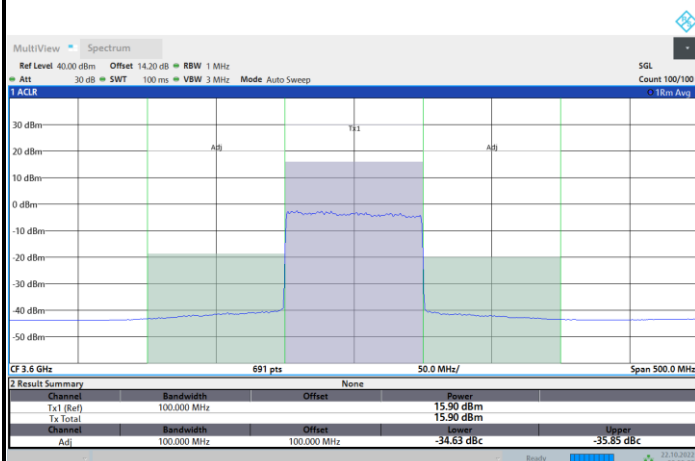


00:55:01 22.10.2022




FR1 N77 / 100MHz / CP OFDM / QPSK

Middle Channel


1RB0

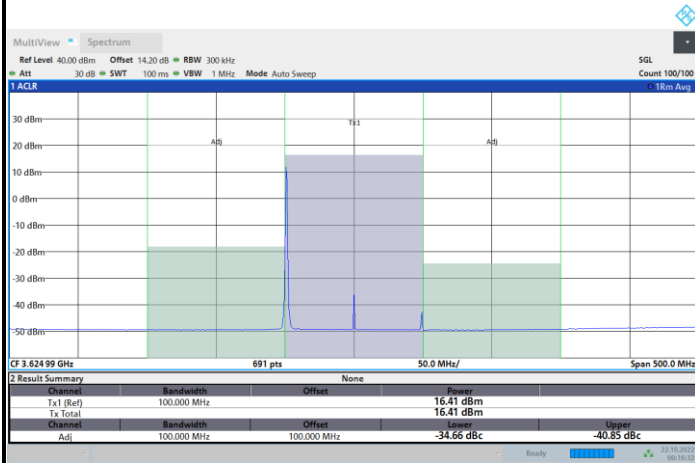

1RBmax

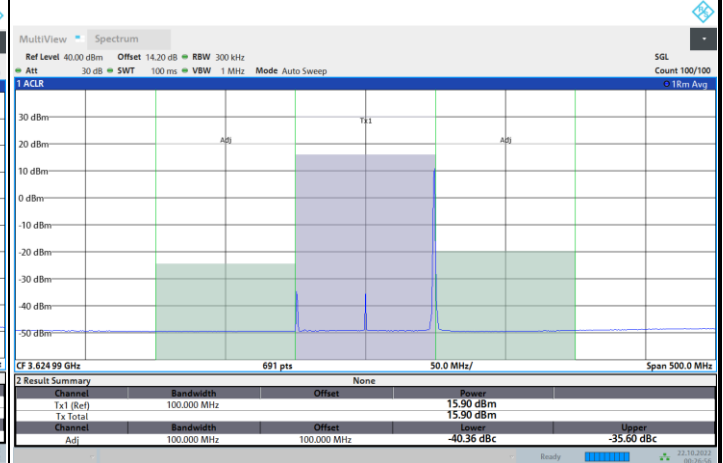

Full RB

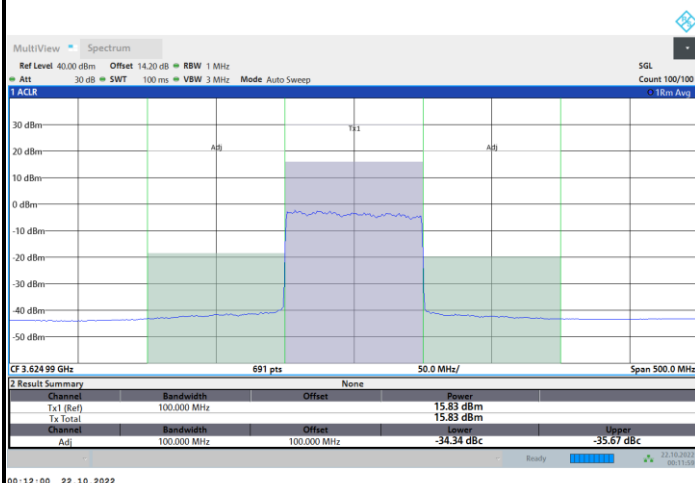





FR1 N77 / 100MHz / CP OFDM / QPSK

Highest Channel


1RB0

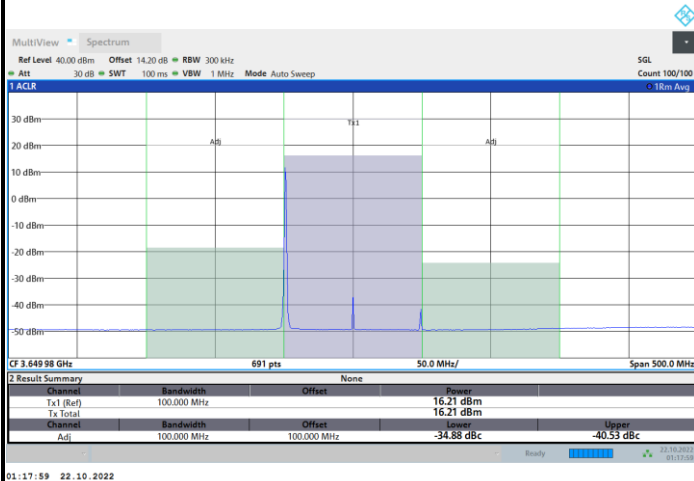

1RBmax

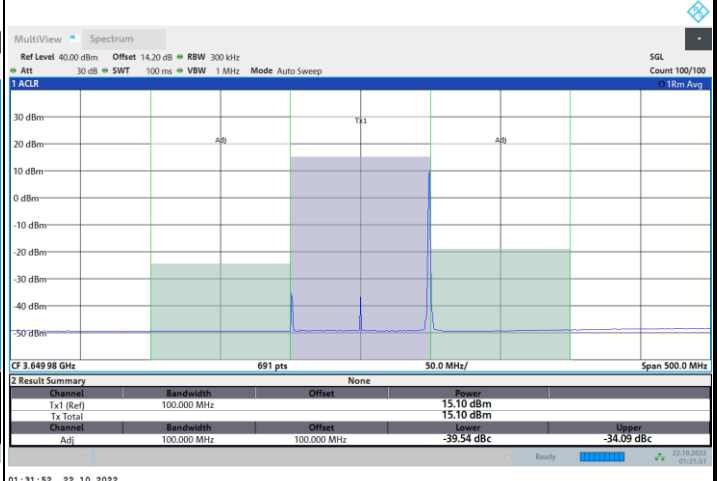

Full RB

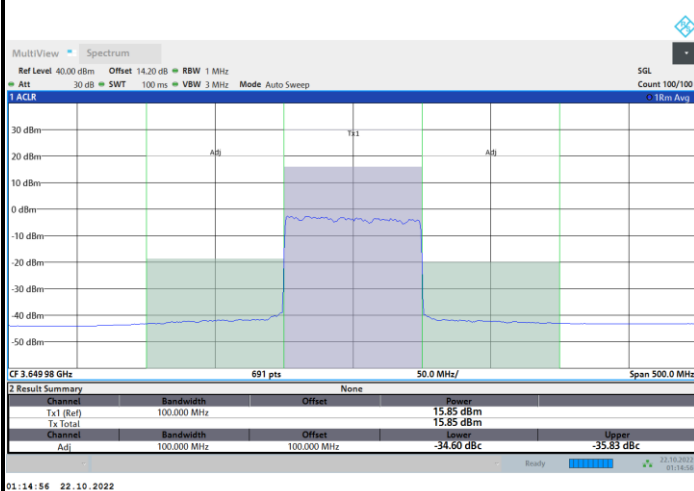





FR1 N77 / 100MHz / CP OFDM / 16QAM

Lowest Channel

1RB0

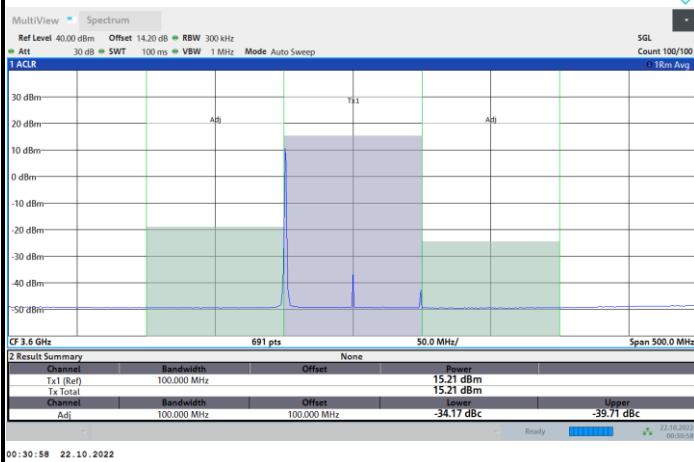

1RBmax

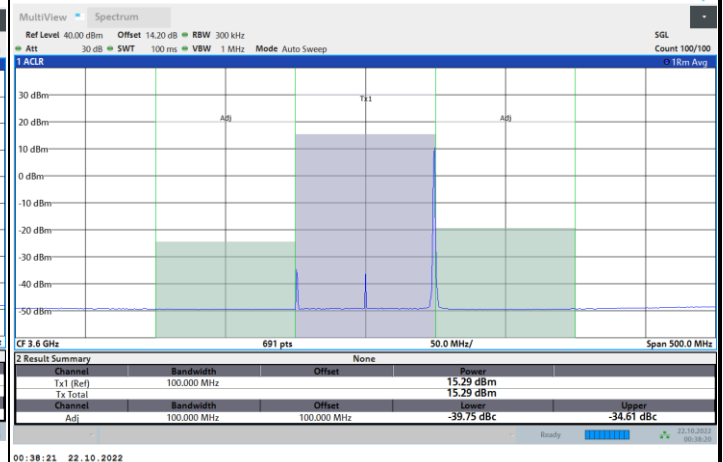

Full RB






FR1 N77 / 100MHz / CP OFDM / 16QAM


Middle Channel

1RB0

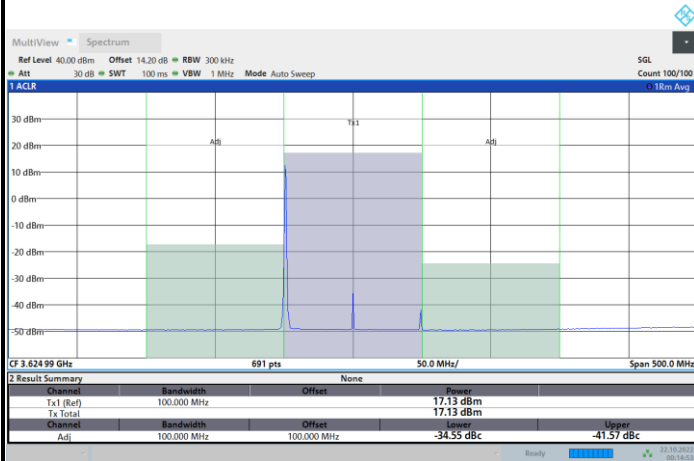


00:14:53 22.10.2022

1RBmax

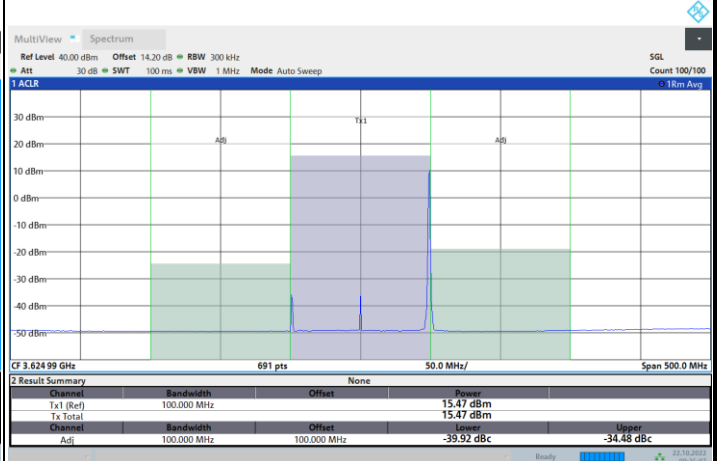

00:25:07 22.10.2022

Full RB

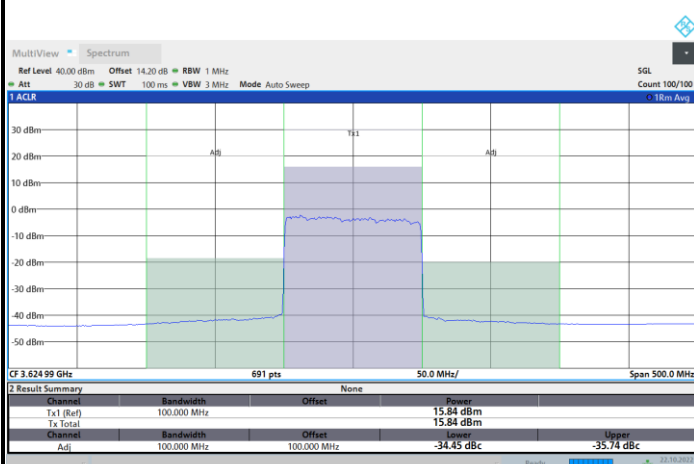


00:10:46 22.10.2022




FR1 N77 / 100MHz / CP OFDM / 16QAM

Highest Channel

1RB0

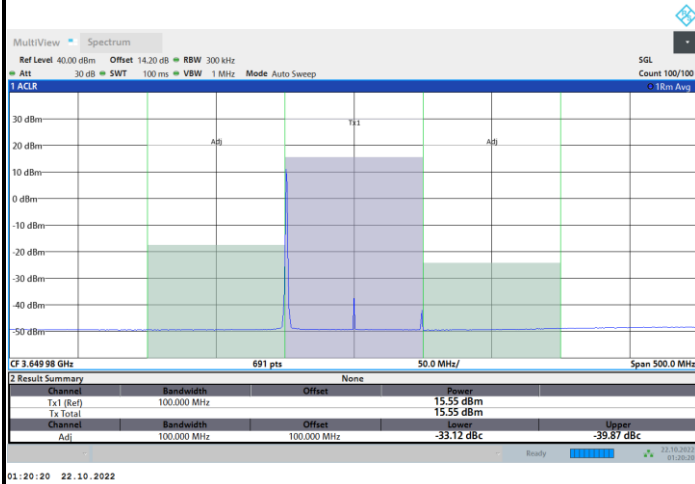

1RBmax

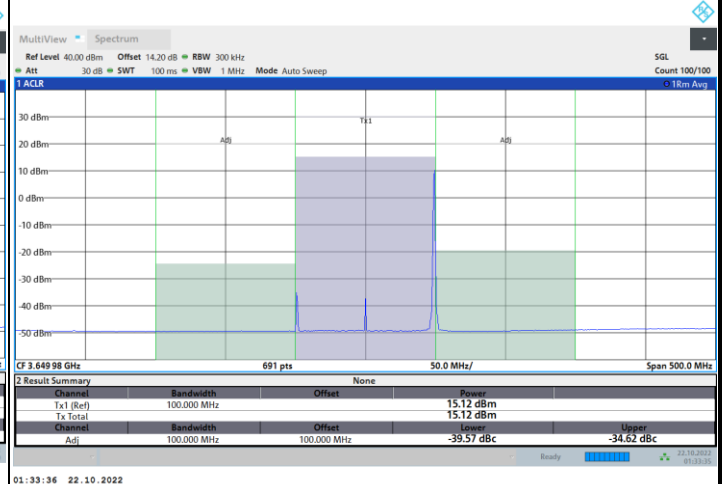

Full RB







FR1 N77 / 100MHz / CP OFDM / 64QAM

Lowest Channel


1RB0

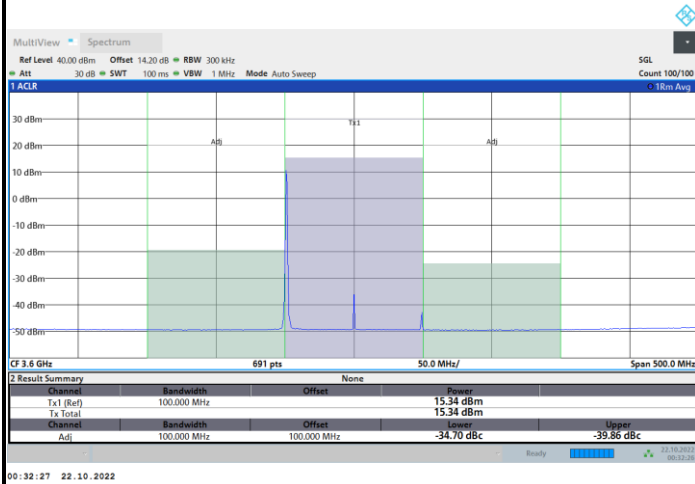

1RBmax

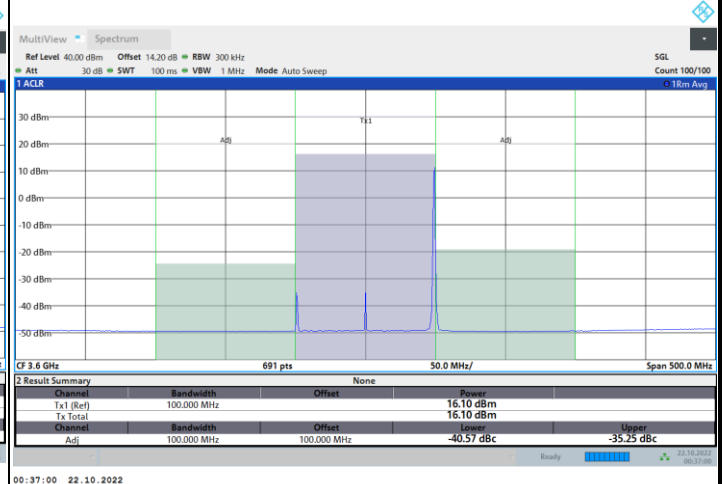

Full RB

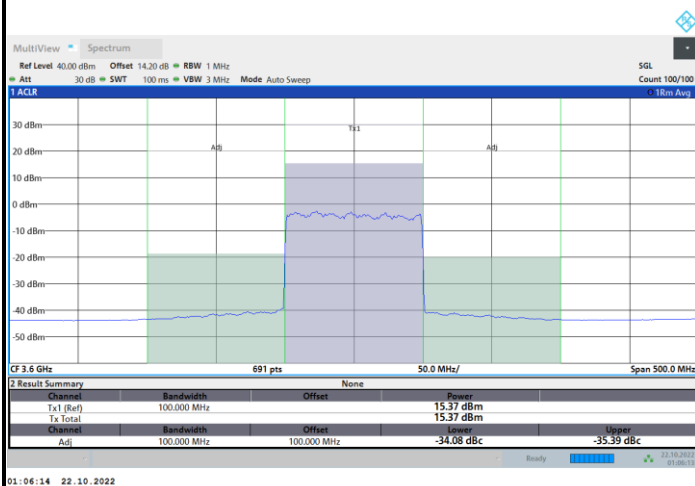





FR1 N77 / 100MHz / CP OFDM / 64QAM

Middle Channel


1RB0

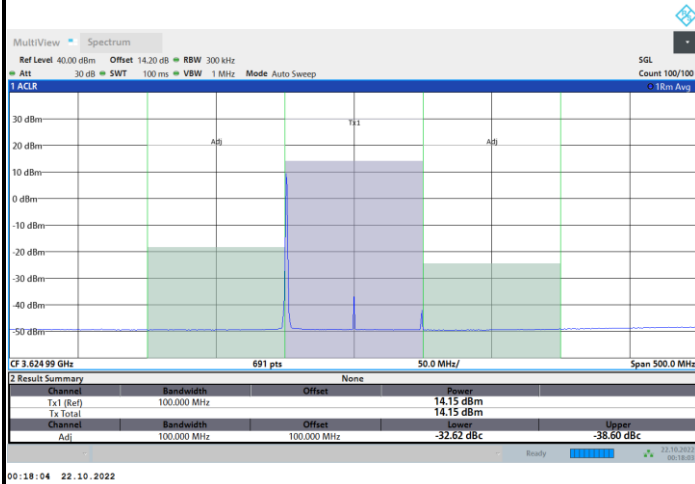

1RBmax

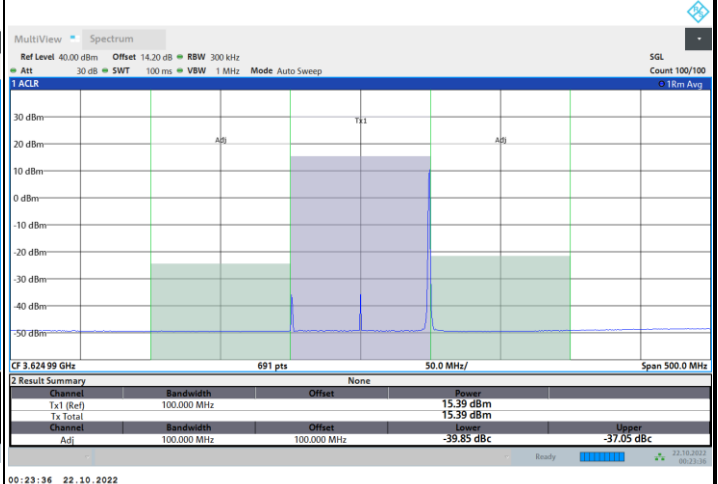

Full RB

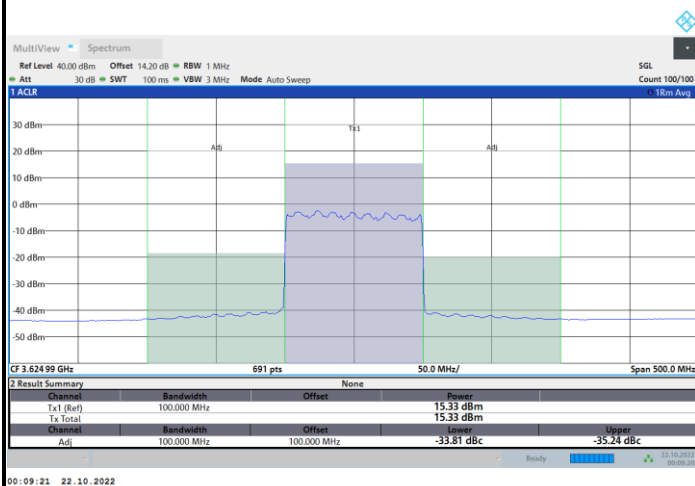





FR1 N77 / 100MHz / CP OFDM / 64QAM

Highest Channel


1RB0

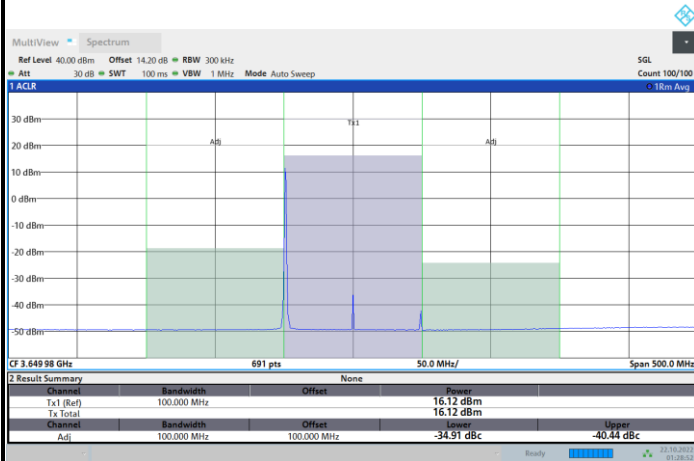

1RBmax

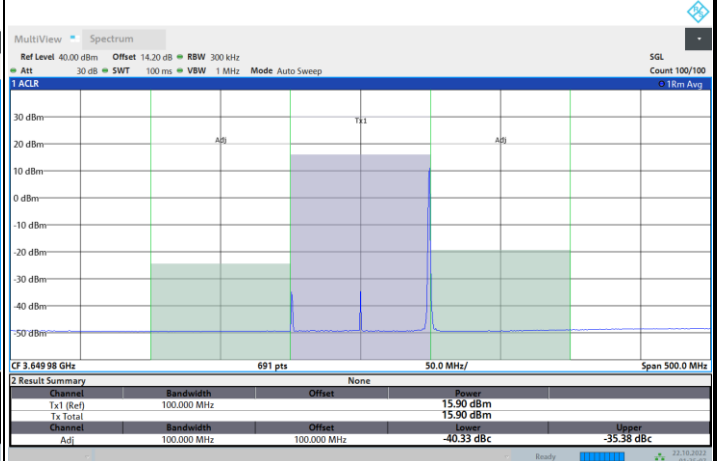

Full RB

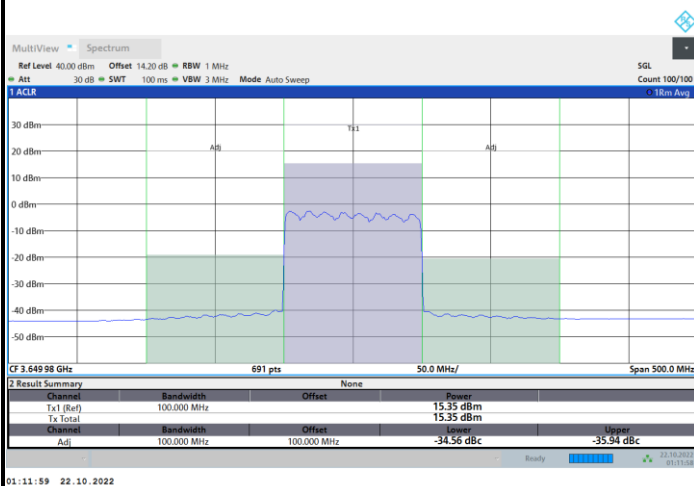





FR1 N77 / 100MHz / CP OFDM / 256QAM

Lowest Channel


1RB0

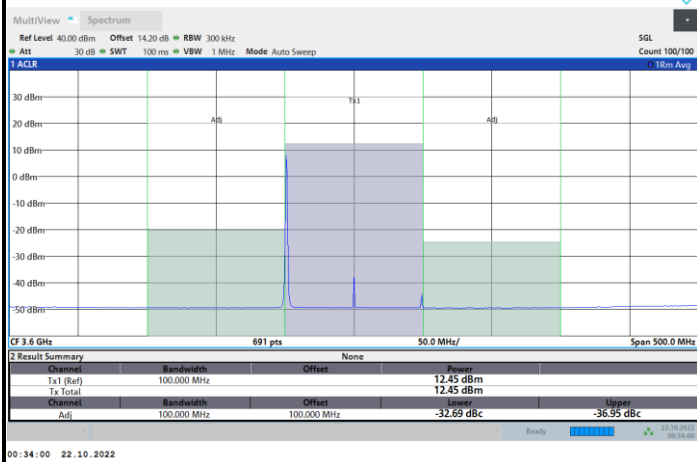

1RBmax

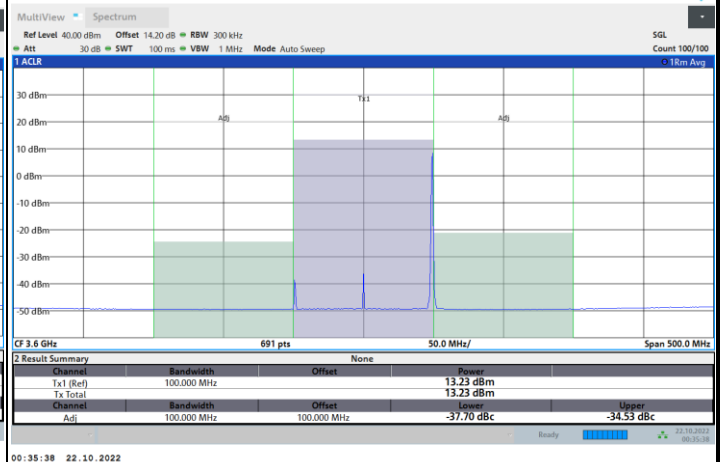

Full RB

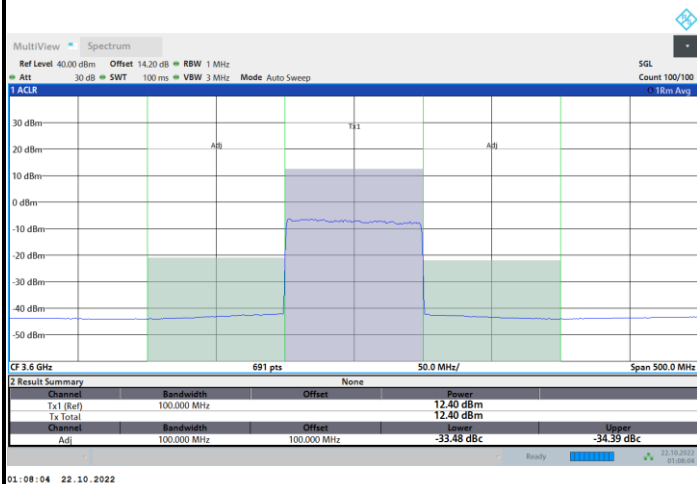





FR1 N77 / 100MHz / CP OFDM / 256QAM

Middle Channel


1RB0

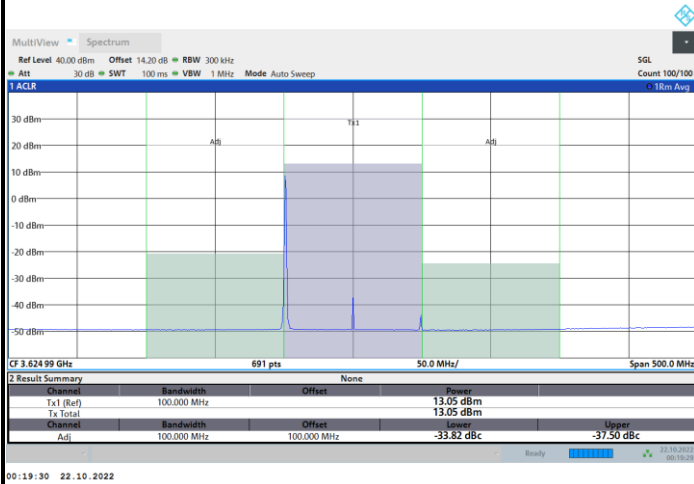

1RBmax

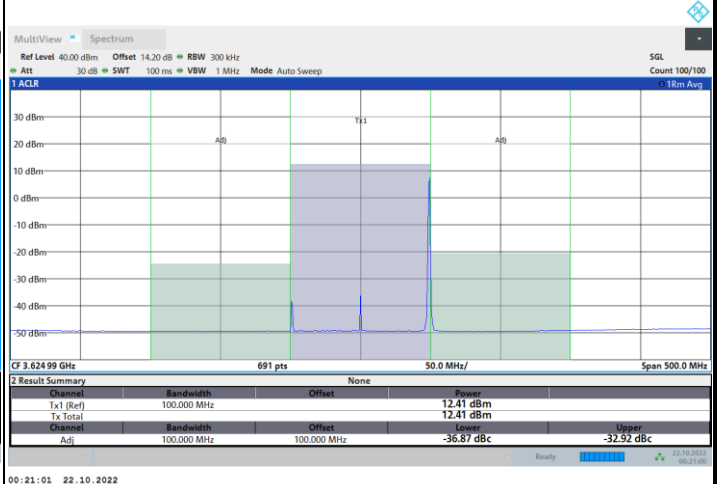

Full RB

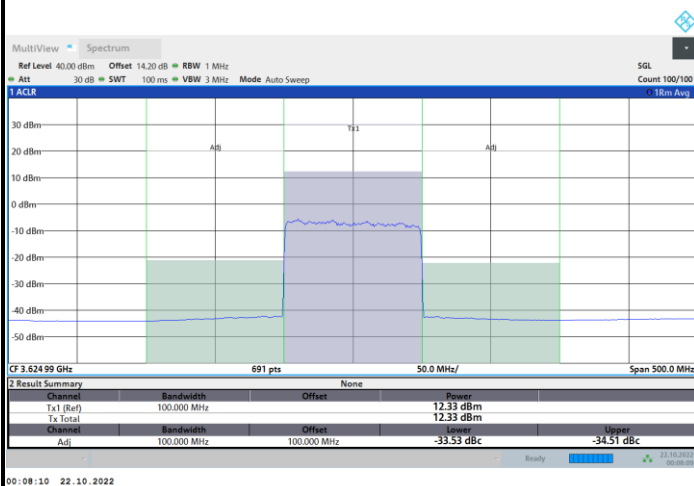





FR1 N77 / 100MHz / CP OFDM / 256QAM

Highest Channel


1RB0

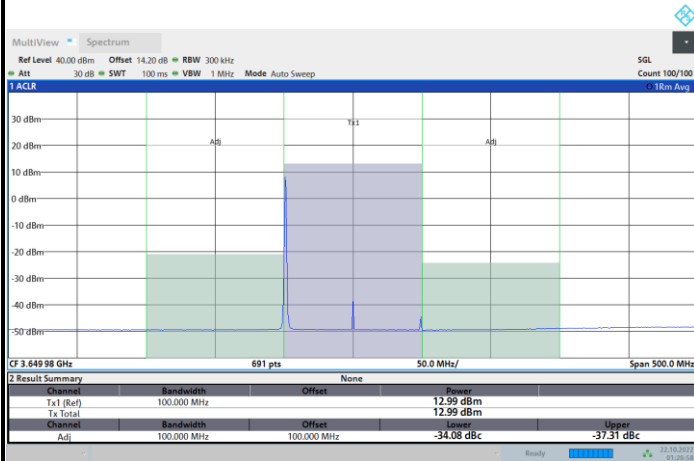

1RBmax

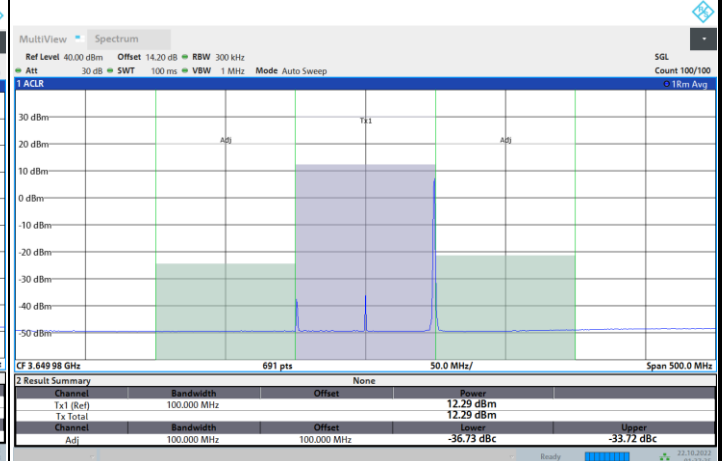

Full RB

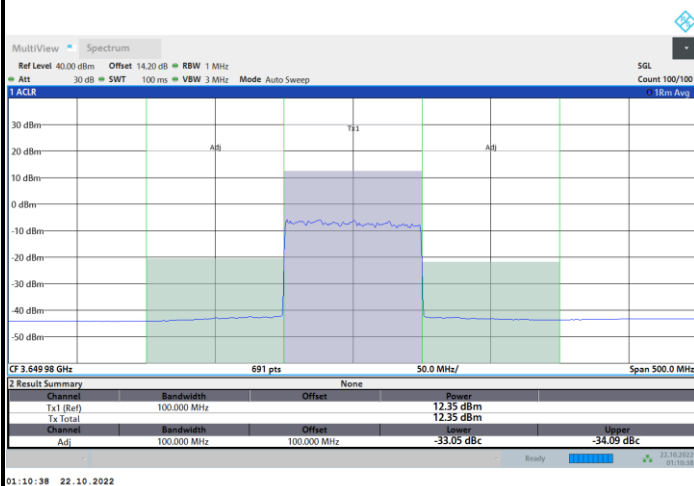





Conducted Spurious Emission

FR1 N77 / 10MHz / CP OFDM / QPSK / 1RB1


Lowest Channel

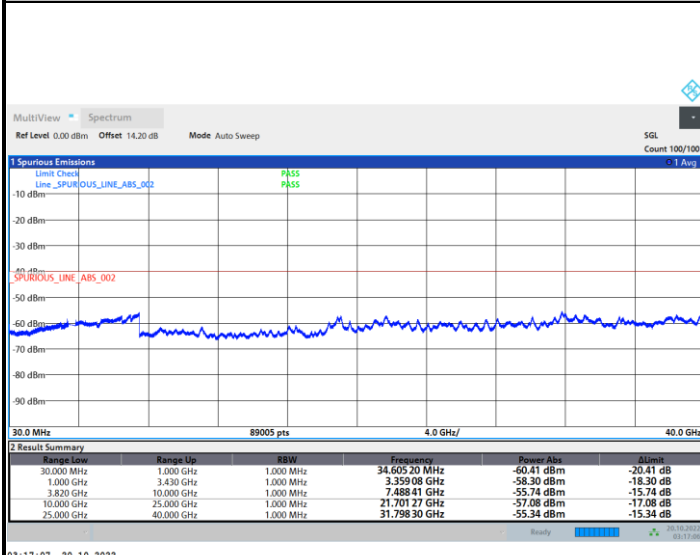

Middle Channel

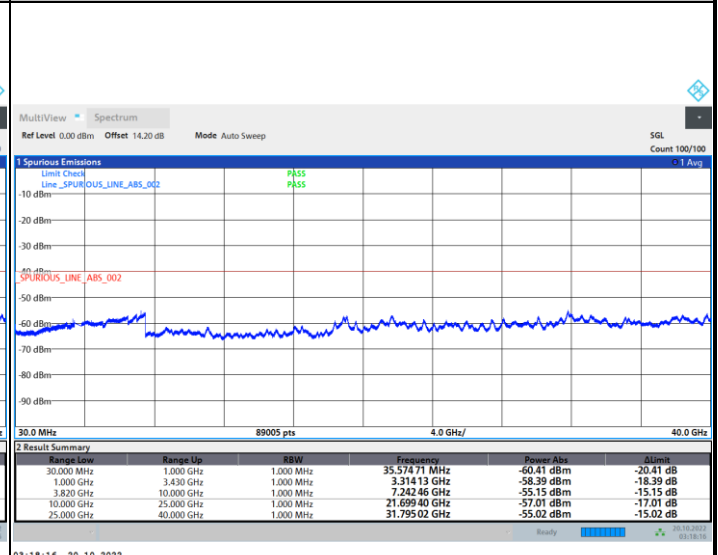

Highest Channel

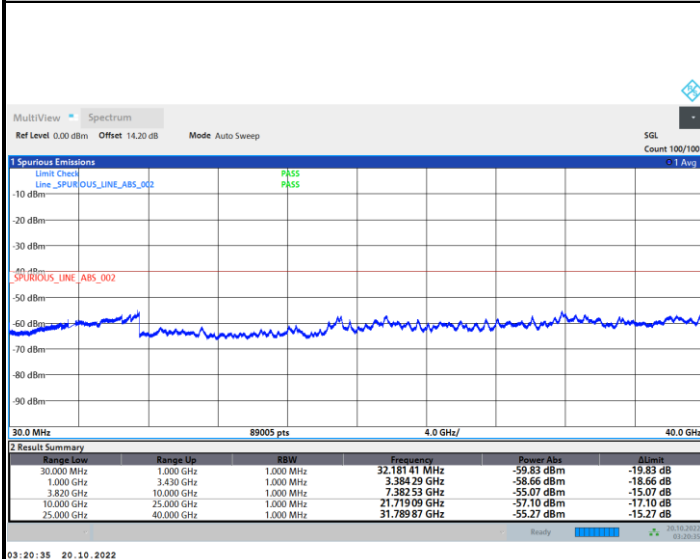

Frequency Stability

Test Conditions		FR1 N77 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 20MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0018	PASS
40	Normal Voltage	0.0023	
30	Normal Voltage	0.0021	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0018	
0	Normal Voltage	0.0000	
-10	Normal Voltage	0.0010	
-20	Normal Voltage	0.0015	
-30	Normal Voltage	0.0014	
20	Maximum Voltage	0.0004	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0010	

Note:

1. Normal Voltage = 3.3 V. ; Battery End Point (BEP) = 3.135 V. ; Maximum Voltage = 3.63 V.
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of Radiated Test

<Ant. 0>

5G NR n48

5G NR n48 / 40MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7105	-56.85	-40	-16.85	-54.98	-66.55	1.84	11.54	H
	10657	-44.79	-40	-4.79	-47.4	-53.26	2.23	10.71	H
	14209	-49.31	-40	-9.31	-58.04	-58.94	2.65	12.27	H
	21314	-61.92	-40	-21.92	-76.31	-76.78	3.32	18.18	H
	24866	-58.61	-40	-18.61	-76.89	-73.38	3.71	18.48	H
	28418	-55.42	-40	-15.42	-75.93	-70.88	3.99	19.45	H
									H
	7105	-54.40	-40	-14.40	-52.78	-64.10	1.84	11.54	V
	10657	-42.71	-40	-2.71	-44.92	-51.18	2.23	10.71	V
	14209	-49.34	-40	-9.34	-57.95	-58.97	2.65	12.27	V
	21314	-62.37	-40	-22.37	-76.45	-77.23	3.32	18.18	V
	24866	-58.87	-40	-18.87	-76.83	-73.64	3.71	18.48	V
	28418	-56.64	-40	-16.64	-76.74	-72.10	3.99	19.45	V
									V



Middle	7215	-55.35	-40	-15.35	-53.78	-64.81	1.85	11.31	H
	10822	-45.71	-40	-5.71	-48.65	-54.10	2.22	10.61	H
	14429	-49.29	-40	-9.29	-58.24	-58.81	2.63	12.14	H
	18036	-59.21	-40	-19.21	-70.65	-73.58	3.23	17.60	H
	21644	-60.43	-40	-20.43	-75.54	-75.56	3.41	18.54	H
	25251	-58.36	-40	-18.36	-76.67	-73.30	3.76	18.70	H
									H
	7215	-53.52	-40	-13.52	-52.32	-62.98	1.85	11.31	V
	10822	-41.75	-40	-1.75	-44.43	-50.14	2.22	10.61	V
	14429	-48.67	-40	-8.67	-57.97	-58.19	2.63	12.14	V
	18036	-54.87	-40	-14.87	-66	-69.24	3.23	17.60	V
	21644	-61.27	-40	-21.27	-76.05	-76.40	3.41	18.54	V
	25251	-59.37	-40	-19.37	-77.39	-74.31	3.76	18.70	V
Highest	7323	-52.36	-40	-12.36	-51.06	-61.82	1.90	11.36	H
	10987	-46.99	-40	-6.99	-50.26	-55.30	2.20	10.51	H
	14649	-49.48	-40	-9.48	-58.54	-59.31	2.60	12.43	H
	18311	-60.76	-40	-20.76	-72.46	-75.12	3.24	17.60	H
	21974	-61.12	-40	-21.12	-76.56	-76.49	3.50	18.87	H
	25636	-58.44	-40	-18.44	-76.93	-73.61	3.85	19.03	H
									H
	7323	-49.84	-40	-9.84	-48.75	-59.30	1.90	11.36	V
	10987	-44.99	-40	-4.99	-48.16	-53.30	2.20	10.51	V
	14649	-48.35	-40	-8.35	-58.22	-58.18	2.60	12.43	V
	18311	-59.13	-40	-19.13	-70.57	-73.49	3.24	17.60	V
	21974	-61.27	-40	-21.27	-76.34	-76.64	3.50	18.87	V
	25636	-58.48	-40	-18.48	-76.7	-73.65	3.85	19.03	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**5G NR n77**

5G NR n77 / 100MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7102	-53.28	-40	-13.28	-51.41	-62.98	1.84	11.55	H
	10653	-47.41	-40	-7.41	-50.02	-55.88	2.23	10.71	H
	14204	-49.57	-40	-9.57	-58.3	-59.20	2.65	12.28	H
	21306	-63.28	-40	-23.28	-77.64	-78.13	3.32	18.17	H
	24857	-59.55	-40	-19.55	-77.83	-74.32	3.71	18.49	H
	28408	-56.28	-40	-16.28	-76.79	-71.75	3.99	19.46	H
									H
	7102	-48.94	-40	-8.94	-47.32	-58.64	1.84	11.55	V
	10653	-45.24	-40	-5.24	-47.44	-53.71	2.23	10.71	V
	14204	-49.37	-40	-9.37	-57.98	-59.00	2.65	12.28	V
	21306	-62.77	-40	-22.77	-76.83	-77.62	3.32	18.17	V
	24857	-59.27	-40	-19.27	-77.23	-74.04	3.71	18.49	V
	28408	-56.84	-40	-16.84	-76.93	-72.31	3.99	19.46	V
									V
Middle	7152	-55.55	-40	-15.55	-53.82	-65.13	1.84	11.42	H
	10728	-44.59	-40	-4.59	-47.35	-53.03	2.23	10.66	H
	14303	-49.78	-40	-9.78	-58.6	-59.36	2.64	12.22	H
	21457	-61.38	-40	-21.38	-76.21	-76.37	3.36	18.35	H
	25033	-59.86	-40	-19.86	-78.14	-74.59	3.71	18.44	H
	28610	-55.73	-40	-15.73	-76.43	-71.12	3.99	19.38	H
									H
	7152	-53.11	-40	-13.11	-51.71	-62.69	1.84	11.42	V
	10728	-43.92	-40	-3.92	-46.34	-52.36	2.23	10.66	V
	14303	-49.77	-40	-9.77	-58.68	-59.35	2.64	12.22	V
	21457	-61.84	-40	-21.84	-76.37	-76.83	3.36	18.35	V
	25033	-59.66	-40	-19.66	-77.63	-74.39	3.71	18.44	V
	28610	-56.39	-40	-16.39	-76.68	-71.78	3.99	19.38	V
									V



Highest	7202	-55.18	-40	-15.18	-53.58	-64.64	1.84	11.30	H
	10803	-45.21	-40	-5.21	-48.12	-53.61	2.22	10.62	H
	14407	-49.31	-40	-9.31	-58.24	-58.84	2.63	12.16	H
	18006	-58.36	-40	-18.36	-69.77	-72.73	3.23	17.60	H
	21607	-61.30	-40	-21.30	-76.37	-76.41	3.40	18.51	H
	25208	-59.09	-40	-19.09	-77.4	-73.99	3.75	18.65	H
									H
	7202	-52.20	-40	-12.20	-50.99	-61.66	1.84	11.30	V
	10803	-43.79	-40	-3.79	-46.43	-52.19	2.22	10.62	V
	14407	-49.26	-40	-9.26	-58.5	-58.79	2.63	12.16	V
	18006	-55.78	-40	-15.78	-66.88	-70.15	3.23	17.60	V
	21607	-61.89	-40	-21.89	-76.64	-77.00	3.40	18.51	V
	25208	-59.33	-40	-19.33	-77.34	-74.23	3.75	18.65	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**<Ant. 0 + Ant. 1>****5G NR n77 (SRS mode)**

5G NR n77 (SRS mode) / 100MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7102	-54.63	-40	-14.63	-52.75	-64.33	1.84	11.55	H
	10653	-45.16	-40	-5.16	-47.77	-53.63	2.23	10.71	H
	14204	-48.85	-40	-8.85	-57.58	-58.48	2.65	12.28	H
	21306	-62.29	-40	-22.29	-76.66	-77.14	3.32	18.17	H
	24857	-59.00	-40	-19.00	-77.28	-73.77	3.71	18.49	H
	28408	-55.80	-40	-15.80	-76.31	-71.27	3.99	19.46	H
									H
	7102	-52.10	-40	-12.10	-50.48	-61.80	1.84	11.55	V
	10653	-40.54	-40	-0.54	-42.74	-49.01	2.23	10.71	V
	14204	-49.11	-40	-9.11	-57.72	-58.74	2.65	12.28	V
	21306	-63.13	-40	-23.13	-77.19	-77.98	3.32	18.17	V
	24857	-59.54	-40	-19.54	-77.5	-74.31	3.71	18.49	V
	28408	-56.34	-40	-16.34	-76.44	-71.81	3.99	19.46	V
									V



Middle	7152	-55.15	-40	-15.15	-53.42	-64.73	1.84	11.42	H
	10728	-44.99	-40	-4.99	-47.75	-53.43	2.23	10.66	H
	14303	-49.11	-40	-9.11	-57.93	-58.69	2.64	12.22	H
	21457	-60.88	-40	-20.88	-75.71	-75.87	3.36	18.35	H
	25033	-58.90	-40	-18.90	-77.18	-73.63	3.71	18.44	H
	28610	-54.99	-40	-14.99	-75.69	-70.38	3.99	19.38	H
									H
	7152	-51.88	-40	-11.88	-50.48	-61.46	1.84	11.42	V
	10728	-40.86	-40	-0.86	-43.28	-49.30	2.23	10.66	V
	14303	-49.47	-40	-9.47	-58.38	-59.05	2.64	12.22	V
	21457	-60.96	-40	-20.96	-75.49	-75.95	3.36	18.35	V
	25033	-59.02	-40	-19.02	-76.99	-73.75	3.71	18.44	V
	28610	-55.62	-40	-15.62	-75.91	-71.01	3.99	19.38	V
									V
Highest	7202	-53.61	-40	-13.61	-52.01	-63.07	1.84	11.30	H
	10803	-46.35	-40	-6.35	-49.26	-54.75	2.22	10.62	H
	14407	-50.15	-40	-10.15	-59.08	-59.68	2.63	12.16	H
	18006	-60.94	-40	-20.94	-72.35	-75.31	3.23	17.60	H
	21607	-61.46	-40	-21.46	-76.53	-76.57	3.40	18.51	H
	25208	-59.31	-40	-19.31	-77.62	-74.21	3.75	18.65	H
									H
	7202	-49.57	-40	-9.57	-48.36	-59.03	1.84	11.30	V
	10803	-41.57	-40	-1.57	-44.21	-49.97	2.22	10.62	V
	14407	-49.34	-40	-9.34	-58.58	-58.87	2.63	12.16	V
	18006	-56.21	-40	-16.21	-67.31	-70.58	3.23	17.60	V
	21607	-60.56	-40	-20.56	-75.31	-75.67	3.40	18.51	V
	25208	-59.38	-40	-19.38	-77.39	-74.28	3.75	18.65	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 0 + Ant. 2>

5G NR n77 (MIMO mode)

5G NR n77 (MIMO mode) / 100MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7102	-53.33	-40	-13.33	-51.45	-63.03	1.84	11.55	H
	10653	-46.96	-40	-6.96	-49.57	-55.43	2.23	10.71	H
	14204	-47.63	-40	-7.63	-56.36	-57.26	2.65	12.28	H
	21306	-63.30	-40	-23.30	-77.66	-78.15	3.32	18.17	H
	24857	-59.48	-40	-19.48	-77.76	-74.25	3.71	18.49	H
	28408	-55.54	-40	-15.54	-76.05	-71.01	3.99	19.46	H
									H
	7102	-48.25	-40	-8.25	-46.63	-57.95	1.84	11.55	V
	10653	-42.88	-40	-2.88	-45.08	-51.35	2.23	10.71	V
	14204	-47.19	-40	-7.19	-55.8	-56.82	2.65	12.28	V
	21306	-63.07	-40	-23.07	-77.13	-77.92	3.32	18.17	V
	24857	-59.68	-40	-19.68	-77.64	-74.45	3.71	18.49	V
	28408	-56.44	-40	-16.44	-76.53	-71.91	3.99	19.46	V
									V



Middle	7152	-53.59	-40	-13.59	-51.86	-63.17	1.84	11.42	H
	10728	-46.46	-40	-6.46	-49.22	-54.90	2.23	10.66	H
	14303	-47.39	-40	-7.39	-56.21	-56.97	2.64	12.22	H
	21457	-61.55	-40	-21.55	-76.38	-76.54	3.36	18.35	H
	25033	-59.62	-40	-19.62	-77.9	-74.35	3.71	18.44	H
	28610	-56.03	-40	-16.03	-76.73	-71.42	3.99	19.38	H
									H
	7152	-46.79	-40	-6.79	-45.39	-56.37	1.84	11.42	V
	10728	-42.04	-40	-2.04	-44.46	-50.48	2.23	10.66	V
	14303	-47.32	-40	-7.32	-56.23	-56.90	2.64	12.22	V
	21457	-61.95	-40	-21.95	-76.48	-76.94	3.36	18.35	V
	25033	-60.03	-40	-20.03	-78	-74.76	3.71	18.44	V
	28610	-56.15	-40	-16.15	-76.44	-71.54	3.99	19.38	V
									V
Highest	7203	-50.53	-40	-10.53	-48.93	-59.99	1.84	11.30	H
	10804	-46.74	-40	-6.74	-49.65	-55.14	2.22	10.62	H
	14405	-48.69	-40	-8.69	-57.62	-58.22	2.63	12.16	H
	18006	-54.34	-40	-14.34	-65.75	-68.71	3.23	17.60	H
	21607	-61.43	-40	-21.43	-76.5	-76.54	3.40	18.51	H
	25208	-59.67	-40	-19.67	-77.98	-74.57	3.75	18.65	H
									H
	7203	-46.62	-40	-6.62	-45.41	-56.08	1.84	11.30	V
	10804	-43.24	-40	-3.24	-45.88	-51.64	2.22	10.62	V
	14405	-45.99	-40	-5.99	-55.23	-55.52	2.63	12.16	V
	18006	-55.93	-40	-15.93	-67.03	-70.30	3.23	17.60	V
	21607	-61.92	-40	-21.92	-76.67	-77.03	3.40	18.51	V
	25208	-60.09	-40	-20.09	-78.1	-74.99	3.75	18.65	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 1 + Ant. 3>

5G NR n77 (SRS mode)

5G NR n77 (SRS mode) / 100MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7102	-54.53	-40	-14.53	-52.66	-64.23	1.84	11.55	H
	10653	-45.67	-40	-5.67	-48.28	-54.14	2.23	10.71	H
	14204	-49.10	-40	-9.10	-57.83	-58.73	2.65	12.28	H
	21306	-62.50	-40	-22.50	-76.86	-77.35	3.32	18.17	H
	24857	-59.57	-40	-19.57	-77.85	-74.34	3.71	18.49	H
	28408	-56.13	-40	-16.13	-76.64	-71.60	3.99	19.46	H
									H
	7102	-50.80	-40	-10.80	-49.18	-60.50	1.84	11.55	V
	10653	-41.72	-40	-1.72	-43.92	-50.19	2.23	10.71	V
	14204	-49.40	-40	-9.40	-58.01	-59.03	2.65	12.28	V
	21306	-63.24	-40	-23.24	-77.3	-78.09	3.32	18.17	V
	24857	-59.83	-40	-19.83	-77.79	-74.60	3.71	18.49	V
	28408	-56.51	-40	-16.51	-76.6	-71.98	3.99	19.46	V
									V



Middle	7152	-54.91	-40	-14.91	-53.18	-64.49	1.84	11.42	H
	10728	-43.57	-40	-3.57	-46.33	-52.01	2.23	10.66	H
	14303	-49.14	-40	-9.14	-57.96	-58.72	2.64	12.22	H
	21457	-61.66	-40	-21.66	-76.49	-76.65	3.36	18.35	H
	25033	-59.62	-40	-19.62	-77.9	-74.35	3.71	18.44	H
	28610	-56.07	-40	-16.07	-76.77	-71.46	3.99	19.38	H
									H
	7152	-49.77	-40	-9.77	-48.37	-59.35	1.84	11.42	V
	10728	-41.81	-40	-1.81	-44.23	-50.25	2.23	10.66	V
	14303	-47.55	-40	-7.55	-56.46	-57.13	2.64	12.22	V
	21457	-61.84	-40	-21.84	-76.37	-76.83	3.36	18.35	V
	25033	-60.34	-40	-20.34	-78.31	-75.07	3.71	18.44	V
	28610	-56.09	-40	-16.09	-76.38	-71.48	3.99	19.38	V
									V
Highest	7203	-55.95	-40	-15.95	-54.35	-65.41	1.84	11.30	H
	10804	-47.26	-40	-7.26	-50.17	-55.66	2.22	10.62	H
	14405	-48.94	-40	-8.94	-57.87	-58.47	2.63	12.16	H
	18006	-56.31	-40	-16.31	-67.72	-70.68	3.23	17.60	H
	21607	-61.63	-40	-21.63	-76.7	-76.74	3.40	18.51	H
	25208	-59.73	-40	-19.73	-78.04	-74.63	3.75	18.65	H
									H
	7203	-52.66	-40	-12.66	-51.45	-62.12	1.84	11.30	V
	10804	-43.53	-40	-3.53	-46.17	-51.93	2.22	10.62	V
	14405	-47.10	-40	-7.10	-56.34	-56.63	2.63	12.16	V
	18006	-54.75	-40	-14.75	-65.85	-69.12	3.23	17.60	V
	21607	-62.06	-40	-22.06	-76.81	-77.17	3.40	18.51	V
	25208	-60.00	-40	-20.00	-78.01	-74.90	3.75	18.65	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 2 + Ant.3>

5G NR n77 (SRS mode)

5G NR n77 (SRS mode) / 100MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7102	-51.82	-40	-11.82	-49.95	-61.52	1.84	11.55	H
	10653	-44.71	-40	-4.71	-47.32	-53.18	2.23	10.71	H
	14204	-49.36	-40	-9.36	-58.09	-58.99	2.65	12.28	H
	21306	-62.72	-40	-22.72	-77.08	-77.57	3.32	18.17	H
	24857	-59.24	-40	-19.24	-77.52	-74.01	3.71	18.49	H
	28408	-55.90	-40	-15.90	-76.41	-71.37	3.99	19.46	H
									H
	7102	-48.82	-40	-8.82	-47.2	-58.52	1.84	11.55	V
	10653	-40.72	-40	-0.72	-42.92	-49.19	2.23	10.71	V
	14204	-47.40	-40	-7.40	-56.01	-57.03	2.65	12.28	V
	21306	-63.01	-40	-23.01	-77.07	-77.86	3.32	18.17	V
	24857	-58.81	-40	-18.81	-76.77	-73.58	3.71	18.49	V
	28408	-56.57	-40	-16.57	-76.66	-72.04	3.99	19.46	V
									V



Middle	7152	-51.36	-40	-11.36	-49.63	-60.94	1.84	11.42	H
	10728	-44.59	-40	-4.59	-47.35	-53.03	2.23	10.66	H
	14303	-48.99	-40	-8.99	-57.81	-58.57	2.64	12.22	H
	21457	-60.90	-40	-20.90	-75.73	-75.89	3.36	18.35	H
	25033	-58.75	-40	-18.75	-77.03	-73.48	3.71	18.44	H
	28610	-55.32	-40	-15.32	-76.02	-70.71	3.99	19.38	H
									H
	7152	-47.33	-40	-7.33	-45.93	-56.91	1.84	11.42	V
	10728	-41.56	-40	-1.56	-43.98	-50.00	2.23	10.66	V
	14303	-45.71	-40	-5.71	-54.62	-55.29	2.64	12.22	V
	21457	-60.89	-40	-20.89	-75.42	-75.88	3.36	18.35	V
	25033	-58.74	-40	-18.74	-76.71	-73.47	3.71	18.44	V
	28610	-55.48	-40	-15.48	-75.77	-70.87	3.99	19.38	V
									V
Highest	7203	-54.32	-40	-14.32	-52.72	-63.78	1.84	11.30	H
	10804	-45.19	-40	-5.19	-48.1	-53.59	2.22	10.62	H
	14405	-48.38	-40	-8.38	-57.31	-57.91	2.63	12.16	H
	18006	-60.59	-40	-20.59	-72	-74.96	3.23	17.60	H
	21607	-61.40	-40	-21.40	-76.47	-76.51	3.40	18.51	H
	25208	-59.22	-40	-19.22	-77.53	-74.12	3.75	18.65	H
									H
	7203	-51.29	-40	-11.29	-50.08	-60.75	1.84	11.30	V
	10804	-40.89	-40	-0.89	-43.53	-49.29	2.22	10.62	V
	14405	-47.62	-40	-7.62	-56.86	-57.15	2.63	12.16	V
	18006	-57.95	-40	-17.95	-69.05	-72.32	3.23	17.60	V
	21607	-61.46	-40	-21.46	-76.21	-76.57	3.40	18.51	V
	25208	-59.60	-40	-19.60	-77.61	-74.50	3.75	18.65	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.