

# TEST RESULT SUMMARY

**EN 300 330-2 V1.1.1: 2001****Subclauses 7.2, 7.3, 7.4**

MANUFACTURER'S NAME	Medtronic
NAME OF EQUIPMENT	Patient Assistant
MODEL NUMBER	<b>2696</b>
TYPE OF EQUIPMENT	<b>Pocket-sized remote communications device</b>
MANUFACTURER'S ADDRESS	7000 Central Avenue NE, MS CW300 Minneapolis MN 55432-3576
TEST REPORT NUMBER	NC300445.2
TEST DATE	03 February 2003

According to testing performed at TÜV Product Service Inc, the above-mentioned unit is in compliance with the emission requirements defined in European Telecommunication Standard EN 300 330.

It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. Any modifications necessary for compliance made during testing on the above mentioned date(s) must be implemented in all production units for compliance to be maintained.

TÜV Product Service Inc, as an independent testing laboratory, declares that the equipment tested as specified above conforms to the emission requirements of European Telecommunication Standard EN 300 330: "Electromagnetic Compatibility and Radio Spectrum Matters (ERM); Short Range Devices (SRD); Technical Characteristics and Test Methods for Radio Equipment in the Frequency Range 9 kHz to 25 MHz and Inductive Loop Systems in the Frequency Range 9 kHz to 30 MHz."

Date: 14 March 2003



Location: Taylors Falls MN  
USA

Tested By:  
R. M. Johnson

T. K. Swanson  
Technical Writer

Not Transferable

## D I R E C T O R Y / SUB-CLAUSE PARAMETER TO BE MEASURED PAGE

<b>A) Documentation</b>	<b>Page(s)</b>
Test Result Summary	1
Directory/Parameters to be measured	2 - 8
Test Setup Photos	A1 – A3

The complete list of measurements called for in EN 300 330 is given below.

**Transmitter parameters** - Ambient temperature .....20°C Relative humidity .....22%

7.2.1	Transmitter Carrier Output Levels	3
7.2.2	RF Carrier Current <span style="float: right;">Class 3 Only</span>	N/A
7.2.3	Radiated E-Field <span style="float: right;">Class 4 Only</span>	N/A
7.3.1	Permitted Frequency Range of Modulation bandwidth	4
7.4.2	Conducted Spurious Emissions (Operating) <span style="float: right;">Class 3 Only</span>	N/A
7.4.2	Conducted Spurious Emissions (Standby) <span style="float: right;">Class 3 Only</span>	N/A
7.4.3	Radiated Field Strength (Transmit < 30 MHz)	5
7.4.3	Radiated Field Strength (Standby < 30 MHz)	5
7.4.4	Radiated Field Strength (Transmit > 30 MHz)	6
7.4.4	Radiated Field Strength (Standby > 30 MHz)	6

### Receiver parameters -

8.1.2	Receiver Spurious Radiation (Frequencies < 30 MHz)	N/A
8.1.2	Receiver Spurious Radiation (Frequencies > 30 MHz)	N/A

## H-FIELD FIELD STRENGTH - SUB-CLAUSE 7.2.1 (Class 1)

Rated field strength (maximum) -15.5 dB $\mu$ A/m at 10 metres

Test conditions	Nominal System Operating Frequency: 200.0 kHz Maximum Transmitter Field Strength (dBμA/m)			
T <sub>nom</sub> (..20...)°C		Final 10 Metre	10 Metre Limit	Margin of compliance
		-15.5	35.99	51.49
Maximum deviation from rated output under normal test conditions (dB)				
Measurement uncertainty (dBμA/m)	±1			
The noise floor measurement at 10 metres is −21.5dBuA/m.				

### LIMIT SUB-CLAUSE 7.2.1.3

Frequency range - (MHz)	H-field field strength limit (Hf) - dB $\mu$ A/m at 10 m
$0,009 \leq f < 0,03$	72 or per note on loop coil antenna area
$0,03 \leq f < 0,07$ $0,119 \leq f < 0,135$	72 at 0,03 MHz descending 3 dB/oct or per note on loop coil antenna area
$0,05975 \leq f < 0,06025$ $0,07 \leq f < 0,119$	42
$0,135 \leq f < 1,0$ $1,0 \leq f < 4,642$ $4,642 \leq f < 30$	37,7 at 0,135 MHz descending 3 dB/oct 29 at 1,0 MHz descending 9 dB/oct 9
$6,765 \leq f \leq 6,795$ (ISM) $13,553 \leq f \leq 13,567$ (ISM) $26,957 \leq f \leq 27,283$ (ISM)	42

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED (for reference see test equipment listing)

1,2,3

Ambient temperature .....20.°C

Relative humidity .....22%

**RF CARRIER CURRENT - SUB-CLAUSE 7.2.2 (Class 2)**

N/A

**RADIATED E-FIELD, FIELD STRENGTH (measured as H-field) - SUB-CLAUSE 7.2.3 (Class 4)**

N/A

**PERMITTED FREQUENCY RANGE OF MODULATION BANDWIDTH - SUB-CLAUSE 7.3.1**


Test not applicable since peak fundamental level is below the spurious emission limit.

**CONDUCTED SPURIOUS EMISSIONS (Operating)- SUB-CLAUSE 7.4.2 (Class 3)**

N/A

**CONDUCTED SPURIOUS EMISSIONS (Standby) - SUB-CLAUSE 7.4.2 (Class 3)**

N/A

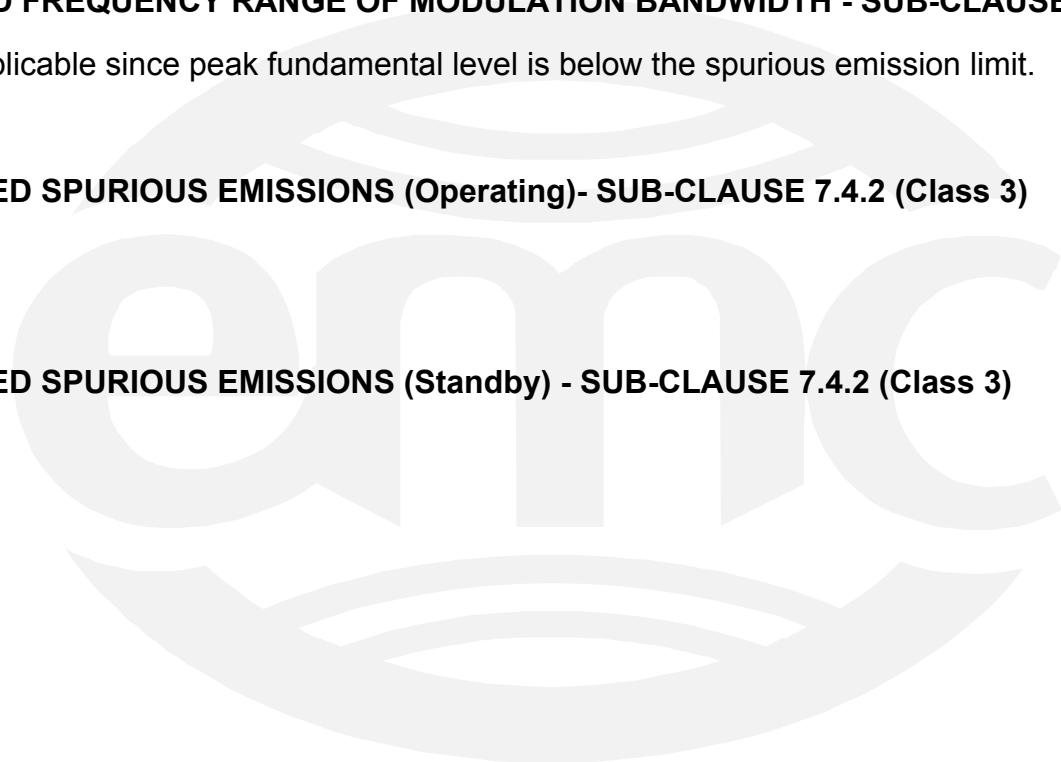

# TRANSMITTER RADIATED SPURIOUS EMISSIONS (Transmit < 30 MHz) - SUB-CLAUSE 7.4.3

					Transmit	
					spec limit	
Freq.	1 Meter	3 Meter	10 M	10 M	dBuA/m	Limit Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dBuA/m	300 330	dBuA/m
0.15	72	60	34	-17.5	14.76452881	32.2645288
0.6	57	40	16	-35.5	8.735560259	44.2355603
1	51	30	6	-45.5	6.513989065	52.0139891

Transmitter operating with normal internal modulation.

## LIMIT SUB-CLAUSE 7.4.3.2

State	Frequency $9\text{ kHz} \leq f < 10\text{ MHz}$	Frequency $10\text{ MHz} \leq f < 30\text{ MHz}$
Transmit	27 dB $\mu$ A/m descending 3 dB/oct	-3,5 dB $\mu$ A/m

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED (for reference see test equipment listing)

1,2,3

Ambient temperature .....20.°C

Relative humidity .....22%

# TRANSMITTER RADIATED SPURIOUS EMISSIONS (standby < 30 MHz) - SUB-CLAUSE 7.4.3

No spurious emissions detected in standby mode below 30 MHz.

## LIMIT SUB-CLAUSE 7.4.3.2

State	Frequency $9\text{ kHz} \leq f < 10\text{ MHz}$	Frequency $10\text{ MHz} \leq f < 30\text{ MHz}$
Standby	6 dB $\mu$ A/m descending 3 dB/oct	-24,5 dB $\mu$ A/m

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED (for reference see test equipment listing)

1,2,3

Ambient temperature .....20.°C

Relative humidity .....22%

# **TRANSMITTER RADIATED SPURIOUS EMISSIONS (Transmit > 30 MHz) - SUB-CLAUSE 7.4.4**

No spurious emissions detected in transmit mode above 30 MHz.

## **LIMIT SUB-CLAUSE 7.4.4.2**

State	47 MHz to 74 MHz 87,5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other Frequencies between 30 to 1000 MHz
Operating	4 nW	250 nW

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED (for reference see test equipment listing)

4,5,6,7,8

Ambient temperature .....20.°C      Relative humidity .....22%

# **TRANSMITTER RADIATED SPURIOUS EMISSIONS (standby > 30 MHz) - SUB-CLAUSE 7.4.4**

No spurious emissions detected in standby mode above 30 MHz.

## **LIMIT SUB-CLAUSE 7.4.4.2**

State	47 MHz to 74 MHz 87,5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other Frequencies between 30 to 1000 MHz
Standby	2 nW	2 nW

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED (for reference see test equipment listing)

4,5,6,7,8

Ambient temperature .....20.°C      Relative humidity .....22%

**RECEIVER SPURIOUS RADIATION (< 30 MHz) - SUB-CLAUSE 8.1**

N/A

**RECEIVER SPURIOUS RADIATION (>30 MHz) SUB-CLAUSE 8.1**

N/A



## TEST EQUIPMENT

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

Ref. No.	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Loop Antenna	HFH2-Z2	Polarad	879285/036
02	EMI Receiver	ESHS-20	Rohde-Schwarz	837055/003
03	Coaxial cable		Polarad	
04	Spectrum Analyzer	8566B	HP	2430A00930
05	Analyzer Display	85662A	HP	2403A08134
06	Quasi-Peak Adapter	85650A	HP	2521A01006
07	Preamplifier	ZHL-1042J	Mini-Circuits	32296
08	Biconicalog Antenna	EM-6917B	Electro-Metrics	102

## ADDITIONAL INFORMATION SUPPLEMENTARY TO THE TEST REPORT

Photographs other than of the test-setup are sent independently from report.

## TEST SETUP PHOTOS



Test-setup photo(s):  
Radiated Emission



Test-setup photo(s):  
Radiated Emission

