


Test Report TR3768-180-BTC-FHSS

Equipment Under Test:	SONA NX611
Requirement(s):	eCFR 47 Part 15.247 RSS-247
Test Date(s):	01/22/2024-04/30/2024, 12/04/2024-01/17/2025
Prepared for:	Ezurio Attn: Brian Petted W66 N220 Commerce Ct. Cedarburg, WI 53012

Report Issued by: Adam Alger, Manager EMC Laboratory	
Signature: 	Date: 03/05/2025
Report Reviewed by: Adam Alger, Manager EMC Laboratory	
Signature: 	Date: 02/12/2025
Report Constructed by: Dylan Rosenfeldt, EMC Engineer	
Signature: 	Date: 02/12/2025

This test report may not be reproduced, except in full, without approval of Ezurio

Company: Ezurio	Page 1 of 32	Name: SONA NX611
Report: TR3768-180-BTC-FHSS		Model: SONA NX611C
Job: C-3768		Serial: 00026 00028 00042

CONTENTS

Contents.....	2
Ezurio Test Services in Review	3
1 Test Report Summary	4
2 Client Information.....	5
2.1 Equipment Under Test (EUT) Information.....	5
2.2 Product Description	5
2.3 Modifications Incorporated for Compliance	5
2.4 Deviations and Exclusions from Test Specifications.....	5
2.5 EUT Information	5
2.6 Ancillary Equipment	6
2.7 Antenna Information	6
2.8 Test Channels.....	6
2.9 Power Table and Reduced Video Bandwidth for Average Measurements	6
3 Worst Case Test Results Summary.....	7
4 References	8
5 Uncertainty Summary	9
6 Test Data	10
6.1 Antenna Port Conducted Emissions	10
6.2 Radiated Emissions	22
6.3 AC Mains Conducted Emissions.....	29
7 Revision History	32

Ezurio Test Services in Review

The Ezurio laboratory located at W66 N220 Commerce Court Cedarburg, Wisconsin, 53012 USA is recognized through the following organizations:



A2LA – American Association for Laboratory Accreditation

Accreditation based on ISO/IEC 17025:2017 with Electrical (EMC) Scope

A2LA Certificate Number: 1255.01

Scope of accreditation includes all test methods listed herein unless otherwise noted



Federal Communications Commission (FCC) – USA

Accredited Test Firm Registration Number: 953492

Recognition of two 3 meter Semi-Anechoic Chambers



Innovation, Science and Economic Development Canada

Accredited U.S. Identification Number: US0218

Recognition of two 3 meter Semi-Anechoic Chambers

Company: Ezurio	Page 3 of 32	Name: SONA NX611
Report: TR3768-180-BTC-FHSS		Model: SONA NX611C
Job: C-3768		Serial: 00026 00028 00042

1 TEST REPORT SUMMARY

During **01/22/2024-04/30/2024, 12/04/2024 – 01/17/2025**, the Equipment Under Test (EUT), **SONA NX611**, as provided by Ezurio was tested to the following requirements:

FCC 15.247 | RSS-247 – FHSS Bluetooth Classic

Requirements	Description	Method	Compliant
15.247(d) 15.209 RSS-247 Clause 5.5 RSS-GEN Clause 8.10	Spurious Radiated Emissions in Restricted Bands 30-40000 MHz	ANSI C63.10	Yes
2.1049 RSS-247 Clause 6.6	Occupied Bandwidth and 20dB DTS BW	ANSI C63.10	Yes
15.247(b)(1) RSS-247 Clause 5.4 (b)	RF Output Power	ANSI C63.10	Yes
15.247(d) RSS-247 Clause 5.5 RSS-GEN A1 Clause 8.9	Out-of-band Emissions	ANSI C63.10	Yes
15.247(a)(1) RSS-247 Clause 5.1	Channel Separation, Number of Hopping Frequencies, and Time of Occupancy	ANSI C63.10	Yes
2.1055(d) RSS-GEN 6.11	Frequency Stability	ANSI C63.10	Reported
15.207 RSS-GEN 8.8	AC Conducted Emissions	ANSI C63.10	Yes

Notice:

The results relate only to the item tested as configured and described in this report. Any additional configurations, modes of operation, or modifications made to the equipment under test after the specified test date(s) are at the decision of the client and may not apply to the data seen in this test report.

The decision rule for Pass / Fail assessment to the specification or standard listed in this test report has been agreed upon by the client and laboratory to be as follows:

Measurement Type	Rule
Emissions – Amplitude	0.5 dB below specified limit
Emissions – Frequency	1% less than the specification
Immunity	Tested at specified level

2 CLIENT INFORMATION

Company Name	Ezurio
Contact Person	Brain Petted
Address	W66 N220 Commerce Ct. Cedarburg, WI 53012

2.1 Equipment Under Test (EUT) Information

The following information has been supplied by the client

Product Name	SONA NX611
Part Number	453-00180
Serial Number	00026 00028 00042
FCC ID	SQG-SONANX611C
IC ID	3147A-SONANX611C

2.2 Product Description

The NX611 is based upon NXP IW611 Wi-Fi 6 chipset. Feature-set includes 802.11 a/b/g/n/ac/ax Wi-Fi 6 and Dual-Mode Bluetooth v5.3 (BDR + EDR + BLE).

2.3 Modifications Incorporated for Compliance

None noted at time of test

2.4 Deviations and Exclusions from Test Specifications

None noted at time of test

2.5 EUT Information

Power Supply – INPUT:100-240VAC 50/60 Hz 0.3A

OUTPUT: 5VDC 2A

Firmware - sduart_nw61x_v1.bin.se

Sduart_nw61x_v1_mfg.bin.se

Company: Ezurio	Page 5 of 32	Name: SONA NX611
Report: TR3768-180-BTC-FHSS		Model: SONA NX611C
Job: C-3768		Serial: 00026 00028 00042

2.6 Ancillary Equipment

Equipment used for EUT programming (not part of the EUT)

Development Kit, SU60-SOMC 6.0

P/N: 463-00138-K1 Rev 1

Power Supply: INPUT: 100-240 VAC 50/60Hz 0.7A

OUTPUT: 12VDC 2A

HP Elitebook 840G1

Labtool Version: 1.0.0.45.6

2.7 Antenna Information

Manufacturer	Model	Part Number	Dimension	Type	Peak Gain (dBi)	
					2400-2480 MHz	5150-5850 MHz
TDK	Multilayer Antenna	ANT162442DT-2001A2	1.6mm x 0.8mm x 0.4mm	Chip	3.3	4.2

2.8 Test Channels

Channel	Frequency (MHz)	Data Rates
0	2402	DH5, 2DH5, and 3DH5
39	2441	
78	2480	

2.9 Power Table and Reduced Video Bandwidth for Average Measurements

Data Rate	Minimum Average VBW (Hz)	Power Setting
DH5	360	6
2DH5	360	6
3DH5	360	6

3 WORST CASE TEST RESULTS SUMMARY

Requirement	Channel and Data Rate	Frequency (MHz)	Measurement	Limit	Margin
15.247 (b)(1) RSS-247 Clause 5.4 (b) Output Power	39 DH5	-	7.7 dBm	30 dBm	22.3 dB
15.247 (d) RSS-247 Clause 5.5 Conducted	78 DH5	2483.5	36.9 dBμV/m	54.0 dBμV/m	17.1 dB
15.247(d) RSS-247 Clause 5.5 RSS-GEN Clause 8.9 Radiated	39 Basic Rate Single Channel	66.3	38.5 dBμV/m	40.0 dBμV/m	1.5 dB
15.207 RSS-GEN 8.8	37 1DH5	0.512	24.2 dBμV	46.0 dBμV	21.8 dB

4 REFERENCES

Publication	Edition	Date	AMD 1	AMD 2
FCC eCFR 47 Part 15	-	2025	-	-
ANSI C63.10	-	2020	-	-
RSS-247	3	2023	-	-
RSS-GEN	5	2018	2019	2021
KDB 558074 D01	-	2019	-	-

5 UNCERTAINTY SUMMARY

Using the guidance of the following publications the calculated measurement uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of $k = 2$.

References

CISPR 16-4-1

CISPR 16-4-2

CISPR 32

ANSI C63.23

A2LA P103

A2LA P103c

ETSI TR 100-028

Measurement Type	Configuration	Uncertainty $\pm$
Radiated Emissions	Biconical Antenna	5.0 dB
Radiated Emissions	Log Periodic Antenna	5.3 dB
Radiated Emissions	Horn Antenna	4.7 dB
AC Line Conducted Emissions	Artificial Mains Network	3.4 dB
Telecom Conducted Emissions	Asymmetric Artificial Network	4.9 dB
Disturbance Power Emissions	Absorbing Clamp	4.1 dB
Radiated Immunity	3 Volts/meter	2.2 dB
Conducted Immunity	CDN/EM/BCI	2.4/3.5/3.4 dB
EFT Burst/Surge	Peak pulse voltage	164 volts
ESD Immunity	15 kV level	1377 Volts


Parameter	ETSI U.C. $\pm$	U.C. $\pm$
Radio Frequency, from F0	1×10^{-7}	0.55×10^{-7}
Occupied Channel Bandwidth	5 %	2 %
RF conducted Power (Power Meter)	1.5 dB	1.2 dB
RF conducted emissions (Spectrum Analyzer)	3.0 dB	1.7 dB
All emissions, radiated	6.0 dB	5.3 dB
Temperature	1° C	0.65° C
Humidity	5 %	2.9 %
Supply voltages	3 %	1 %

6 TEST DATA

6.1 Antenna Port Conducted Emissions

Description of Measurement	The direct measurement of emissions at the antenna port of the EUT is achieved by use of a RF connection to a spectrum analyzer or power meter. The cable and attenuator factors are loaded into the analyzer or power meter allowing for direct measurement readings without the need for further corrections.
Example Calculations	Measurement (dBm) + Cable factor (dB) + External Attenuator (dB) = Corrected Reading (dBm) Margin (dB) = Limit (dBm) – Corrected Reading (dBm)

Block Diagram

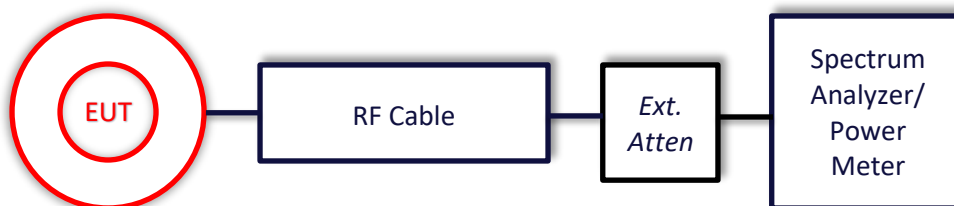

6.1.1 20dB DTS and 99% Occupied Bandwidth

Operator	Dylan Rosenfeldt	QA	Adam Hauke
Temperature	22.3°C	R.H. %	30.30%
Test Date	03/15/2024	Location	Conducted RF Bench
Requirement	2.1049 RSS-247 Clause 6.6	Method	ANSI C63.10 6.9

Limits: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Parameters

Frequency	2400-2483.5 MHz	Setup	Antenna Port
RBW	30 kHz	VBW	300 kHz
Detector(s)	Peak	Settings	Max Hold

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960173	Cable	A.H. Systems, Inc.	SAC-26G-1	388	6/13/2023	6/12/2024	Active Verification
EE 960085	Analyzer - EMI Receiver	Agilent	N9038A	MY51210148	4/27/2023	4/27/2024	Active Calibration


EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	BTC FHSS Tx
Frequency	2400-2483.5 MHz	Channel	See 2.8

Table

Rate	Channel	20 dB BW (kHz)	99% BW (kHz)
DH5	0	957	858
	39	957	861
	78	956	857
2DH5	0	1333	1177
	39	1332	1178
	78	1337	1183
3DH5	0	1302	1186
	39	1301	1183
	78	1302	1186

Plots

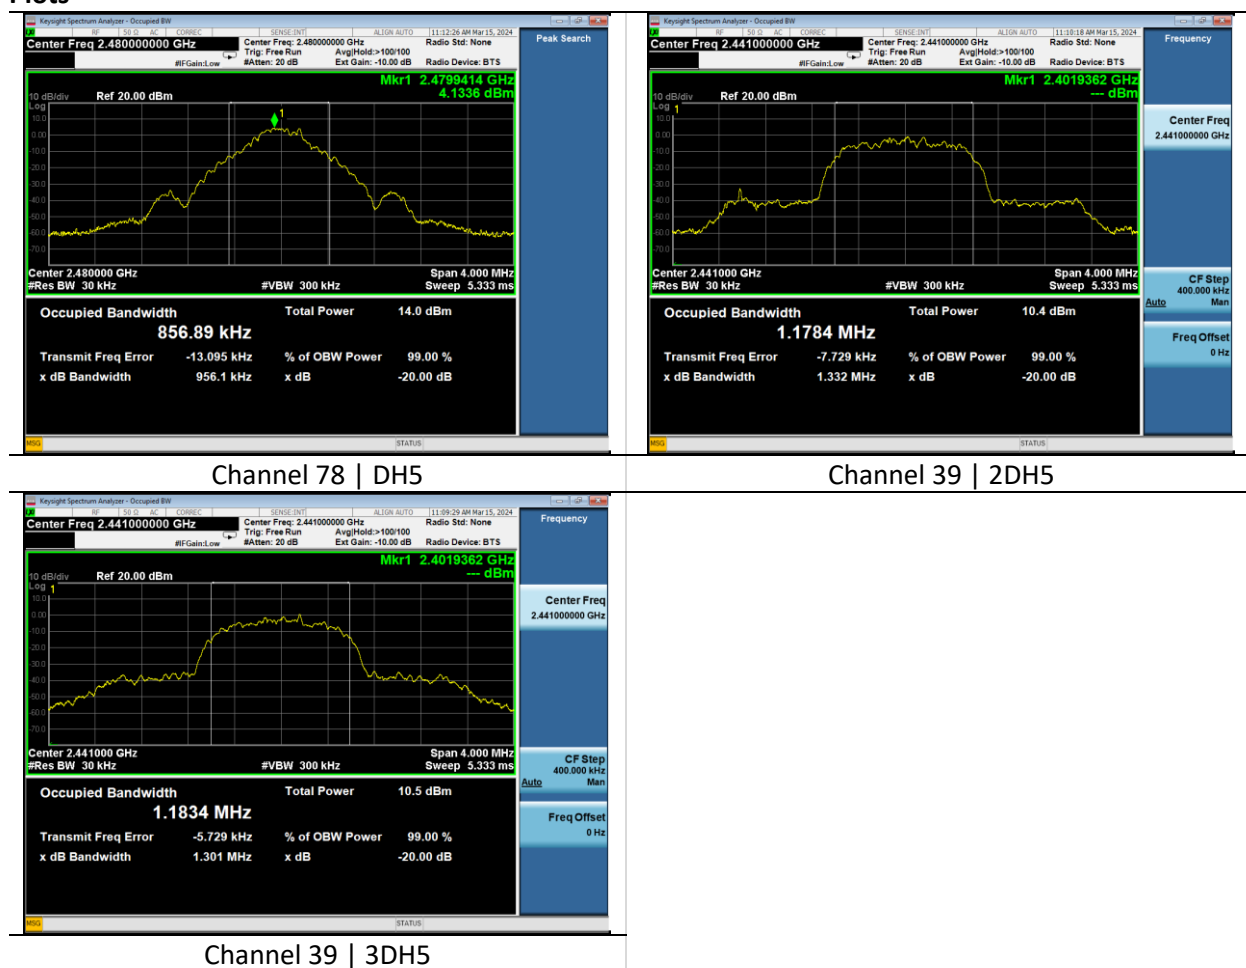

6.1.2 RF Output Power

Operator	Dylan Rosenfeldt	QA	Adam Hauke
Temperature	21.8°C	R.H. %	32.20%
Test Date	03/12/2024	Location	Conducted RF Bench
Requirement	15.247 (b)(1) RSS-247 Clause 5.4 (b)	Method	ANSI C63.10 11.9.1

Limit: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt.

Test Parameters

Frequency	2400-2483.5 MHz	Setup	Antenna Port
RBW	3 MHz	VBW	50 MHz
Detector(s)	Peak	Settings	Max Hold Span: 10 MHz

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960173	Cable	A.H. Systems, Inc.	SAC-26G-1	388	6/13/2023	6/12/2024	Active Verification
EE 960088	Analyzer - EMI Receiver	Agilent	N9038A	MY51210138	4/10/2023	4/10/2024	Active Calibration


EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	BTC FHSS Tx
Frequency	2400-2483.5 MHz	Channel	See 2.8


Tables

Rate	Channel	Peak Output Power (dBm)	Limit (dBm)	Margin (dB)
DH5	0	7.3	30.0	22.7
	39	7.7	30.0	22.3
	78	7.6	30.0	22.4
2DH5	0	5.8	30.0	24.2
	39	5.8	30.0	24.2
	78	5.6	30.0	24.4
3DH5	0	6.1	30.0	23.9
	39	6.1	30.0	23.9
	78	5.9	30.0	24.1


Plots

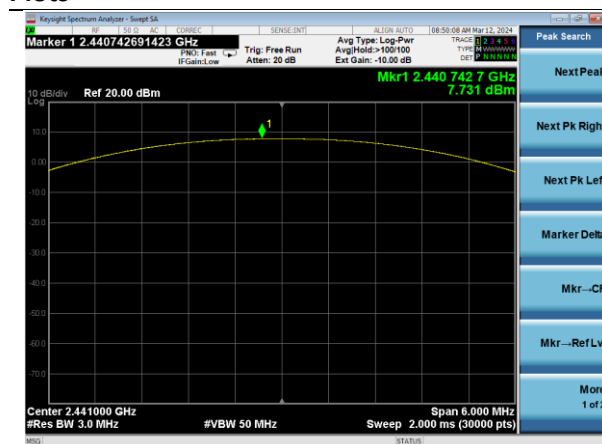

Channel 39 | DH5

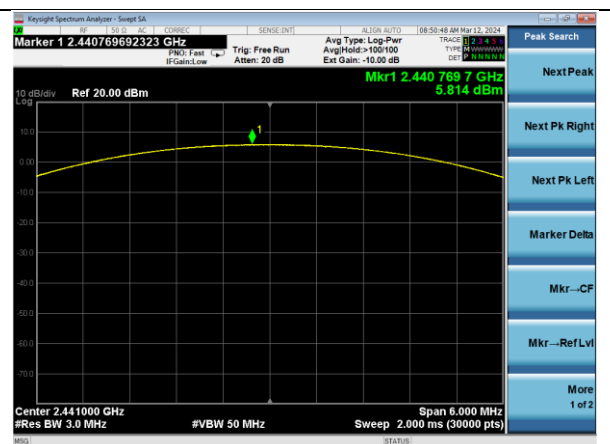

Channel 39 | 2DH5

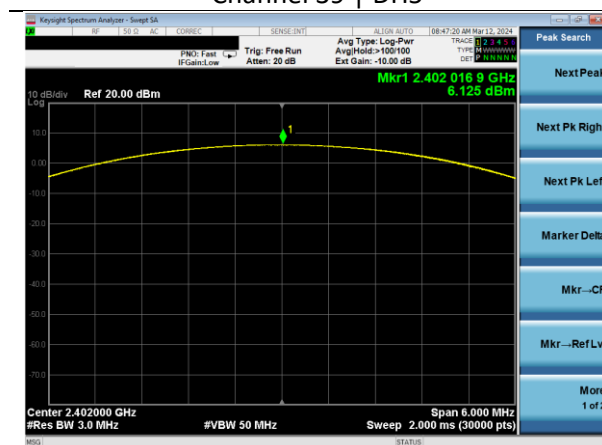

Channel 0 | 3DH5

6.1.3 Out-of-band Emissions

Operator	Dylan Rosenfeldt	QA	Adam Alger
Temperature	22.3°C 21.9°C	R.H. %	27.30% 24.50%
Test Date	03/11/2024 03/29/2024	Location	Conducted RF Bench
Requirement	15.247(d) RSS-247 Clause 5.5	Method	ANSI C63.10 11.12.2.5.2

Limits: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement provided the transmitter demonstrates compliance with the peak conducted power limits.

Reference Level (Worst Case PSD)

DH5 – 6.6 dBm/100 kHz

6.6 dBm-20 dB = -13.4 dBm Limit

Test Parameters

Frequency	30-40000 MHz	Setup	Antenna Port
RBW	100 kHz	VBW	300 kHz
Detector(s)	Peak		

Instrumentation


Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960172	Cable	A.H. Systems, Inc.	SAC-26G-1	387	06/13/2023	06/12/2024	Active Verification
EE 960085	Analyzer – Spectrum	Agilent	N9010A	MY53400296	04/11/2023	04/11/2024	Active Calibration
EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	4/11/2023	4/11/2024	Active Calibration
AA 960173	Cable	A.H. Systems, Inc.	SAC-26G-1	388	6/13/2023	6/12/2024	Active Verification


Input Power	120 VAC @ 60 Hz	Mode	BTC FHSS Tx
Frequency	2400-2483.5 MHz	Channel	See 2.8

Measurements


Rate	Channel	Frequency (MHz)	Measurement (dBm)	Limit (dBm)	Margin (dB)
DH5	0	2399.9	-52.3	-13.4	38.9
	78	2493.0	-49.1	-13.4	35.7
	Hopping	2399.7	-50.8	-13.4	37.4
	Hopping	2491.0	-49.3	-13.4	35.9
2DH5	0	2400.0	-49.8	-17.4	32.4
	78	2483.7	-57.1	-17.4	39.7
	Hopping	2399.9	-56.9	-17.4	39.5
	Hopping	2484.5	-57.7	-17.4	40.3
3DH5	0	2399.9	-56.9	-17.4	39.5
	78	2484.5	-57.7	-17.4	40.3
	Hopping	2400.0	-53.6	-17.3	36.3
	Hopping	2483.5	-55.9	-17.3	38.6

Worst Case Plots

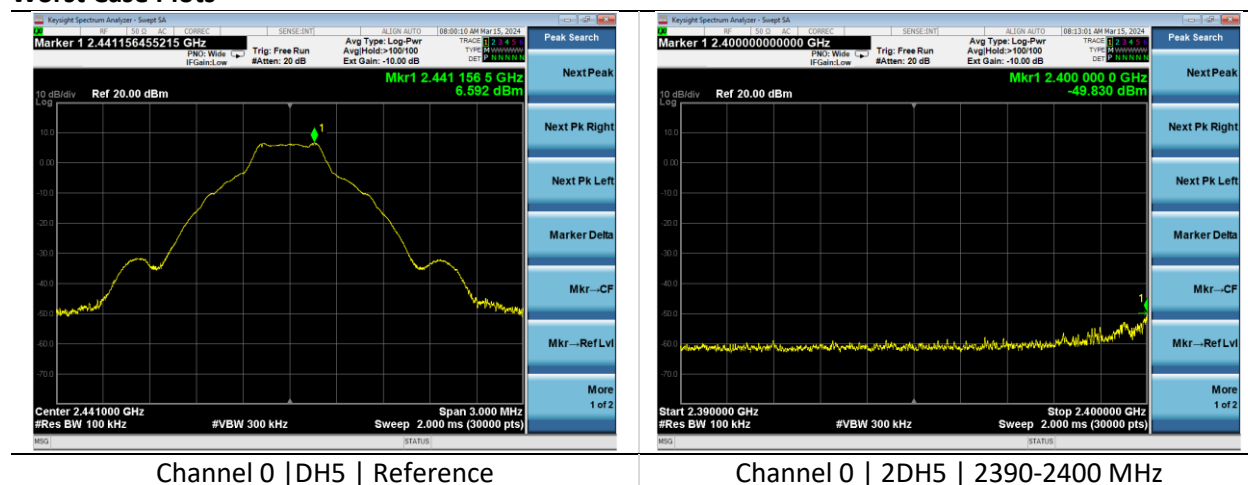


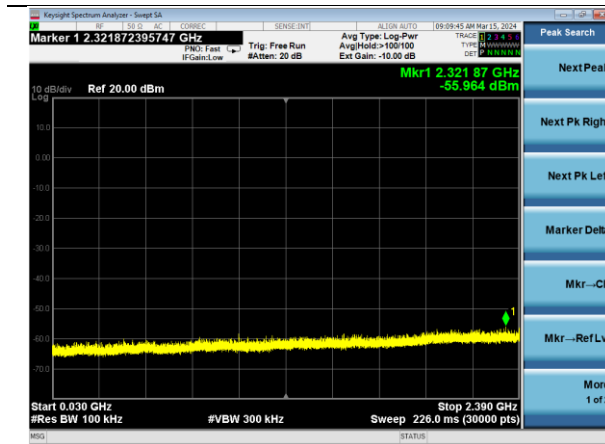

Channel 0 | DH5 | 30-2390 MHz

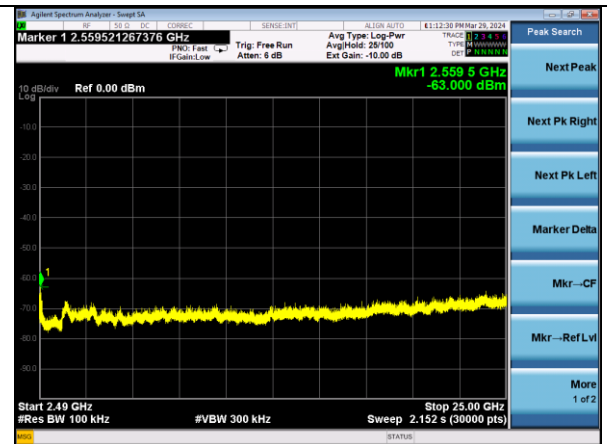

Channel 78 | DH5 | 2490-25000 MHz

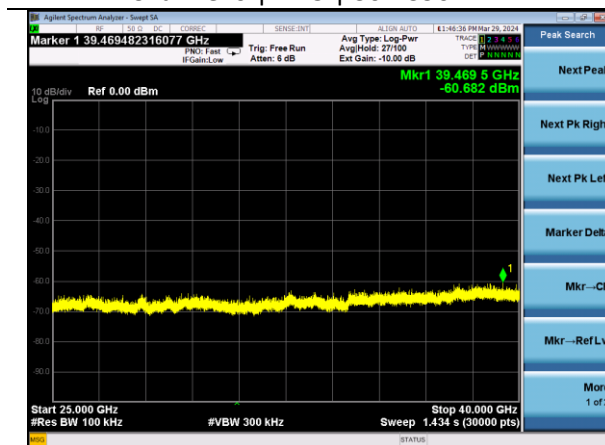

Channel 39 | 3DH5 | 25000-40000 MHz

6.1.4 Frequency Stability | Channel Separation | Number of Hopping Frequencies | Time of Occupancy

Operator	Dylan Rosenfeldt	QA	Anthony Smith
Temperature	21.6°C 22.0°C	R.H. %	30.00% 29.10%
Test Date	04/24/2024-04/25/2024	Location	Conducted RF Bench
Requirement	15.247(a)(1) 2.1055 (d) RSS-247 Clause 5.1 RSS-GEN Clause 6.11	Method	ANSI C63.10

Test Parameters

Frequency	2402-2480 MHz	Voltage	4.3 VDC, 5 VDC, and 5.8 VDC
Detector(s)	Peak	Settings	Max Hold


Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960173	Cable	A.H. Systems, Inc.	SAC-26G-1	387	06/13/2023	06/12/2024	Active Verification
EE 960088	Analyzer - EMI Receiver	Agilent	N9038A	MY51210138	4/10/2023	4/10/2024	Active Calibration

Frequency Stability Table

Channel	Voltage (VDC)	Center Frequency (Hz)
0	5	2401999998
	4.3	2401999990
	5.8	2402000020
39	5	2441000016
	4.3	2441000006
	5.8	2440999987
78	5	2479999983
	4.3	2479999993
	5.8	2479999999


Carrier Frequency Separation

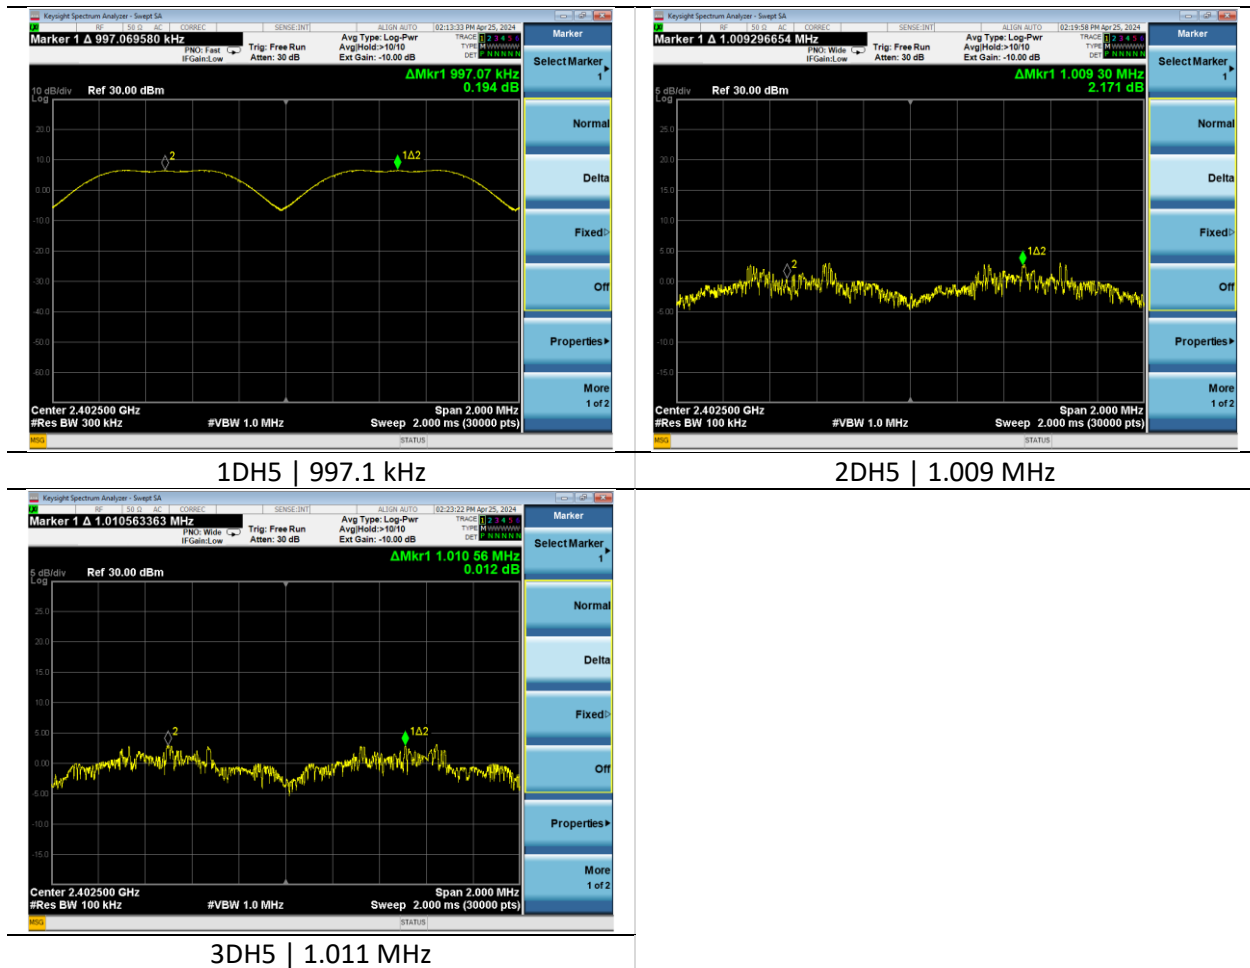

Dwell Time


Rate	Length of Transmission on Time (ms)	Number of Transmissions in 31.6s (79 Hopping *0.4)	Result (s)	Limit (s)	Margin (s)
1DH5	2.877	116.92	0.336	0.400	0.064
1DH3	1.629	184.44	0.304	0.400	0.096
1DH1	0.3888	350	0.136	0.400	0.264

Plots

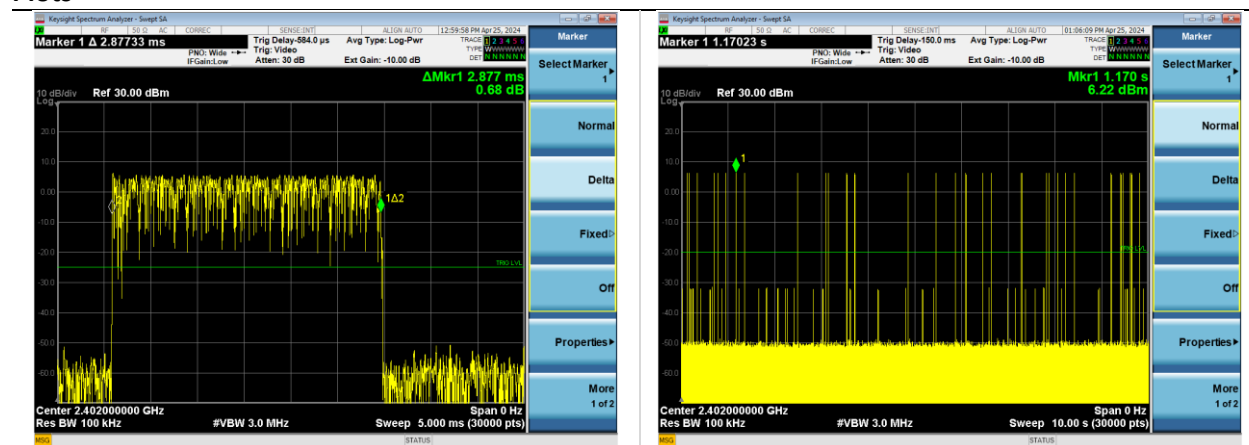


1DH5 | 2.877 ms

1DH5 | 37 hops / 10 seconds

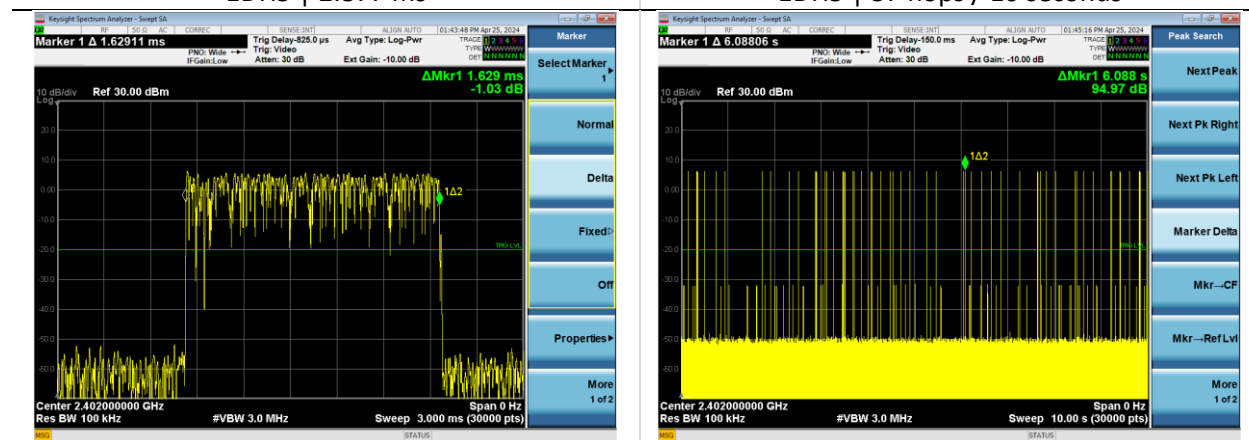


1DH3 | 1.629 ms

1DH3 | 59 hops / 10 seconds

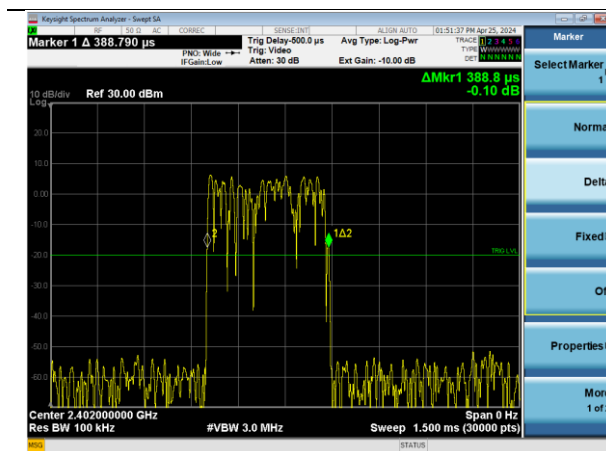

1DH1 | 389 μ s

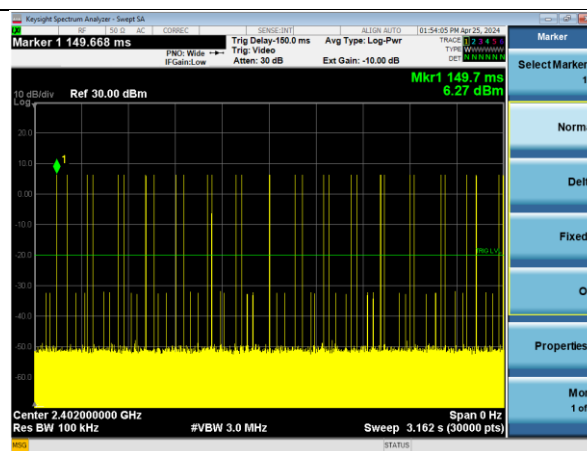

1DH1 | 35 hops / 3.16 seconds

6.2 Radiated Emissions

Description of Measurement	The frequency spectrum is investigated for intentional and / or unintentional signals emanating from the EUT by use of a standardized test site and measurement antenna. The antenna, cable, pre-amp, and other necessary measurement system correction factors are loaded onto the EMI receiver / spectrum analyzer when the measurements are performed allowing the data to be gathered and reported as corrected values. The maximum emissions from the EUT are determined by turn-table azimuth rotation (360°) and scanning of the measurement antenna. Maximized levels are noted at degree values of azimuth, measurement antenna height, and measurement antenna polarity.
Example Calculations	Measurement (dBμV) + Cable factor (dB) + Other (dB) + Antenna Factor (dB/m) = Corrected Reading (dBμV/m) Margin (dB) = Limit (dBμV/m) - Corrected Reading (dBμV/m) Example at 4000 MHz: Reading = 40 dBμV + 3.4 dB + 0.9 dB + 6.5 dB/m = 50.8 dBμV/m Average Limit = 20 log (500) = 54 dBμV/m Margin = 54 dBμV/m - 50.8 dBμV/m = 3.2 dB

Block Diagram



6.2.1 Spurious Radiated Emissions in the Restricted Bands

Operator	Dylan Rosenfeldt Jon Dilley	QA	Adam Alger Jon Dilley Dylan Rosenfeldt
Temperature	22.8°C-23.9°C	R.H. %	20.60%-28.10%
Test Date	12/06/2024-01/06/2024	Location	Chamber 3 Chamber 5
Requirement	15.247 (d) 15.209 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Method	ANSI C63.10 11.12

15.209 Limits:

Frequency (MHz)	Quasi-Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Peak Limit (dBμV/m)
30-88	40.0	-	-
88-216	43.5	-	-
216-960	46.0	-	-
960-1000	54.0	-	-
1000-40000	-	54.0	74.0

Test Parameters

Frequency	30-40000 MHz	Distance	3 m
Detector(s)	Peak Trace Peak, Quasi-Peak, and Average Final Measurements	Table height	150 cm
RBW	<1000 MHz – 120 kHz >1000 – 1 MHz	VBW	<1000 – 1.2 MHz >1000 – See 2.9

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960158	Antenna - Double Ridge Horn	ETS Lindgren	3117	109300	2/7/2024	2/7/2025	Active Calibration
EE 960203	Analyzer - EMI Receiver	Keysight	N9038A	MY56400072	4/10/2024	4/10/2025	Active Calibration
LSC-300	Cable	Chamber 3 Emissions	-	-	1/5/2024	1/5/2025	Active Verification
AA 960007	Antenna - Double Ridge Horn	EMCO	3115	9311-4138	11/19/2024	11/19/2025	Active Calibration
AA 960209	Antenna - Low Noise Amplifier	Mini-Circuits	ZVA-213X-S+	037101808	11/19/2024	11/19/2025	Active Calibration
AA 960154	Filter - High Pass 2.4 GHz	KWM	HPF-L-14186	7272-02	4/10/2024	4/10/2025	Active Calibration

Company: Ezurio	Page 23 of 32	Name: SONA NX611
Report: TR3768-180-BTC-FHSS		Model: SONA NX611C
Job: C-3768		Serial: 00026 00028 00042

AA 960174	Antenna - Small Horn	ETS Lindgren	3116C-PA	00206880	12/2/2024	12/2/2025	Active Calibration
AA 960220	Cable	A.H. Systems, Inc.	SAC-26G-6	552	2/16/2024	2/16/2025	Active Verification
AA 960194	Antenna - Biconical	A.H. Systems, Inc.	SAS-540	780	12/9/2024	12/9/2025	Active Calibration
AA 960195	Antenna - Log Periodic	A.H. Systems, Inc.	SAS-512-2	557	11/22/2024	11/23/2025	Active Calibration

EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	BTC FHSS Tx
EUT	X, Y, Z Plane Orientations	AE	HP Elitebook 840G1 Ezurio – SOM60 Development Kit
Notes	6000 MHz Emission from auxiliary equipment. Not a function of the EUT.		

Radiated Spurious – 30-1000 MHz

No Emissions in Restricted Frequency Bands

1000-40000 MHz


Band Edge

Channel	EUT Orientation	Data Rate	Measurement Type	Frequency (MHz)	Antenna Polarity	Measurement (dBμV/m)	Limit (dBμV/m)	Margin (dB)
0	Z Plane	BR (Single)	Peak	2345.2	H	59.9	74.0	14.1
			Average	2387.9	H	46.6	54.0	7.4
		BR (Hopping)	Peak	2347.8	H	60.4	74.0	13.6
			Average	2384.1	H	46.5	54.0	7.5
		EDR2 (Single)	Peak	2337.6	H	60.0	74.0	14.0
			Average	2387.9	H	46.5	54.0	7.5
		EDR2 (Hopping)	Peak	2331.6	H	60.2	74.0	13.8
			Average	2386.9	H	46.6	54.0	7.4
		EDR3 (Single)	Peak	2383.3	H	60.1	74.0	13.9
			Average	2387.0	H	46.5	54.0	7.5
		EDR3 (Hopping)	Peak	2364.4	H	59.9	74.0	14.1
			Average	2385.3	H	46.5	54.0	7.5
78	Z Plane	BR (Single)	Peak	2483.7	H	60.6	74.0	13.4
			Average	2484.9	H	46.5	54.0	7.5
		BR (Hopping)	Peak	2488.1	H	60.1	74.0	13.9
			Average	2491.3	H	46.6	54.0	7.4
		EDR2 (Single)	Peak	2495.3	H	60.9	74.0	13.1
			Average	2487.6	H	46.6	54.0	7.4
		EDR2 (Hopping)	Peak	2485.2	H	60.5	74.0	13.5
			Average	2486.4	H	46.6	54.0	7.4
		EDR3 (Single)	Peak	2484.4	H	60.2	74.0	13.8
			Average	2488.4	H	46.6	54.0	7.4
		EDR3 (Hopping)	Peak	2495.3	H	60.3	74.0	13.7
			Average	2484.8	H	46.7	54.0	7.3


Spurious

Mode	Channel	Measurement Type	Frequency (MHz)	Measurement (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Power Setting
1DH5	19	Peak	24002.6	58.2	74.0	15.8	6
	19	Average	24002.6	44.5	54.0	9.5	6
	19	Peak	39285.1	59.4	74.0	14.6	6
	19	Average	39285.1	45.6	54.0	8.4	6


Worst Case Plots

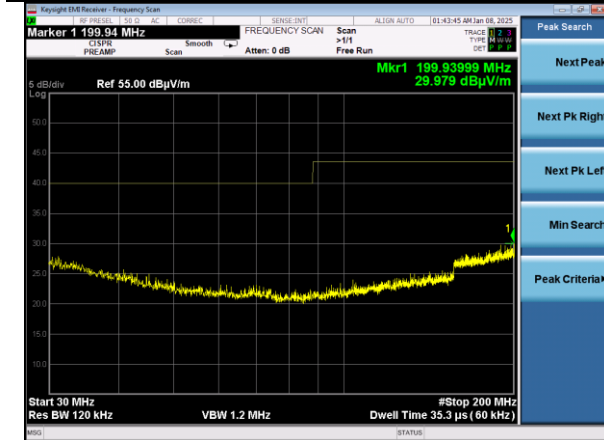


Channel 39 | 1DH5 | Single
 30-200 MHz | Horizontal

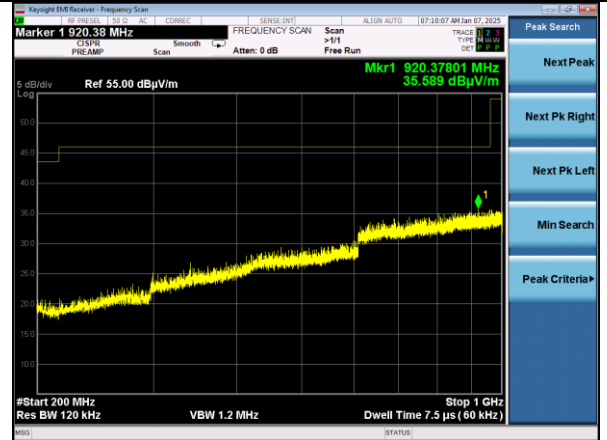


Channel 39 | 1DH5 | Single
 200-1000 MHz | Vertical

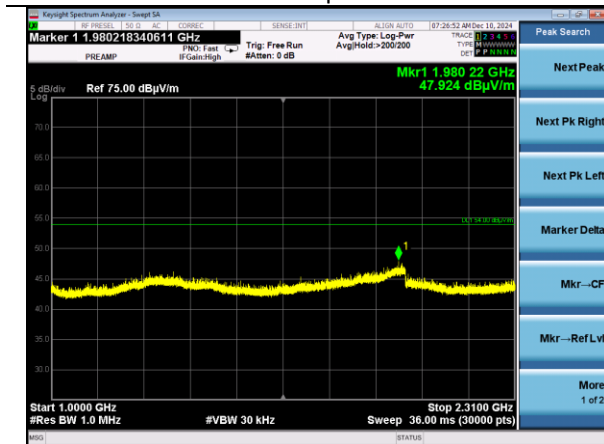


Channel 39 | 1DH5 | Single
 1000-2310 MHz | Horizontal

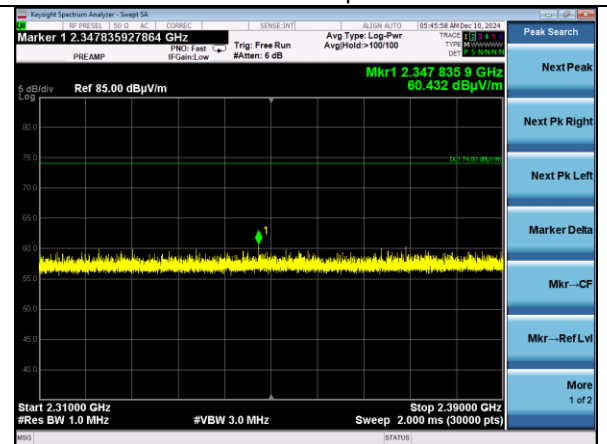


Channel 39 | 1DH5 | Hopping
 2310-2390 MHz | Horizontal

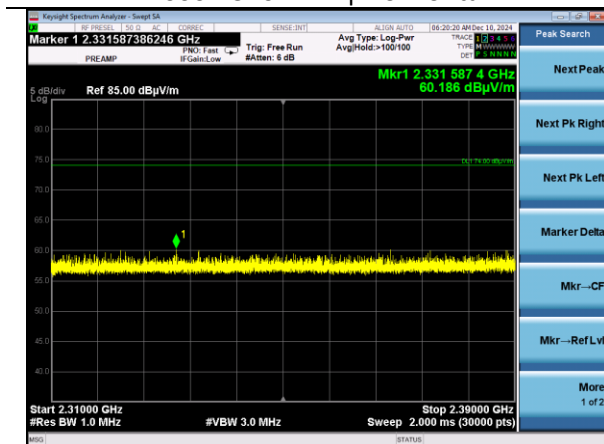


Channel 0 | 2DH5 | Hopping
 2310-2390 MHz | Horizontal

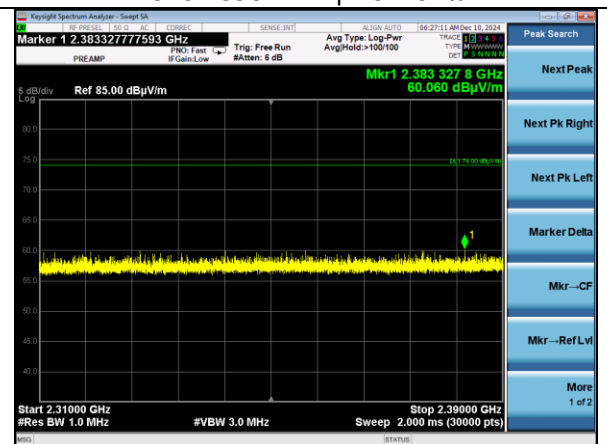


Channel 0 | 3DH5 | Single
 2310-2390 MHz | Horizontal

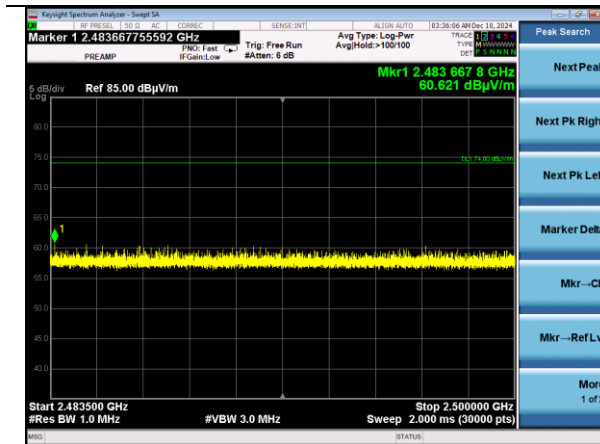


Channel 78 | 1DH5 | Single
2483.5-2500 MHz | Horizontal

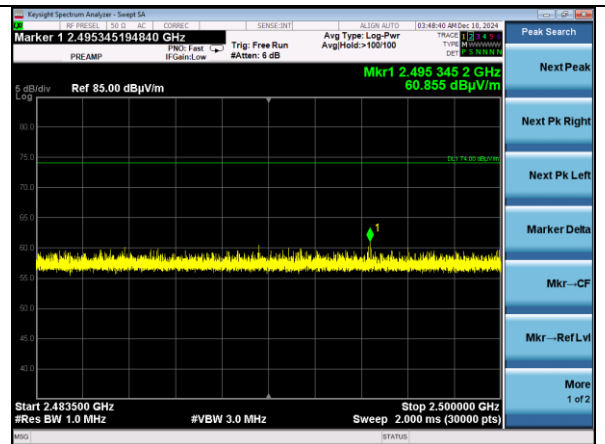


Channel 78 | 2DH5 | Single
2483.5-2500 MHz | Horizontal

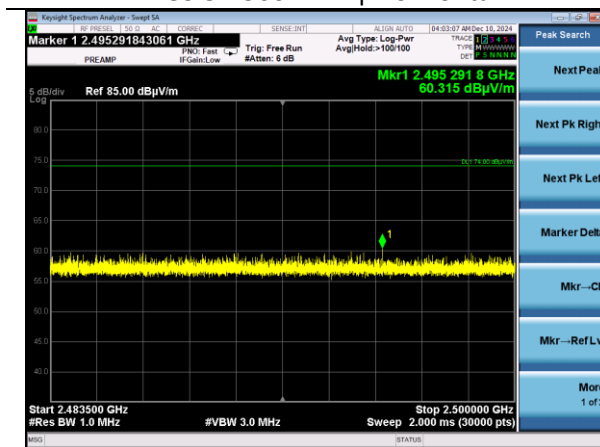


Channel 78 | 1DH5 | Hopping
2483.5-2500 MHz | Horizontal

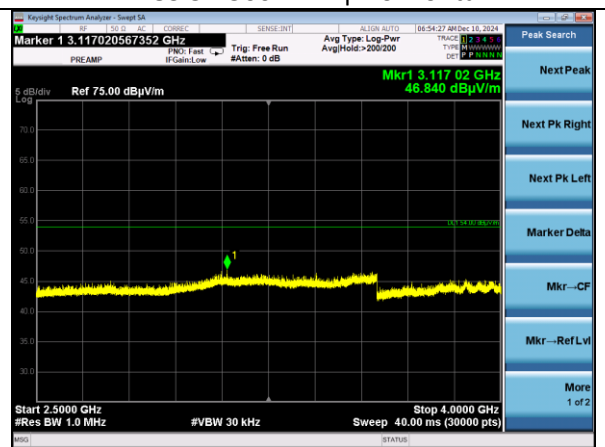

Channel 39 | 1DH5 | Single
2500-4000 MHz | Horizontal

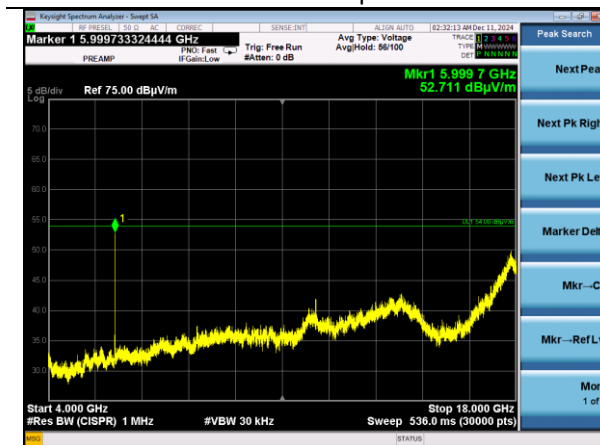

Channel 39 | 1DH5 | Single
4000-18000 MHz | Vertical

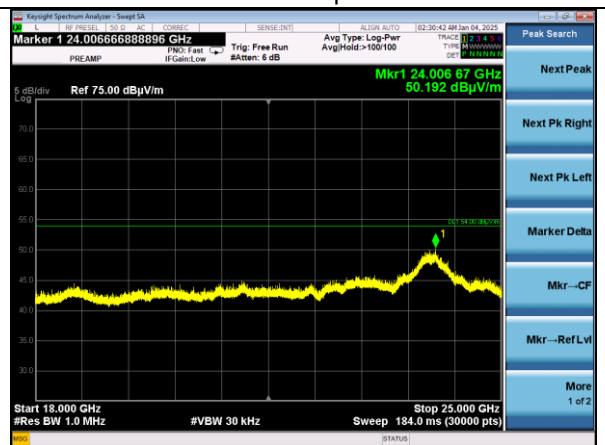

Channel 39 | 1DH5 | Single
18000-25000 MHz | Horizontal

6.3 AC Mains Conducted Emissions

A line impedance stabilization network (LISN) or artificial mains network (AMN) allows the emissions of the power supply conductors to be measured while isolating the EUT from the supply mains.

Description of Measurement

The AMN, cable, and other necessary measurement system correction factors are loaded onto the EMI receiver when the measurements are performed. The data is gathered and reported as the corrected values.


Maximum emissions are determined with a peak max hold trace then measurements at a selection of the highest points are made with quasi-peak and average detectors. Results are recorded and compared to limit for each line. (e.g. line and neutral)

Example Calculations

Measurement (dBμV) + Cable factor (dB) + Other (dB) = Corrected Reading (dBμV)

Margin (dB) = Limit (dBμV) - Corrected Reading (dBμV)

Block Diagram

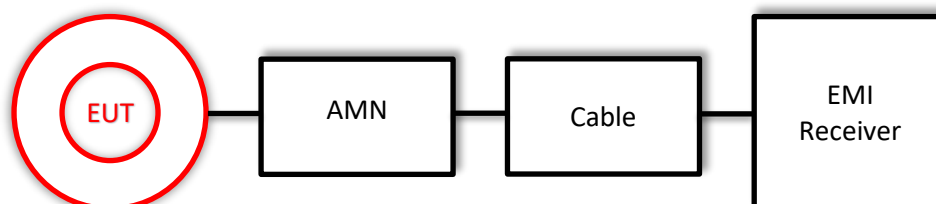

6.3.1 AC Mains Conducted Emissions

Operator	Jon Dille	QA	Adam Hauke
Temperature	20.8°C	R.H. %	19.60%
Test Date	1/22/2024	Location	AC Conducted Bench
Requirement	15.207 RSS-GEN Clause 8.8	Method	ANSI C63.10

Limits:

Frequency (MHz)	Quasi-Peak Limit (dBμV)	Average Limit (dBμV)
0.15-0.5	66.0-56.0*	56.0-46.0*
0.5-5	56.0	46.0
5-30	60.0	50.0

*Decreases with the logarithm of the frequency.

Test Parameters

Frequency	0.15-30 MHz	Distance	40 cm from wall 80 cm from LISN
Detector(s)	Peak Trace Quasi-Peak, Average Final	Table height	80 cm
RBW	9 kHz	VBW	62 kHz
Notes	Channel has no effect on emission		

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
EE 960088	Analyzer - EMI Receiver	Agilent	N9038A	MY51210148	4/27/2023	4/27/2024	Active Calibration
EE 960089	LISN	COM-POWER	LI-215A	191943	4/10/2023	4/10/2024	Active Calibration
EE 960162	LISN	COM-POWER	LI-215A	191969	4/10/2023	4/10/2024	Active Calibration
LSC-212	Cable	Micro-Coax	UFB311A-0-1440-70U70U	64639 224071-001	1/8/2024	1/8/2025	Active Verification


EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	BTC Tx Channel 37 1DH5
--------------------	-----------------	-------------	------------------------

Measurements

Line	Frequency (MHz)	Quasi Peak Reading (dBμV)	Quasi-Peak Limit (dBμV)	Quasi Peak Margin (dB)	Average Reading (dBμV)	Average Limit (dBμV)	Average Margin (dB)
1	0.155	39.3	65.8	26.5	29.6	55.8	26.2
1	0.512	30.2	56.0	25.8	24.2	46.0	21.8
1	11.760	36.0	60.0	24.0	25.1	50.0	24.9
2	0.150	39.7	66.0	26.3	30.2	56.0	25.8
2	0.517	30.8	56.0	25.2	23.6	46.0	22.4
2	11.860	30.2	60.0	29.8	18.1	50.0	31.9

Plots

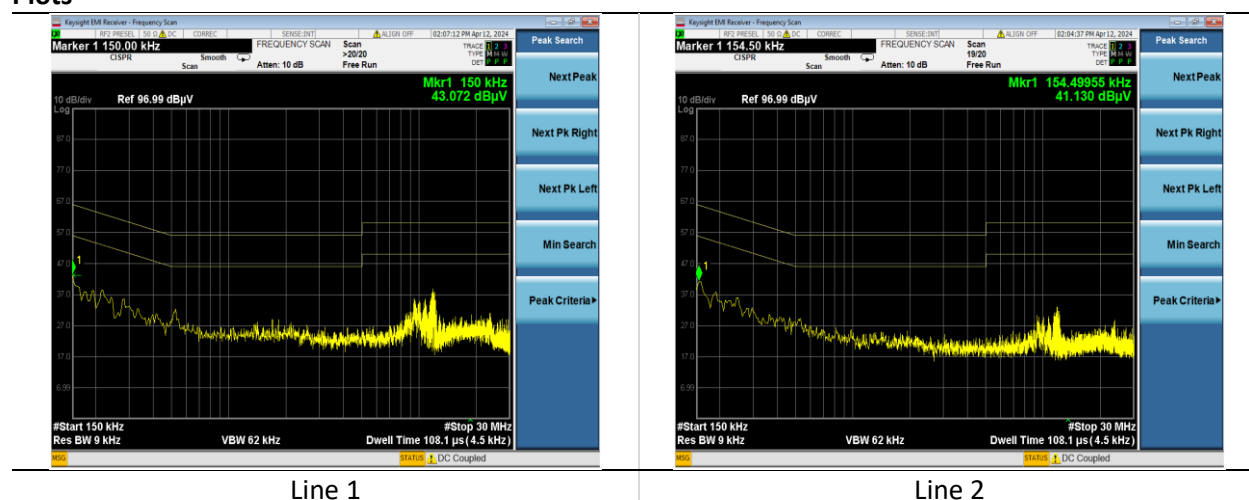

7 REVISION HISTORY

Version	Date	Notes	Person
0	01/22/2025	Initial Draft	Dylan Rosenfeldt
1	02/10/2025	Revised Draft	Dylan Rosenfeldt
2	02/12/2025	Final Draft	Dylan Rosenfeldt
3	03/05/2025	TCB Comment	Adam Alger

END OF REPORT