


EUT	CT1200 (Internal Antenna)	Test Date	2018/6/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE4-CH03_Ant 0+1	Test Voltage	AC 120V/60Hz

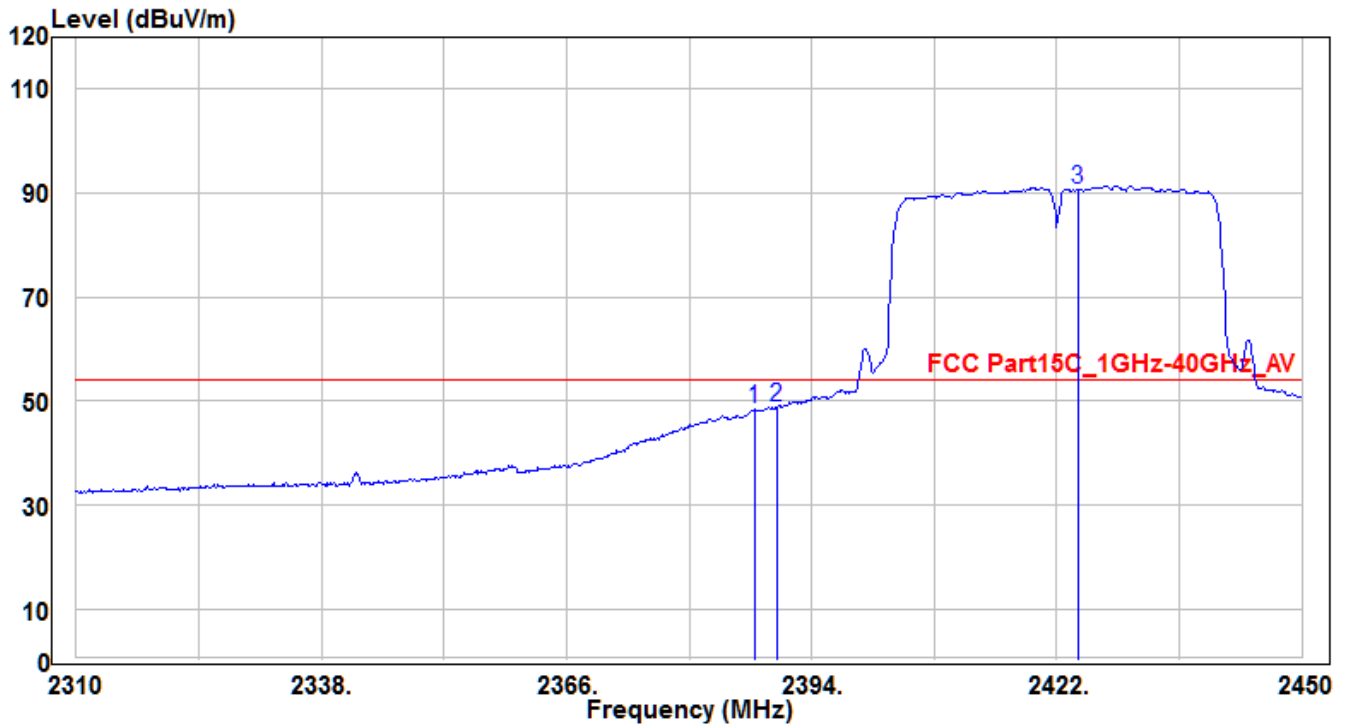


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.42	50.82	-2.38	48.44	-5.56	54	150	200	Average
2	* 2390	51.18	-2.36	48.82	-5.18	54	150	200	Average
3	2424.38	92.87	-2.22	90.65	36.65	54	150	200	Average

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (Internal Antenna)	Test Date	2018/6/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE4-CH09_Ant 0+1	Test Voltage	AC 120V/60Hz

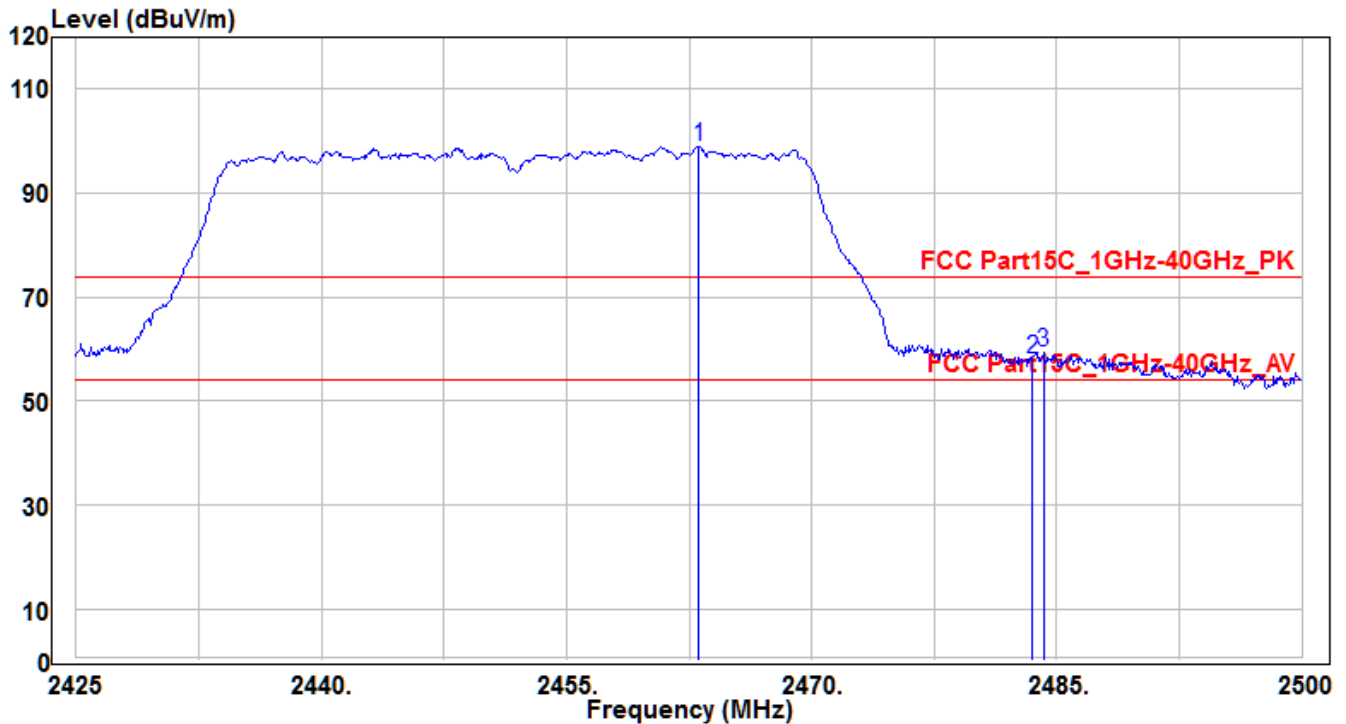


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.1	100.95	-2.06	98.89	24.89	74	105	-30	Peak
2	2483.5	60.04	-1.99	58.05	-15.95	74	105	-30	Peak
3	* 2484.175	61.4	-1.99	59.41	-14.59	74	105	-30	Peak

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (Internal Antenna)	Test Date	2018/6/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE4-CH09_Ant 0+1	Test Voltage	AC 120V/60Hz

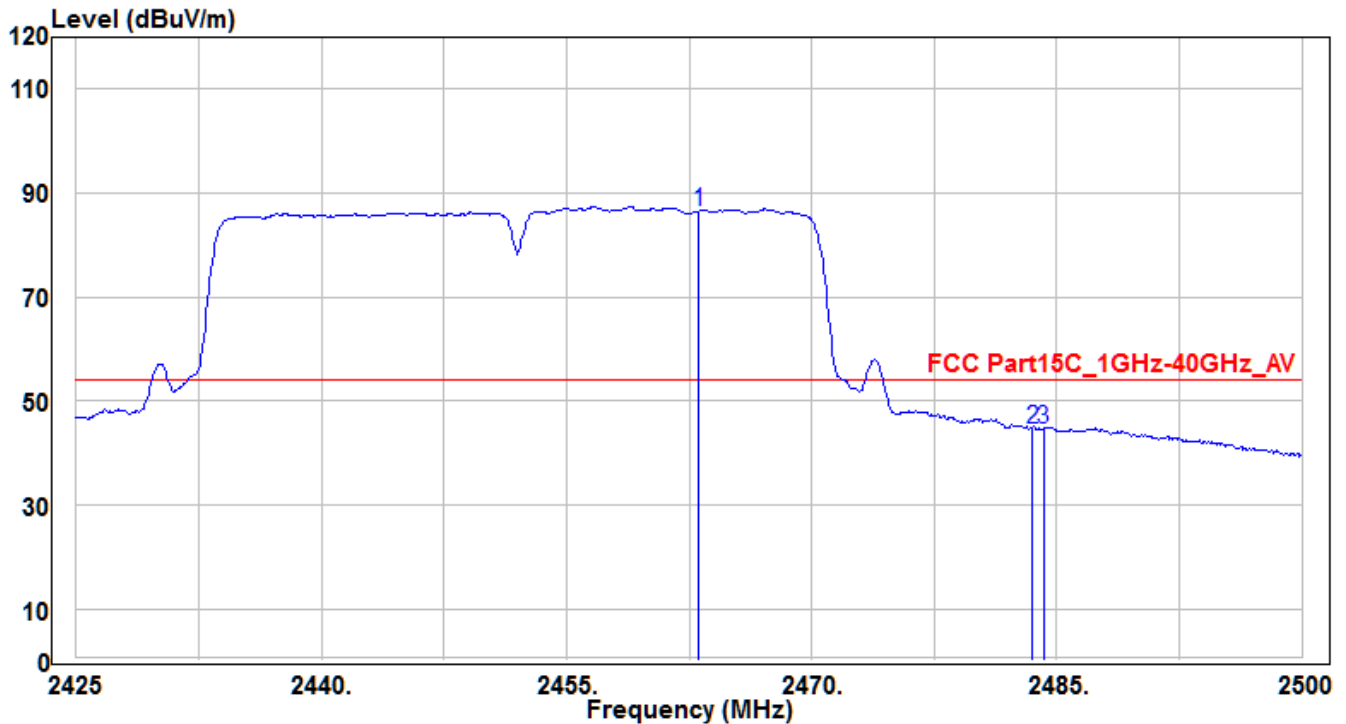


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.1	88.6	-2.06	86.54	32.54	54	105	-30	Average
2	2483.5	46.61	-1.99	44.62	-9.38	54	105	-30	Average
3	* 2484.175	46.66	-1.99	44.67	-9.33	54	105	-30	Average

Note: The EUT Power by Notebook PC

1. " * " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (Internal Antenna)	Test Date	2018/6/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE4-CH09_Ant 0+1	Test Voltage	AC 120V/60Hz

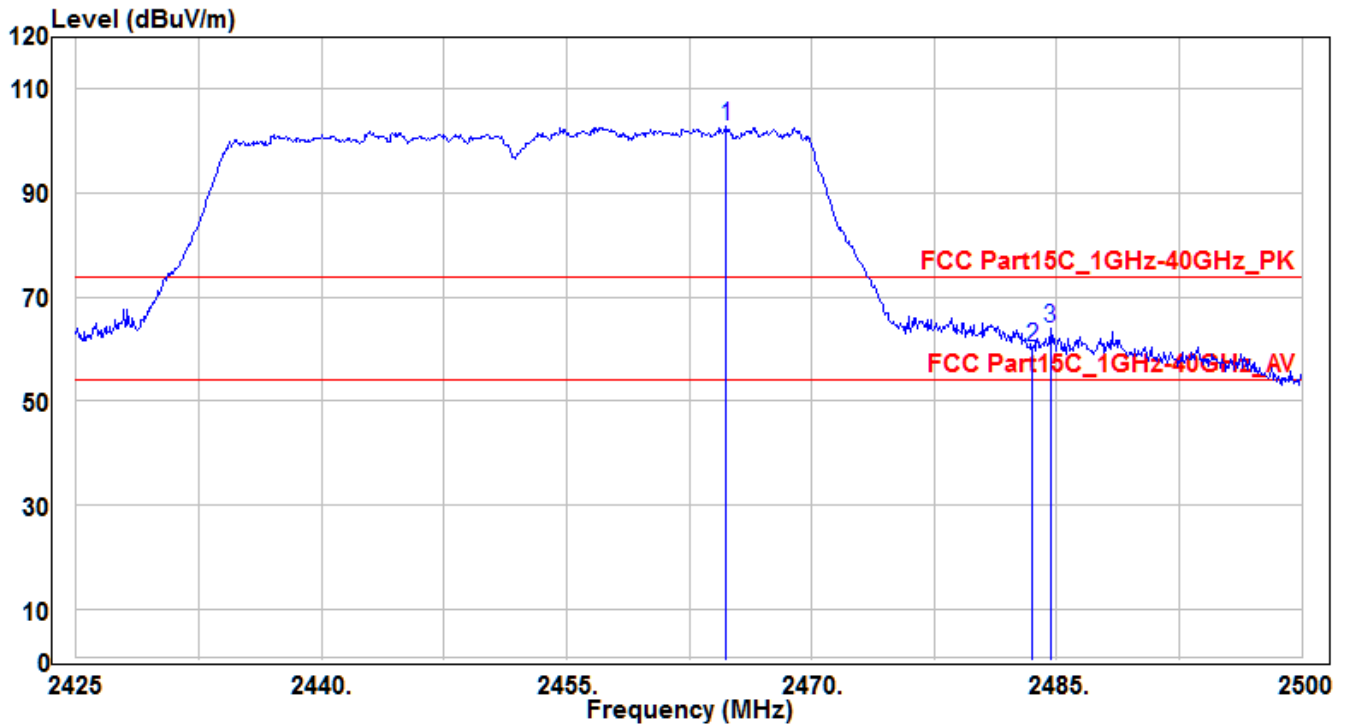


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.75	104.79	-2.06	102.73	28.73	74	150	225	Peak
2	2483.5	62.3	-1.99	60.31	-13.69	74	150	225	Peak
3	* 2484.625	66.1	-1.99	64.11	-9.89	74	150	225	Peak

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (Internal Antenna)	Test Date	2018/6/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE4-CH09_Ant 0+1	Test Voltage	AC 120V/60Hz

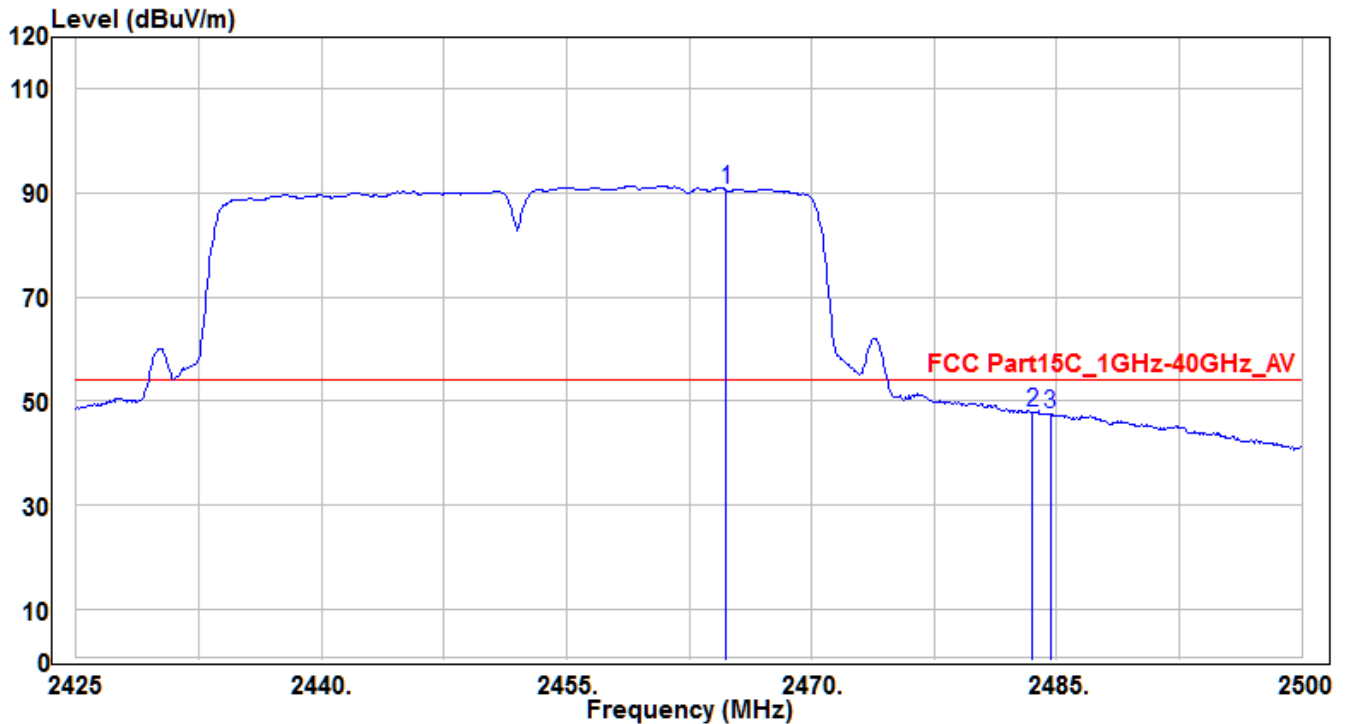


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.75	92.64	-2.06	90.58	36.58	54	150	225	Average
2	*	2483.5	-1.99	47.78	-6.22	54	150	225	Average
3		2484.625	-1.99	47.54	-6.46	54	150	225	Average

Note: The EUT Power by Notebook PC

- " * " means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE5-CH01_Ant 0	Test Voltage	AC 120V/60Hz

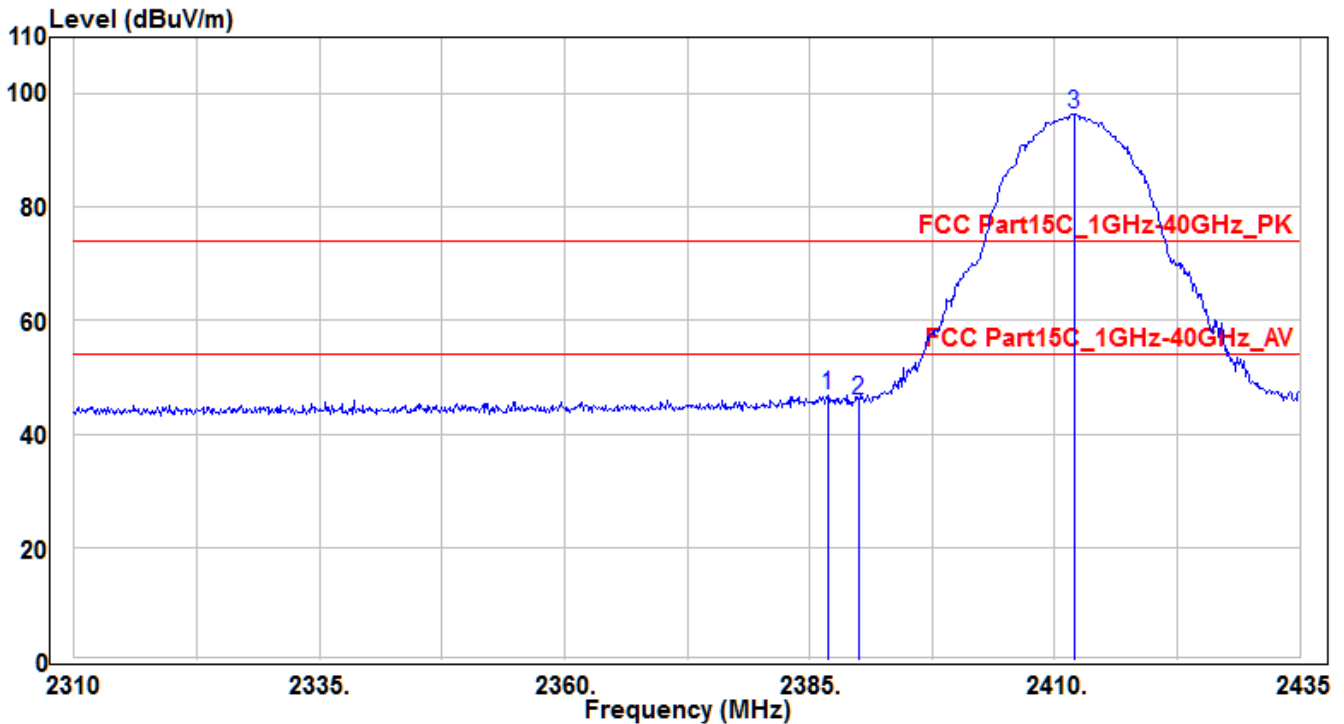


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.875	49.17	-2.38	46.79	-27.21	74	105	335	Peak
2		2390	48.26	-2.36	45.9	-28.1	74	105	335	Peak
3		2412	98.77	-2.27	96.5	22.5	74	105	335	Peak

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE5-CH01_Ant 0	Test Voltage	AC 120V/60Hz

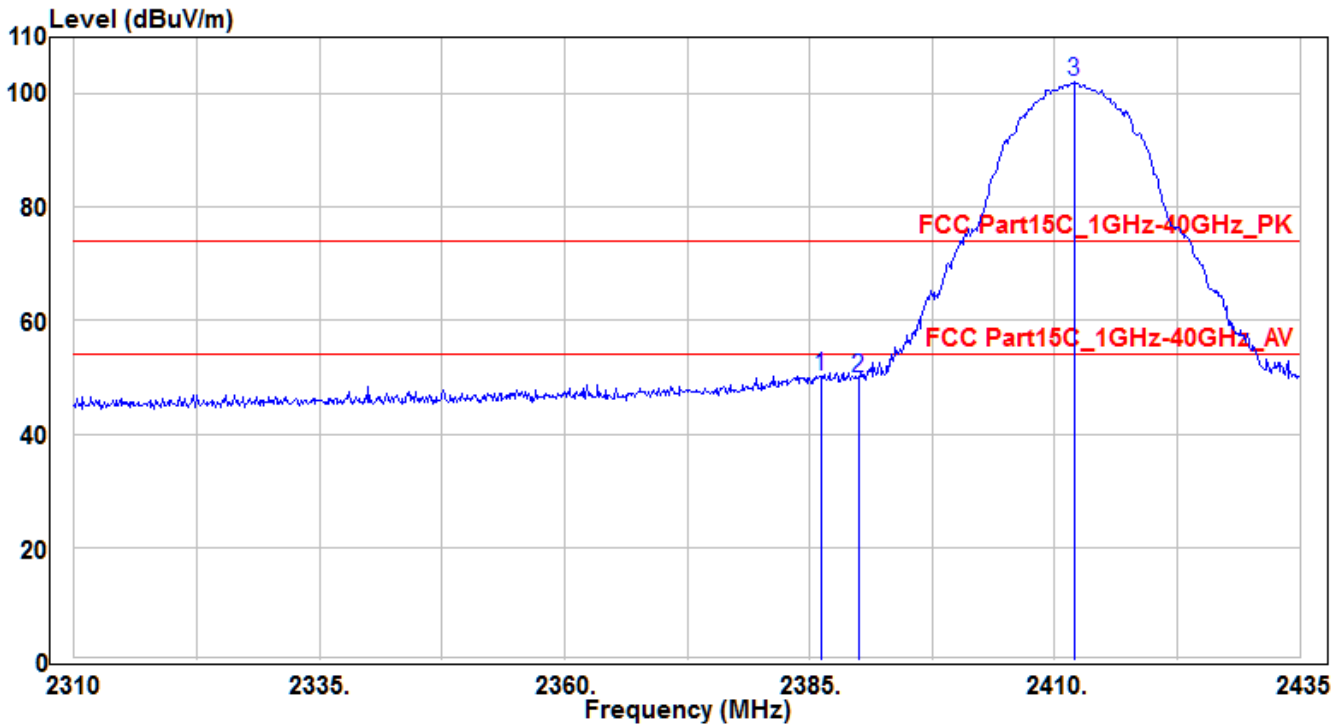


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.125	52.66	-2.38	50.28	-23.72	74	100	275	Peak
2		2390	52.33	-2.36	49.97	-24.03	74	100	275	Peak
3		2412	104.29	-2.27	102.02	28.02	74	100	275	Peak

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE5-CH11_Ant 0	Test Voltage	AC 120V/60Hz

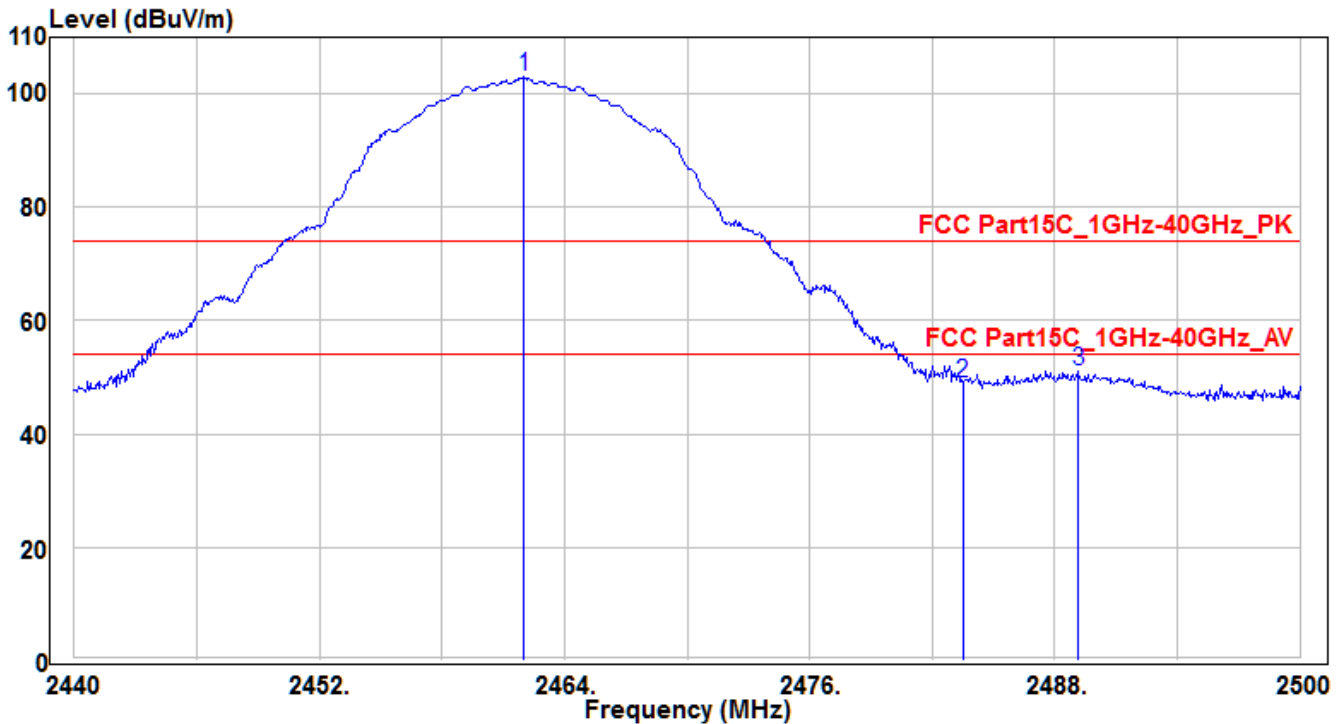


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.02	105.04	-2.07	102.97	28.97	74	180	355	Peak
2	2483.5	50.94	-1.99	48.95	-25.05	74	180	355	Peak
3	* 2489.14	52.99	-1.96	51.03	-22.97	74	180	355	Peak

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE5-CH11_Ant 0	Test Voltage	AC 120V/60Hz

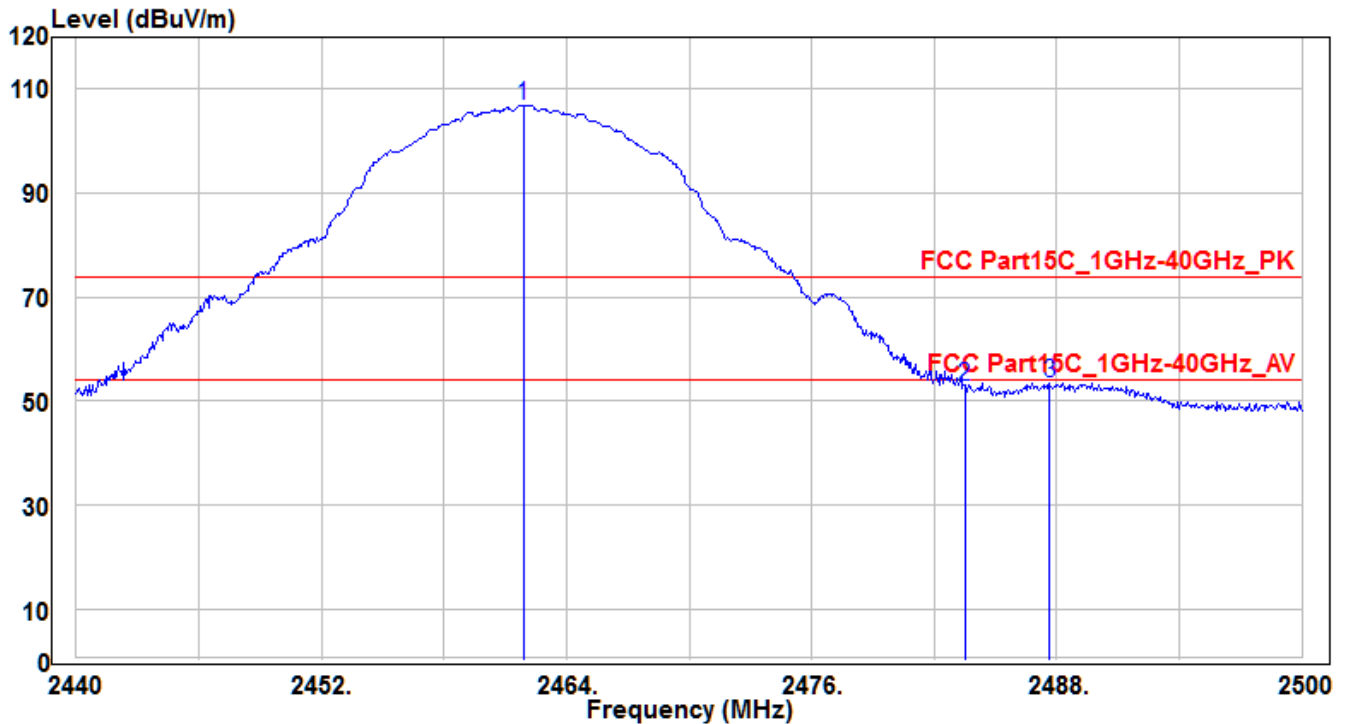


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.9	109.03	-2.07	106.96	32.96	74	190	25	Peak
2	2483.5	54.59	-1.99	52.6	-21.4	74	190	25	Peak
3	* 2487.64	55.4	-1.97	53.43	-20.57	74	190	25	Peak

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE5-CH11_Ant 0	Test Voltage	AC 120V/60Hz

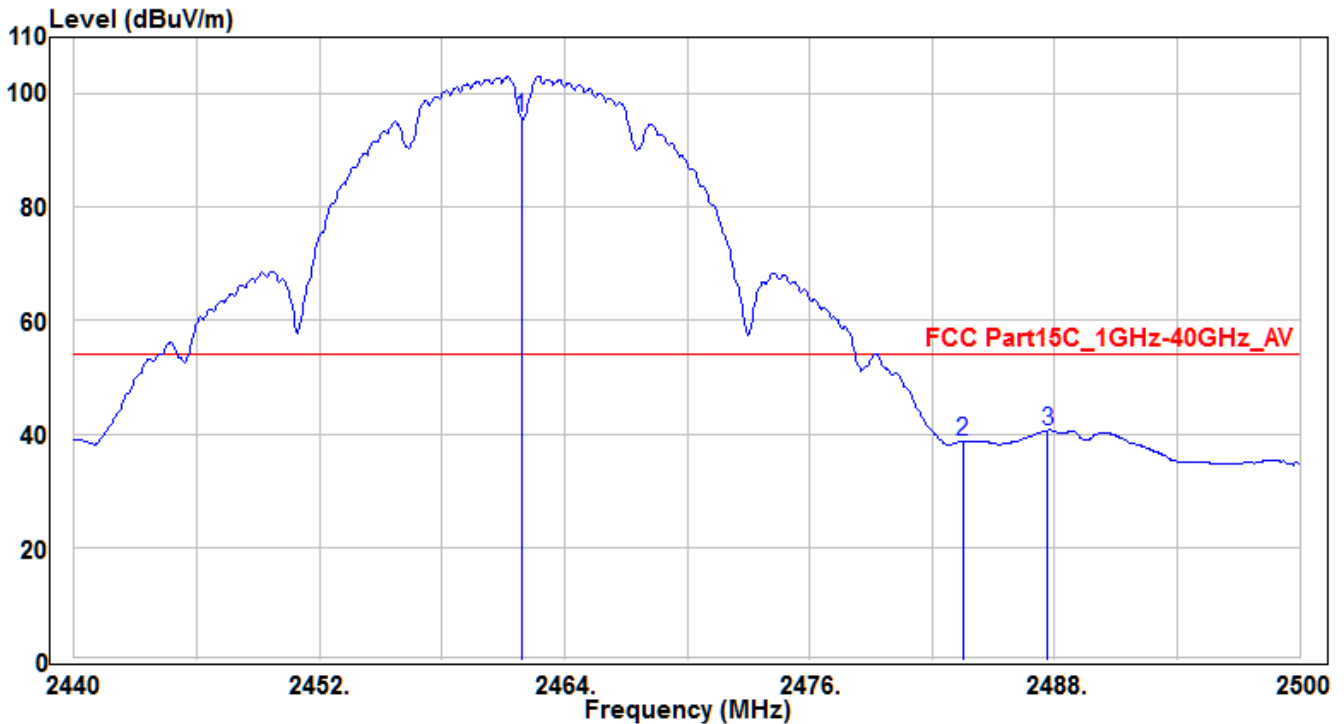


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.9	97.94	-2.07	95.87	41.87	54	190	25	Average
2	2483.5	40.64	-1.99	38.65	-15.35	54	190	25	Average
3	* 2487.64	42.63	-1.97	40.66	-13.34	54	190	25	Average

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE6-CH01_Ant 0	Test Voltage	AC 120V/60Hz

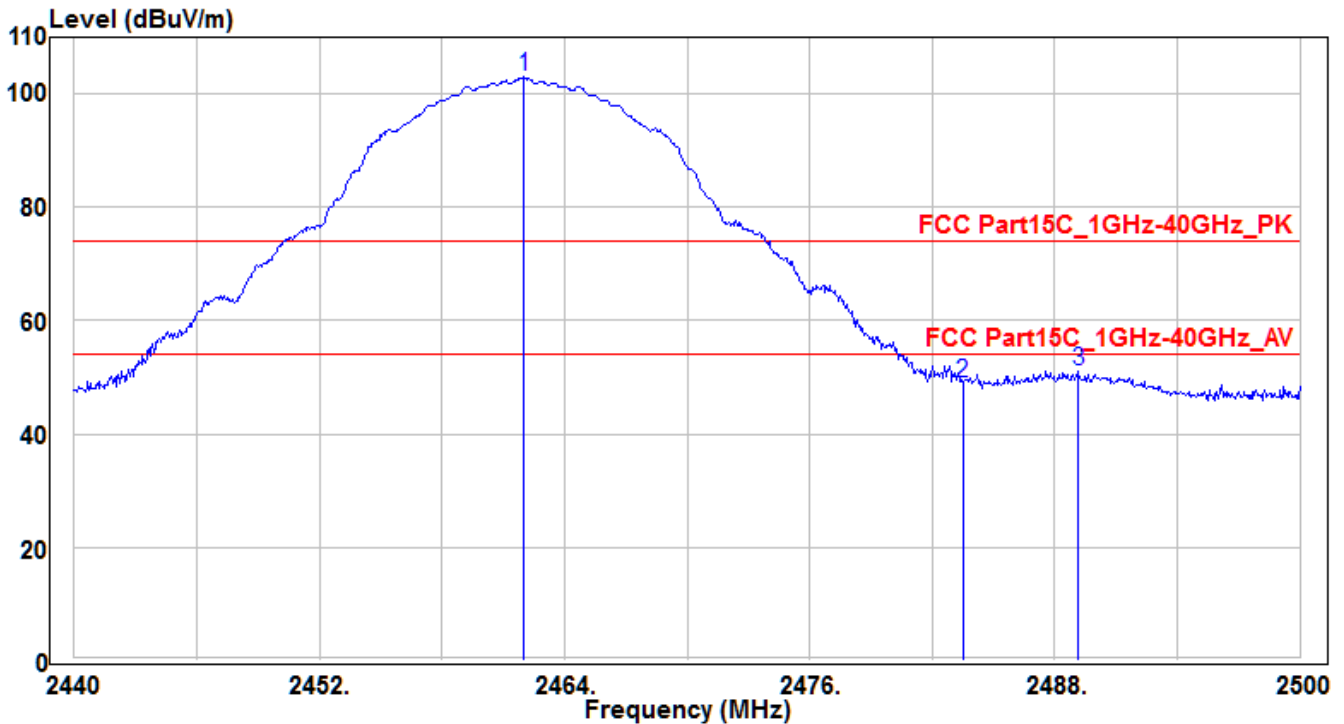


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.02	105.04	-2.07	102.97	28.97	74	180	355	Peak
2	2483.5	50.94	-1.99	48.95	-25.05	74	180	355	Peak
3	* 2489.14	52.99	-1.96	51.03	-22.97	74	180	355	Peak

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE6-CH01_Ant 0	Test Voltage	AC 120V/60Hz

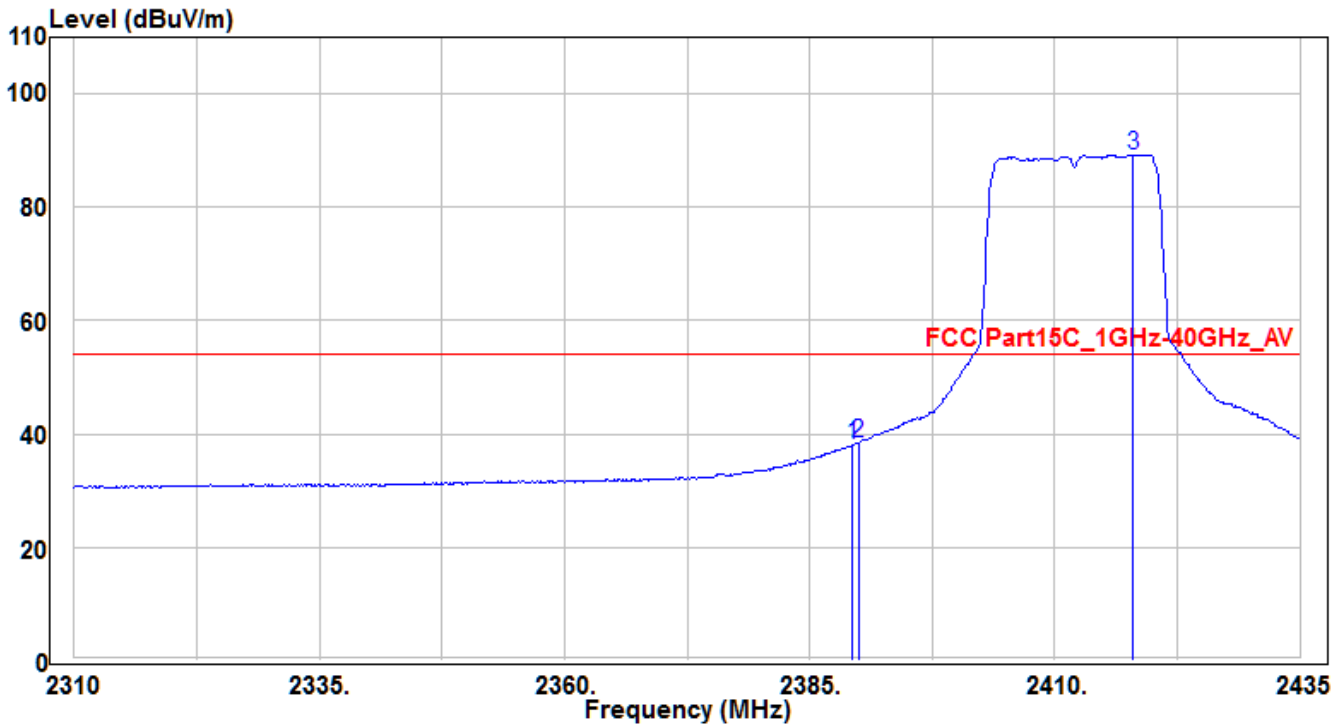


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.375	40.52	-2.36	38.16	-15.84	54	165	350	Average
2	* 2390	40.86	-2.36	38.5	-15.5	54	165	350	Average
3	2418	91.34	-2.25	89.09	35.09	54	165	350	Average

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE6-CH01_Ant 0	Test Voltage	AC 120V/60Hz

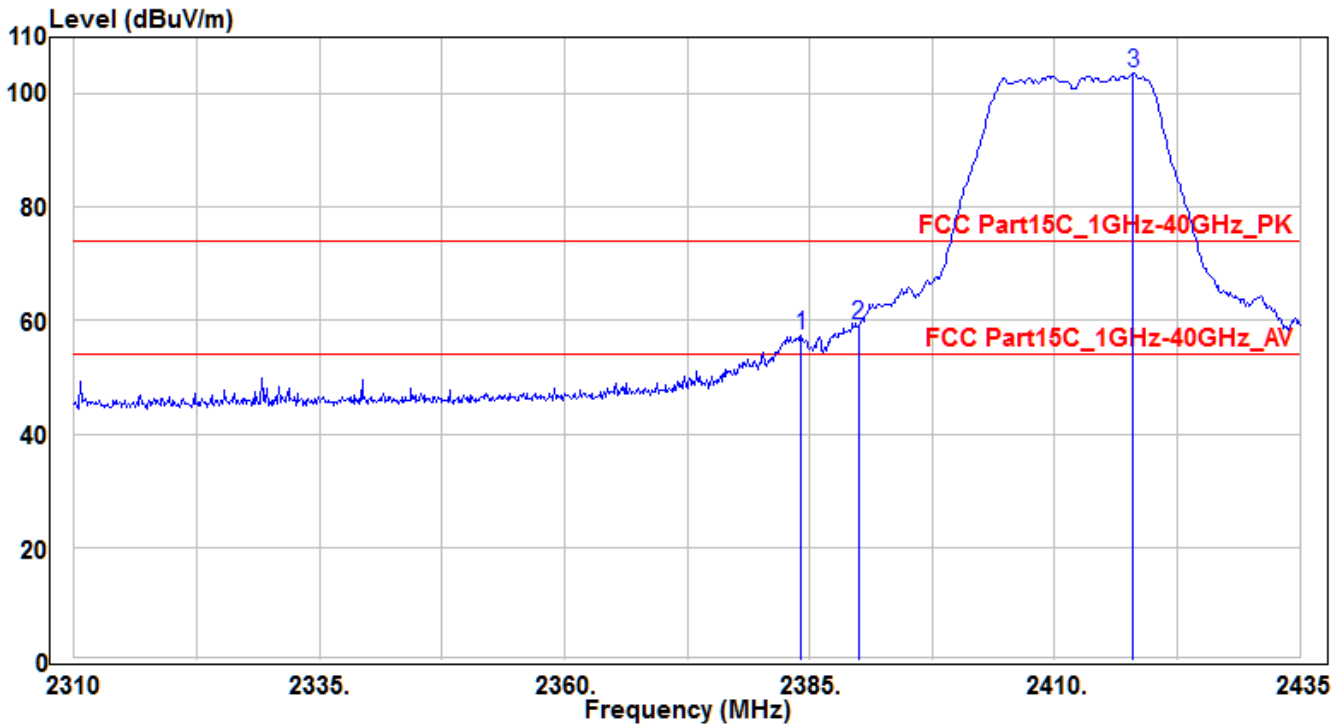


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.125	59.78	-2.39	57.39	-16.61	74	155	275	Peak
2	* 2390	61.55	-2.36	59.19	-14.81	74	155	275	Peak
3	2418	106.04	-2.25	103.79	29.79	74	155	275	Peak

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE6-CH01_Ant 0	Test Voltage	AC 120V/60Hz

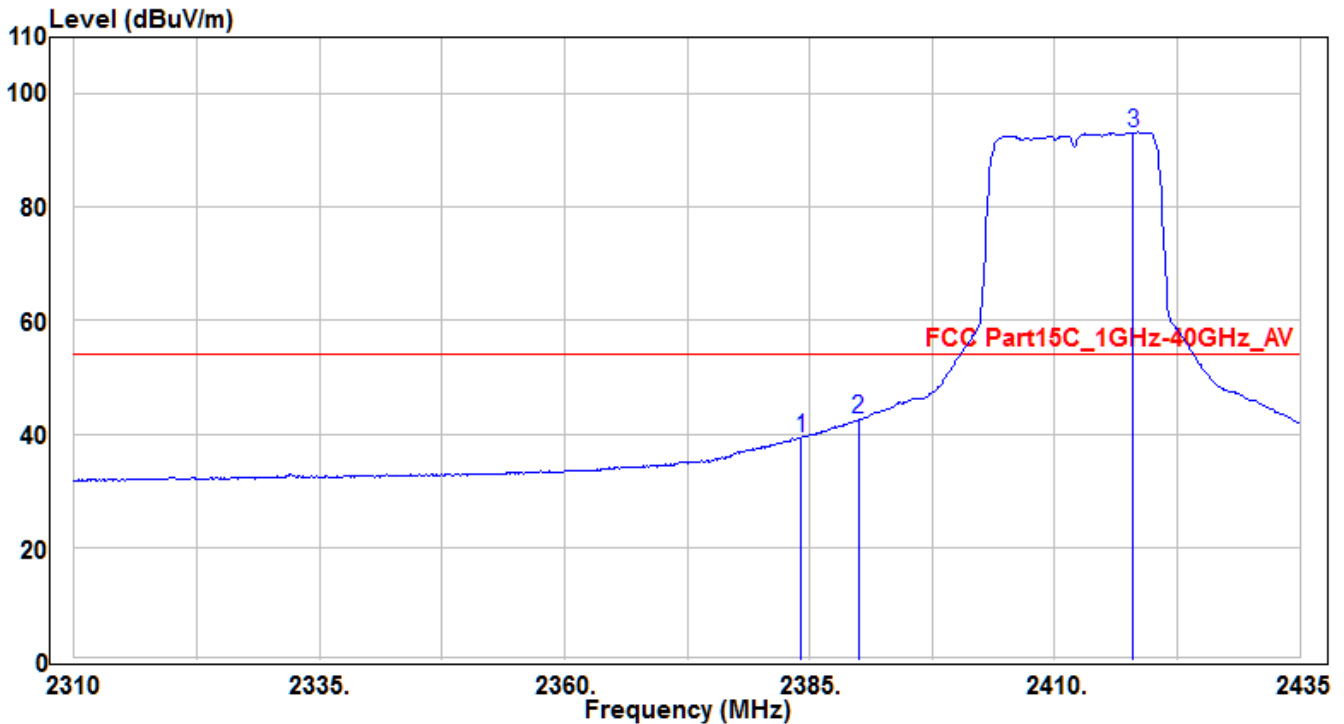


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.125	41.8	-2.39	39.41	-14.59	54	155	275	Average
2	* 2390	44.87	-2.36	42.51	-11.49	54	155	275	Average
3	2418	95.35	-2.25	93.1	39.1	54	155	275	Average

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE6-CH11_Ant 0	Test Voltage	AC 120V/60Hz

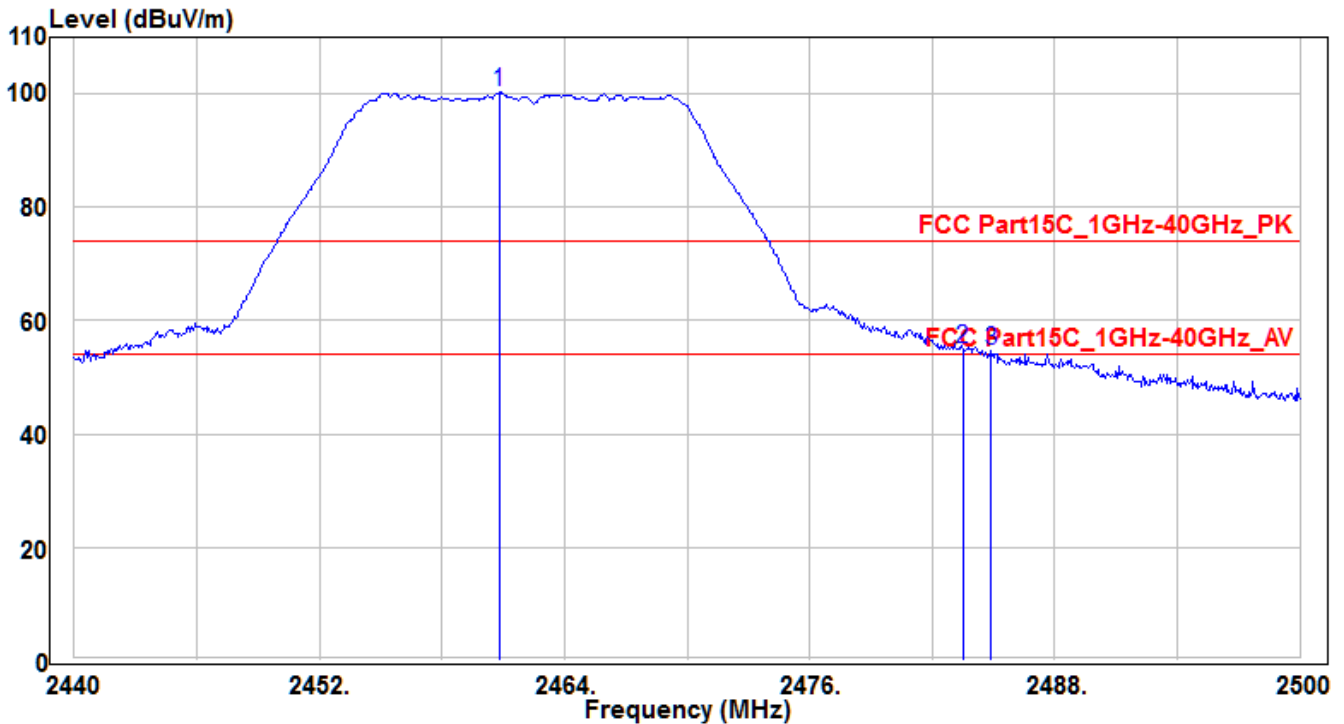


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.82	102.33	-2.08	100.25	26.25	74	155	-5	Peak
2	* 2483.5	57.15	-1.99	55.16	-18.84	74	155	-5	Peak
3	2484.88	56.79	-1.99	54.8	-19.2	74	155	-5	Peak

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE6-CH11_Ant 0	Test Voltage	AC 120V/60Hz

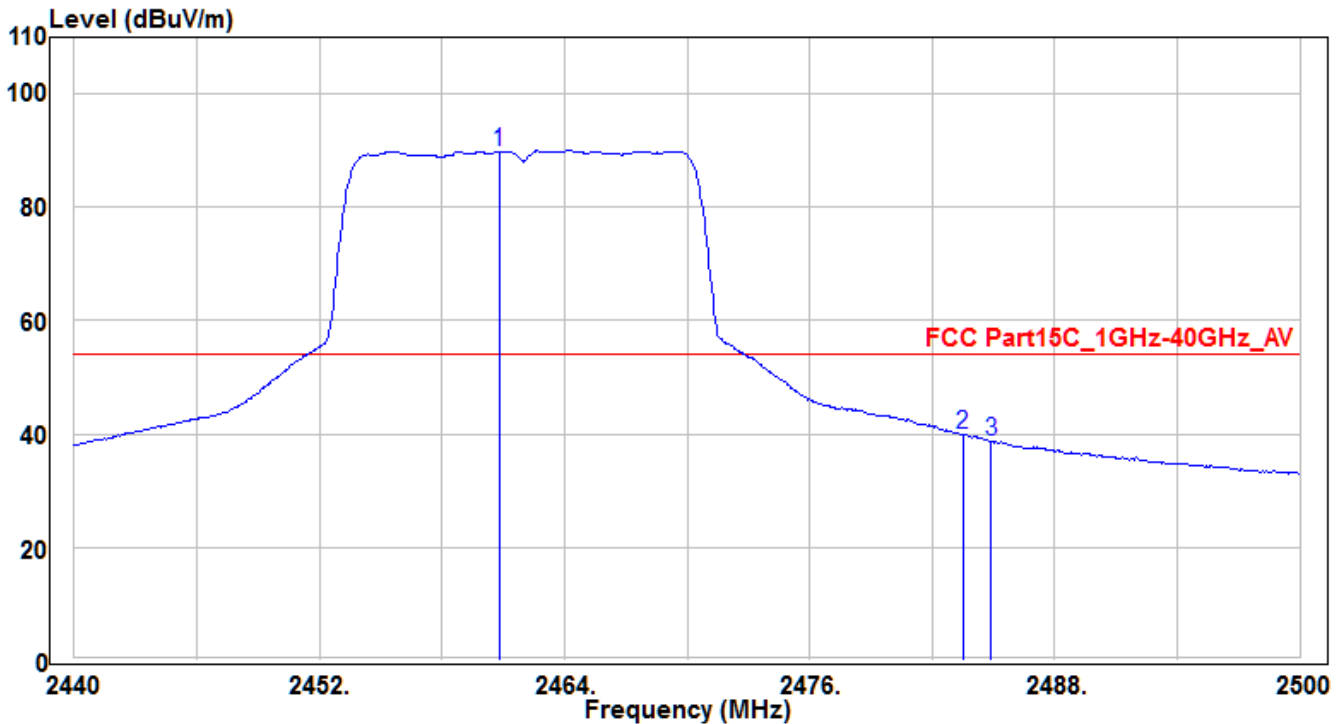


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.82	91.84	-2.08	89.76	35.76	54	155	-5	Average
2	* 2483.5	42	-1.99	40.01	-13.99	54	155	-5	Average
3	2484.88	40.79	-1.99	38.8	-15.2	54	155	-5	Average

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE6-CH11_Ant 0	Test Voltage	AC 120V/60Hz

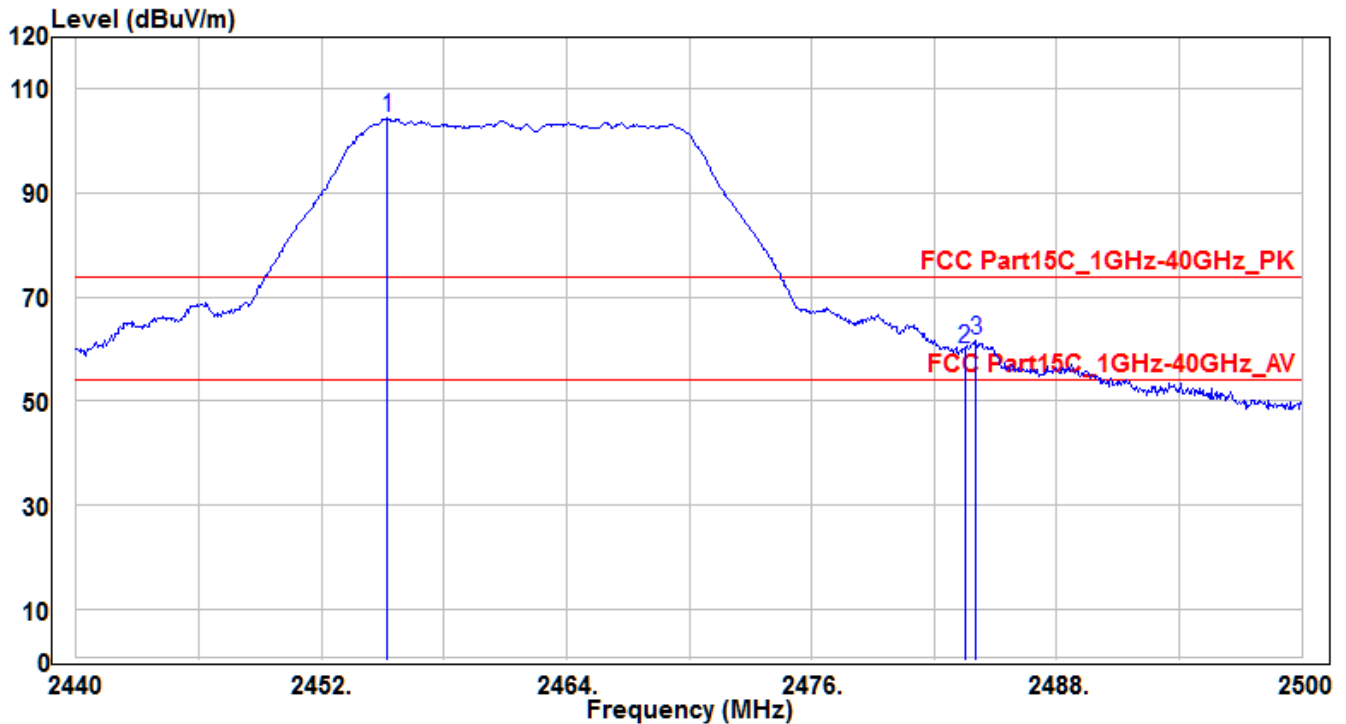


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.24	106.46	-2.09	104.37	30.37	74	165	390	Peak
2	2483.5	62.02	-1.99	60.03	-13.97	74	165	390	Peak
3	* 2484.04	63.58	-1.99	61.59	-12.41	74	165	390	Peak

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE6-CH11_Ant 0	Test Voltage	AC 120V/60Hz

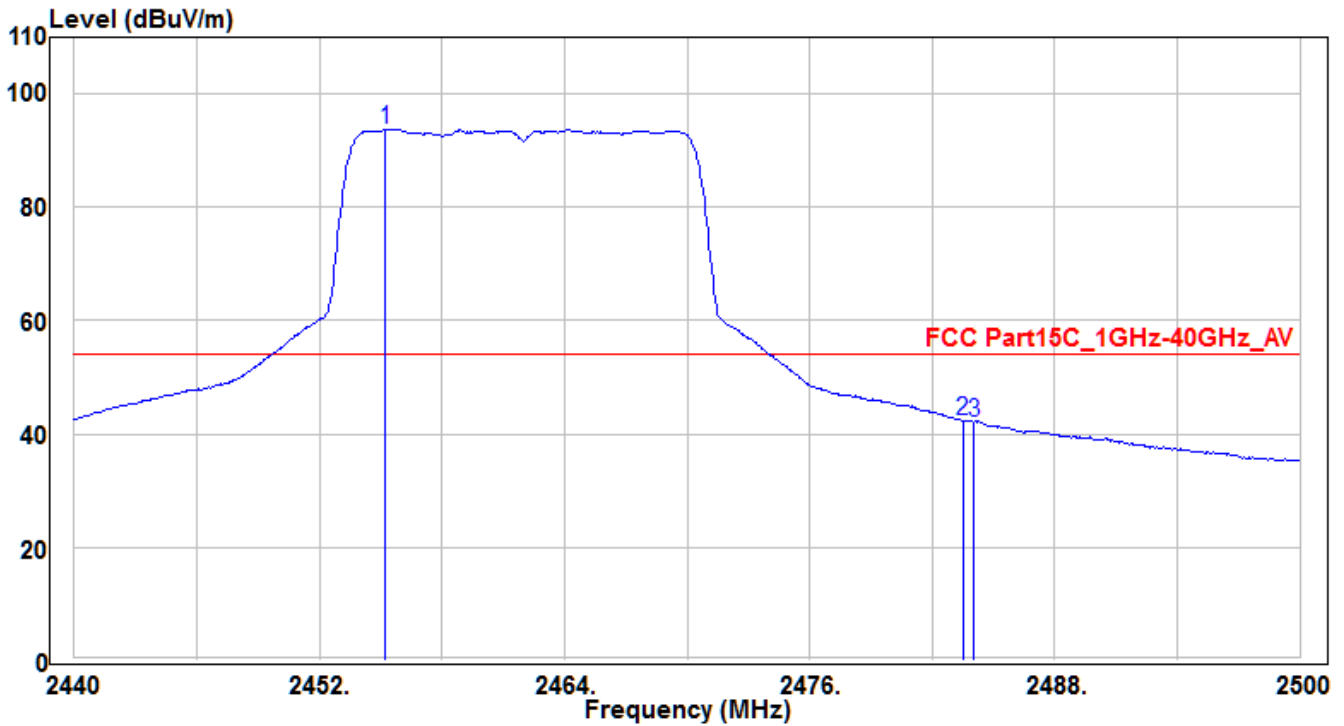


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.24	95.76	-2.09	93.67	39.67	54	165	390	Average
2	* 2483.5	44.43	-1.99	42.44	-11.56	54	165	390	Average
3	2484.04	44.13	-1.99	42.14	-11.86	54	165	390	Average

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE7-CH01_Ant 0+1	Test Voltage	AC 120V/60Hz

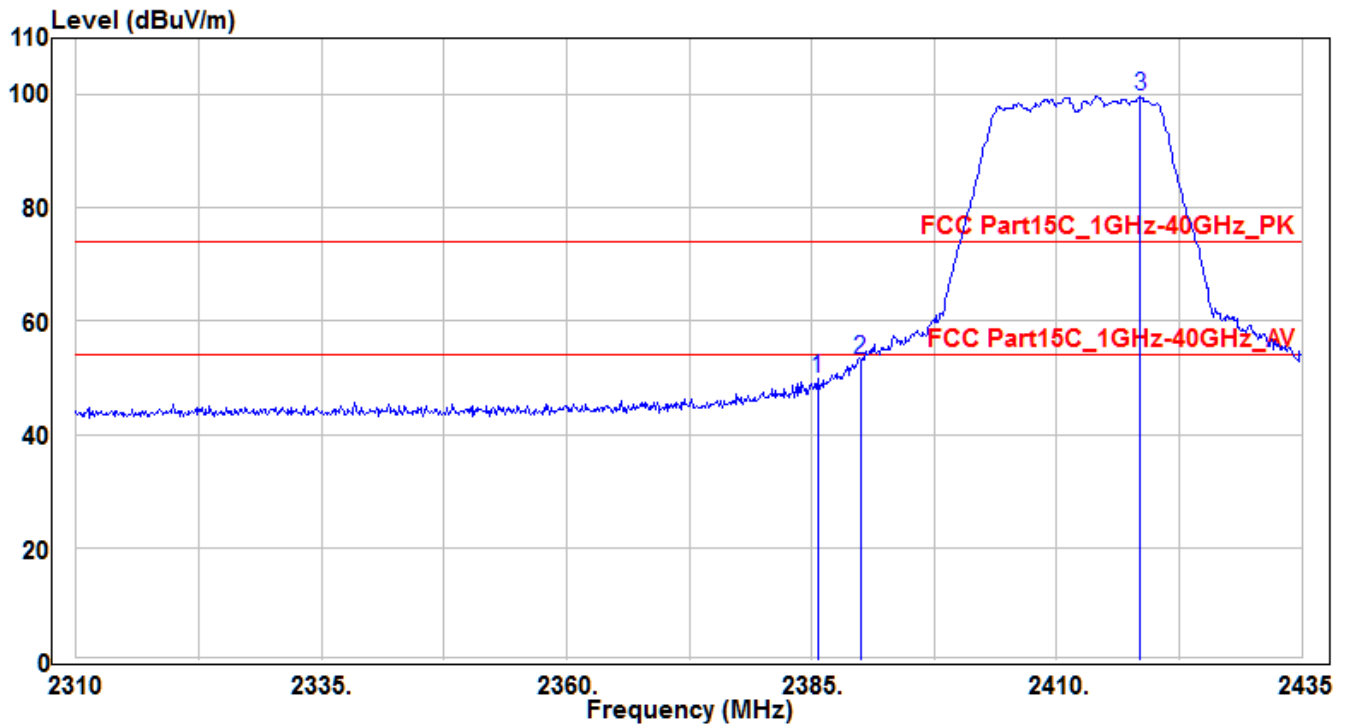


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.625	52.32	-2.38	49.94	-24.06	74	190	355	Peak
2	*	2390	55.48	-2.36	53.12	-20.88	74	190	355	Peak
3		2418.5	101.86	-2.24	99.62	25.62	74	190	355	Peak

Note: The EUT Power by Notebook PC

1. " * " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE7-CH01_Ant 0+1	Test Voltage	AC 120V/60Hz

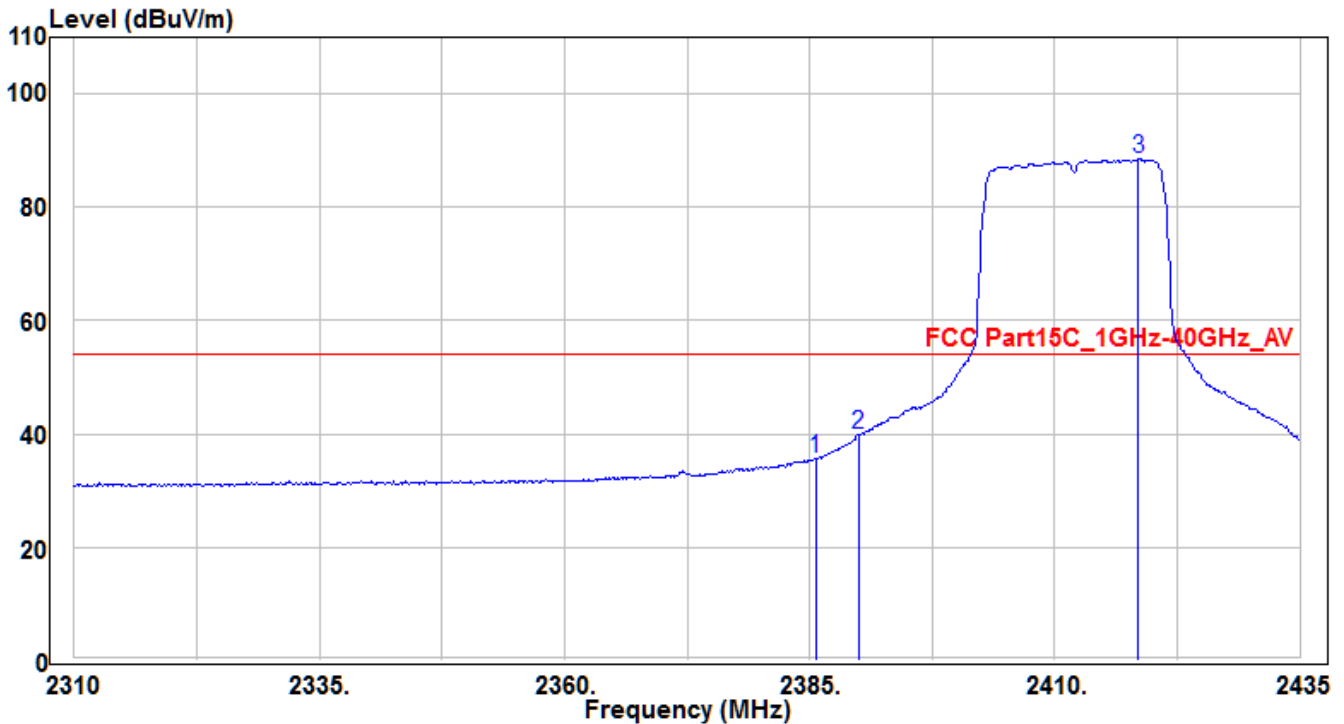


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.625	38.2	-2.38	35.82	-18.18	54	190	355	Average
2	*	42.3	-2.36	39.94	-14.06	54	190	355	Average
3	2418.5	90.66	-2.24	88.42	34.42	54	190	355	Average

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE7-CH01_Ant 0+1	Test Voltage	AC 120V/60Hz

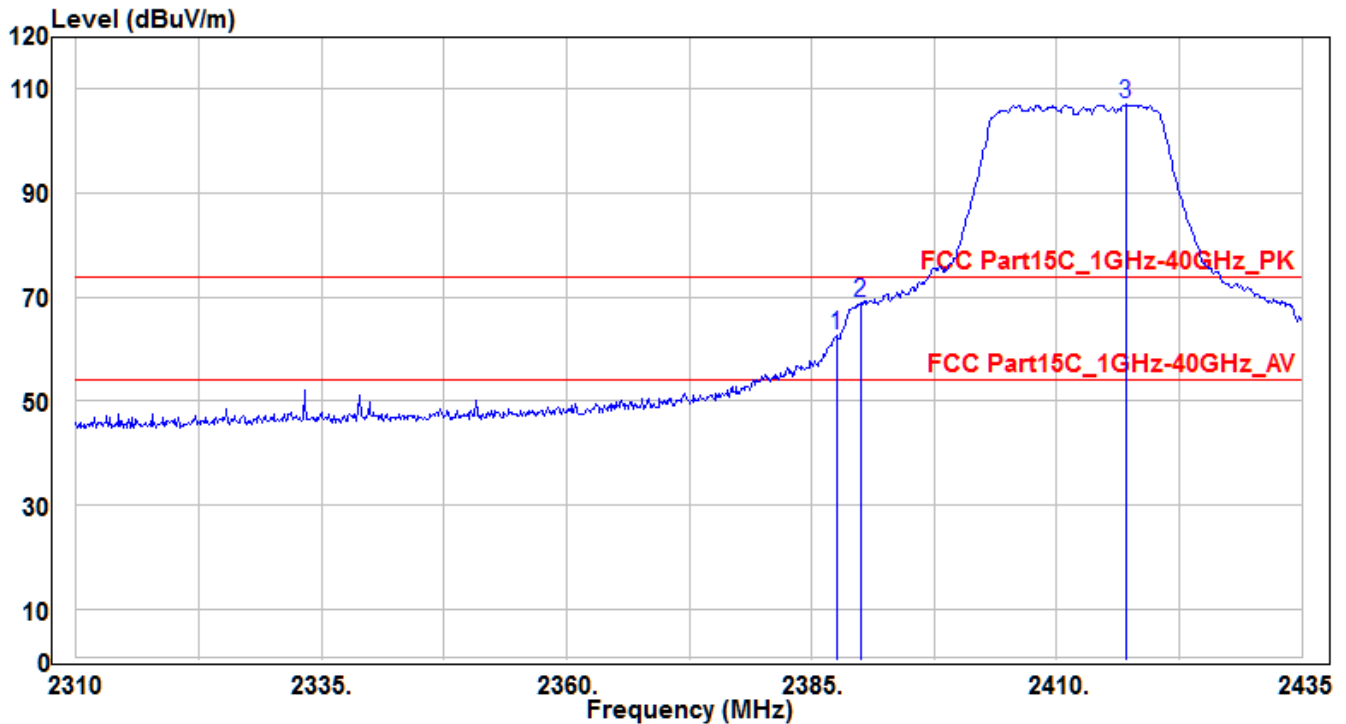


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.5	64.86	-2.37	62.49	-11.51	74	140	160	Peak
2	* 2390	71.26	-2.36	68.9	-5.1	74	140	160	Peak
3	2417	109.35	-2.25	107.1	33.1	74	140	160	Peak

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE7-CH01_Ant 0+1	Test Voltage	AC 120V/60Hz

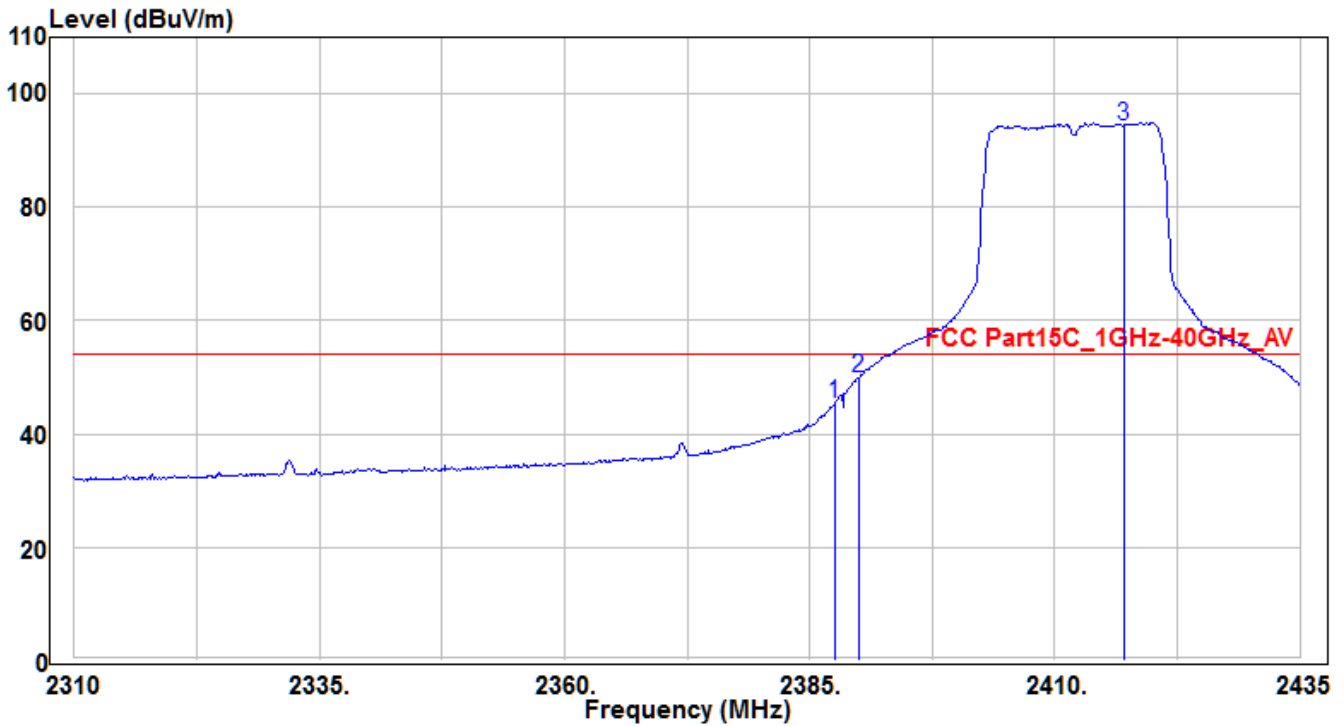


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.5	47.6	-2.37	45.23	-8.77	54	140	160	Average
2	* 2390	52.2	-2.36	49.84	-4.16	54	140	160	Average
3	2417	96.54	-2.25	94.29	40.29	54	140	160	Average

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE7-CH11_Ant 0+1	Test Voltage	AC 120V/60Hz

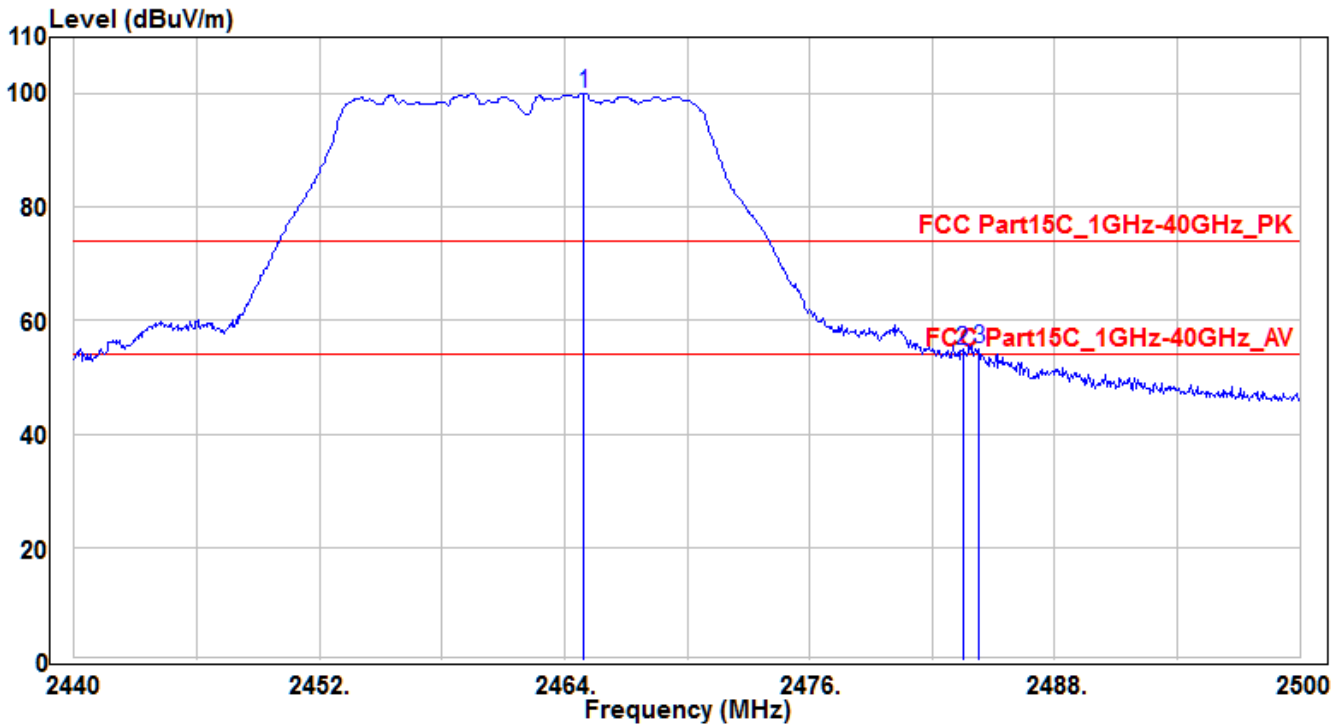


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.96	102.21	-2.06	100.15	26.15	74	155	-5	Peak
2	2483.5	56.81	-1.99	54.82	-19.18	74	155	-5	Peak
3	* 2484.28	57.14	-1.99	55.15	-18.85	74	155	-5	Peak

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE7-CH11_Ant 0+1	Test Voltage	AC 120V/60Hz

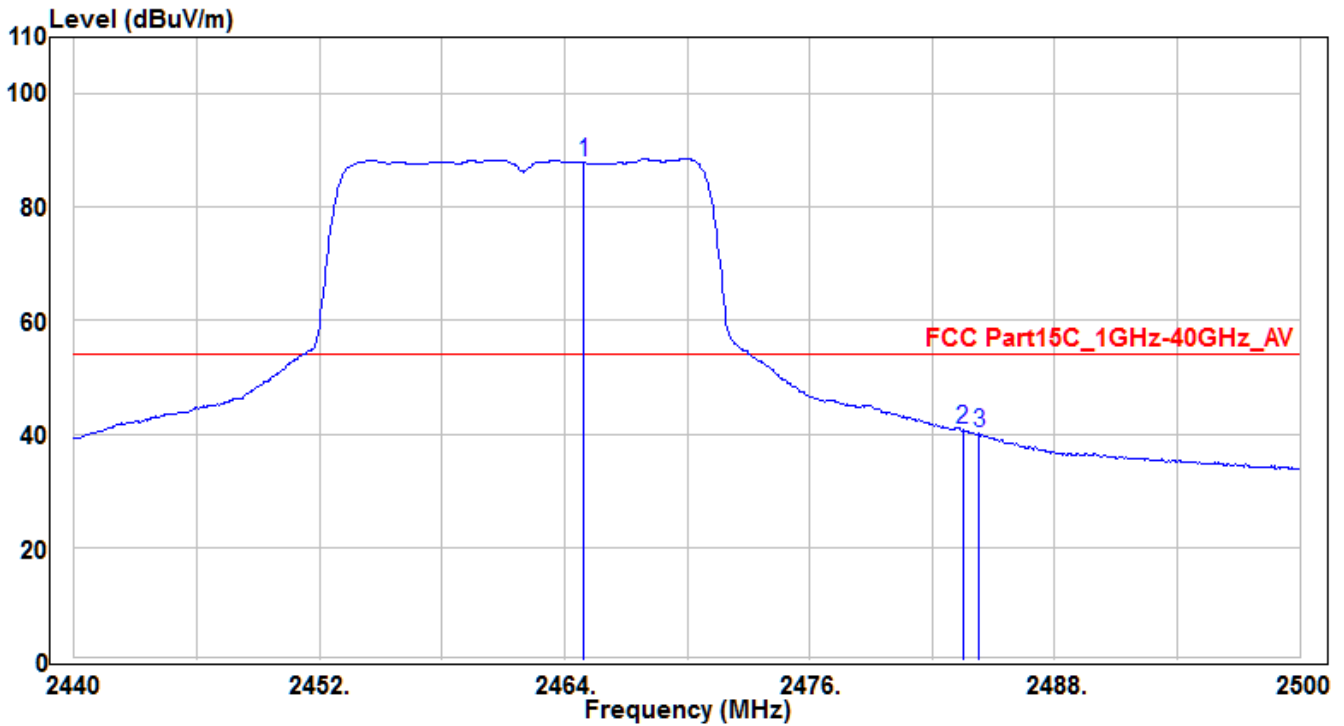


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.96	89.91	-2.06	87.85	33.85	54	155	-5	Average
2	* 2483.5	42.7	-1.99	40.71	-13.29	54	155	-5	Average
3	2484.28	42.06	-1.99	40.07	-13.93	54	155	-5	Average

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE7-CH11_Ant 0+1	Test Voltage	AC 120V/60Hz

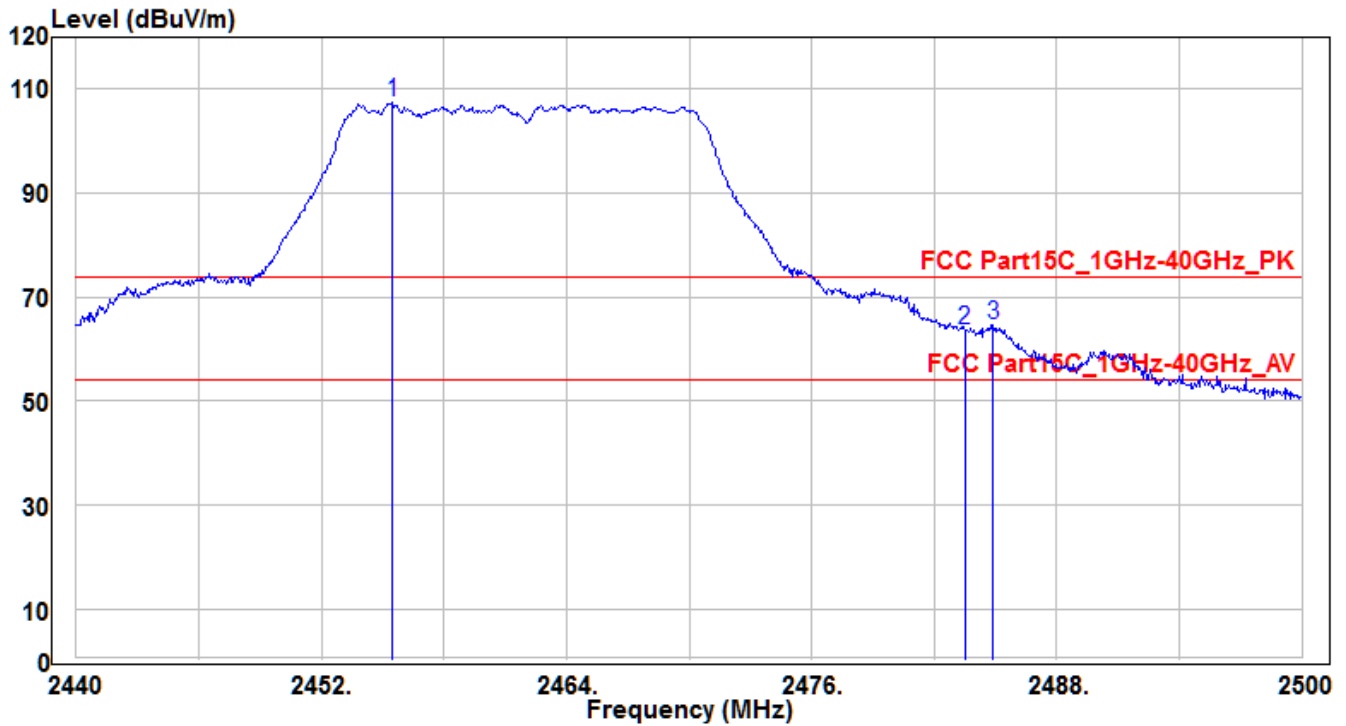


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.48	109.69	-2.09	107.6	33.6	74	150	45	Peak
2	2483.5	65.74	-1.99	63.75	-10.25	74	150	45	Peak
3	* 2484.88	66.59	-1.99	64.6	-9.4	74	150	45	Peak

Note: The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data .
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) .

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE7-CH11_Ant 0+1	Test Voltage	AC 120V/60Hz

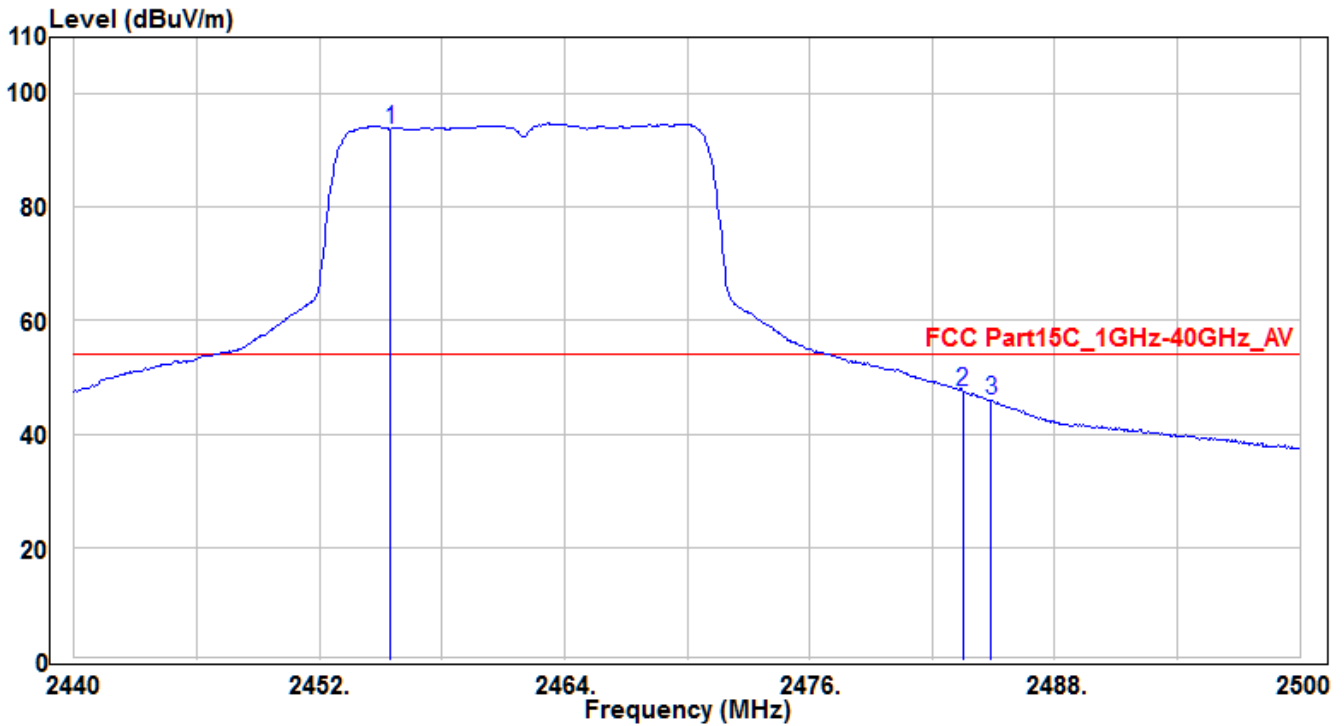


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.48	95.91	-2.09	93.82	39.82	54	150	45	Average
2	* 2483.5	49.41	-1.99	47.42	-6.58	54	150	45	Average
3	2484.88	47.82	-1.99	45.83	-8.17	54	150	45	Average

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE8-CH03_Ant 0+1	Test Voltage	AC 120V/60Hz

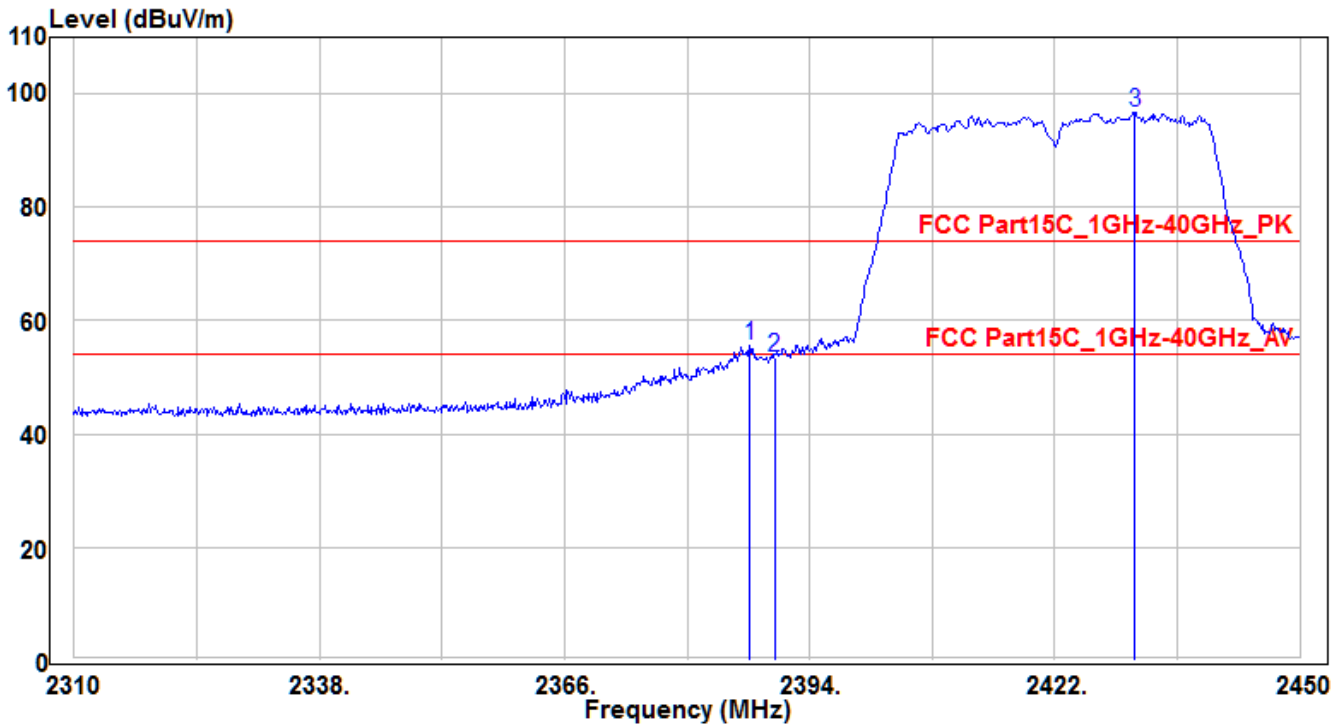


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.14	58.02	-2.38	55.64	-18.36	74	160	355	Peak
2		2390	55.77	-2.36	53.41	-20.59	74	160	355	Peak
3		2431.1	99.01	-2.2	96.81	22.81	74	160	355	Peak

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE8-CH03_Ant 0+1	Test Voltage	AC 120V/60Hz

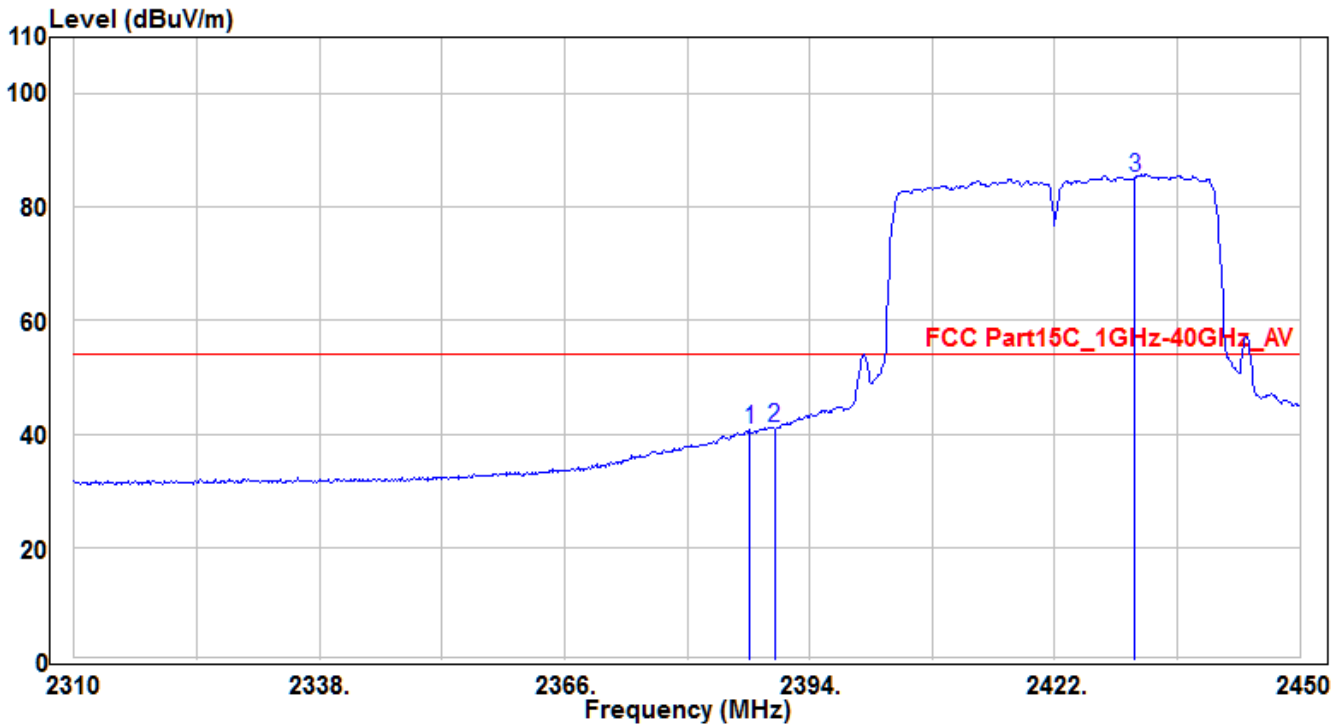


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.14	43.16	-2.38	40.78	-13.22	54	160	355	Average
2	* 2390	43.49	-2.36	41.13	-12.87	54	160	355	Average
3	2431.1	87.29	-2.2	85.09	31.09	54	160	355	Average

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE8-CH03_Ant 0+1	Test Voltage	AC 120V/60Hz

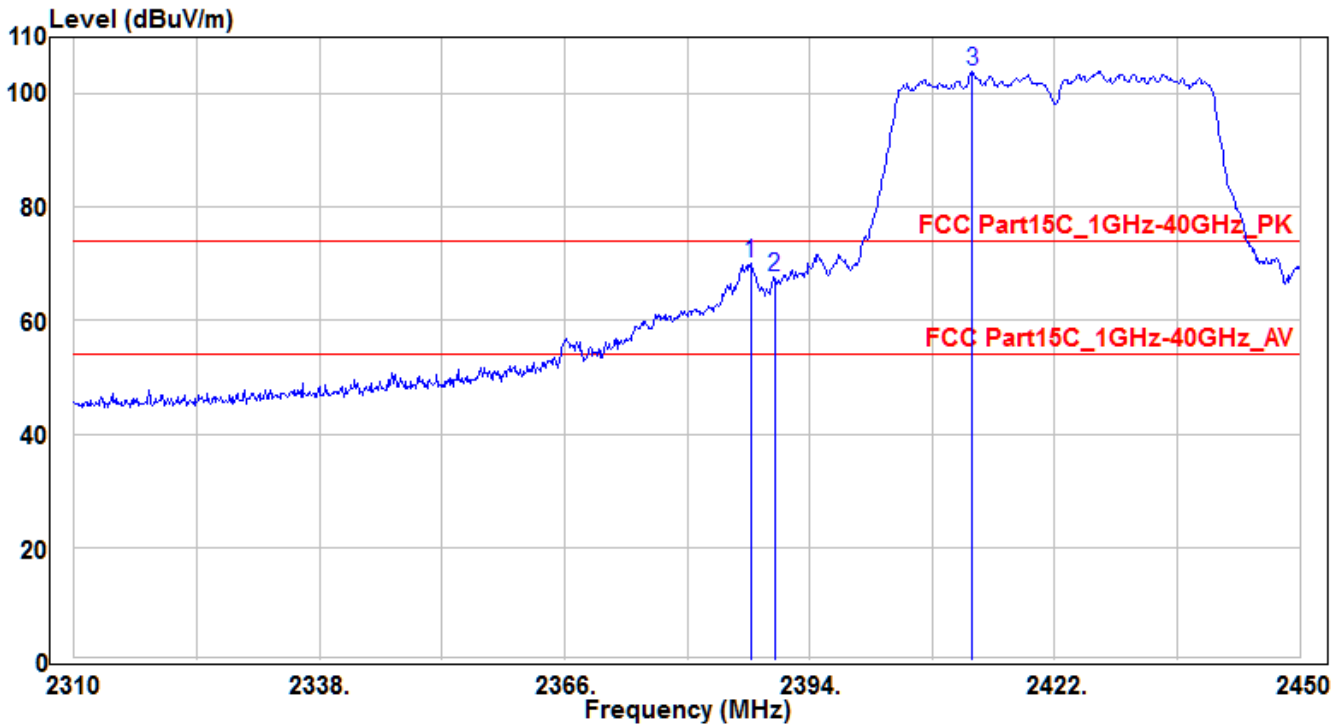


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.28	72.4	-2.38	70.02	-3.98	74	150	25	Peak
2		2390	69.92	-2.36	67.56	-6.44	74	150	25	Peak
3		2412.62	106.25	-2.26	103.99	29.99	74	150	25	Peak

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE8-CH03_Ant 0+1	Test Voltage	AC 120V/60Hz

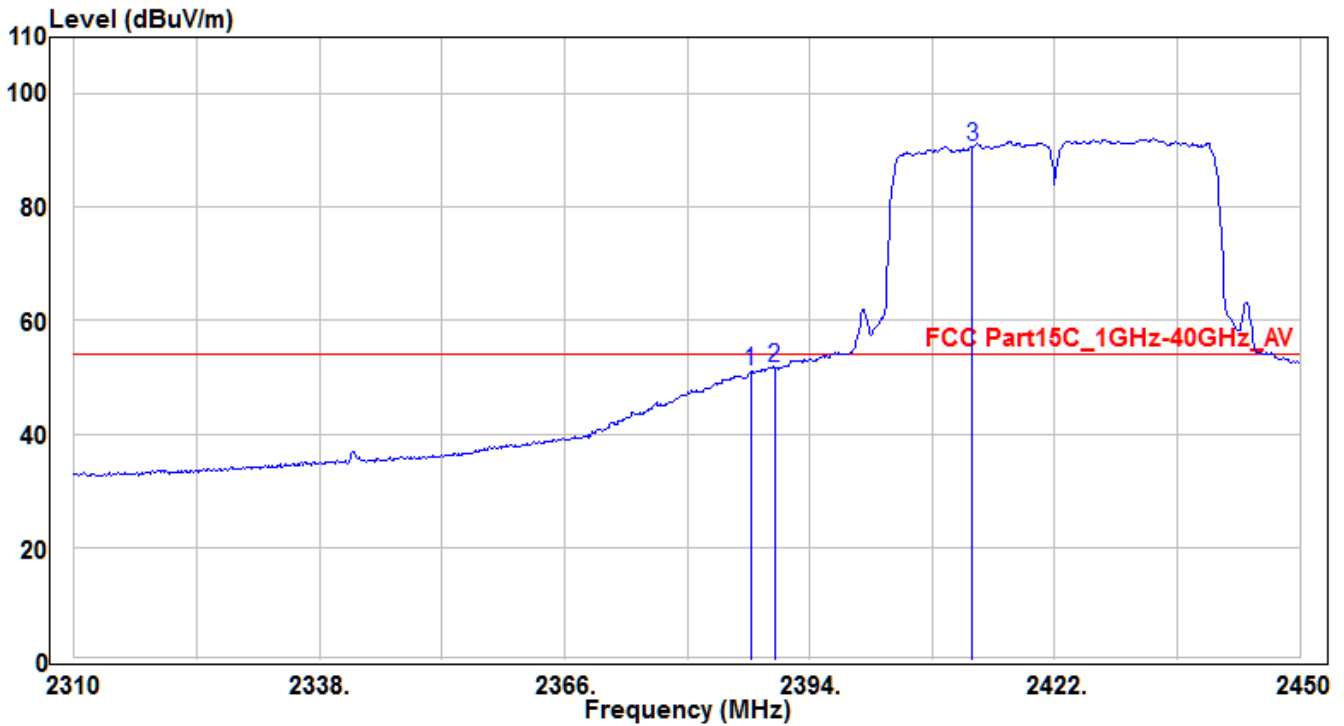


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.28	53.35	-2.38	50.97	-3.03	54	150	25	Average
2	* 2390	54.1	-2.36	51.74	-2.26	54	150	25	Average
3	2412.62	92.85	-2.26	90.59	36.59	54	150	25	Average

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE8-CH09_Ant 0+1	Test Voltage	AC 120V/60Hz

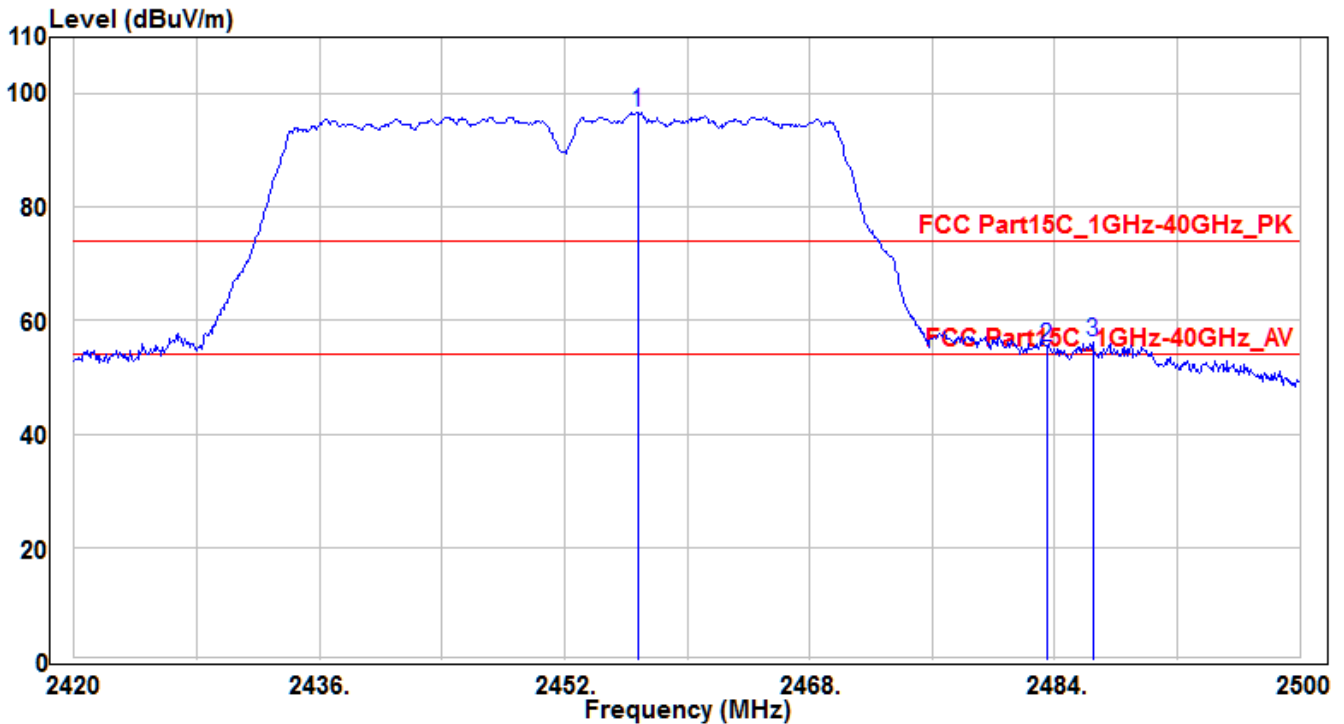


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.8	98.8	-2.09	96.71	22.71	74	160	355	Peak
2	2483.5	57.27	-1.99	55.28	-18.72	74	160	355	Peak
3	* 2486.48	58.26	-1.98	56.28	-17.72	74	160	355	Peak

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE8-CH09_Ant 0+1	Test Voltage	AC 120V/60Hz

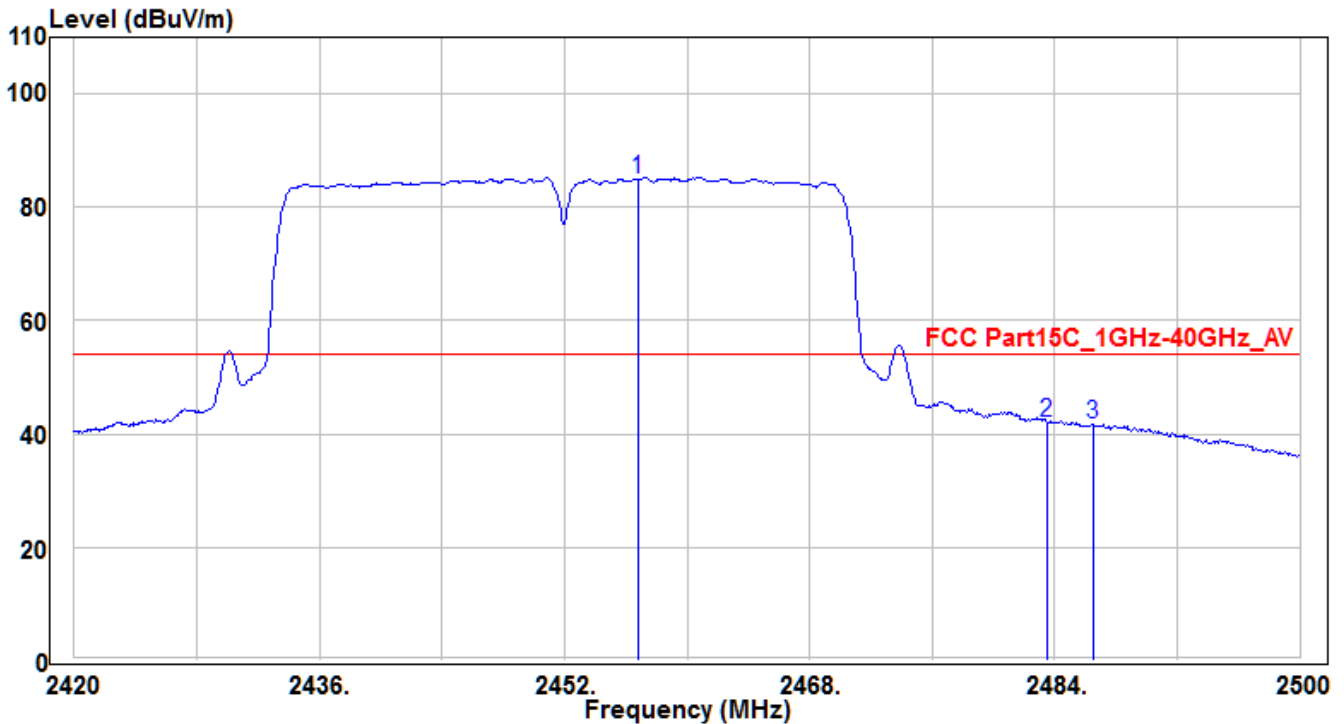


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.8	87.03	-2.09	84.94	30.94	54	160	355	Average
2	* 2483.5	44.06	-1.99	42.07	-11.93	54	160	355	Average
3	2486.48	43.74	-1.98	41.76	-12.24	54	160	355	Average

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE8-CH09_Ant 0+1	Test Voltage	AC 120V/60Hz

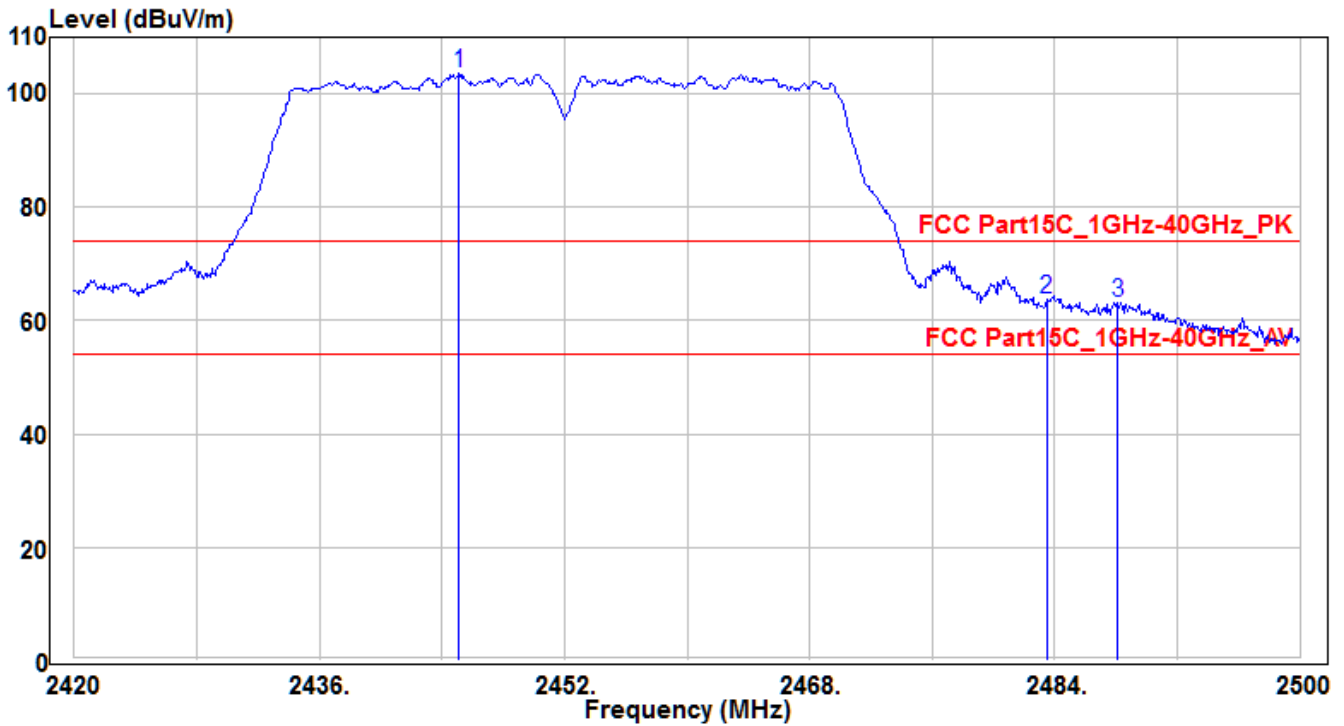


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.12	105.7	-2.14	103.56	29.56	74	150	375	Peak
2	* 2483.5	65.63	-1.99	63.64	-10.36	74	150	375	Peak
3	2488.08	65.2	-1.97	63.23	-10.77	74	150	375	Peak

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	CT1200 (External Antenna)	Test Date	2018/6/14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE8-CH09_Ant 0+1	Test Voltage	AC 120V/60Hz

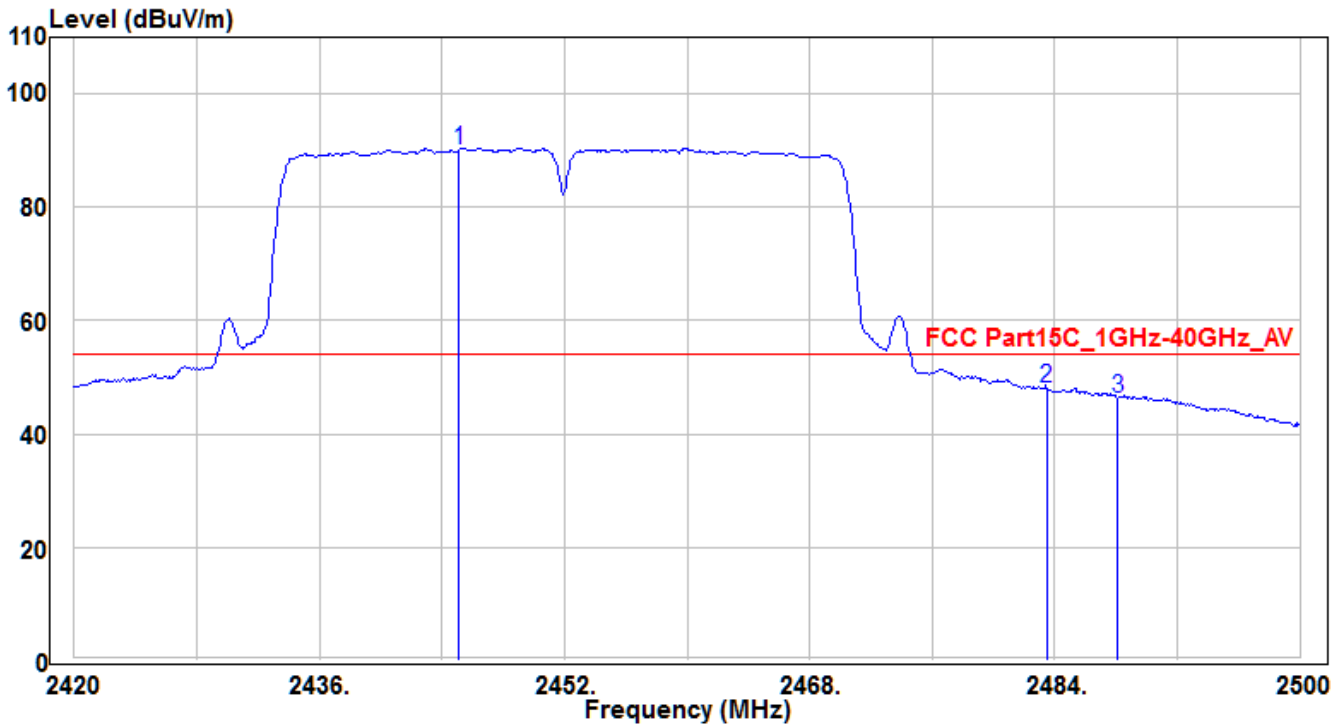

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.12	92.27	-2.14	90.13	36.13	54	150	375	Average
2	* 2483.5	49.91	-1.99	47.92	-6.08	54	150	375	Average
3	2488.08	48.36	-1.97	46.39	-7.61	54	150	375	Average

Note: The EUT Power by Notebook PC

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

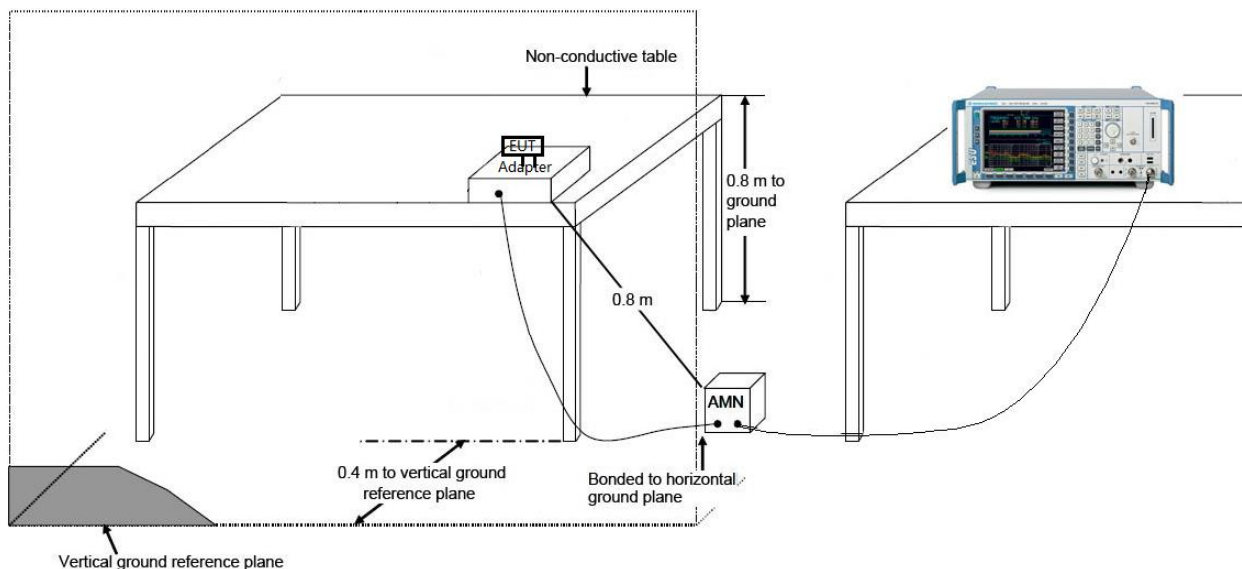

7.8.3. Test Result

EUT	Wireless Display Kit (Receiver)	Test Date	2018/6/29
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C / 55%
Polarity	Line1	Site / Engineer	SR2 / Peter
Test Mode	MODE3	Test Voltage	AC120V/60Hz

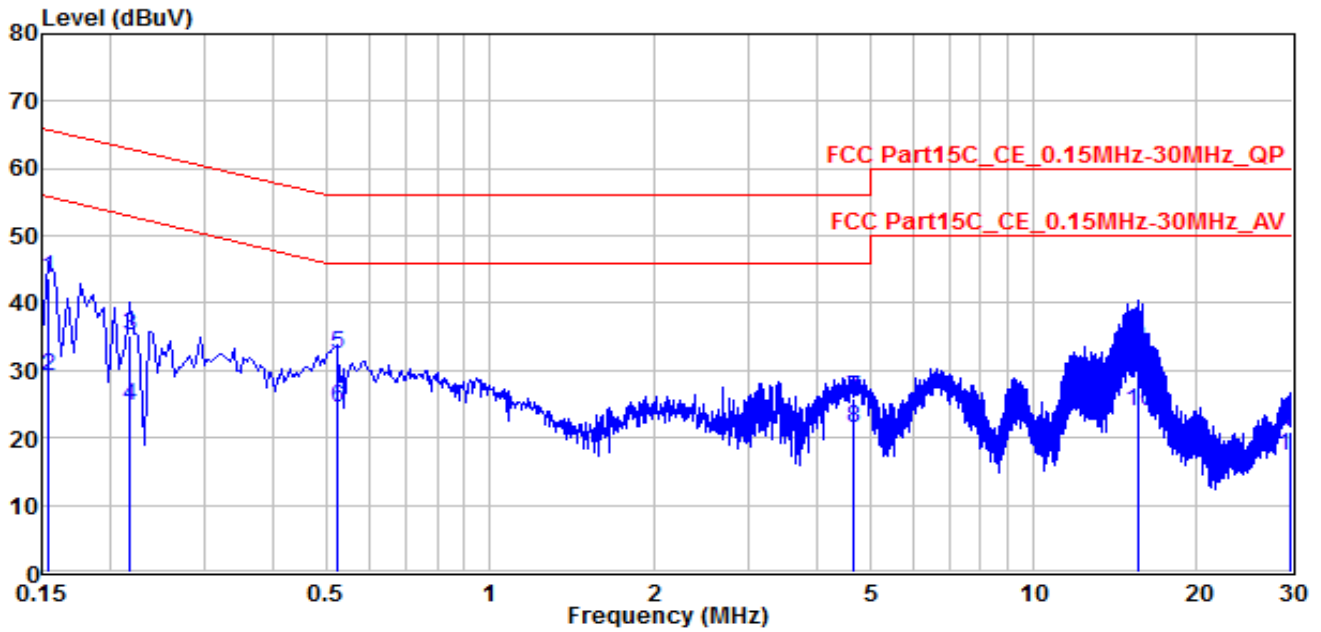


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.1545	33.73	9.94	43.67	-22.08	65.75	QP
2		0.1545	19.25	9.94	29.19	-26.56	55.75	Average
3		0.21749	25.27	9.93	35.2	-27.71	62.91	QP
4		0.21749	14.86	9.93	24.79	-28.12	52.91	Average
5		0.52346	22.4	10.1	32.5	-23.5	56	QP
6	*	0.52346	14.5	10.1	24.6	-21.4	46	Average
7		4.668	16.07	9.77	25.84	-30.16	56	QP
8		4.668	11.74	9.77	21.51	-24.49	46	Average
9		15.642	23.46	9.95	33.41	-26.59	60	QP
10		15.642	13.84	9.95	23.79	-26.21	50	Average
11		29.775	10.95	10.01	20.96	-39.04	60	QP
12		29.775	7.19	10.01	17.2	-32.8	50	Average

Note: The EUT Power by Notebook PC

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV)+ C.F (Correction Factor).

EUT	Wireless Display Kit (Receiver)	Test Date	2018/6/29
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C / 55%
Polarity	Neutral	Site / Engineer	SR2 / Peter
Test Mode	MODE3	Test Voltage	AC120V/60Hz

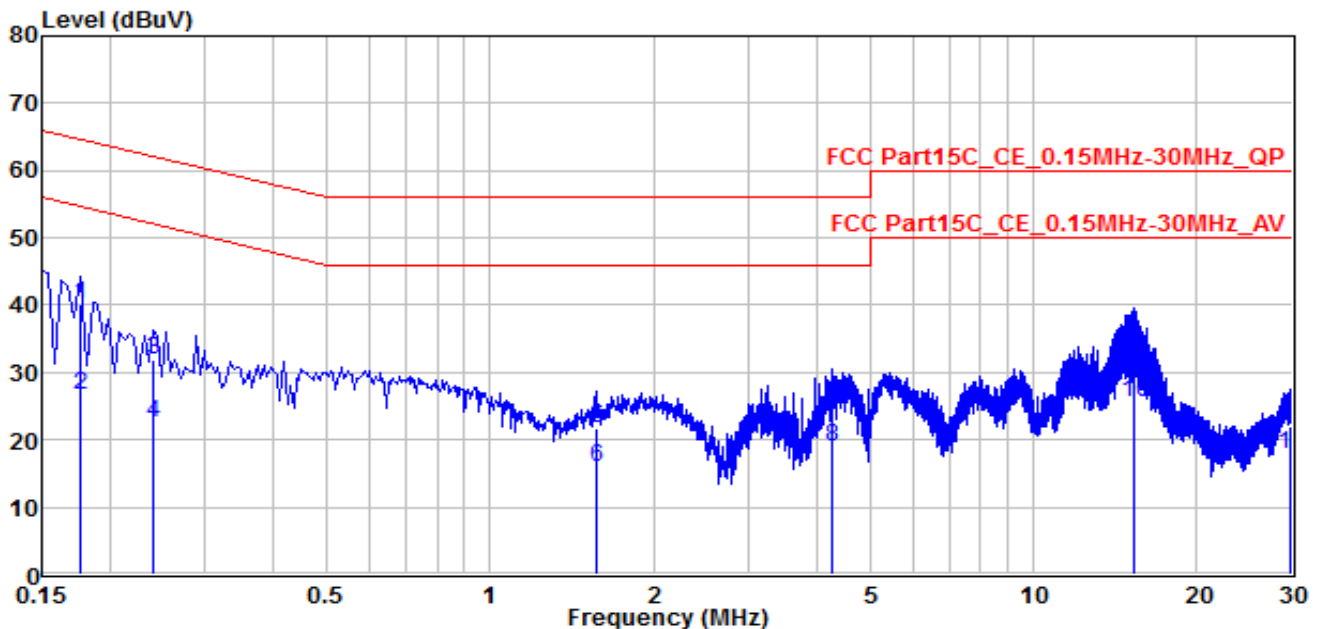


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.177	30.02	10.14	40.16	-24.47	64.63	QP
2		0.177	16.65	10.14	26.79	-27.84	54.63	Average
3		0.23999	21.94	9.92	31.86	-30.24	62.1	QP
4		0.23999	12.71	9.92	22.63	-29.47	52.1	Average
5		1.567	11.94	9.87	21.81	-34.19	56	QP
6		1.567	6.19	9.87	16.06	-29.94	46	Average
7		4.272	15.65	9.76	25.41	-30.59	56	QP
8		4.272	9.23	9.76	18.99	-27.01	46	Average
9		15.286	23.14	9.97	33.11	-26.89	60	QP
10	*	15.286	15.57	9.97	25.54	-24.46	50	Average
11		29.726	11.73	10.14	21.87	-38.13	60	QP
12		29.726	7.79	10.14	17.93	-32.07	50	Average

Note: The EUT Power by Notebook PC

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV)+ C.F (Correction Factor).

EUT	Wireless Display Kit (Receiver)	Test Date	2018/6/29
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C / 55%
Polarity	Line1	Site / Engineer	SR2 / Peter
Test Mode	MODE7	Test Voltage	AC120V/60Hz

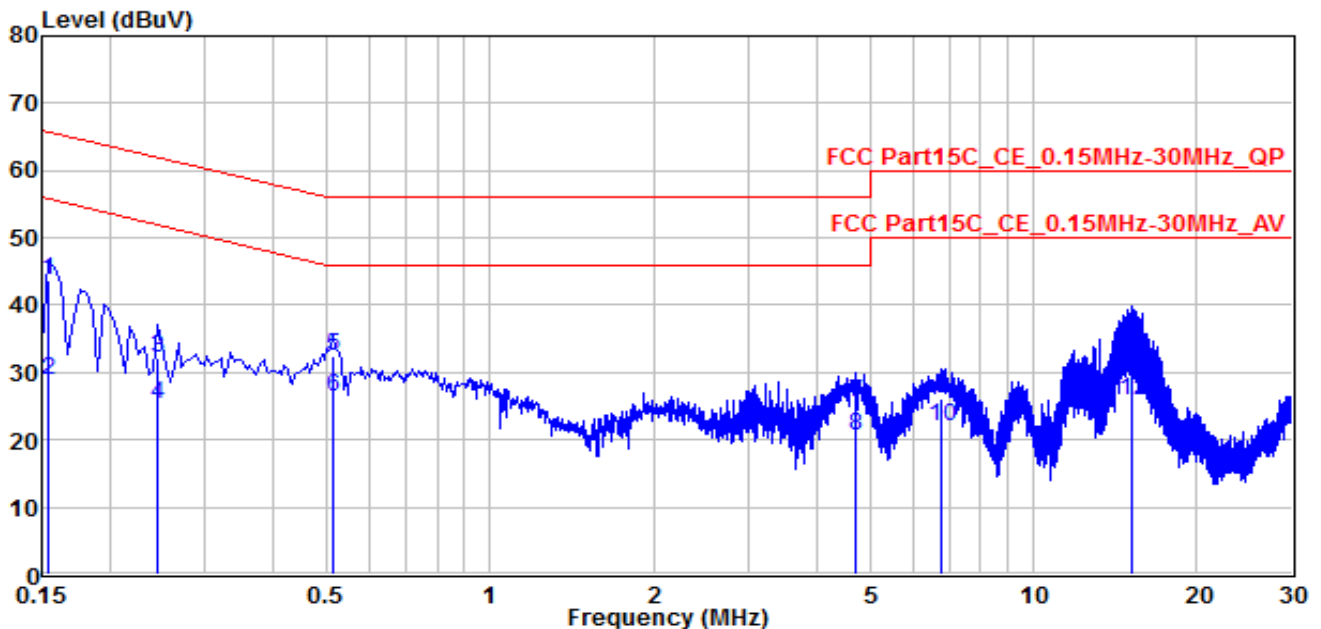


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.1545	33.78	9.94	43.72	-22.03	65.75	QP
2		0.1545	18.94	9.94	28.88	-26.87	55.75	Average
3		0.24449	22.33	9.96	32.29	-29.65	61.94	QP
4		0.24449	15.3	9.96	25.26	-26.68	51.94	Average
5		0.51446	22.43	10.1	32.53	-23.47	56	QP
6	*	0.51446	16.23	10.1	26.33	-19.67	46	Average
7		4.695	15.77	9.77	25.54	-30.46	56	QP
8		4.695	10.83	9.77	20.6	-25.4	46	Average
9		6.8	16.41	9.79	26.2	-33.8	60	QP
10		6.8	12.32	9.79	22.11	-27.89	50	Average
11		15.151	24.7	9.94	34.64	-25.36	60	QP
12		15.151	15.79	9.94	25.73	-24.27	50	Average

Note: The EUT Power by Notebook PC

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV)+ C.F (Correction Factor).

EUT	Wireless Display Kit (Receiver)	Test Date	2018/6/29
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C / 55%
Polarity	Neutral	Site / Engineer	SR2 / Peter
Test Mode	MODE7	Test Voltage	AC120V/60Hz

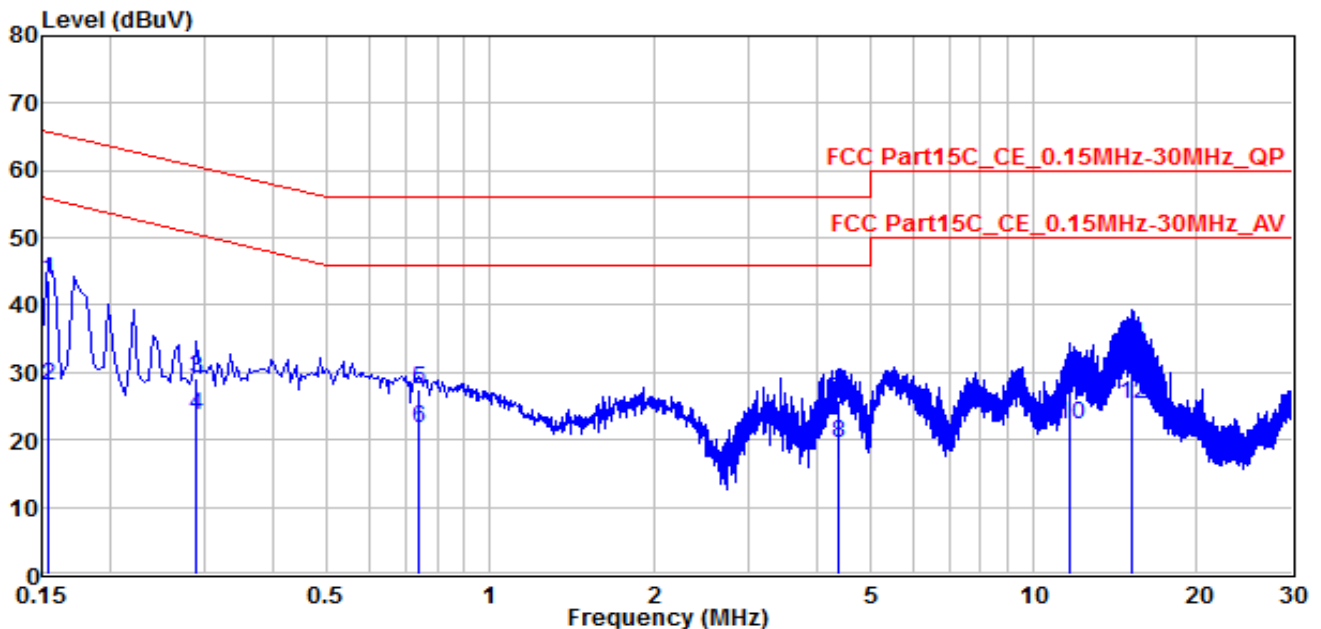

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.1545	33.7	9.95	43.65	-22.1	65.75	QP
2		0.1545	18.1	9.95	28.05	-27.7	55.75	Average
3		0.28949	19.19	9.96	29.15	-31.39	60.54	QP
4		0.28949	13.76	9.96	23.72	-26.82	50.54	Average
5		0.73944	17.37	10.02	27.39	-28.61	56	QP
6	*	0.73944	11.59	10.02	21.61	-24.39	46	Average
7		4.375	16.06	9.75	25.81	-30.19	56	QP
8		4.375	9.9	9.75	19.65	-26.35	46	Average
9		11.705	18.31	9.89	28.2	-31.8	60	QP
10		11.705	12.29	9.89	22.18	-27.82	50	Average
11		15.16	24.18	9.97	34.15	-25.85	60	QP
12		15.16	15.46	9.97	25.43	-24.57	50	Average

Note: The EUT Power by Notebook PC

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV)+ C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Wireless Display Kit** is in compliance with Part 15C of the FCC Rules.

_____ The End _____