Figure 25: Conducted Spurious Emission & Authorized-band band-edge, 802.11n(HT20), 2412MHz Carrier Level

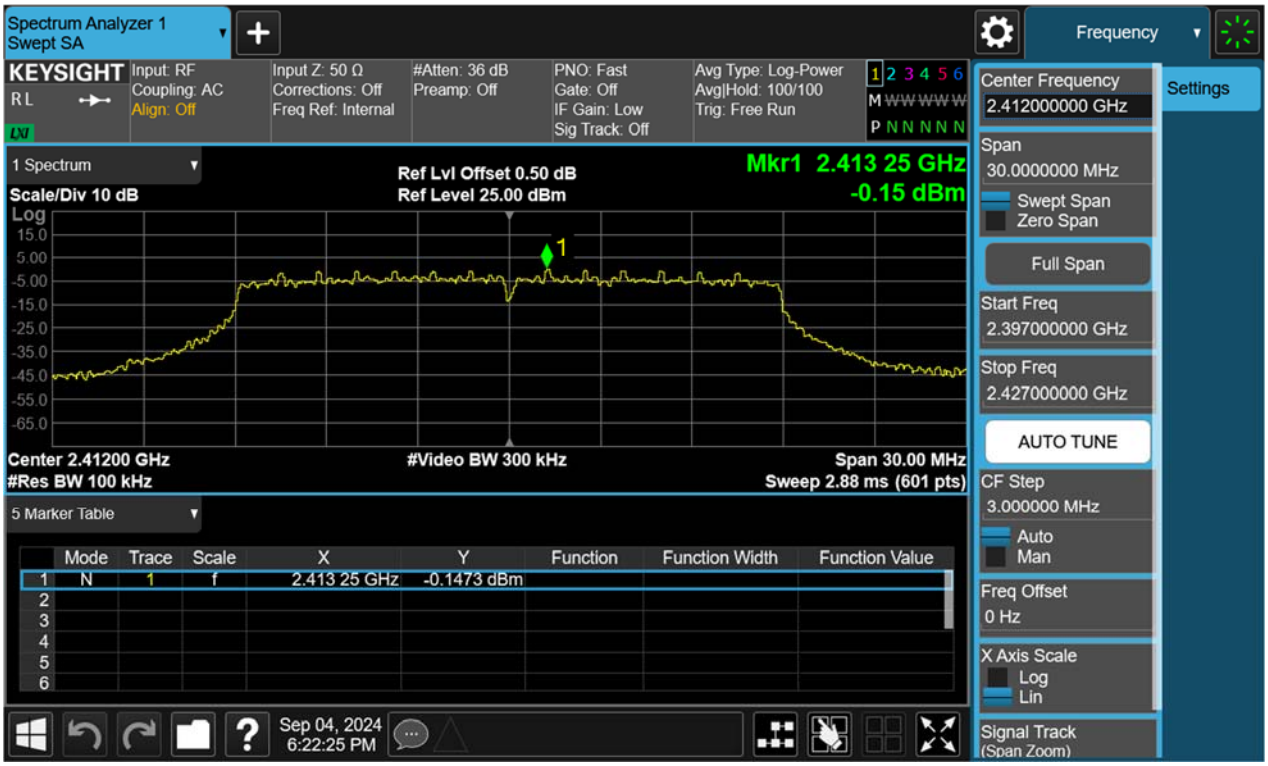

Band Edge

Conducted spurious emissions 30MHz-25GHz

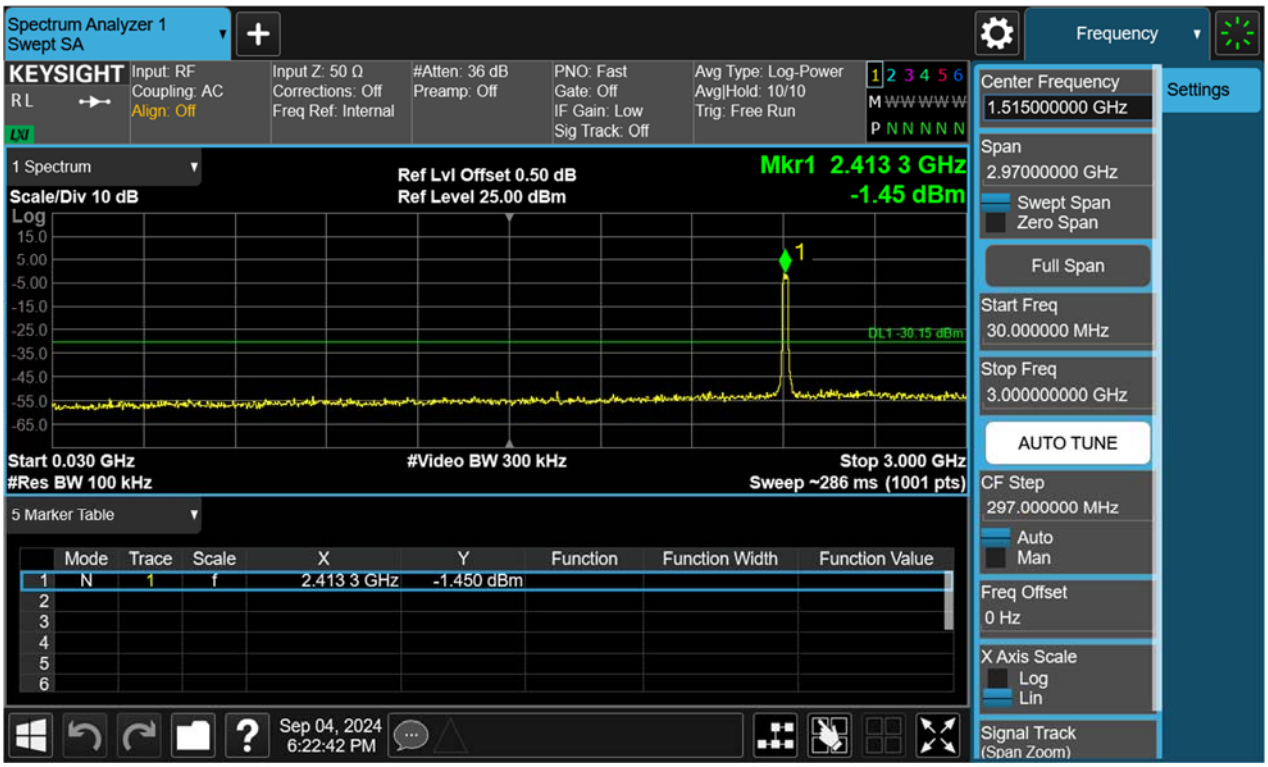

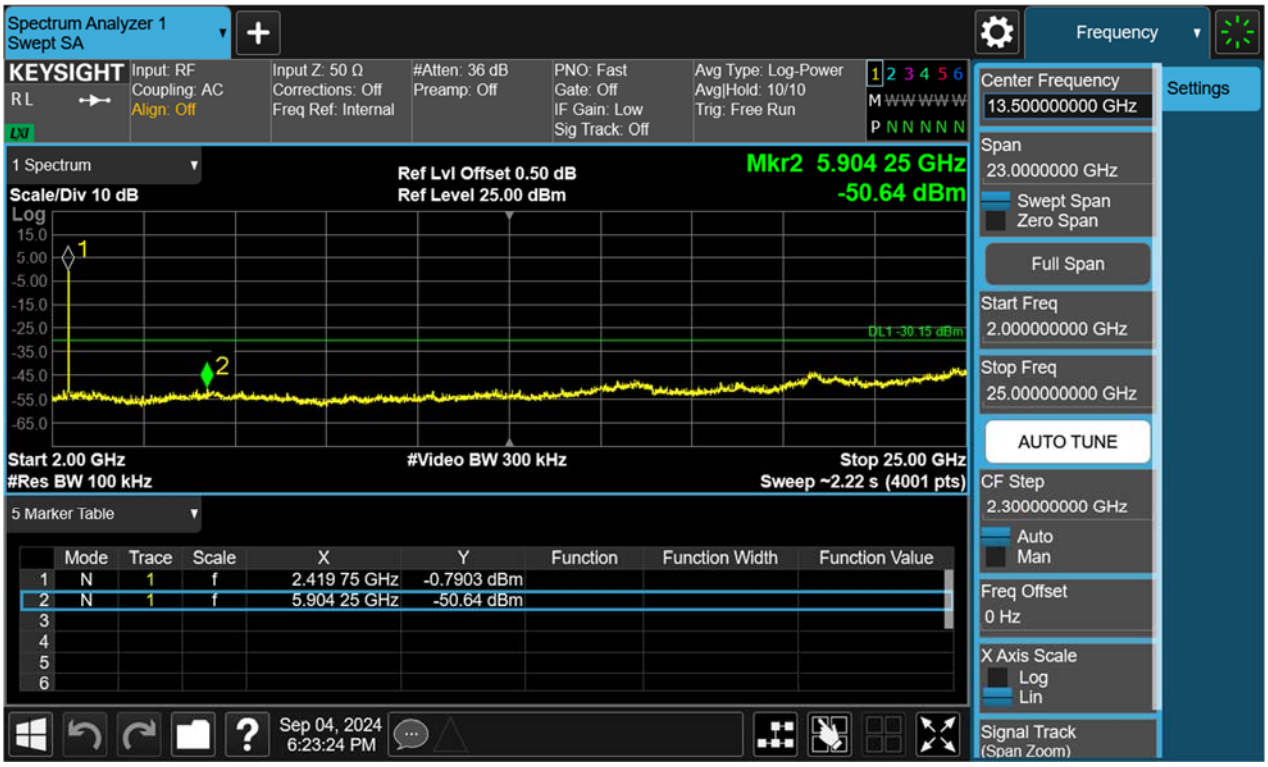

Figure 26: Conducted Spurious Emission & Authorized-band band-edge, 802.11n(HT20), 2437MHz Carrier Level

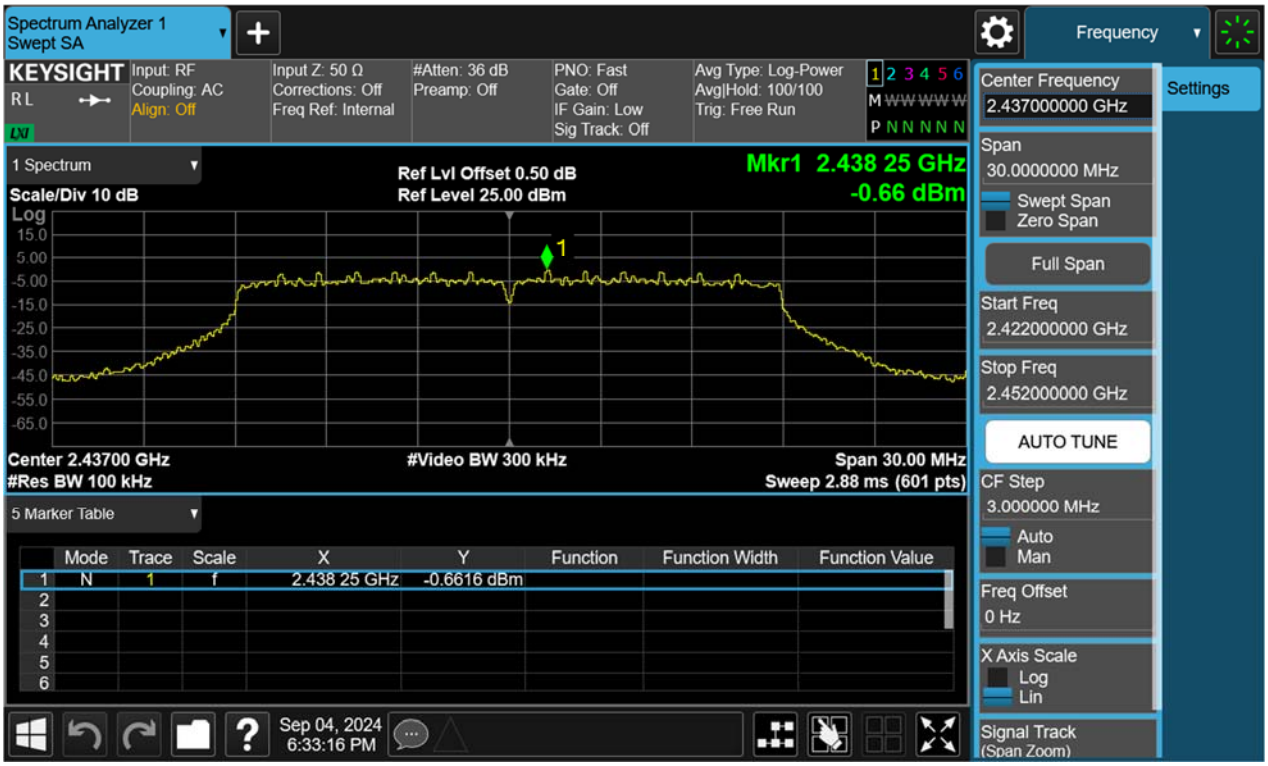

Conducted spurious emissions 30MHz-25GHz

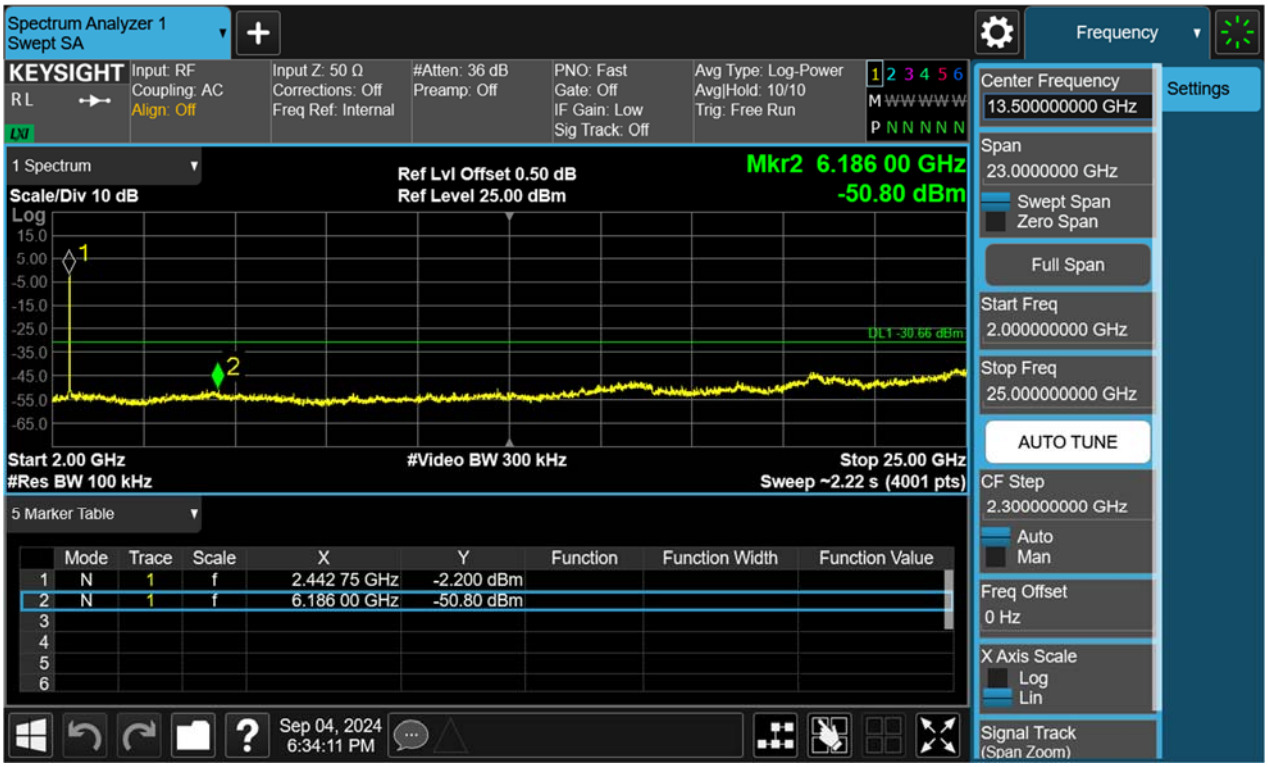

Figure 27: Conducted Spurious Emission & Authorized-band band-edge, 802.11n(HT20), 2462MHz Carrier Level

Band Edge

Conducted spurious emissions 30MHz-25GHz


Spectrum Analyzer 1
Swept SA
Frequency
KEYSIGHT
Input: RF
Coupling: AC
Align: Off
Input Z: 50 Ω
Corrections: Off
Freq Ref: Internal
#Atten: 36 dB
Preamp: Off
PNO: Fast
Gate: Off
IF Gain: Low
Sig Track: Off
Avg Type: Log-Power
Avg|Hold: 10/10
Trig: Free Run
1 Spectrum
Scale/Div 10 dB
Ref Lvl Offset 0.50 dB
Ref Level 25.00 dBm
Mkr2 4.926 75 GHz
-49.64 dBm
DL1 -31.22 dBm
Start 2.00 GHz
#Res BW 100 kHz
#Video BW 300 kHz
Stop 25.00 GHz
Sweep ~2.22 s (4001 pts)
5 Marker Table
Mode Trace Scale X Y Function Function Width Function Value
1 N 1 f 2.465 75 GHz -1.283 dBm
2 N 1 f 4.926 75 GHz -49.64 dBm
Sep 04, 2024
6:44:59 PM
Center Frequency
13.500000000 GHz
Span
23.0000000 GHz
Swept Span
Zero Span
Full Span
Start Freq
2.000000000 GHz
Stop Freq
25.000000000 GHz
AUTO TUNE
CF Step
2.300000000 GHz
Auto
Man
Freq Offset
0 Hz
X Axis Scale
Log
Lin
Signal Track
(Span Zoom)
Settings

4.1.6 Radiated Emission

RESULT: **PASS**

Test standard	:	FCC Part 15.247(d), 15.205, 15.209
Requirement	:	ANSI C63.10-2013, Clause 11.12 KDB 558074 D01 v05r02, Clause 8.6
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/Middle/High
Operation Mode	:	A.1.a
Ambient temperature	:	24.5°C
Relative humidity	:	49%

Notes

Test plots please refer to the annex document "SHE24080036-02CE DATA WIFI 2.4GHz-TX EXHIBIT A".

1. For 9 kHz ~ 30 MHz, the amplitude of spurious emissions that are attenuated by more than 20dB below the permissible. The value has no need to be reported.

2. The spurious above 18GHz is noise only and 20dB below the limit. The value has no need to be reported.

3. All test modes had been pre-tested, but only the 802.11b at low channel of below 1 GHz is the worst case and recorded in the report.

4. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

4.1.7 Band Edge (Restricted-band band-edge)

RESULT: **PASS**

Test standard	:	FCC Part 15.247(d), 15.205, 15.209
Requirement	:	ANSI C63.10-2013, Clause 11.13 KDB 558074 D01 v05r02, Clause 8.7
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/Middle/High
Operation Mode	:	A.1.a
Ambient temperature	:	23.6°C
Relative humidity	:	44%

Notes:

1. Test plots please refer to the annex document "SHE24080036-02CE DATA WIFI 2.4GHz-TX EXHIBIT A".

2. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

4.2 Mains Emissions

4.2.1 Conducted Emission on AC Mains

RESULT: **PASS**

Test standard	:	FCC Part 15.207(a)
Requirement	:	ANSI C63.10-2013, Clause 6.2
Kind of test site	:	Shielded room

Test setup

Input Voltage	:	DC 12V supply by AC adapter (which received AC 120V, 60Hz)
Operation Mode	:	A.1.a
Earthing	:	Disconnected to GND
Ambient temperature	:	22.9°C
Relative humidity	:	53%

For details refer to following test plot.

Note：All test modes had been pre-tested, but only the 802.11b at low channel is the worst case and recorded in the report.

Figure 28: Conducted Emission on AC Mains, L Phase

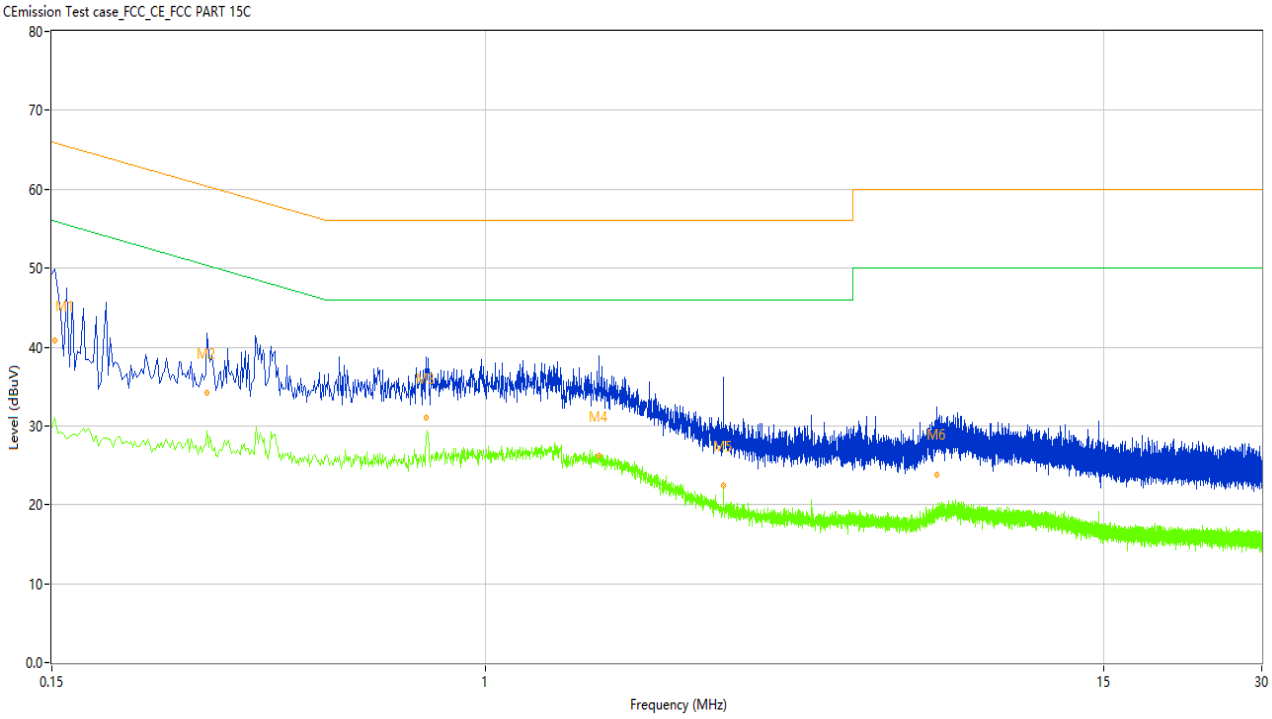

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.152	54.20	9.85	65.89	11.69	Peak	L	Pass
1*	0.152	40.85	9.85	65.89	25.04	QP	L	Pass
1**	0.152	31.00	9.85	55.89	24.89	AV	L	Pass
2	0.296	42.46	9.93	60.35	17.89	Peak	L	Pass
2*	0.296	34.26	9.93	60.35	26.09	QP	L	Pass
2**	0.296	29.38	9.93	50.35	20.97	AV	L	Pass
3	0.772	40.87	9.92	56.00	15.13	Peak	L	Pass
3*	0.772	31.09	9.92	56.00	24.91	QP	L	Pass
3**	0.772	27.81	9.92	46.00	18.19	AV	L	Pass
4	1.648	40.65	9.76	56.00	15.35	Peak	L	Pass
4*	1.648	26.20	9.76	56.00	29.80	QP	L	Pass
4**	1.648	26.25	9.76	46.00	19.75	AV	L	Pass
5	2.838	36.74	9.81	56.00	19.26	Peak	L	Pass
5*	2.838	22.37	9.81	56.00	33.63	QP	L	Pass
5**	2.838	22.22	9.81	46.00	23.78	AV	L	Pass
6	7.242	31.05	9.71	60.00	28.95	Peak	L	Pass
6*	7.242	23.83	9.71	60.00	36.17	QP	L	Pass
6**	7.242	18.26	9.71	50.00	31.74	AV	L	Pass

Figure 29: Conducted Emission on AC Mains, N Phase

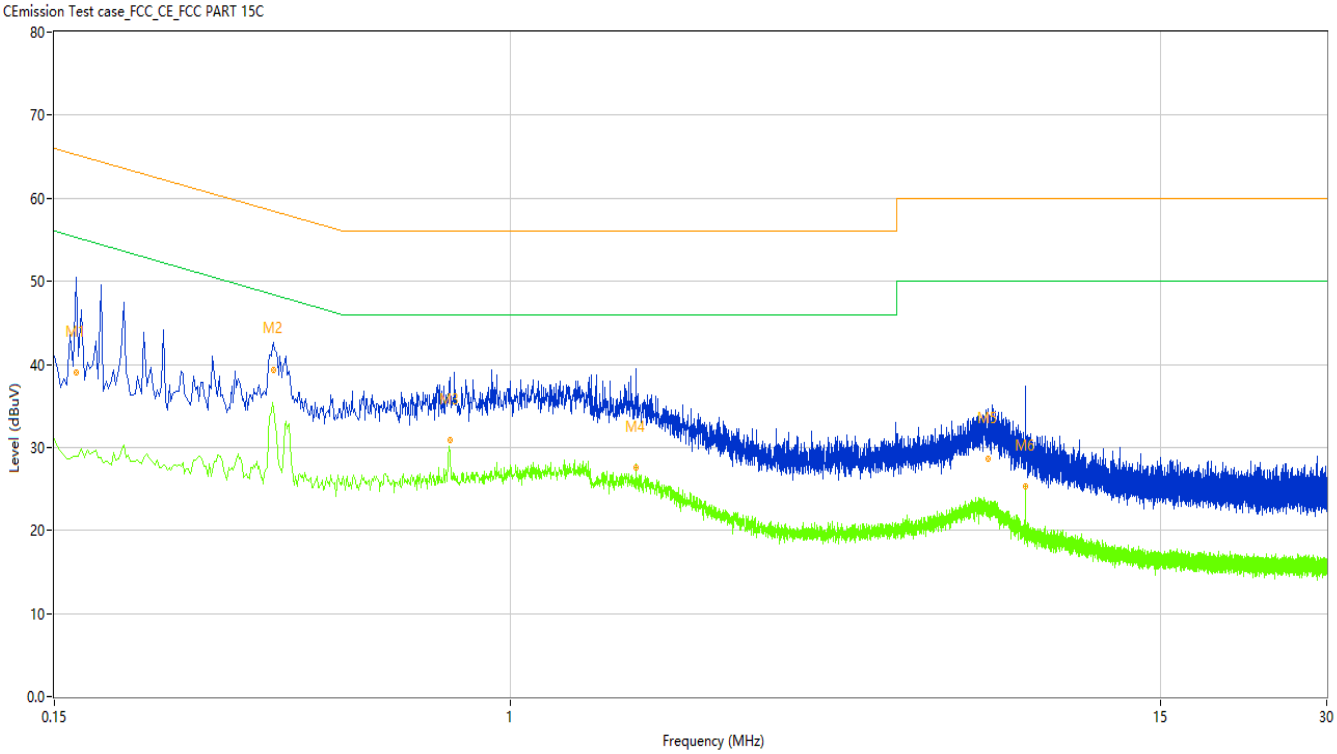

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.164	53.36	9.97	65.26	11.90	Peak	N	Pass
1*	0.164	38.96	9.97	65.26	26.30	QP	N	Pass
1**	0.164	28.96	9.97	55.26	26.30	AV	N	Pass
2	0.374	42.89	9.99	58.41	15.52	Peak	N	Pass
2*	0.374	39.39	9.99	58.41	19.02	QP	N	Pass
2**	0.374	34.82	9.99	48.41	13.59	AV	N	Pass
3	0.778	40.15	9.94	56.00	15.85	Peak	N	Pass
3*	0.778	30.83	9.94	56.00	25.17	QP	N	Pass
3**	0.778	29.35	9.94	46.00	16.65	AV	N	Pass
4	1.692	37.96	9.88	56.00	18.04	Peak	N	Pass
4*	1.692	27.63	9.88	56.00	28.37	QP	N	Pass
4**	1.692	28.10	9.88	46.00	17.90	AV	N	Pass
5	7.334	37.54	9.80	60.00	22.46	Peak	N	Pass
5*	7.334	28.69	9.80	60.00	31.31	QP	N	Pass
5**	7.334	22.39	9.80	50.00	27.61	AV	N	Pass
6	8.544	33.95	9.78	60.00	26.05	Peak	N	Pass
6*	8.544	25.32	9.78	60.00	34.68	QP	N	Pass
6**	8.544	25.61	9.78	50.00	24.39	AV	N	Pass

5 Appendixes

5.1 Photographs of the Sample

All of the sample

Front of the sample

Rear of the sample

Left of the sample

Right of the sample

Top of the sample

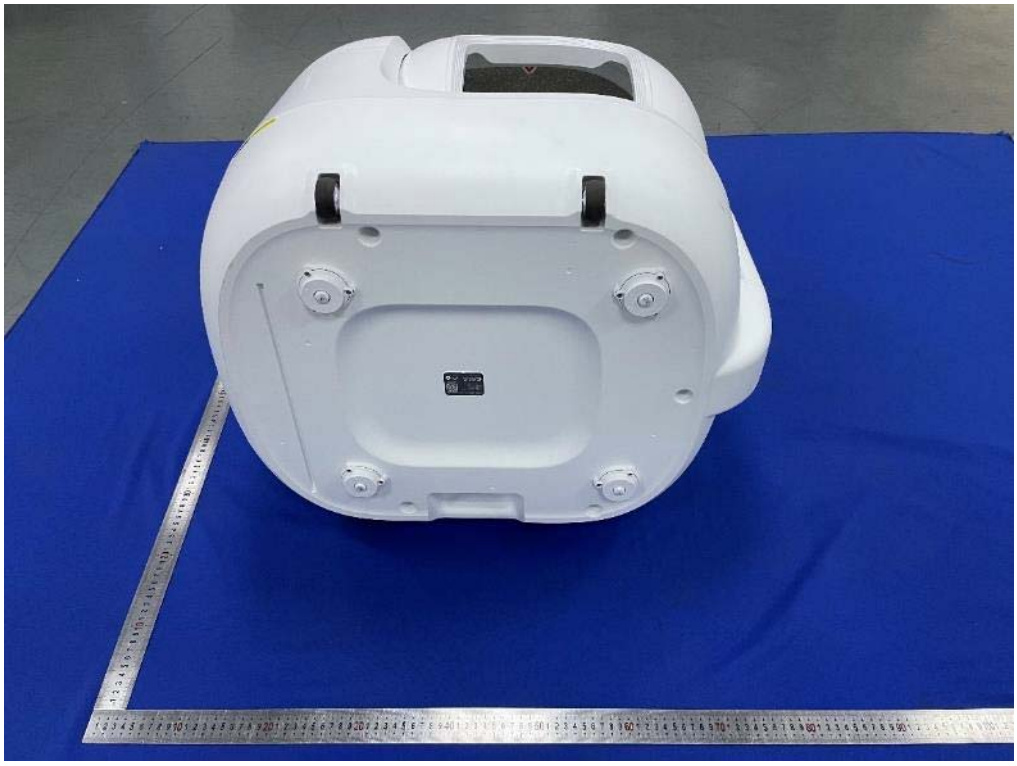

Bottom of the sample

Open-1 of the sample

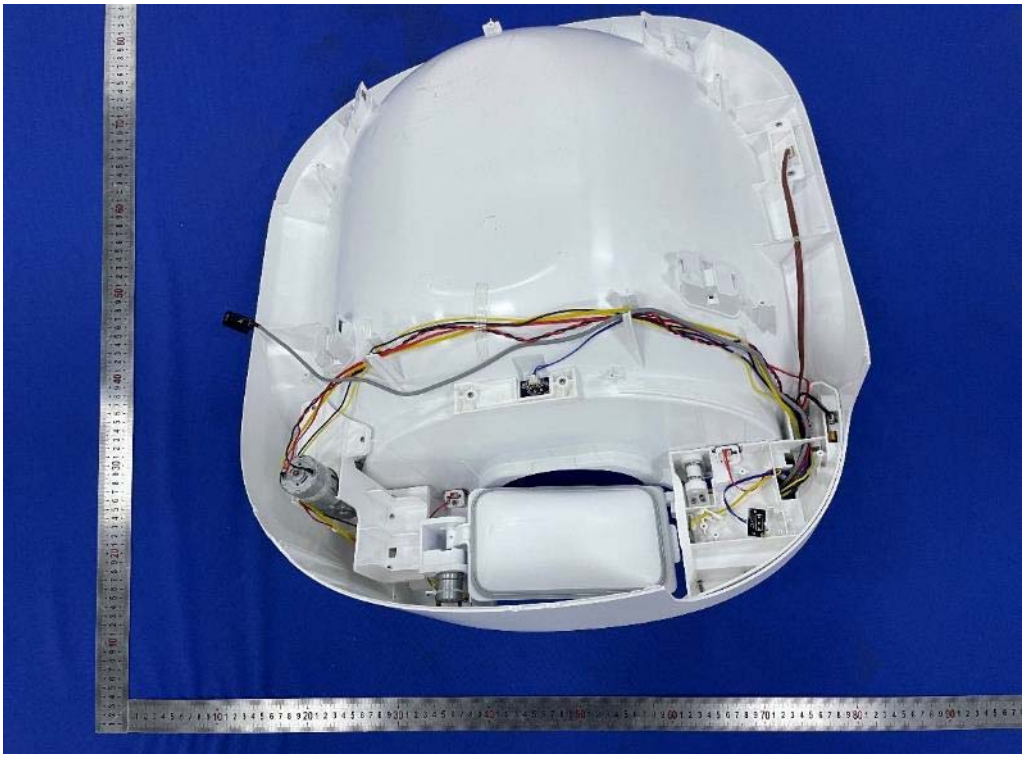

Open-2 of the sample

Open-3 of the sample

Open-4 of the sample

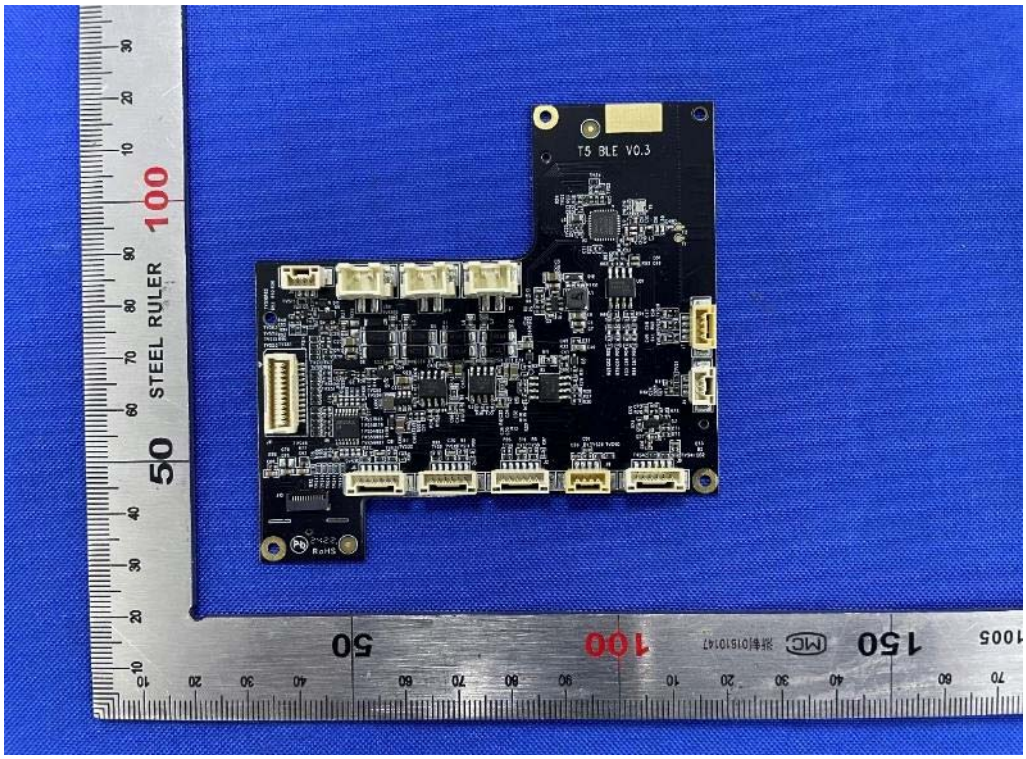

Internal-1 of the sample

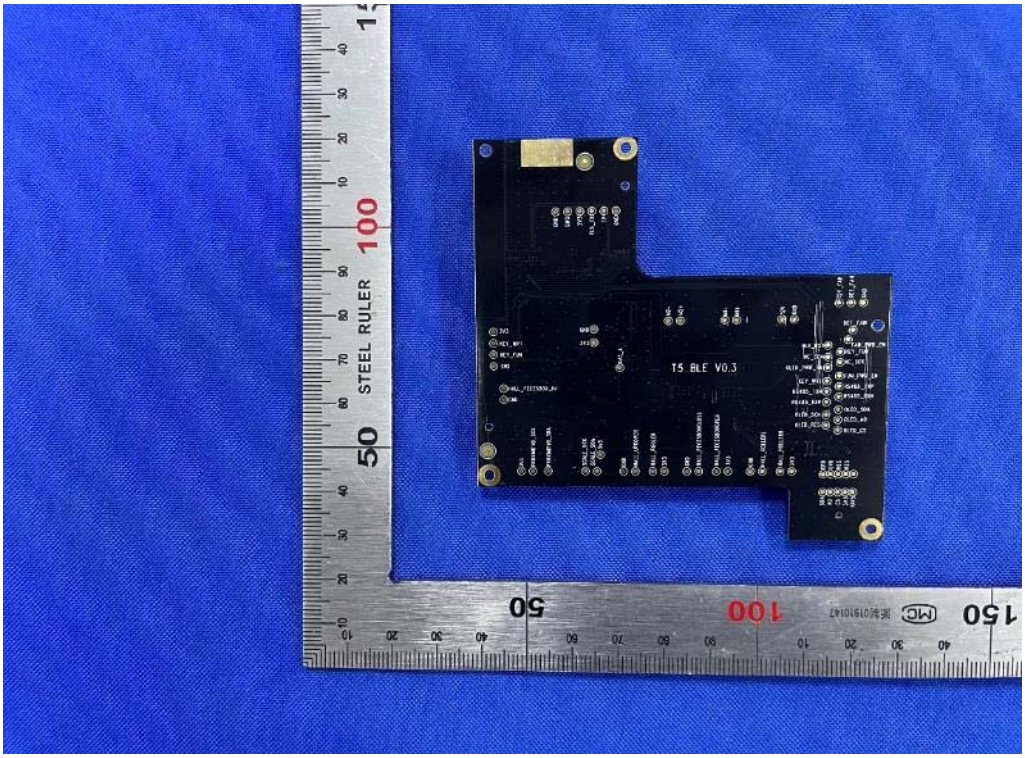

Internal-2 of the sample

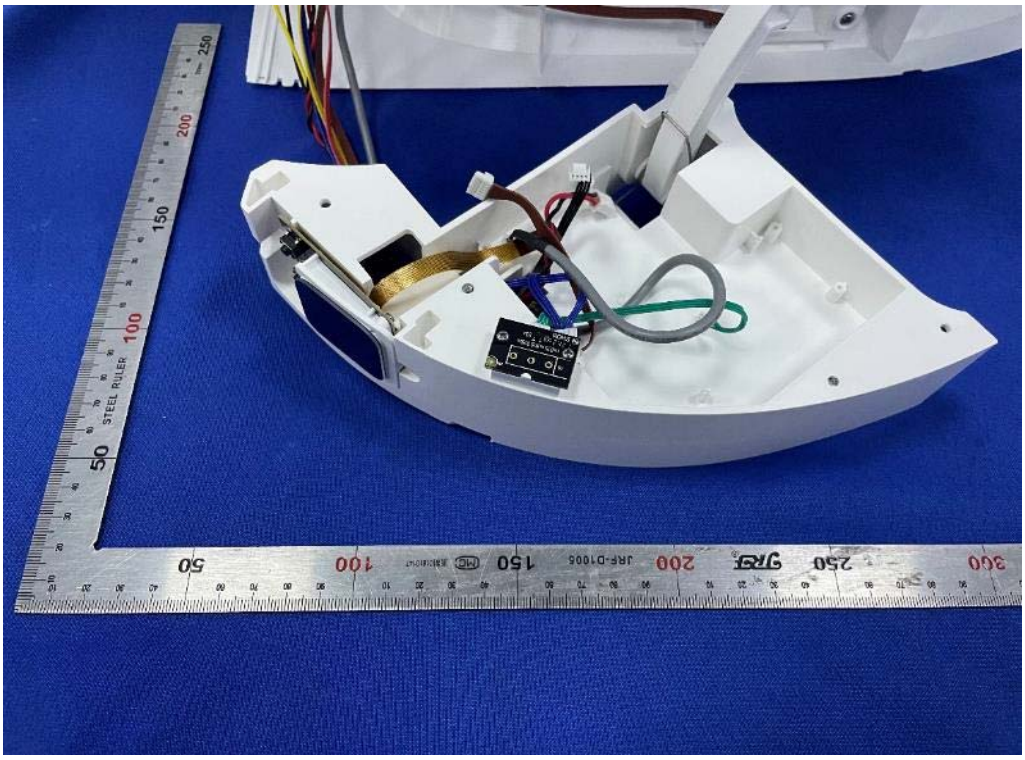

Internal-3 of the sample

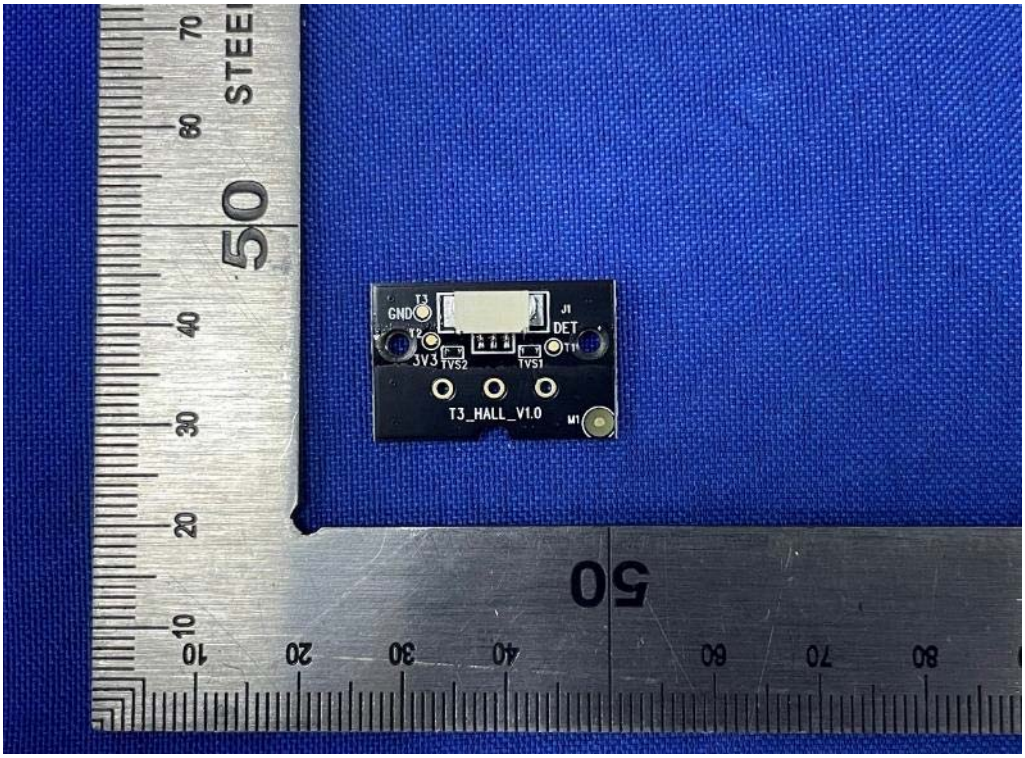

Internal-4 of the sample

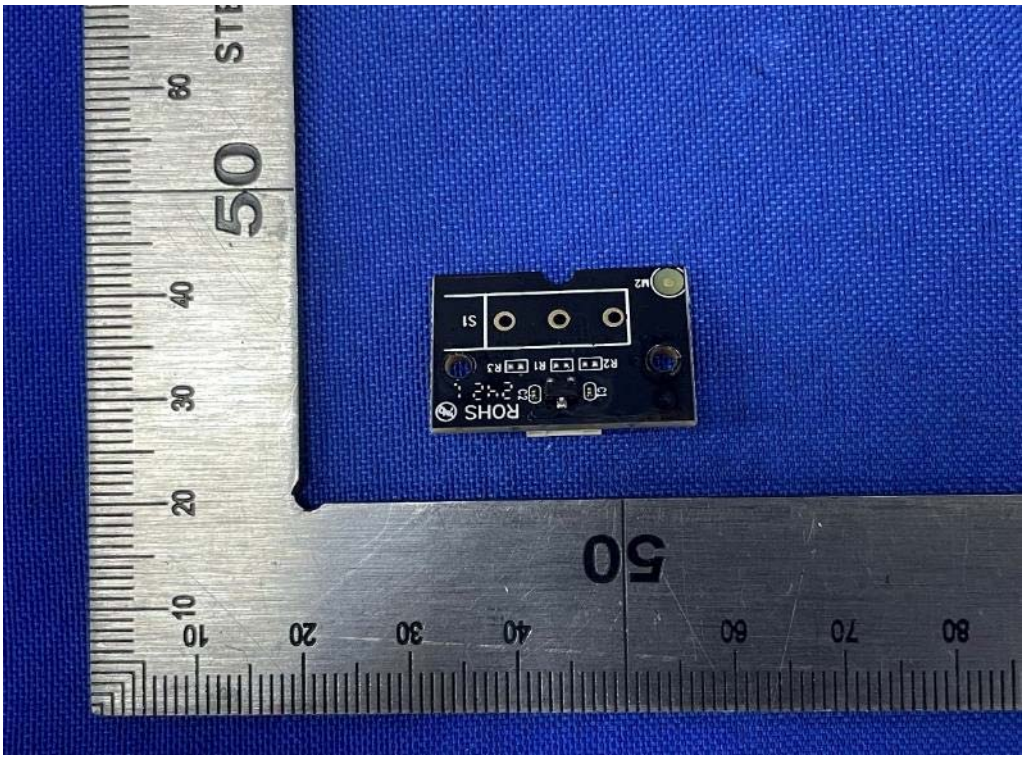

Internal-5 of the sample

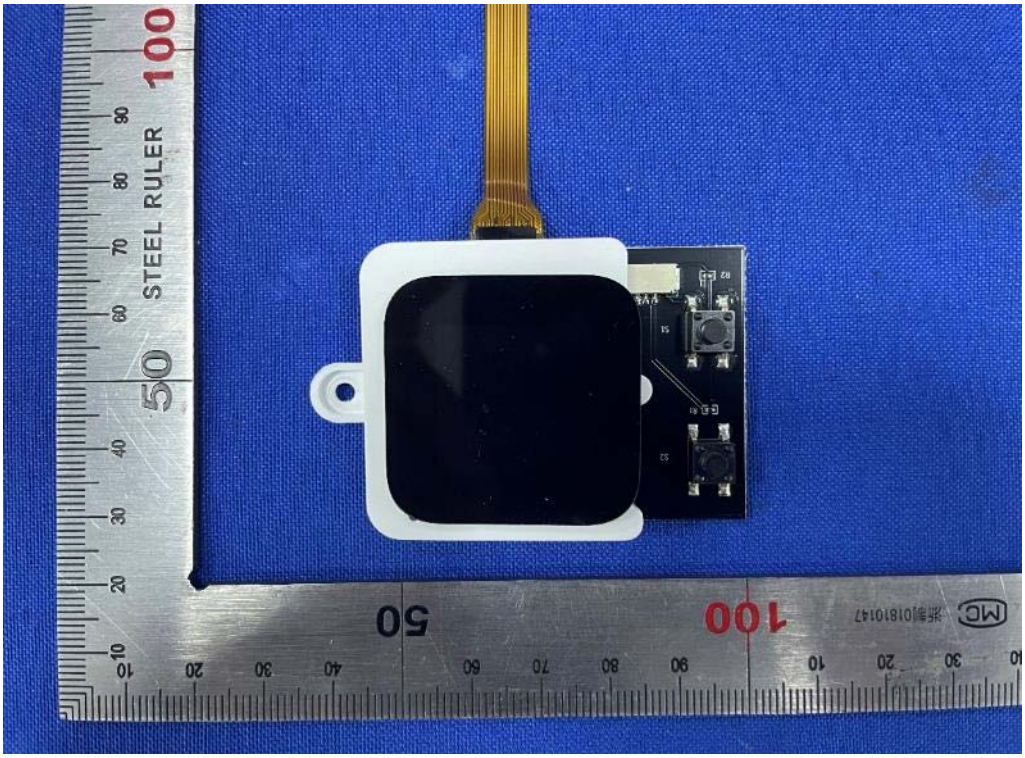

Internal-6 of the sample

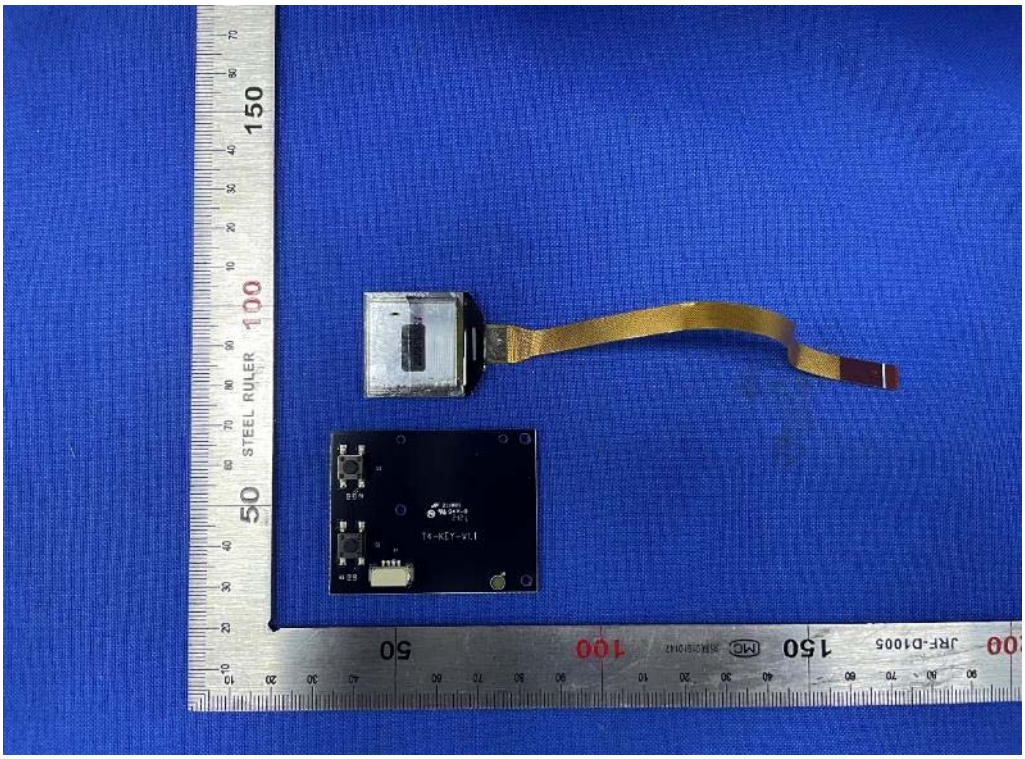

Internal-7 of the sample

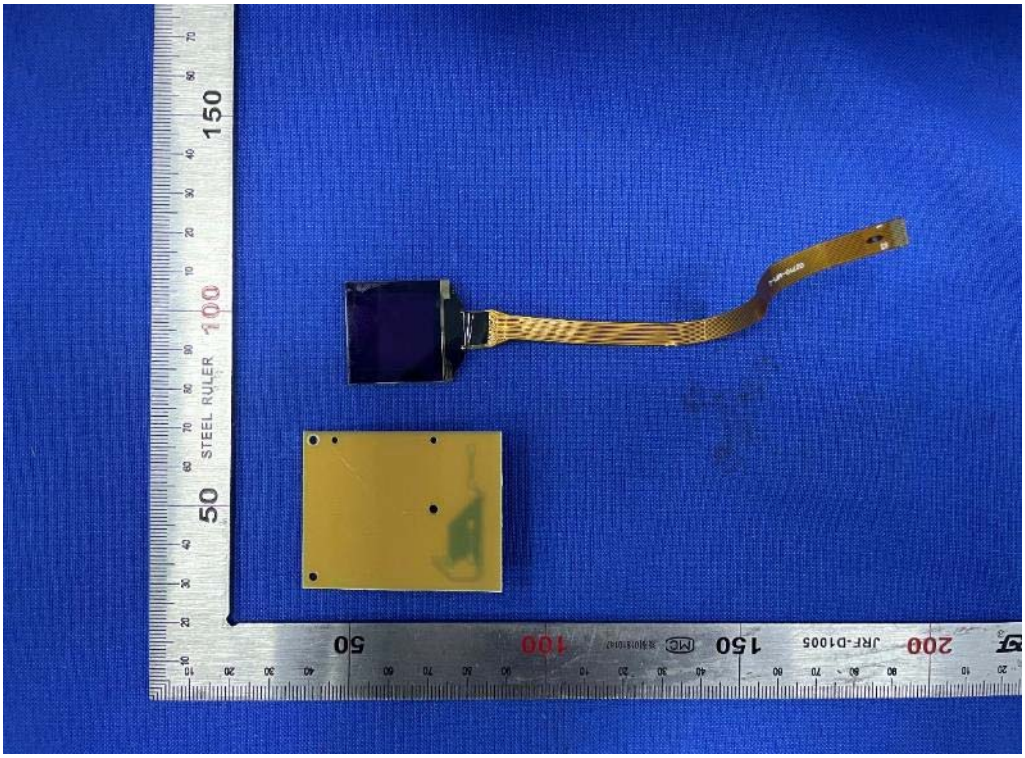

Internal-8 of the sample

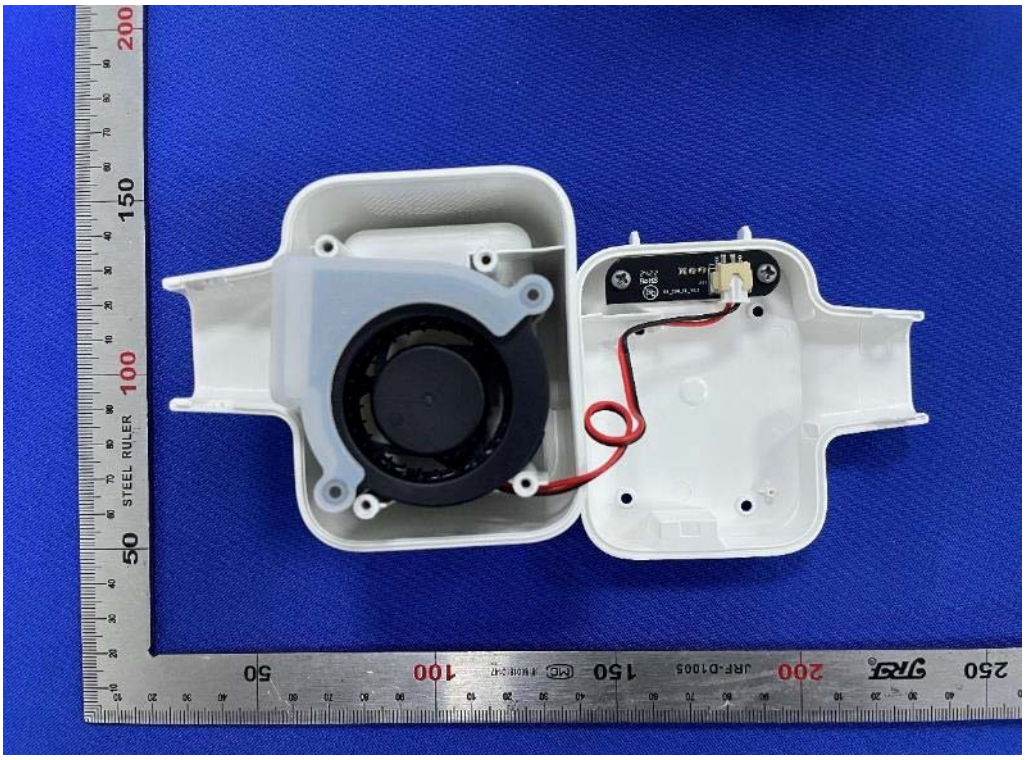

Internal-9 of the sample

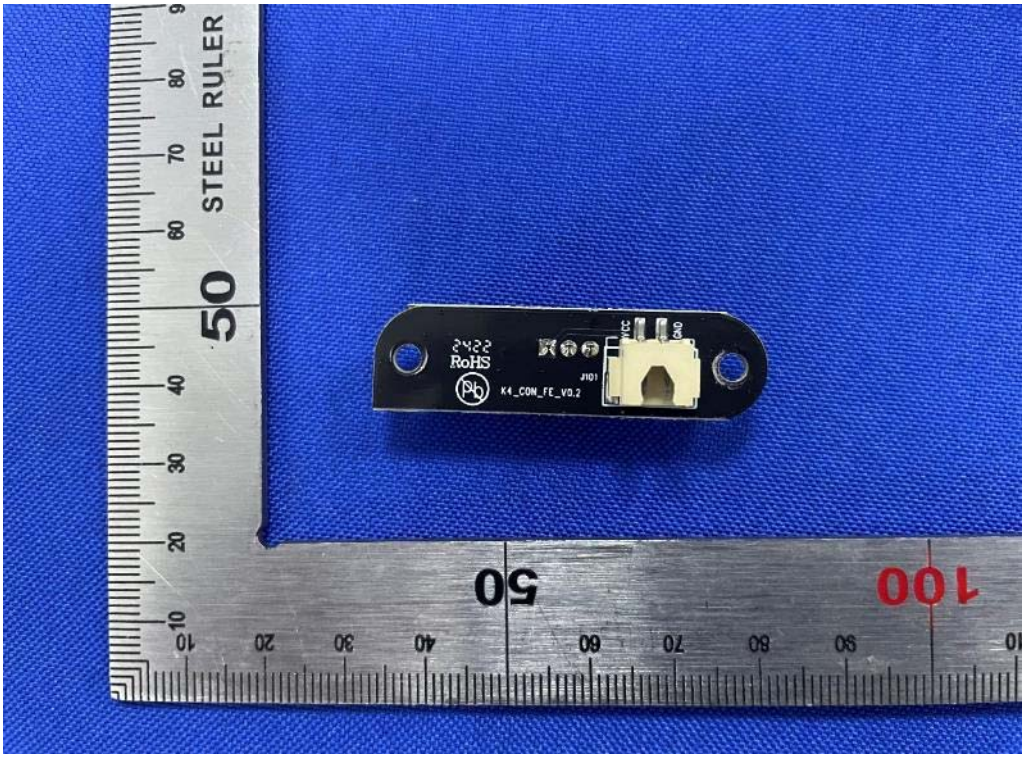

Internal-10 of the sample

Internal-11 of the sample

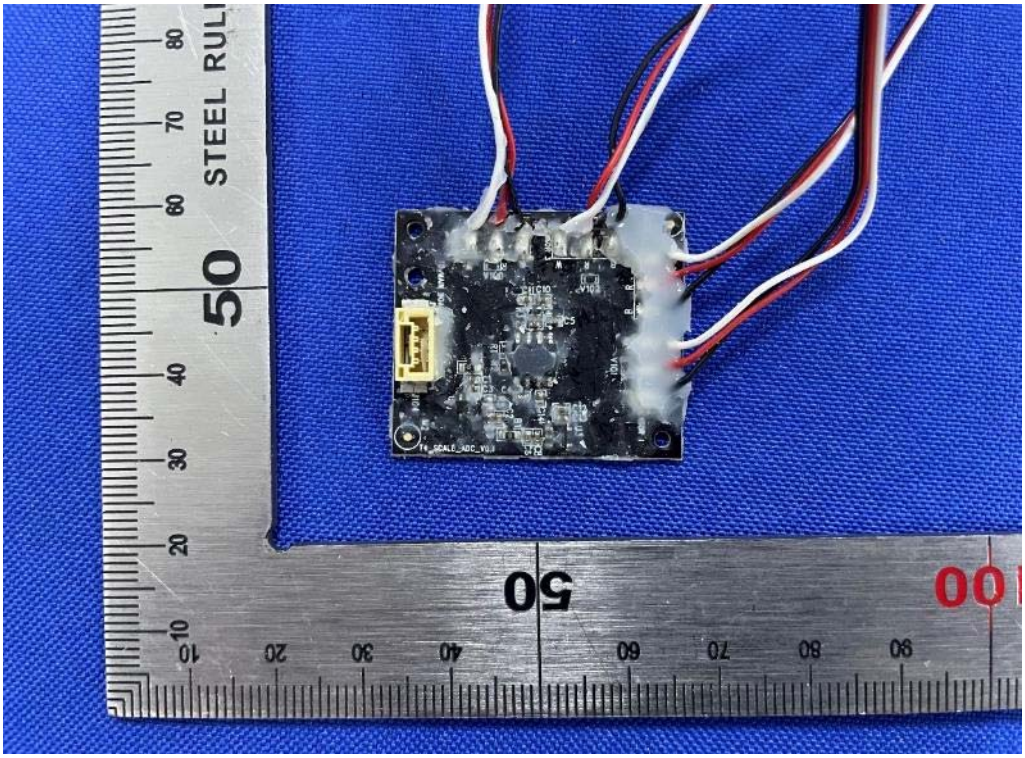

Internal-12 of the sample

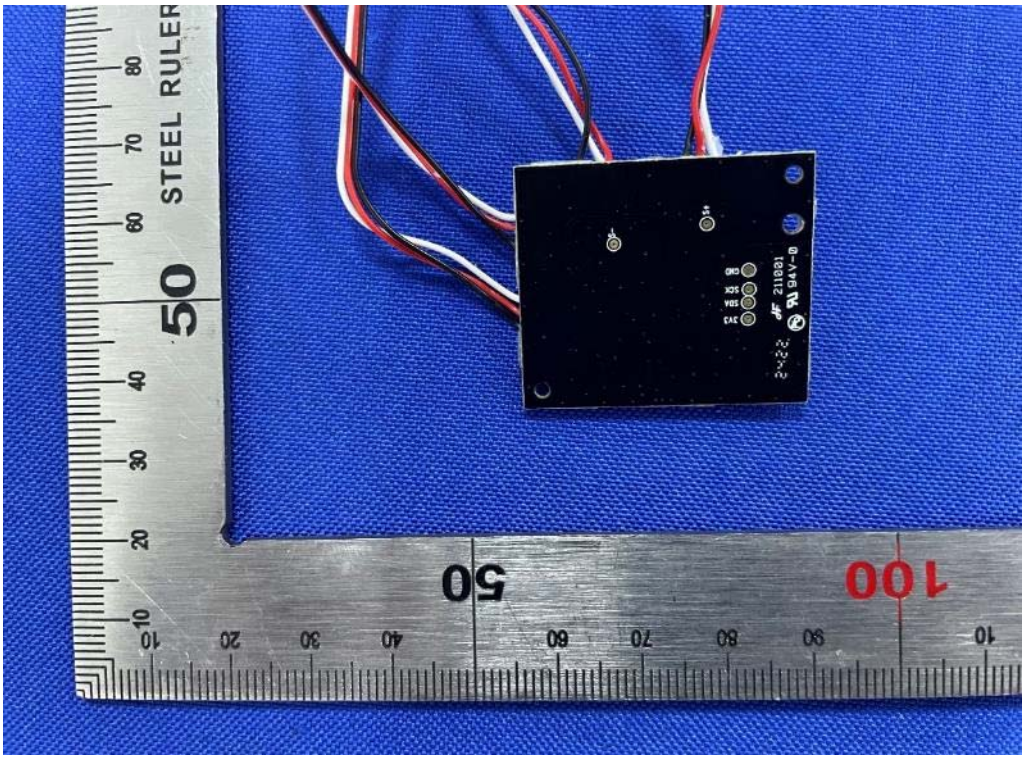

Internal-13 of the sample

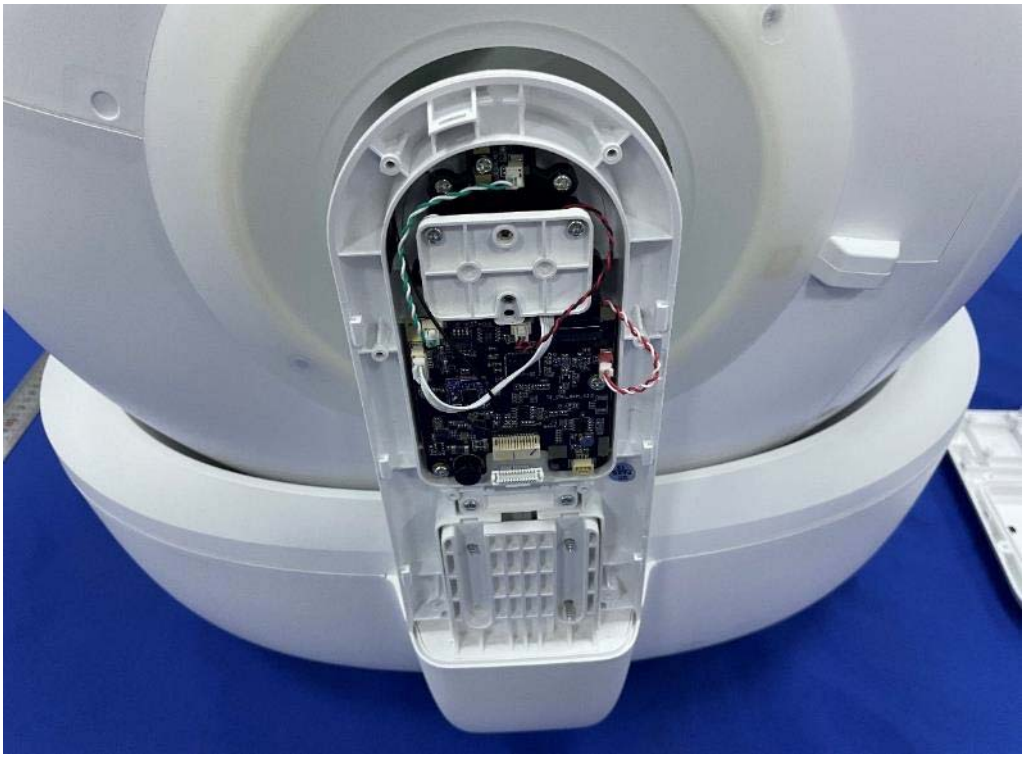

Internal-14 of the sample

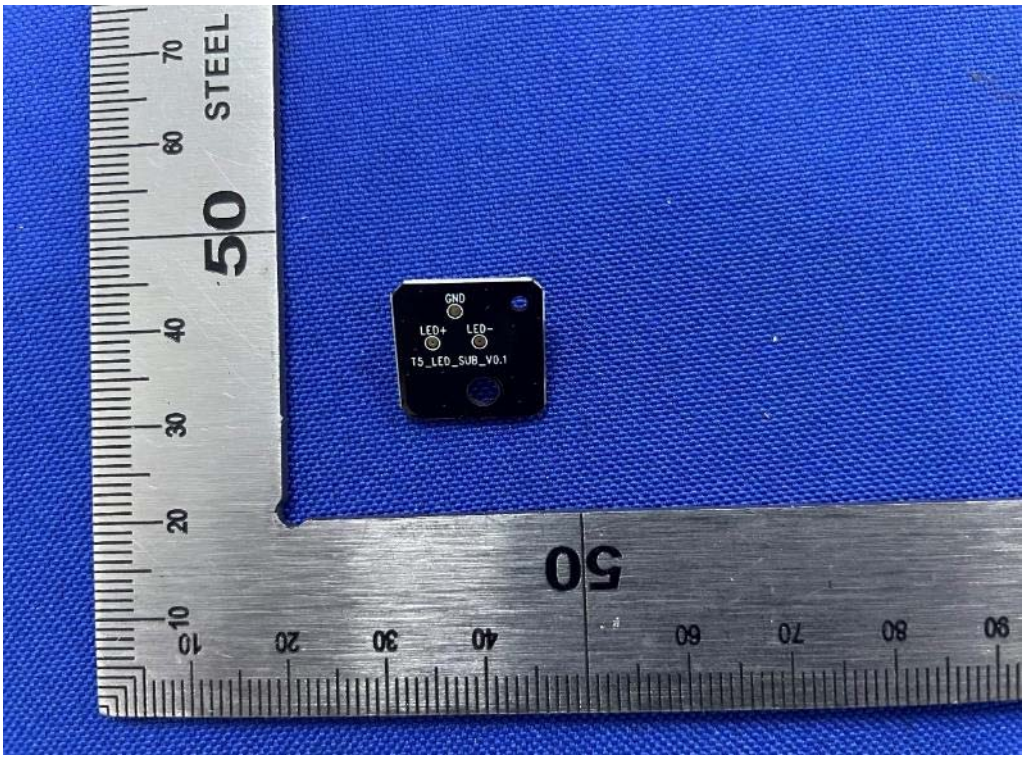

Internal-15 of the sample

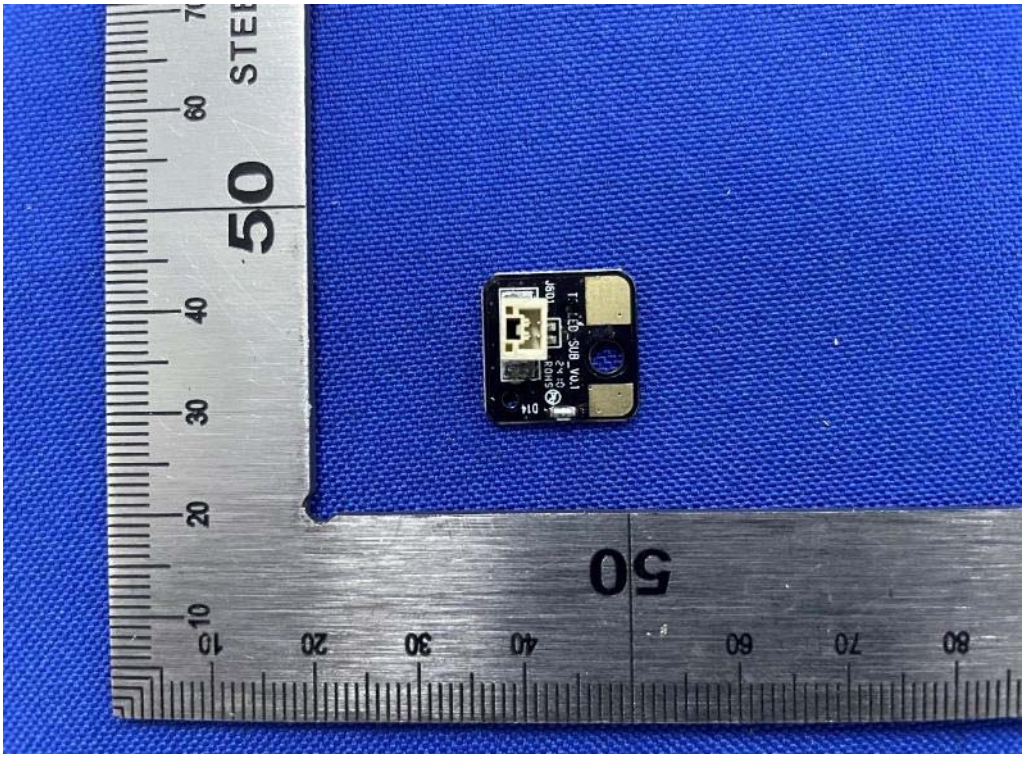

Internal-16 of the sample

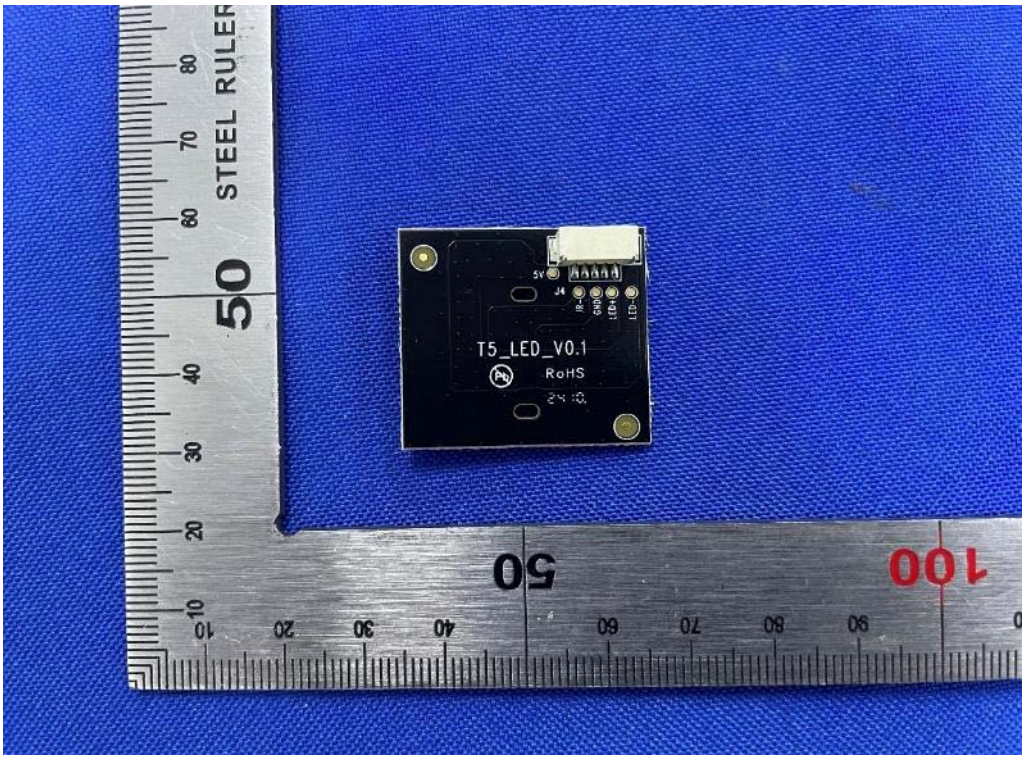

Internal-17 of the sample

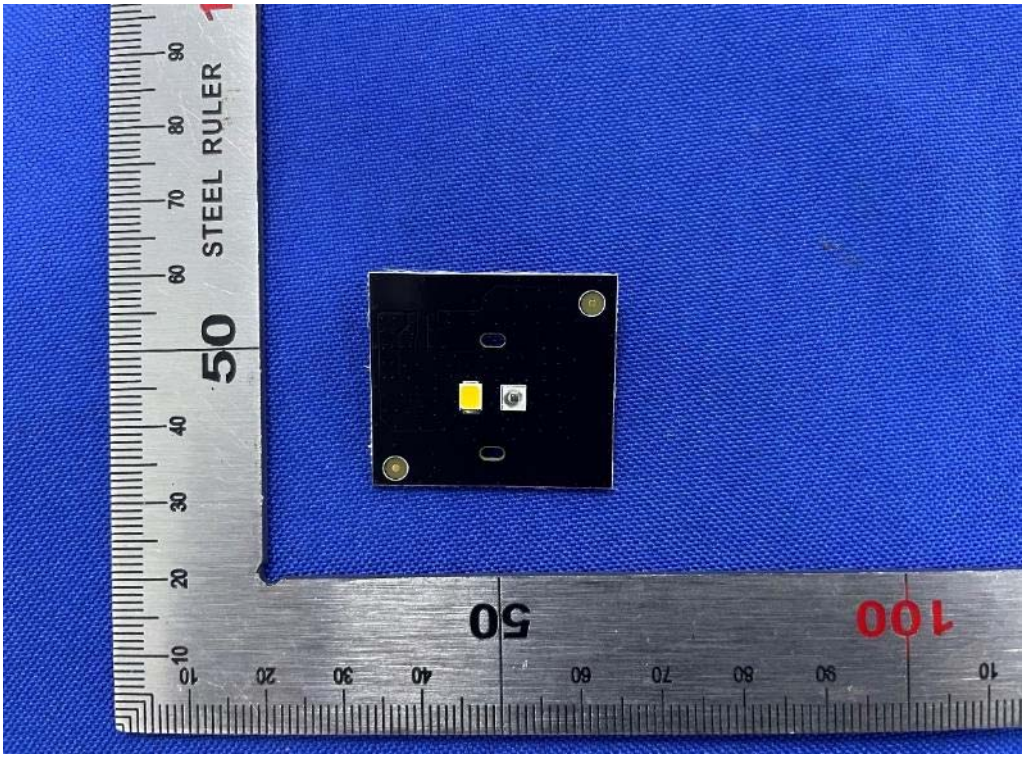

Internal-18 of the sample

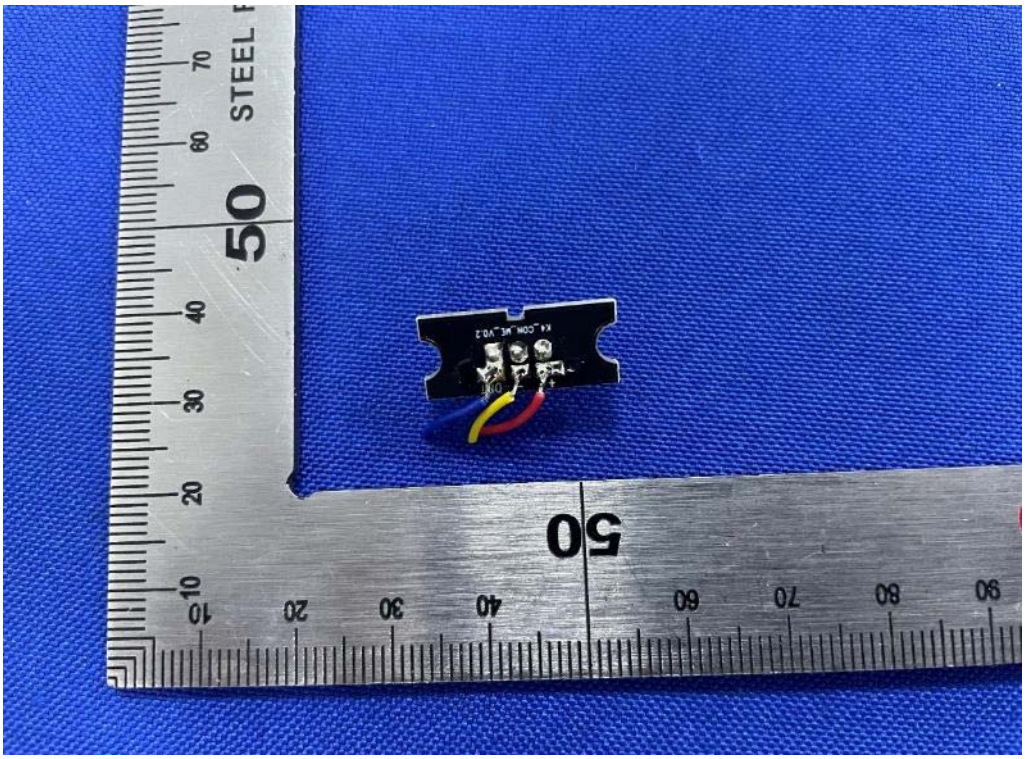

Internal-19 of the sample

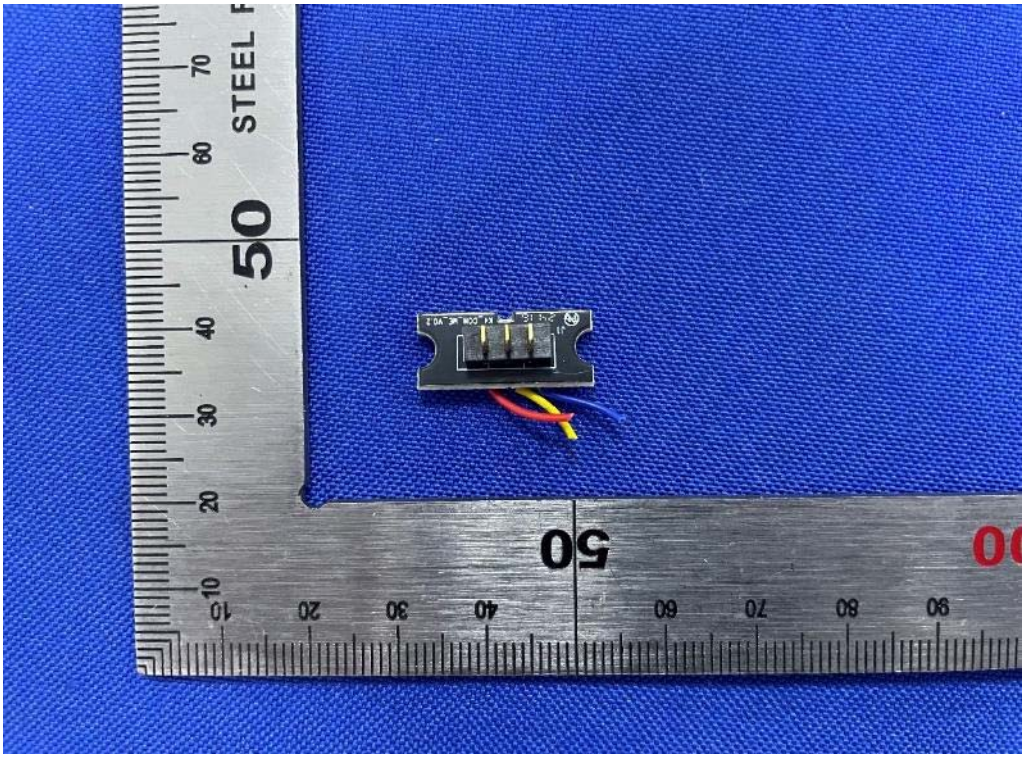

Internal-20 of the sample

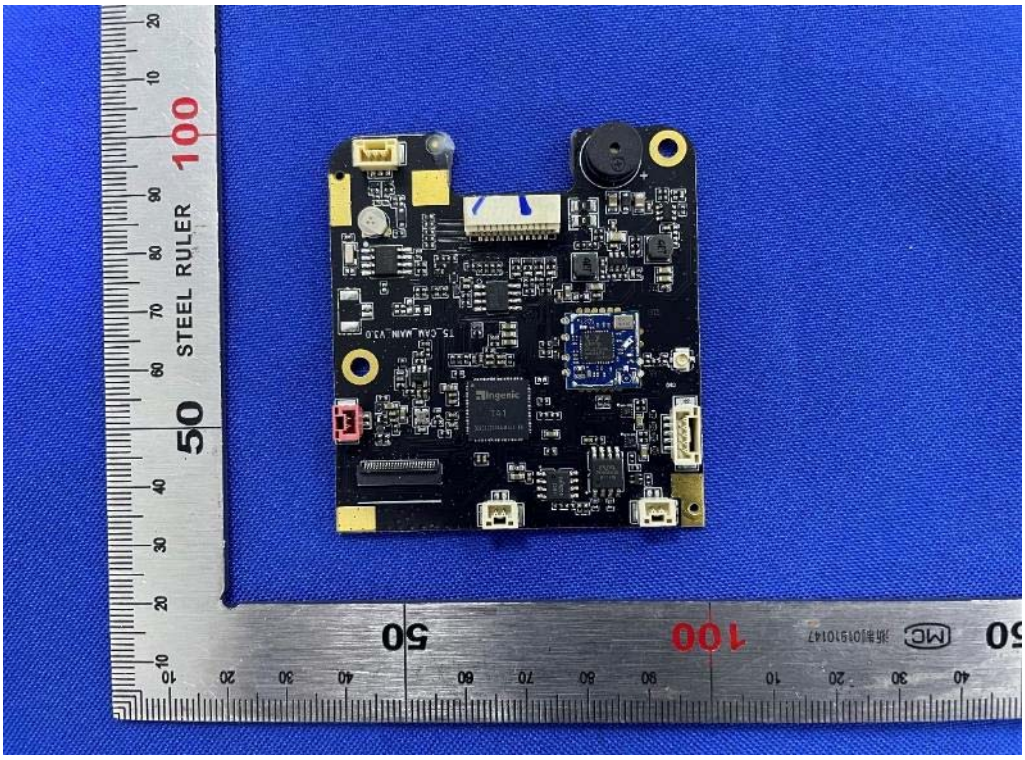

Internal-21 of the sample

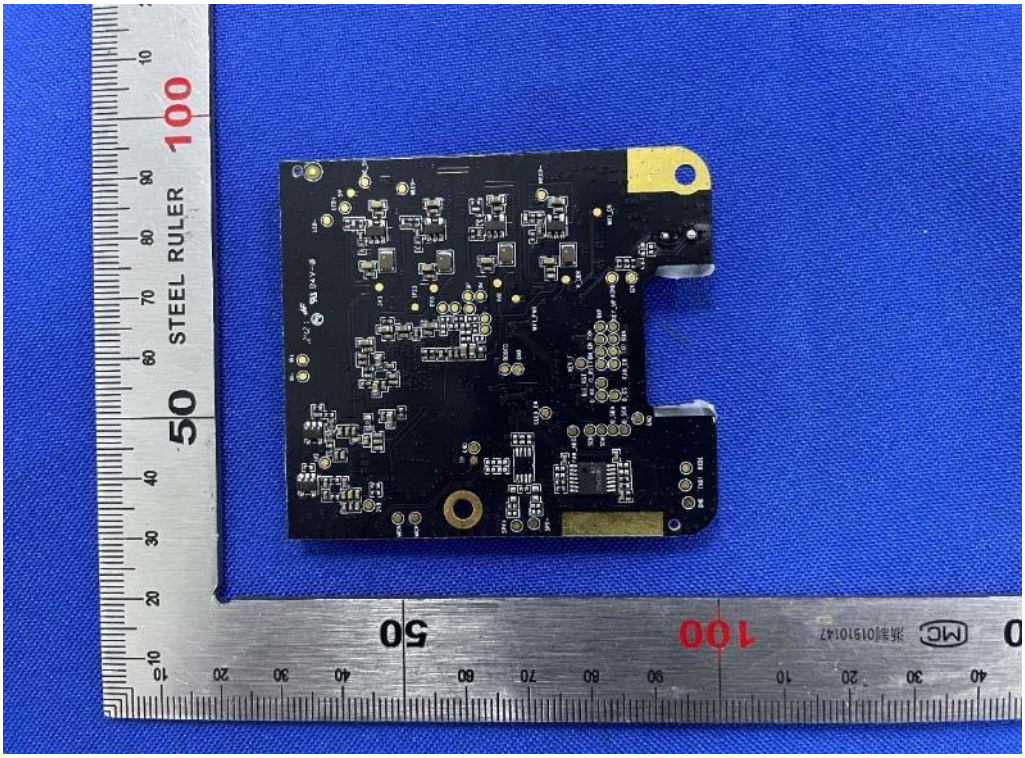

Internal-22 of the sample

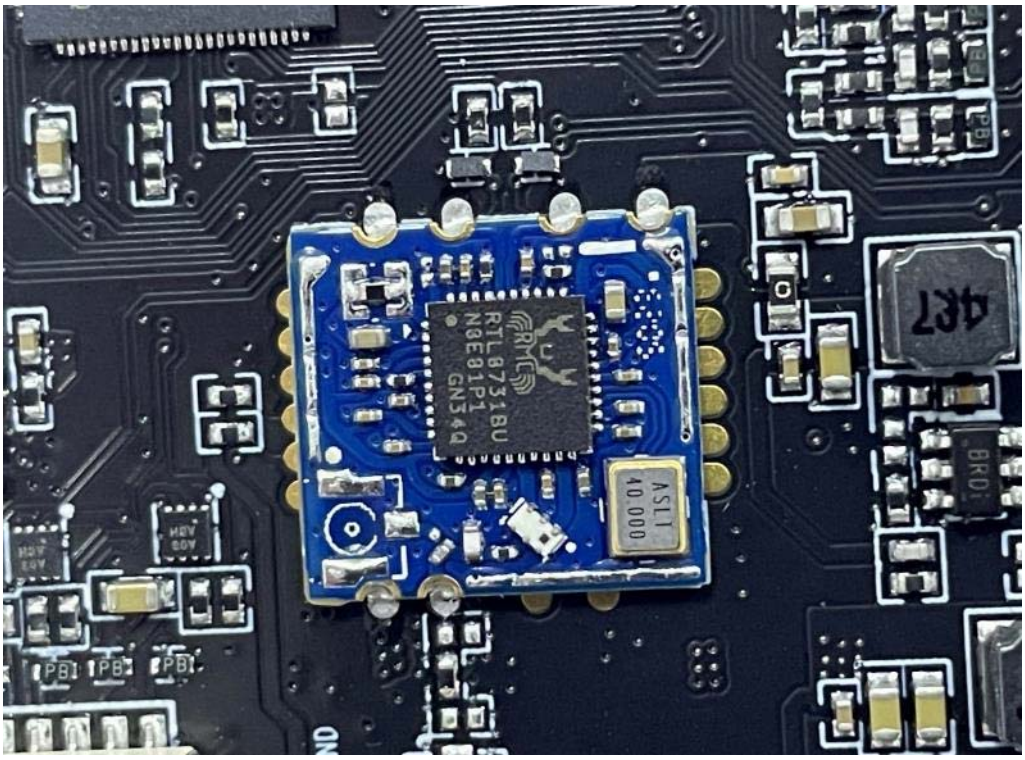

Internal-23 of the sample

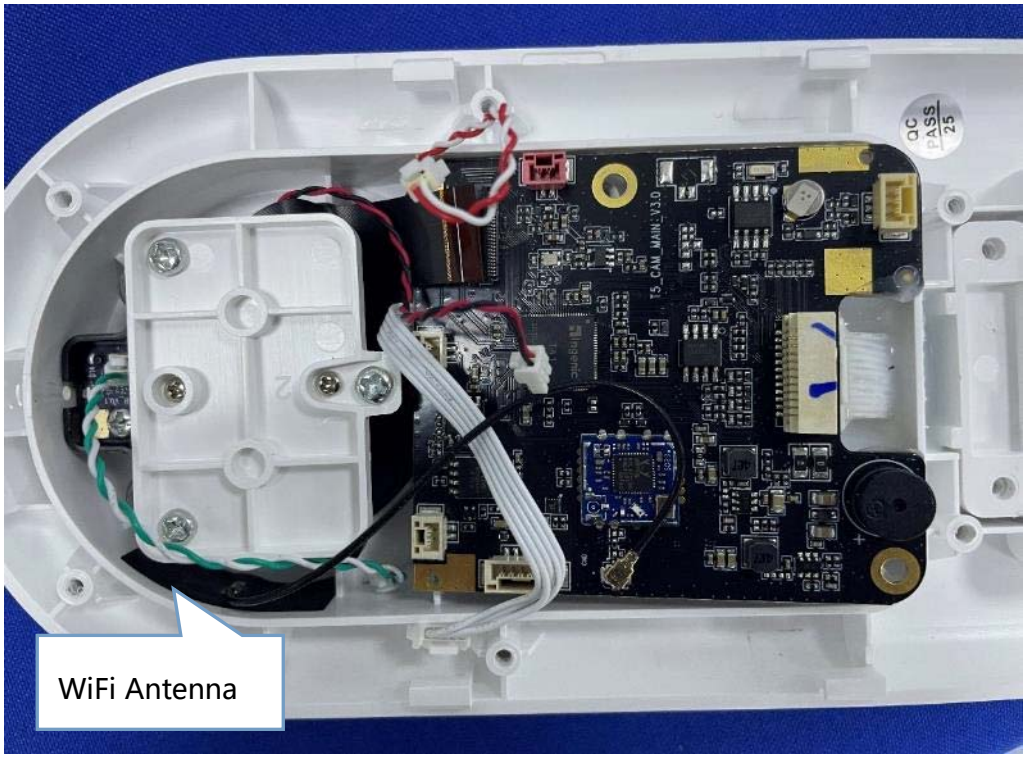

WiFi Antenna position

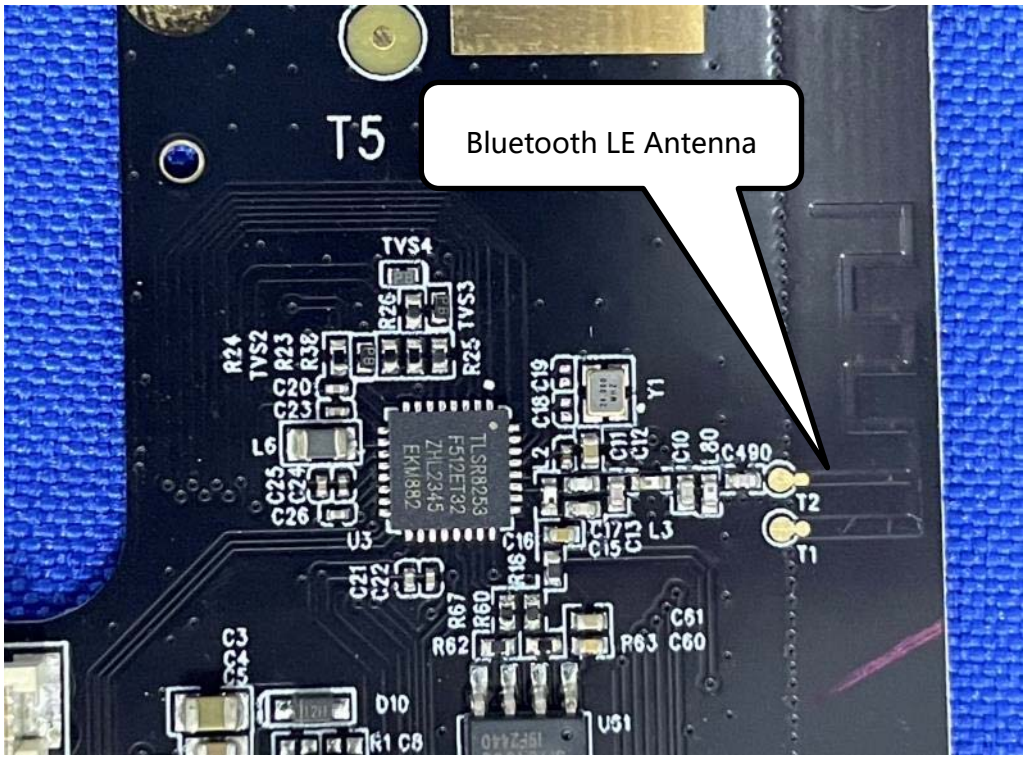

Bluetooth LE Antenna position

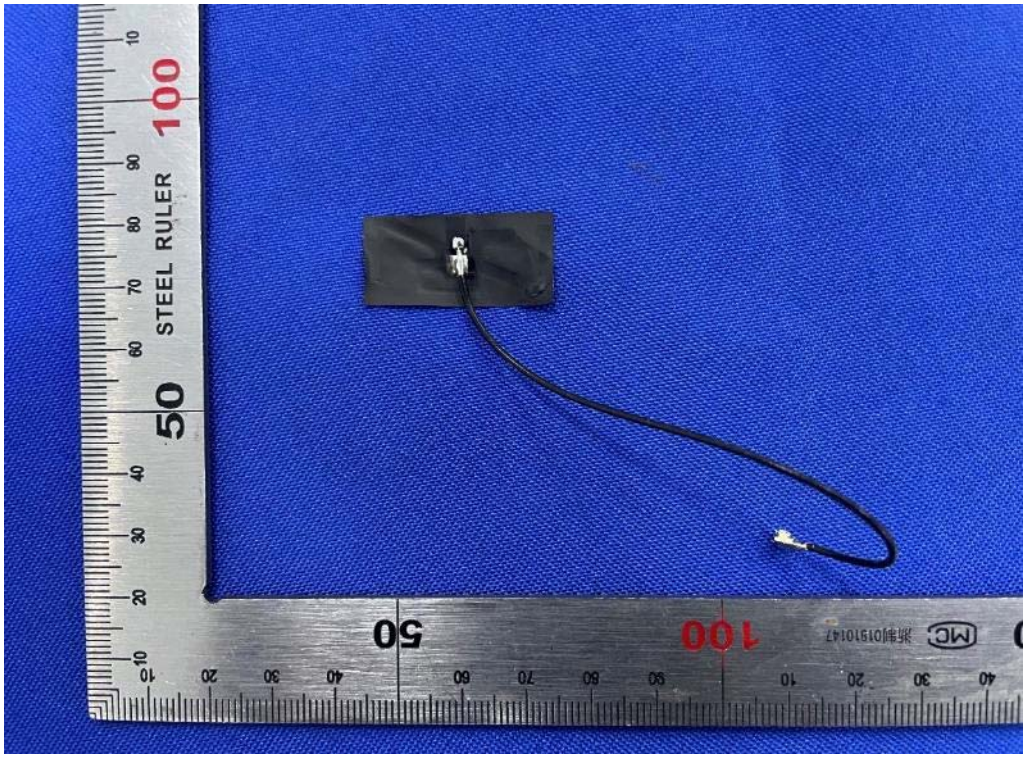

WiFi Antenna Photo-Front

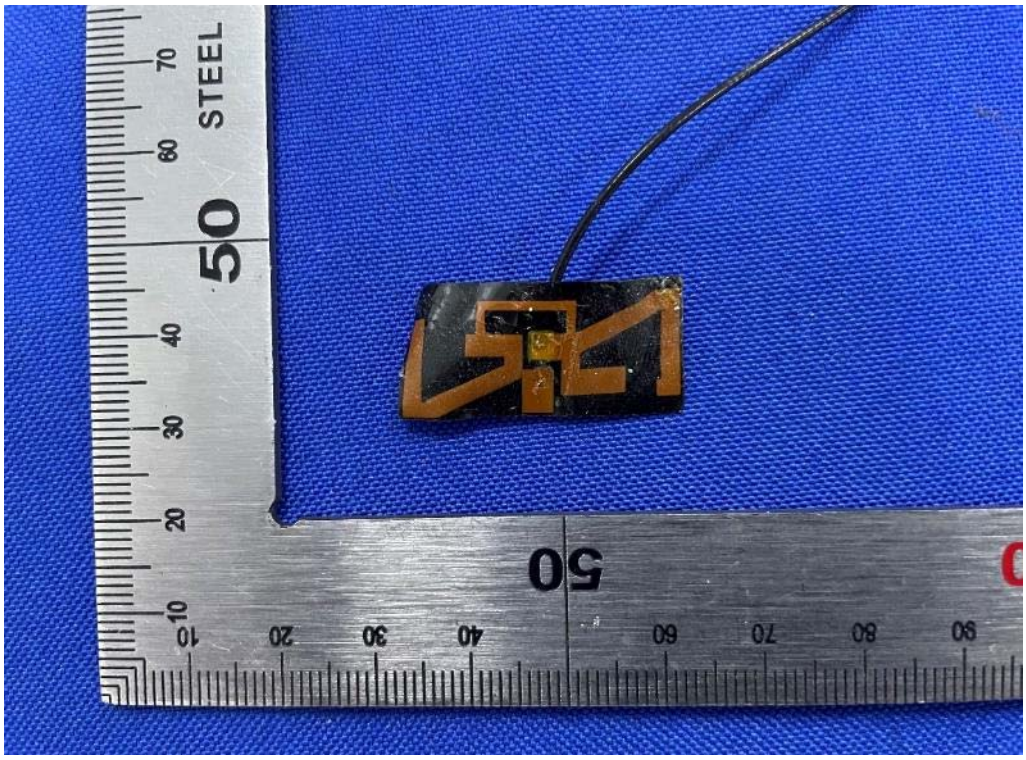

WiFi Antenna Photo-Back

Adapter

Input Port of the sample

5.2 Set-up for Conducted Emissions

5.3 Set-up for Conducted RF test at Antenna Port

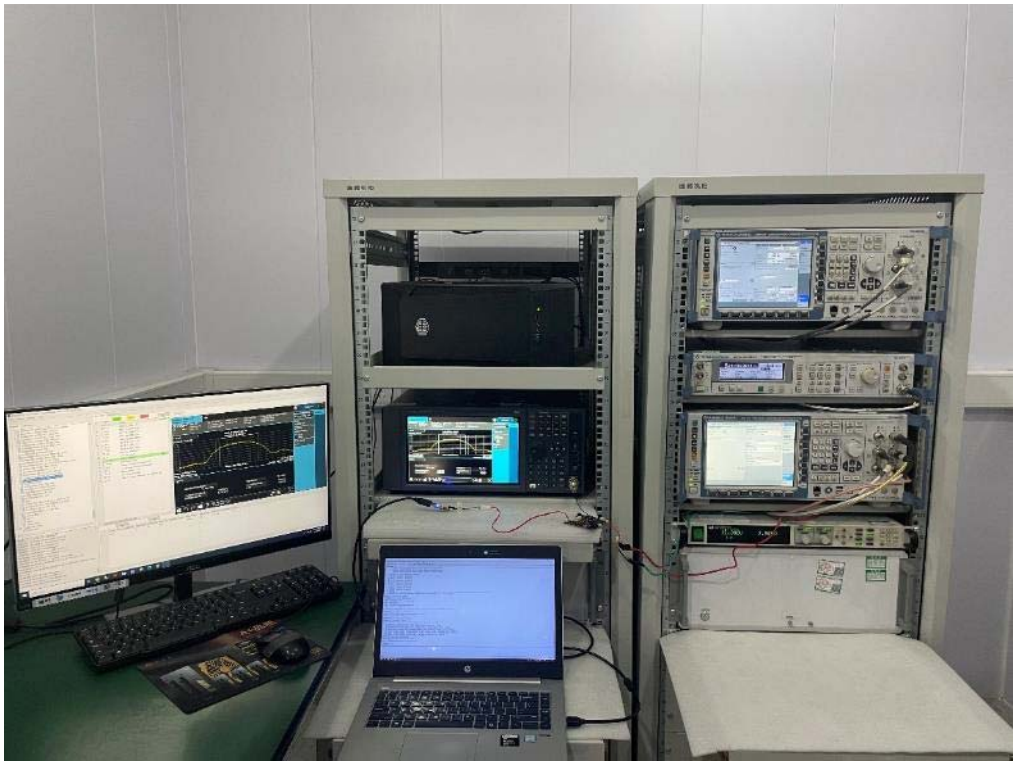

5.4 Set-up for Spurious Emissions below 1GHz

5.5 Set-up for Spurious Emissions above 1GHz

End of the report