

FCC TEST REPORT

REPORT NO.: RF931110L06

MODEL NO.: HT-01

RECEIVED: Nov. 10, 2004

TESTED: Dec. 02 ~ Dec. 16, 2004

ISSUED: Dec. 20, 2004

APPLICANT: Teraoka Weigh-system Pte Ltd

ADDRESS: 4 Leng Kee Road, #05-02/03/04/05 & 11, SIS Building, Singapore 159088

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 48 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	6
3	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	9
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4	DESCRIPTION OF SUPPORT UNITS	12
4	TEST TYPES AND RESULTS	13
4.1	CONDUCTED EMISSION MEASUREMENT	13
4.2	RADIATED EMISSION MEASUREMENT	13
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	13
4.2.2	TEST INSTRUMENTS	14
4.2.3	TEST PROCEDURES	15
4.2.4	DEVIATION FROM TEST STANDARD	15
4.2.5	TEST SETUP	16
4.2.6	EUT OPERATING CONDITIONS	16
4.2.7	TEST RESULTS	17
4.3	6dB BANDWIDTH MEASUREMENT	27
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	27
4.3.2	TEST INSTRUMENTS	27
4.3.3	TEST PROCEDURE	28
4.3.4	DEVIATION FROM TEST STANDARD	28
4.3.5	TEST SETUP	28
4.3.6	EUT OPERATING CONDITIONS	28
4.3.7	TEST RESULTS	29
4.4	MAXIMUM PEAK OUTPUT POWER	32
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	32
4.4.2	TEST INSTRUMENTS	32
4.4.3	TEST PROCEDURES	33
4.4.4	DEVIATION FROM TEST STANDARD	33
4.4.5	TEST SETUP	33
4.4.6	EUT OPERATING CONDITIONS	33
4.4.7	TEST RESULTS	34
4.5	POWER SPECTRAL DENSITY MEASUREMENT	35
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	35
4.5.2	TEST INSTRUMENTS	35



4.5.3	TEST PROCEDURE.....	36
4.5.4	DEVIATION FROM TEST STANDARD	36
4.5.5	TEST SETUP.....	36
4.5.6	EUT OPERATING CONDITIONS	36
4.5.7	TEST RESULTS	37
4.6	BAND EDGES MEASUREMENT	40
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	40
4.6.2	TEST INSTRUMENTS.....	40
4.6.3	TEST PROCEDURE.....	40
4.6.4	DEVIATION FROM TEST STANDARD	40
4.6.5	EUT OPERATING CONDITION	40
4.6.6	TEST RESULTS	41
4.6.7	TEST RESULTS	41
4.7	ANTENNA REQUIREMENT	44
4.7.1	STANDARD APPLICABLE	44
4.7.2	ANTENNA CONNECTED CONSTRUCTION	44
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	45
6	INFORMATION ON THE TESTING LABORATORIES	48

1 CERTIFICATION

PRODUCT : Hi-Touch RF Tag
MODEL NO. : HT-01
BRAND NAME : DIGI
APPLICANT : Teraoka Weigh-system Pte Ltd
TESTED : Dec. 02 ~ Dec. 16, 2004
TEST SAMPLE : ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Candice Chen , **DATE:** Dec. 20, 2004
(Candice Chen)

TECHNICAL

ACCEPTANCE : Gary Chang , **DATE:** Dec. 20, 2004
Responsible for RF (Gary Chang)

APPROVED BY : Cody Chang , **DATE:** Dec. 20, 2004
(Cody Chang,
Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	NA	Power supply is 3Vdc from batteries
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.16dB at 7335.00MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.55 dB
	200MHz ~1000MHz	3.58 dB
	1GHz ~ 18GHz	1.10 dB
	18GHz ~ 40GHz	0.91 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Hi-Touch RF Tag
MODEL NO.	HT-01
POWER SUPPLY	3Vdc from batteries
MODULATION TYPE	O-QPSK
RADIO TECHNOLOGY	DSSS
FREQUENCY RANGE	2405 ~ 2480MHz
NUMBER OF CHANNEL	16
OUTPUT POWER	0.473mW
ANTENNA TYPE	Internal PCB antenna with 0dBi gain
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.


3.2 DESCRIPTION OF TEST MODES

Operated in 2405 ~ 2480MHz Band:

16 channels for 2.4GHz were provided to this EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405 MHz	9	2445 MHz
2	2410 MHz	10	2450 MHz
3	2415 MHz	11	2455 MHz
4	2420 MHz	12	2460 MHz
5	2425 MHz	13	2465 MHz
6	2430 MHz	14	2470 MHz
7	2435 MHz	15	2475 MHz
8	2440 MHz	16	2480 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

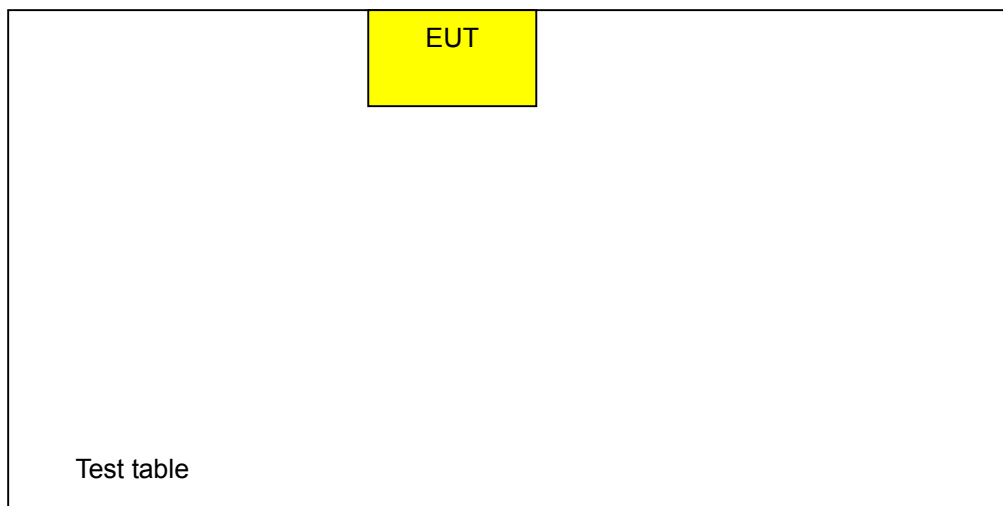

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	-	X	X	X	NA

Where PLC: Power Line Conducted Emission

RE<1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- ☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- ☐ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
1 to 16	-	DSSS	O-QPSK

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types and XYZ axis.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Position
1 to 16	1	DSSS	O-QPSK	X

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Position
A	1 to 16	1, 9, 16	DSSS	O-QPSK	X
B	1 to 16	1, 9, 16	DSSS	O-QPSK	Y
C	1 to 16	1, 9, 16	DSSS	O-QPSK	Z

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types and XYZ axis.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Position
1 to 16	1, 16	DSSS	O-QPSK	X

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types and XYZ axis .
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Position
1 to 16	1, 9, 16	DSSS	O-QPSK	X

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Hi-Touch RF Tag. According to the specifications of the manufacturer, it must complies with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)**ANSI C63.4- 2003**

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NA	NA	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

NA

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	Jun. 08, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Jun. 03, 2005
BILOG Antenna SCHWARZBECK	VULB9168	9168-153	Feb. 03, 2005
HORN Antenna SCHWARZBECK	9120D	9120D-408	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170243	Feb. 23, 2005
Preamplifier Agilent	8447D	2944A10633	Nov. 09, 2005
Preamplifier Agilent	8449B	3008A01964	Nov. 06, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Mar. 05, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Mar. 05, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 2.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC4924-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

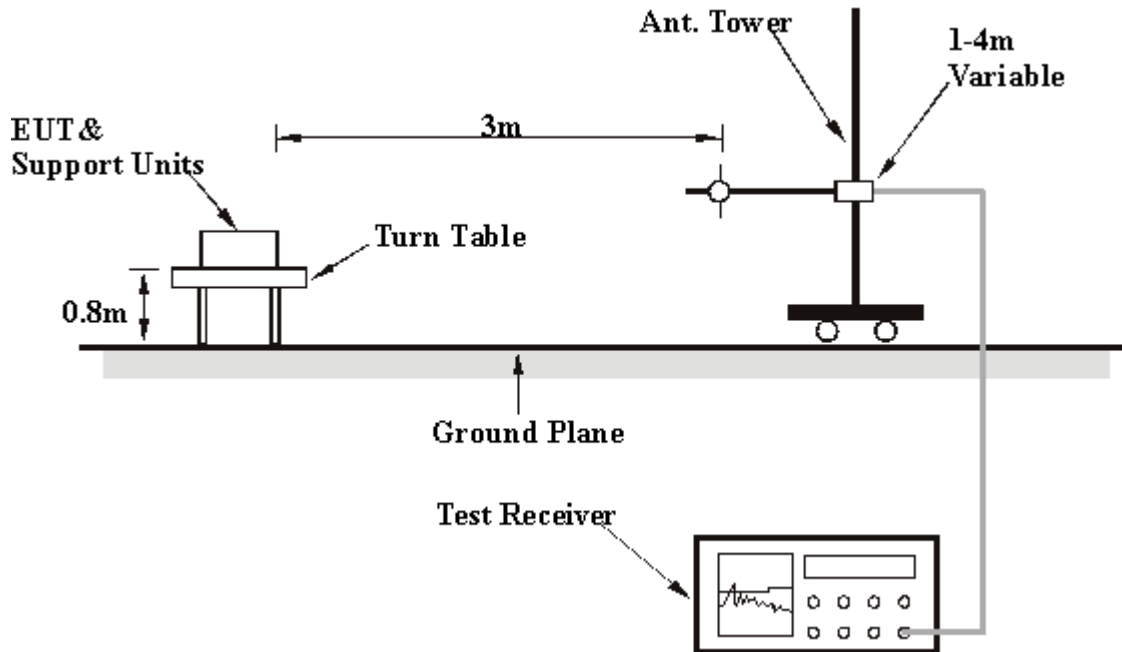

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

The EUT has been placed on the table. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.

4.2.7 TEST RESULTS

Below 1GHz Worst-Case Data

EUT	Hi-Touch RF Tag	MODEL	HT-01
CHANNEL	1	FREQUENCY RANGE	Below 1 GHz
MODULATION TYPE	O-QPSK	DETECTOR FUNCTION	Quasi-Peak
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	TEST MODE	A (X-Axis)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	20.20 QP	40.00	-19.80	2.00 H	277	5.69	14.50
2	136.91	17.33 QP	43.50	-26.17	2.00 H	148	3.40	13.92
3	434.33	19.26 QP	46.00	-26.74	2.00 H	346	1.51	17.75
4	671.48	22.67 QP	46.00	-23.33	2.00 H	211	0.49	22.18
5	762.85	23.62 QP	46.00	-22.38	1.00 H	271	-0.08	23.70
6	830.88	23.38 QP	46.00	-22.62	1.00 H	112	-0.69	24.07
7	875.59	24.32 QP	46.00	-21.68	2.00 H	166	-0.44	24.76

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.66	16.50 QP	40.00	-23.50	2.00 V	7	0.61	15.89
2	148.58	14.28 QP	43.50	-29.22	1.00 V	100	-0.11	14.38
3	570.40	21.94 QP	46.00	-24.06	1.00 V	73	1.54	20.40
4	757.01	22.97 QP	46.00	-23.03	3.00 V	76	-0.73	23.69
5	797.84	22.84 QP	46.00	-23.16	1.00 V	238	-0.93	23.77
6	834.77	24.17 QP	46.00	-21.83	4.00 V	109	0.07	24.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

1 ~ 25GHz Worst-Case Data (X-Axis)

EUT	Hi-Touch RF Tag	MODEL	HT-01
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
MODULATION TYPE	O-QPSK	DETECTOR FUNCTION	Quasi-Peak
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	TEST MODE	A (X-Axis)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	47.12 PK	74.00	-26.88	1.38 H	309	15.51	31.61
2	*2405.00	96.26 PK			1.38 H	309	64.60	31.66
2	*2405.00	88.36 AV			1.38 H	309	56.70	31.66
3	4810.00	56.87 PK	74.00	-17.13	1.06 H	352	19.31	37.56
3	4810.00	46.41 AV	54.00	-7.59	1.06 H	352	8.85	37.56
4	7215.00	62.31 PK	74.00	-11.69	1.42 H	114	18.23	44.09
4	7215.00	52.34 AV	54.00	-1.66	1.42 H	114	8.26	44.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	39.27 PK	74.00	-34.73	1.00 V	340	7.66	31.61
2	*2405.00	88.41 PK			1.00 V	340	56.75	31.66
2	*2405.00	80.51 AV			1.00 V	340	48.85	31.66
3	4810.00	54.05 PK	74.00	-19.95	1.09 V	28	16.49	37.56
3	4810.00	44.52 AV	54.00	-9.48	1.09 V	28	6.96	37.56
4	7215.00	59.86 PK	74.00	-14.14	1.05 V	35	15.78	44.09
4	7215.00	50.44 AV	54.00	-3.56	1.05 V	35	6.36	44.09

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency.

EUT	Hi-Touch RF Tag	MODEL	HT-01
CHANNEL	9	FREQUENCY RANGE	1~25 GHz
MODULATION TYPE	O-QPSK	DETECTOR FUNCTION	Quasi-Peak
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	TEST MODE	A (X-Axis)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2445.00	95.37 PK			1.38 H	261	63.47	31.90
1	*2445.00	87.47 AV			1.38 H	261	55.57	31.90
2	4890.00	48.59 PK	74.00	-25.41	1.19 H	177	10.91	37.68
2	4890.00	36.80 AV	54.00	-17.20	1.19 H	177	-0.88	37.68
3	7335.00	53.30 PK	74.00	-20.70	1.48 H	117	8.89	44.41
3	7335.00	41.73 AV	54.00	-12.27	1.48 H	117	-2.68	44.41

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2445.00	85.84 PK			1.00 V	303	53.94	31.90
1	*2445.00	77.94 AV			1.00 V	303	46.04	31.90
2	4890.00	46.30 PK	74.00	-27.70	1.13 V	278	8.62	37.68
2	4890.00	32.87 AV	54.00	-21.13	1.13 V	278	-4.81	37.68
3	7335.00	52.14 PK	74.00	-21.86	1.04 V	268	7.73	44.41
3	7335.00	40.95 AV	54.00	-13.05	1.04 V	268	-3.46	44.41

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	Hi-Touch RF Tag	MODEL	HT-01
CHANNEL	16	FREQUENCY RANGE	1~25 GHz
MODULATION TYPE	O-QPSK	DETECTOR FUNCTION	Quasi-Peak
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	TEST MODE	A (X-Axis)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	93.87 PK			1.30 H	229	61.76	32.11
1	*2480.00	85.97 AV			1.30 H	229	53.86	32.11
2	2483.50	60.51 PK	74.00	-13.49	1.30 H	229	28.38	32.13
2	2483.50	52.61 AV	54.00	-1.39	1.30 H	229	20.48	32.13
3	4960.00	57.26 PK	74.00	-16.74	1.06 H	248	19.45	37.81
3	4960.00	47.11 AV	54.00	-6.89	1.06 H	248	9.30	37.81

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	85.96 PK			1.20 V	325	53.85	32.11
1	*2480.00	78.06 AV			1.20 V	325	45.95	32.11
2	2483.50	52.60 PK	74.00	-21.40	1.20 V	325	20.47	32.13
2	2483.50	44.70 AV	54.00	-9.30	1.20 V	325	12.57	32.13
3	4960.00	46.37 PK	74.00	-27.63	1.27 V	9	8.56	37.81
3	4960.00	35.39 AV	54.00	-18.61	1.27 V	9	-2.42	37.81

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

1 ~ 25GHz Worst-Case Data (Y-Axis)

EUT	Hi-Touch RF Tag	MODEL	HT-01
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
MODULATION TYPE	O-QPSK	DETECTOR FUNCTION	Quasi-Peak
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	TEST MODE	B (Y-Axis)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	45.15 PK	74.00	-28.85	1.44 H	216	13.54	31.61
2	*2405.00	94.29 PK			1.04 H	109	62.63	31.66
2	*2405.00	86.39 AV			1.04 H	109	54.73	31.66
3	4810.00	51.81 PK	74.00	-22.19	1.00 H	354	14.25	37.56
3	4810.00	41.43 AV	54.00	-12.57	1.00 H	354	3.87	37.56
4	7215.00	58.88 PK	74.00	-15.12	1.15 H	180	14.80	44.09
4	7215.00	49.41 AV	54.00	-4.59	1.15 H	180	5.33	44.09
5	9620.00	55.24 PK	74.00	-18.76	1.14 H	268	6.88	48.36
5	9620.00	44.98 AV	54.00	-9.02	1.14 H	268	-3.38	48.36

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	41.17 PK	74.00	-32.83	1.44 V	216	9.56	31.61
2	*2405.00	90.31 PK			1.44 V	216	58.65	31.66
2	*2405.00	82.41 AV			1.44 V	216	50.75	31.66
3	4810.00	61.11 PK	74.00	-12.89	1.08 V	226	23.55	37.56
3	4810.00	49.76 AV	54.00	-4.24	1.08 V	226	12.20	37.56
4	7215.00	65.02 PK	70.31	-5.29	1.62 V	1	20.94	44.09
4	7215.00	55.89 AV	62.41	-6.52	1.62 V	1	11.81	44.09
5	9620.00	57.19 PK	74.00	-16.81	1.64 V	266	8.83	48.36
5	9620.00	46.27 AV	54.00	-7.73	1.64 V	266	-2.09	48.36

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency.

EUT	Hi-Touch RF Tag	MODEL	HT-01
CHANNEL	9	FREQUENCY RANGE	1~25 GHz
MODULATION TYPE	O-QPSK	DETECTOR FUNCTION	Quasi-Peak
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	TEST MODE	B (Y-Axis)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2445.00	93.85 PK			1.39 H	263	61.95	31.90
1	*2445.00	85.95 AV			1.39 H	263	54.05	31.90
2	4890.00	48.26 PK	74.00	-25.74	1.00 H	8	10.58	37.68
2	4890.00	36.36 AV	54.00	-17.64	1.00 H	8	-1.32	37.68
3	7335.00	52.95 PK	74.00	-21.05	1.75 H	169	8.54	44.41
3	7335.00	41.28 AV	54.00	-12.72	1.75 H	169	-3.13	44.41

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2445.00	88.65 PK			1.30 V	228	56.75	31.90
1	*2445.00	80.75 AV			1.30 V	228	48.85	31.90
2	4890.00	56.81 PK	74.00	-17.19	1.49 V	72	19.13	37.68
2	4890.00	42.98 AV	54.00	-11.02	1.49 V	72	5.30	37.68
3	7335.00	56.27 PK	74.00	-17.73	1.45 V	280	11.86	44.41
3	7335.00	44.67 AV	54.00	-9.33	1.45 V	280	0.26	44.41

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	Hi-Touch RF Tag	MODEL	HT-01
CHANNEL	16	FREQUENCY RANGE	1~25 GHz
MODULATION TYPE	O-QPSK	DETECTOR FUNCTION	Quasi-Peak
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	TEST MODE	B (Y-Axis)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	92.59 PK			1.29 H	232	60.48	32.11
1	*2480.00	84.69 AV			1.29 H	232	52.58	32.11
2	2483.50	59.23 PK	74.00	-14.77	1.29 H	232	27.10	32.13
2	2483.50	51.33 AV	54.00	-2.67	1.29 H	232	19.20	32.13
3	4960.00	50.12 PK	74.00	-23.88	1.42 H	187	12.31	37.81
3	4960.00	43.89 AV	54.00	-10.11	1.42 H	187	6.08	37.81

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	87.43 PK			1.06 V	77	55.32	32.11
1	*2480.00	79.53 AV			1.06 V	77	47.42	32.11
2	2483.50	54.07 PK	74.00	-19.93	1.06 V	77	21.94	32.13
2	2483.50	46.17 AV	54.00	-7.83	1.06 V	77	14.04	32.13
3	4960.00	53.80 PK	74.00	-20.20	1.50 V	266	15.99	37.81
3	4960.00	43.82 AV	54.00	-10.18	1.50 V	266	6.01	37.81

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

1 ~ 25GHz Worst-Case Data (Z-Axis)

EUT	Hi-Touch RF Tag	MODEL	HT-01
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
MODULATION TYPE	O-QPSK	DETECTOR FUNCTION	Quasi-Peak
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	TEST MODE	C (Z-Axis)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	40.35 PK	74.00	-33.65	1.44 H	216	8.74	31.61
2	*2405.00	89.39 PK			1.45 H	326	57.73	31.66
2	*2405.00	81.49 AV			1.45 H	326	49.83	31.66
3	4810.00	59.48 PK	74.00	-14.52	1.04 H	346	21.92	37.56
3	4810.00	47.92 AV	54.00	-6.08	1.04 H	346	10.36	37.56
4	7215.00	64.39 PK	69.39	-5.00	1.53 H	307	20.31	44.09
4	7215.00	54.37 AV	61.49	-7.12	1.53 H	307	10.29	44.09
5	9620.00	58.55 PK	74.00	-15.45	1.27 H	309	10.19	48.36
5	9620.00	45.54 AV	54.00	-8.46	1.27 H	309	-2.82	48.36

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	44.88 PK	74.00	-29.12	1.00 V	348	13.27	31.61
2	*2405.00	94.02 PK			1.00 V	348	62.36	31.66
2	*2405.00	86.12 AV			1.00 V	348	54.46	31.66
3	4810.00	52.66 PK	74.00	-21.34	1.47 V	238	15.10	37.56
3	4810.00	42.13 AV	54.00	-11.87	1.47 V	238	4.57	37.56
4	7215.00	60.28 PK	74.00	-13.72	1.34 V	42	16.19	44.09
4	7215.00	50.10 AV	54.00	-3.90	1.34 V	42	6.01	44.09
5	9620.00	57.21 PK	74.00	-16.79	1.22 V	243	8.85	48.36
5	9620.00	46.17 AV	54.00	-7.83	1.22 V	243	-2.19	48.36

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency.

EUT	Hi-Touch RF Tag	MODEL	HT-01
CHANNEL	9	FREQUENCY RANGE	1~25 GHz
MODULATION TYPE	O-QPSK	DETECTOR FUNCTION	Quasi-Peak
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	TEST MODE	C (Z-Axis)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2445.00	88.31 PK			1.48 H	299	56.41	31.90
1	*2445.00	80.41 AV			1.48 H	299	48.51	31.90
2	4890.00	58.36 PK	74.00	-15.64	1.26 H	308	20.68	37.68
2	4890.00	46.33 AV	54.00	-7.67	1.26 H	308	8.65	37.68
3	7335.00	63.21 PK	74.00	-10.79	1.21 H	113	18.80	44.41
3	7335.00	53.84 AV	54.00	-0.16	1.21 H	113	9.43	44.41
4	9780.00	59.36 PK	74.00	-14.64	1.63 H	217	10.89	48.47
4	9780.00	45.88 AV	54.00	-8.12	1.63 H	217	-2.59	48.47

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2445.00	93.28 PK			1.24 V	338	61.38	31.90
1	*2445.00	85.38 AV			1.24 V	338	53.48	31.90
2	4890.00	51.10 PK	74.00	-22.90	1.25 V	286	13.42	37.68
2	4890.00	43.26 AV	54.00	-10.74	1.25 V	286	5.58	37.68
3	7335.00	57.96 PK	74.00	-16.04	1.47 V	22	13.55	44.41
3	7335.00	47.89 AV	54.00	-6.11	1.47 V	22	3.48	44.41
4	9780.00	52.39 PK	74.00	-21.61	1.00 V	246	3.92	48.47
4	9780.00	42.98 AV	54.00	-11.02	1.00 V	246	-5.49	48.47

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	Hi-Touch RF Tag	MODEL	HT-01
CHANNEL	16	FREQUENCY RANGE	1~25 GHz
MODULATION TYPE	O-QPSK	DETECTOR FUNCTION	Quasi-Peak
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	TEST MODE	C (Z-Axis)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	87.84 PK			1.19 H	321	55.73	32.11
1	*2480.00	79.94 AV			1.19 H	321	47.83	32.11
2	2483.50	54.48 PK	74.00	-19.52	1.19 H	321	22.35	32.13
2	2483.50	46.58 AV	54.00	-7.42	1.19 H	321	14.45	32.13
3	4960.00	57.98 PK	74.00	-16.02	1.33 H	228	20.17	37.81
3	4960.00	47.25 AV	54.00	-6.75	1.33 H	228	9.44	37.81
4	7440.00	61.24 PK	74.00	-12.76	1.25 H	147	16.61	44.63
4	7440.00	51.01 AV	54.00	-2.99	1.25 H	147	6.38	44.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	93.02 PK			1.36 V	359	60.91	32.11
1	*2480.00	85.12 AV			1.36 V	359	53.01	32.11
2	2483.50	59.66 PK	74.00	-14.34	1.36 V	359	27.53	32.13
2	2483.50	51.76 AV	54.00	-2.24	1.36 V	359	19.63	32.13
3	4960.00	52.36 PK	74.00	-21.64	1.42 V	144	14.55	37.81
3	4960.00	42.65 AV	54.00	-11.35	1.42 V	144	4.84	37.81
4	7440.00	58.68 PK	74.00	-15.32	1.69 V	338	14.05	44.63
4	7440.00	48.25 AV	54.00	-5.75	1.69 V	338	3.62	44.63

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

DSSS modulation


EUT	Hi-Touch RF Tag	MODEL	HT-01
MODULATION TYPE	O-QPSK	ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	TESTED BY	Leo Hung

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2405	1.56	0.5	PASS
9	2445	1.60	0.5	PASS
16	2480	1.62	0.5	PASS


CH 1

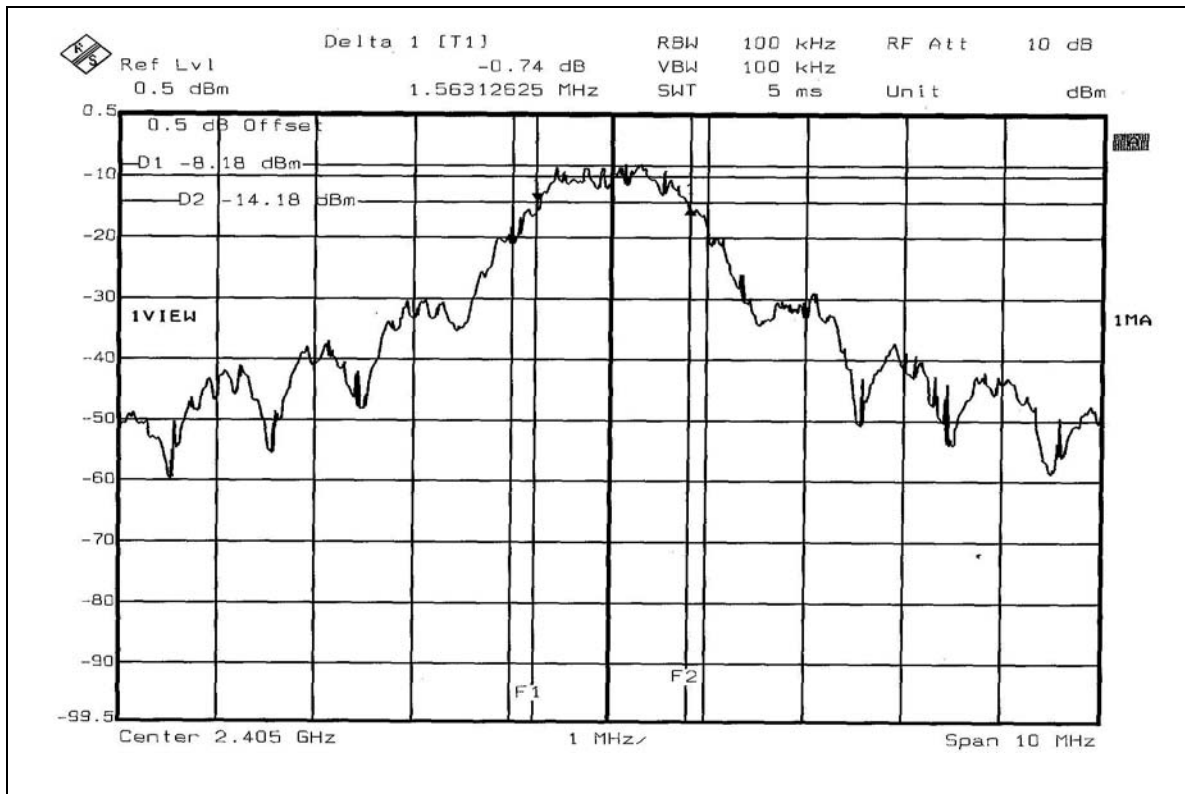

CH 9

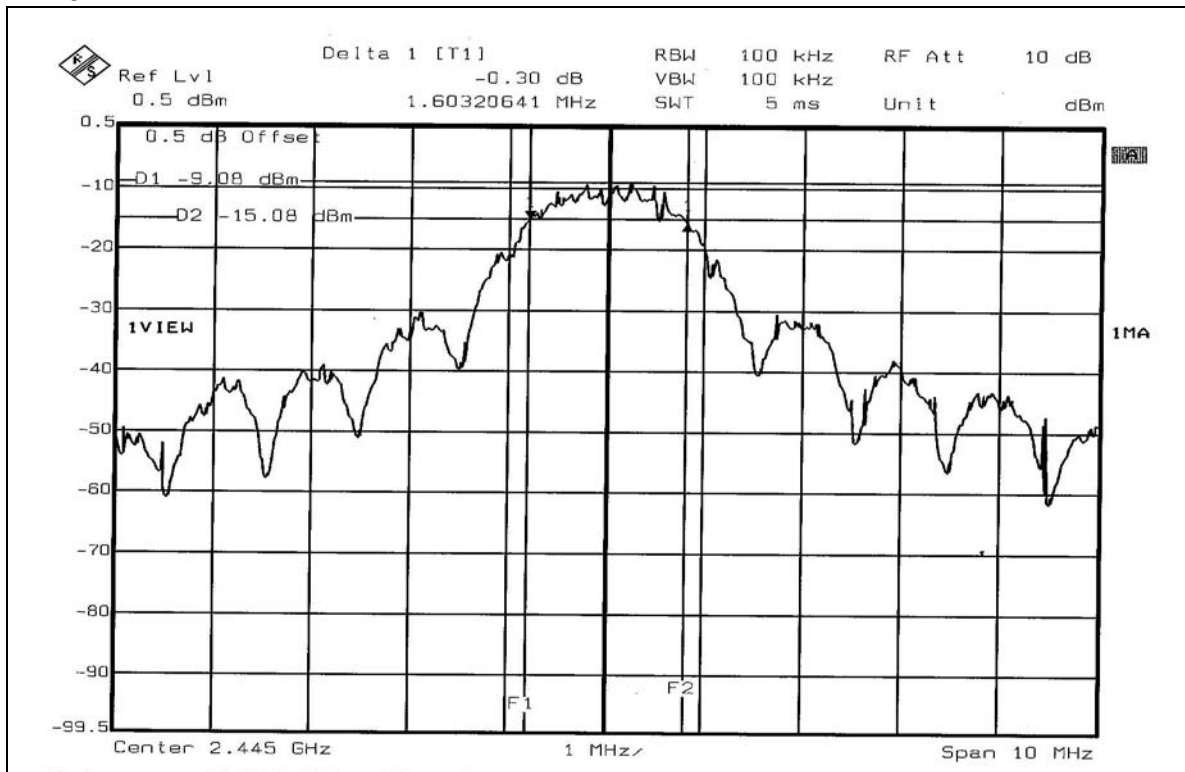

CH 16

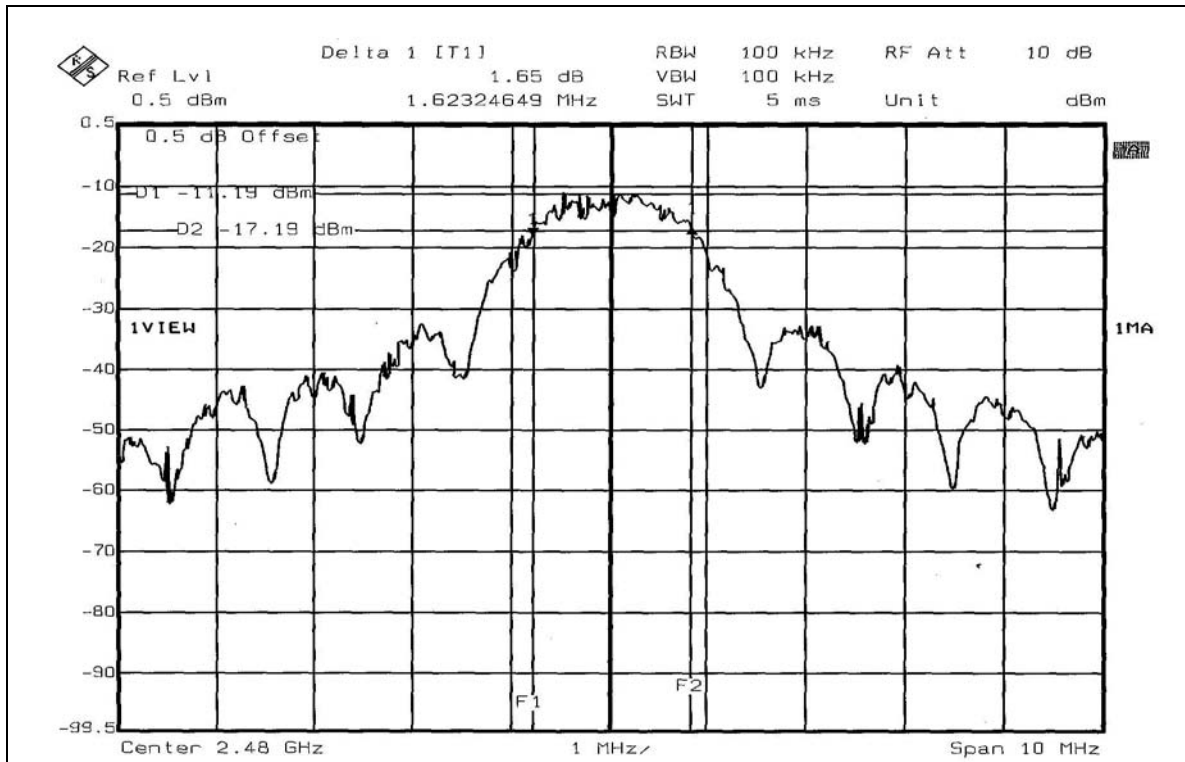

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 01, 2005
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G. was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

DSSS modulation

EUT	Hi-Touch RF Tag	MODEL	HT-01
MODULATION TYPE	O-QPSK	ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	TESTED BY	Leo Hung

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2405	0.473	-3.25	30	PASS
9	2445	0.371	-4.31	30	PASS
16	2480	0.252	-5.99	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6


4.5.7 TEST RESULTS

DSSS modulation


EUT	Hi-Touch RF Tag	MODEL	HT-01
MODULATION TYPE	O-QPSK	ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	TESTED BY	Leo Hung

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2405	-17.07	8	PASS
9	2445	-17.92	8	PASS
16	2480	-19.25	8	PASS


CH 1

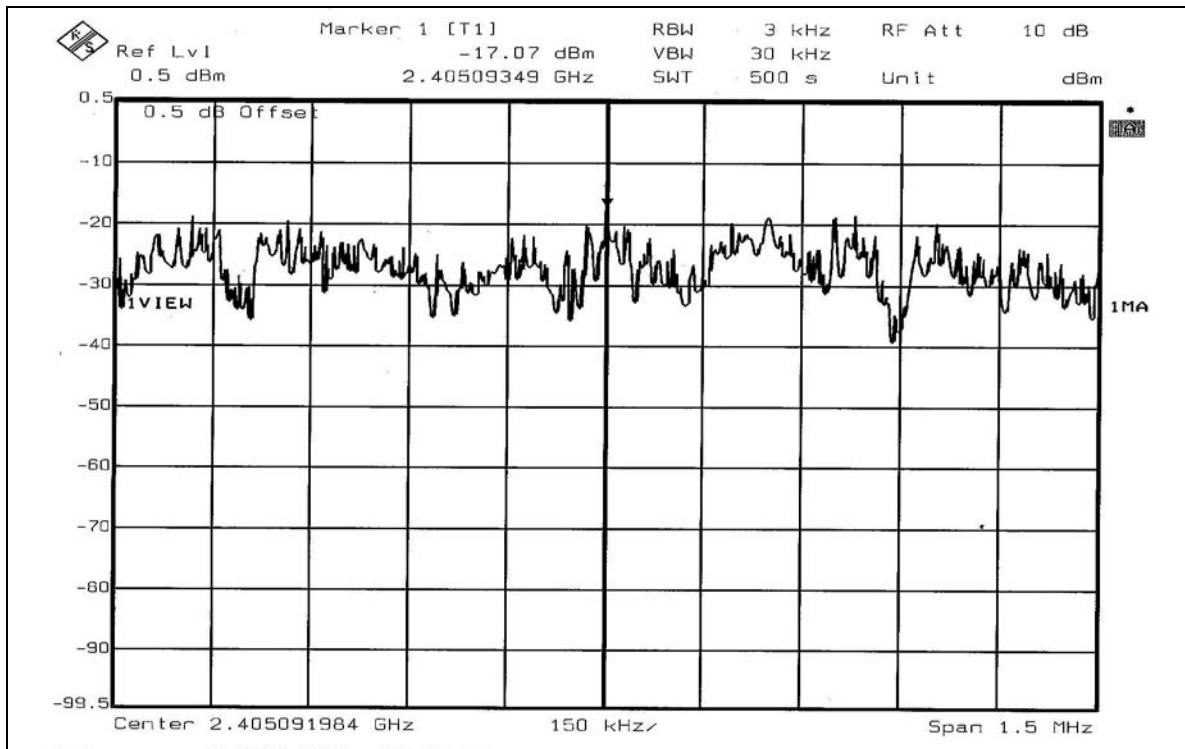

CH 9

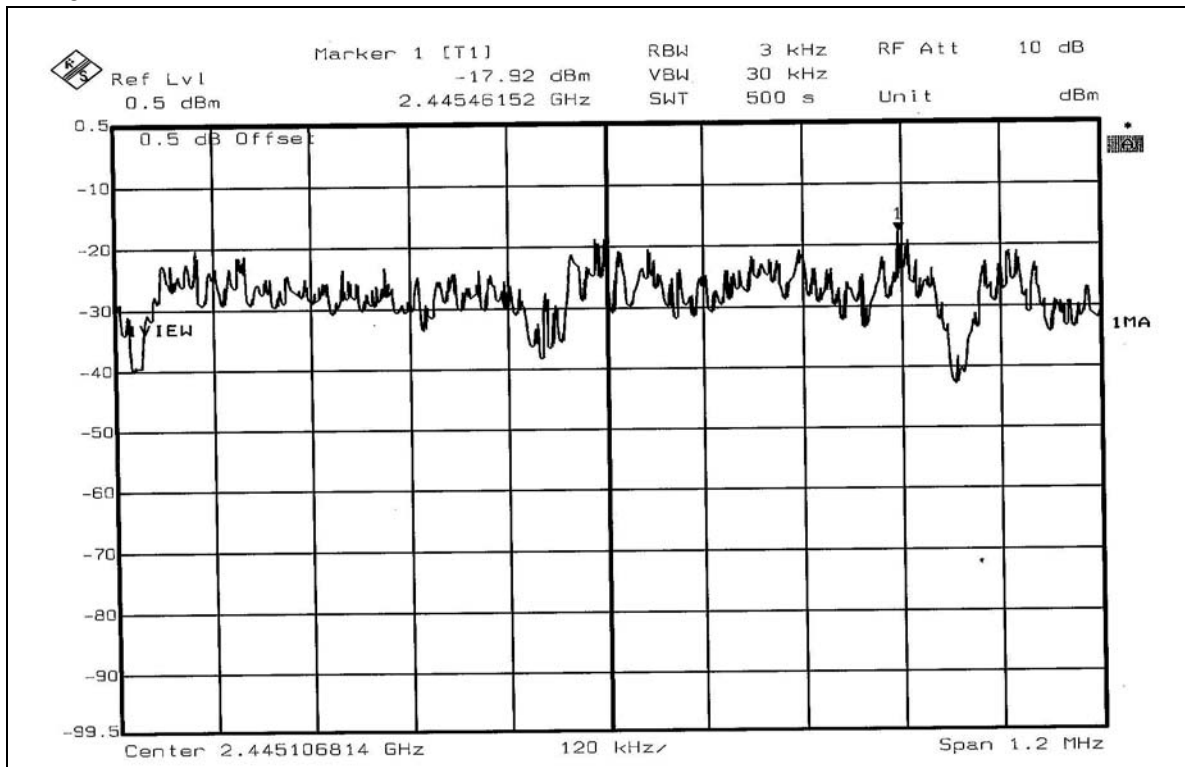

CH 16

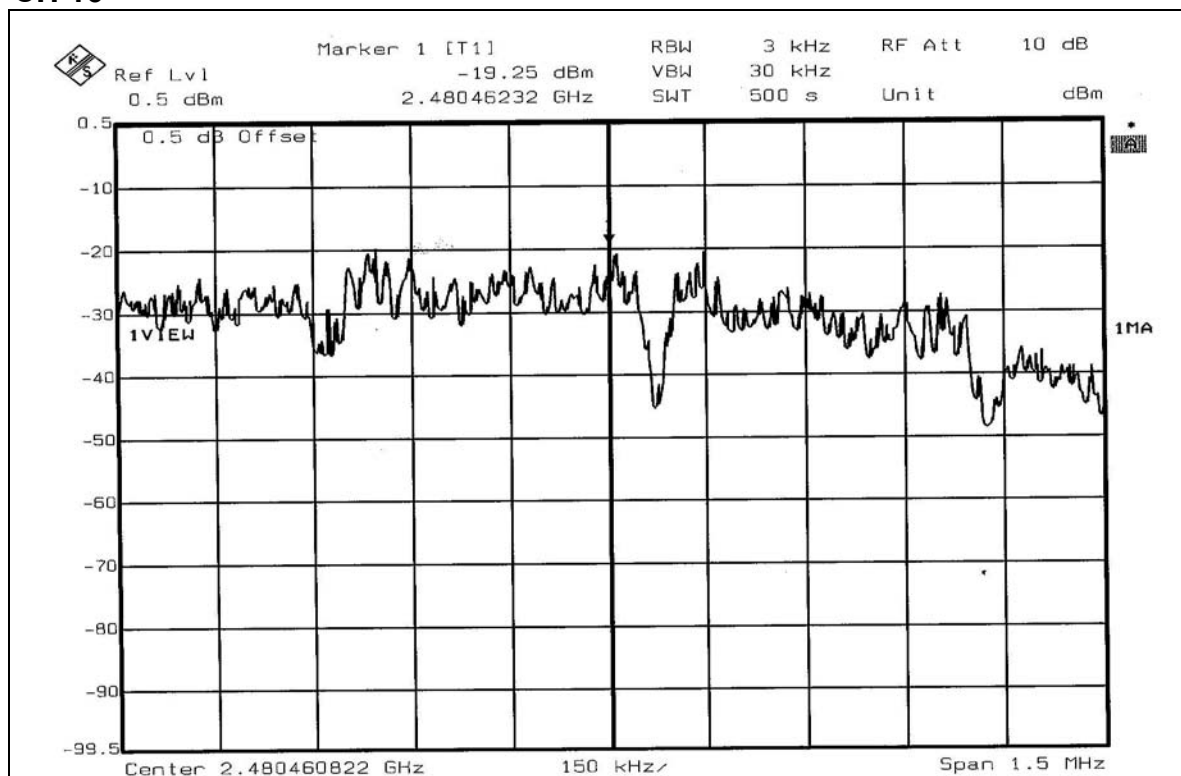

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak and Average RBW=VBW=100kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 6 images. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).

4.6.7 TEST RESULTS



DSSS modulation



NOTE 1: The band edge emission plot on page 42 show 57.80dBc delta between carrier maximum power and local maximum emission in restrict band (2.3835GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 96.26dBuV/m (Peak), so the maximum field strength in restrict band is $96.26 - 57.80 = 38.46$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 42 show 57.80dBc delta between carrier maximum power and local maximum emission in restrict band (2.3835GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 88.36dBuV/m (Average), so the maximum field strength in restrict band is $88.36 - 57.80 = 30.56$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 43 show 34.94dBc delta between carrier maximum power and local maximum emission in restrict band (2.4837GHz). The emission of carrier strength list in the test result of channel 16 at the item 4.2.7 is 93.87dBuV/m (Peak), so the maximum field strength in restrict band is $93.87 - 34.94 = 58.93$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 43 show 34.94dBc delta between carrier maximum power and local maximum emission in restrict band (2.4837GHz). The emission of carrier strength list in the test result of channel 16 at the item 4.2.7 is 85.97dBuV/m (Average), so the maximum field strength in restrict band is $85.97 - 34.94 = 51.03$ dBuV/m which is under 54dBuV/m limit.

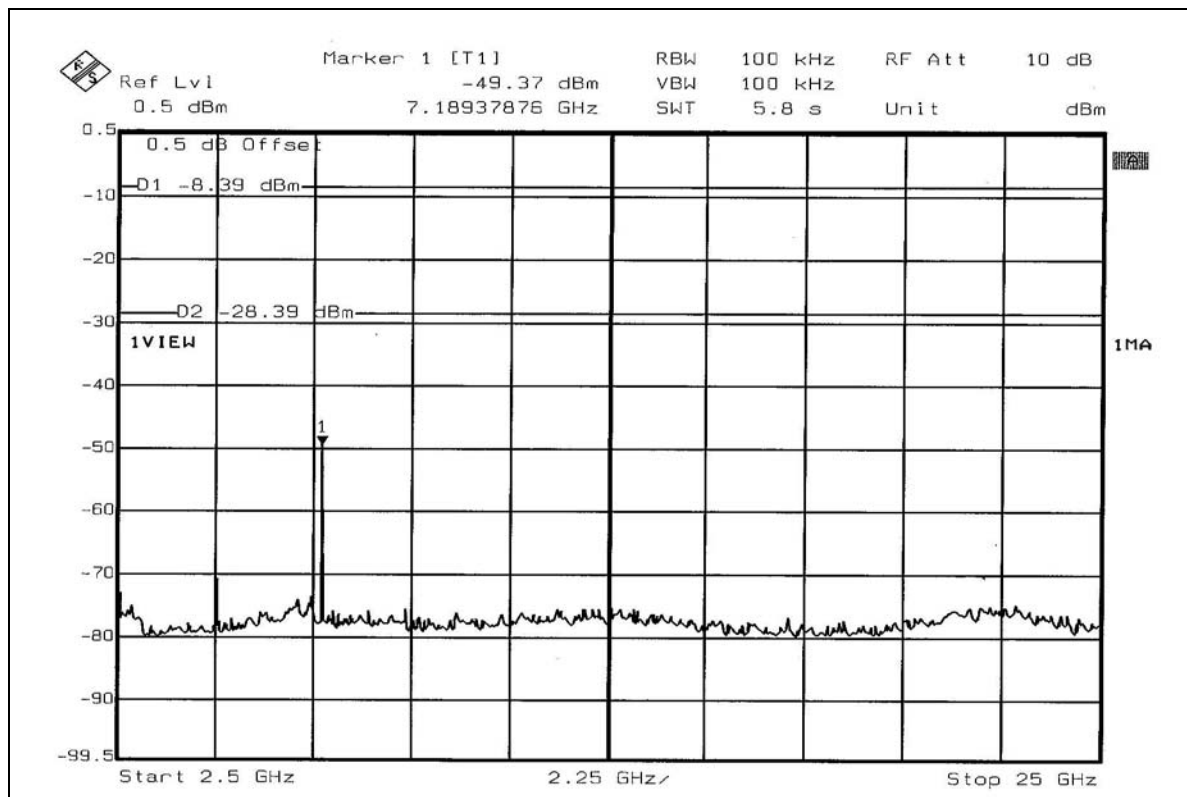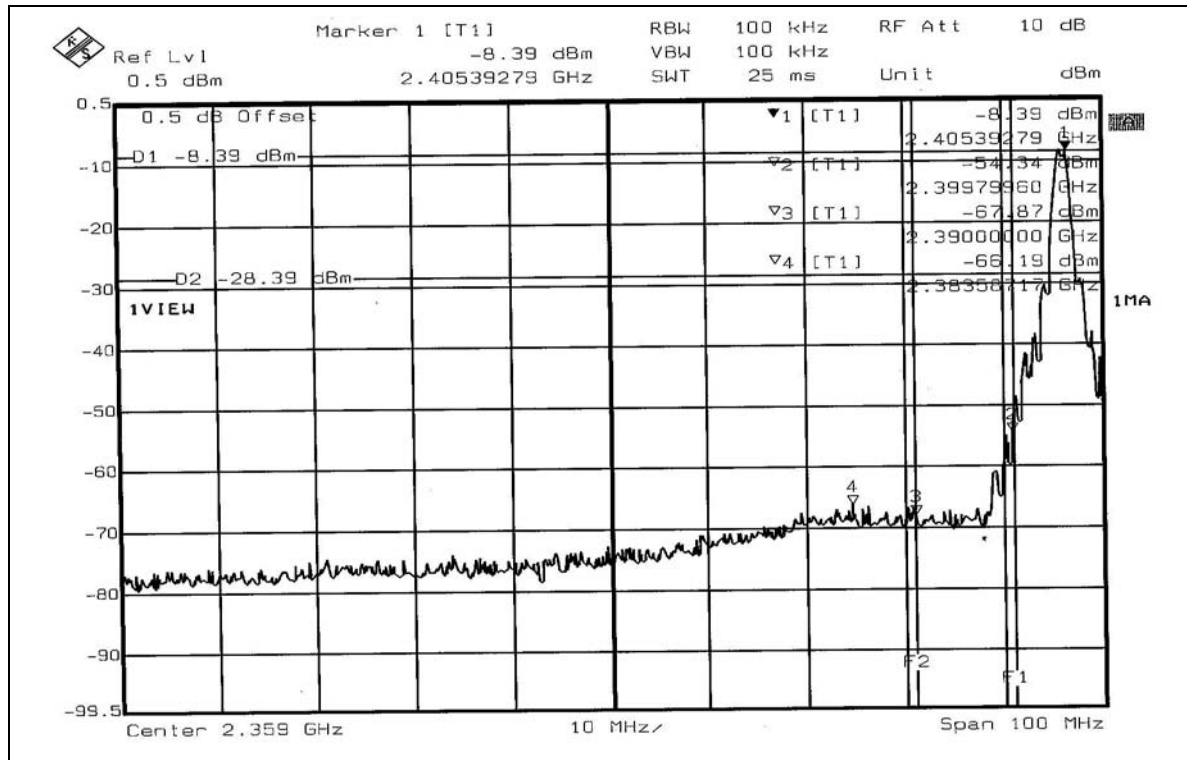

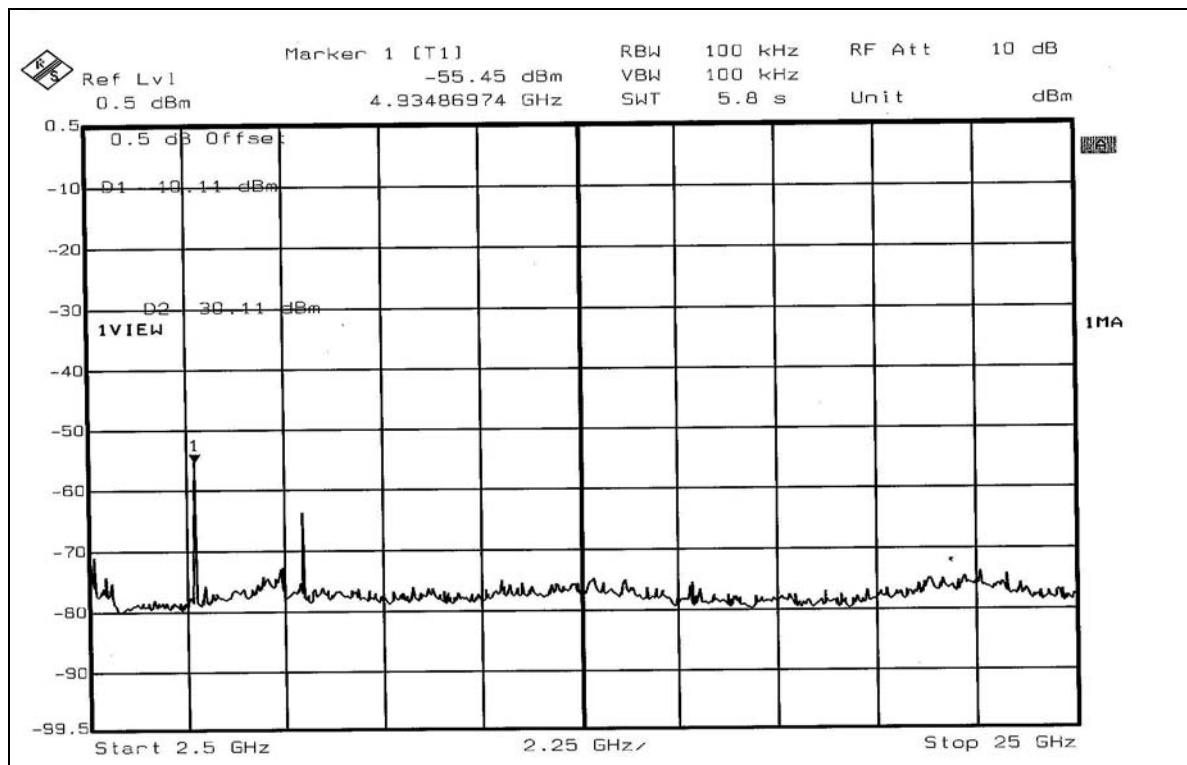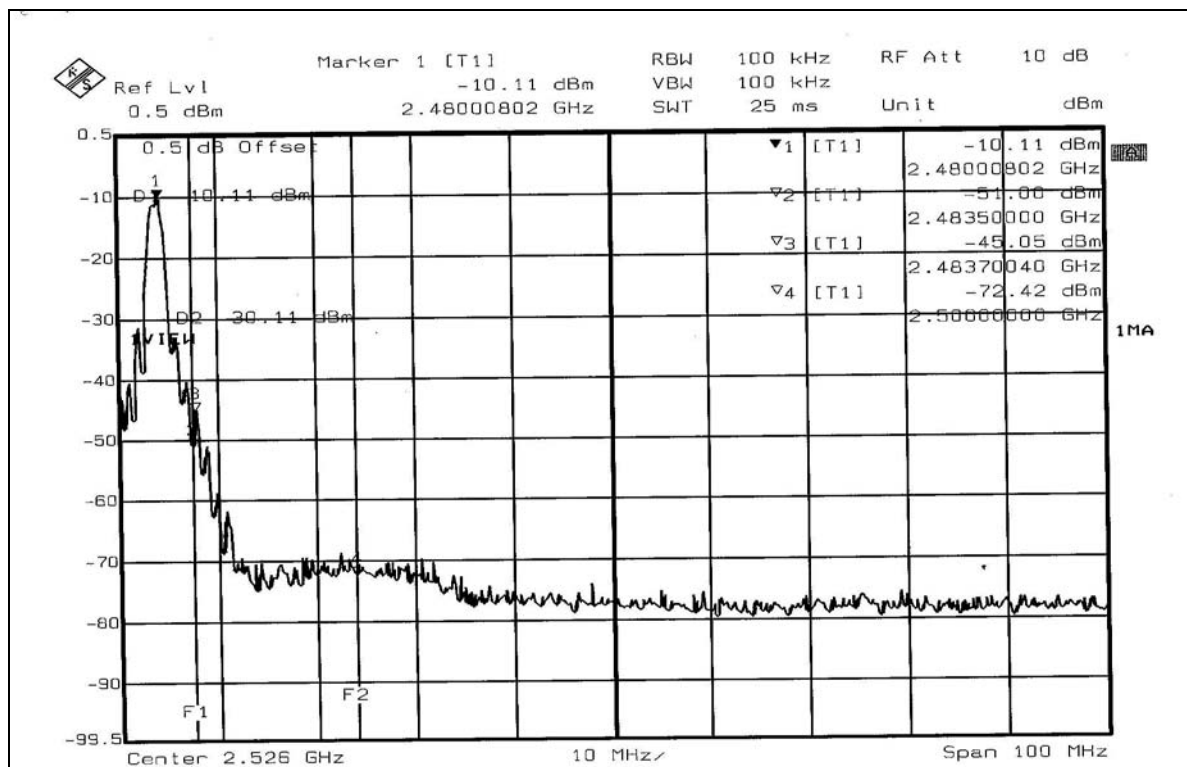



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION



The antenna used in this product is Internal PCB antenna without antenna connector. And the maximum Gain of this antenna is 0dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION



RADIATED EMISSION TEST Test Mode A

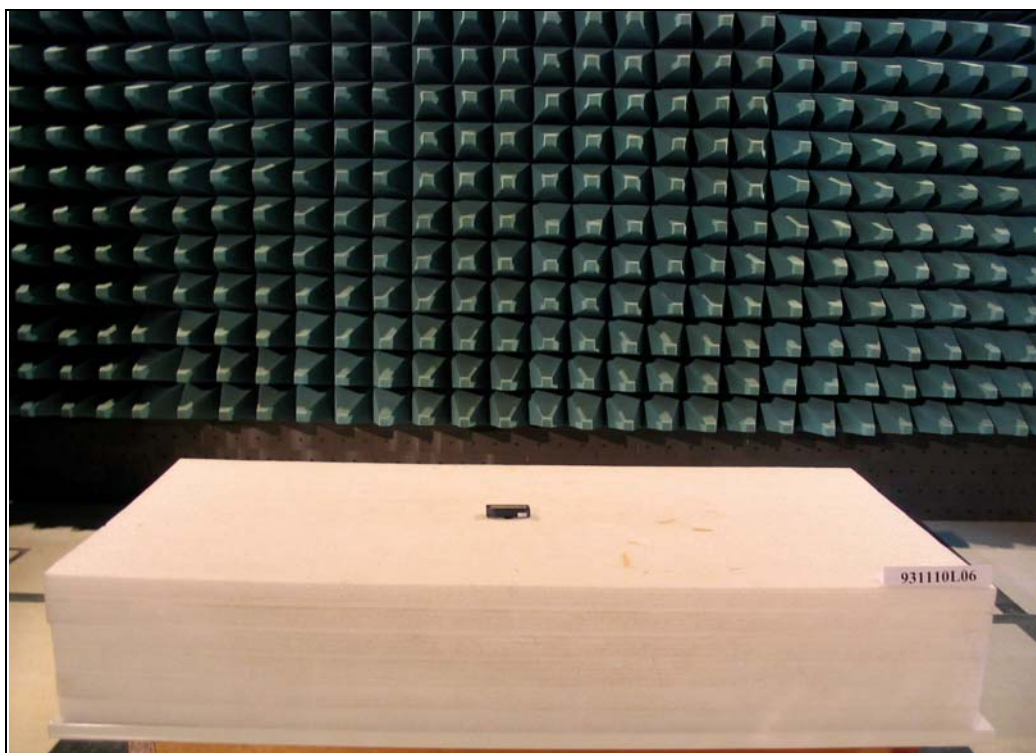

Test Mode B

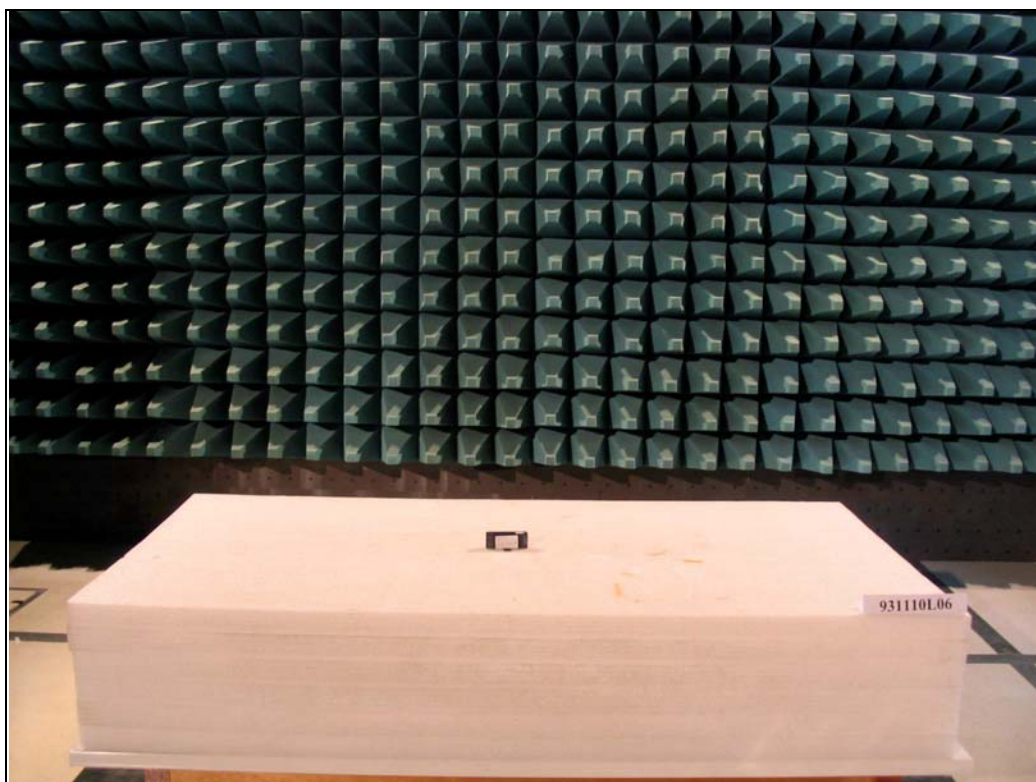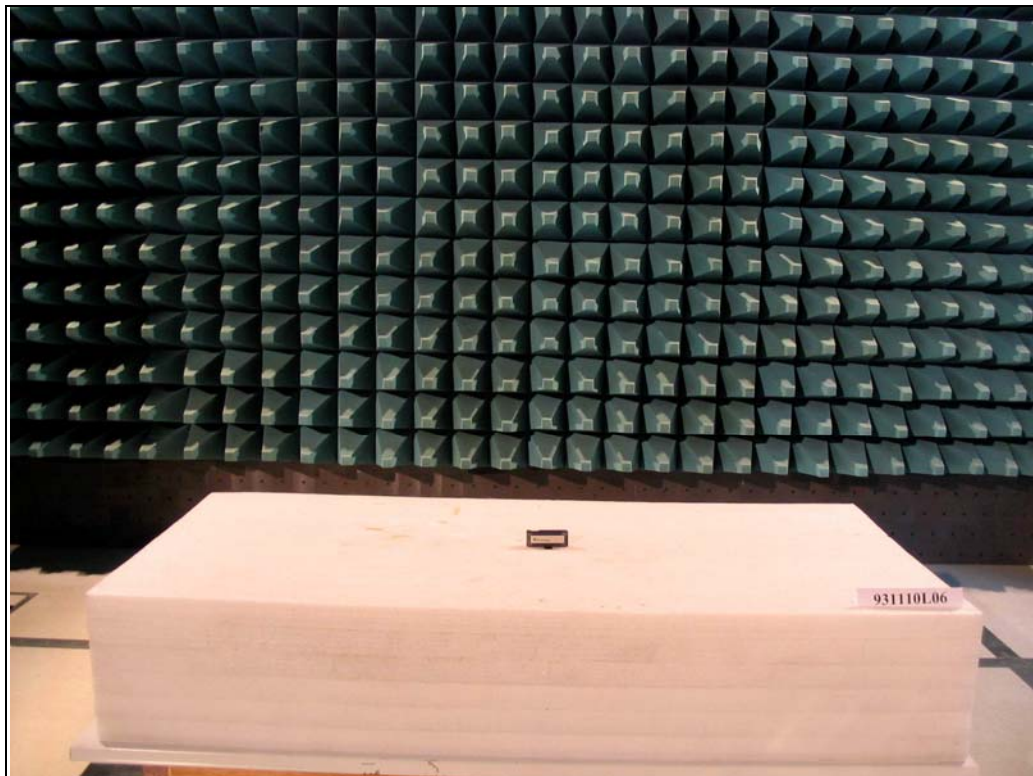

Test Mode C

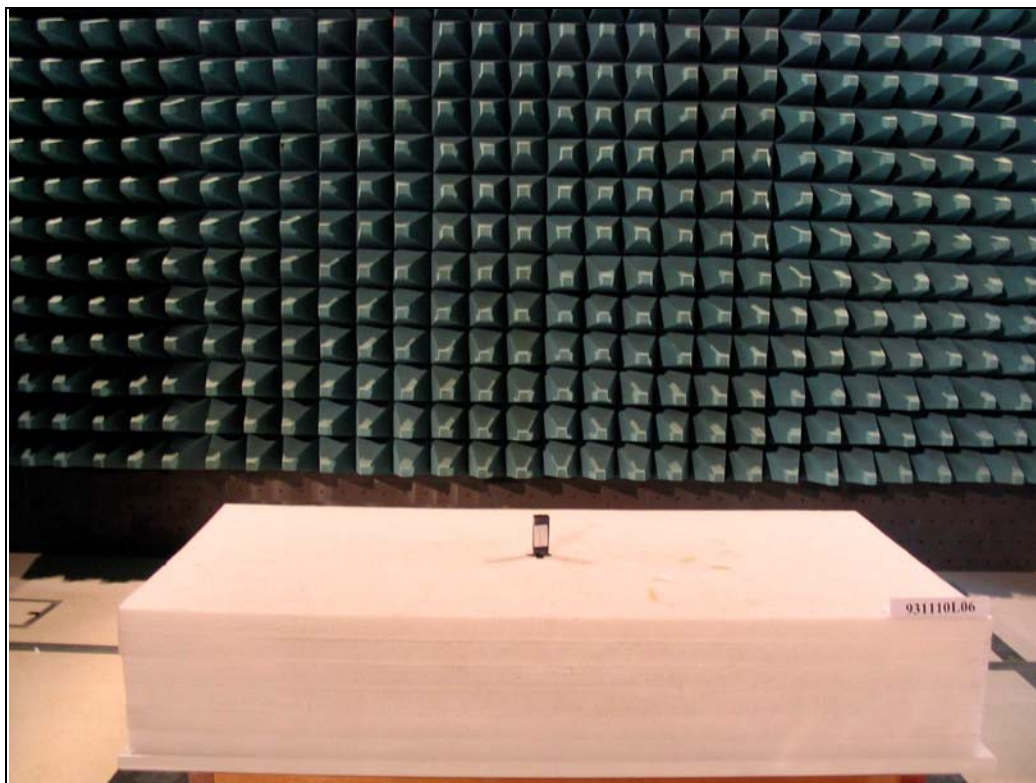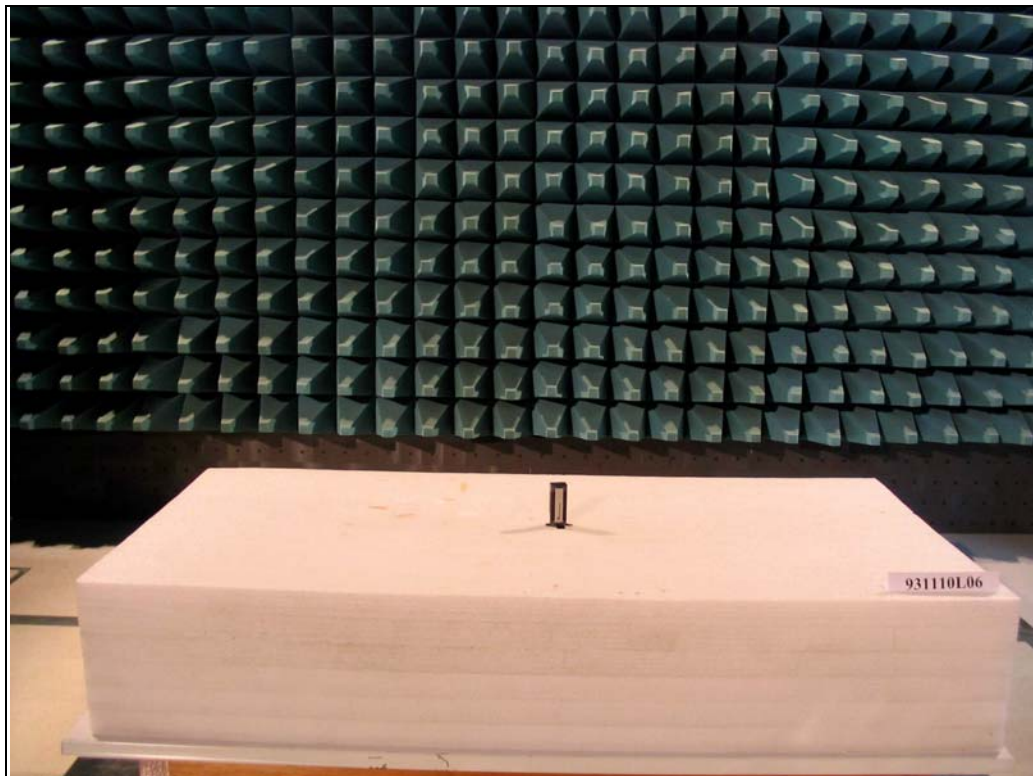

6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP, UL , A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.