



PART 0 SAR CHAR REPORT

No. 25T04Z100116-010

For

Guangdong OPPO Mobile Telecommunications Corp., Ltd.

Mobile Phone

Model Name: CPH2735

with

Hardware Version: 11

Software Version: ColorOS 15.0.1

FCC ID: R9C-OP24314

Issued Date: 2025-03-07

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn



No. 25T04Z100116-010

REPORT HISTORY

Report Number	Revision	Issue Date	Description
25T04Z100116-010	Rev.0	2025-03-07	Initial creation of test report

TABLE OF CONTENT

1 TEST LABORATORY	4
1.1. INTRODUCTION & ACCREDITATION.....	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT	4
1.4. PROJECT DATA.....	4
1.5. SIGNATURE	4
2 INTRODUCTION.....	5
3 EQUIPMENT UNDER TEST (EUT) OVERVIEW	6
4 SAR CHARACTERIZATION	7
4.1 ESI AND SAR DETERMINATION	7
4.2 SAR DESIGN TARGET AND UNCERTAINTY.....	8
4.2 SAR CHAR.....	9
5 MEASUREMENT UNCERTAINTY	11

1 Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.3. Testing Environment

Normal Temperature: 18-25°C


Relative Humidity: 30-70%

1.4. Project data

Testing Start Date: 2025-02-09

Testing End Date: 2025-03-04


1.5. Signature



Wang Meng
(Prepared this test report)



Lin Jun
(Reviewed this test report)

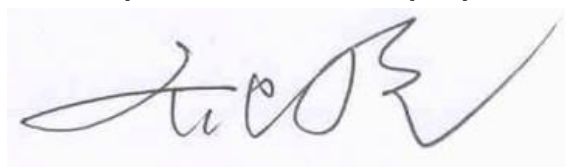

Qi Dianyuan
Deputy Director of the laboratory
(Approved this test report)

2 Introduction

The equipment under test (EUT) is a smart phone. It contains the MTK modem supporting 2G/3G/4G technologies and 5G NR Sub-6 GHz technologies. These modems enable MTK TAS feature to control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is in compliance with the FCC requirement.

In the Part 0 report, the EUT SAR are characterized for WWAN radios (2G/3G/4G/Sub6 NR) to determine the power limit that corresponds to the exposure design target after accounting for all device design related uncertainties, i.e., SAR_design_target (< FCC SAR limit) for sub-6. The SAR characterization are denoted as SAR Char. SAR Char will be used as input for MTK TAS to operate.

The compliance test under the static transmission scenario and simultaneous transmission analysis are reported in Part 1 report. The validation of the time-averaging algorithm and compliance under the dynamic (time- varying) transmission scenario for WWAN technologies are reported in Part 2 report.

The EUT supports WLAN/BT radio as well but WLAN/BT modem is not enabled with TAS.

Nomenclature for Part 0 Report

Term	Description
P_{limit}	The time-averaged RF power which corresponds to SAR_design_target.
P_{max}	Maximum target power level
SAR_design_target:	The design target for SAR compliance. It should be less than regulatory power density limit to account for all device design related uncertainties.
SAR Char	P_{limit} for all the technologies/bands for all applicable ECI

3 Equipment Under Test (EUT) Overview

Description:	Mobile Phone	
Model name:	CPH2735	
Tested Band:	GSM850/900/1900, WCDMA B2/4/5/8 LTE Band FDD:2/4/5/7/8/12/13/17/26/28/66 LTE Band TDD:38/41 5G NR N2/5/7/12/26/38/41/66/71/77/78 BT, Wi-Fi(2.4G), Wi-Fi(5G), NFC	
Tx Frequency:	824 – 849 MHz (GSM 850)	
	880 - 915 MHz (GSM 900)	
	1850 – 1910 MHz (GSM 1900)	
	880 – 915 MHz (WCDMA 900, Band VIII)	
	824–849 MHz (WCDMA 850 Band V)	
	1710 – 1755 MHz (WCDMA 1700 Band IV)	
	1850–1910 MHz (WCDMA1900 Band II)	
	1850 – 1910 MHz(LTE Band 2)	
	1710 – 1755 MHz (LTE Band 4)	
	824 – 849 MHz (LTE Band 5)	
	2500 – 2570 MHz(LTE Band 7)	
	880 – 915 MHz (LTE Band 8)	
	699 – 716 MHz (LTE Band 12)	
	777 –787 MHz (LTE Band 13)	
	704 –716 MHz (LTE Band 17)	
	814 – 849 MHz (LTE Band 26)	
	703 – 748 MHz (LTE Band 28)	
	2570 – 2620 MHz (LTE Band 38)	
	2496 – 2690 MHz (LTE Band 41)	
	1710 – 1780 MHz (LTE Band 66)	
	2412 – 2462 MHz (Wi-Fi 2.4G)	
	5180 – 5240 MHz	
	5260 – 5320 MHz	
	5500 – 5700 MHz	
	5745 – 5825 MHz	
	2400 – 2483.5 MHz (Bluetooth)	
	1850 – 1910 MHz(n2)	
	824 – 849 MHz(n5)	
	2500 – 2570 MHz (n7)	
	699 – 716 MHz (n12)	
	814 – 849 MHz (n26)	
	2570 – 2620 MHz (n38)	
	2496 – 2690 MHz (n41)	
	1710– 1780 MHz (n66)	
	665.5 – 695.5 MHz (n71)	
	3450 – 3550 MHz (n77L)	
	3700 – 3980 MHz (n77H)	
	3450 – 3550 MHz (n78L)	
	3700 – 3800 MHz (n78H)	
	13.56 MHz (NFC)	
GPRS/EGPRS Multislot Class:	33	

Test device production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna

4 SAR Characterization

4.1 ESI and SAR Determination

This device uses different Device State Index (ECI) to configure different time averaged power levels based on certain exposure scenarios. Depending on the detection scheme implemented in the smartphone, the worst-case SAR is further grouped and determined for each or combined exposure scenario

DSI and Corresponding Exposure Scenarios

Scenario	Description
ECI 3	Body (Standalone)
ECI 5	Head (Standalone)
ECI 8	Body (simultaneous transmission)
ECI 10	Head (simultaneous transmission)

4.2 SAR Design Target and Uncertainty

SAR_design_target is determined by ensuring that it is less than FCC SAR limit after accounting for total device designed related uncertainties specified by the manufacturer.

To account for total uncertainty, SAR_design_target should be determined as:

$$SAR_design_target < SAR_{regulatory_limit} \times 10^{\frac{-total\ uncertainty}{10}}$$

	Exposure conditions	DSI	SAR design target	W/kg
stand-alone	Body (2G/3G/4G/NR)	1	1g SAR design target	1.20
	Limbs(2G/3G/4G/NR)	1	10g SAR design target	3.00
	Head(2G/3G/4G/NR)	2	1g SAR design target	1.20
WWAN+WLAN2.4/5/BT	Body (2G/3G/4G/NR)	3	1g SAR design target	0.79
	Limbs(2G/3G/4G/NR)	3	10g SAR design target	1.90
	Head(2G/3G/4G/NR)	4	1g SAR design target	0.99
WWAN+WLAN2.4+5+BT	Body (2G/3G/4G/NR)	3	1g SAR design target	0.59
	Limbs(2G/3G/4G/NR)	3	10g SAR design target	1.40
	Head(2G/3G/4G/NR)	4	1g SAR design target	0.79

	Uncertainty Db 2G	Uncertainty dB 3G/4G	Uncertainty dB NR
Total uncertainty	1.0	0.8	1.2

4.2 SAR Char

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating. P_{limit} is calculated by linearly scaling with the measured SAR at the P_{part0} to correspond to the SAR_design_target . When $P_{limit} < P_{max}$, P_{part0} was used as P_{limit} in the TAS ECI. When $P_{limit} > P_{max}$ and $P_{part0} = P_{max}$, calculated P_{max} was used in the TAS ECI. All reported SAR obtained from the P_{part0} SAR tests was less than $SAR_Design_target +$ device uncertainty.

Band	Antenna	Duty cycle (100%)	DS13	DS16	DS18	DS10	Pmax [*]
			burst power	burst power	burst power	burst power	burst power
GSM	850	0	12.5	32.5	32.5	32.5	32.5
	850	1	12.5	32.5	30.5	30	32.5
	900	0	12.5	32.5	32.5	32.5	32.5
	900	1	12.5	32.5	30.5	30	32.5
	1900	0	12.5	29.5	29.5	29.5	29.5
	1900	1	12.5	29.5	27	26.5	29.5
WCDMA	2	0	100	22	24	24	24.0
	2	1	100	20	17.5	18.5	24.0
	4	0	100	20.2	24.2	18.2	24.2
	4	1	100	18.7	15.2	17.2	24.2
	5	0	100	24.2	24.2	22.7	24.2
	5	1	100	24.2	20.2	23.7	24.2
LTE	8	0	100	24.2	24.2	23.7	24.2
	8	1	100	24.2	20.7	23.7	24.2
	2	0	100	22	23.5	20	23.5
	2	1	100	20.5	17.5	19	23.5
	4	0	100	20.7	24.2	18.7	24.2
	4	1	100	20.2	16.2	18.2	24.2
	4	4	100	23.5	23.5	23.5	23.5
	5	0	100	24.2	24.2	24.2	24.2
	5	1	100	24.2	21.7	24.2	24.2
	7	0	100	21.7	24.2	19.7	24.2
	7	1	100	19.7	15.7	17.7	24.2
	7	4	100	23.2	23.2	22.7	23.2
	8	0	100	24.2	24.2	24.2	24.2
	8	1	100	24.2	21.2	24.2	24.2
	12	0	100	24.2	24.2	24.2	24.2
	12	1	100	24.2	22.7	24.2	24.2
	13	0	100	24.2	24.2	24.2	24.2
	13	1	100	24.2	21.7	24.2	24.2
	17	0	100	24.2	24.2	24.2	24.2
	17	1	100	24.2	22.7	24.2	24.2
	26	0	100	24.2	24.2	24.2	24.2
	26	1	100	24.2	21.2	24.2	24.2
	28	0	100	24.2	24.2	24.2	24.2
	28	1	100	24.2	22.7	24.2	24.2
	38	0	63.3	24.2	24.2	22.2	24.2
	38	1	63.3	21.2	18.2	19.7	24.2
	38	4	63.3	23.2	23.2	23.2	23.2
	41	0	63.3	24.2	24.2	22.2	24.2
	41	1	63.3	21.2	17.7	19.7	24.2
	41	4	63.3	23.2	23.2	22.7	23.2
	66	0	100	20.7	24.2	18.7	24.2
	66	1	100	20.2	16.2	18.7	24.2
	66	4	100	23.5	23.5	23.5	23.5
NR	2	0	100	22	23.5	20	23.5
	2	1	100	20.5	18	19	23.5
	5	0	100	24.3	24.3	23.3	24.3
	5	1	100	24.3	20.8	24.3	24.3
	7	0	100	22.5	24	20.5	24.0
	7	1	100	19	15.5	17	24.0
	7	4	100	23	23	21.5	23.0
	12	0	100	24.3	24.3	24.3	24.3
	12	1	100	24.3	22.3	23.3	24.3
	26	0	100	24.3	24.3	23.3	24.3
	26	1	100	24.3	20.8	24.3	24.3
	38	0	100	21.8	24.3	19.8	24.3
	38	1	100	19.3	15.8	17.8	24.3
	38	4	100	22.5	23	20.5	23.5
	41	0	100	21.3	24.3	19.3	24.3
	41	1	100	18.8	15.8	16.8	24.3
	41	4	100	22.5	22.5	20.5	23.5
	66	0	100	20.3	24.3	18.3	24.3
	66	1	100	19.8	16.3	18.3	24.3
	66	4	100	23.8	23.8	23.8	23.8
	71	0	100	24	24	24	24.0
	71	1	100	24	23	24	24.0
	77	4	100	20.5	24	19	24.0
	77	3	100	18.5	16.5	16.5	22.0
	77	5	100	20.8	21.8	19.3	21.8
	77	6	100	20	16.5	18.5	23.0
	78	4	100	20	19.5	18	26.0
	78	3	100	18.5	16.5	16.5	24.0
	78	5	100	20.8	23.3	19.3	23.8
	78	6	100	19	14	17	25.0

Note:

1 When Pmax < Plimit, the DUT will operate at a power level up to Pmax.

2 Pmax is used for RF tune up procedure. The maximum allowed output power is equal to Pmax + device uncertainty.

5 Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.