

Shenzhen Yishengbang Technology Co., LTD
Sample acceptance letter
SPECIFICATION FOR APPROVAL

The name of the company: Shenzhen MADIGI Electronic Technology Co., Ltd.

The material code: 2.18.0286

specifications: NUCRL01

Admitted to date: _____

The name of the supplier: Shenzhen Yishengbang Technology Co., Ltd

Supplier standard type number: WIFI AUX:SLK-MDJ-T4310Z-L-285IV-G

Admit signature					
For acceptance by the contractor			Shenzhen MADIGI Electronic Technology Co., Ltd		
The engineer	The reviewer	approved	The engineer	The reviewer	approved
Shi Lian Chen	Zen Huang	Meicai lin			
Signed and sealed			Signed and sealed		
date		2024-1-26	date		
instructions: ☐ accept ☐ Conditional acceptance					
note:					

The name of the supplier: Shenzhen Yishengbang Technology Co., LTD

Supplier address: 101, Building C, Shenzhen Qianwan Hard Technology Industrial Park, Bao 'an District, Shenzhen

telephone: 18025305599

telephone: 18666299104

WIFI MAIN Antenna (T4310Z)

1. Explanation of Product number :

S L K - M D J - T 4 3 1 0 Z - L - 2 8 5 I V - G

1

2

3

4

5



Product Code:

(1) Customer:

MDJ:MADIGI

(2) Project:

T4310Z: SLK-MDJ-T4310Z (WIFI MAIN antenna)

(3) Welding Position

L: Left

(4) Cable Length:

285IV: 285*1.13MM Four generations of original factory terminals

(5) Cable Color

G: Grey

2. Features

*Stable and reliable in performances

*Compact size

*RoHS compliance

3. Applications

- * IEEE802.11 (a/b/g/n)
- * Hand-held devices when WIFI (802.11a/b/g/n) functions are needed

4. Description

Holy bond’s metal antenna series are specially designed for WIFI (802.11 a/b/g/n) applications. Based on Holy bond’s proprietary design and processes, this metal antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.


5. Electrical Specifications

5-1


Characteristics	Specifications	Unit
Outline Dimensions	43x10.06x 0.4	mm
Center Frequency	2.4-2.5/5.15-7.2	GHz
Bandwidth(under-10dB return loss)	130min	MHz
VSWR	3max	

5-2.

VSWR

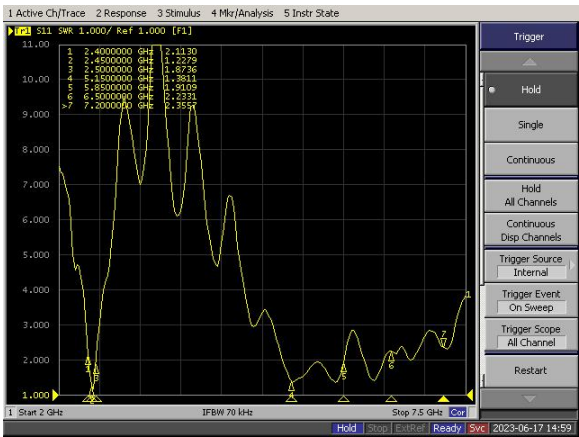


S11

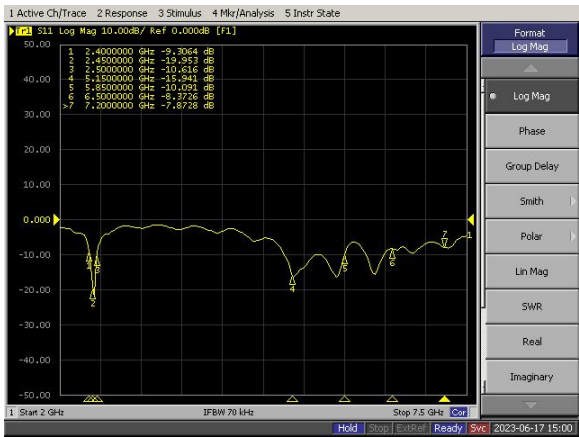


5-3.WIFI Antenna Gain/Efficiency/Radiation Pattern of 3D

Frequency (MHz)	Efficiency (dBi)	Gain (dBi)	Efficiency (%)
2400.0	-4.91	0.85	32.29
2410.0	-4.30	1.58	37.19
2420.0	-3.84	2.01	41.35
2430.0	-3.68	2.25	42.85
2440.0	-3.75	2.08	42.20
2450.0	-3.83	1.85	41.40
2460.0	-3.77	1.86	41.95
2470.0	-4.17	1.27	38.29
2480.0	-4.07	1.49	39.22
2490.0	-4.36	1.17	36.68
2500.0	-4.89	0.67	32.44
5150.0	-4.21	3.00	37.91
5350.0	-3.94	3.24	40.35
5750.0	-4.22	3.00	37.84
5850.0	-4.92	2.74	32.21
6100.0	-6.19	2.42	24.03
6800.0	-6.67	-0.05	21.51
7000.0	-6.53	0.04	22.21


2450.0MHz H+V, Eff: 41.4%

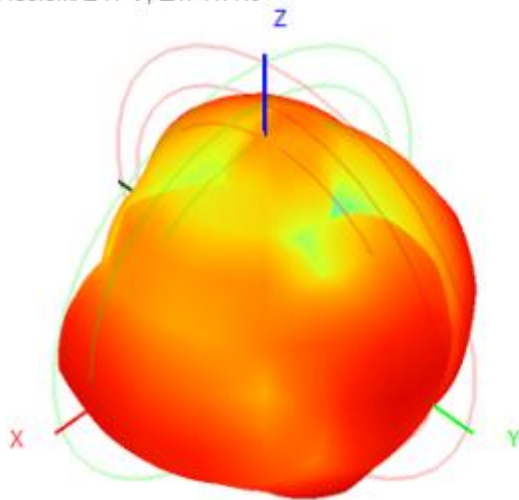


Back View

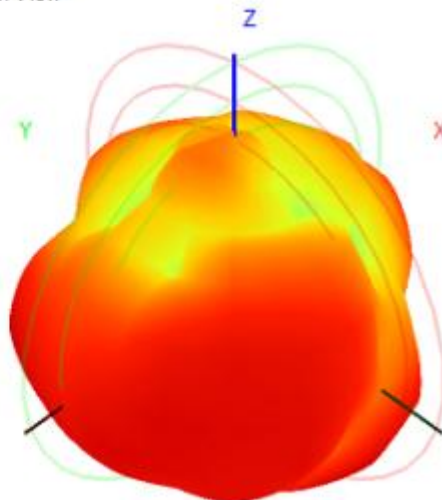


5850.0MHz H+V, Eff: 32.2%

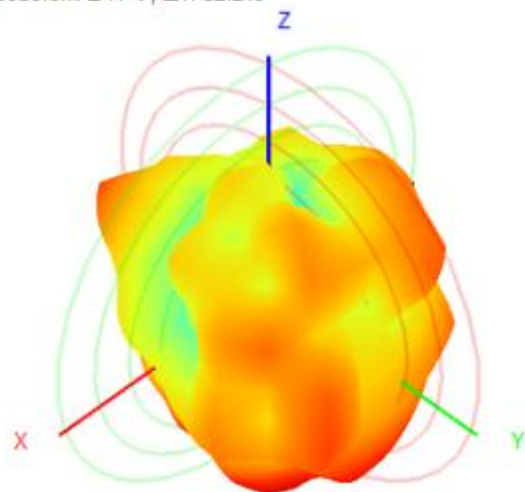


Back View

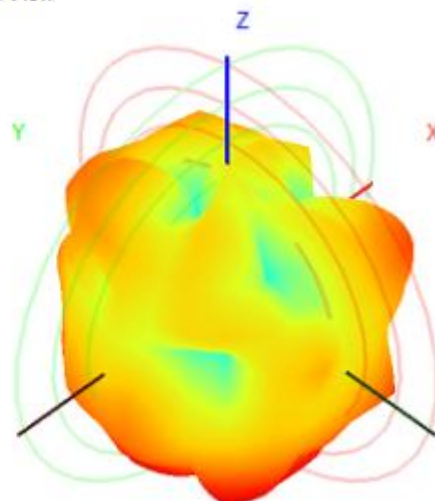

7000.0MHz H+V, Eff: 22.2%

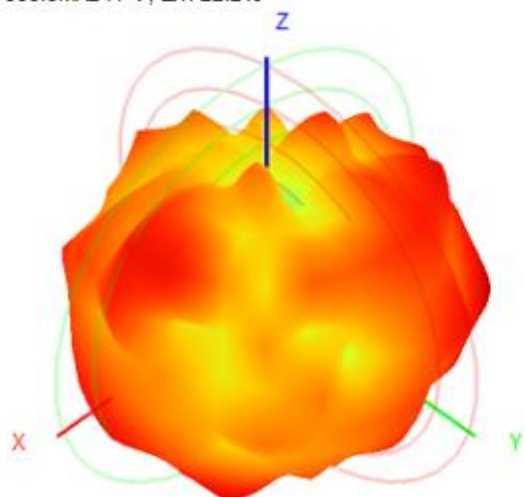

Back View

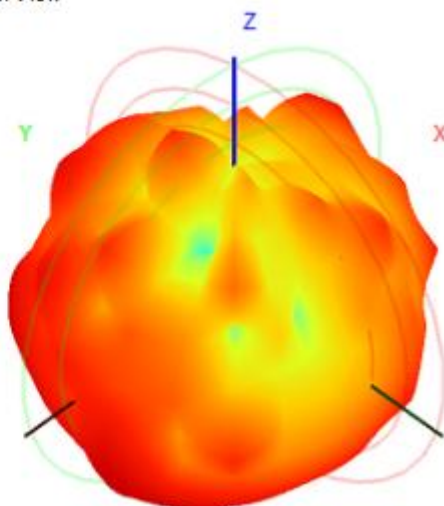

5.4 Salt spray test

Test item	Salt spray test																			
Product specification model	SLK-MDJ-T4310Z-L-285IV-G	Test quantity: 5PCS																		
Test time: 2023-6-19		Completed: 2023-6-20																		
Test/inspection equipment: 1. HY-60D Salt spray tester 2. HP-8753ES Network analyzer																				
Test/inspection conditions: 1.The temperature in the salt spray chamber is $35\pm2^{\circ}\text{C}$. The temperature of the laboratory is $22\text{--}30^{\circ}\text{C}$ 2.The sedimentation rate of salt spray after 24H spray is 1-2ML/h on an 80cm area. The concentration of sodium chloride is $50\pm10\text{g/L}$ and the PH value is $50\pm10\text{g/L}$ It is 6.5/7.2																				
criterion: 1. The electrical test meets the standard requirements: the voltage standing wave ratio test passes; 2. Metal surface coating without oxidation, peeling, crack, separation and other bad; Non-metallic parts without discoloration, deformation, degumming, cracking and other bad																				
<table><tr><th>Sample number</th><th>Evaluation level</th><th>Bad description</th></tr><tr><td>1</td><td>Up to standard</td><td>no</td></tr><tr><td>2</td><td>Up to standard</td><td>no</td></tr><tr><td>3</td><td>Up to standard</td><td>no</td></tr><tr><td>4</td><td>Up to standard</td><td>no</td></tr><tr><td>5</td><td>Up to standard</td><td>no</td></tr></table>			Sample number	Evaluation level	Bad description	1	Up to standard	no	2	Up to standard	no	3	Up to standard	no	4	Up to standard	no	5	Up to standard	no
Sample number	Evaluation level	Bad description																		
1	Up to standard	no																		
2	Up to standard	no																		
3	Up to standard	no																		
4	Up to standard	no																		
5	Up to standard	no																		
Test/inspection decision: ☒ Up to standard ☐ Below standard ☐ Leave unjudged																				
Tester: Xinyuan Wang Audit: Wang Guohang Approved by: Guo Liang																				

5.5Constant temperature and humidity test

Test item	Constant temperature and humidity test																			
Product specification model	SLK-MDJ-T4310Z-L-285IV-G	Test quantity: 5PCS																		
Test time: 2023-6-19		Completed: 2023-6-20																		
Test/inspection equipment: 1.Programmable constant temperature and humidity test chamber 2. HP-8753ES Network analyzer																				
Test/inspection conditions: 1.Test at room temperature 25℃ and humidity 65% 2. +80±2℃ 85-90%RH /-30±2℃ 0%RH 2 hours a cycle time of 24H																				
criterion: 1. The electrical test meets the standard requirements: the voltage standing wave ratio test passes;; 2.Metal surface coating without oxidation, peeling, crack, separation and other bad; Non-metallic parts without discoloration, deformation, degumming, cracking and other bad																				
<table><tr><th>Sample number</th><th>Evaluation level</th><th>Bad description</th></tr><tr><td>1</td><td>Up to standard</td><td>no</td></tr><tr><td>2</td><td>Up to standard</td><td>no</td></tr><tr><td>3</td><td>Up to standard</td><td>no</td></tr><tr><td>4</td><td>Up to standard</td><td>no</td></tr><tr><td>5</td><td>Up to standard</td><td>no</td></tr></table>			Sample number	Evaluation level	Bad description	1	Up to standard	no	2	Up to standard	no	3	Up to standard	no	4	Up to standard	no	5	Up to standard	no
Sample number	Evaluation level	Bad description																		
1	Up to standard	no																		
2	Up to standard	no																		
3	Up to standard	no																		
4	Up to standard	no																		
5	Up to standard	no																		
Test/inspection decision: ☒ Up to standard ☐ Below standard ☐ Leave unjudged																				
Tester: Xinyuan Wang Audit: Wang Guohang Approved by: Guo Liang																				

5.6Tension test

Test item	Tension test																						
Product specification model	SLK-MDJ-T4310Z-L-285IV-G		Test quantity: 5PCS																				
Test time: 2023-6-20			Completed: 2023-6-20																				
Test/inspection equipment: 1.Tension tester																							
Test/inspection conditions: 1.Temperature: 18-25℃ 2.Humidity ≤ 70%RH																							
Test result: Passed																							
<table><tr><td>item Conditions</td><td colspan="5">Maintenance force between the terminal and the RF cable ≥1kgf</td></tr><tr><td>Number of tests</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td></tr><tr><td>Test result</td><td>1.22</td><td>1.18</td><td>1.24</td><td>1.27</td><td>1.26</td></tr></table>						item Conditions	Maintenance force between the terminal and the RF cable ≥1kgf					Number of tests	1	2	3	4	5	Test result	1.22	1.18	1.24	1.27	1.26
item Conditions	Maintenance force between the terminal and the RF cable ≥1kgf																						
Number of tests	1	2	3	4	5																		
Test result	1.22	1.18	1.24	1.27	1.26																		
Test/inspection decision: ☒ Up to standard ☐ Below standard ☐ Leave unjudged																							
Tester: Xinyuan Wang Audit: Wang Guohang Approved by: Guo Liang																							

6. Antenna Dimensions (unit: mm)

Document number SLK-MDJ-T4310Z-L-285IV-G

Company: mm

Technical requirements:

- 1, Material: stainless steel 304 nickel plated.
- 2, plate thickness: 0.4 ± 0.05 mm.
- 3, the material should meet the environmental requirements of ROHS 2.0.
- 4, the product needs to be cleaned, can not be deformed, oil, black spots, rough edges and so on.
- 5, important dimensions marked with "*" (mold production to control, mold acceptance must be measured);

Grey L13 wire, fourth generation original terminal

WIFI hardware

Design Caijiang Liu

To examine Zhen Fang

Approval

weight quantity proportion

item No

Name SLK-T4310Z

Sheet 1 of 1

Shenzhen Yishengchang Electronics Co., Ltd

Edition A0

Sign

Change description New material

DATE 24-01-26

Length: 285±3.0MM

Diameter: Φ1.13

Color: Gray

8. Material composition and harmful substances table

No.	Material name	Describe	Testing organization	Authentication code	Report test date	State
1	FPC	Copper-clad substrate	SGS	CHAEC23001049108	2023/2/15	Effective
		Nickel coating	CTI	A2230400553101002E	2023/8/9	Effective
		3M adhesive	SGS	SHAEC2217569403	2023/1/4	Effective
2	Solder wire	Solder wire	SGS	SZXPC23000078404	2023/2/21	Effective
3	RF line	The coverage rate of the shield layer is > 90%	SGS	SZXEC23001776704	2023/8/8	Effective
4	terminal	Nickel plating	CTI	A2230400553101002E	2023/8/9	Effective
		Gold coating (Thickness $\geq$ 1um)	CTI	A2230400553101001E	2023/8/9	Effective
5	Stainless steel 304	SUS304	SGS	SZXEC23000381402	2023/3/29	Effective

9.Outgoing Quality Control

Shenzhen Yi Sheng Bang technology Co., LTD

Sample inspection report

Customer name	MADIGI	Order number		Lot number	10
Production date	6/20	Specification and model	SLK-MDJ-T4310Z-L-285IV-G	Check number	10
item	Check description		determine		
Model number	SLK-MDJ-T4310Z-L-285IV-G		Up to standard		
appearance	Antenna appearance is free from scratches and oil stains		Up to standard		
dimension	Antenna bus length 285MM±3.0		Up to standard		
	The iron piece antenna is long 43MM±0.2		Up to standard		
	Iron piece antenna wide 10.6MM±0.2		Up to standard		
client	1.13 Fourth generation terminals		Up to standard		
Electrical property	Standing wave by one		Up to standard		
Inspection mode	☐ Spot check			☒ Complete inspection	
Test result	☒ Up to standard			☐ Below standard	

inspector : Wang Guoxing

examine :

Approved by: Guo Liang

10.CPK

CPK 报告				
	Part Number			WIFI Antenna
	Spec	SLK-MDJ-T4310Z-L-285IV-G		metal+Cable
	Supplier	Shenzhen Yishengbang Electronics Co., Ltd		Quadratic element/straightedge
	Measurement Unit	mm		2023. 6. 20
	Dim. Designator	1	2	3
	Nominal	285. 00	43. 00	10. 60
	+ Tolerance	3. 00	0. 20	0. 20
	- Tolerance	-3. 00	-0. 20	-0. 20
	Upper Limit	288. 00	43. 20	10. 80
	Lower Limit	282. 00	42. 80	10. 40
	1	285. 00	43. 03	10. 62
	2	285. 50	43. 02	10. 64
	3	285. 00	43. 03	10. 65
	4	285. 00	42. 92	10. 63
	5	285. 00	43. 02	10. 54
	6	285. 00	43. 03	10. 56
	7	285. 50	43. 05	10. 62
	8	285. 50	43. 02	10. 63
	9	285. 00	43. 05	10. 59
	10	285. 00	42. 95	10. 63
	11	285. 00	42. 93	10. 64
	12	285. 00	42. 99	10. 65
	13	285. 00	43. 02	10. 61
	14	285. 00	43. 04	10. 62
	15	285. 00	43. 01	10. 59
	16	285. 00	43. 06	10. 63
	17	286. 00	43. 02	10. 58
	18	285. 00	43. 05	10. 62
	19	285. 00	43. 07	10. 62
	20	285. 00	42. 96	10. 62
	21	285. 00	43. 08	10. 63
	22	285. 00	43. 02	10. 64
	23	285. 00	43. 03	10. 68
	24	285. 00	43. 07	10. 59
	25	285. 00	43. 01	10. 57
	26	285. 50	43. 02	10. 59
	27	285. 00	43. 06	10. 61
	28	285. 00	43. 02	10. 62
	29	285. 00	43. 01	10. 61
	MAX.	286. 00	43. 08	10. 68
	MIN.	285. 00	42. 92	10. 54
	AVERAGE	285. 10	43. 02	10. 61
	STDEV	0. 25	0. 04	0. 03
	CP	4. 07	1. 70	2. 26
	Cpk	3. 93	1. 53	2. 09

11.Full size report

全尺寸测量报告Dimension Report															
编码 Code		零件名称 Component			WIFI Antenna		规格 Spec		SLK-MDJ-T4310Z-L-285IV-G				材料 Material	metal+Cable	
供应商 Supplier		Shenzhen Yishengbang Electronics Co., Ltd			测量工具 Measuring Tool		二次元和直尺		测量单位 Measurement Unit		MM			测量日期 Measurement date	2023.6.20
尺寸 (DIMENSION)		尺寸 Drawing	+ TOL.	- TOL.	Lower Limit	实测 Test 1	实测 Test 2	实测 Test 3	实测 Test 4	实测 Test 5	实测 Test 6	实测 Test 7	UPPER≤100%	LOWER≤100%	
1 RF line length 285MM		288.00	3.00	3.00	282.00	285.00	285.50	285.00	285.00	285.00	285.00	285.50			
2 metal length 43.00		43.20	0.20	0.20	42.80	43.03	43.02	43.03	42.92	43.02	43.03	43.05			
3 metal width 10.6		10.80	0.20	0.20	10.40	10.62	10.64	10.65	10.63	10.54	10.56	10.62			
4															
5															
6															
7															
8															
9															
10															
11															
12															
13															
14															
15															

制表Edited by: Wangguoxing


审核Approved by:Guoliang

日期Date:2023.6.20


12.Packing

Packing job Description (Example)

client:	product:	colour:
Customer part number:	Part number (P/N): SLK-FM-2813-M-290I-W	date: 2021.11.23

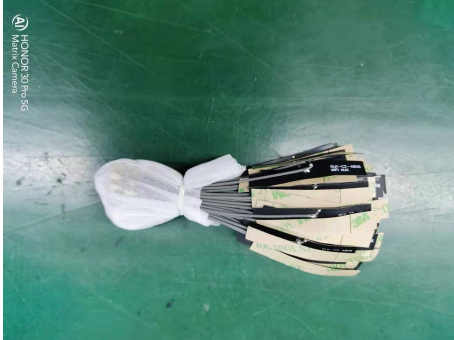

1. The quality department shall conduct a full inspection of the appearance and performance of a single antenna according to the inspection instructions, and bind each antenna with 50PCS.

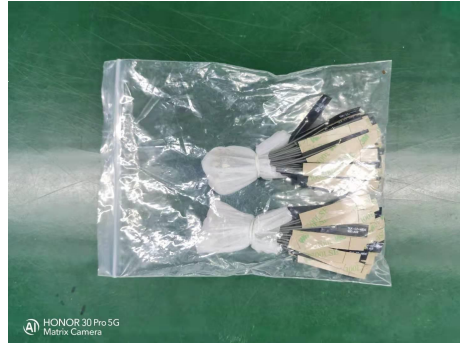

2. The production line shall carry out packaging operation according to 200PCS per bag.



4. Seal the box and weigh it, put it into the finished product warehouse, and wait for shipment.



3. According to the customer's label requirements, attach labels and pack the goods.

Note:

Inner packing: 200PCS per pack

Outer packing: Carton size 380X380X180MM 4000PCS per box.

According to the actual order quantity, the carton size may be different.

According to different customers, make different internal and external packaging labels.