



# 承認書

## SPECIFICATION FOR APPROVAL

客戶名稱(CUSTOMER): 智易科技股份有限公司

品名(DESCRIPTION): RF ANTENNA ASSEMBLY  
DIPOLE, BLACK+1.13 CABLE GRAY+IPEX  
(Model No. : WN9722A-DM-450mm)

客戶料號(PART NO): 120300058800J

料號(PART NO): 503021-0123-0BC

送樣日期( DATE ): 2016.08.15

承認號碼(APPROVED NO):

Liteconn Co.,Ltd		Customer Approval	
Prepare	Approval	Check	Approval

堅詠股份有限公司

Liteconn Co.,Ltd

Taipei:  
Liteconn Co.,Ltd  
24158新北市三重區中興北街188巷19號  
NO.19 Lane 188, Zhongxing N., St.,  
Sanchong Dist, New Taipei City  
24158

TEL:886-2-2995-0485

FAX:886-2-2995-7395

網址: <http://www.liteconn.com.cn>

ShenZhen:  
LiteTek Technology CO.,LTD  
中國深圳市寶安區松崗街道紅星西坊大田洋工業園D區  
D Avenue, Da Tian Yang Industrial  
Area, Hong Xing Xi Fang, Song Gang  
Town, Bao'an District Shenzhen  
518105, China  
TEL:86-755-2962-6909~17  
FAX:86-755-2962-6919~20

SuZhou:  
LiteTek Technology CO.,LTD  
中國蘇州市吳中區角直鎮機場路39號  
(甫澄路口)  
NO 39, Airport Road, Luzhi Town, Wuzhane  
District, Suzhou, China  
TEL:86-0512-6602-7901~3  
FAX:86-0512-6602-7910

Antenna Type          Dipole

120300058800J


Specifications	
Standard	IEEE802.11n and 802.11 a/b/g/ac
Frequency range	2.4 to 2.49GHz , 4.9 to 5.9 GHz
Peak gain	2.55 dBi @ 2.4 GHz
	2.35 dBi @ 5 GHz

# Liteconn Co.,Ltd.

## APPROVAL INDEX

1 封面	-----	pages	1
2 Antenna Type & Specifications	-----	pages	2
3 目錄	-----	pages	3
4 產品圖及包規	-----	pages	4～5
5 測報	-----	pages	6～13
6 線材資料	-----	pages	14～27
7 端子資料	-----	pages	28～42
8 銅管資料	-----	pages	43～47
9 塑件資料	-----	pages	48～66
10 套管資料	-----	pages	67～74

REV.	FILE No.	DRAWN BY	DATE
X0	TWRFQA1607019	Eva_long	2016.07.29
X1	TWDCRA1608002	Eva_long	2016.08.02

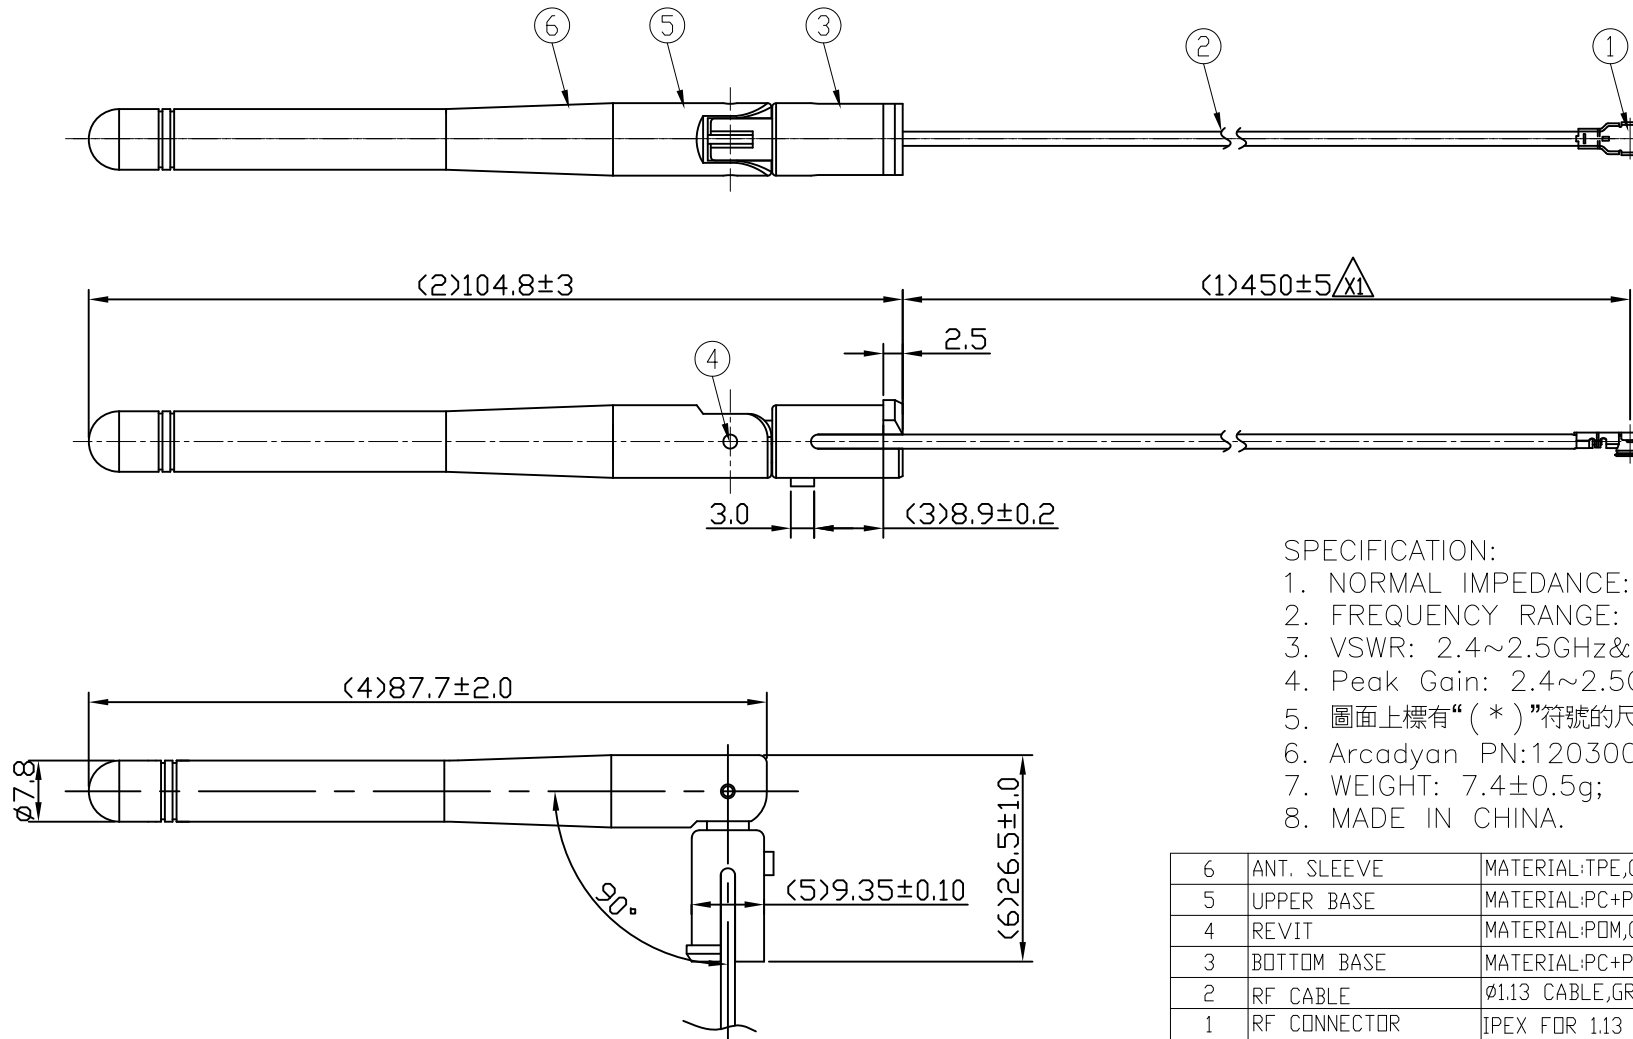

#### SPECIFICATION:

1. NORMAL IMPEDANCE: 50Ω;
2. FREQUENCY RANGE: 2.4~2.5GHz&5.15~5.85GHz;
3. VSWR: 2.4~2.5GHz&5.15~5.85GHz≤2.0;
4. Peak Gain: 2.4~2.5GHz≥2dBi,5.15~5.85GHz≥2dBi;
5. 圖面上標有“( \* )”符號的尺寸為重點管控尺寸.
6. Arcadyan PN:120300058800J;
7. WEIGHT: 7.4±0.5g;
8. MADE IN CHINA.


6	ANT. SLEEVE	MATERIAL:TPE,COLOR:BLACK	1	N/A
5	UPPER BASE	MATERIAL:PC+PBT,COLOR:BLACK	1	N/A
4	REVIT	MATERIAL:PDM,COLOR:BLACK	2	N/A
3	BOTTOM BASE	MATERIAL:PC+PBT,COLOR:BLACK	1	N/A
2	RF CABLE	ø1.13 CABLE,GRAY	1	N/A
1	RF CONNECTOR	IPEX FOR 1.13 CABLE	1	N/A
ITEM	PART NAME	DESCRIPTION	Q'TY	REMARK

DWG TYPE:

CUSTOMER DRAWING

**LITE** Liteconn Co., Ltd.

GENERAL TOLERANCE:  
UNLESS OTHERWISE SPECIFIED



TITLE:  
RF ANTENNA ASSEMBLY  
DIPOLE BLACK+1.13 CABLE  
GRAY+IPEX


X.X	±0.35	X.X*	±3°	APPD:	.
X.XX	±0.25	X.XX*	±2°	CHECK:	.
X.XXX	±0.15	X.XXX*	±1°	DRAW:	Eva_long

DWG No: 503021-0123-0BC			
DATE: 2016.08.02	SCALE: 1:1	UNIT: mm	PAGE: 1/1

COMPIANCE WITH THE REQUIREMENT: ✓RoHS; □ HF; □ SONY SS-00259; □ OTHER.  
\*NO USING RESTRICTED AND BANNED SUBSTANCE

# 蘇州利慶電子有限公司

## 包裝作業規範

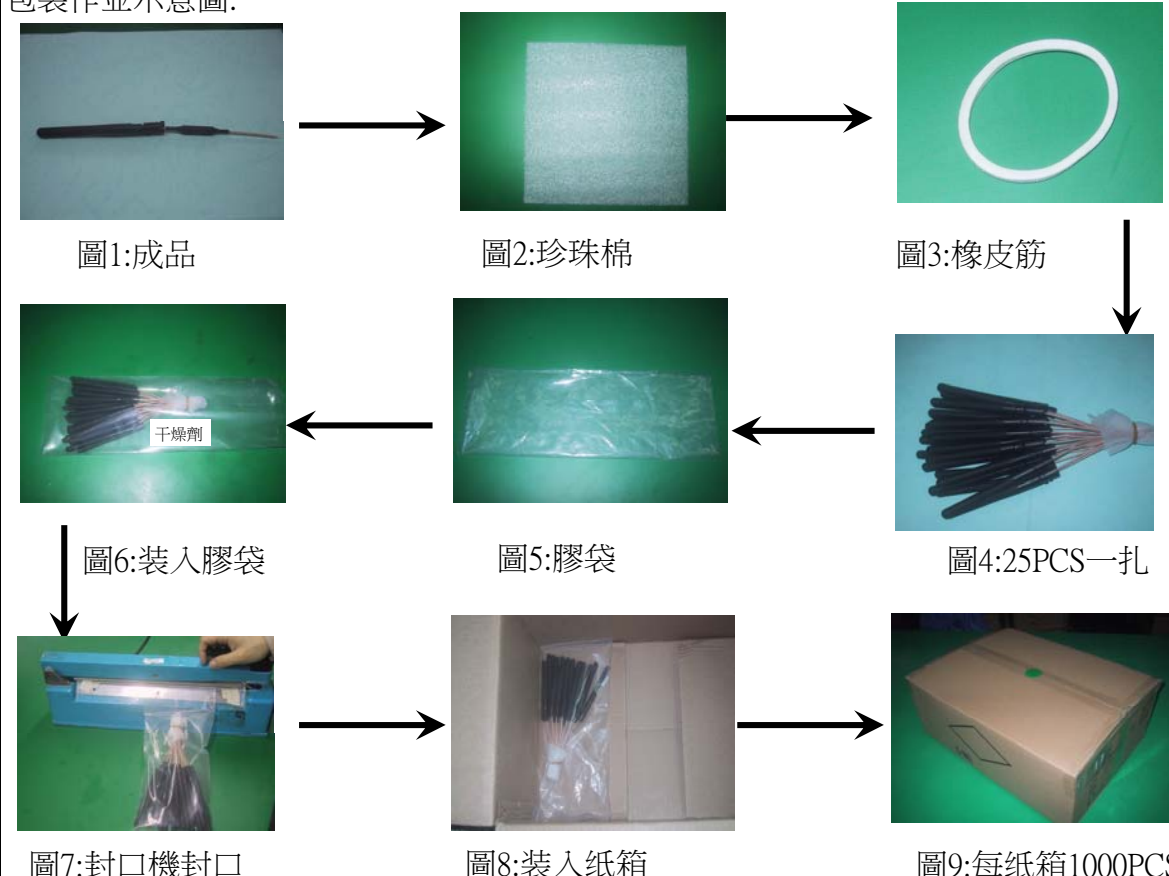LITE	標題	包裝作業規範： 純板端天線		備注：ECN NO:EN1101014
文件編號	AAA-CAR-0041	版次	A1	作业说明:
<p>包裝作业示意图:</p>  <pre> graph TD     圖1[圖1:成品] --&gt; 圖2[圖2:珍珠棉]     圖2 --&gt; 圖3[圖3:橡皮筋]     圖3 --&gt; 圖4[圖4:25PCS一扎]     圖4 --&gt; 圖5[圖5:膠袋]     圖5 --&gt; 圖6[圖6:裝入膠袋]     圖6 --&gt; 圖7[圖7:封口機封口]     圖7 --&gt; 圖8[圖8:裝入紙箱]     圖8 --&gt; 圖9[圖9:每紙箱1000PCS]                     </pre> <p>圖1:成品</p> <p>圖2:珍珠棉</p> <p>圖3:橡皮筋</p> <p>圖4:25PCS一扎</p> <p>圖5:膠袋</p> <p>圖6:裝入膠袋</p> <p>圖7:封口機封口</p> <p>圖8:裝入紙箱</p> <p>圖9:每紙箱1000PCS</p>				<p>1.将检验好的成品每25PCS用气泡棉裹住,再用橡皮筋扎好,如圖1.2.3.4所示.</p> <p>2.将25PCS一扎的成品放入胶袋里面,再在每一胶袋中放入一包干燥劑,然後用封口机封好胶袋口,在PE袋上貼上產品料號標籤,如圖5.6.7所示.</p> <p>3.将一平板放入纸箱底部,四个角落加上护角,将封好的每一袋成品放入纸箱里面,如圖8所示.</p> <p>4.纸箱一层放10袋成品,共250PCS,每纸箱放4层,共1000PCS.</p> <p>5.每装一层放一平板,一箱放5PCS平板,用胶纸封好,贴上相应的标签.标签上注明双方的料号,如圖所示.</p> <p>6.再装上一外箱,并封装好,打好包装带.</p>

核准:

审核:

制定:

ED-OTH-003B

測試報告

TEST REPORT

CUSTOMER : 智易

CUSTOMER NO. : \_\_\_\_\_

FILE NO : \_\_\_\_\_

DESCRIPTION : RF Antenna 2.4GHz&5GHz

LITE P/N : \_\_\_\_\_

DATE : 2016/9/5

堅詠股份有限公司

ADD : NO. 19, LANE 188, CHUNG—HSIN N. ST.

SANCHUAN, TAIPEI HSIEN, TAIWAN R.O.C

TEL : ( 886-2 ) 2995-0485


FAX : ( 886-2 ) 2995-7395

[http : //www.liteconn.com](http://www.liteconn.com)

## SPECIFICATIONS :

### Electrical Properties

<u>Frequency Range</u>	: <u>2.4GHz~2.5GHz&amp;5.15GHz~5.85GHz</u>
<u>Impedance</u>	: <u>50Ohms nominal</u>
<u>VSWR</u>	: <u><math>\leq 2</math></u>
<u>Peak Gain</u>	: <u><math>\geq 2\text{dBi}</math></u>
<u>Standard Connector</u>	: <u>IPEX Connector</u>
<u>Line length</u>	: <u>450 mm</u>

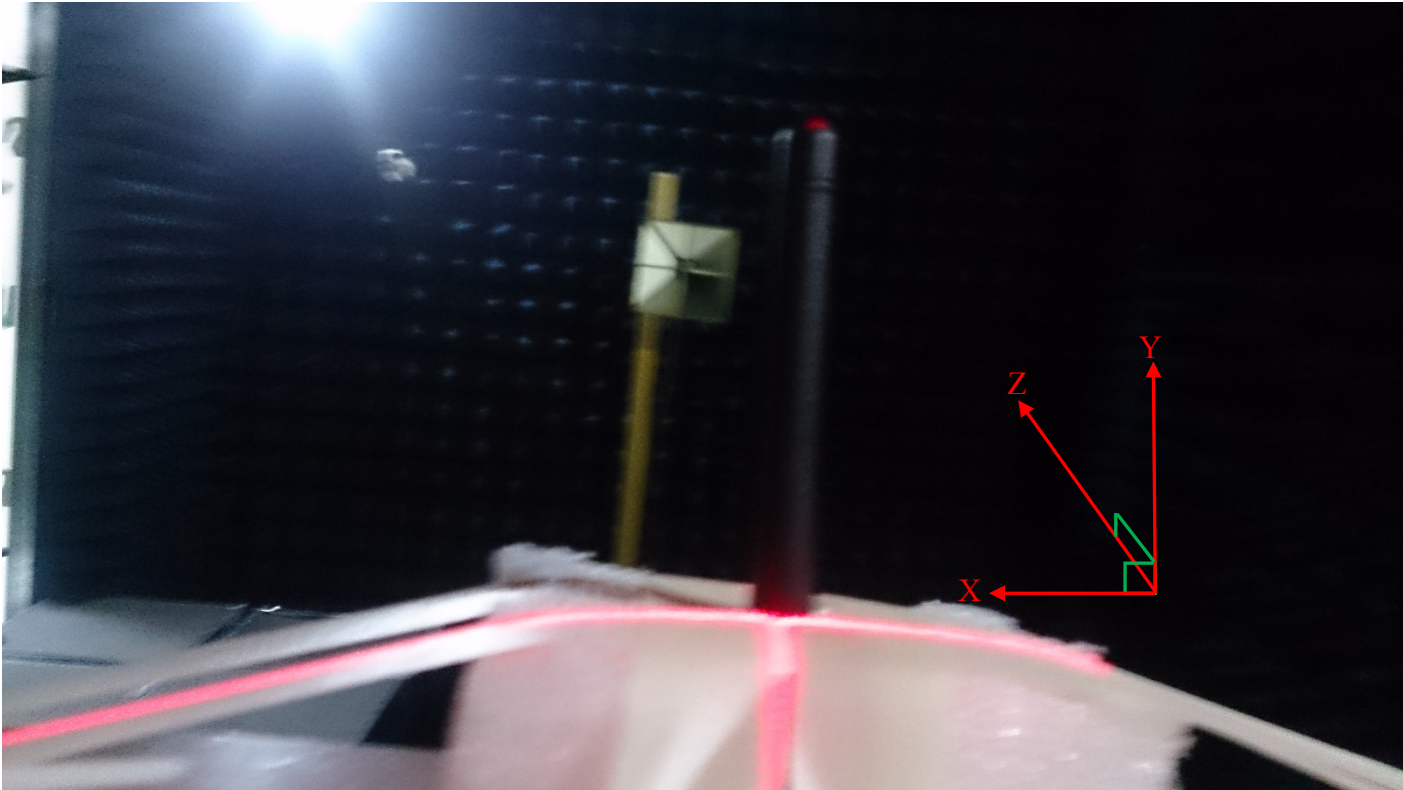Test time : 2016/9/5		
Company :	Model :	Project :
<p>Photo :</p> <p>場型量測示意圖</p> 		



Test time : 2016/9/5


Company :

Model :

Project :

Photo :

VSWR

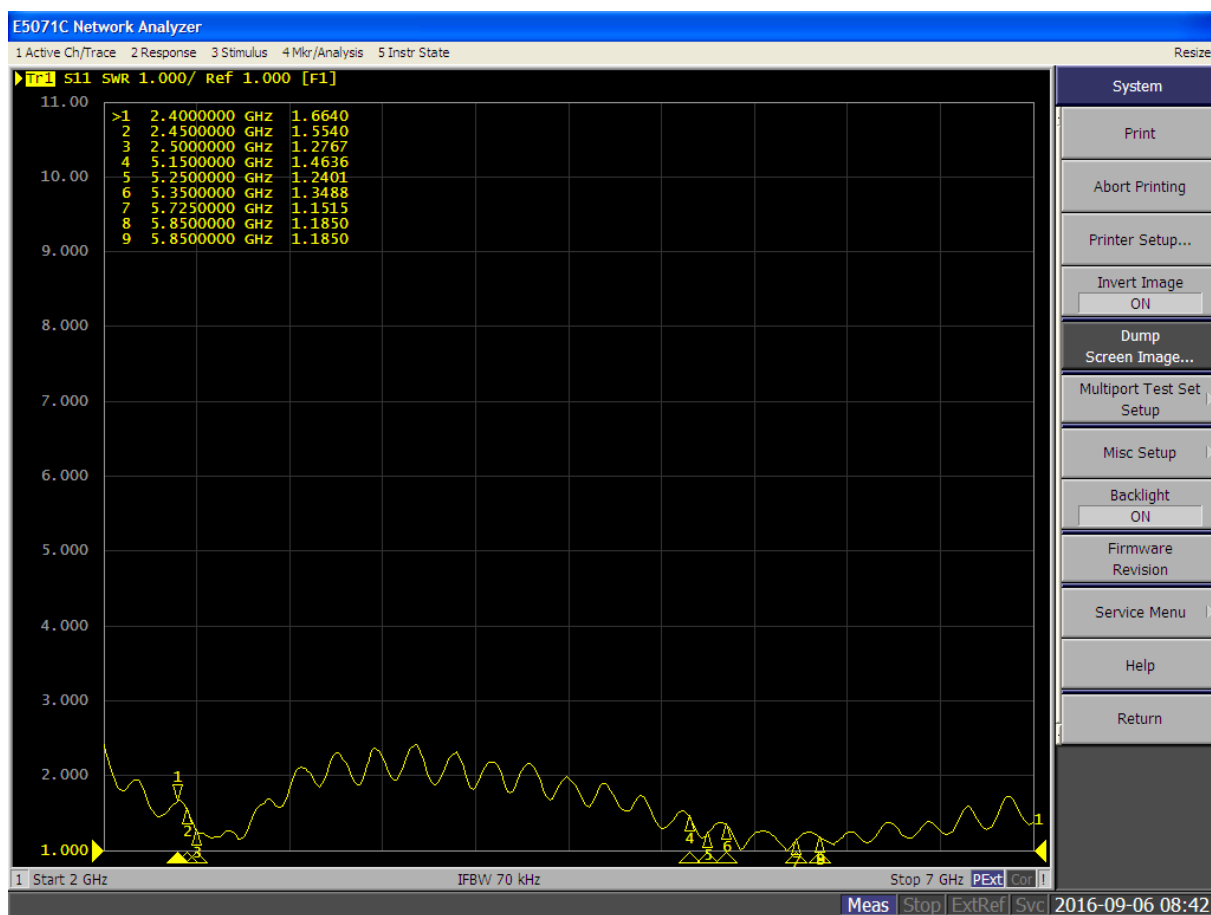

	VSWR
2400MHZ	1.6640
2450MHZ	1.5540
2500MHZ	1.2767
5150MHZ	1.4636
5250MHZ	1.2401
5350MHZ	1.3488
5725MHZ	1.1515
5850MHZ	1.1850



# 堅詠股份有限公司

Liteconn Co., Ltd.

TEL:+886-2-2995-0485 FAX:+886-2-2995-7395 <http://www.liteconn.com>

CONNECTOR & RF ANTENNA

Test time : 2016/9/5


Company :

Model :

Project :

Photo :

Return Loss

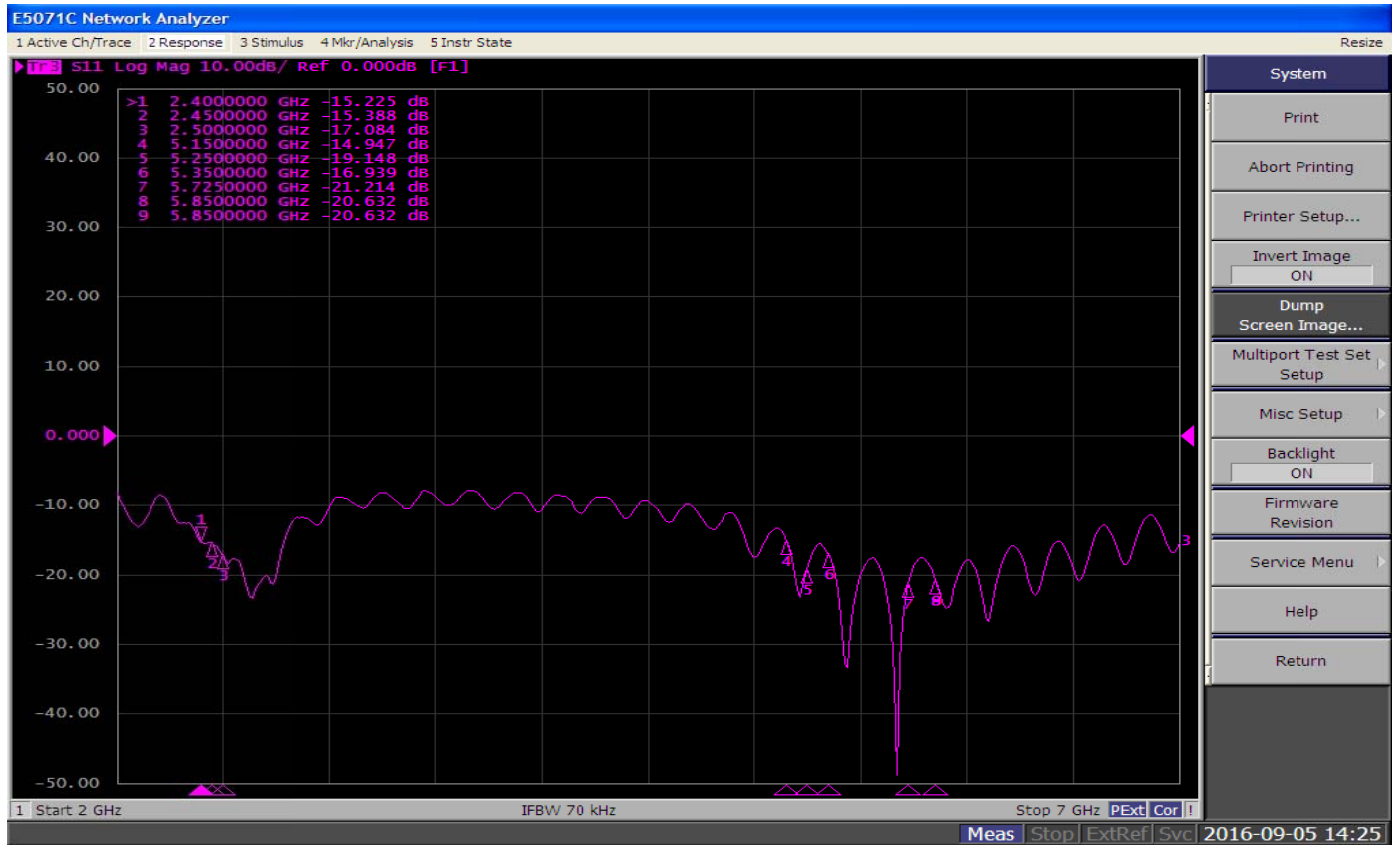

	Return Loss
2400MHZ	15.225
2450MHZ	15.338
2500MHZ	17.048
5150MHZ	14.947
5250MHZ	19.148
5350MHZ	16.939
5725MHZ	21.214
5850MHZ	20.632



# 堅詠股份有限公司

Liteconn Co., Ltd.

TEL:+886-2-2995-0485

FAX:+886-2-2995-7395

<http://www.liteconn.com>

CONNECTOR & RF ANTENNA

Test time : 2016/09/05

Company :


Model :

Project :


Photo :

ANTENNA


3D Radiation Pattern

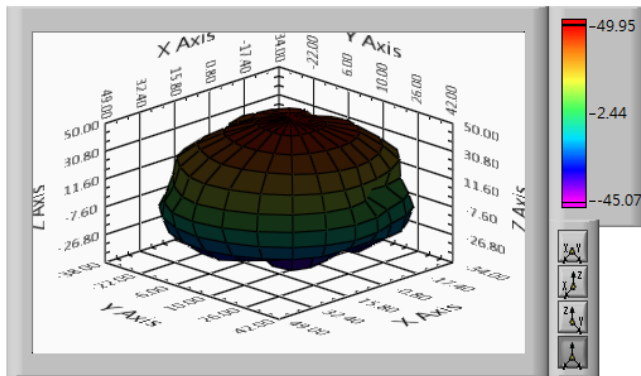

2400 MHz

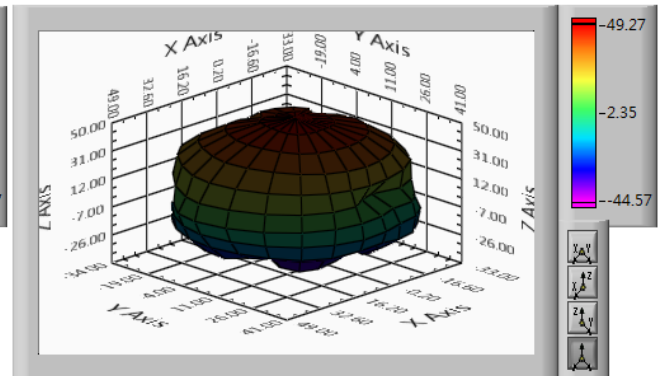

2450 MHz

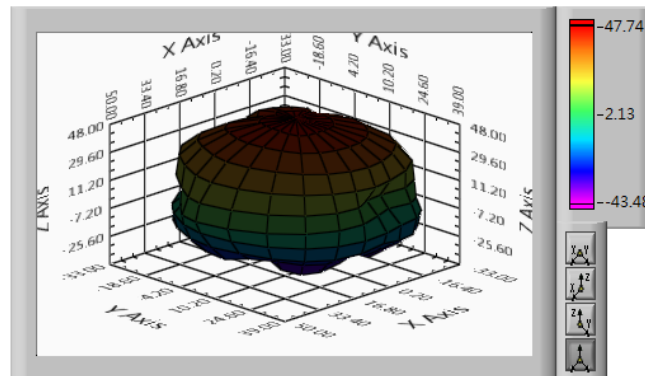

2500 MHz



# 堅詠股份有限公司

Liteconn Co., Ltd.

TEL:+886-2-2995-0485

FAX:+886-2-2995-7395

<http://www.liteconn.com>

CONNECTOR & RF ANTENNA

Test time : 2016/09/05

Company :


Model :

Project :


Photo :

ANTENNA


3D Radiation Pattern

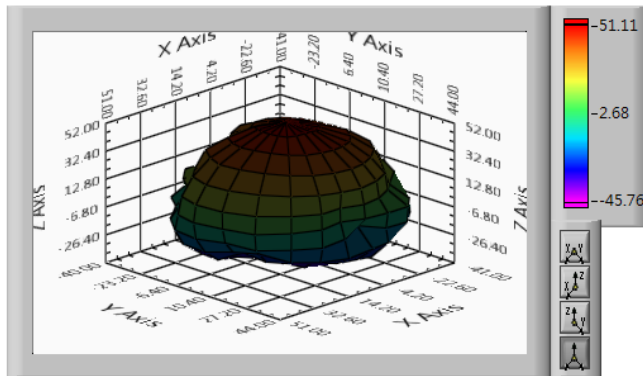


5150 MHz

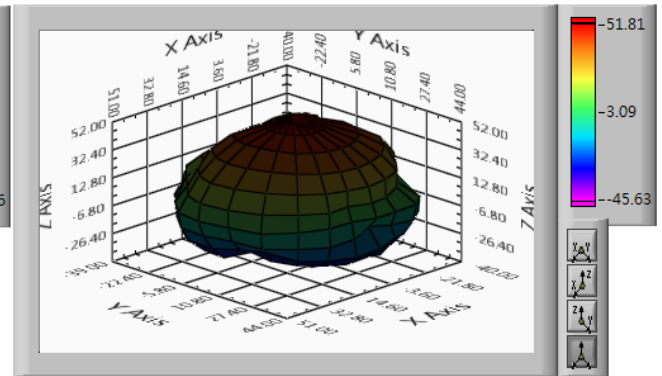


5250 MHz

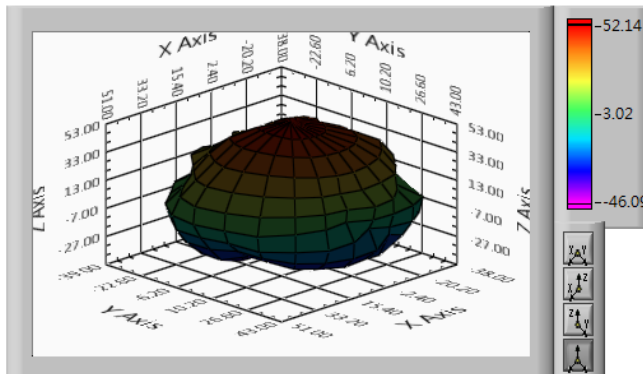

5350 MHz

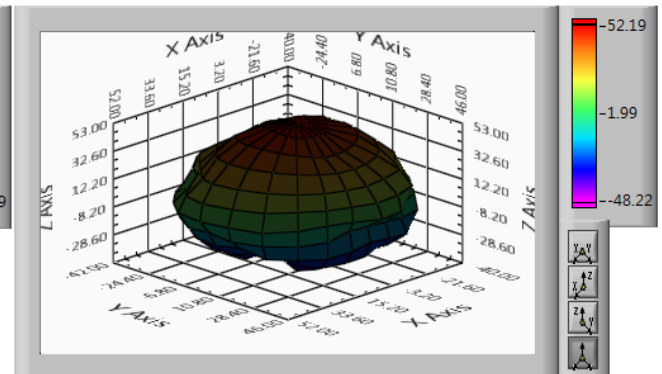

5725 MHz

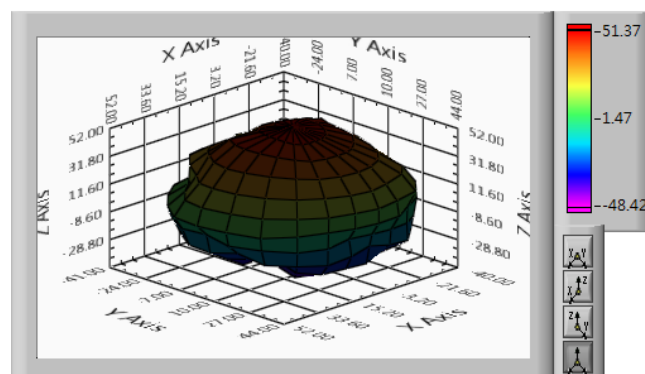

5850 MHz



# 堅詠股份有限公司

Liteconn Co., Ltd.

TEL:+886-2-2995-0485 FAX:+886-2-2995-7395 <http://www.liteconn.com>

CONNECTOR & RF ANTENNA

Test time : 2016/9/5


Company :

Model :

Project :

Photo :

	3D Gain		
Frequency (MHZ)	Peak Gain (dBi)	Average Gain (dB)	Efficiency [%]
2400	2.28	-2.73	53.31
2450	2.41	-2.55	55.66
2500	2.55	-2.35	58.33
5150	2.02	-4.39	36.21
5250	2.19	-3.92	40.21
5350	2.11	-3.99	39.43
5725	2.35	-3.72	42.12
5850	2.27	-3.82	41.32

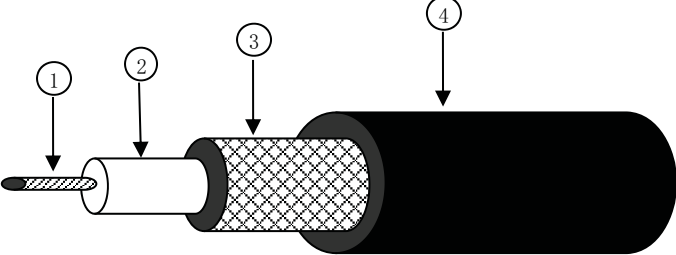电缆名称		RF1.13	
结构 Structure	项目 Item	标准值 Standard value	
①内导体 inner conductor	材料 Material	镀锡铜丝 tinned copper wire	
	组成: 总根数/单根外径 (mm) Makeup: total/O.D.ofevery wire (mm)	7/0.08±0.003mm	
	(绞合) 标准外径 (mm) (intertwist) NOM. O.D. (mm)	0.24±0.02mm	
②绝缘层 Insulation	材料 Material	聚全氟乙丙烯 (FEP)	
	颜色 colour	透明 clarity	
	标准外径 (mm) NOM. O.D. (mm)	0.682±0.05mm	
③外导体 outer conductor	材料 Material	镀锡铜丝 tinned copper wire	
	组成: 总根数/单根外径 (mm) Makeup: total/O.D.ofevery wire (mm)	16*4/0.05	
	标准外径 (mm) NOM. O.D. (mm)	0.91±0.03mm	
	覆盖率 (%) coverage ratic (%)	91±5	
④护套 jacket	材料 Material	聚全氟乙丙烯 (FEP)	
	颜色 colour	/	
	标准外径 (mm) NOM. O.D. (mm)	1.13(+0.07mm-0.03mm)	
电性能特性 Electrical characteristics		机械特性 mechanical properties	
项目 Item	标准值 Standard value	项目 Item	标准值 Standard value
1. 阻抗 Impedance	50±2Ω	1. 恒定温度 steady temperature	-55~+200℃
2. 电容 Capacitance	97pF/m	2. 最小弯曲半径 minimum bending radius	12mm
3. 驻波比 Standing wave ratio	≤1.3@0~6GHz	3. 最大拉伸强度 maximum tensile strength	0.6kg
4. 速率 Velocity	70%	4. 线缆重量 Cable weight	3.2g/m
5. 最大工作电压 Max.operating voltage	1000V	5. 额定温度 rated temperature	150℃
6. 最大工作频率 Max.operating frequency	6GHz	/	/
截面图		包装 Packing	
		项目 Item	标准值 Standard value
		包装方式 Packing mode	纸盘 Papery plate
		每盘长度 The length of each plate	1000m
		每盘接头数 Each connector plate number	≤3
		每段最短长度The shortest length of each root	≥10
使用提示 Use tips			
存储环境 Storage environment	温度: 30℃以下; 湿度: 20%~65%		
最佳保存周期 The best save cycle	2个月; 2个月以上作业性下降, 如上锡效果变差, 但电性能不受影响。夏季高温高湿环境开剥后需尽快流转		
加工温度 Processing temperature	260℃的极限情况下, 可短时间承受; 300℃以上分子通常带有的等端基会分解; 400℃以上发生显著的热分解		
铁氟龙收缩 Teflon Shrink	固有材料特性。绝缘: 0.2mm以下; 护套: 0.3mm以下		
护套窜动 Jacket traverse	加工长度 (护套残留长度) 低于5cm易发生		

# 物质安全资料表 (MSDS)

第 1 页 / 6 页

## 一、 物质与厂商资料



物质名称：镀锡铜线
物质编号：_____
制造商或供货商名称、地址及电话：苏州嘉尚金属材料科技有限公司；苏州市相城区阳澄湖镇石田路7号；
紧急联络电话/传真：0512-65423496//0512-65406052

## 二、 成分辨识资料

纯物质：

中英文名称： 镀锡软铜线 (TA)				
同义名词：				
化学文摘社登记号码 (CAS NO)：				
危害物质成分 (成分百分比)： 无				
序號	物質名稱	分子式	CAS NO.	成份含量%
1	铜	Cu	7440-50-8	97.67%
2	锡	Sn	7440-31-5	2.3%

## 三、 危害辨识资料

最 重 要 危 害 与 效 应	健康危害效应：粉状时刺激皮肤，吸入人体时对人体有害。固体时不易对人体健康造成伤害。
	环境影响：铜粉、铜屑、铜泥、锡渣会严重影响环境。
	物理性及化学性危害：传热、导电性极强，易与酸类或还原性强的化学物质反应，所以不能裸手拿铜线去接触火、电、化学药品。
	特殊危害：
主要症状：接触铜粉时皮肤有轻微发痒，固体时不会发生危害。	
物品危害分类：	

## 四、 急救措施

# 物质安全资料表 (MSDS)

第 2 页/6 页

不同暴露途径之急救方法:

吸入: 镀锡铜粉被吸入呼吸道, 少量时无特别反应, 吸入多了即入医院。

皮肤接触: 皮肤接触镀锡铜粉发痒时可先用清水冲洗, 严重时由医务人员处理, 更严重时入医院, 铜线本身对人体无害。

眼睛接触: 无害。

食入: 食入镀锡铜时, 入医院。

最重要症状及危害效应: \_\_\_\_\_

对急救人员之防护: \_\_\_\_\_

对医师之提示: \_\_\_\_\_

## 五、 灭火措施

适用灭火剂: /

灭火时可能遭遇之特殊危害:

1. /
2. /
3. /
4. /
5. /

特殊灭火程序:

1. /
2. /

消防人员之特殊防护装备: /

## 六、 泄漏处理方法

个人应注意事项:

/

环境注意事项:

/

清理方法:

/

## 七、 安全处置与储存方法



# 物质安全资料表 (MSDS)

第 3 页/6 页

处置：1、铜粉、铜屑、铜泥均由专业公司回收。  
2、铜耙、废铜可回炉重新熔练。

储存：镀锡铜线温度在 30 度以下，湿度不超过 85 度贮存。常温下要作好防护，防止氧化。

## 八、 泄露预防措施

工程控制：防雨淋、防潮湿。

### 控制参数

八小时日时量平均容许 浓度 TWA	短时间量平均 容许浓度 STEL	最高容许 浓度 CEILING	生物指针 BEIs

个人防护设备：/  
呼吸防护：/  
逃生：/  
手部防护：工作戴手套。  
眼睛防护：/  
皮肤及身体防护：/

卫生措施：/

## 九、 物理及化学性质

物质状态： 金属固体	形状： 圆形线状
颜 色： 银白色	气味： 无味
PH 值： 无	沸点/沸点范围： 无
分解温度： 1000 度以上	闪水点： 无 测试方法： 无
自燃温度： （不同气体下不同）	爆炸界限： 无
蒸气压： 无	蒸气密度： 无
密 度： 8.9g/cm3	溶解度： （不同溶液不同）

## 十、 安定性及反应性

# 物质安全资料表 (MSDS)

第 4 页/6 页

安定性：常温下稳定。

特殊状况下可能之危害反应：

1. 酸（如醋酸、浓硫酸），碱（如氢氧化钠），金属（如铜、银、汞，及其合金）；  
铜与浓硫酸、稀硫酸、盐酸、磷酸、醋酸在一定的条件下要产生化学反应。
2. 氧（含空气中的氧）：  
铜在氧气中易被氧化而生成氧化铜。
3. 氧化物：  
氧化铜。

4. 某些生锈金属：氧化铜。

应避免之状况：避免与酸类化学接触，不要在空气中长期放置。

应避免之物质：酸、氧气等。

危害分解为物：无

## 十一、 毒性资料

急毒性：吸入：1、不能消化、会停留在人体内。

皮肤：1、/痒

眼睛：1、/痒，发红

LD50（测试动物、吸收途径）：/

LC50（测试动物、吸收途径）：/

局部效应：/

致敏感性：/

慢毒性或长期毒性：/

特殊效应：/

## 十二、 生态资料

# 物质安全资料表 (MSDS)

第 5 页/6 页

可能之环境影响/环境流布：  
铜粉、铜泥、铜屑会对环境造成影响。

### 十三、 废弃处置方法

**废弃处置方法:**

# 国家废弃物名录

#### 十四、 运送资料

国际运送规定： /

联合国编号： /

国内运输规定： 1、 /

特殊运输方法及注意事项：无

## 十五、法规资料

### 使用法规:

## 劳工安全卫生设施规则

## 危险物及有害物通识规则

# 道路交通安全标准

事业废弃物贮存清除处理方法及设施标准化

# 物质安全资料表 (MSDS)

第 6 页/6 页

## 十六、 其它资料

参考文献资料	此记载内容是根据现有的资料作成,并不能保证数据之完整性正确性,必须随时改正。
制表者单位	名称: 苏州嘉尚金属材料科技有限公司
	地址/电话: 苏州市相城区阳澄湖镇石田路7号/17715142420
制表人	职称: 质量主管 姓名: 凌琴琴
制表日期	2016 年 07 月
备注	上述资料在符号“—”代表日前查无相关资料,而符号“/”代表此栏位对该物质并不适用。

## 山东华夏神舟新材料有限公司

## 产品安全技术说明书

## 第一部分 化学品及企业标识

## 产品信息：

化学品中文名称：聚全氟乙丙烯树脂

化学品英文名称：PERFLUORINATED ETHYLENE-PROPYLENE COPOLYMER

规格：DS600, DS601, DS602, DS608, DS610, DS611, DS612, DS618

## 企业信息：

公司名称：山东华夏神舟新材料有限公司

地址：中国山东省淄博市桓台县唐山镇

邮编：256401

联系电话：0086-0533-8519966（国内销售）

0086-0533-8521777（国外销售）

0086-0533-8520461（技术服务）

传真号码：0086-0533-8520396

电子邮件地址：shenzhou@godboat.com

企业应急电话：0086-533-8520398（仅工作时间可用）

0086-533-8513636（夜间值班电话）

技术说明书编号：SZ-001

生效日期：2011 年 06 月 01 日

## 第二部分 成分/组成信息

成分	C. A. S. 编号	质量百分比
四氟乙烯-六氟丙烯共聚物	25067-11-2	100

## 第三部分 危险性概述

危险性类别：无规定

侵入途径：无已知影响

健康危害：无已知影响

环境危害：无已知影响

燃爆危害：无已知影响

## 第四部分 急救措施

眼睛接触：没有特殊的危害性，不需要特别的急救措施

皮肤接触：没有特殊的危害性，不需要特别的急救措施。在接触熔融物质后，迅速用凉水冷却皮肤。不要从皮肤上剥下聚合物。烧伤处理要由医生进行。

吸入：在偶然吸进了过热或燃烧产生的烟雾的情况下，转移到新鲜空气处。如果症状持续，请就医。

食入：没有特殊的危害性，不需要特别的急救措施。

## 第五部分 消防措施

危害特性：无资料

有害燃烧产物：氟化氢、碳酰氟、全氟异丁烯

灭火方法及灭火剂：水、泡沫、化学干粉、二氧化碳

灭火注意事项：在着火情况下，使用自给式呼吸器。使用个人防护设备。在失火后清理现场时要戴防护手套

## 第六部分 泄露应急处理

应急处理：无特别的环境预防要求。请参阅第 7 部分和第 8 部分所列的防护措施

消除方法：扫掉并铲进合适的处理容器内。

回收哪些未损坏的和最小污染的物质去再使用和再生。

## 第七部分 操作处置与储存

### 操作注意事项

安全操作注意事项：打开容器时，防止吸入可能喷施出的蒸汽。在有尘埃或挥发物产生的地方，提供适当的通风设备。

### 储存注意事项

储存的基本条件和要求：密封。避免污染。

储存限量：无资料

储存注意事项	: 无资料
禁配物	: 粉末化了的金属, 精细分隔开的铝, 强氧化剂
防火防爆注意事项	: 无资料
分装注意事项	: 无资料

## 第八部分 接触控制/个体防护

工程控制: 在加工设备的上方安装局部排风设备

检测方法: 当工人们面临高于暴露极限之上的浓度时, 必须使用适当的合格的呼吸器

手防护 : 操作热物质时, 用防热手套

眼睛防护: 固态, 安全眼镜; 熔化态, 面罩, 必须戴化学防护镜

身体防护: 如果有可能接触到热的或熔融了的物质, 穿戴耐热服装和防护鞋。按规定时间  
清洁设备、工作区和衣服。

其他防护: 无资料

其他 : 休息以前和工作结束时洗手。不要呼吸从热聚合物上散发出来的烟气。

## 第九部分 理化特性

外观与形状

形状	: 颗粒
颜色	: 乳白色半透明
气味	: 无.
比重	: 2.1-2.2
沸点	: 无数据资料
熔点	: 265±10℃
闪电	: 难燃, 当火源移开后, 火焰消失
引燃温度	: 无数据资料
爆炸上限	: 无数据资料
爆炸下限	: 无数据资料
饱和蒸汽压	: 无数据资料
相对蒸汽密度	: 无数据资料
密度	: $2.14-2.17 \times 10^3 \text{kg/m}^3$
溶解性	: 不溶
辛醇/水分配系数的对数值	: 无数据资料

临界温度	: 无数据资料
燃烧值	: 无数据资料
临界压力	: 无数据资料
主要用途	: 泵阀管道衬里、电线电缆的绝缘材料
其他理化性质	: 热分解: $>420^{\circ}\text{C}$ , 在着火情况下, 会生成有害分解产物。为防止热分解, 应避免过热。

## 第十部分 稳定性和反应性

稳定性: 无资料

禁配物: 粉末化了的金属, 精细分隔开的铝, 强氧化剂

避免接触的条件: 温度  $>420^{\circ}\text{C}$ 。如果温度过高或时间过长, 会有危险的分解产物生成

聚合危害: 受热会释放出危险的气体。在推荐的贮存条件下时稳定的。

分解产物: 氟化氢、碳酰氟、全氟异丁烯

## 第十一部分 毒理学资料

急性毒性 : 无数据资料

亚急性和慢性毒性: 无数据资料

刺激性 : 无数据资料

致敏性 : 无数据资料

致突变性 : 无数据资料

致畸性 : 无数据资料

致癌性 : 无数据资料

其他 : 致畸性: 在动物试验中未发现诱变或畸变的影响。

原来有肺部疾病的人会增加对过度暴露的毒性的敏感性。

过量暴露会影响人类健康, 如下:

吸入聚合物烟雾: 发热病、发烧、咳嗽

肺: 刺激、不舒服、呼吸困难、水肿

眼睛、鼻腔、上呼吸道: 刺激

皮肤接触: 刺激、不舒服、皮疹

眼睛接触: 腐蚀、溃疡



## 第十二部分 生态学资料

生态毒性：此产品本身无数据资料  
生物降解性：无数据资料  
非生物降解性：无数据资料  
生物富集或生物累积性：无数据资料  
其他有害作用：此产品本身无数据资料。因为它不溶于水，所以估计毒性较低

## 第十三部分 废弃处置

废弃物性质：不属于危险废物  
废弃处置方法：如回收再生不可行，按当地规定处理  
废弃注意事项：无数据资料

## 第十四部分 运输信息

国内运输法规：不适用  
危险货物编号：不适用  
UN 标号：不适用  
包装标志：不适用  
包装类别：不适用  
包装方法：无资料  
运输注意事项：无资料  
国际运输法规：从运输法规的意义上看，不属于危险物品

## 第十五部分 法规信息

法规信息：无规定  
国际法规：  
根据欧共体 EC-67/548/EEC 或 1999/45/EC 指令性条款，不属于危险物质或制剂。  
根据欧共体指令性条款（EC）或者相应的国家法律，此产品不需贴标签。

## 第十六部分 其他信息

参考文献：无资料  
填表时间：2011 年 06 月 01 日

填表部门：山东华夏神舟新材料有限公司技术处

修改说明：本产品安全技术说明书由山东华夏神舟新材料有限公司起草、修订，解释权归山东华夏神舟新材料有限公司所有。

※东岳华夏新材料有限公司的聚全氟乙丙烯树脂主要针对一般产业，产品的设计和制造不针对医疗行业。至于其是否适用于医疗行业以及是否具有安全性，本公司没有做过相关试验。因此，本公司难以就此作出保证。如果采用本公司产品用于医疗原料，客户必须参照自行实施的相关试验、医疗专家的见解以及政府有关法规进行判断。同时，采用本公司产品用于医疗原料的客户，必须在认可本公司提出的相关条件和内容，并与本公司签订合同后，方可获得相关产品。

※此安全技术说明书所给出的信息仅作为安全搬运、储存、运输、处理等的指导，而不能被作为担保和质量指标。以上的信息资料只适用于此处所指定的物质。对其他的与此物质相关联的物质，或此物质被加工过或改变过了的情况，均不适用，除非特别指明。



July 01, 2014

To: JIANHUA FENG  
SUZHOU XIANGCHENG ZHENGXU WIRES AND CABLES CO LTD  
Email: zzg@zhxdz.com

Subject: Follow-Up Testing Completed - Conforming Results  
Sample Tag #: F133608, 11149  
File #: E365708, Vol. #: 1  
CCN: AVL2, Appliance wiring material - component

Dear Sir / Madam:

**Please Note: This letter is automatically sent when sample tag is completed with Conforming results.**

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL.

The Follow-Up Services Testing has been completed on the Appliance wiring material - component, 11149 selected by our UL Representative at your SUZHOU XIANGCHENG ZHENGXU WIRES AND CABLES CO LTD, SUZHOU JIANGSU, China factory on May 15, 2014.

Please see below an itemized list of test(s) performed under the above referenced Tag.

HORIZONTAL-SPECIMEN APPLIANCE-WIRE FLAME TEST

Your continued cooperation in maintaining conformance with the applicable test requirements is appreciated.

If we can be of any further assistance, please do not hesitate to contact Xiao-lan Zhou at +86 512 6875 8537, Ext. 66537, or via email at FUSAdmin.SUZ@ul.com.

**Note: Should any of your FUS Sample Testing contact information change, please let us know so our records can be updated.**

CC:

No.06027-1  
Feb / 26/'08

材料証明書  
MATERIAL CERTIFICATE

当社製品には下記の材料が使われている事を証明致します。  
WE HEREBY CERTIFY THAT THE FOLLOWING MATERIALS ARE USED IN OUR PRODUCT.

PRODUCT NAME : MHF series micro coaxial connector PLUG & RECEPTACLE VERTICAL

Plug, Non halogen free type

Part No.	Contents	Housing	Contact	Ground contact
20278-101R-08	材質名/ Material	PBT	Phosphor bronze	Phosphor bronze
20278-111R-08				
20278-101R-13	型名/ Cat No.	DURANEX 3116	C5210R-H	C5191R-1/2H
20278-111R-13				
20278-101R-32	材料メーカー	WINTECH POLYMER LTD.	Nippon Mining & Metals Co.,Ltd.	HARADA METAL INDUSTRY Co.,Ltd.
20278-111R-32	Manufacturer			
20278-101R-18				
20278-111R-18	UL94難燃性	V-0	-----	-----
20308-101R-13	UL94 flame			
20308-111R-13	class			
20308-101R-32				
20308-111R-32	UL file No.	E213445	-----	-----
20351-101R-37				
20351-111R-37				

※添付資料 : ULカード写し／UL CARD COPY

APPROVAL	CHECK	ORIGINATOR
T.Harada Feb/26/'08	T.Tagawa Feb/26/'08	K.Ohbayashi Feb/26/'08

## Plug, Halogen free type

Part No.	Contents	Housing	Contact	Ground contact
20278-102R-08	材質名/ Material	PBT	Phosphor bronze	Phosphor bronze
20278-112R-08	型名/ Cat No.	XFR4840 GF10	C5210R-H	C5191R-1/2H
20278-102R-13	材料メーカー	WINTech POLYMER LTD.	Nippon Mining & Metals Co.,Ltd.	HARADA METAL INDUSTRY Co.,Ltd.
20278-112R-13	Manufacturer			
20278-102R-32	UL94難燃性	V-0	-----	-----
20278-112R-32	UL94 flame			
20278-102R-18	class			
20278-112R-18	UL file No.	E213445	-----	-----
20351-102R-37				
20351-112R-37				

※添付資料：ULカード写し／UL CARD COPY

## Receptacle

Part No.	Contents	Housing	Contact	Ground contact
20279-001E-01	材質名/ Material	LCP	Brass	Phosphor bronze
20314-001E-01	型名/ Cat No.	VECTRA E130i	C2680R-o	C5191R-1/2H
	材料メーカー	Polyplastics Co.,Ltd	Nippon Mining & Metals Co.,Ltd.	HARADA METAL INDUSTRY Co.,Ltd.
	Manufacturer			
	UL94難燃性	V-0	-----	-----
	UL94 flame			
	class			
	UL file No.	E 106764	-----	-----

※添付資料：ULカード写し／UL CARD COPY

QMFZ2 Component – Plastics Friday, October 24, 2003 E213445

**WINTECH POLYMER LTD**  
 18-1 KONAN 2-CHOME MINATO-KU TOKYO 108-8280 JP

Material Designation: **3116(e)**  
 Product Description: Polybutylene Terephthalate (PBT), designated "Duranex" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL  NC, BK	0.75	V-0	4	0	130	—	130	—	—
	1.5	V-0	3	0	130	120	130	—	—
	3	5VA	2	0	130	120	130	—	—
CTI: 2	IEC CTI (V): —	HVTR: 3	D495: 6					IEC Ball Pressure (° C): —	
Dielectric Strength (kV/mm): 23		Volume Resistivity (10*ohm-cm): 16					Dimensional Stability(%):0.0		
ISO Tensile Strength (MPa): —		ISO Flexural Strength (MPa): —					ISO Heat Deflection (C): —		
ISO Tensile Impact (kJ/m²): —		ISO Izod Impact (kJ/m²): —					ISO Charpy Impact(kJ/m²): —		

(e) Virgin and regrind from 1 to 50 by weight incl. have the same basic material characteristics (at a minimum thickness of 0.75 mm), except for 310EP which has a lower as received Tensile Impact value from 26 to 50 percent regrind.

Report Date: 11/15/2000 Underwriters Laboratories IncR

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.

Component - Plastics

E213445

**WINTech POLYMER LTD**

18-1 KONAN 2-CHOME, MINATO-KU, TOKYO 108-8280 JP

**XFR 4840 GF10**

Polybutylene Terephthalate (PBT), "Duranex", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HAJ	RTI Elec	RTI Imp	RTI Str
ALL	0.75	V-0	1	0	75	75	75
	1.5	V-0	1	0	75	75	75
	3.0	V-0	1	0	75	75	75

Comparative Tracking Index (CTI): **1**

Dimensional Stability (%): -

High-Voltage Arc Tracking Rate  
(HVT): **0**High Volt, Low Current Arc Resis (D495): **5**Dielectric Strength (kV/mm): **24**Volume Resistivity (10xohm-cm): **14**

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULL.

Report Date: 2006-07-24

Last Revised: 2006-07-25

Underwriters Laboratories Inc®

**IEC and ISO Test Methods**

Test Name	Test Method	Units	Thickness Tested (mm)	Value
IEC Flammability	IEC 60695-11-10	Class (color)	0.75	V-0 (ALL)
			1.5	V-0 (ALL)
			3.0	V-0 (ALL)
Glow-Wire Flammability (GWFI)	IEC 60695-2-12	C	-	-
Glow-Wire Ignition (GWIT)	IEC 60695-2-13	C	-	-
IEC Comparative Tracking Index	IEC 60112	Volts (Max)	-	-
IEC Ball Pressure	IEC 60695-10-2	C	-	-
ISO Heat Deflection (1.80 MPa)	ISO 75-2	C	-	-
ISO Tensile Strength	ISO 527-2	MPa	-	-
ISO Flexural Strength	ISO 178	MPa	-	-
ISO Tensile Impact	ISO 8256	kJ/m2	-	-
ISO Izod Impact	ISO 180	kJ/m2	-	-
ISO Charpy Impact	ISO 179-2	kJ/m2	-	-

Underwriters Laboratories Inc®

**POLYPLASTICS CO LTD**  
VECTRA DIV 18-1 KONAN 2-CHOME MINATO-KU TOKYO 108-8280 JAPAN

Material Designation: **E130i(d)(e)**

Product Description: Liquid Crystal Polymer (LCP), thermotropic aromatic polyester, designated "Vectra" furnished as pellets.



Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.75	V-0	2	4	240	220	240	-	-
	1.5	V-0	1	4	240	220	240	-	-
	3.0	V-0	0	4	240	220	240	-	-
CTI: 4		HVTR: 0		D495: 5			IEC Ball Pressure (°C): -		
Dielectric Strength (kV/mm): 39		Volume Resistivity (10 <sup>9</sup> ohm-cm): 16					Dimensional Stability(%): 0		
ISO Tensile Strength (MPa): -		ISO Flexural Strength (MPa): -					ISO Heat Deflection (°C): -		
ISO Tensile Impact (kJ/m²): -		ISO Izod Impact (kJ/m²): -					ISO Charpy Impact (kJ/m²): -		

- (d)Virgin and regrind up to 50% by weight incl. have the same basic material characteristics for colors NC and BK.
- (e)In addition, regrind at 26 to 50% have the same basic characteristics at a minimum of 1.5mm except RTI's for the Mechanical w/Impact property is 180C.

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.




PART NO.  
20278-...R-...

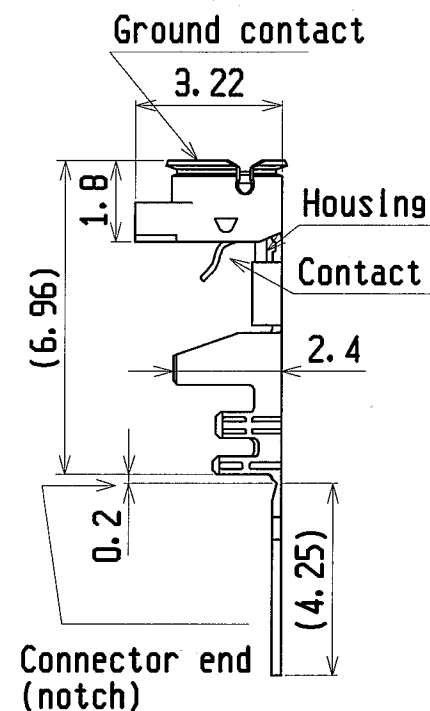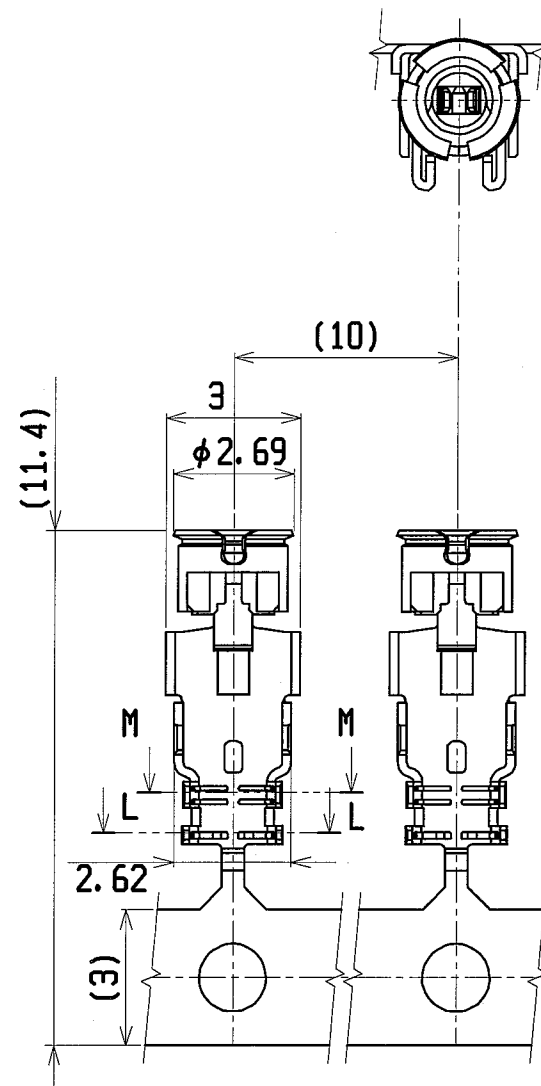




Part No. 20278-101R-08  
20278-102R-08  
20278-101R-13  
20278-102R-13  
20278-101R-32  
20278-102R-32

For hand tool  
(with notch)

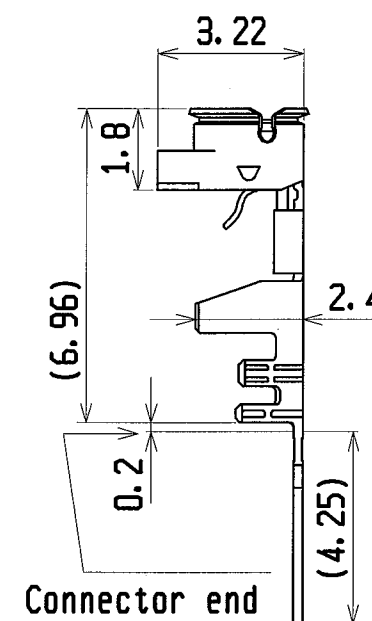


Part No. 20278-111R-08  
20278-112R-08  
20278-111R-13  
20278-112R-13  
20278-111R-32  
20278-112R-32

For semi auto  
termination machine  
(without notch)

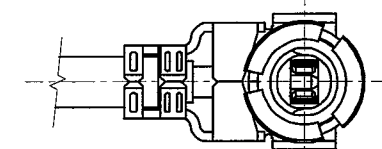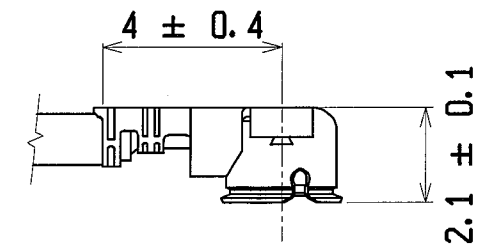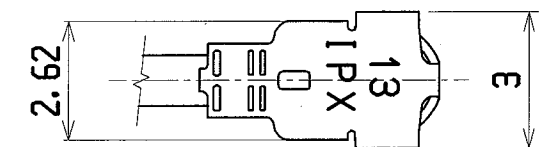

Cable Ass'y


Plug  
P/N 20278-1...R-08  
P/N 20278-1...R-13  
P/N 20278-1...R-32

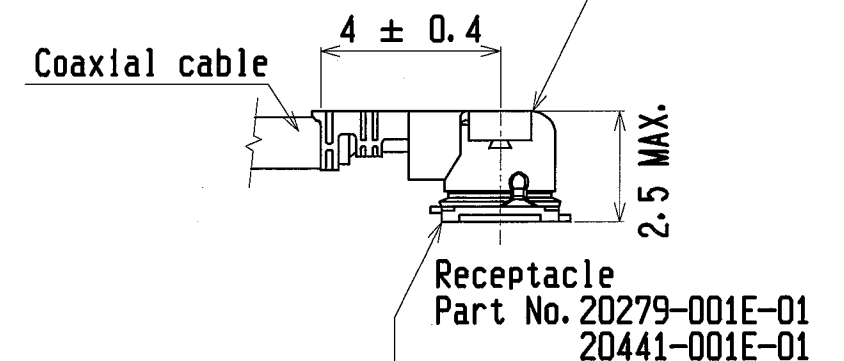



MATING

Receptacle  
Part No. 20279-001E-01  
20441-001E-01


GENERAL TOLERANCE		
6 MAX.	±0.2	
6 OVER MAX. 30	±0.3	
30 OVER MAX. 120	±0.5	
ANGLE	±2°	

19C	Z08056	K.O	Feb/04/08	EK	DESIGN'D BY	DATE	<div><div>I-PEX</div><div>Interconnect and Packaging Electronics TOKYO, JAPAN</div></div>				
18C	Z07346	K.O	Jul/10/08	E.K	K. Ohbayashi	JUN/13/01					
17C	Z05233	K.O	May/18/05	T.H	CHK'D BY	DATE	<div><div>TITLE</div><div>MF series micro coaxial connector plug vertical (ground contact : gold plating)</div></div>				
16C	Z05024	K.O	Jan/20/05	T.H							
15C	Z04398	K.O	Nov/12/04	T.H	APP'D BY	DATE	<div><div>General</div></div>				
REV	ECN	BY	DATE	APP	K. Katabuchi	JUN/13/01					
REV. RECORD					CUSTOMER COPY	PROJECTION 	SCALE	UNIT	DWG. No.	SHEET	REV.
SERIES No.		2814					6/1	mm	20278	1/4	19C




PART NO.  
20278-\*\*\*R-\*\*\*

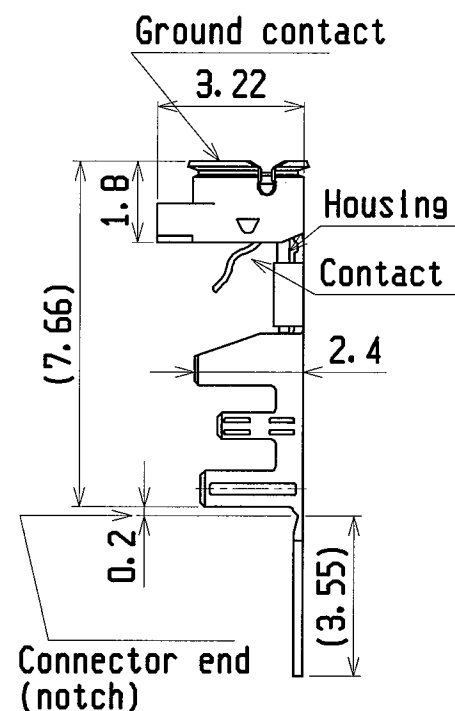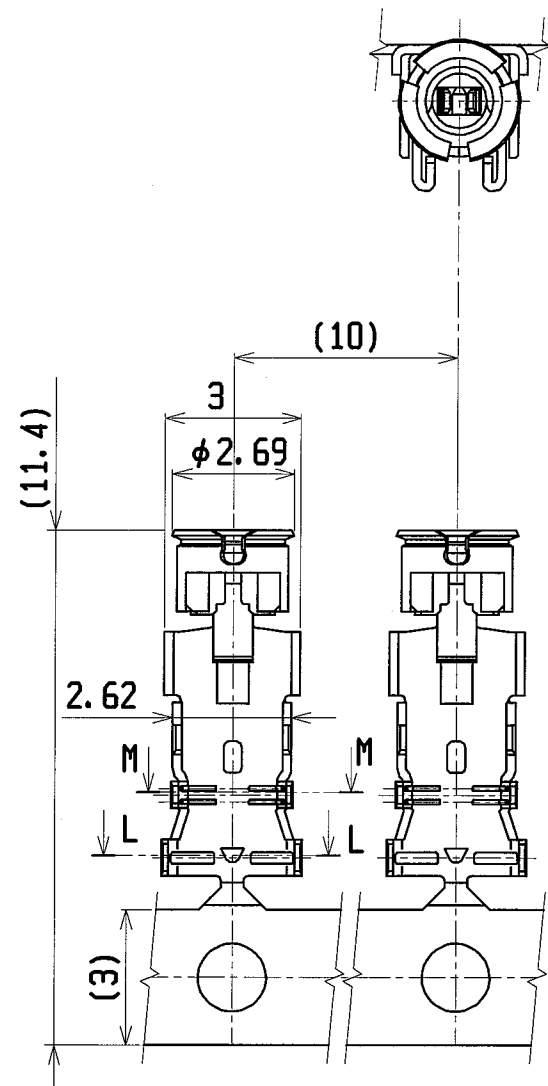

Part No. 20278-101R-18  
20278-102R-18  
For hand tool  
(with notch)

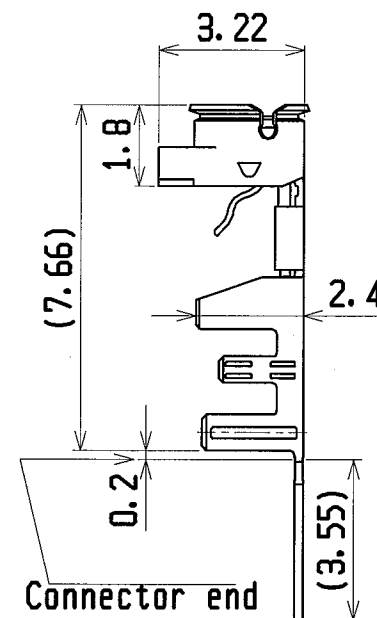


Part No. 20278-111R-18  
20278-112R-18  
For semi auto  
termination machine  
(without notch)

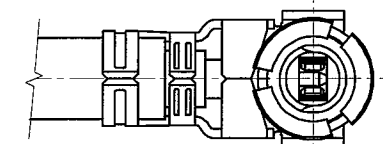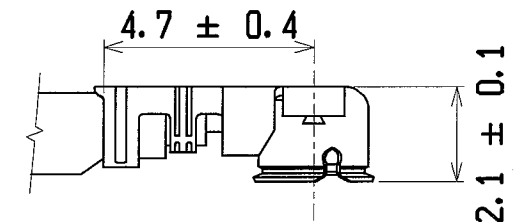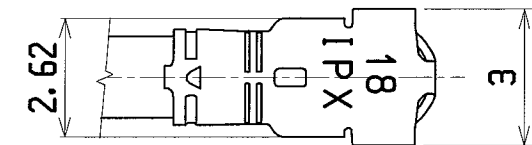

Cable Ass'y

Plug  
P/N 20278-1\*\*R-18

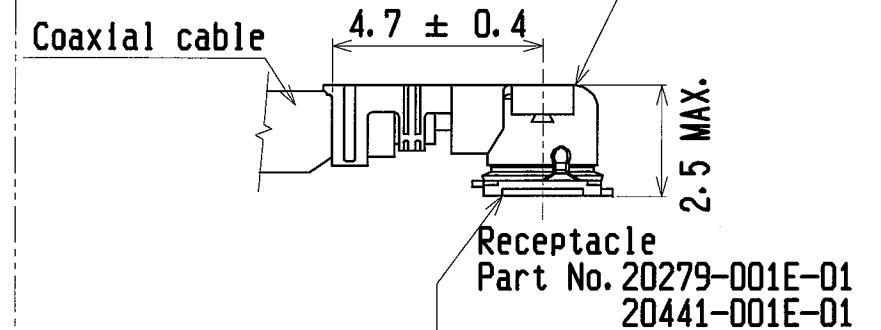


MATING

GENERAL TOLERANCE	
6 MAX.	±0.2
6 OVER MAX. 30	±0.3
30 OVER MAX. 120	±0.5
ANGLE	±2°


<div></div>					DESIGN' D BY		DATE		<div>I-PEX</div> <div>Interconnect and Packaging Electronics TOKYO, JAPAN</div>									
					CHK' D BY		DATE											
					APP' D BY		DATE											
					TITLE		General											
REV. RECORD					CUSTOMER COPY		<div>PROJECTION</div> <div></div>		SCALE		UNIT		DWG. No.		SHEET		REV.	
SERIES No. 2814									6/1		mm		20278		2/4		19C	
REV					ECN		BY		DATE		APP							

Part No. of non halogen free type		20278-101R-08 20278-111R-08	20278-101R-13 20278-111R-13	20278-101R-32 20278-111R-32	20278-101R-18 20278-111R-18
Part No. of halogen free type		20278-102R-08 20278-112R-08	20278-102R-13 20278-112R-13	20278-102R-32 20278-112R-32	20278-102R-18 20278-112R-18
Housing color		White	Black	Black	White
Applicable cable nominal dimension		<p>※ NOTE-1</p>	<p>※ NOTE-1</p>	<p>※ NOTE-1</p>	<p>※ NOTE-1</p>
Braided shield of Outer conductor 外部導体の編組		Single / 1重編組	Single / 1重編組	Double / 2重編組	Single / 1重編組
P/N of hand Tool		90187-008C	90187-013C	90187-032C	90233-018
P/N of semi auto termination machine		90213-008C	90213-013C	90213-032C	90232-018
Sect. M-M					
Sect. L-L					
Crimp Height	CH-1	1.34~1.40	1.34~1.40	1.34~1.40	1.34~1.40
	CH-2	0.76~0.84	1.06~1.14	1.20~1.30	1.41~1.49
	CH-3	0.85~0.97	1.15~1.35	1.26~1.46	1.70~1.80

Cable cut length



Crimp Height

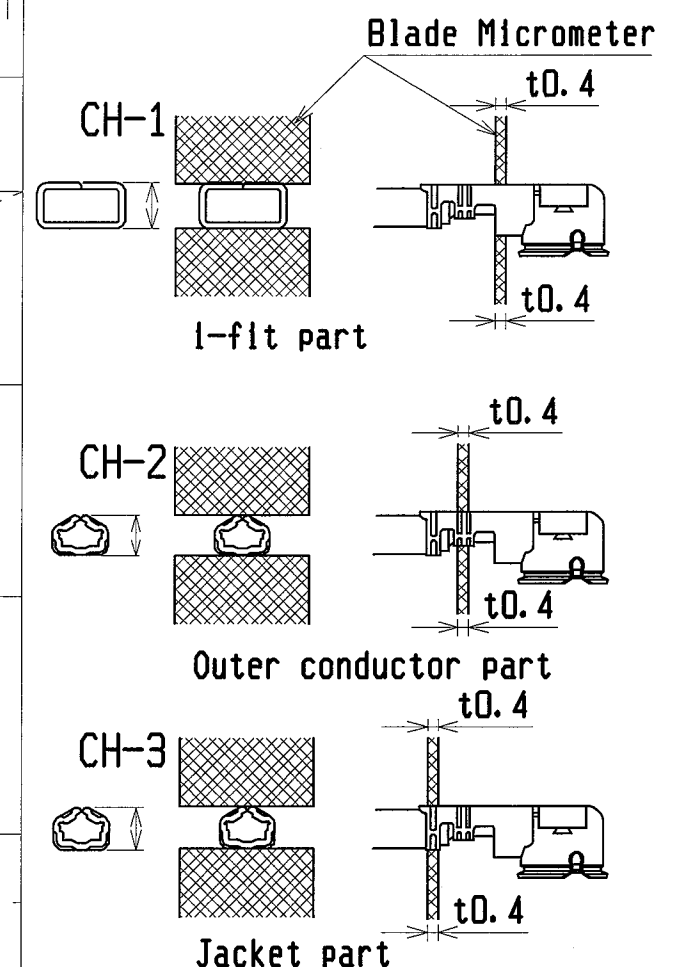

NOTE-1

中心導体, 外部導体への半田コーティングは不可  
Must not use solder coated  
inner conductor and outer conductor.

<div style="display: flex; justify-content: space-between;"> <div>             DESIGN'D BY              CHK'D BY              APP'D BY              REV ECN BY DATE APP              REV. RECORD              SERIES No. 2814           </div> <div>             DATE              DATE              DATE              CUSTOMER COPY              PROJECTION           </div> </div>					<b>I-PEX</b> Interconnect and Packaging Electronics TOKYO, JAPAN TITLE MHF series micro coaxial connector plug vertical (ground contact : gold plating) SCALE UNIT DWG. No. 20278 SHEET REV. 3/4 19C	

# Notes


## 1. Material

- (1) Housing : PBT , UL94V-0
- (2) Contact  
phosphor bronze  
gold plating 0.1 $\mu$ m MIN.  
over nickel 1.27 $\mu$ m MIN.
- (3) Ground contact  
phosphor bronze  
gold plating 0.05 $\mu$ m MIN.  
over nickel 1.27 $\mu$ m MIN.

## 2. Packing : reel

3. Mating partner part No.  
: 20279-001E-01, 20441-001E-01

## 4. Permissible load of cable at mating

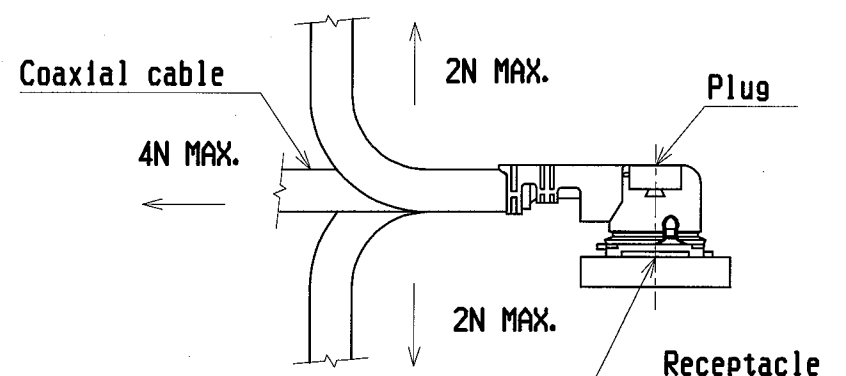

## 5. Suggestions for mating & unmating operation.

### 5-1 Mating.

Please mate the connector straightly to vertical direction as much as possible, adjusting the mating axis of plug and receptacle. As excessive slant angle mating may break the connector, please don't do it.

## 1. 材料

- (1) ハウジング : PBT, UL94V-0
- (2) コンタクト  
りん青銅  
金メッキ0.1 $\mu$ m MIN.  
下地 ニッケル1.27 $\mu$ m MIN.
- (3) グランドコンタクト  
りん青銅  
金メッキ0.05 $\mu$ m MIN.  
下地 ニッケル1.27 $\mu$ m MIN.

## 2. 梱包 : リール

3. かん合相手 part No.  
: 20279-001E-01, 20441-001E-01

## 4. コネクタかん合後のケーブルに対する荷重



## 5. コネクタかん合時および抜去時の注意

### 5-1 コネクタ挿入時

PlugとReceptacleのかん合軸を合わせ、できるだけ垂直に挿入して下さい。極端な斜め挿入は行わないで下さい。コネクタ破損の原因となりますので、過度なこじり挿抜は行わないで下さい。

## 5-2 Unmating.

- (1) In case of unmating by pulling tool.  
Please use the pulling tool as the following drawing, and please pull plug to vertical direction as directly as possible.
- (2) In case of unmating directly by hand  
Please catch the catching area of plug, and please pull plug to vertical direction as directly as possible.

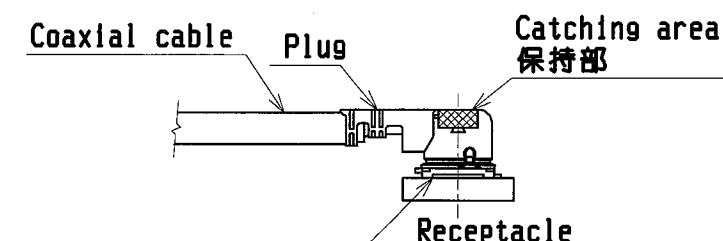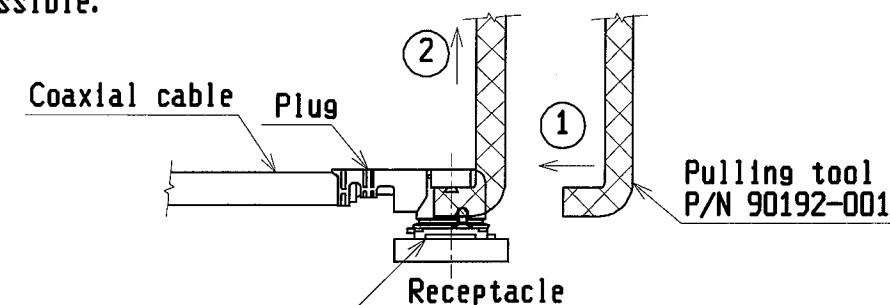

## 5-3 Crimp over standards of outer conductor

Standards: Less than 10% from total numbers of outer conductor  
(Numbers of outer conductor's crimp over from outer conductor's barrel)

## 5-4 Caution about Heat shrinkage tubes

Please be careful not to melt housing when using heat shrinkage tubes. It will become cause of open circuit.

## 6. This is 'Pb-free' connector.

## 5-2 コネクタ抜去時

- (1) 抜去ジグを用いる場合  
下図のようにできるだけ垂直に引き抜いて下さい。
- (2) 手で直接引き抜く場合  
下図の保持部をつかみ、できるだけ垂直に引き抜いて下さい。

## 5-3 外部導体はみ出し量


外部導体はみ出し量規定  
: 外部導体トータル本数の10%以下  
(外部導体パレルの外にはみ出し量)

## 5-4 熱収縮チューブについての注意

熱収縮チューブで外部導体を覆う場合は、導通不良の原因となりますので、熱によりハウジングを溶融させないよう注意してください。

## 6. 本コネクタは'Pb-free'である

GENERAL TOLERANCE	
6 MAX.	$\pm 0.2$
6 OVER MAX. 30	$\pm 0.3$
30 OVER MAX. 120	$\pm 0.5$
ANGLE	$\pm 2^\circ$

					DESIGN' D BY		DATE		<div><div>I-PEX</div><div>Interconnect and Packaging Electronics TOKYO, JAPAN</div></div>			
					CHK' D BY		DATE					
					APP' D BY		DATE					
REV	ECN	BY	DATE	APP	TITLE					General		
					MHF series micro coaxial connector plug vertical (ground contact : gold plating)							
REV. RECORD					CUSTOMER COPY		PROJECTION 	SCALE	UNIT	DWG. No.	SHEET	REV.
SERIES No.		2814						-/-	mm	20278	4/4	19C

# MATERIAL SAFETY DATA SHEET (MSDS)

Issued: Oct 3, 2012

Revised: Oct 3, 2012

File No. 2302-1

## 1. CHEMICAL PRODUCT & COMPANY IDENTIFICATION

CHEMICAL PRODUCT NAME : DURANEX® 310NF EF2001  
NAME OF COMPANY : WinTech Polymer Ltd.  
SECTION IN CHARGE : Quality Assurance Dept.  
ADDRESS : 2-18-1 Konan, Minato-ku, Tokyo, 108-8280 Japan  
TELEPHONE NUMBER : 03-6711-8605  
FACSIMILE NUMBER : 03-6711-8616

## 2. HAZARDS IDENTIFICATION

【GHS  
CLASSIFICATION】 :

•Physical and Chemical Hazards : Flammable solids : Classification not possible  
Self-reactive substances and mixtures : Not applicable  
Pyrophoric solids : Not classified  
Self-heating substances and mixtures : Not classified  
Substances and mixtures, which in contact with water, emit flammable gases : Not classified  
Oxidizing solids : Not classified  
Corrosive to metal : Not classified

•Health Hazards : Carcinogeneses : No hazard  
Specific target organ/systemic toxicity (Repeated exposure) : No hazard

•Environmental Hazards : No hazard

【SYMBOL】 : None

【SIGNAL WORD】 : None

【HAZARD STATEMENT】 : None

【PRECAUTIONARY STATEMENTS】 :

•Prevention : •Wash hands thoroughly after handling.  
•Wear protective gloves.

•Response :

•Storage : •Avoid direct sunlight and store in a well-ventilated place.

•Disposal : •Dispose of contents/container in accordance with local & national regulations.

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

SUBSTANCE/PREPARATION : Preparation

COMMON CHEMICAL NAME : Polybutyleneterephthalate

SYNONYMS : Polybutyleneterephthalate(PBT)

INGREDIENTS AND COMPOSITION : PBT ≥60%, Glass fiber 10%,  
Phosphorus Flame retardant and others ≤30%

CHEMICAL FORMULA :  $\left[ \text{C}_6\text{H}_4\text{O}_2(\text{CH}_2)_4\text{O} \right]_n$

SERIAL No. IN OFFICIAL GAZETTE : 7-1039 (base resin)  
(Law Concerning Examination and Regulation of Manufacture, etc., of Chemical Substances)

CAS No. : 24968-12-5 (base resin)

---

#### 4. FIRST-AID MEASURES

INGESTION : Help to vomit as much as possible. If sick feeling continues, and ask a physician for advice.

INHALATION : When a gas generated from the molten polymer, especially fume generated during combustion or heat, has been inhaled, remove fresh air without delay and wait until the victim is recovered. If sick feeling continues, ask a physician for advice.

SKIN CONTACT : Cool the contacted skin with clean water without delay, if a contact with the polymer in a molten form. Do not force to remove the solid resin on the skin. If any burns are observed on the skin, ask a physician for advice.

EYE CONTACT : Cool and rinse the eye with clean water for at least 15 minutes when the eyes had contact with molten polymer. In case of wearing contact lenses, remove the lenses as soon as possible, and ask a physician for advice. When the eye had contact with the polymer in an ordinary solid form, rinse the eye with clean water without delay. If the discomfort persists, ask a physician for advice.

---

#### 5. FIRE-FIGHTING MEASURES

EXTINGUISHING MEDIA : Water, foam fire-extinguishing agent, powder fire-extinguishing agent, and carbon dioxide gas.

SPECIFIC METHODS : Extinguish the fire with water. A method of extinguishing an ordinary fire may be applied. Do not apply water directly to processing machines.

SPECIFIC HAZARDS : Incomplete combustion leads to generation of toxic gases such as carbon monoxide or tetrahydrofuran, in addition to carbonic acid gas and water.

SPECIAL EQUIPMENT FOR THE PROTECTION OF FIREFIGHTERS : In case the fire gained force, use a gas mask or other protective equipment.

---

#### 6. ACCIDENTAL LEAKAGE MEASURES

PERSONAL PRECAUTIONS : When pellets were spilled on the road or floor, wipe them off with a broom or cleaner not to cause slipping.

ENVIRONMENTAL PRECAUTION : Handle the spillage in accordance with provisions given in the "Resin pellet spillage preventive manual", in order to prevent intakes by marine animals and birds.

---

#### 7. HANDLING AND STORAGE

HANDLING : This resin in a pellet form will neither ignite nor explode at room temperatures.

HANDLING 2 : For molding work, effective means for local exhaust are required to discharge gases generated by melt processing.

HANDLING 3 : Avoid inhaling of gases generated in moulding work. Do not directly touch resin of high temperature.

HANDLING 4 : Avoid retaining hot resin in the processing machines for many hours.

HANDLING 5 : This pellets spilled on the floor are likely to cause slipping. Remove such spillage at any times.

HANDLING 6	: Glass fibers are not generally exposed in a single substance under normal processing and handling conditions as they are compounded in pellets. However, the following measures will be necessary to minimize the exposure to glass fibers or dusts containing glass fibers, when pellets or molded parts containing glass fibers are cut, ground or burnt, depending on environmental and operational conditions. • Those who are sensitive in skin to glass fiber should wear suitable (protective) clothes to minimize the exposure of their skin. • Wash working clothes apart from other laundry, so that the latter will not cause contamination with glass fibers. • Provide the workshop with partitions to prevent diffusion of glass fiber dusts. • Pay precautions not to rub face, neck or arms with hands. Wash hands and gargle after working without fail. • Keep dust sources totally enclosed. • Provide local air exhausters and implement periodical inspections and adjustments at least once a year. • Reduce cutting and grinding processes to the possible minimum, and devise working procedures to minimize dust generation. • Provide dust-preventive masks, protective glasses and gloves for personal hygiene. • Determine the operational environment at indoor working places and confirm the effects of environmental improvement. Note) Glass fibers are, like road dusts, told to be least hazardous to human bodies, but proper measures are required to avoid useless inhaling.
STORAGE	: Keep the substance away from any fire or heat sources for the sake of safe storage.
RECOMMENDED PACKAGING MATERIALS	: No information.

---

## 8. EXPOSURE CONTROL / PERSONAL PROTECTION

CONTROL CONCENTRATION	: None at present
PERMISSIBLE CONCENTRATION	: OSHA PEL/1985 Max. permissible concentration of inactive powder 15mg/m <sup>3</sup> – ditto – (Aspiration) 5 mg/m <sup>3</sup> ACGIH TLV/1992 1993 Exposure limit of the powder TWA 10 mg/m <sup>3</sup>
ENGINEERING MEASURE	: When handling dust: Use totally enclosed containers resisting dust explosion. When heat melted in molding: Effective local ventilation must be provided.
PERSONAL PROTECTIVE EQUIPMENT	:
RESPIRATORY PROTECTION	: Wear a dust-proof mask.
EYE PROTECTION	: Wear protective glasses or goggles.
HAND PROTECTION	: Wear heat-resisting gloves against burns, when handling molten polymer.
SKIN & BODY PROTECTION	: Wear long sleeve clothes against burns, when handling molten polymer.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE etc.	: Pellet
BOILING POINT	: Not applicable

VAPOUR PRESSURE	: Not applicable
VOLATILITY	: Not applicable
SUBLIMATION	: None
MELTING POINT	: 228°C
DENSITY	: 1.40g/cm <sup>3</sup>
SOLUBILITY	: Insoluble in water
FLASH POINT	: 300°C or higher
IGNITION POINT	: 300°C or higher
EXPLOSION PROPERTY	: Not applicable
INFLAMMABILITY	: None
REACTIVITY WITH WATER	: None
OXIDIZABILITY	: None
SELF-REACTIVITY	: None
DUST EXPLOSIVENESS	: Upper explosion limit : Not applicable. Lower explosion limit : 35g/m <sup>3</sup>

---

#### 10. STABILITY AND REACTIVITY

STABILITY AND REACTIVITY	: Stable for normal storage or handling.
--------------------------	--

---

#### 11. TOXICOLOGICAL INFORMATION

SKIN CORROSIVE PROPERTIES	: No finding.
SENSITIZING & IRRITANT EFFECTS	: Gas generated in drying or melting is irritating eyes and skins.
ACUTE TOXICITY(INCLUDING LD50)	: No finding.
SUBACUTE TOXICITY	: No finding.
CHRONIC TOXICITY	: No finding.
CARCINOGENECITY	: No finding.
MUTAGENECITY(Microorganisms,chromosomal aberration)	: No finding.
REPRODUCTIVE TOXICITY	: No finding.
TERATOGENICITY	: No finding.
OTHERS(Including generation of hazardous gases by reaction with water,for example)	: No finding in this report means that there will be no hazard in general,but no proving data available at the time of reporting.
OTHER CAUTIONS	: With regard to dust,the maximum permissible concentration and limits are fixed by OSHA and ACGIH.



OTHER CAUTIONS : Information on hazards of glass fibers as filler.  
2 <Effects on Human Bodies>

(1) Effects on skin

Stimulation to the skin with glass fibers may be caused when glass fibers diameter is larger than  $4.5 \sim 5 \mu\text{m}$ . They give mechanical stimulation followed by itchiness to the skin, but further continuous exposure reportedly results in extinction of stimulation. It may sometimes leads to irritable dermatitis complicated with urticaria or eczema-like reaction. It is, however reported that such dermatitis is not so serious in general and does not last too long. Therefore, skin stimulation can be prevented by proper use of glass fibers.

(2) Effects on Tumor

Investigations made on glass fibers till today reveal that there is neither increase in mortality of glass fiber production workers due to lung cancer or mesothelioma nor such cases reported.

<Animal Test Report>

It is suggested that carcinogenicity of mineral fibers is dependent on their shapes rather than on their constituents. According to a report on experiments using 17 kinds of artificial mineral fibers in various sizes prepared by Dr.Stanton of National Cancer Institute, in USA, statistical studies on correlations between the diameter and length of fibers and the coincidence of mesothelioma have revealed that mineral fibers having a diameter smaller than  $0.25 \mu\text{m}$  and a length larger than  $8 \mu\text{m}$  are closely related to the coincidence of cancers. Since these experiments were performed by artificially dosing the subject animals with a large quantity of glass fibers and consequently they are quite different from the actual exposures to human bodies, it is told to be problematic to make a conclusion that mineral fibers are hazardous to human health, basing on the results obtained from these experiments. Upto the present time, there is no result obtainable to demonstrate a mechanism of glass fibers causing lung cancers in spite of experiment by long exposure to glass fibers with high concentration.

---

## 12. ECOLOGICAL INFORMATION

BIODEGRADABILITY : No finding.

BIOACCUMULATION : No finding.  
N

FISH TOXICITY : No finding.

---

## 13. DISPOSAL CONSIDERATION

WASTE FROM RESIDUES : This is designated as waste plastics among industrial wastes by the Wastes Disposal Law. Disposal waste pellets through licensed wastes handlers or local autonomous bodies if they are handling wastes disposal.

WASTE FROM RESIDUES 2 : When disposed by incineration,use the well controlled incinerators in accordance with the Wastes Disposal Law,Air Pollution Control Law and Water Pollution Prevention Law.

---

## 14. TRANSPORT CONSIDERATION

UN CLASSIFICATION NUMBER : Not applicable

OTHER CAUTIONS : Handle with care so as not to give damages to containers or not to be subjected to wetting.

OTHER CAUTIONS : Secure the containers firmly so as not to cause collapsing.  
2

---

## 15. REGULATORY INFORMATION

WASTE DISPOSAL LAW : Waste plastics among industrial wastes.

---

## 16. OTHER INFORMATION

HANDLING OF THE : This MSDS is the English version translated from the Japanese  
DETAILS GIVEN MSDS which is prepared for domestic use.  
ABOVE Details given above are based on references, information and data  
available at this moment, but no warranty can be made on exactness  
of these details. They are also prepared on the assumption that the  
product will be handled in a normal way. For special handling,  
adequate safety and environmental measures should be taken in  
respect to its applications. Our products are not specifically intended  
for implants for medical and dental applications, and therefore they  
are not recommended for such applications.  
"No finding" in this report means that there will be no hazard in  
general, but no proving data is available at the time of reporting.

WHERE TO CALL : WinTech Polymer Ltd. Quality Assurance Dept.  
FOR FURTHER Tel. No 03-6711-8605  
INFORMATION

# Material Safety Data Sheet (MSDS)

## 物质安全数据表

### SECTION 1. IDENTIFICATION OF THE SUBSTANCE/PREPARATION AND OF THE COMPANY

#### 第一部分 物质/配制品/公司名称

##### 1.1 Identification of the chemical (substance or preparation)

化学品（物质或配制品）名称：BRASS

##### 1.2 Use of the chemical

化学品用途：五金机械类加工用

##### 1.3 Company identification

公司信息

Company name 公司名：苏州博联铜业有限公司  
Address 地址：江苏省吴江市七都镇建设路 88 号  
Postal code 邮编：2152034  
Country 国家：中国  
Telephone number 电话：0512-63808992  
Fax number 传真：0512-63808992  
E-Mail (person responsible for MSDS) 责任人邮箱：blty2992@163.com  
Date of latest version MSDS 最新版日期：2015-10-15

##### 1.4 Emergency Telephone

应急电话

In case of an emergency, please contact: 紧急情况请联系：0512-63808992

### SECTION 2. HAZARDS IDENTIFICATION

#### 第二部分 危险鉴定

按法规的标准不属于有害品类

### SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 第三部分 成分组成信息

##### 3.1 General Chemical Description

铜金属表面覆镍和锡膜之金属结构

##### 3.2 Base Substances of Preparation

配制品基本成分

components 成分	EC-No.	CAS-No.	Content (% or range) 浓度 (浓度范围)
铜	231-159-6	7440-50-8	57.0%-63.0%
锌	231-111-4	7440-66-6	33.0%-43.0%
铅	--	7439-92-1	0.01%-4.00%

### 3.3 Declaration of Ingredients according to EC 1907/2006(REACH Regulation) (If necessary)

遵照EC 1907/2006(REACH)成分声明 (如果需要)

<i>Hazardous components</i> 危险成分	<i>EC-No.</i>	<i>CAS-No.</i>	<i>Content (% or range)</i> 浓度 (浓度范围)	<i>Classification</i> 分类
NA 无危害物质				

Please refer to section 16 for an overview of all R-phrases mentioned here.

涉及的所有风险分级 (R-phrases) 请参阅第十六部分。

## SECTION 4. FIRST AID MEASURES

### 第四部分 急救措施

#### 4.1 General information

一般建议

Exposure Route 接触途径	Specific First Aid Measures 具体急救措施
<i>Inhalation</i> 呼吸吸入	热融化后的可能产生重金属熏烟, 吸入熏烟可能导致贫血, 失眠, 体弱等不良状况。
<i>Skin</i> 皮肤接触	热融化的产品可能导致皮肤灼伤(极少发生)。
<i>Eye contact</i> 眼睛接触	极高温融化的熏烟导致眼睛刺痛, 过敏(极少发生)。
<i>Ingestion</i> 食入	导致消化不良和可能导致胃部损伤。

#### 4.2 Advice to doctor

医生注意: 无

## SECTION 5. FIRE-FIGHTING MEASURES

### 第五部分 消防措施

#### 5.1 Suitable fire-fighting equipment

合适的消防设备

	Suitable 适合	Unsuitable 不适合
Fire fighting equipment 消防设备	不易燃烧, 选择适用干粉, 泡沫, 洒水, 二氧化碳灭火器 热的产品喷溅导致灼伤。	无
Protection gear 保护用具	穿著防火衣和佩戴自携式呼吸器	无

5.2 Dangerous decomposition products: 无

5.3 Additional information for firefighters: 无

## **SECTION 6. ACCIDENTAL RELEASE MEASURES**

### **第六部分 泄露应急处理**

6.1 Personal precautions : 无

6.2 Environmental precautions : 产品可回收再用

6.3 Methods for cleaning up/taking up : 产品可回收再用

清除的方法

用惰性物质吸收，做有害废物处理。

## **SECTION 7. HANDLING AND STORAGE**

### **第七部分 操作处置和储存**

7.1 Handling : 无

7.2 Storage

储存环境: 温度-5~40度C, 湿度小于 65%

7.3 Specific use(s)

无

## **SECTION 8. EXPOSURE CONTROLS / PERSONAL PROTECTION**

### **第八部分 接触控制/个体防护**

8.1 Exposure limit values

最大暴露浓度: 外部表面金属高温高湿易氧化, 需按照规格储存。

8.2 Exposure controls

暴露控制: 无相关数据

*Environmental exposure controls*

环境暴露控制: 无相关数据

## **SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES**

### **第九部分 理化特性**

9.1 General information

常规信息: Appearance 外观: 金黄色的固体

## 9.2 Important health, safety and environmental information

### 重要健康、安全和环保信息

Acidity/pH pH值	不适用
Boiling point/boiling range 沸点/沸程	不适用
Flash point 闪点	不适用
Flammability (solid, gas) 易燃性 (固体, 气体)	不易燃烧
Explosive properties 爆炸特性	不适用
Oxidising properties 氧化性	不适用
Vapour pressure 蒸汽压力	不适用
Relative density 相对密度	不适用
Solubility 溶解度	不适用
Water solubility 水溶性	不适用
Partition coefficient: n-octanol/water 分配系数: 辛醇/水	不适用
Viscosity 粘度	不适用
Vapour density 蒸汽密度	不适用
Evaporation rate 蒸发率	不适用

## 9.3 Other information

其它信息: 无

## **SECTION 10. STABILITY AND REACTIVITY**

### 第十部分 稳定性和反应活性

#### 10.1 Conditions to avoid

应避免的情况: 高温和潮湿

#### 10.2 Materials to avoid

应避免接触的物质: 无

10.3 Hazardous decomposition products: 无相关数据

## **SECTION 11. TOXICOLOGICAL INFORMATION**

### 第十一部分 毒理学资料

无相关数据

## **SECTION 12. ECOLOGICAL INFORMATION**

### **第十二部分 生态学资料**

#### **12.1 Ecotoxicity**

无相关数据

#### **12.2 Mobility**

流动性：不适用

#### **12.3 Persistence and degradability**

持久性和降解性：不适用

#### **12.4 Bioaccumulative potential**

生物累积的潜在可能性：无相关数据

#### **12.5 Results of PBT assessment**

PBT评估结果：无相关数据

#### **12.6 Other adverse effects**

其它不利影响：无相关数据

## **SECTION 13. DISPOSAL CONSIDERATIONS**

### **第十三部分 废弃处理**

金属材料可回收再使用

## **SECTION 14. TRANSPORT INFORMATION**

### **第十四部分 运输信息**

#### **Classification according to ADR**

陆地运输：不是危险品，无相关限制

#### **Classification according to IMDG**

海运：不是危险品，无相关限制

#### **Classification according to IATA**

航空运输：不是危险品，无相关限制

运输分类可能会因容器的体积和国家或地区的法规而有所不同

## **SECTION 15. REGULATORY INFORMATION**

### **第十五部分 法规信息**

无相关资料

## **SECTION 16. OTHER INFORMATION**

### **第十六部分 其它信息**

无其他的信息

參考文獻	依據我司产品规格书		
製表單位	名稱： 苏州博联铜业有限公司	製 表 人	张月泉
	地址： 江苏省吴江市七都镇建设路 88 号	製表日期	2015 年 10 月 15 日



A724NA

AD4011

ALLOY High Impact / Natural

ALLOY超韌級 / 本色

# SHINITE® ALLOY

		Unit	Test Method	Values
<b>Mechanical properties</b>		<b>機械性質</b>		
Izod Impact(Notched)	衝擊強度	Kg-cm/cm	ASTM D256	80
-20°C	衝擊強度	Kg-cm/cm	ASTM D256	75
-40°C	衝擊強度	Kg-cm/cm	ASTM D256	70
Tensile Strength	拉伸強度	Kg/cm <sup>2</sup>	ASTM D638	530
Nominal Tensile Strain at Break	拉伸率	%	ASTM D638	> 50
Flexural Strength	彎曲強度	Kg/cm <sup>2</sup>	ASTM D790	780
Flexural Modulus	彎曲模數	Kg/cm <sup>2</sup>	ASTM D790	20000
<b>Thermal properties</b>		<b>熱性質</b>		
Heat Deflection Temperature	熱變形溫度		ASTM D648	
66psi		°C		-
264psi		°C		74
Flammability	防火性	-	UL94	HB
Melting Point	熔點	°C	DSC	223
Melt Index	熔融指數	g/10min	ASTM D1238	14
<b>Electrical properties</b>		<b>電氣性質</b>		
Dielectric Strength	介電強度	KV/MM	ASTM D149	38
Dielectric Constant	介電常數	...	ASTM D150	-
Volume Resistivity	體積電阻	Ω-CM	ASTM D257	1E+17
<b>Other properties</b>		<b>其它性質</b>		
Specific Gravity	比重	-	ASTM D792	1.20
Water Absorption	吸水率	%	ASTM D570	0.14
Mold Shrinkage	成形收縮率		ASTM D955	
Flow	流動方向	%		0.4~0.6
Cross Flow	垂直方向	%		0.5~0.7
<b>Injection Molding</b>		<b>成型條件</b>		
INJECTION MACHINE	成型機台	OZ		3
DRYING	乾燥			2 HR ×140 (°C) 4 HR ×120 (°C) 6 HR ×100 (°C)
BARREL TEMPERATURE	成型溫度	°C		
REAR				240-230
MIDDLE				245-235
FRONT				250-240
NOZZLE				255-245
MOLD TEMPERATURE	模溫	°C		60-80
INJECTION PRESSURE	射出壓力	kg/cm2		600-1000
INJECTION SPEED	射出速度	-		FAST

以上數據僅供參考，實際數據以產品出廠檢驗報告為準

Data listed above is for reference. The actual quality of certain batch is varied within a specific range, as indicated in each COA.

此塑料規格獲得UL防火認證，並經第三公正檢測單位檢驗通過RoHS和SVHC法規，歡迎至新光網站或來信查詢檢測報告

This grade is UL V-0 approved, and comply with RoHS & SVHC regulatio

Feel free to inquire the testing report on [www.shinkong.com.tw](http://www.shinkong.com.tw) or mail to [service@shinkong.com.tw](mailto:service@shinkong.com.tw)



## EC SAFETY DATA SHEET

1.COMPANY Shinkong Synthetic Fibers Corporation,  
Engineering Plastic Division,  
8F, 123, Sec. 2, Nanking East Road,  
Taipei, Taiwan

PHONE 02-2507-1251, 03-493-2131

FAX 02-2507-7594, 03-491-5763

1. COMMERCIAL PRODUCT NAME : SHINITE A724

Chemical Characterization : Blends of polycarbonate(CAS#25971-63-5) and  
Polybutylene Terephthalate ( PBT )

CAS# 30965-26-5

Physical State : Solid

Odor and Form : Pellet with slight odor

2. Hazardous Decomposition Products :

Processing fumes evolved at recommended processing conditions contain trace levels  
of carbon monoxide, carbon dioxide, aromatic and aliphatic hydrocarbons and may  
also contain trace levels of THF ( tetrahydrofuran ).

4. First Aide :

If molten polymer contacts the skin or eyes , cool rapidly with cold water . DO NOT  
use solvent for removal.

DO NOT attempt to remove the polymer from the skin!

Obtain IMMEDIATE medical attention.

5.Measures in Case of Accidents and Fires

After Spillage/Leakage/Gas Leakage :

Sweep up and dispose in proper containers to prevent slipping hazards.

Fire Extinguishing Media :

Suitable - water spray and foam. Water is the best.

Not recommended - carbon dioxide and dry chemicals.

Fire Fighting : Approved pressure demand breathing apparatus and protective clothing  
should be used for all fires.

6. Industrial Hygiene :

A continuous supply of fresh air to the workplace together with removal of processing  
fumes through exhaust systems is recommended.

7. Storage and Handling

Storage :

Store in a cool and dry place. Keep containers tightly closed to prevent moisture  
absorption and contamination.

Handling :

Follow recommendations in processing guide. Prevent contact with skin and eyes.

Provide adequate ventilation.

8. Protective Measures

Respiratory protection - dust mask

Eye protection - safety glasses

Hand protection - thermal protective gloves should be worn around molten plastic

#### 9. Physical Data and Safety Data

Melting Point ( °C ) : -(because of PC/PBT alloy is Alloy type)

Density @ 25°C : 1.10~1.30 g/cm<sup>3</sup> ASTM D 1505

Vapor Pressure : Not applicable

Viscosity : Not applicable

Solubility in Water : Insoluble

PH value : Not applicable

Flash Point : Not applicable

Ignition Temperature ( °C ) : 450°C, estimated

Explosion : Not sensitive to impact and static discharge.

Thermal Decomposition : None under 400°C

Stability : Stable under recommended conditions of storage and handling.

Reactivity : Not reactive under recommended conditions of storage, handling, processing and use.

Conditions to Avoid : Do not exceed temperature recommended. Purgings should be collected in small shapes to allow for rapid cooling.

#### 10. Protection Against Fire and Explosion :

Large, molten masses of plastic may ignite spontaneously in air.

Water quenching of plastic fires is recommended.

#### 11. Information on Toxicity TOXIC : N/A

Product not considered primary eye and skin irritant.

#### 12. Information on Ecological Effects

We recommend this material be disposed of by properly scrubbed incineration or recycling. Not expected to present any significant ecological problems.

#### 13. Disposal :

Product is not a RCRA hazardous waste. Recycling is encouraged. Dispose of using good manufacturing practices under local regulations for your area.

#### 14. Transport

GGVSEE/IMDG Code : UN No. : None

ICAO/IATA-DGR : Not Regulated GGVE/GGVS :

RID/ADR : ADNR :

DOT Hazard Class : Not Regulated

Proper Shipping Name : Not Regulated

Identification Number : Not Listed

TDGA : Not Listed

#### 15. Regulations

TSCA Status : This product complies with Chemical Substance Inventory requirements of the US EPA Toxic Substances Control Act ( TSCA ).

WHMIS Classification : Not a controlled product.

Commercial Product Name : Shinite A724

#### 16. Further Information

SHINITE is a registered trademark of the SHINKONG SYNTHETIC FIBERS CO..

QMFZ2 Component - Plastics			Wednesday, September 14, 2005					E107536	
<b>SHINKONG SYNTHETIC FIBERS CORP</b> 223 YEN PING RD SEC 3 PIN CHENG TAOYUAN HSIEN 324 TW									
Material Designation: <b>A724</b>									
Product Description: Polybutylene Terephthalate/Polycarbonate (PBT/PC), furnished as pellets.									
Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
NC	0.8	HB	4	1	75	75	75	-	-
	1.6	HB	4	1	75	75	75	-	-
	3.2	HB	2	1	75	75	75	-	-
CTI: -	IEC CTI (V): -	HVTR: 2			D495: -			IEC Ball Pressure (°C): -	
Dielectric Strength (kV/mm): 38		Volume Resistivity (10 <sup>5</sup> ohm-cm): 17						Dimensional Stability(%): -	
ISO Tensile Strength (MPa): -		ISO Flexural Strength (MPa): -						ISO Heat Deflection (°C): -	
ISO Tensile Impact (kJ/m <sup>2</sup> ): -		ISO Izod Impact (kJ/m <sup>2</sup> ): -						ISO Charpy Impact (kJ/m <sup>2</sup> ): -	
Report Date: 4/6/1992			Underwriters Laboratories Inc®						
UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.									

POM (共聚甲醛)

**夺钢™**

**DURACON®**

M90-44

(标准品级)

宝理塑料

***Polyplastics***

# 目录

---

## 1. M90-44的一般性质

## 客户注意事项

- 本资料所记载的物性值是按各种规格及实验方法规定的条件下制得的实验片的代表性测试值。
- 有关适当的操作规程，请根据使用目的参考相应材料的[技术资料]。
- 本资料是根据本公司积累的经验及实验数据作成的，本文所示数据对在不同的条件下使用的制品不一定能完全适用。  
因此其内容并非能保证完全适用于客户的使用条件，引用或借用时请客户作最终判断。
- 有关本公司材料的安全使用，请参考与所用材料、品级相对应的制品安全数据表[MSDS]。
- 有关本资料所介绍的应用例、使用例等技术及数据、使用寿命、可能性等请客户自作考虑。  
此外，本公司材料并没有考虑到在医疗和齿科方面的应用（用作移植组织片），故不推荐用在此方面。
- 本资料是根据现阶段搜集到的资料、信息、数据而作成的，如有新的见解时，有可能不加预告而作更改，敬请注意。
- 对本公司制品的说明材料，或者是这里所说的注意事项等，如有任何不明白的地方，敬请与本公司联系商谈。

---

\*[DURACON®]（夺钢）是宝理塑料株式会社在日本及其他国家的注册商标。

# 1. M90-44的一般物性

表1-1 一般物性(ISO)

项 目	单位	试验方法	标准
			M90-44
			标准
密度	g/cm <sup>3</sup>	ISO 1183	1.41
拉伸强度	MPa	ISO 527-1,2	62
断裂应变	%	ISO 527-1,2	35 <sup>*1</sup>
拉伸弹性模量	MPa	ISO 527-1,2	2700
弯曲强度	MPa	ISO 178	87
弯曲模量	MPa	ISO 178	2500
简支梁冲击强度(有缺口)	kJ/m <sup>2</sup>	ISO 179/1eA	6
负荷变形温度(1.8MPa)	℃	ISO 75-1,2	95
线性热膨胀系数((23×55° C)流动方向)	x10 <sup>-5</sup> /℃	ISO 11359-2	12
线性热膨胀系数((23×55° C)垂直方向)	x10 <sup>-5</sup> /℃	ISO 11359-2	12
绝缘破坏强度(3mmt)	kV/mm	IEC 60243-1	19
体积电阻率	Ω・cm	IEC 60093	1×10 <sup>14</sup>
表面电阻率	Ω	IEC 60093	1×10 <sup>16</sup>
阻燃性		UL94	HB

以上数值为材料的代表性测试值、并非该规格材料的最低值。

\*1)断裂公称应变

\*2)有关UL（Underwriters Laboratories Inc.）的认定值、请参照UL发行的黄卡（File No.E45034）。

\*3)本品级受以日本国外汇管理及外国贸易法为依据的出口贸易管理条例表中的第1条第16项的制约。

表1-2 一般物性(ASTM)

项 目	单位	试验方法	标准
			M90-44
			标准
比重		ASTM D792	1.41
拉伸强度	MPa	ASTM D638	60
拉伸率	%	ASTM D638	60
弯曲强度	MPa	ASTM D790	90
弯曲模量	MPa	ASTM D790	2580
悬臂梁冲击强度(有缺口)	J/m	ASTM D256	63
悬臂梁冲击强度(无缺口)	J/m	ASTM D256	760
负荷变形温度(1.82MPa)	°C	ASTM D648	110
线性热膨胀系数(常温、流动方向)	$\times 10^{-5}/^{\circ}\text{C}$	ASTM D696	10
线性热膨胀系数(常温、垂直方向)	$\times 10^{-5}/^{\circ}\text{C}$	ASTM D696	10
绝缘破坏强度(短时间法:2mmt)	MV/m	ASTM D149	24
体积电阻率(3mmt)	$\Omega \cdot \text{cm}$	ASTM D257	$1 \times 10^{14}$
表面电阻率(3mmt)	$\Omega$	ASTM D257	$1 \times 10^{16}$
阻燃性		UL94	HB

以上数值为材料的代表性测试值、并非该规格材料的最低值。

\*1)有关UL (Underwriters Laboratories Inc.) 的认定值、请参照UL发行的黄卡 (File No.E45034) 。

\*2)本品级受以日本国外汇管理及外国贸易法为依据的出口贸易管理条例表中的第1条第16项的制约。



## 宝理塑料株式会社

日本东京都港区港南2丁目18番1号  
JR品川East Building (邮编:108-8280)  
Phone:81-3-6711-8600 Fax:81-3-6711-8606

### *Affiliates*

**Polyplastics Asia Pacific Sdn. Bnd. (Kuala Lumpur)**

**Polyplastics Asia Pacific Singapore Pte. Ltd. (Singapore)**

**Polyplastics Marketing (T) Ltd. (Bangkok)**

宝理塑料（中国）有限公司（香港）

宝理工程塑料贸易（上海）有限公司（上海）

宝理塑料贸易（上海）有限公司（上海）

台湾宝理塑料有限公司（台北）

宝泰菱工程塑料（南通）有限公司（南通）



# MATERIAL SAFETY DATA SHEET (MSDS)

Issued: Dec 27, 2001  
Revised: May 7, 2002

File No. 1001

## 1. CHEMICAL PRODUCT & COMPANY IDENTIFICATION

CHEMICAL PRODUCT NAME : DURACON M90-44  
NAME OF COMPANY : Polyplastics Co.,Ltd.  
SECTION IN CHARGE : Quality Assurance Dept.  
ADDRESS : 3-2-5 Kasumigaseki, Chiyoda-ku, Tokyo  
TELEPHONE NUMBER : 03-3593-2280  
FACSIMILE NUMBER : 03-3593-2189

## 2. COMPOSITION/INFORMATION ON INGREDIENTS

SUBSTANCE/PREPARATION : Substance  
COMMON CHEMICAL NAME : Polyoxymethylene  
SYNONYMS : Polyacetal(POM)  
INGREDIENTS AND COMPOSITION : POM  $\geq$  98%, Stabilizers etc.  $\leq$  2%  
CHEMICAL FORMULA :  $\left[ \text{CH}_2 - \text{O} \right]_n / \left[ \text{CH}_2\text{CH}_2\text{O} \right]_n$   
SERIAL No IN OFFICIAL GAZETTE : 7-129 (base resin)  
(Law Concerning Examination and Regulation of Manufacture, etc., of Chemical Substances)  
CAS No : 24969-26-4 (base resin)  
INGREDIENTS CONTRIBUTING TO THE HAZARD : Formaldehyde

## 3. HAZARDS IDENTIFICATION

MOST IMPORTANT HAZARDS : Incomplete combustion leads to generation of toxic gases such as carbon monoxide, in addition to carbonic acid gas and water.  
Decomposition of polymer also leads to generation of formaldehyde.  
HUMAN HEALTH EFFECTS : Not applicable  
ENVIRONMENTAL EFFECTS : Not applicable  
PHYSICAL AND CHEMICAL HAZARDS : It is inflammable substance and combustible if an igniting source is existent. Neither dangerous reaction, fire nor explosion can be caused under normal conditions.  
THE CLASSIFICATION : Not applicable

## 4. FIRST-AID MEASURES

INGESTION : Help to vomit as much as possible. If sick feeling continues, ask a physician for advice.  
INHALATION : When a gas generated from the molten polymer has been inhaled, remove fresh air without delay and wait until the victim is recovered. If sick feeling continues, ask a physician for advice.

SKIN CONTACT	: Cool the contacted skin with clean water without delay, if a contact with the polymer in a molten form. Do not force to remove the solid resin on the skin. If any burns are observed on the skin, ask a physician for advice.
EYE CONTACT	: Cool and rinse the eye with clean water for at least 15 minutes when the eyes had contact with molten polymer. In case of wearing contact lenses, remove the lenses as soon as possible, and ask a physician for advice. When the eye had contact with the polymer in an ordinary solid form, rinse the eye with clean water without delay. If the discomfort persists, ask a physician for advice.

---

## 5. FIRE-FIGHTING MEASURES

EXTINGUISHING MEDIA	: Water, foam fire-extinguishing agent, powder fire-extinguishing agent, and carbon dioxide gas.
SPECIFIC METHODS	: Extinguish the fire with water. A method of extinguishing an ordinary fire may be applied. Do not apply water directly to processing machines.
SPECIFIC HAZARDS	: Incomplete combustion leads to generation of toxic gases such as carbon monoxide or formaldehyde, in addition to carbonic acid gas and water.
SPECIAL EQUIPMENT FOR THE PROTECTION OF FIREFIGHTERS	: In case the fire gained force, use a gas mask or other protective equipment.

---

## 6. ACCIDENTAL LEAKAGE MEASURES

PERSONAL PRECAUTIONS	: When pellets were spilled on the road or floor, wipe them off with a broom or cleaner not to cause slipping.
ENVIRONMENTAL PRECAUTION	: Handle the spillage in accordance with provisions given in the "Resin pellet spillage preventive manual", in order to prevent intakes by marine animals and birds.

---

## 7. HANDLING AND STORAGE

HANDLING	: Polyacetal resin in a pellet form will neither ignite nor explode at room temperatures, but it falls under the inflammables designated by the Fire Service Law. Keep it away from the igniting sources, as it quickly gains force once it is ignited.
HANDLING 2	: Polyacetal resin in a powdered form is likely to cause dust explosion and is therefore designated in the Guideline for Hazard of Dust Explosion in U.S. Bureau of Mines. Effective earthing means or use of inert gas like N <sub>2</sub> are required for dust handling equipment to eliminate static electricity.
HANDLING 3	: Polyacetal pellets spilled on the floor are likely to cause slipping. Remove such spillage at any times.
HANDLING 4	: For molding work, effective means for local exhaust are required to discharge gases generated by melt processing.
HANDLING 5	: Avoid inhaling of gases generated in moulding work. Do not directly touch resin of high temperature.
HANDLING 6	: Avoid retaining hot resin in the processing machines for many hours.
HANDLING 7	: Avoid mixed extrusion with strong acid, oxidizing agents and PVC.
STORAGE	: Keep the substance away from any fire or heat sources for the sake of safe storage.
STORAGE 2	: This polymer is a synthetic resin designated as an inflammable substance by the Fire Service Law and should be handled in accordance with municipal rules and regulations (concerning fire-fighting equipment, indoor storage, for instance).

RECOMMENDED : No information.  
PACKAGING  
MATERIALS

---

#### 8. EXPOSURE CONTROL / PERSONAL PROTECTION

CONTROL : None at present  
CONCENTRATION

PERMISSIBLE : OSHA PEL/1985  
CONCENTRATION Max. permissible concentration of inactive powder 15mg/m<sup>3</sup>  
- ditto - (Aspiration ) 5mg/m<sup>3</sup>  
ACGIH TLV/1992 1993  
Exposure limit of the powder TWA 10 mg/m<sup>3</sup>  
(Reference) Human exposure to formaldehyde  
- Ministry of Health & Welfare/2002  
Guideline value 0.08 ppm  
OSHA Parameter/1992  
TWA 0.75 ppm  
STEL 2 ppm  
ACGIH TLV/1992 1993  
TWA 0.3 ppm

ENGINEERING : When handling dust: Use totally enclosed containers resisting dust  
MEASURE explosion.  
When heat melted in molding: Effective local ventilation must be provided.

PERSONAL :  
PROTECTIVE  
EQUIPMENT

RESPIRATORY : Wear a dust-proof mask.  
PROTECTION

EYE PROTECTION : Wear protective glasses or goggles.

HAND PROTECTION : Wear heat-resisting gloves against burns, when handling molten  
polymer.

SKIN & BODY : Wear long sleeve clothes against burns, when handling molten polymer.  
PROTECTION

---

#### 9. PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE etc. : Pellet

BOILING POINT : Not applicable

VAPOUR : Not applicable  
PRESSURE

VOLATILITY : Not applicable

SUBLIMATION : None

MELTING POINT : 165°C

DENSITY : 1.41

SOLUBILITY : Insoluble in water

FLASH POINT : 320°C or higher

IGNITION POINT : 400°C or higher

EXPLOSION : Not applicable  
PROPERTY

INFLAMMABILITY : Inflammable(Designated as inflammable resin by the Fire Service Law)

REACTIVITY WITH : None  
WATER

OXIDIZABILITY	: None
SELF-REACTIVITY	: None
DUST	: Upper explosion limit : Not applicable.
EXPLOSIVENESS	: Lower explosion limit : 35g/m <sup>3</sup>

#### 10. STABILITY AND REACTIVITY

STABILITY AND REACTIVITY	: Stable for normal storage or handling.
CONDITIONS TO AVOID	: Avoid contacts with strong acid, oxidizing agent or PVC under hot melt conditions.
HAZARDOUS DECOMPOSITION PRODUCTS	: Formaldehyde will be generated when heated (for drying or melting) or burnt.

#### 11. TOXICOLOGICAL INFORMATION

SKIN CORROSIVE PROPERTIES	: No finding.
SENSITIZING & IRRITANT EFFECTS	: Gas generated in drying or melting is irritating eyes and skins.
ACUTE TOXICITY (INCLUDING LD50)	: No finding.
SUBACUTE TOXICITY	: No finding.
CHRONIC TOXICITY	: No finding.
CARCINOGENICITY	: No finding.
MUTAGENICITY (Microorganisms, chromosomal aberration)	: No finding.
REPRODUCTIVE TOXICITY	: No finding.
TERATOGENICITY	: No finding.
OTHERS (Including generation of hazardous gases by reaction with water, for example)	: No finding in this report means that there will be no hazard in general, but no proving data available at the time of reporting.
OTHER CAUTIONS	: With regard to dust, the maximum permissible concentration and limits are fixed by OSHA and ACGIH.
OTHER CAUTIONS 2	: Formaldehyde will be generated when heated (for drying or melting) or burnt.

#### 12. ECOLOGICAL INFORMATION

BIODEGRADABILITY	: No finding.
BIOACCUMULATION	: No finding.
FISH TOXICITY	: No finding.

#### 13. DISPOSAL CONSIDERATION

WASTE FROM RESIDUES	: This is designated as waste plastics among industrial wastes by the Wastes Disposal Law. Disposal waste Duracon through licensed waste handlers or local autonomous bodies if they are handling waste disposal.
---------------------	---

WASTE FROM : When disposed by incineration, use the well controlled incinerators in  
RESIDUES 2 accordance with the Wastes Disposal Law, Air Pollution Control Law and  
Water Pollution Prevention Law.

---

#### 14. TRANSPORT CONSIDERATION

UN : Not applicable  
CLASSIFICATION  
NUMBER

OTHER CAUTIONS : Handle with care so as not to give damages to containers or not to be  
subjected to wetting.

OTHER CAUTIONS : Secure the containers firmly so as not to cause collapsing.  
2

---

#### 15. REGULATORY INFORMATION

FIRE SERVICE LAW : Inflammable synthetic resin  
Designated quantity: More than 20m<sup>3</sup> for the foamed product.  
More than 3,000 kg for other types.

WASTE DISPOSAL : Waste plastics among industrial wastes.  
LAW

OTHERS : Formaldehyde is designated as Class 3 substance by the Industrial  
Safety and Health Law (Regulations concerning hazards caused by  
specific chemicals) and designated as deleterious substance by the  
Poisons and Deleterious Substance Control Law. Recommended  
usage, criteria, and limit values are provided by Japan Industrial Safety  
and Health Society, OSHA and ACGIH.

---

#### 16. OTHER INFORMATION

HANDLING OF THE : This MSDS is the English version translated from the Japanese MSDS  
DETAILS GIVEN which is prepared for domestic use.  
ABOVE Details given above are based on references, information and data  
available at this moment, but no warranty can be made on exactness of  
these details. They are also prepared on the assumption that the  
product will be handled in a normal way. For special handling, adequate  
safety and environmental measures should be taken in respect to its  
applications. Our products are not specifically intended for implants for  
medical and dental applications, and therefore they are not  
recommended for such applications.  
"No finding" in this report means that there will be no hazard in general,  
but no proving data is available at the time of reporting.

WHERE TO CALL : Polyplastics Co., Ltd. Quality Assurance Dept.  
FOR FURTHER Tel. No 03-3593-2280  
INFORMATION

## 化学品安全技术说明书册

文件编码: MSDS          版本: 第二版          生效日期: 2015年11月7日

### 第一部分 化学品名称及厂商资料

产品名称: 热塑性弹性体

化学品英文名称: Thermoplastic Elastomer

产品规格: 自然色 (本色) 类产品

生产厂商: 昆山科信高分子材料有限公司

公司地址: 江苏省昆山市周市镇金茂路108号

厂商电话: +86-0512-55173009          厂商传真: +86-0512-57784279

联系人: 陆峰          电话: 17712486220

网站地址: [www.kesuntpe.com](http://www.kesuntpe.com)

### 第二部分 成分/组成信息

#### 化学特性

化学名称	CAS 编号	含量 (%)
聚丙烯 (PP)	9003-07-0	5-40
SEBS	66070-58-4	22-70
白油	8042-47-5	25-45
碳酸钙	471-34-1	0-45

注: 本产品不含有任何有毒成分, 在使用、搬运和加工过程中不会产生危害。

## 第三部分 危险性概述

- 本产品在室温条件下没有危害。
- 在加工温度（150~250℃）可能产生烟雾和气体，如果通风不畅，可能刺激眼睛、皮肤和呼吸系统。
- 熔融聚合物可能对眼睛和皮肤产生灼伤。
- 洒落的颗粒可能使人滑倒。
- 慢性危害：无
- 侵入途径：吸入蒸气，皮肤或眼睛同熔融聚合物的接触。
- 致癌性：未被列入国际癌症研究中心（IARC）致癌物质名单。

## 第四部分 急救措施

- 吸入：如果吸入加工气体或者分解物质，将受害人转移到新鲜空气中。如果刺激发展或继续恶化，请找医生治疗。
- 眼睛接触：用干净水源冲洗眼睛，此法仅限于物理影响。
- 皮肤接触：用大量的肥皂水清洗接触表面，如果熔融的物质同皮肤接触，用水或者冰块迅速冷却，在医生的帮助下除去黏附物，并对烫伤表面皮肤进行处理。
- 食入：不良影响未知。

## 第五部分 消防措施

- 燃烧：在火灾下，聚合物降解，会产生烟雾、未识别毒气以及刺激性化合物。
- 灭火介质：火灾较小的情况下，采用干粉，二氧化碳，洒水或通用泡沫灭火器进行灭火。火灾较大的情况先，采用洒水、水雾或常规消防泡沫、请不要使用水柱灭火。
- 消防器械：消防队员应配有正压自呼吸式呼吸器，并且穿上隔离防护服方可进行灭火，同时请疏散人群，隔离火源。如撤离通道过长，非消防人员需配备相应眼罩或护面具。

## 第六部分 泄漏应急处理

如果产品洒落，请进行清扫，在去除非产品的杂质后，将其装进容器中，重新使用或者根据情况废弃处理。

## 第七部分 产品加工和储存

- 加工建议

# KE SUN 昆山科信高分子材料有限公司

- 1、请不要在建议的热加工温度以上加工本品。在大多数的情况下，要具备良好的通风措施，并在操作工位上设置局部排风。
- 2、请避免吸入热加工过程中产生的烟雾和气体。
- 3、请避免吸入产品机械处理设备产生的粉尘

## ——储存建议

- 1、搬运本产品时，请采用合适的搬运设备，避免产生静电
- 2、请注意，洒落在地板上的颗粒可能使人滑倒。
- 3、为保证产品质量，建议在冷的，干燥地区内储存并在包装袋内紧密密封。开封后如不使用请重新密封。

## 第八部分 接触控制以及个人防护

生物指标指数：LD50

眼睛保护：存在不固体颗粒接触的潜在危险，或蒸气导致眼睛不适时，请佩戴护目镜。

皮肤保护：在热加工过程中，处理热的产品时请戴上防护手套。

呼吸系统保护：大多数情况下无需进行呼吸系统防护。但在没有充分通风条件下，高温加工中，使用本产品时请佩戴好空气净化器。

## 第九部分 物理化学特性

### 物化特性表

物质状态	固体	产品形状	颗粒
产品颜色	本色	产品气味	无味
PH 数值	——	沸点/沸点范围	——
分解温度	——	闪火点	——
物质密度	——	溶解性	不溶于水

## 第十部分 稳定性和反应性

产品在室温下稳定性佳。

聚合危害：不能发生。

熔融聚合物的蒸汽为H<sub>2</sub>O、CO<sub>2</sub>以及其它降解物。

有害的降解物：基本无有害降解物，但分解气体中可能含有CO、CO<sub>2</sub>以及少量氰化物，



# **KE SUN** 昆山科信高分子材料有限公司

烷烃，水汽以及所提到的混合物，还有烟雾。同时也可能存在热工艺过程中散发的其它物质。

请不要在260℃以上的温度下加热。

## 第十一部分 毒理学信息

吸入：室温下，不要暴露在灰尘和气体中。高加工温度产生的气体可能对人产生刺激和致敏性。

眼睛接触：固体或灰尘由于机械运动对眼睛产生刺激性。升高温度可能产生气体，刺激眼睛。

皮肤接触：在常温下，对皮肤没有刺激性。

在高温下，气体可能对皮肤产生致敏性。

慢毒性和长期毒性：无慢毒性，无长期毒性。

目前暂无本产品的具体毒理学研究。

## 第十二部分 生态学信息

本产品没有反面生态影响。

目前暂无生态学测试报告。

由于其不溶于水，产品具有非常低的水生生物毒性。

产品对自然生态的影响极低，属于环保型产品。

## 第十三部分 废弃处理方法

未使用的产品可不被考虑为有害废弃物。

请不要将产品倒入城市下水道，地板上或者自然生态下的水源中。

由于产品可随时间逐渐分解，因此可按照一般废弃物标准进行处理。

按照使用者所在地法律法规，废弃产品可以通过掩埋法和焚烧法进行处理。

## 第十四部分 运输信息

在运输过程中，本产品认定为非危险品，在国际和国内的运输中除必要检查外不受管制。

## 第十五部分 法规信息

中国法规以及国家标准（GB）：本产品无需特别标识。

欧洲现有化学物质名录（EINECS）：本产品所有的原材料都被列入EINECS。

有毒物质管理法（TSCA）：所有成分都在TSCA详细目录中。

## 第十六部分 其它信息

### 免责声明

本MSDS提供的以上信息是本着宣传健康、安全和环境知识的目的，相关数据和信息均如实给出，但我司并不能保证其信息的绝对广泛性和精确性。对本产品的加工、储存、使用和废弃处理的条件和方法不属于我们控制范围的，我司对此概不负责。请获取使用本MSDS的个体使用者，在特殊条件下，必须对本MSDS的适用性作出独立的判断。我司特此声明不承担因此引起的任何损失，赔偿以及其他费用。

本MSDS遵守相应的国家及地区的法律法规，我司拥有对本安全技术说明书的全权解释权。

制表时间：2015年11月7日

昆山科信高分子材料有限公司

# 物质安全资料表

## MATERIAL SAFETY DATA SHEET

### 一、物品与厂商资料 Article and supplier information:

物品名称: 环保热缩套管 H
Article: Heat shrinkable tube (WOER)
规格型号:
Spec: black plastics w/ white printing
供货商名称: 昆山沃尔康电子有限公司
Supplier: KUNSHAN VOLKAN ELECTRONICS CO. LTD

### 二、成分资料 Composition and information on ingredients:(G 管) 混合物 Admixture

化学性质: 环境物质 (CHEMICAL PROPERTIES: ENVIRONMENT MATERIALS)			
英文名称 (English name)	中文名 Chinese name	含量 Content	测试方法 Test method
Cadmium	镉 (Cd)	≤100ppm	EN1122: 2001
Lead	铅 (Pb)	≤1000ppm	EPA3050B
Chromium (VI)	铬 (Cr) VI	≤1000ppm	EPA7196A、EPA3060A
Mercury	汞 (Hg)	≤1000ppm	EPA3052
Polybrominated Biphenyls (PBBS)	多溴联苯	≤1000ppm	EPA3540C EPA3550C
Polybrominated Diphenylethers (PBDES) except DecaBDE	多溴联苯醚(不含十溴联苯醚)	≤1000ppm	EPA3540C EPA3550C

### 三、辨别资料 DISCERN INFORMATION:

最重要的 危害项目 KEY HAZARD ITEM	健康危害效应: 点燃后在短时间内会熄灭, 有少量烟雾产生, 对人体呼吸道产生轻微伤害。 Health hazard note: Be fired for a moment and will be flameout, it will produce a little smoke, the smoke will hazard breath a little.
	环境影响: 危害空气。Environment hazard note: If be fired and pollute the air.
	物理性及化学性危害: 常态是管状, 在 90-125℃ 预热收缩。Physics and chemistry characteristic: it normal is pipe and will shrink at 90-125℃, that perhaps is harmful.
	特殊危害: 如果火烤、烟熏, 烟雾会冲击眼睛、呼吸系统, 对人体产生伤害。 Specific hazard: if be fired or sootiness, it will produce smoke and smoke hurt eyes breath.
主要症状: 眼睛流泪, 喷嚏, 咳嗽, 在呼吸新鲜空气会减轻相应症状。 Main symptom: lachrymation , sneeze ,cough. It will be good after breathing fresh air.	
物品燃烧危险: 必须在点燃时会短时间燃烧。 Fireproofing characteristic: It can flame for a moment after leaving fire.	

### 四、急救措施 FIRST—AID MEASURES:

不同暴露途径之急救方法: First-aid measures:
吸入: 在正常操作下没有吸入的危险。Normal it is no harmful for breath. If be fired , and breath the smoke
皮肤接触: 正常接触时对皮肤无损伤。由于此管易划伤, 建议操作时戴手套。
Skin touch: Normal it is no harmful for skin

眼睛接触: 无影响 Normal it is no harmful for eyes. If be fired , the smoke hurt eyes a little, leave the smoke and eyes will come to comfort.
食入: 不能食用 Can't be eat.
最重要及危害效应: 吸入燃烧烟雾, 冲击呼吸系统。Key symptom: Be fired ,the smoke choke the breath.
对急救人员之防护: 配戴呼吸防护装置。First aid defend: Get on gas mask
对医师之提示: 对呼吸系统严重症者, 应不断吸入新鲜空气来减轻症状。
Doctor suggest: If breath a lot of smoke ,must breath more fresh air , it can help you to reduce the symptom.

## 五、FIRE-FIGHTING MEASURES:

适用灭火剂: 不能长时间燃烧, 使用粉末灭火器。Fire-fighting material medical: Dust farina powder
灭火时可能遭遇之特殊危害: 燃烧可产生少量烟雾, 冲击人体呼吸系统。
During fire-fighting, special hazard: Be fired ,produce a little smoke , and it can choke the breath
特殊灭火程序: 无。Special fire-fighting program: No special program
消防人员之特殊防护设备: 正常消防设备。Fire-fighter special dependence: Normal fire-fighting device

## 六、GIVEAWAY TRANSACT METHOD:

个人应注意事项: 无 Person notice: No
环境注意事项: 无 Environment notice: No
清理方法: 无 Cleaning method: No special method

## 七、安全处理与储存方法 SAFETY AND DEPOSIT METHOD

处置: 常温下用纸箱包装, 不要放置在太阳光下直射。
Treatment: At normal temperature ,paper box package, no sun straight shine
储存: 常温下用纸箱包装好放置在凉荫处。
Deposit: At normal temperature paper box package, no sun straight shine

## 八、物理及化学性质 PHYSICAL AND CHEMICAL PROPERTIES:

物质状态: 软质套管。State: Soft pipe	形状: 套管状 Shape: Pipe
颜色: 黑色及彩色。Color: Manifold color	气味: 无味 Smell: No
分解温度: 125℃ 预热收缩, 不会分解。 Decompose temperature: 125 °C shrink, but don' t decompose	闪点: 阻燃 Flash point: Fire-resistant
自然温度: 常温 Normal temperature	爆炸界限: 无 Explode rate: No

## 九、稳定性及反应性 STABILITY AND REACYIVITY:

稳定性: 不能分解。Stability: No decompose
特殊状况下可能之危害反应: 有火的话, 此种产品会短时间燃烧, 产生烟雾。Special condition, perhaps hazard: If has fire, the production can be fired for a moment and produce a little smoke
应避免之状况: 高温放置会收缩。
Please avoid the condition: At heat temperature condition the production will shrink
应避免之物质: 火种 Please avoid the condition: Fire
危害分解物: 烟雾。Hazard decompose material: Smoke

## 十、毒性资料 TOXICOLOGICAL INFORMATION:

急毒性: 无 Rapid virulence: No
局部效应: 无 Part effect: No
致敏感性: 无 Cause hypersusceptibility : No
慢毒性或长期毒性: 无 Slowly or long-term virulence: No
特殊效应: 无 Special effect: No

十一、生态效应 ECOLOGICAL INFORMATION:

可能之环境影响/环境流: 该产品不会在自然界分解, 对动植物及水生物不会产生危害。

Perhaps environment effect: The production can't decompose at nature condition, so it can't hazard the animal and plant.

十二、处置注意事项 DISPOSAL CONSIDERATIONS:

废弃处置方法: 这些物品将统一收集给废品收购站, 作相应环保处理。

Trash disposal: Collect and treat for the environment.

十三、运送资料 TRANSPORTATION INFORMATION:

国际运送规定: 无 World wild transportation rule: No

联合国编号: 无 U.N. code: No

国内运送规定: 无 Transportation in china rule: No

特殊运送方法及注意事项: 避免挤压变形, 利器损伤。Special transportation method and notice: Avoid extrusion distortion, edge tool hurt

十四、法规资料 REGULATORY INFORMATION:

适用法规: UL224 Comply rule or law: UL224

十五、其它资料 OTHER INFORMATION:

参考文献: SGS 检测报告 Reference : SGS Test Report

(以上内容如有歧义以中文为准 If the Chinese and English content have some different things, the Chinese content is right)

昆山沃尔康电子有限公司  
套管品质部  
2010 年 12 月 12 日

**NOTICE OF AUTHORIZATION TO APPLY THE UL MARK**

2007-09-18

Mr. Shaodun He  
SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD  
Xinwei Industrial Park, Woer Mansion  
Nanshan District, Xili  
Shenzhen, Guangdong 518052  
China

E-mail: [sfshsd@163.com](mailto:sfshsd@163.com)

Reference: File E203950 Project 07SC04243 P.O. Number HE, SHAODUN  
USR/CNR - Evaluation of Currently Recognized Heat Shrinkable Flexible Cross-linked  
Product: Polyolefin Tubing Cat. No. RSFR-H, rated 125C, 600V, VW-1, in all colors except clear, in 0.35  
mm to 75.0 mm recovered ID, with modified compound.

Dear Mr. He,

Any information and documentation involving UL Mark services are provided on behalf of Underwriters Laboratories Inc. (UL) or any authorized licensee of UL.

UL's investigation of your product has been completed under the above project number and the subject product was determined to comply with the applicable requirements.

This letter temporarily supplements the UL Follow-Up Services Procedure and serves as authorization to apply the UL Recognized Marking and/or Recognized Component Mark only at the factory under UL's Follow-Up Service Program to the subject product, which is constructed as described below:


Identical to the subject model, which was submitted to UL for this investigation. The UL Records covering the product will be in the Follow-Up Services Procedure, File E203950, Volume 2. See attachment – 5 pages.

This authorization applies only to the address on this letter.

This authorization is effective from the date of this Notice and only for products at the indicated manufacturing locations. Records in the Follow-Up Services Procedure covering the product are now being prepared and will be sent to the indicated manufacturing locations in the near future. Please note that Follow-Up Services Procedures are sent to the manufacturers only unless the Applicant specifically requests this document.


Products that bear the UL Mark shall be identical to those that were evaluated by UL and found to comply with UL's requirements. If changes in construction are discovered, appropriate action will be taken for products not in conformance with UL's requirements and continued use of the UL Mark may be withdrawn.

Sincerely,



Audrey Woo  
Project Engineer  
Department: 3015TSCL  
Tel: 408-754-6507  
Fax: 408-689-6507  
E-mail: [audrey.woo@us.ul.com](mailto:audrey.woo@us.ul.com)

Reviewed by:



JaneAnn P Matulich  
Lead Engineering Associate  
Department: 3015TSCL  
E-mail: [janeann.p.matulich@us.ul.com](mailto:janeann.p.matulich@us.ul.com)



## DESCRIPTION

## PRODUCT COVERED:

USR, CNR: Component - Extruded Electrical Tubing, Heat-Shrinkable Polyolefin Tubing, are Recognized with the following ratings:

Cat. No.	Colors	Recovered ID, mm	Temp. Rating, Deg. C	Voltage Rating, V	Flame Rating
RSFR-x	Black	1.0 - 4.0	125	600	VW-1
RSFR-x	White	0.5 - 25.0	125	600	VW-1
WKZM-x-yz	White	0.5 - 25.0	125	600	All Tubing
RSFR-H	All except Clear	<b>0.35</b> - 75.0	125	600	<b>VW-1</b>

Note: for RSFR-x only, Black color tubing - x represents expanded ID of 2 mm - 8 mm. For White color tubing - x represents expanded ID of 1 mm - 50 mm.

Note: for WKZM-x-yz only, - x represents expanded ID of 1 mm - 50 mm and - yz represents any alpha and/or numeric combination for internal Client code.

USR: United States Standard Recognized.

CNR: Canadian National Standard Recognized.

## GENERAL:

The tubing contained in this Report is constructed in accordance with the Bi-National Standard for Extruded Insulating Tubing, UL 224, Fifth Edition, and with the Canadian Standard for Insulating Tubing, CSA 22.2, No. 198.1, Second Edition.

## MARKING:

Full Recognized company name, or File Number "E203950", catalog number, voltage rating, temperature rating in degrees C, inside diameter (before and after recovery) and date of manufacture shall be marked on tags attached to both ends of the tubing, on the shipping spool label, or on the smallest unit container.

The tag markings shall include the Recognized Component Mark for Canada, , in order to be considered UL Canadian Certified.

## OPTIONAL MARKING:

- \* Cat. Nos. **RSFR-H** and RSFR-x may be marked "VW-1".
- Cat. No. WKZM-x-yz: None

## CONSTRUCTION DETAILS:

The tubing shall conform to the appropriate wall thickness and dimension table in UL 224 and to the following:

Cat. No.	Recovered ID, mm	Color	Material	Composition Formulation @
RSFR-x	1.0 - 4.0	Black	Polyolefin	Beijing Chemical EVA (14-2) 100%
RSFR-x	0.5 - 25.0	White	Polyolefin	Beijing Chemical EVA (14-2)100%
WKZM-x-yz	0.5 - 25.0#	White	Polyolefin	Beijing Chemical EVA (14-2) 50% with Huiyuan ChemicalCo., Ltd. KY-405 50%
<b>RSFR-H</b>	<b>0.35 - 75.0</b>	<b>All except Clear</b>	<b>Polyolefin</b>	<b>See Table I</b>

@ - The tubing formula consists only of the materials stated in the tale. No other materials are added such as plasticizers, anti-oxygen agents, etc., unless specified in the formula above.

Note: for RSFR-x only, Black color tubing - x represents expanded ID of 2 mm - 8 mm. For White color tubing - x represents expanded ID of 1 mm - 50 mm.

Note: for WKZM-x-yz only, - x represents expanded ID of 1 mm - 50 mm and - yz represents any alpha and/or numeric combination for internal Client code.

# - the minimum recovered wall thickness is limited to 0.70 mm for the minimum expanded inner diameter size of 1.0 to 16.0 mm.

## Maximum Expansion Ratio:

Cat. No. RSFR-x may be expanded up to a maximum of 155% of its original extruded diameter.

Cat. No. WKZM-x-yz may be expanded up to a maximum of 176% of its original extruded diameter.

Cat. No. RSFR-H may be expanded up to a maximum of **335%** of its original extruded diameter.



## DESCRIPTION

## PRODUCT COVERED:

USR, CNR: Component - Extruded Electrical Tubing, Heat-Shrinkable Polyolefin Tubing, are Recognized with the following ratings:

Cat. No.	Colors	Recovered ID, mm	Temp. Rating, Deg. C	Voltage Rating, V	Flame Rating
RSFR-x	Black	1.0 - 4.0	125	600	VW-1
RSFR-x	White	0.5 - 25.0	125	600	VW-1
WKZM-x-yz	White	0.5 - 25.0	125	600	All Tubing
RSFR-H	All except Clear	<b>0.35</b> - 75.0	125	600	<b>VW-1</b>

Note: for RSFR-x only, Black color tubing - x represents expanded ID of 2 mm - 8 mm. For White color tubing - x represents expanded ID of 1 mm - 50 mm.

Note: for WKZM-x-yz only, - x represents expanded ID of 1 mm - 50 mm and - yz represents any alpha and/or numeric combination for internal Client code.

USR: United States Standard Recognized.

CNR: Canadian National Standard Recognized.

## GENERAL:

The tubing contained in this Report is constructed in accordance with the Bi-National Standard for Extruded Insulating Tubing, UL 224, Fifth Edition, and with the Canadian Standard for Insulating Tubing, CSA 22.2, No. 198.1, Second Edition.

## MARKING:

Full Recognized company name, or File Number "E203950", catalog number, voltage rating, temperature rating in degrees C, inside diameter (before and after recovery) and date of manufacture shall be marked on tags attached to both ends of the tubing, on the shipping spool label, or on the smallest unit container.

The tag markings shall include the Recognized Component Mark for Canada, , in order to be considered UL Canadian Certified.

## OPTIONAL MARKING:

- \* Cat. Nos. **RSFR-H** and RSFR-x may be marked "VW-1".
- Cat. No. WKZM-x-yz: None

## CONSTRUCTION DETAILS:

The tubing shall conform to the appropriate wall thickness and dimension table in UL 224 and to the following:

Cat. No.	Recovered ID, mm	Color	Material	Composition Formulation @
RSFR-x	1.0 - 4.0	Black	Polyolefin	Beijing Chemical EVA (14-2) 100%
RSFR-x	0.5 - 25.0	White	Polyolefin	Beijing Chemical EVA (14-2)100%
WKZM-x-yz	0.5 - 25.0#	White	Polyolefin	Beijing Chemical EVA (14-2) 50% with Huiyuan Chemical Co., Ltd. KY-405 50%
<b>RSFR-H</b>	<b>0.35 - 75.0</b>	<b>All except Clear</b>	<b>Polyolefin</b>	<b>See Table I</b>

@ - The tubing formula consists only of the materials stated in the table. No other materials are added such as plasticizers, anti-oxygen agents, etc., unless specified in the formula above.

Note: for RSFR-x only, Black color tubing - x represents expanded ID of 2 mm - 8 mm. For White color tubing - x represents expanded ID of 1 mm - 50 mm.

Note: for WKZM-x-yz only, - x represents expanded ID of 1 mm - 50 mm and - yz represents any alpha and/or numeric combination for internal Client code.

# - the minimum recovered wall thickness is limited to 0.70 mm for the minimum expanded inner diameter size of 1.0 to 16.0 mm.

## Maximum Expansion Ratio:

Cat. No. RSFR-x may be expanded up to a maximum of 155% of its original extruded diameter.

Cat. No. WKZM-x-yz may be expanded up to a maximum of 176% of its original extruded diameter.

Cat. No. RSFR-H may be expanded up to a maximum of **335%** of its original extruded diameter.