


RETLIF TESTING LABORATORIES

Test Method	FCC Part 15, Subpart C, Paragraph 15.207(a), AC Line Conducted Emissions, 450 kHz to 30 MHz		
Customer	Symbol Technologies	Job No.	R-8637-1
Test Sample	2.4 GHz Pulsed RF Transmitter Module		
Model No.	FCC ID: H9PPHASEMODULE	Serial No.	N/A
Test Specification	FCC Part 15, Subpart C	Paragraph	15.207(a)
Operating Mode	Continuously transmitting RF signal at 2402 GHz.		
Technician	T. Schneider	Date	July 24, 2000
Lead Tested	Lead Tested- Hot Input to AC Adapter, Symbol P/N 50-14000-008, Rev. A		
Notes	Detector= Peak		

Sheet 1 of 8

11:21:32 JUL 24. 2000
 R-8637 SYMBOL PHASER Conducted Emissions TS Lead H
 REF 85.0 dBμV AT 10 dB

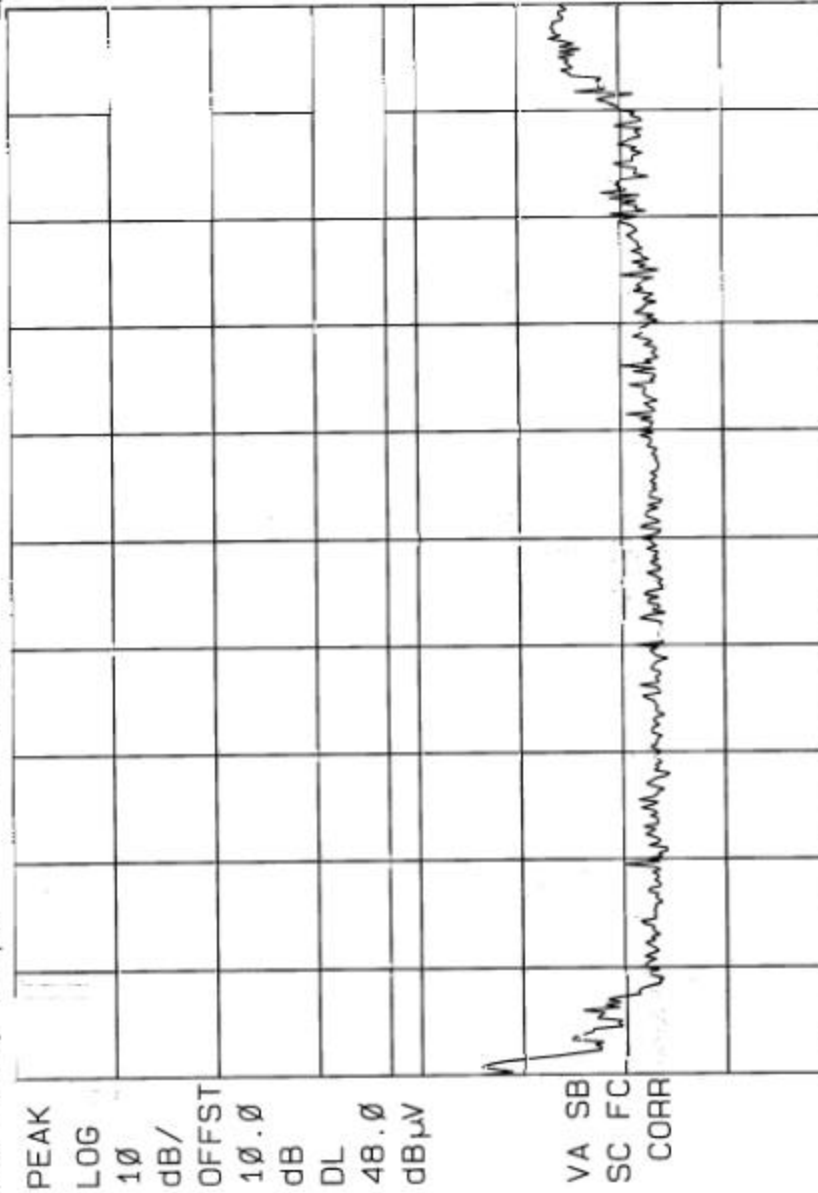


RETLIF TESTING LABORATORIES

Test Method	FCC Part 15, Subpart C, Paragraph 15.207(a), AC Line Conducted Emissions, 450 kHz to 30 MHz		
Customer	Symbol Technologies	Job No.	R-8637-1
Test Sample	2.4 GHz Pulsed RF Transmitter Module		
Model No.	FCC ID: H9PPHASERMODULE	Serial No.	N/A
Test Specification	FCC Part 15, Subpart C	Paragraph 15.207(a)	
Operating Mode	Continuously transmitting RF signal at 2402 GHz.		
Technician	T. Schneider	Date	July 24, 2000
Lead Tested	Lead Tested- Neutral Input to AC Adapter, Symbol P/N: 50-14000-008, Rev. A		
Notes	Detector= Peak		

Sheet 2 of 6

11:14:09 JUL 24, 2000
 R-8637 SYMBOL PHASER Conducted Emissions TS Lead-
 REF 85.0 dBμV AT 10 dB

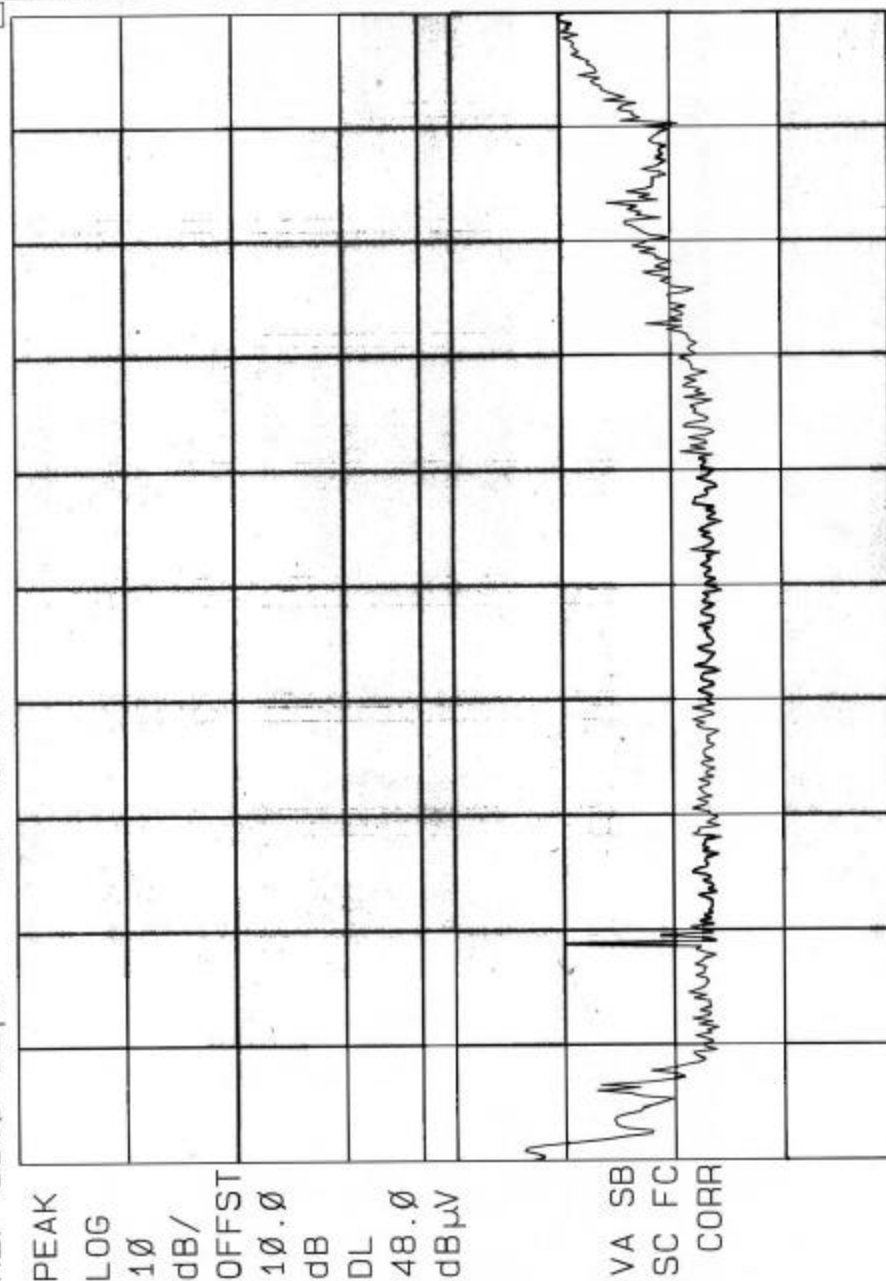


START 450 KHZ
 #RES BW 9.0 KHZ
 STOP 30.00 MHZ
 #SWP 20.0 sec
 VBW 30 KHZ

RETLIF TESTING LABORATORIES

Test Method	FCC Part 15, Subpart C, Paragraph 15.207(a), AC Line Conducted Emissions, 450 kHz to 30 MHz		
Customer	Symbol Technologies	Job No.	R-8637-1
Test Sample	2.4 GHz Pulsed RF Transmitter Module		
Model No.	FCC ID: H9PPHASERMODULE	Serial No.	N/A
Test Specification	FCC Part 15, Subpart C	Paragraph	15.207(a)
Operating Mode	Continuously transmitting RF signal at 2445 GHz.		
Technician	T. Schneider	Date	July 24, 2000
Lead Tested	Lead Tested- Hot Input to AC Adapter, Symbol P/N:50-14000-008, Rev. A		
Notes	Detector= Peak		

Sheet 3 of 6

11:22:53 JUL 24, 2000
 R-8637 SYMBOL PHASER Conducted Emissions TS Lead
 REF 85.0 dBμV AT 10 dB

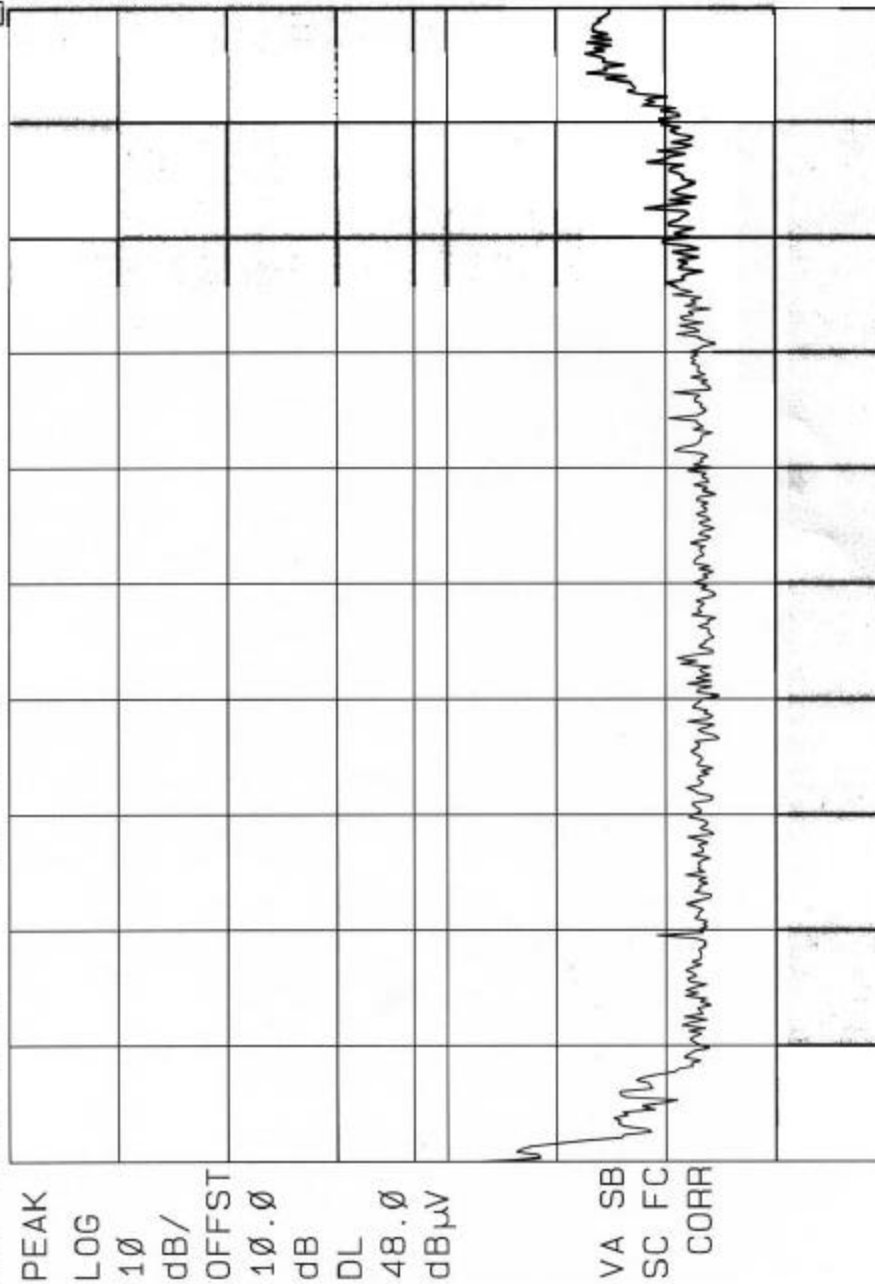

START 450 KHZ
 #RES BW 9 0 KHZ
 VBW 30 KHZ
 STOP 30.00 MHZ
 #SWP 20.0 sec

RETLIF TESTING LABORATORIES


Test Method	FCC Part 15, Subpart C, Paragraph 15.207(a), AC Line Conducted Emissions, 450 kHz to 30 MHz		
Customer	Symbol Technologies	Job No.	R-8637-1
Test Sample	2.4 GHz Pulsed RF Transmitter Module		
Model No.	FCC ID: H9PPHASERMOOULE	Serial No.	N/A
Test Specification	FCC Part 15, Subpart C	Paragraph	15.207(a)
Operating Mode	Continuously transmitting RF signal at 2445 GHz.		
Technician	T. Schneider	Date	July 24, 2000
Lead Tested	Lead Tested- Neutral Input to AC Adapter, Symbol P/N:50-14000-008, Rev. A		
Notes	Detector= Peak		

Sheet 19 of 6

11:25:12 JUL 24, 2000

~~17~~ R-8637 SYMBOL PHASER Conducted Emissions TS Lead

REF 85.0 dBμV AT 10 dB

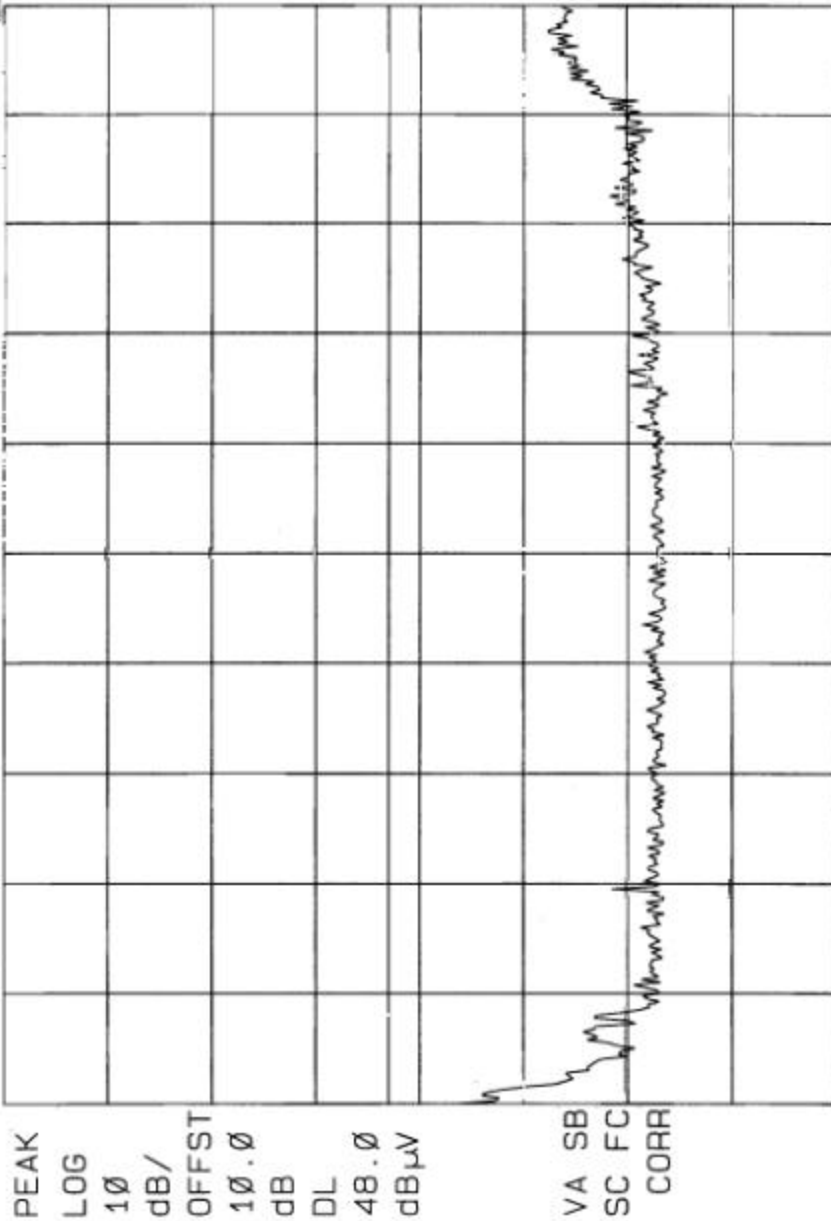


START 450 KHZ #RES BW 9.0 KHZ VBW 30 KHZ STOP 30.00 MHZ #SWP 20.0 sec

RETLIF TESTING LABORATORIES

Test Method	FCC Part 15, Subpart C, Paragraph 15.207(a), AC Line Conducted Emissions, 450 kHz to 30 MHz		
Customer	Symbol Technologies	Job No.	R-8637-1
Test Sample	2.4 GHz Pulsed RF Transmitter Module		
Model No.	FCC ID: H9PPHASERMODULE	Serial No.	N/A
Test Specification	FCC Part 15, Subpart C		Paragraph 15.207(a)
Operating Mode	Continuously transmitting RF signal at 2483 GHz.		
Technician	T. Schneider	Date	July 24, 2000
Lead Tested	Lead Tested- Hot Input to AC Adapter, Symbol P/N:50-14000-008, Rev. A		
Notes	Detector= Peak		

Sheet 5 of 6

11:29:52 JUL 24, 2000
 R-8637 SYMBOL PHASER Conducted Emissions TS Lead-H
 REF 85.0 dBμV AT 10 dB

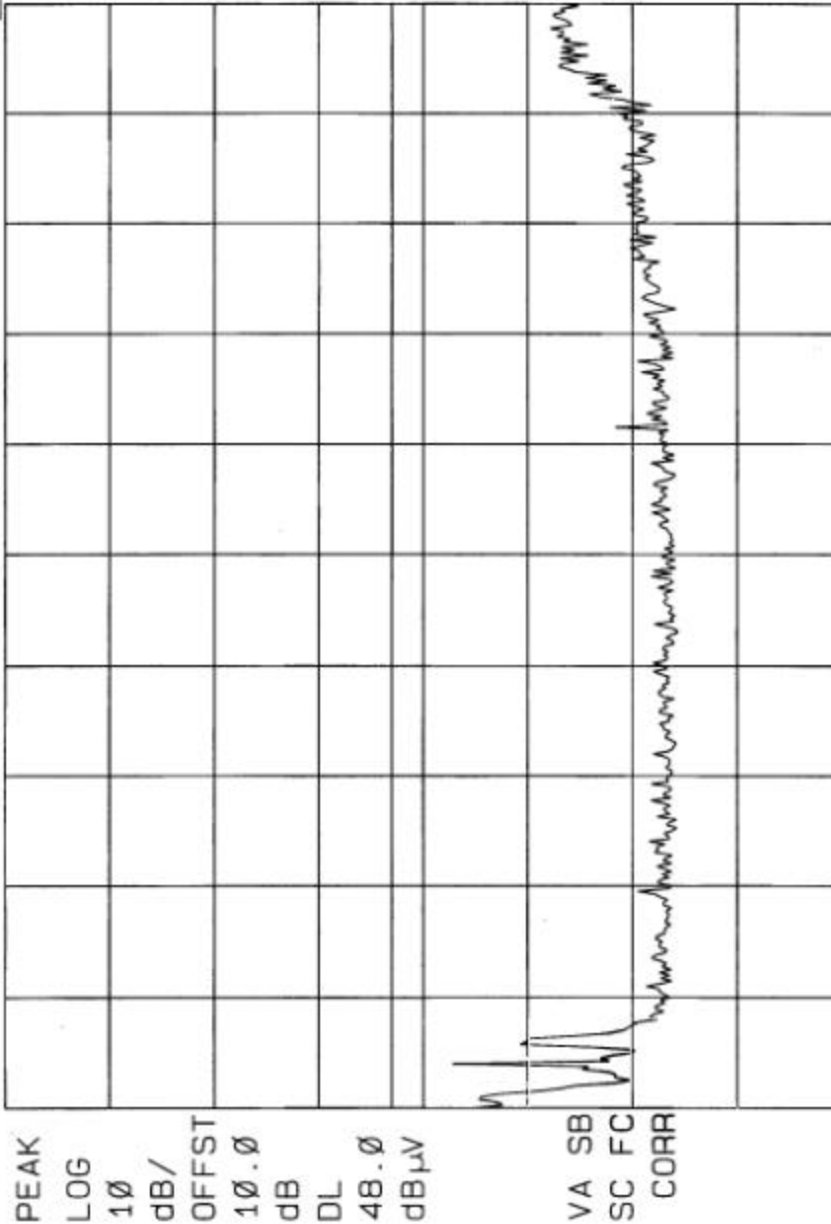

START 450 KHZ
 #RES BW 9.0 KHZ
 STOP 30.00 MHZ
 #SWP 20.0 sec
 VBW 30 KHZ

RETLIF TESTING LABORATORIES


Test Method	FCC Part 15, Subpart C, Paragraph 15.207(a), AC Line Conducted Emissions, 450 kHz to 30 MHz		
Customer	Symbol Technologies	Job No.	R-8637-1
Test Sample	2.4 GHz Pulsed RF Transmitter Module		
Model No.	FCC ID: H9PPHASERMODULE	Serial No.	N/A
Test Specification	FCC Part 15, Subpart C	Paragraph	15.207(a)
Operating Mode	Continuously transmitting RF signal at 2483 GHz.		
Technician	T. Schneider	Date	July 24, 2000
Lead Tested	Lead Tested- Neutral Input to AC Adapter, Symbol P/N:50-14000-008, Rev. A		
Notes	Detector= Peak		

Sheet 6 of 6

11:27:47 JUL 24, 2000

R-8637 SYMBOL PHASER Conducted Emissions TS Lead

REF 85.0 dBμV AT 10 dB

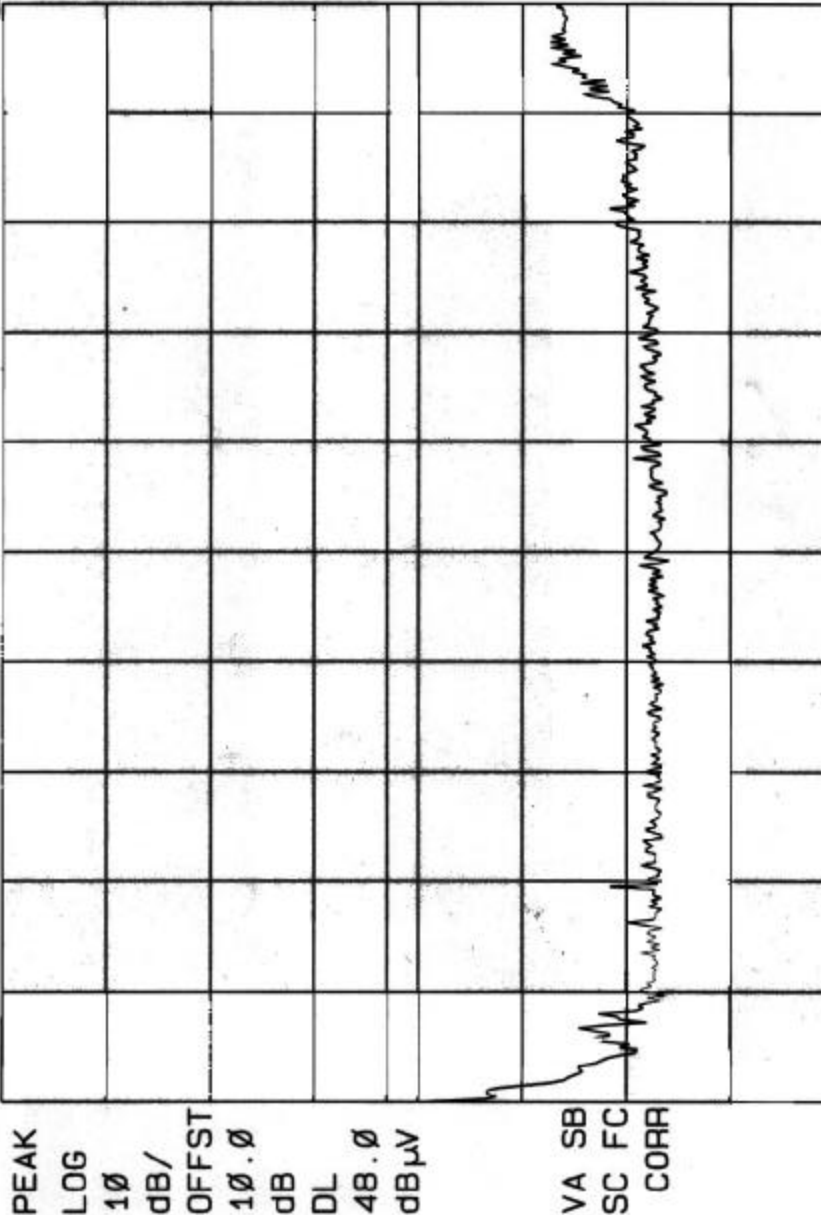

START 450 KHZ #RES BW 9.0 KHZ
 STOP 30.00 MHZ #SWP 20.0 sec
 VBW 30 KHZ