

Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site



COMPLIANCE TEST REPORT		FCC PART 95D RSS-236		EMC/RF MEASUREMENT REPORT		
Test Lab Information	Name	CELLTECH LABS INCORPORATED				
Test Lab Illiorniation	Address	21-364 Lougheed Road,	Kelowna	, British Columbia V1X 7R8 Canada		
Test Lab Accreditation(s)	A2LA	ISO 17025:2005 (A2LA T	est Lab	Certificate No. 2470.01)		
Test Site Registration No.	FCC	Accredited Site				
rest site Registration No.	IC	3874A-1				
Applicant Information	Name	UNIDEN AMERICA CORPO	RATION			
Applicant Information	Address	3001 Gateway Dr., Suite Irving, Texas 75063	130			
Measurement Standard(s)	FCC IC.	47 CFR Part 95 Subpart RSS-236	D			
& Procedure(s) Applied	ANSI	TIA/EIA-382-A	C63.4-2	2014		
Device Classification(s)	FCC/IC	Licensed Non-Broadcast Station Transmitter (TNB)				
Device RF Exposure Category	FCC	Mobile				
Device Identifier(s)	FCC ID:	AMWUT414 513C-UT414				
Application Type	FCC/IC	Certification				
Device Under Test (DUT)	Mobile CB R	adio Transceiver				
Device Model	RKCB Classi	С				
Test Sample Serial No.(s)	TA Sample -	Identical Prototype				
Transmit Frequency Range(s)	26.965 - 27.4	05 MHz				
Channels	1-40					
Rated MAX. TX Power	4.0W AM,					
Modulation Type(s)	AM.					
Emission Designator(s)	6K00A3E					
Antenna	External Whi	External Whip, 0dBi nominal (3dBi maximum).				
Power Source(s) Tested	DC Power Su	upply (13.8 V)				

This device has demonstrated compliance with the applicable technical standards indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC 47 CFR Rule Parts 2, Part 15B and Part 95D,RSS-236, RSS-GEN ANSI TIA/EIA-382-A and ANSI C63.4-2014.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results and statements contained in this report pertain only to the device(s) evaluated.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.

Test Report Approved By

Swhvers

Art Voss

27 January 2016

Celltech Labs Inc.

Applicant:	Uniden /	America Corporation		AMWUT 513C-U		Model(s):	RKCB Classic	Uniden*
DUT Type:	DUT Type: Mobile AM CB Radio Transceiver.		Frequenc	y Range:	26.965 - 27.405 MHz			
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. Page 1 of 43						Page 1 of 43	



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ILAC MRA
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No. 2470.01

TABLE OF CONTENTS

1.0 REVISION LOG4	
2.0 SCOPE	
3.0 REFERENCES	
4.0 PASS/FAIL CRITERIA5	
5.0 FACILITIES AND ACCREDITATIONS6	
6.0 GENERAL INFORMATION6	
APPENDIX A - RF CONDUCTED OUTPUT POWER MEASUREMENT	
APPENDIX B - MODULATION CHARACTERISTICS (MODULATION LIMITING)9	
APPENDIX C - MODULATION CHARACTERISTICS (AUDIO FREQUENCY)	
APPENDIX D - OCCUPIED BANDWIDTH AND EMISSION MASK	
APPENDIX E - SPURIOUS EMISSIONS AT THE ANTENNA TERMINAL	
APPENDIX F - RADIATED SPURIOUS EMISSIONS	
APPENDIX G - FREQUENCY STABILITY41	

Applicant:	Uniden /	America Corporation		AMWUT 513C-U		Model(s):	RKCB Classic	Uniden*
DUT Type:	DUT Type: Mobile AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz		
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. Page 2 of 43						Page 2 of 43	



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site

Test Lab Certificate No.

2470.01

	TEST SUMMARY							
Reference	ed Standard(s):	FCC CFR Title 47 Parts	s 2, 95(D), 15(B)					
Appendix Description of Test		Procedure Reference	Limit Reference	Date of compliance test verification	Result			
Α	Conducted Power	ANSI/TIA/EIA-382-A	§2.1033, 95 RSS-236	30 Nov 2015	Pass			
В	Modulation	ANSI/TIA/EIA-382-A	§2.1047, 95 RSS-236	1 Dec 2015	Pass			
С	Audio Frequency Response	ANSI/TIA/EIA-382-A	§2.1047, 95 RSS-236	1 Dec 2015	Pass			
D	Occupied Bandwidth and Emission Mask	ANSI/TIA/EIA-382-A	§2.1049, 95 RSS-236	30 Nov 2015	Pass			
E	Conducted TX Spurious Emissions	ANSI/TIA/EIA-382-A	§2.1053, 95 RSS-236	1, 17 Dec 2015	Pass			
F	Radiated TX Spurious Emissions	ANSI/TIA/EIA-382-A	§2.1053, 95 RSS-236	7 Dec 2015	Pass			
'	Radiated Spurious Emissions	ANSI C63.4:2003	§15 Subpart B ICES-003	7 Dec 2015	Pass			
G	Frequency Stability	ANSI/TIA/EIA-382-A	§2.1055, 95 RSS-236	11 Dec 2015	Pass			

Applicant:	Uniden A	America Corporation		AMWUT 513C-UT		Model(s):	RKCB Classic	Uniden°
DUT Type:	Mobile A	M CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 3 of 43		



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site



1.0 REVISION LOG

Revision	Description	Implemented By	Implementation Date
1.0	1st Release	Art Voss	21 December 2015
1.1	2 nd Release – Corrections per TCB	Art Voss	27 January 2016

Test Report Prepared By	Date	QA Review By	Date
Art Voss	21 December 2015	Art Voss	21 December 2015

Applicant:	Uniden America Corporation		AMWUT414 513C-UT414	Model(s):	RKCB Classic	Unideni
DUT Type:	Mobile AM CB Radio Transceiver.		Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 4 of 43



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	Hac MRA
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No. 2470.01

2.0 SCOPE

This report outlines the measurements made and results collected during electromagnetic emissions testing of the Uniden America Corporation CB Radio Transceiver FCC/IC: AMWUT414/513C-UT414. The measurement results were applied against the applicable EMC requirements and limits outlined in the technical rules and regulations set forth in the Federal Communication's Commission Code of Federal Regulations Title 47 Part 2, Part 95 Subpart D and RSS-236.

3.0 REFERENCES

3.1 Normative References

ANSI/ISO 17025:2005 General Requirements for competence of testing and calibration laboratories

IEEE/ANSI C63.4:2003 Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

ANSI/TIA/EIA-382-A Citizens Band Radio Service Amplitude Modulated (AM) Transceivers Operating in the 27 MHz Band

CFR Title 47 Part 2 Code of Federal Regulations

Title 47: Telecommunication

Part 2: Frequency Allocations and Radio Treaty Matters;

General Rules and Regulations

CFR Title 47 Part 95 Code of Federal Regulations

Title 47: Telecommunication

Part 95: Personal Radio Services Subpart D - Citizens Band (CB) Radio Service

Industry Canada RSS-236, RSS-GEN

4.0 PASS/FAIL CRITERIA

Unless otherwise noted in the Appendices, the pass/fail criteria are the limits set forth in the reference standards. The DUT is considered to have passed the requirements if the data collected during the described measurement procedure is no greater than the specified limits as defined. The pass/fail statements made in this report only apply to the unit tested.

Applicant:	ant: Uniden America Corporation			D: AMWUT414 513C-UT414		Model(s):	RKCB Classic	Uniden°
DUT Type:	Type: Mobile AM CB Radio Transceiver.				Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 5 of 43	



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	"11"
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	1
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	T



5.0 FACILITIES AND ACCREDITATIONS

The facilities used in collecting the test results outlined in this report are located at 21-364 Lougheed Road, Kelowna, British Columbia, Canada V1X 7R8. The radiated emissions site conforms to the requirements set forth in ANSI C63.4 and is filed and listed with Industry Canada under File Number IC 3874A-1. Celltech test site is listed with the FCC as an accredited test facility.

6.0 GENERAL INFORMATION

6.1 DUT Description & Specifications

DEVICE TYPE:	Mobile CB Radio Transceiver					
DEVICE MODEL(S):	RKCB Classi	С				
TEST SAMPLE SERIAL NO.:	T/A Sample - Identical Prototype					
DEVICE IDENTIFIER(S):	FCC ID: AMWUT414 513C-UT414					
TRANSMIT FREQUENCY RANGE:	26.965 - 27.405 MHz (Chan. 1-40)					
NO. OF CHANNELS:	40					
MANUF. MAX. RATED OUTPUT POWER:	4.0W AM					
ANTENNA GAIN:	External Whip, 0dBi nominal (3dBi maximum).					
MODULATION:	AM					
EMISSION DESIGNATOR:	6k00A3E Bn = 2M M = 3000 Bn = 6000					
DUT POWER SOURCE:	12 VDC Bat	ttery, DC Power Supply (13.8 V)				
TYPE OF EQUIPMENT:	Licensed Non-Broadcast Station Transmitter (TNB)					
DEVIATION(S) FROM STANDARD/PROCEDURE:	None					
MODIFICATION OF DUT:	None					
APPLICABLE STANDARDS:	EIA/TIA-382	2-A, FCC CFR 47 Part 95, RSS-GEN, RSS-236				

Applicant:	ant: Uniden America Corporation					Model(s):	RKCB Classic	Uniden
DUT Type:	Mobile AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz		
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 6 of 43	



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	Ilac-MRA
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No. 2470.01

APPENDIX A - RF Conducted Output Power Measurement

References	
Normative Reference Standard	FCC CFR 47 §2.1046, §95D, RSS-236

Limits	
§95.639 RSS-236, 5.2	4.0W, 36dBm

Environmental Conditions				
Temperature	25 °C			
Humidity	45 +/- 10 %			
Barometric Pressure	101 +/- 3 kPa			

Asset number	Manufacturer	Model	Description	Last cal / Cal due
00110	Gigatronics	8652A	Power Meter	17-Feb-14 /17-Feb-16
00248	Gigatronics	80334A	Power Sensor	17-Feb-14 /17-Feb-16

Applicant:	cant: Uniden America Corporation			AMWUT 513C-U		Model(s):	RKCB Classic	Uniden
DUT Type:	: Mobile AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz		
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							Page 7 of 43



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ILICEMRA ACCREDITED
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No. 2470.01

Conducted Power Measurement

Method of Measurement: The RF power is measured with a 50 ohm resistive watt-meter connected at the EUT's RF output connector. Nomiminal DC power of 13.8VDC is applied.

II 10 ((D (0) 4)	0.0014/	
Measured Output Power (Ch 1):	3.99W	
Measured Output Power (Ch 19):	3.86W	
Measured Output Power (Ch 40):	3.72W	
	$I_{Rx} = 0.250A, I_{Tx} = 1.25A$	
FCC CFR 47 §2.1033(c)(8): Power to Transmitter:	I _{Xmitter} = 1.0A	
	(13.8VDC)(1.00A) = 13.8W	
Manufacturer's Rated Output Power:	4.0W	
FCC/IC Limit:	4.0W	
Result:	Complies	

Sign-Off

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Challevoss

Art Voss Sr. Engineer

Applicant:	t: Uniden America Corporation		FCC ID: AMWUT414 IC: 513C-UT414		Model(s):	RKCB Classic	Uniden'	
DUT Type:	Mobile A	AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 8 of 43	



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	Hac-MRA ACCREDITED
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No.


APPENDIX B - Modulation Characteristics (Modulation Limiting)

References	
Normative Reference Standard	FCC CFR 47 §2.1047, Part 95D, 95.637, RSS-236, 5.3.2

Limits	
FCC §2.1047	Modulation can not exceed 100% - Modulation Limiting.

Environmental Conditions					
Temperature	25 +/- 5 °C				
Humidity	40 +/- 10 %				
Barometric Pressure	101 +/- 3 kPa				

Equipment List							
Asset number	Manufacturer	Model	Description	Last cal / Cal due			
00028	HP	8901A	Modulation Analyzer	22-Dec-14 / 22-Dec-16			
00027	HP	8903B	Audio Generator/Analyzer	22-Dec-14 / 22-Dec-16			

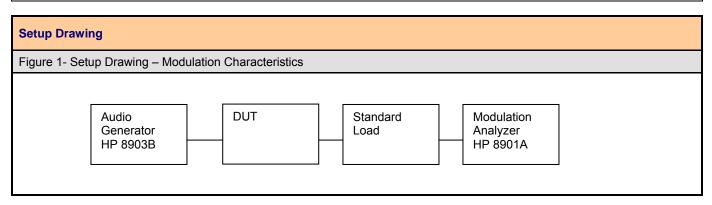


Applicant:	Uniden America Corporation FCC ID: AMWUT4 IC: 513C-UT4			Model(s):	RKCB Classic	Uniden		
DUT Type:	Mobile A	M CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 9 of 43	



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ILAC MRA
				Total alahar
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No.

2470.01

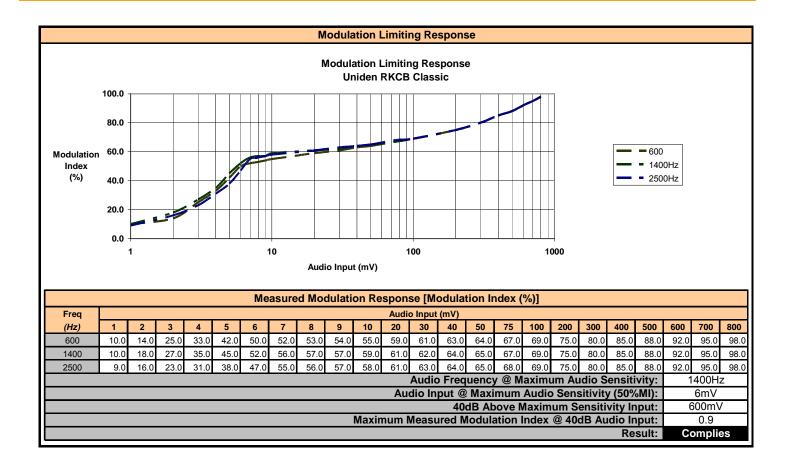

Sign-Off

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Swell York

Art Voss Sr. Engineer

Applicant:	Uniden A	America Corporation		AMWUT 513C-U		Model(s):	RKCB Classic	Uniden°
DUT Type:	Mobile A	AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 10 of 43	



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ILEC MRA
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No.


APPENDIX C - Modulation Characteristics (Audio Frequency)

References	
Normative Reference Standard	FCC CFR 47 §2.1047, TIA/EIA-382-A, Para 25.

Limits	
FCC §2.1047	a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted.

Environmental Conditions				
Temperature	25 +/- 5 °C			
Humidity	40 +/- 10 %			
Barometric Pressure	101 +/- 3 kPa			

Equipment List						
Asset number	Manufacturer	Model	Description	Last cal / Cal due		
00028	HP	8901A	Modulation Analyzer	22-Dec-14 / 22-Dec-16		
00027	HP	8903B	Audio Generator/Analyzer	22-Dec-14 / 22-Dec-16		

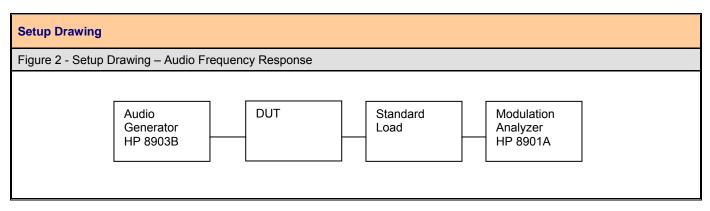


Applicant:	Uniden /	America Corporation		AMWUT 513C-U		Model(s):	RKCB Classic	Uniden
DUT Type: Mobile AM CB Radio Transceiver.				Frequenc	y Range:	26.965 - 27.405 MHz		
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 11 of 43			



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ilac-MRA
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No.

Audio Frequency Response

Measured						
, A	Audio Response	9				
	Audio Res	ponse				
Freq	(Input	•				
	@50%					
(Hz)	(mV)	(dB)*				
100	39.0	-16.3				
200	14.0	-7.4				
300	10.0	-4.4				
400	8.6	-3.1				
800	6.9	-1.2				
1000	6.5	-0.7				
1200	6.1	-0.1				
1400	6.0	0.0				
1600	6.1	-0.1				
1800	6.3	-0.4				
2000	6.5	-0.7				
3000	7.5	-1.9				
4000	9.0	-3.5				
8000	20.0	-10.5				
* Normal	ize to 1400Hz					

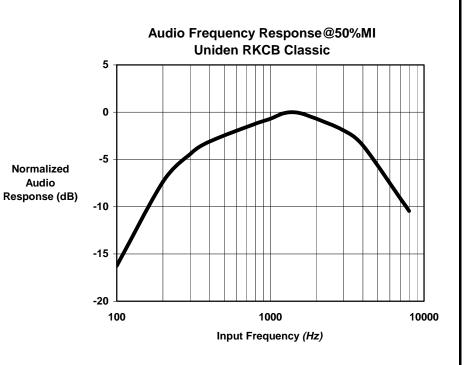

Maximum Deviation from Reference Between 300Hz and 3000Hz (dB): -10.5

Result: Complies

Sign-Off

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Sullivors

Art Voss Sr. Engineer

Applicant:	Uniden A	America Corporation		AMWUT 513C-U1		Model(s):	RKCB Classic	liniden'
DUT Type:	Mobile A	AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 12 of 43			



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	IBC-MRA ACCREDITED
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No. 2470 01


APPENDIX D - Occupied Bandwidth and Emission Mask

References				
Normative Reference Standard FCC CFR 47 §2.1049, §95.635, RSS-236, 5.4.4				
Procedure Reference / Description	Occupied bandwidth was performed by connecting the output of the DUT to the input of a spectrum analyzer. The unit was supplied a 2500Hz audio signal adjusted to 50% plus 16dB.			

Limits	
	At least 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
§95.635 RSS-236, 5.4.4	At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.
RSS-Gen	At least 53 + 10 log ₁₀ (T) dB on any frequency removed from the center of the authorized bandwidth by more than 250%.
	RSS-Gen - When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

Environmental Conditions			
Temperature	25 +/- 5 °C		
Humidity	40 +/- 10 %		
Barometric Pressure	101 +/- 3 kPa		

Equipment List								
Asset number	Manufacturer	Model	Description	Last cal / Cal due				
00241	R&S	FSP40	Spectrum Analyzer	23 Apr 15 / 23 Apr 17				
00027	HP	8903B	Audio Generator/Analyzer	22-Dec-14 / 22-Dec-16				

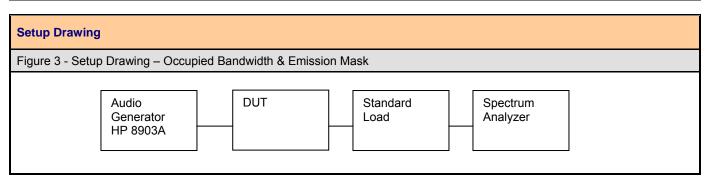


Applicant:	ant: Illniden America Cornoration					Model(s):	RKCB Classic	Uniden
DUT Type:	e: Mobile AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz		
2015 Celltech L	15 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 13 of 43		



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	ALL THE PARTY OF T
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ilac-MRA
				Maria Maladalar
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate



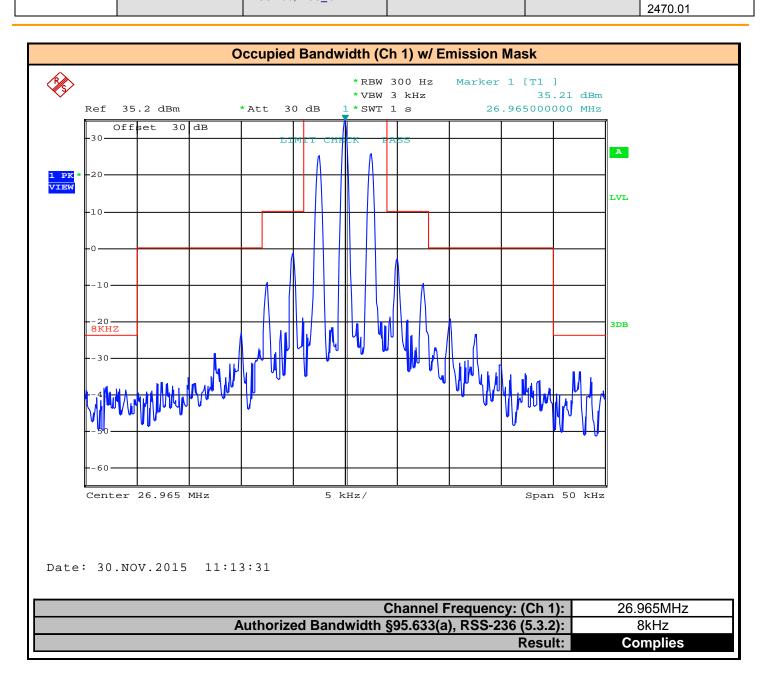


Applicant:	t: Uniden America Corporation FCC ID: AMWUT4 513C-UT4			Model(s):	RKCB Classic	Uniden°		
DUT Type:	Mobile A	M CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech L	015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 14 of 43		



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	STATE OF THE PARTY
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ILAC MRA
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate




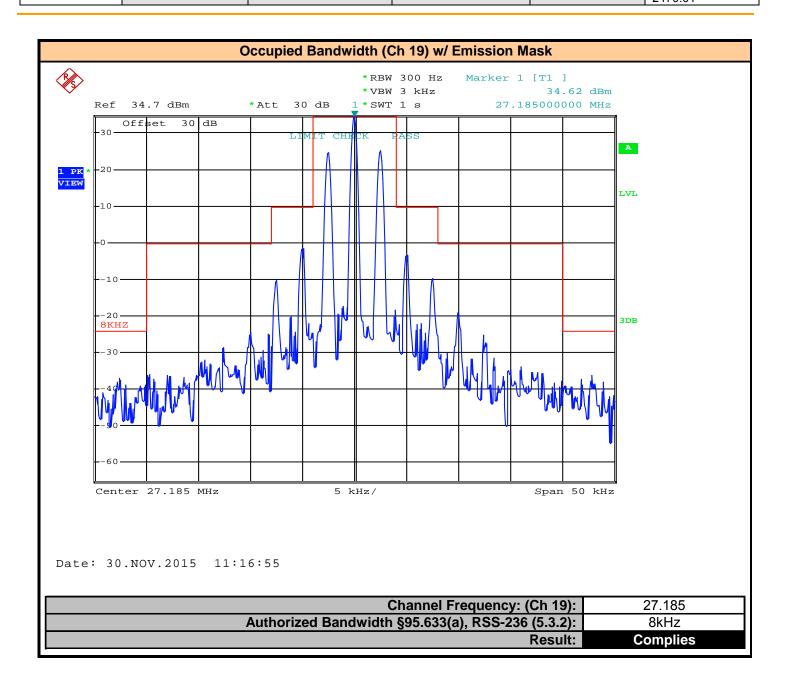

Applicant:	eant: Uniden America Cornoration			AMWUT414 613C-UT414 Model(s):		RKCB Classic	Uniden*
DUT Type:	e: Mobile AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech L	15 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 15 of 43	



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	Hac MRA
				Total white
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No.

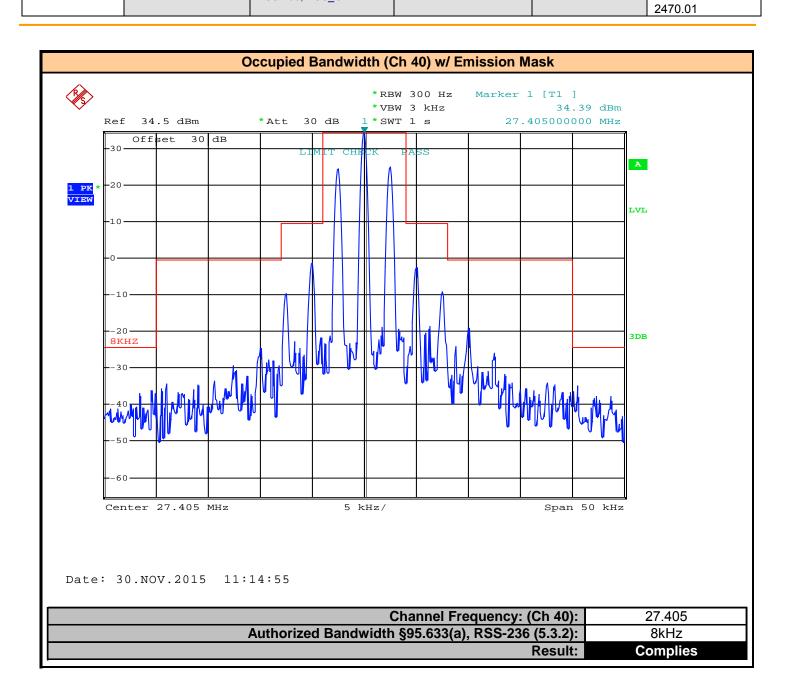

Applicant:	Uniden A	America Corporation		AMWUT 513C-UT		Model(s):	RKCB Classic	Uniden°
DUT Type:	Mobile A	M CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							Page 16 of 43




Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	1
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	1



8kHz

Complies

Result:

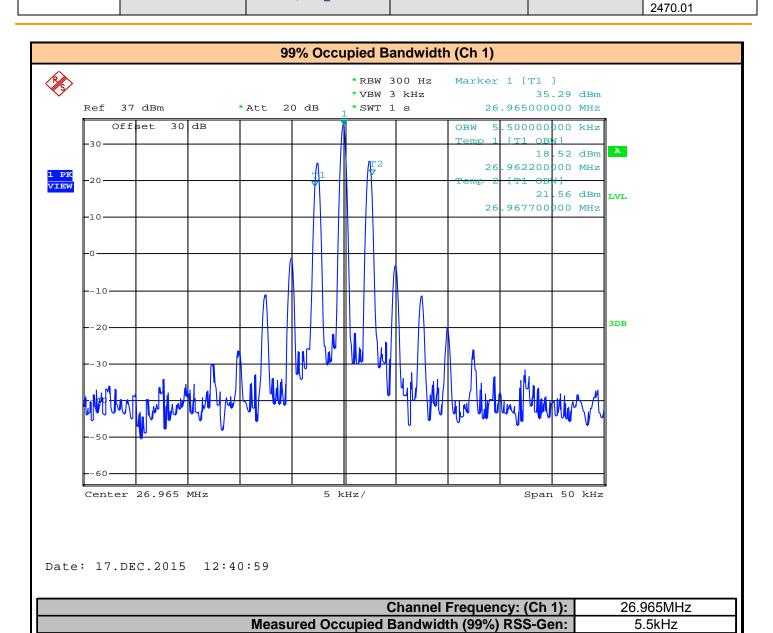


Applicant:	Uniden America Cornoration		FCC ID: AMWUT414 IC: 513C-UT414		Model(s):	RKCB Classic	Uniden'	
DUT Type:	Mobile A	AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech L	abs Inc.	s Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

Authorized Bandwidth §95.633(a), RSS-236 (5.3.2):



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ILAC MRA
				Total alabation
Dula Dart(a) Applied:	FCC 47 CFR §2, §95D,	Toot Site Designation(s):	FCC Approdited City	Test Lab
Rule Part(s) Applied:	RSS-236, RSS GEN	Test Site Registration(s):	FCC Accredited Site	Certificate No.

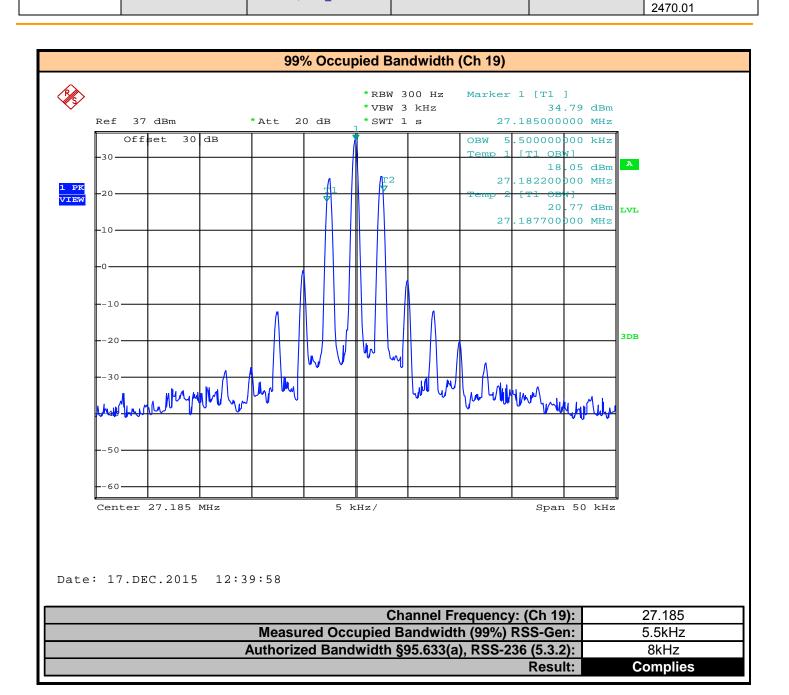


Applicant:	Uniden America Corporation		FCC ID: AMWUT414 IC: 513C-UT414		Model(s):	RKCB Classic	Uniden°	
DUT Type:	Mobile A	M CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 18 of 43	



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	STATE OF THE PARTY
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ilac MRA
				The Control of the
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certifica



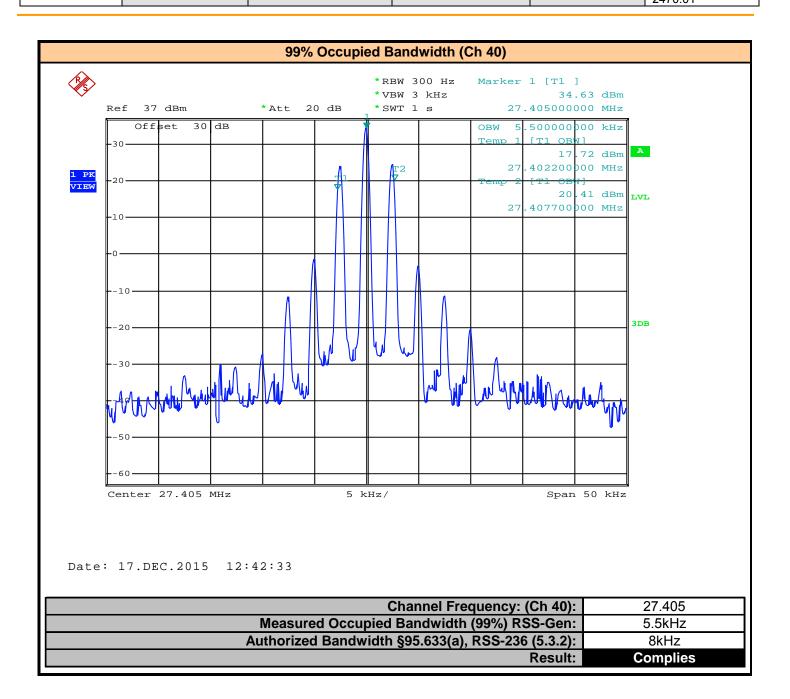

Applicant:	Uniden America Corporation					Model(s):	RKCB Classic	Uniden
DUT Type:	Mobile AM CB Radio Transceiver.				Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 19 of 43		



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site

IC MRA
Test Lab
Certificate No.
2470.01

S	:	~	n		$\overline{}$	ff
J	ı	u	Ш	_	U	ш

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Challevor	\
Art Voss	_
Sr. Engineer	

Applicant:	Uniden America Corporation		FCC ID: AMWUT414 IC: 513C-UT414		Model(s):	RKCB Classic	Uniden	
DUT Type:	Mobile AM CB Radio Transceiver.				Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 20 of 43		




Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ILAC-MRA A A A A A A A A A A A A A A A A A A
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No. 2470.01

APPENDIX E - Spurious Emissions at the Antenna Terminal

101 +/- 3 kPa

References					
Normative Reference Standard FCC CFR 47 §2.1051, Part 95D,95.635; RSS-236, 5.4.4, RSS-GEN					
Limits					
Part 95D: 95.635 RSS-236: 5.4.4	53 + 10 Log (Po) = 59dBc, 60dBc ≥ twice the fundamental frequency.				
Environmental Conditions					
Temperature	25 +/- 5 °C				
Humidity	40 +/- 10 %				

Equipment List							
Asset number	Manufacturer	Model	Description	Last cal / Cal due			
00027	HP	8903B	Audio Generator/Analyzer	22-Dec-14 / 22-Dec-16			
00099	Mini-Circuits	BHP-50	High Pass Filter	Cal on use			
00241	R&S	FSU40	Spectrum Analyzer	23 Apr 15 / 23 Apr 17			

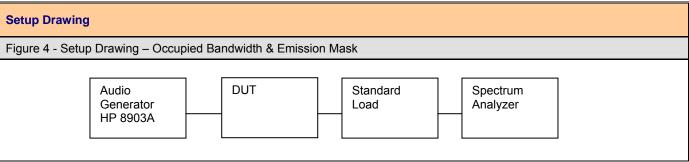

Notes:

The spectrum was searched from 20MHz to 1000 MHz.

All detected emissions have been reported.


Detected Emissions

Barometric Pressure

Applicant:	Uniden A	iden America Cornoration		AMWUT 513C-U		Model(s):	RKCB Classic	Uniden
DUT Type:	Mobile A	AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 21 of 43		




Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	Hac MRA
				Total white
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No.

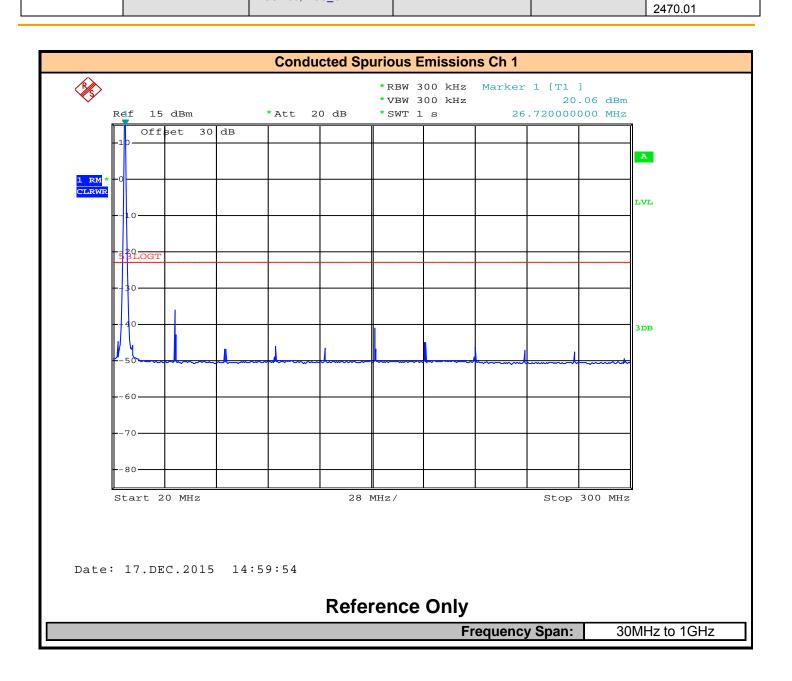

Applicant:	Uniden /	America Corporation		AMWUT 513C-UT		Model(s):	RKCB Classic	Uniden°
DUT Type:	Mobile A	M CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 22 of 43		




Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	Hac MRA
				Total adalan
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No.
	K33-230, K35_GEN			Commodie No.

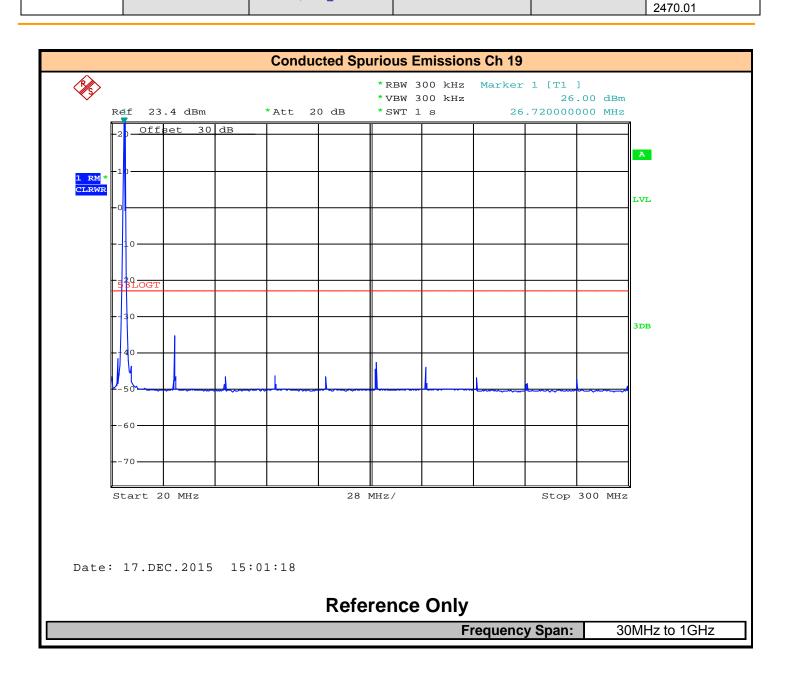

Applicant:	Uniden /	America Corporation		AMWUT 513C-U		Model(s):	RKCB Classic	Uniden
DUT Type:	Mobile A	M CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 23 of 43			



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ILAC MRA
				Total white
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No.

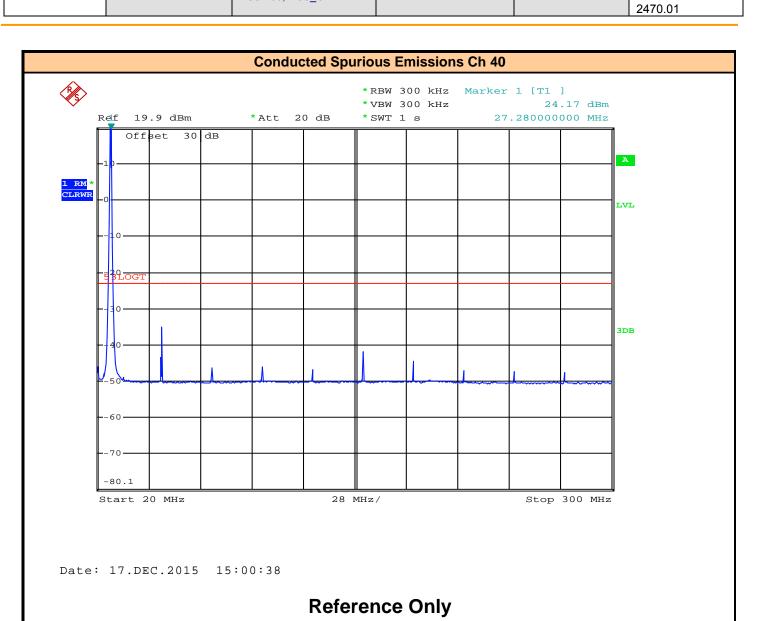


Applicant:	Uniden .	America Corporation		AMWUT 513C-U1		Model(s):	RKCB Classic	Uniden'
DUT Type:	Mobile A	AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 24 of 43		

Frequency Span:

30MHz to 1GHz



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016		
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ILAC MRA	
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No. 2470.01	

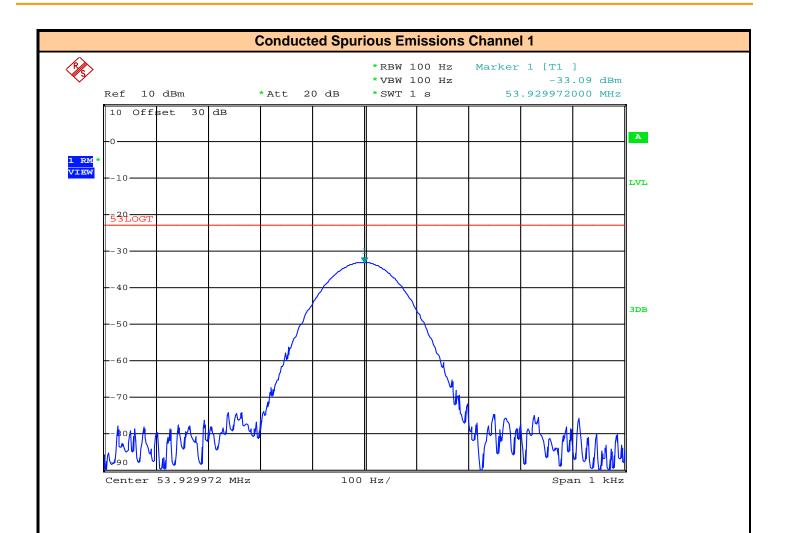


Date: 17.DEC.2015 14:48:47

Harmonic:	2nd
Minimum Attenuation §95.633(a), RSS-236 (5.3.2):	60dB
Minimum Attenuation Measured:	69.09dB
Margin:	9.09dB
Result:	Complies

Applicant:	Uniden A	America Corporation		AMWUT 513C-UT		Model(s):	RKCB Classic	Uniden
DUT Type:	Mobile A	M CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							Page 25 of 43



Test Report Serial No.: 113015AMW-T1338-E95D		Test Report Issue Date:	27 January 2016		
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ILAC-MRA ACCREDITED	
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No. 2470.01	

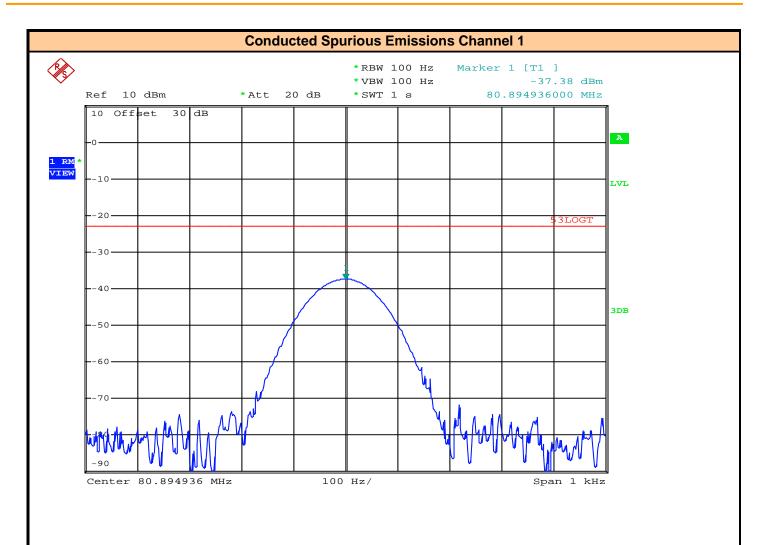


Date: 17.DEC.2015 14:58:10

Harmonic:	3rd
Minimum Attenuation §95.633(a), RSS-236 (5.3.2):	60dB
Minimum Attenuation Measured:	73.38dB
Margin:	13.38dB
Result:	Complies

Applicant:	Uniden America Corporation		AMWUT414 513C-UT414	Model(s):	RKCB Classic	Uniden°	
DUT Type:	Mobile AM CB Radio Transceiver.		Frequen	cy Range:	26.965 - 27.405 MHz	-1111-1-1-1	
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						




Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ILAC MRA
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No. 2470.01

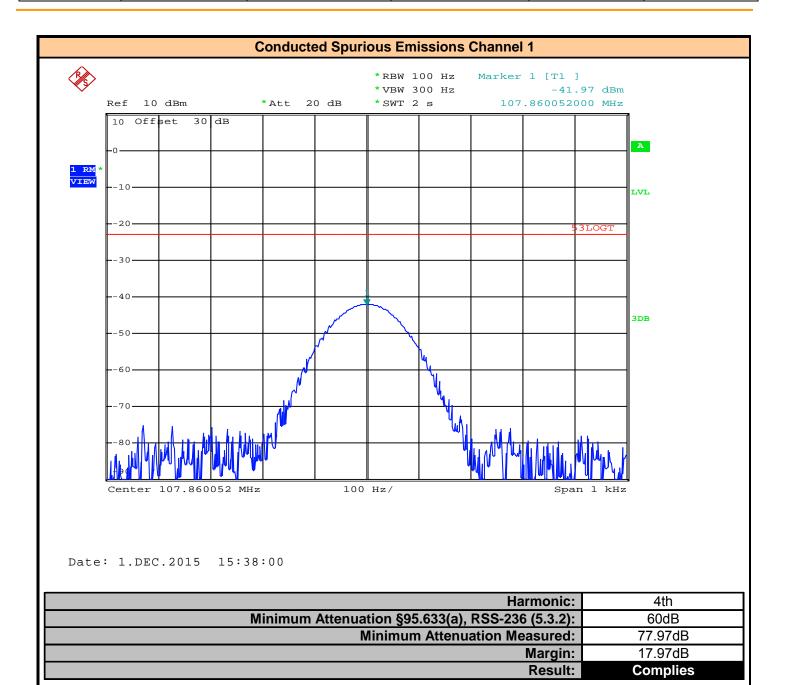

Applicant:	cant: Uniden America Corporation		FCC ID: AMWUT414 IC: 513C-UT414		Model(s):	RKCB Classic	liniden'	
DUT Type:	OUT Type: Mobile AM CB Radio Transceiver.				Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							Page 27 of 43	



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	IC MRA
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No. 2470.01

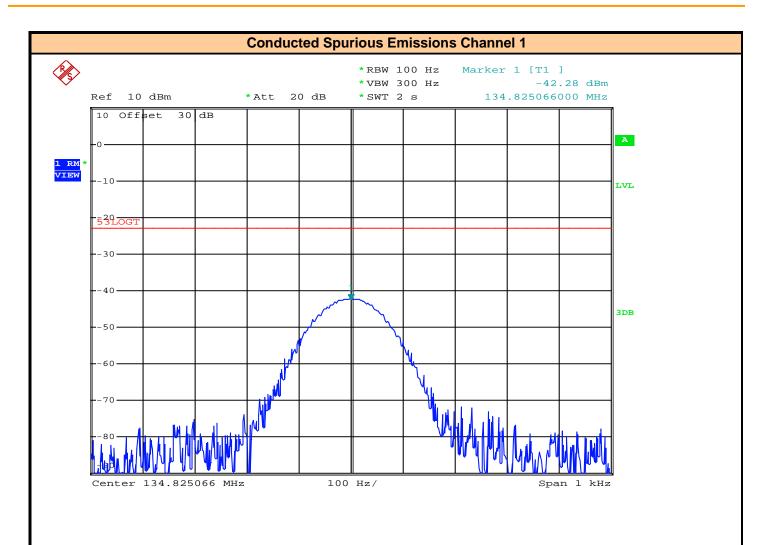


Date: 1.DEC.2015 15:38:51

Harmonic	: 5th
Minimum Attenuation §95.633(a), RSS-236 (5.3.2)	: 60dB
Minimum Attenuation Measured	78.28dB
Margin	: 18.28dB
Result	Complies

Applicant:	nt: Uniden America Corporation FCC ID: IC:			AMWUT414 513C-UT414 Model(s):		Model(s):	RKCB Classic	Uniden°
DUT Type:	Mobile A	M CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							Page 28 of 43



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ICAC MRA
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No. 2470.01

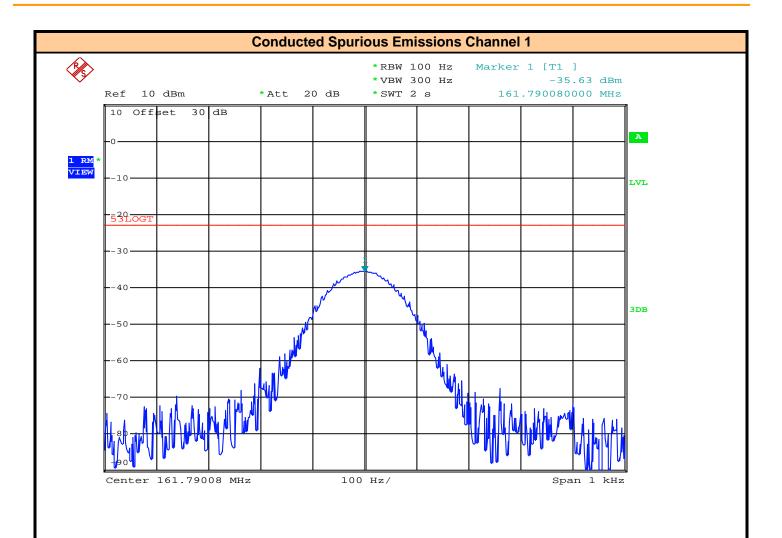

Date: 1.DEC.2015 15:39:35


Minimum Attenuation S0F (22/a) DSC 226 /F 2 2).	
Minimum Attenuation §95.633(a), RSS-236 (5.3.2):	60dB
Minimum Attenuation Measured:	71.63dB
Margin:	11.63dB
Result:	Complies

Applicant:	Uniden America Corporation		: AMWUT414 513C-UT414		Model(s):	RKCB Classic	Uniden°
DUT Type:	Mobile AM CB Radio Transceiver.		F	Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	Market Comment
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ilac
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Tes Cer



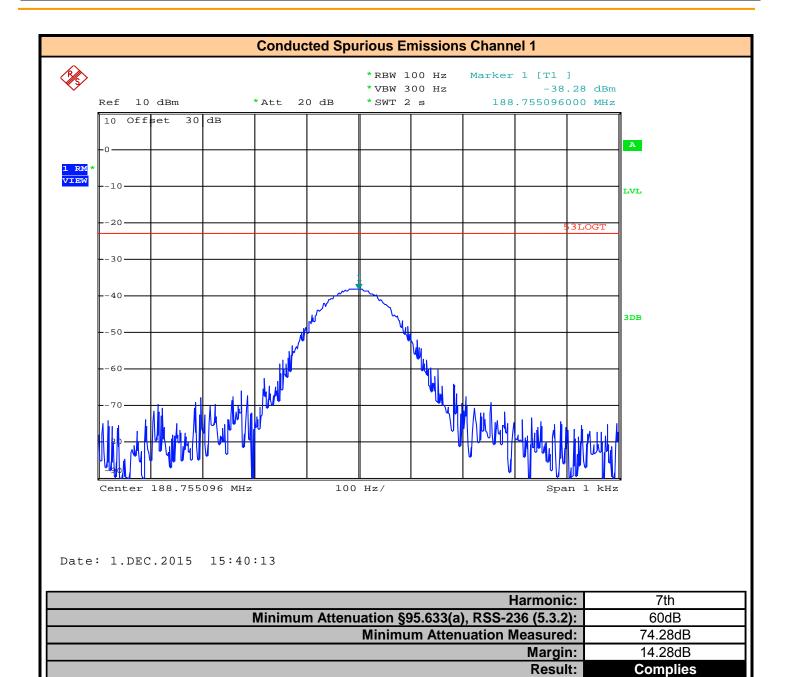


Applicant:	Uniden America Corporation		FCC ID: AMWUT414 IC: 513C-UT414		Model(s):	RKCB Classic	Uniden'	
DUT Type:	Mobile A	AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							Page 30 of 43	



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	STATE OF THE PARTY
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ilac MRA
				The Control of the
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certifica



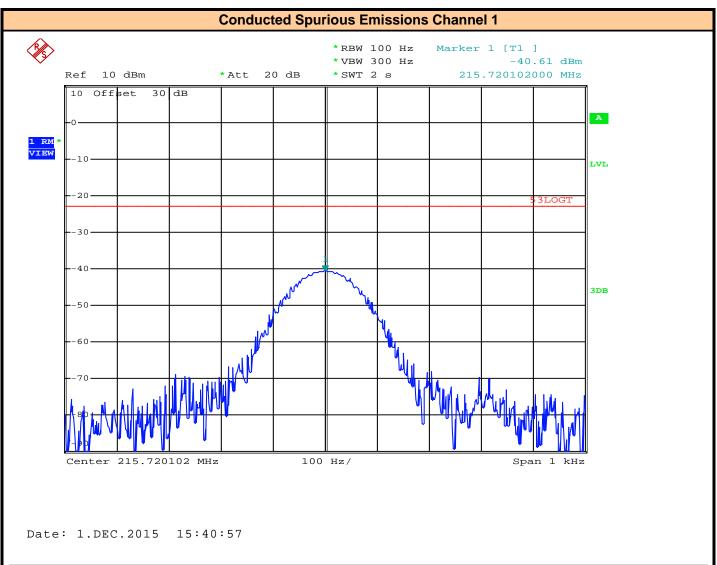


Harmonic:	8th
Minimum Attenuation §95.633(a), RSS-236 (5.3.2):	60dB
Minimum Attenuation Measured:	76.61dB
Margin:	16.61dB
Result:	Complies

Applicant:	t: Uniden America Corporation					Model(s):	RKCB Classic	Uniden
DUT Type:	Mobile A	M CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							Page 31 of 43



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ILAC MRA
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No. 2470.01

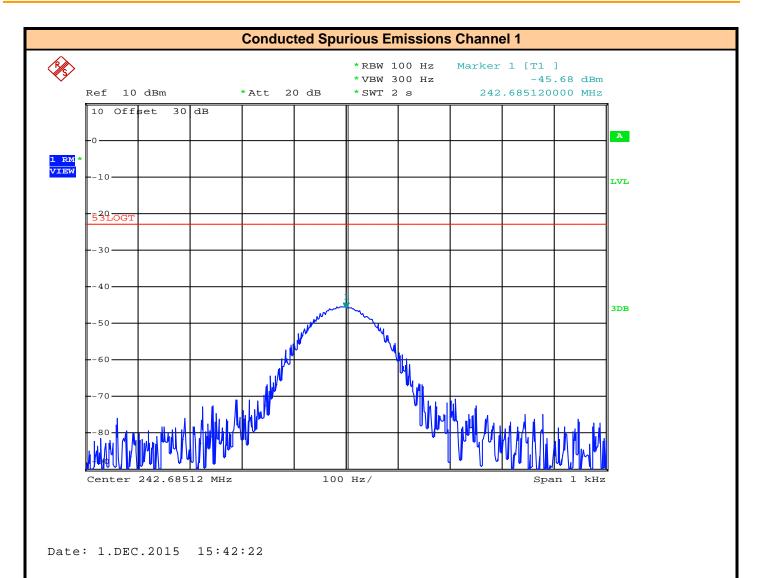


Harmonic:	9th
Minimum Attenuation §95.633(a), RSS-236 (5.3.2):	60dB
Minimum Attenuation Measured:	81.68dB
Margin:	21.68dB
Result:	Complies

Applicant:	t: Uniden America Corporation			AMWUT 513C-UT		Model(s):	RKCB Classic	Uniden
DUT Type: Mobile AM CB Radio Transceiver.				Frequenc	y Range:	26.965 - 27.405 MHz		
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. Page 32 of 43						Page 32 of 43		



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	STATE OF THE PARTY
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ilac MRA
				The Control of the
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certifica



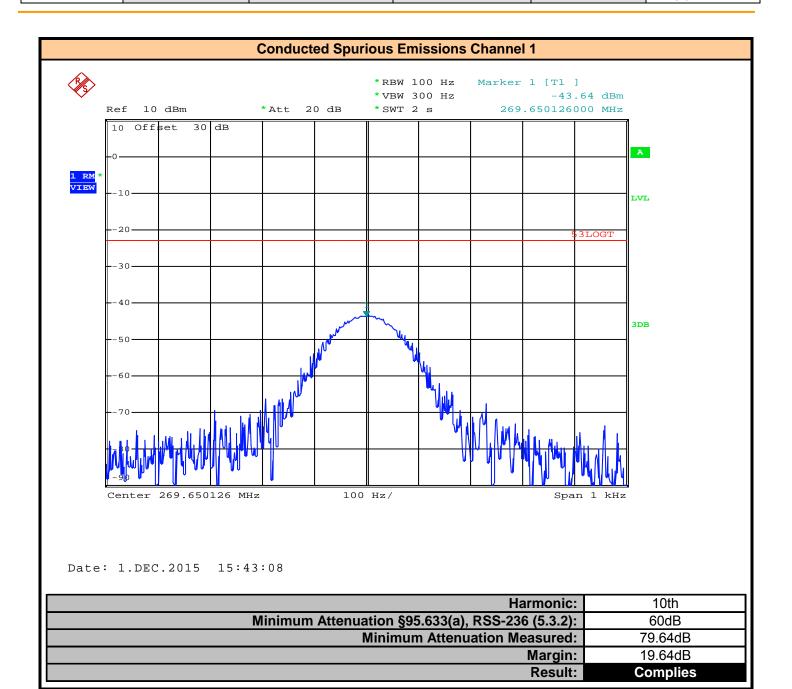

Applicant:	Uniden America Corporation			AMWUT 513C-UT		Model(s):	RKCB Classic	Uniden°
DUT Type: Mobile AM CB Radio Transceiver.				Frequenc	y Range:	26.965 - 27.405 MHz		
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. Page 33 of 43						Page 33 of 43		



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site

ICC-MRA ACCREDITED
Test Lab
Certificate No.
2470.04

S	i	a	n	_	O	ff

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Scalle York	
Art Voss Sr. Engineer	

Applicant:	icant: Uniden America Corporation			AMWUT 513C-UT		Model(s):	RKCB Classic	Uniden
DUT Type:	DUT Type: Mobile AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz		
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. Page 34 of 43						Page 34 of 43		



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	Mary Comment
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	in the second
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Te: Ce



APPENDIX F - Radiated Spurious Emissions

References					
Normative Reference Standard FCC CFR 47 §2.1053, §95.635, §15B: RSS-236, 5.4, RSS-GEN					
Procedure Reference	ANSI/TIA/EIA-382-A, ANSI C63.4				

Limits	
FCC §95.635 RSS-236, 5.4	At least $53 + 10 \log_{10}(T)$ dB on any frequency removed from the center, 60 dB twice removed from fundamental.

Environmental Conditions				
Temperature	25 +/- 5 °C			
Humidity	40 +/- 10 %			
Barometric Pressure	101 +/- 3 kPa			

Equipment List	Equipment List								
Asset number	Manufacturer	Model	Description	Last cal / Cal due					
00072	EMCO	2075	Mini-mast	CNR					
00073	EMCO	2080	Turn Table	CNR					
00071	EMCO	2090	Multi-Device Controller	CNR					
00241	R&S	FSU40	Spectrum Analyzer	23 Apr 15 / 23 Apr 17					
00050	Chase	CBL-6111A	Bilog Antenna	25-Ap-2014 / 25-Ap-2016					
00054	EMCO	3121C	Dipole Antenna	(first cal cycle) / 30-Ap-16					
00051	HP	8566B	Spectrum Analyzer RF Section	30-Ap-14 / 30-Ap-16					
00049	HP	85650A	Quasi-peak Adapter	30-Ap-14 / 30-Ap-16					
00047	HP	85685A	RF Preselector	30-Ap-14 / 30-Ap-16					
00006	R&S	SMR 20	Signal Generator (10MHz-40GHz)	08-May-14 / 08-May-16					
00239	Mini-Ccts	ZFL-1000VH	Amplifier 10MHz-1GHz	Cal on use					
00110	Gigatronics	8652A	Power Meter	17-Feb-14 / 17-Feb-16					
00248	Gigatronics	80701A	Power Sensor	18-Feb-14 / 18-Feb-16					
00278	TILE	3.4.G.3	Equipment Control Software	n/a					

CNR = Calibration Not Required


Applicant:	plicant: Uniden America Corporation			AMWUT 513C-U		Model(s):	RKCB Classic	Uniden*
DUT Type:	UT Type: Mobile AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz		
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 35 of 43	



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site

ICC MRA	
T All - L	
Test Lab	
Certificate No.	
2470.01	

Measurement Equipment Setup								
Measurement Equipment	For the field strength measurements, the measurement equipment was connected as shown in F.6. A number of antennas were used to cover the applicable frequency range tested. The ranges in which each antenna was used are as follows. For the final substitutions, the DUT was replaced with the appropriate antenna and fed from a CW signal source sufficient to replicate the received field strength of the emission being investigated.							
Connections	Frequency Range		RX Antenna	TX Antenna				
	9kHz – 30MHz		6502 Loop Ant	n/a				
	30 MHz - 1GHz		Bilog	Dipole				
	For measuring the radiated field strength of emissions, the spectrum analyzer was set to the following settings:							
Measurement	Range	RBW	VBW	Detector				
Equipment	91	kHz	kHz					
Settings	9kHz – 30MHz	10	30	Peak				
	30 MHz - 1GHz	100	300	Peak				
	1 GHz - 18 GHz	1000	3000	Peak				

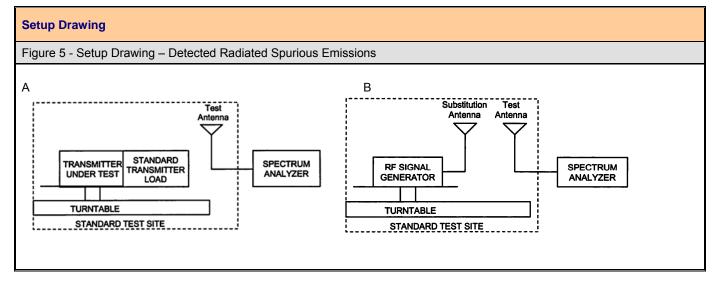

Notes

The spectrum was searched from the lowest frequency generated in the device to the 10th harmonic of the fundamental. All detected emissions have been reported.

The DUT was searched on all axis for worst case performance.


Worst case emissions are reported.

Applicant:	icant: Uniden America Corporation			AMWUT 513C-U1		Model(s):	RKCB Classic	Uniden*
DUT Type:	DUT Type: Mobile AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz		
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							Page 36 of 43



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2
	500 47 05D 00 005D		
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236. RSS GEN	Test Site Registration(s):	FCC Accredited Site

Test Lab Certificate No. 2470.01

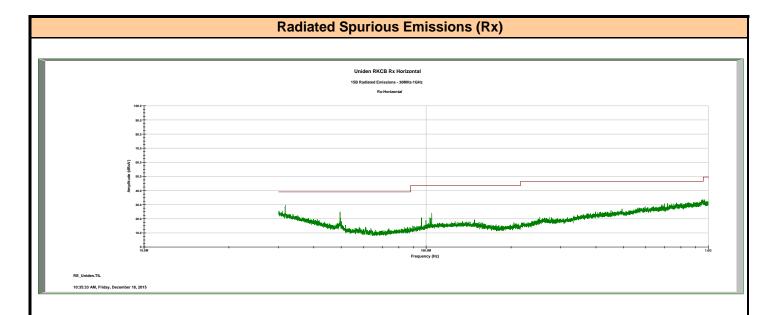

Result: Complies

*No emissions found, noise floor measurement. Emissions shown are ambient.

Notes

Worst-case emissions shown

The device was searched to the 10th harmonic of the fundamental (270 MHz)


Data presented may use a peak detector and compared to quasi-peak limit

All detected emissions have been reported

Applicant:	Uniden America Corporation			AMWUT414 513C-UT414		Model(s):	RKCB Classic	Uniden°
DUT Type:	Mobile A	AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							Page 37 of 43



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ILAC MRA
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No. 2470.01

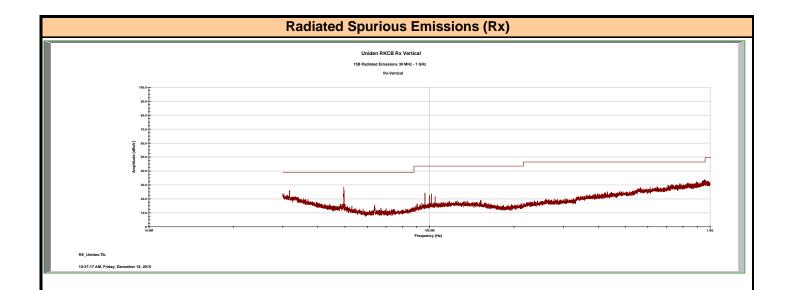

Result: Complies

*No emissions found, noise floor measurement. Emissions shown are ambient.

Notes

Worst-case emissions shown

The device was searched to the 10th harmonic of the fundamental (270 MHz)

Data presented may use a peak detector and compared to quasi-peak limit


All detected emissions have been reported

Applicant:	· Illniden America Cornoration			AMWUT 513C-UT		Model(s):	RKCB Classic	Uniden°
DUT Type:	OUT Type: Mobile AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz		
2015 Celltech L	2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							Page 38 of 43



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	STATE OF THE PARTY
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ilac-MRA
	FCC 47 CFR §2, §95D,			Test Lab
Rule Part(s) Applied:	RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Certificat



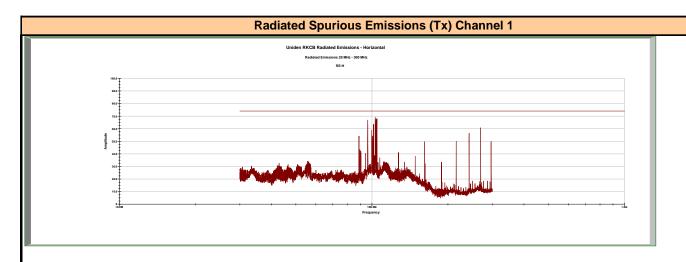

Margin [M] = Limit - CE

Corrected Emission [C_E] = P_{SG} - C_S where P_{SG} is the Output Power of the Signal Generator

Corrected Substitution Level $[C_S] = L_C + G_C$

Corrected Dipole Gain $[G_C] = G_I - G_D$ where G_I is the Ideal Dipole Gain (2.15) and G_D is the actual Dipole Gain

Frequency (MHz)	Antenna Polarization	Measured Emission Level @ 3m	Substitution Level [P _{SG}]	Cable Loss [L _C]	Dipole Antenna Gain [G _D]	Corrected Dipole Gain [G _C]	Substitution Level Correction [C _S]	Corrected Emission Level [C _E]	Limit	Margin [M]
53.94	Н	65.8	-29.2	0.15	0.9	1.3	(dB)	-30.6	-24.0	6.6
80.91	Н	65.1	-28.6	0.21	2.1	0.0	0.3	-28.9	-24.0	4.9
107.84	Н	61.2	-33.8	0.24	1.9	0.3	0.5	-34.3	-24.0	10.3
134.8	Н	55.8	-39.1	0.24	1.6	0.6	0.8	-39.9	-24.0	15.9
161.7	Н	60.1	-35.5	0.24	1.7	0.5	0.7	-36.2	-24.0	12.2
188.7	Н	62.5	-32.6	0.29	2.0	0.2	0.4	-33.0	-24.0	9.0
215.6	Н	57.8	-36.3	0.33	1.7	0.5	0.8	-37.1	-24.0	13.1
242.7	Н	45.0	-48.7	0.33	1.8	0.4	0.7	-49.4	-24.0	25.4
269.6	Н	50.6	-43.2	0.35	1.6	0.6	0.9	-44.1	-24.0	20.1

Result: Complies

Notes

Worst-case emissions shown

The device was searched to the 10th harmonic of the fundamental (270 MHz)

Data presented may use a peak detector and compared to quasi-peak limit

All detected emissions have been reported

Applicant:	Uniden /	America Corporation		AMWUT 513C-U1		Model(s):	RKCB Classic	Uniden*
DUT Type:	Mobile A	M CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 39 of 43			



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	



S	i	a	n	_	O	ff	

I attest to the accuracy of the data.	All measurements reported herein	n were performed by me and	d are correct to the best	ວf my knowledge and
belief. I assume full responsibility fo	or the completeness of these meas	surements.		

Child Voss	
Art Voss Sr. Engineer	



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site

Test Lab Certificate No. 2470.01


APPENDIX G - Frequency Stability

References				
Normative Reference Standard	FCC CFR 47 §2.1055, §95.625, RSS-GEN			
Procedure Reference / Description	The frequency stability shall be measured with variation of ambient temperature as follows: (1) From -30° to +50° centigrade.			

Limits	
FCC §95.625	The channel center must be maintained within a frequency tolerance of 0.005%.

Environmental Conditions			
Temperature	25 +/- 5 °C		
Humidity	40 +/- 10 %		
Barometric Pressure	101 +/- 3 kPa		


Equipment List					
Asset number	Manufacturer	Model	Description	Last cal / Cal due	
n/a	ESPEC	ECT-2	Heater/Refrigerator	n/a	
00003	HP	53181A	Frequency Counter	28-Ap-14 / 28-Ap-16	
n/a	HP	E3611A	DC Power Supply	Cal on use	
00234	VWR	61161-378	Temperature Humidity Monitor	New / 08-May-2016	

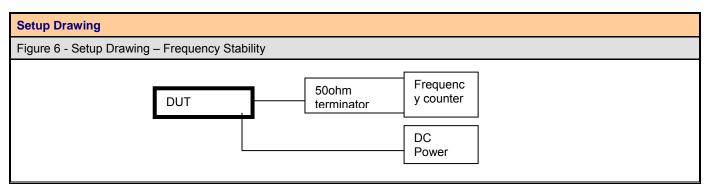

Applicant:	Uniden America Corporation		FCC ID: IC:	C ID: AMWUT414 513C-UT414		Model(s):	RKCB Classic	Uniden
DUT Type:	Mobile A	AM CB Radio Transceiver.			Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech L						ermission of Celltech Labs Inc.	Page 41 of 43	



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016	
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	HAC-MRA
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No.

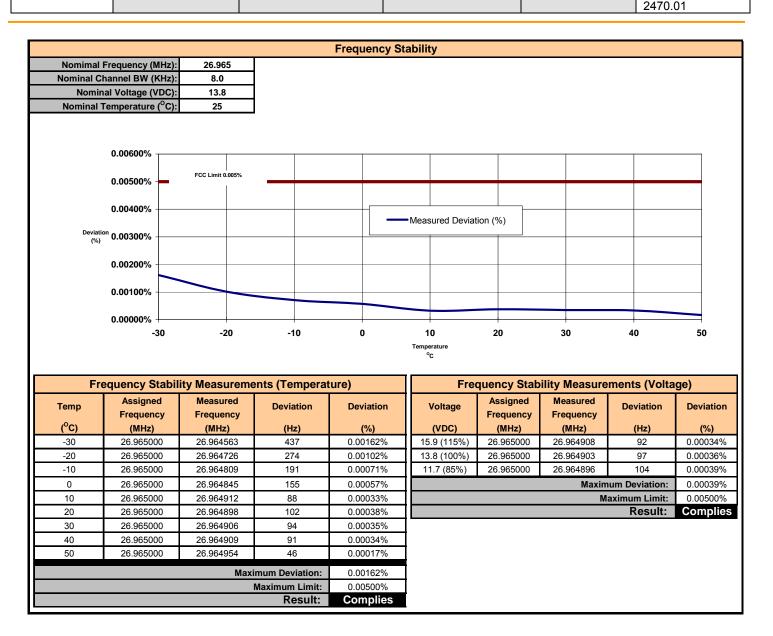

Sign-Off

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Sullivors

Art Voss Sr. Engineer

Applicant:	Uniden America Corporation			AMWUT414 513C-UT414		Model(s):	RKCB Classic	liniden'
DUT Type:	: Mobile AM CB Radio Transceiver.				Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							Page 42 of 43	



Test Report Serial No.:	113015AMW-T1338-E95D	Test Report Issue Date:	27 January 2016		
Measurement Date(s):	11 Nov – 17 Dec, 2015	Test Report Revision No.:	1.2	ILAC MRA	
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	Test Lab Certificate No. 2470.01	

END OF DOCUMENT

Applicant:	Uniden America Corporation			AMWUT414 513C-UT414		Model(s):	RKCB Classic	Uniden
DUT Type:	Mobile AM CB Radio Transceiver.				Frequenc	y Range:	26.965 - 27.405 MHz	
2015 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							Page 43 of 43	