



# FCC Test Report

Equipment : 11ac Dual Band Concurrent Wall-mount AP  
Brand Name : EDIMAX  
Model No. : EW-7679WAC / GAP-679WAC / WAP1750 /  
WAP1750H / WAP1750S / WAP1750L / WAP1750i  
FCC ID : NDD9576791401  
Standard : 47 CFR FCC Part 15.407  
Operating Band : 5150 MHz – 5250 MHz  
FCC Classification : NII  
Applicant : EDIMAX TECHNOLOGY CO., LTD.  
Manufacturer : No.3,Wu-Chuan 3rd Road,Wu-Ku Industrial Park,  
New Taipei City, Taiwan  
Function : ☐ Outdoor AP; ☒ Indoor AP; ☐ Fixed P2P AP  
☐ Portable Client

The product sample received on Apr. 11, 2014 and completely tested on Dec. 03, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Vic Hsiao / Supervisor



## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Accessories and Support Equipment.....	8
1.3	Testing Applied Standards .....	8
1.4	Testing Location Information.....	8
1.5	Measurement Uncertainty .....	9
<b>2</b>	<b>TEST CONFIGURATION OF EUT .....</b>	<b>10</b>
2.1	The Worst Case Modulation Configuration .....	10
2.2	The Worst Case Power Setting Parameter .....	10
2.3	The Worst Case Measurement Configuration.....	11
2.4	Test Setup Diagram .....	12
<b>3</b>	<b>TRANSMITTER TEST RESULT .....</b>	<b>14</b>
3.1	AC Power-line Conducted Emissions .....	14
3.2	Emission Bandwidth .....	17
3.3	RF Output Power.....	20
3.4	Peak Power Spectral Density.....	23
3.5	Transmitter Bandedge Emissions .....	26
3.6	Transmitter Unwanted Emissions.....	30
3.7	Frequency Stability.....	63
<b>4</b>	<b>TEST EQUIPMENT AND CALIBRATION DATA .....</b>	<b>65</b>
<b>APPENDIX A. TEST PHOTOS</b>		
<b>APPENDIX B. PHOTOGRAPHS OF EUT</b>		

## Summary of Test Result

Conformance Test Specifications			
Report Clause	Ref. Std. Clause	Description	Result
1.1.2	15.203	Antenna Requirement	Complied
3.1	15.207	AC Power-line Conducted Emissions	Complied
3.2	15.407(a)	Emission Bandwidth	Complied
3.3	15.407(a)	RF Output Power (Maximum Conducted Output Power)	Complied
3.4	15.407(a)	Peak Power Spectral Density	Complied
3.5	15.407(b)	Transmitter Bandedge Emissions	Complied
3.6	15.407(b)	Transmitter Unwanted Emissions	Complied
3.7	15.407(g)	Frequency Stability	Complied



**SPORTON INTERNATIONAL INC.**  
TEL : 886-3-327-3456  
FAX : 886-3-327-0973

# 1 General Description

## 1.1 Information

This equipment contains two kinds of exterior features. For more detail and other information, please refer to user manual.

### 1.1.1 RF General Information

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	RF Output Power (dBm)
5150-5250	a	5180-5240	36-48 [4]	1	25.37
5150-5250	n (HT20) ac (VHT20)	5180-5240	36-48 [4]	3 / 3	27.17 / 27.06
5150-5250	n (HT40) ac (VHT40)	5190-5230	38-46 [2]	3 / 3	27.41 / 28.46
5150-5250	ac (VHT80)	5210	42 [1]	3	18.28
Note 1: RF output power specifies that Maximum Conducted Output Power. Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation. Note 3: 802.11ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.					

**1.1.2 Antenna Information**

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information				
Port No.	Ant. Cat.	Ant. Type	Model No.	Gain (dBi)
1	External	DIPOLE	98610PRSX002	2.58
2				2.58
3				2.58
Remark: 11a only include 1TX and Port1 for emission. IEEE 802.11 n/ac have the CDD function.				

**1.1.3 Type of EUT**

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input checked="" type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

**1.1.4 Test Signal Duty Cycle**

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/> Operated normally mode for worst duty cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 100% - IEEE 802.11a	0.00
<input checked="" type="checkbox"/> 100% - IEEE 802.11n (HT20)	0.00
<input checked="" type="checkbox"/> 100% - IEEE 802.11n (HT40)	0.00
<input checked="" type="checkbox"/> 100% - IEEE 802.11ac (VHT20)	0.00
<input checked="" type="checkbox"/> 100% - IEEE 802.11ac (VHT40)	0.00
<input checked="" type="checkbox"/> 100% - IEEE 802.11ac (VHT80)	0.00

**1.1.5 EUT Operational Condition**

<b>Supply Voltage</b>	<input checked="" type="checkbox"/> AC mains	<input type="checkbox"/> DC	<input type="checkbox"/> System
<b>Type of DC Source</b>	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External DC from PoE	<input checked="" type="checkbox"/> External DC adapter

## 1.2 Accessories and Support Equipment

Accessories				
AC Adapter 1	Brand Name	APD	Model Name	WA30B12
	Power Rating	I/P: 100-240Vac 0.8A ; O/P: 12V $\overline{\text{---}}$ 2.5A		
	Power cord	1.8m, non-shielded cable, w/o ferrite core		
AC Adapter 2	Brand Name	APD	Model Name	DA-48T12
	Power Rating	I/P: 100-240Vac 1.2A ; O/P: 12V $\overline{\text{---}}$ 4A		
	Power Cord	AC: 1.4m, non-shielded cable, w/o ferrite core DC: 1.5m, non-shielded cable, with one ferrite core		

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment - AC Conduction and RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5520	DoC
2	PoE	Acelink	PI-1000PT	DoC

## 1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC KDB 789033 D02 v01
- ◆ FCC KDB 644545 D03 v01
- ◆ FCC KDB 662911 v02r01
- ◆ FCC-14-30A1-UNII

## 1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test Condition		Test Site No.	Test Engineer	Test Environment
AC Conduction		CO04-HY	Zeus	24.4°C / 53%
RF Conducted		TH01-HY	Cain	22.8°C / 66%
Radiated Emission (Below 1GHz)		03CH03-HY	Allen	26.3°C / 48%
Radiated Emission (Above 1GHz)		03CH03-HY	Daniel	24.8°C / 51%



## 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.3 dB
Emission bandwidth, 26dB bandwidth		±1.4 %
RF output power, conducted		±0.6 dB
Power density, conducted		±0.8 dB
Unwanted emissions, conducted	9 – 150 kHz	±0.4 dB
	0.15 – 30 MHz	±0.4 dB
	30 – 1000 MHz	±0.5 dB
	1 – 18 GHz	±0.7 dB
	18 – 40 GHz	±0.8 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.5 dB
	0.15 – 30 MHz	±2.3 dB
	30 – 1000 MHz	±2.6 dB
	1 – 18 GHz	±3.6 dB
	18 – 40 GHz	±3.8 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±3 %
DC and low frequency voltages		±3 %
Time		±1.4 %
Duty Cycle		±1.4 %

## 2 Test Configuration of EUT

### 2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS	Worst Data Rate / MCS
11a	1	6-54Mbps	6 Mbps
HT20	3	MCS 0-23	MCS 0
HT40	3	MCS 0-23	MCS 0
VHT20	3	MCS 0-8	MCS 0
VHT40	3	MCS 0-9	MCS 0
VHT80	3	MCS 0-9	MCS 0




### 2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (5150-5250MHz band)							
Test Software Version	DOS						
Modulation Mode	N <sub>TX</sub>	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		NCB: 80MHz
		5180	5200	5240	5190	5230	5210
11a	1	20	24	24	-	-	-
HT20	3	16	20.5	20.5	-	-	-
HT40	3	-	-	-	15	22	-
VHT20	3	19	20.5	20.5	-	-	-
VHT40	3	-	-	-	14.5	23	-
VHT80	3	-	-	-	-	-	13.5


## 2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Operating Mode</b>	Operating Mode Description
1	EUT with adapter 1 (Model:WA30B12)
2	EUT with adapter 2 (Model: DA-48T12)
3	EUT with PoE
Operating mode 1 was the worst case and it was recorded in this test report.	


The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	RF Output Power, Peak Power Spectral Density, Emission Bandwidth, Transmitter Conducted Unwanted Emissions, Transmitter Conducted Bandedge Emissions
<b>Test Condition</b>	Conducted measurement at transmit chains
<b>Modulation Mode</b>	11a, HT20, HT40, VHT20, VHT40, VHT80

The Worst Case Mode for Following Conformance Tests			
<b>Tests Item</b>	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
<b>Test Condition</b>	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
<b>User Position</b>	<input type="checkbox"/> EUT will be placed in fixed position.		
	<input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes. The worst plane is Z.		
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions.		
<b>Operating Mode &lt; 1GHz</b>	Operating Mode Description		
<b>Operating Mode &lt; 1GHz</b>	1. EUT with adapter 1 (Model:WA30B12)		
	2. EUT with adapter 2 (Model: DA-48T12)		
	3. EUT with PoE		
	For operating mode 1 was the worst case and it was recorded in this test report.		
<b>Operating Mode &gt; 1GHz</b>	1. EUT with adapter 2 (Model: DA-48T12)		
<b>Modulation Mode</b>	11a, HT20, HT40, VHT20, VHT40, VHT80		
<b>Orthogonal Planes of EUT</b>	<b>X Plane</b>	<b>Y Plane</b>	<b>Z Plane</b>
			


## 2.4 Test Setup Diagram

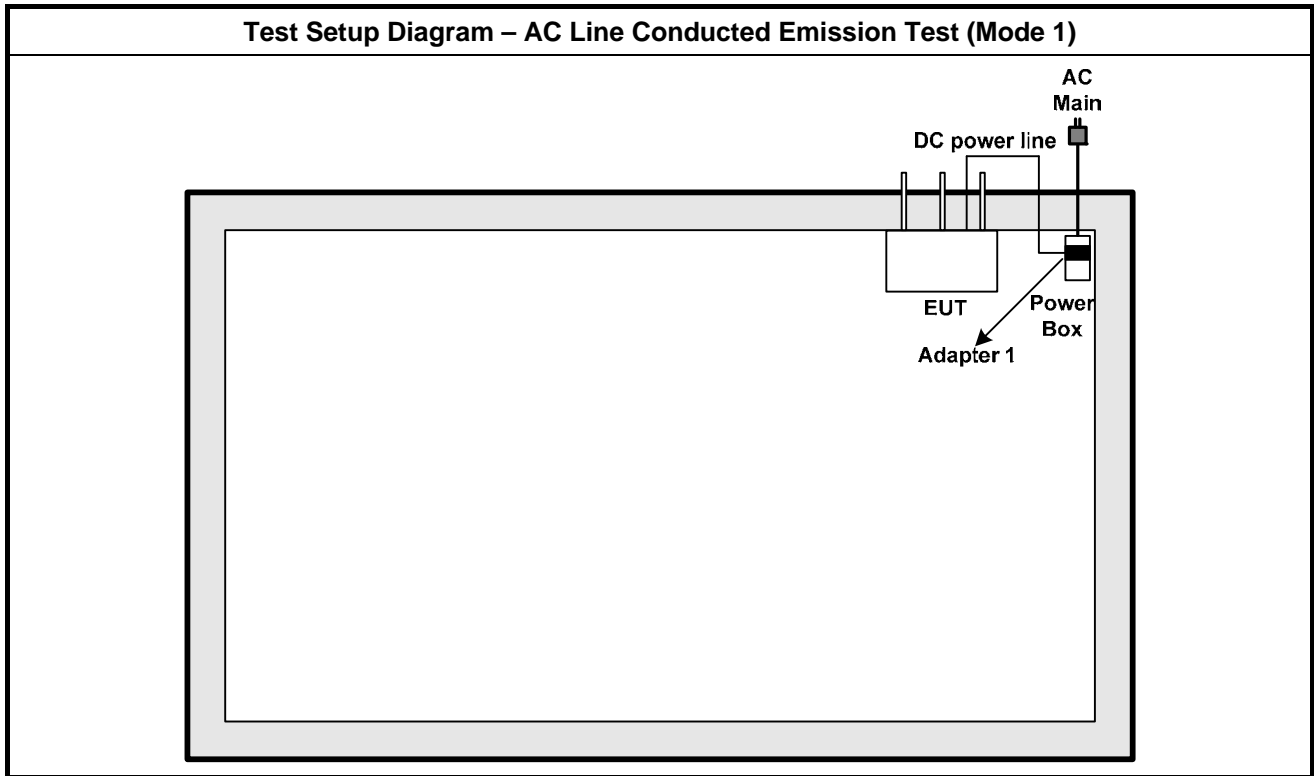

**Test Setup Diagram - Radiated Emission mode 1 (Below 1GHz)**

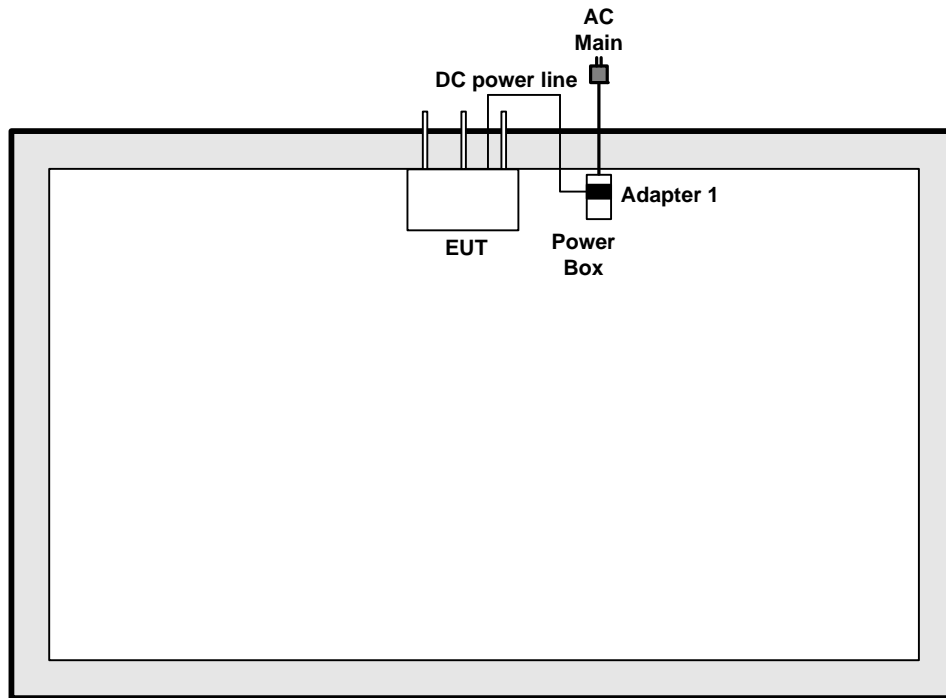

**Test Setup Diagram - Radiated Emission mode 2 (Above 1GHz)**

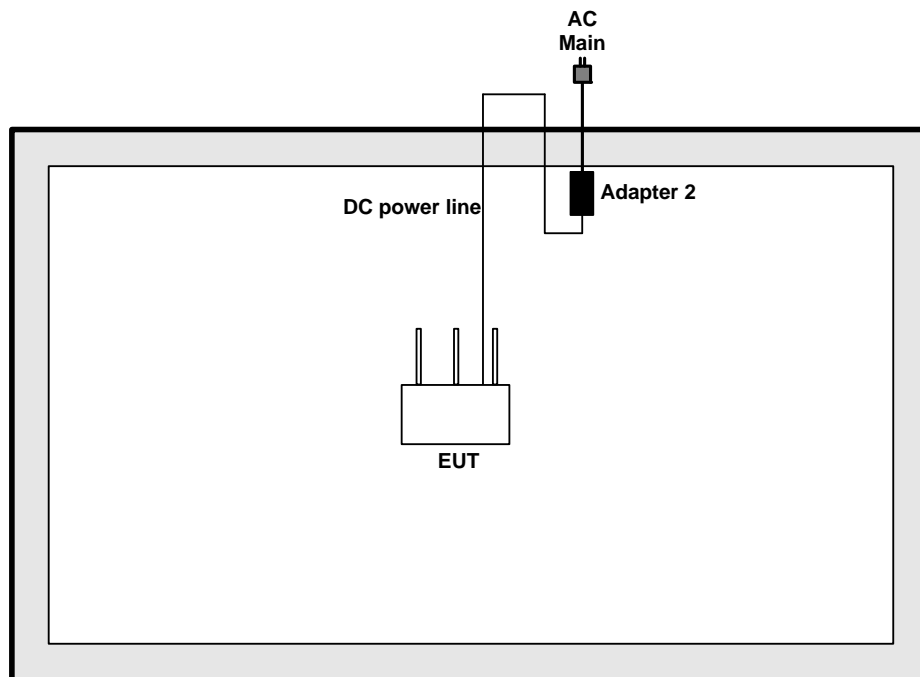

### 3 Transmitter Test Result

### 3.1 AC Power-line Conducted Emissions

### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


### 3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

### 3.1.4 Test Setup

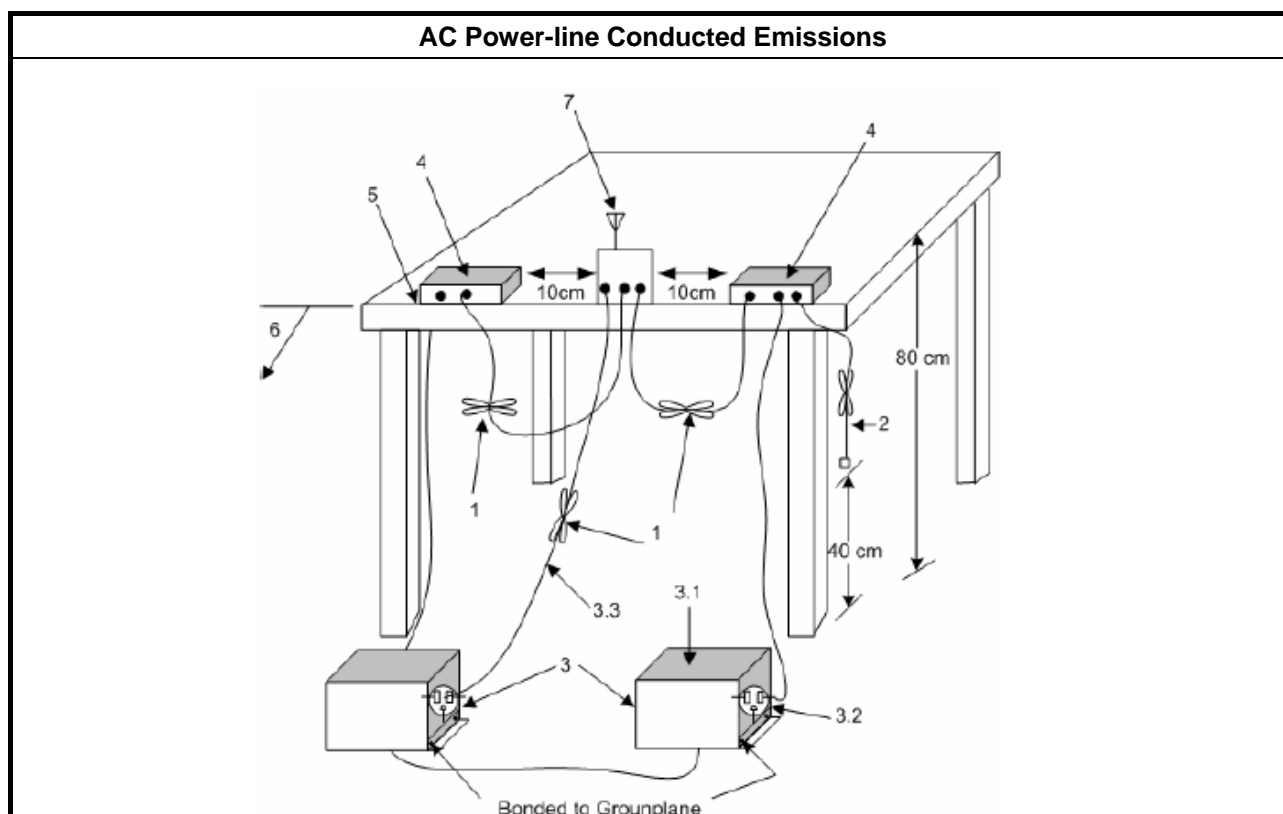


### 3.1.5 Test Result of AC Power-line Conducted Emissions

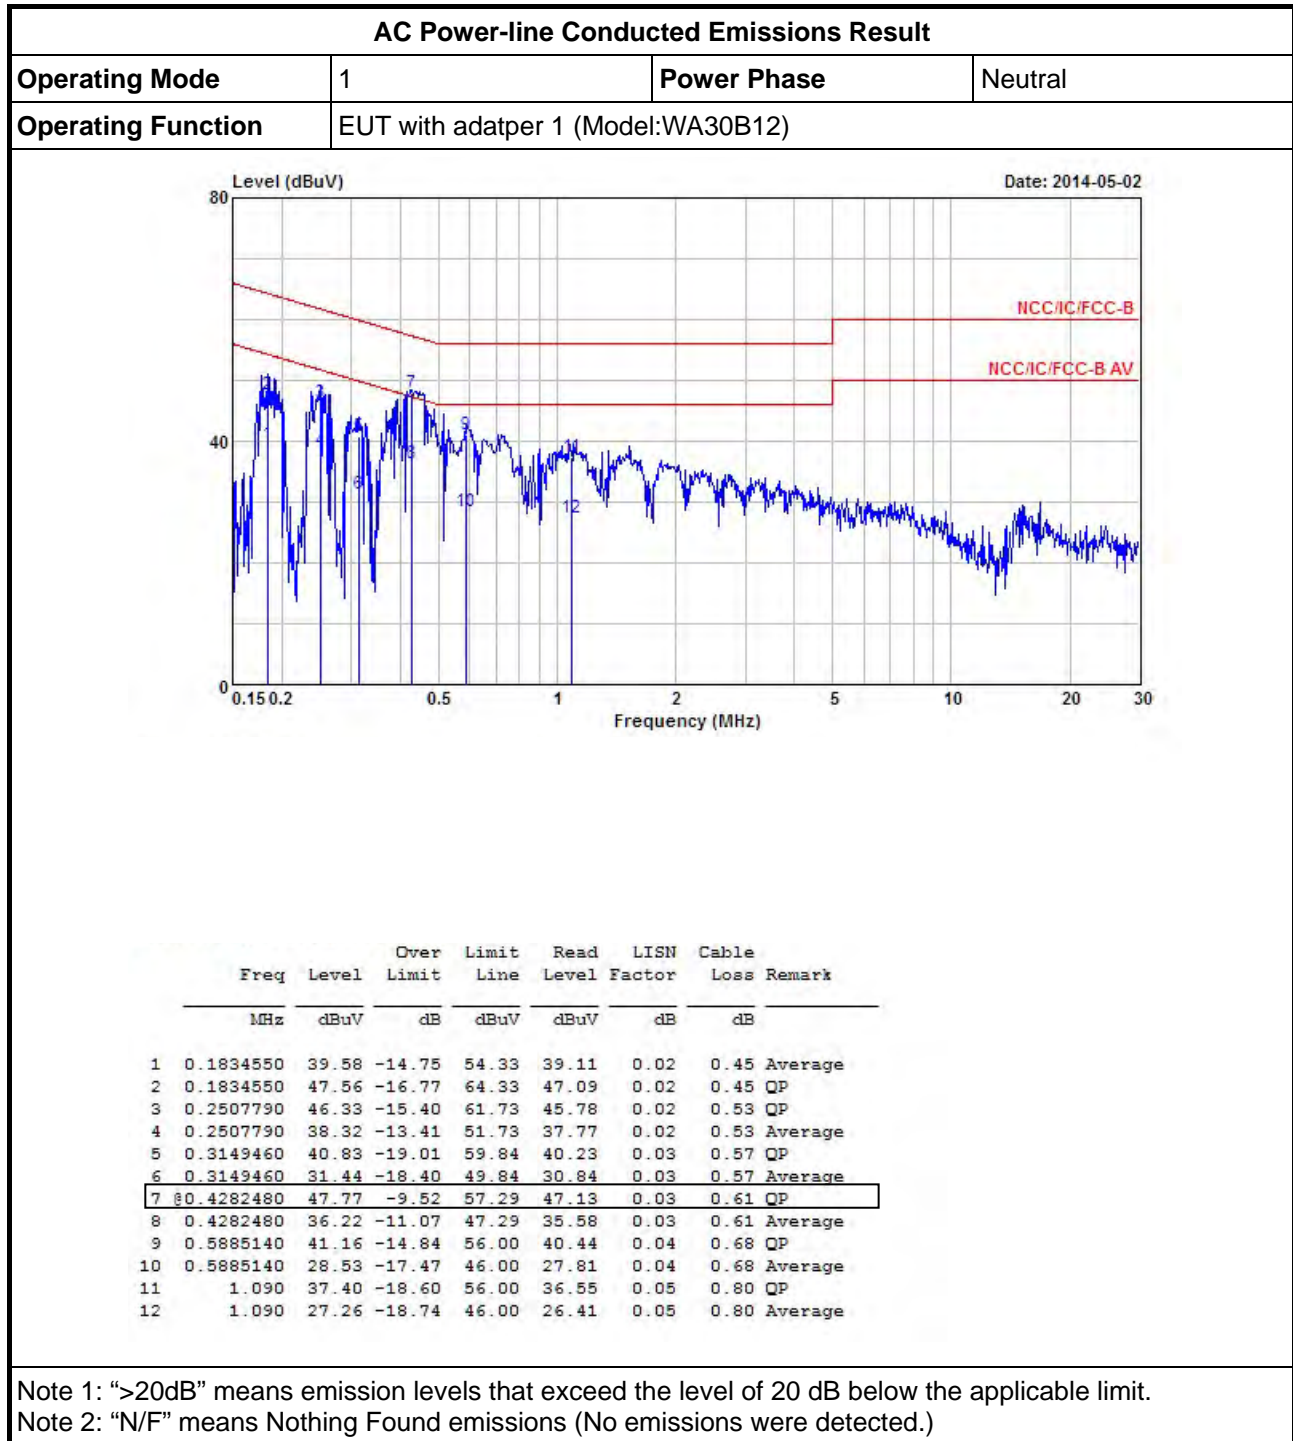

**AC Power-line Conducted Emissions Result**

Operating Mode	1	Power Phase	Line
Operating Function	EUT with adapter 1 (Model:WA30B12)		

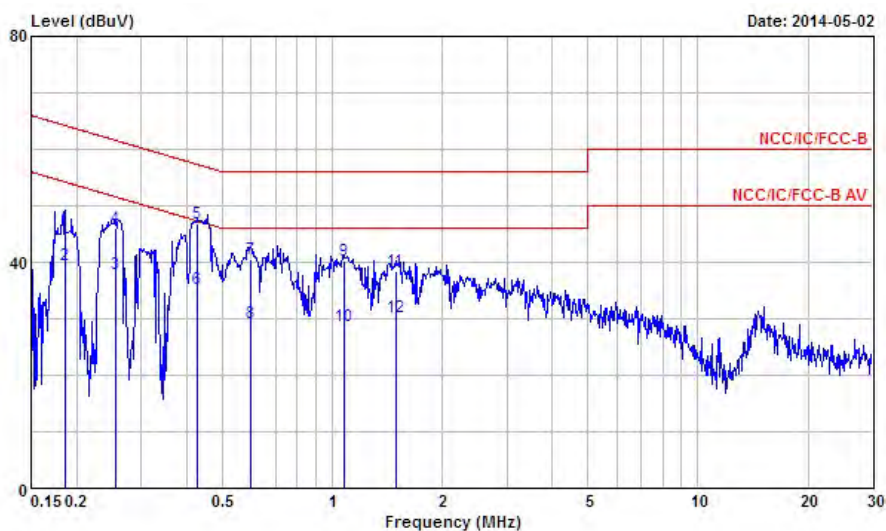

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1854100	45.94	-18.30	64.24	45.45	0.03	0.46	QP
2	0.1854100	39.54	-14.70	54.24	39.05	0.03	0.46	Average
3	0.2547970	37.85	-13.75	51.60	37.29	0.03	0.53	Average
4	0.2547970	45.95	-15.65	61.60	45.39	0.03	0.53	QP
5	0.4282480	46.86	-10.43	57.29	46.22	0.03	0.61	QP
6	0.4282480	35.37	-11.92	47.29	34.73	0.03	0.61	Average
7	0.5979430	40.57	-15.43	56.00	39.84	0.04	0.69	QP
8	0.5979430	29.16	-16.84	46.00	28.43	0.04	0.69	Average
9	1.080	40.15	-15.85	56.00	39.29	0.06	0.80	QP
10	1.080	28.76	-17.24	46.00	27.90	0.06	0.80	Average
11	1.490	38.41	-17.59	56.00	37.54	0.07	0.80	QP
12	1.490	30.27	-15.73	46.00	29.40	0.07	0.80	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)



## 3.2 Emission Bandwidth

### 3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, N/A
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, clause C for EBW and clause D for OBW measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input type="checkbox"/>	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain. The chain is port 1.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/>	Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input checked="" type="checkbox"/>	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.


### 3.2.4 Test Setup

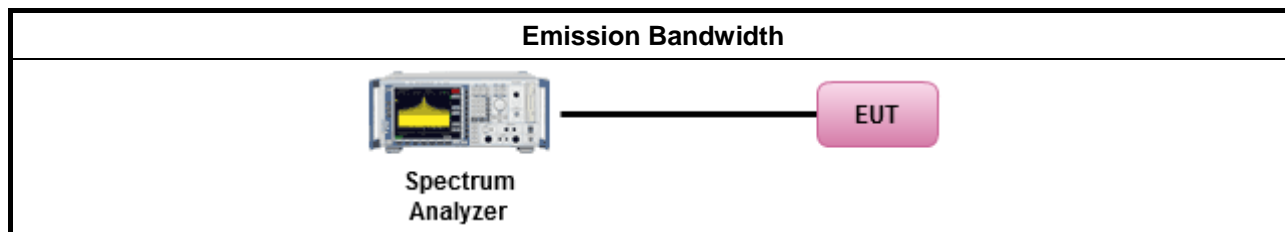

### 3.2.5 Test Result of Emission Bandwidth

UNII Emission Bandwidth Result (5150-5250MHz band)								
Condition			Emission Bandwidth (MHz)					
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	99% Bandwidth			26dB Bandwidth		
			Chain Port 1	Chain Port 2	Chain Port 3	Chain Port 1	Chain Port 2	Chain Port 3
11a	1	5180	16.41	-	-	18.92	-	-
11a	1	5200	16.64	-	-	26.92	-	-
11a	1	5240	16.99	-	-	23.37	-	-
HT20	3	5180	17.69	17.94	17.89	20.50	22.57	21.05
HT20	3	5200	17.66	17.94	17.96	20.55	21.35	22.25
HT20	3	5240	17.89	17.74	17.81	22.25	21.60	21.72
HT40	3	5190	36.34	37.10	36.46	40.72	44.00	40.24
HT40	3	5230	36.14	36.54	37.30	39.76	41.20	43.44
VHT20	3	5180	17.71	17.71	17.76	20.45	21.45	21.70
VHT20	3	5200	17.69	17.71	17.61	21.17	20.72	19.95
VHT20	3	5240	17.71	17.94	17.81	20.95	22.37	21.45
VHT40	3	5190	36.54	36.14	36.54	42.72	42.72	42.44
VHT40	3	5230	36.54	36.50	36.26	42.36	45.16	40.80
VHT80	3	5210	76.04	75.88	75.56	85.20	80.32	86.88
<b>Result</b>			<b>Complied</b>					

## 5150-5250MHz - Worst Emission 26Bandwidth Plots

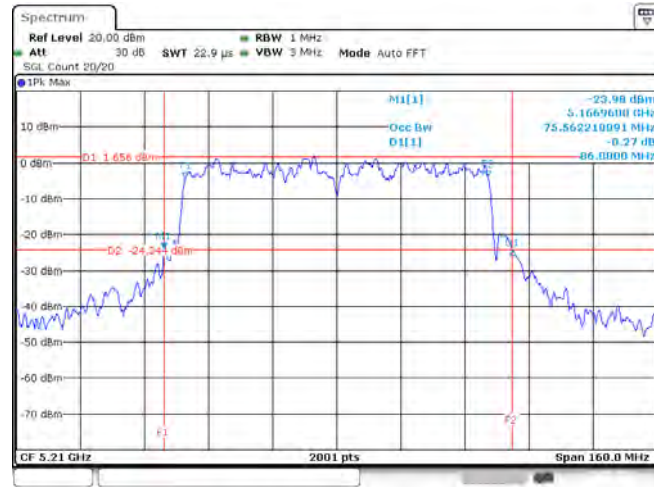

Date: 24.SEP.2014 06:08:52

### 3.3 RF Output Power

#### 3.3.1 RF Output Power Limit

Maximum Conducted Output Power Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:	
<input type="checkbox"/>	Outdoor AP: the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ . e.i.r.p. at any elevation angle above 30 degrees $\leq 125$ mW [21dBm]
<input checked="" type="checkbox"/>	Indoor AP: the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$
<input type="checkbox"/>	Point-to-point AP: the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$ .
<input type="checkbox"/>	Mobile or Portable Client: the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ .
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ .
<input type="checkbox"/>	For the 5.47-5.725 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ .
<input type="checkbox"/> For the 5.725-5.85 GHz band:	
<input type="checkbox"/>	Point-to-multipoint systems (P2M): the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ .
<input type="checkbox"/>	Point-to-point systems (P2P): the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 1 W.
$P_{Out}$ = maximum conducted output power in dBm, $G_{TX}$ = the maximum transmitting antenna directional gain in dBi.	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Maximum Conducted Output Power
	[duty cycle $\geq 98\%$ or external video / power trigger]
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, clause E Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle $< 98\%$ and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, clause E Method PM (using an RF average power meter).
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain. The chain is port 1.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input checked="" type="checkbox"/>	If multiple transmit chains, EIRP calculation could be following as methods: $P_{\text{total}} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$


### 3.3.4 Test Setup

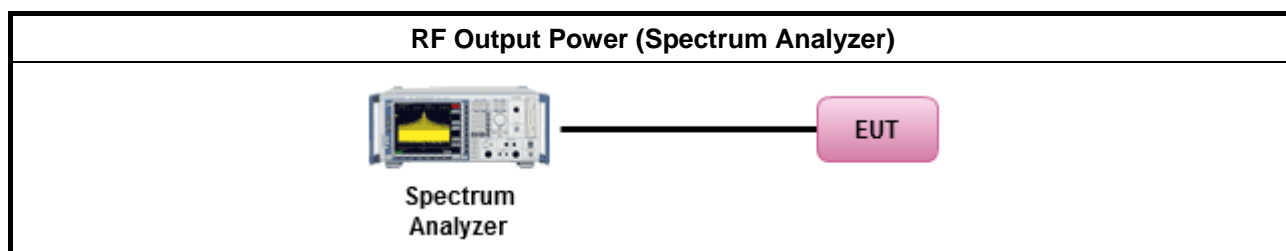

### 3.3.5 Test Result of Maximum Conducted Output Power

Maximum Conducted Output Power (5150-5250MHz band)								
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Output Power (dBm)				Antenna Gain (dBi)	Power Limit
			Chain Port 1	Chain Port 2	Chain Port 3	Sum Chain		
11a	1	5180	21.48	-	-	21.48	2.58	30.00
11a	1	5200	25.37	-	-	25.37	2.58	30.00
11a	1	5240	25.12	-	-	25.12	2.58	30.00
HT20	3	5180	16.77	17.31	16.54	21.66	2.58	30.00
HT20	3	5200	22.44	22.84	21.85	27.17	2.58	30.00
HT20	3	5240	21.97	22.48	21.92	26.90	2.58	30.00
HT40	3	5190	15.71	15.70	14.75	20.18	2.58	30.00
HT40	3	5230	22.42	23.03	22.45	27.41	2.58	30.00
VHT20	3	5180	20.61	21.01	19.91	25.30	2.58	30.00
VHT20	3	5200	22.44	22.61	21.78	27.06	2.58	30.00
VHT20	3	5240	21.95	22.41	21.94	26.88	2.58	30.00
VHT40	3	5190	15.17	15.14	14.24	19.64	2.58	30.00
VHT40	3	5230	23.52	24.00	23.54	28.46	2.58	30.00
VHT80	3	5210	13.42	13.95	13.11	18.28	2.58	30.00
<b>Result</b>			<b>Complied</b>					

**5150-5250MHz - Worst RF Output Power Plots**

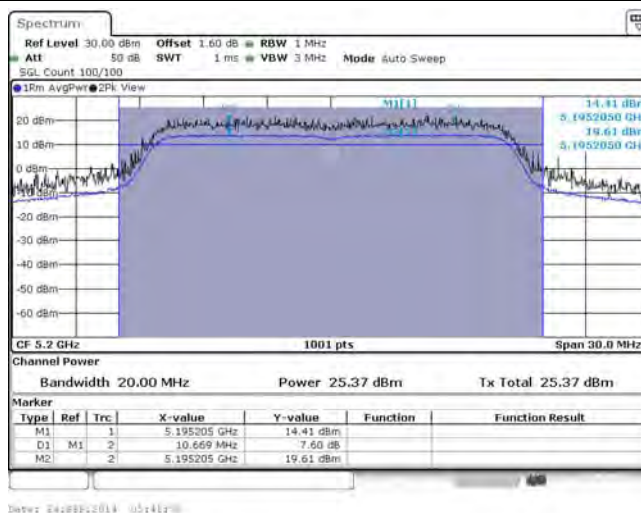

### 3.4 Peak Power Spectral Density

#### 3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:	
<input type="checkbox"/>	Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$ .
<input checked="" type="checkbox"/>	Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$ .
<input type="checkbox"/>	Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$ .
<input type="checkbox"/>	Mobile or Portable Client: the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .
<input type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .	
<input type="checkbox"/> For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .	
<input type="checkbox"/> For the 5.725-5.85 GHz band:	
<input type="checkbox"/>	Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) $\leq 30$ dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$ .
<input type="checkbox"/>	Point-to-point systems (P2P): the peak power spectral density (PPSD) $\leq 30$ dBm/500kHz.
<b>PPSD</b> = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz <b><math>G_{TX}</math></b> = the maximum transmitting antenna directional gain in dBi.	


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.4.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:
<input type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
	[duty cycle ≥ 98% or external video / power trigger]
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, clause E Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain. The chain is port 1.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input checked="" type="checkbox"/>	Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
<input checked="" type="checkbox"/>	If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$
<input type="checkbox"/>	Each individually PPSD plots refer as test report clause 3.3.5 with each individually PPSD plots.

### 3.4.4 Test Setup

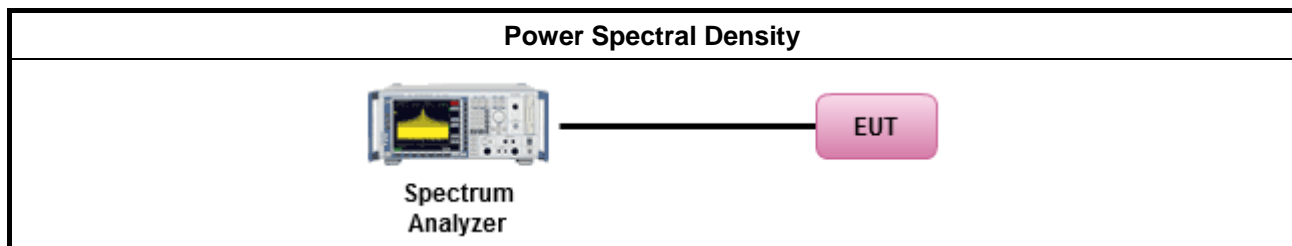




### 3.4.5 Test Result of Peak Power Spectral Density


Peak Power Spectral Density Result (5150-5250MHz band)					
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Peak Power Spectral Density (dBm)	PSD Limit	Antenna Gain (dBi)
11a	1	5180	10.54	17.00	2.58
11a	1	5200	14.41	17.00	2.58
11a	1	5240	14.16	17.00	2.58
HT20	3	5180	10.02	15.65	7.35
HT20	3	5200	15.52	15.65	7.35
HT20	3	5240	15.26	15.65	7.35
HT40	3	5190	5.60	15.65	7.35
HT40	3	5230	12.83	15.65	7.35
VHT20	3	5180	13.70	15.65	7.35
VHT20	3	5200	15.45	15.65	7.35
VHT20	3	5240	15.30	15.65	7.35
VHT40	3	5190	5.00	15.65	7.35
VHT40	3	5230	13.94	15.65	7.35
VHT80	3	5210	0.54	15.65	7.35
<b>Result</b>			<b>Complied</b>		

5150-5250MHz - Worst Power Spectral Density Plots

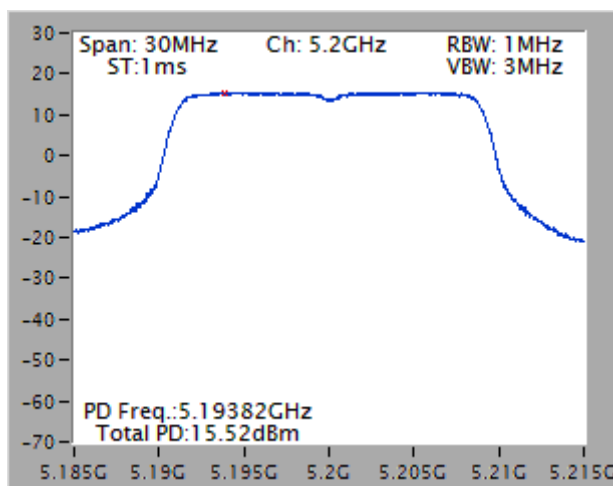

### 3.5 Transmitter Bandedge Emissions

#### 3.5.1 Transmitter Radiated Bandedge Emissions Limit

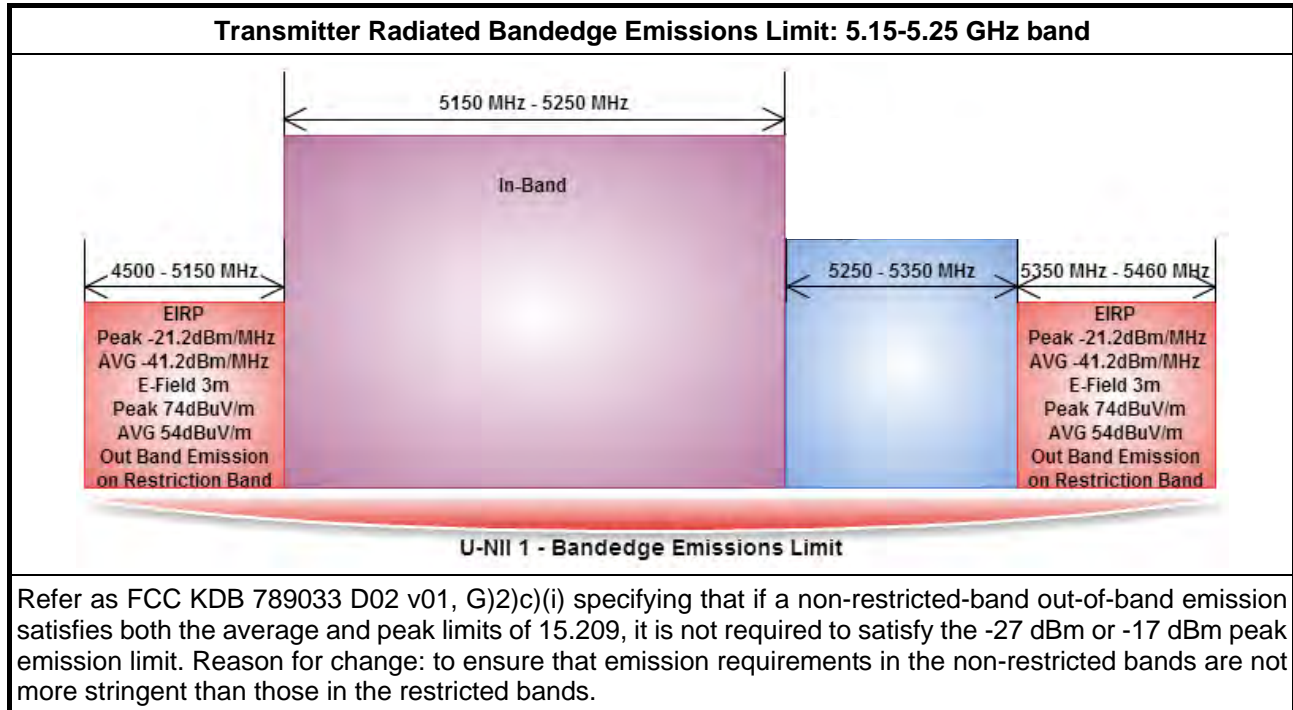


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input type="checkbox"/>	If EUT operate in adjacent contiguous bands, bandedge testing performed at the lowest frequency channel at lower-band and highest frequency channel at higher-band. Transmitter in-band emissions will consist of adjacent contiguous bands (e.g., IEEE 802.11ac VHT160 The lowest frequency channel at lower-band and highest frequency channel at higher-band in-band emissions will consist of two adjacent contiguous bands.)
<input type="checkbox"/>	<input type="checkbox"/> Operating in 5.15-5.25 GHz band (lower-band) and 5.25-5.35 GHz band (higher-band). <input type="checkbox"/> Operating in 5.47-5.725 GHz band (lower-band) and 5.725-5.85 GHz band (higher-band).
<input type="checkbox"/>	If EUT operate in individual non-contiguous bands, bandedge testing performed at the lowest frequency channel and highest frequency channel within lower-band and higher-band. (e.g., (e.g., IEEE 802.11ac VHT160)
<input type="checkbox"/>	<input type="checkbox"/> Operating in 5.25-5.35 GHz band (lower-band) and 5.47-5.725 GHz band (higher-band). <input type="checkbox"/> Operating in 5.15-5.25 GHz band (lower-band) and 5.725-5.85 GHz band (higher-band).
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, clause H)2) for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, clause H)1) for unwanted emissions into restricted bands.
<input type="checkbox"/>	<input type="checkbox"/> Refer as FCC KDB 789033 D02 v01, H)6) Method AD (Trace Averaging).
<input type="checkbox"/>	<input type="checkbox"/> Refer as FCC KDB 789033 D02 v01, H)6) Method VB (Reduced VBW).
<input type="checkbox"/>	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
<input type="checkbox"/>	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input type="checkbox"/>	<input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02 v01, clause H)5) measurement procedure peak limit.
<input type="checkbox"/>	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/>	<input type="checkbox"/> Refer as FCC KDB 789033 D02 v01, clause H)3)d) for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
<input type="checkbox"/>	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/>	<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement, refer as ANSI C63.10, clause 6.6. Test distance is 3m.
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). Measurements in the bandedge are typically made at a closer distance 3m, because the instrumentation noise floor is typically close to the radiated emission limit.

### 3.5.4 Test Setup

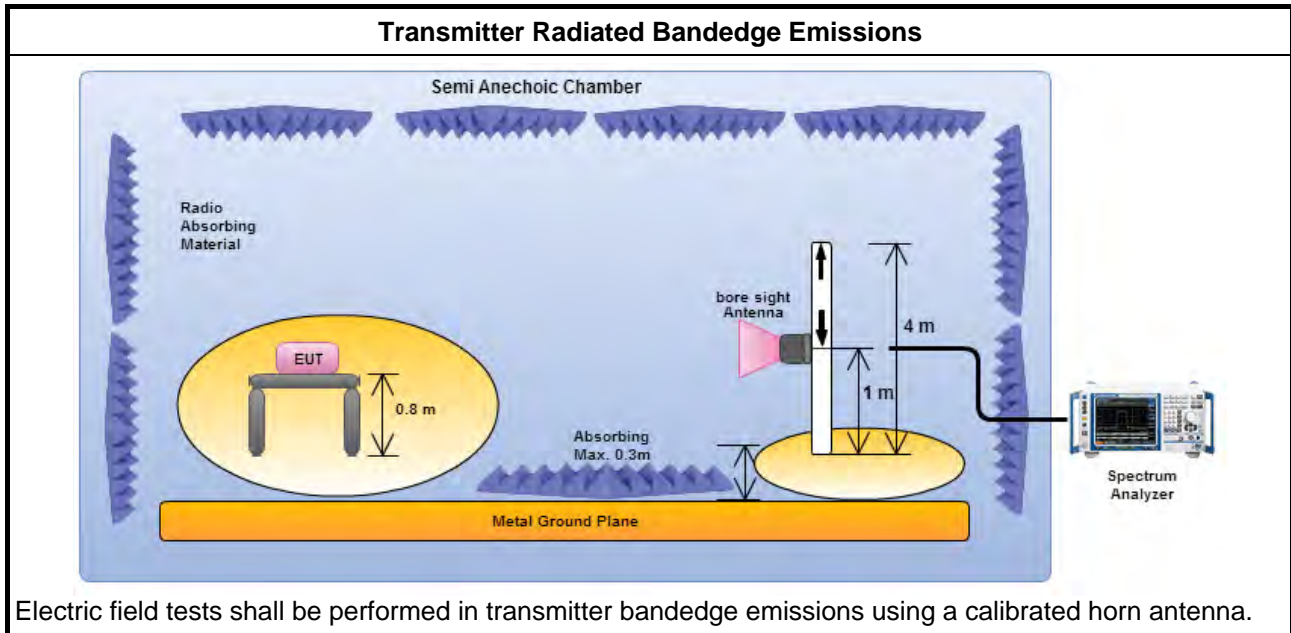

### 3.5.5 Transmitter Radiated Bandedge Emissions (with Antenna)

U-NII 5150-5250MHz Transmitter Radiated Bandedge (with Antenna)										
Modulation Mode	N <sub>Tx</sub>	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	1	5180	3	5149.40	67.49	74	5150.00	51.75	54	V
11a	1	5240	3	5384.10	62.53	74	5399.70	49.53	54	V
HT20	3	5180	3	5149.10	68.59	74	5150.00	52.00	54	V
HT20	3	5240	3	5363.40	61.22	74	5399.70	48.32	54	V
HT40	3	5190	3	5148.73	66.91	74	5150.00	52.64	54	V
HT40	3	5230	3	5367.00	60.80	74	5350.00	46.55	54	V
VHT20	3	5180	3	5145.50	68.16	74	5150.00	52.81	54	V
VHT20	3	5240	3	5395.80	62.07	74	5398.50	48.33	54	V
VHT40	3	5190	3	5146.86	67.19	74	5150.00	52.99	54	V
VHT40	3	5230	3	5352.60	61.85	74	5360.10	47.97	54	V
VHT80	3	5210	3	5148.90	66.25	74	5150.00	52.50	54	V
VHT80	3	5210	3	5386.20	60.36	74	5399.70	46.48	54	V
Note 1: Measurement worst emissions of receive antenna polarization.										

### 3.6 Transmitter Unwanted Emissions

#### 3.6.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

#### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


### 3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, clause G)2) for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, clause G)1) for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, G)6) Method AD (Trace Averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, G)6) Method VB (Reduced VBW).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02 v01, clause G)5) measurement procedure peak limit.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. For 1 GHz to 5 GHz, test distance is 3m; For 5 GHz to 40 GHz, test distance is 3m.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.




### 3.6.4 Test Setup

#### Transmitter Radiated Unwanted Emissions Below 1GHz

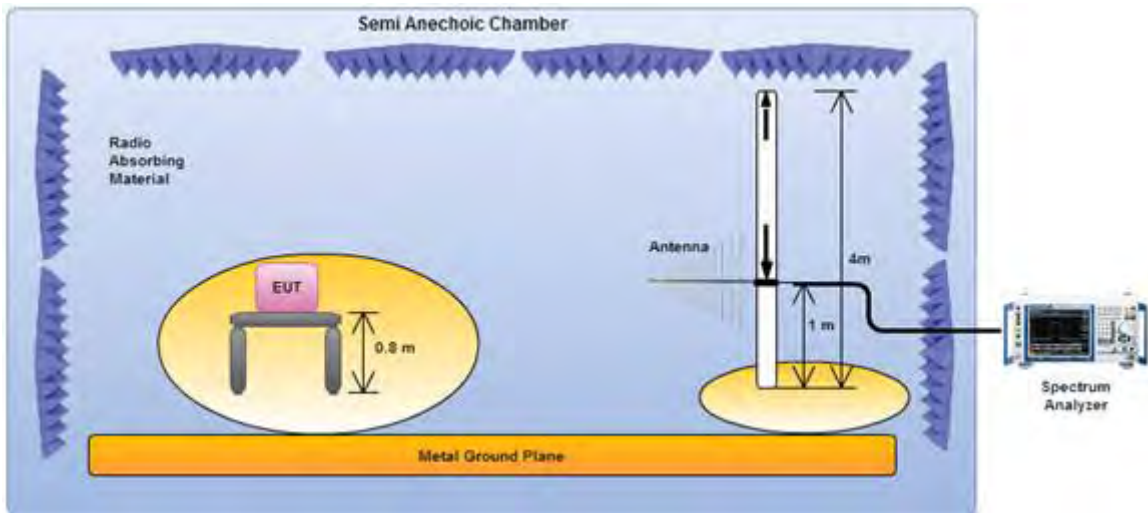

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.

#### Transmitter Radiated Unwanted Emissions Above 1GHz

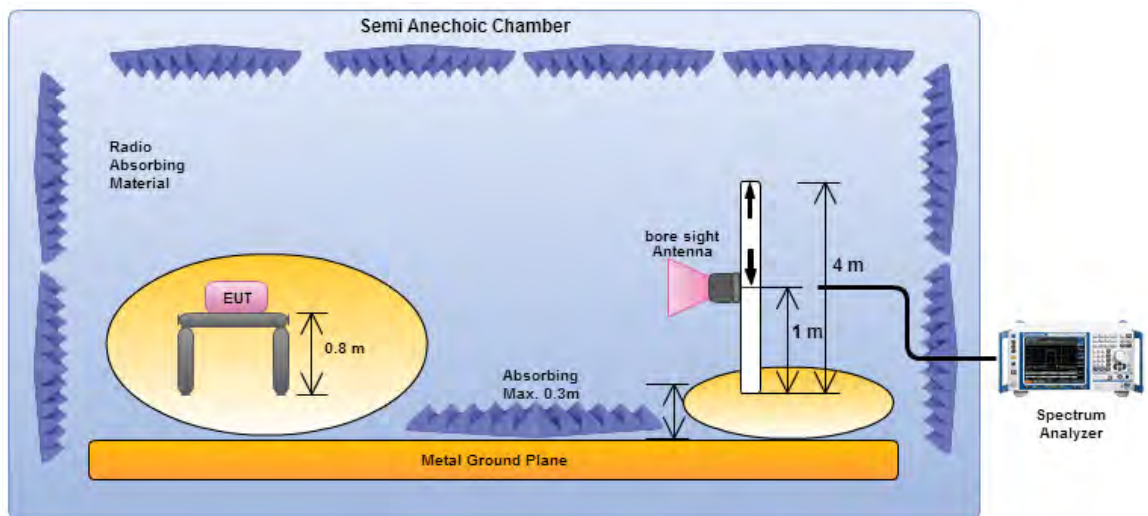

Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.

### 3.6.5 Transmitter Radiated Unwanted Emissions-with Antenna (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.




### 3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Transmitter Radiated Unwanted Emissions (Below 1GHz)																																																																																																		
Operating Mode		1				Polarization			V																																																																																									
Operating Function		EUT with adatper 1 (Model:WA30B12)																																																																																																
<div><div><div>Level (dBuV/m)</div><div></div><div>Date: 2014-04-13</div></div><div><table><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Antenna Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Remark</th><th>Ant Pos</th><th>Table Pos</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 @ 47.460</td><td>35.15</td><td>-4.85</td><td>40.00</td><td>52.28</td><td>9.35</td><td>1.10</td><td>27.58</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2 @ 141.550</td><td>29.80</td><td>-13.70</td><td>43.50</td><td>43.97</td><td>11.08</td><td>1.97</td><td>27.22</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3 @ 299.660</td><td>42.45</td><td>-3.55</td><td>46.00</td><td>52.97</td><td>13.23</td><td>2.90</td><td>26.65</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4 @ 599.390</td><td>31.09</td><td>-14.91</td><td>46.00</td><td>36.49</td><td>18.44</td><td>4.15</td><td>27.99</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5 @ 824.430</td><td>30.23</td><td>-15.77</td><td>46.00</td><td>32.98</td><td>20.07</td><td>4.92</td><td>27.74</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6 @ 971.870</td><td>30.91</td><td>-23.09</td><td>54.00</td><td>31.69</td><td>21.16</td><td>5.41</td><td>27.35</td><td>Peak</td><td>---</td><td>---</td></tr></table></div></div>											Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	1 @ 47.460	35.15	-4.85	40.00	52.28	9.35	1.10	27.58	Peak	---	---	2 @ 141.550	29.80	-13.70	43.50	43.97	11.08	1.97	27.22	Peak	---	---	3 @ 299.660	42.45	-3.55	46.00	52.97	13.23	2.90	26.65	Peak	---	---	4 @ 599.390	31.09	-14.91	46.00	36.49	18.44	4.15	27.99	Peak	---	---	5 @ 824.430	30.23	-15.77	46.00	32.98	20.07	4.92	27.74	Peak	---	---	6 @ 971.870	30.91	-23.09	54.00	31.69	21.16	5.41	27.35	Peak	---	---
Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos																																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg																																																																																								
1 @ 47.460	35.15	-4.85	40.00	52.28	9.35	1.10	27.58	Peak	---	---																																																																																								
2 @ 141.550	29.80	-13.70	43.50	43.97	11.08	1.97	27.22	Peak	---	---																																																																																								
3 @ 299.660	42.45	-3.55	46.00	52.97	13.23	2.90	26.65	Peak	---	---																																																																																								
4 @ 599.390	31.09	-14.91	46.00	36.49	18.44	4.15	27.99	Peak	---	---																																																																																								
5 @ 824.430	30.23	-15.77	46.00	32.98	20.07	4.92	27.74	Peak	---	---																																																																																								
6 @ 971.870	30.91	-23.09	54.00	31.69	21.16	5.41	27.35	Peak	---	---																																																																																								
<div>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</div> <div>Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)</div> <div>Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).</div> <div>Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.</div>																																																																																																		

**Transmitter Radiated Unwanted Emissions (Below 1GHz)**

<b>Operating Mode</b>	1	<b>Polarization</b>	H
<b>Operating Function</b>	EUT with adapter 1 (Model:WA30B12)		

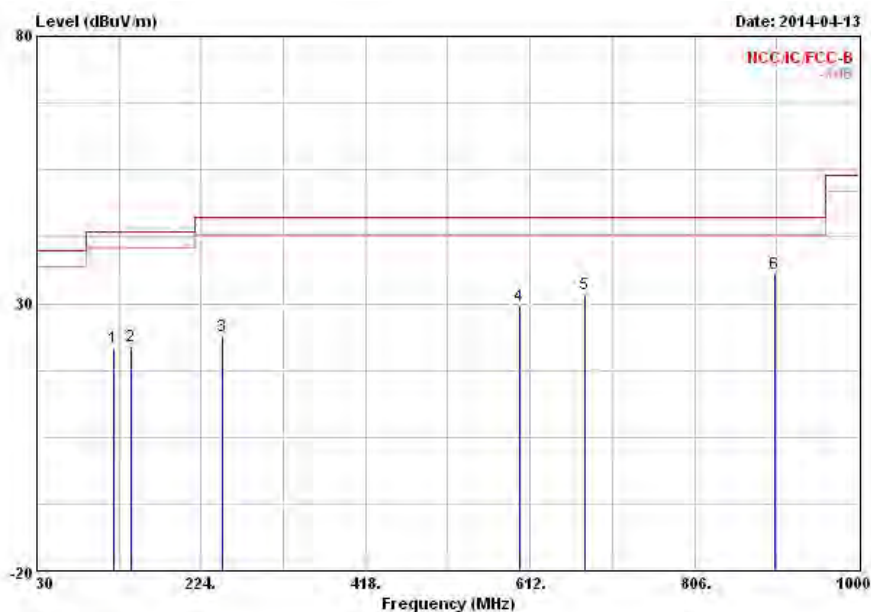


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	121.180	21.79	-21.71	43.50	34.73	12.56	1.80	27.30	Peak	---	---
2	141.550	22.09	-21.41	43.50	36.26	11.08	1.97	27.22	Peak	---	---
3	249.220	24.03	-21.97	46.00	35.62	12.64	2.60	26.83	Peak	---	---
4	599.390	29.61	-16.39	46.00	35.01	18.44	4.15	27.99	Peak	---	---
5	676.020	31.88	-14.12	46.00	36.69	18.68	4.46	27.95	Peak	---	---
6	901.060	35.52	-10.48	46.00	37.35	20.53	5.19	27.55	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

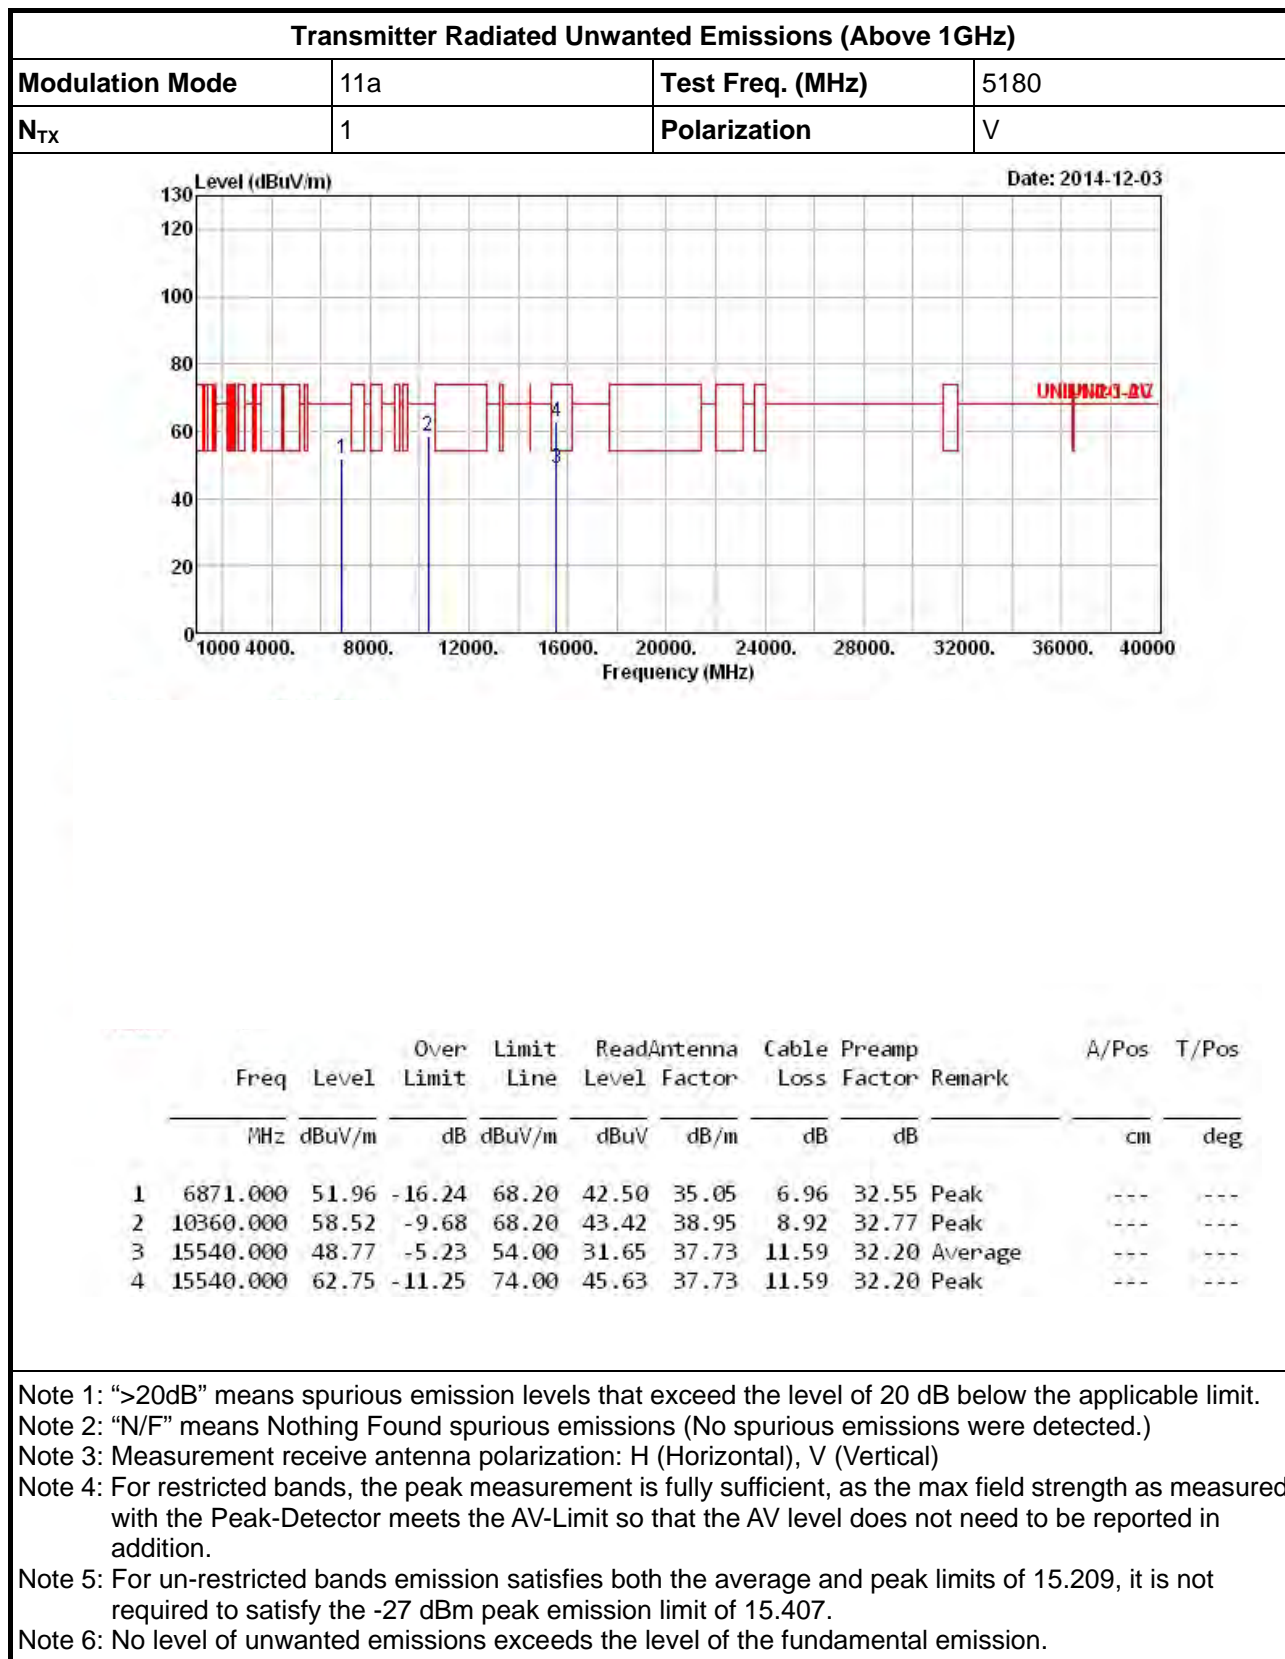**3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz**


**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	11a	<b>Test Freq. (MHz)</b>	5180
<b>N<sub>TX</sub></b>	1	<b>Polarization</b>	H

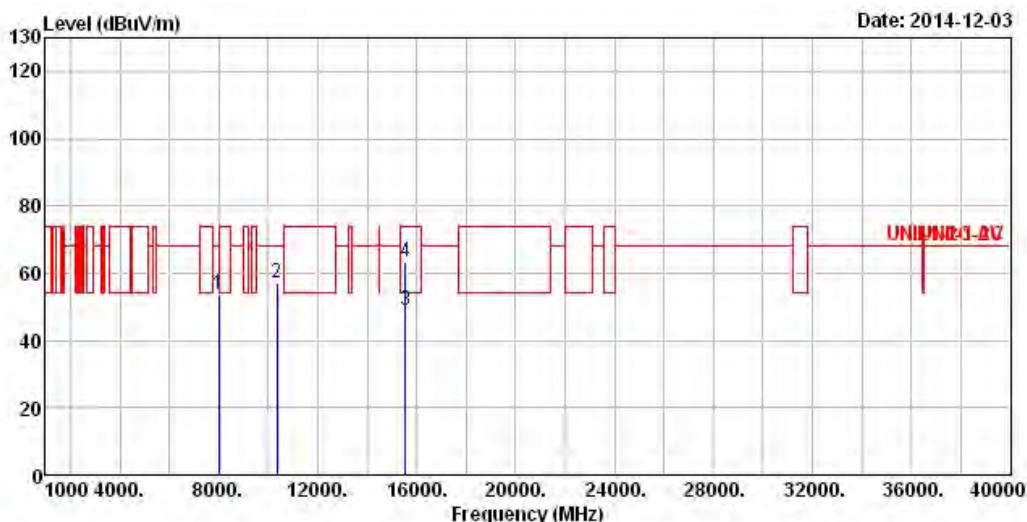

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7991.000	53.89	-14.31	68.20	41.43	36.98	8.28	32.80	Peak	---	---
2	10360.000	57.27	-10.93	68.20	42.17	38.95	8.92	32.77	Peak	---	---
3	15540.000	48.88	-5.12	54.00	31.76	37.73	11.59	32.20	Average	---	---
4	15540.000	63.49	-10.51	74.00	46.37	37.73	11.59	32.20	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	11a	<b>Test Freq. (MHz)</b>	5200
<b>N<sub>TX</sub></b>	1	<b>Polarization</b>	V

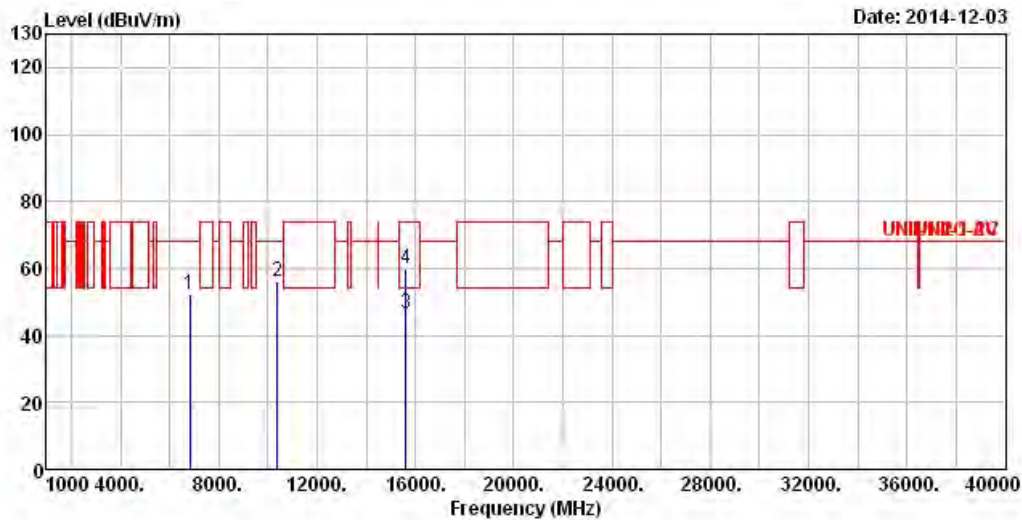

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6824.000	52.24	-15.96	68.20	42.90	34.99	6.89	32.54	Peak	---	---
2	10400.000	55.97	-12.23	68.20	40.82	38.94	8.94	32.73	Peak	---	---
3	15600.000	46.61	-7.39	54.00	29.65	37.59	11.59	32.22	Average	---	---
4	15600.000	59.84	-14.16	74.00	42.88	37.59	11.59	32.22	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	11a	<b>Test Freq. (MHz)</b>	5200
<b>N<sub>TX</sub></b>	1	<b>Polarization</b>	H

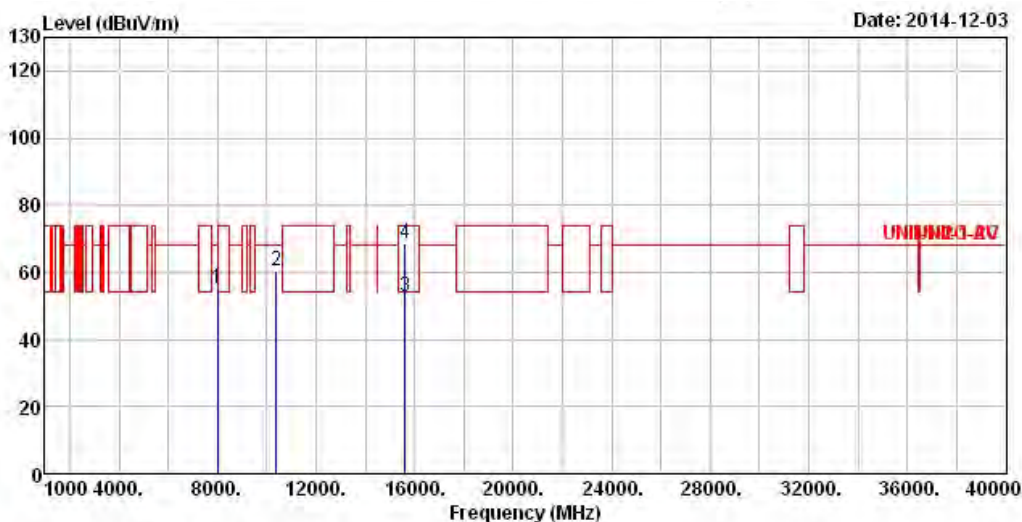

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8001.000	55.24	-12.96	68.20	42.78	37.00	8.26	32.80	Peak	---	---
2	10400.000	60.43	-7.77	68.20	45.28	38.94	8.94	32.73	Peak	---	---
3	15600.000	52.94	-1.06	54.00	35.98	37.59	11.59	32.22	Average	---	---
4	15600.000	68.55	-5.45	74.00	51.59	37.59	11.59	32.22	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	11a	<b>Test Freq. (MHz)</b>	5240
<b>N<sub>TX</sub></b>	1	<b>Polarization</b>	V

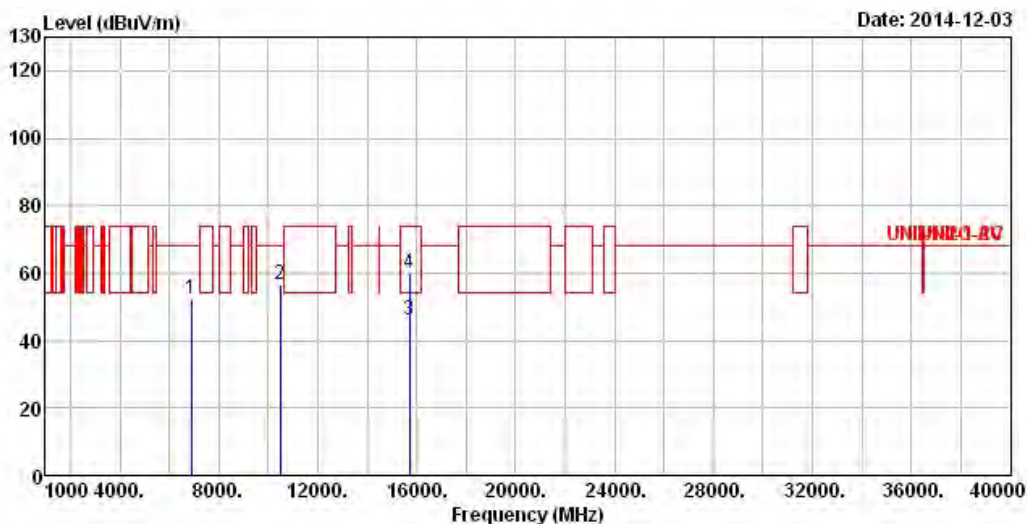

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	6891.000	52.21	-15.99	68.20	42.70	35.11	6.96	32.56	Peak	---
2	10480.000	56.81	-11.39	68.20	41.58	38.91	8.99	32.67	Peak	---
3	15720.000	45.91	-8.09	54.00	29.22	37.35	11.59	32.25	Average	---
4	15720.000	59.91	-14.09	74.00	43.22	37.35	11.59	32.25	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	11a	<b>Test Freq. (MHz)</b>	5240
<b>N<sub>TX</sub></b>	1	<b>Polarization</b>	H

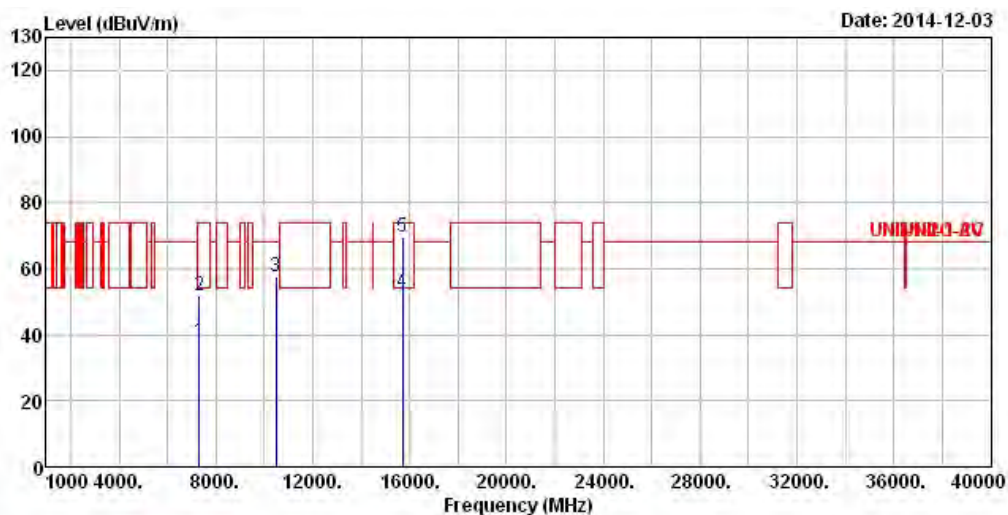

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7311.000	37.68	-16.32	54.00	27.02	36.04	7.28	32.66	Average	---	---
2	7311.000	52.01	-21.99	74.00	41.35	36.04	7.28	32.66	Peak	---	---
3	10480.000	57.54	-10.66	68.20	42.31	38.91	8.99	32.67	Peak	---	---
4	15720.000	52.67	-1.33	54.00	35.98	37.35	11.59	32.25	Average	---	---
5	15720.000	69.41	-4.59	74.00	52.72	37.35	11.59	32.25	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5180
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

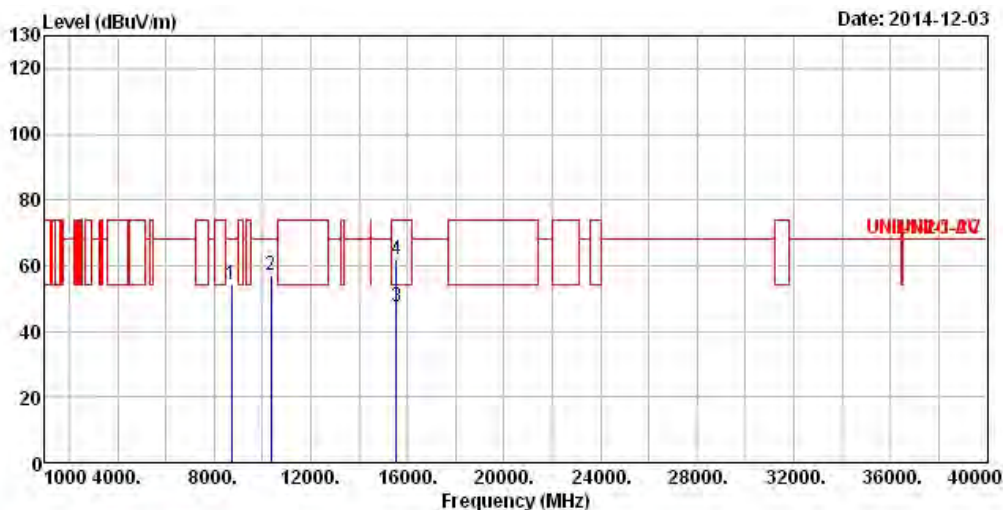

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8724.000	54.01	-14.19	68.20	40.91	38.10	7.89	32.89	Peak	---
2	10360.000	56.98	-11.22	68.20	41.88	38.95	8.92	32.77	Peak	---
3	15540.000	47.64	-6.36	54.00	30.52	37.73	11.59	32.20	Average	---
4	15540.000	61.71	-12.29	74.00	44.59	37.73	11.59	32.20	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5180
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

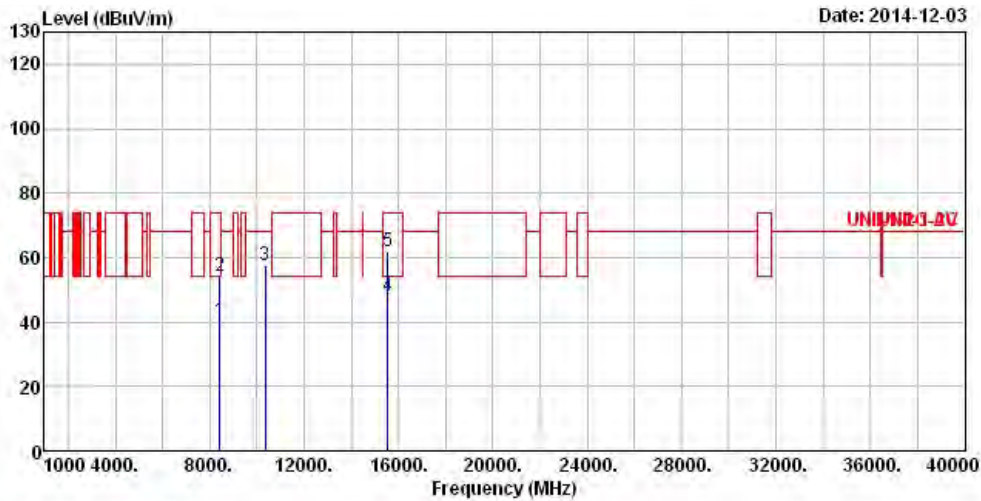

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8421.000	40.51	-13.49	54.00	27.32	37.95	8.05	32.81	Average	---	---
2	8421.000	54.29	-19.71	74.00	41.10	37.95	8.05	32.81	Peak	---	---
3	10360.000	57.59	-10.61	68.20	42.49	38.95	8.92	32.77	Peak	---	---
4	15540.000	47.77	-6.23	54.00	30.65	37.73	11.59	32.20	Average	---	---
5	15540.000	62.01	-11.99	74.00	44.89	37.73	11.59	32.20	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5200
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

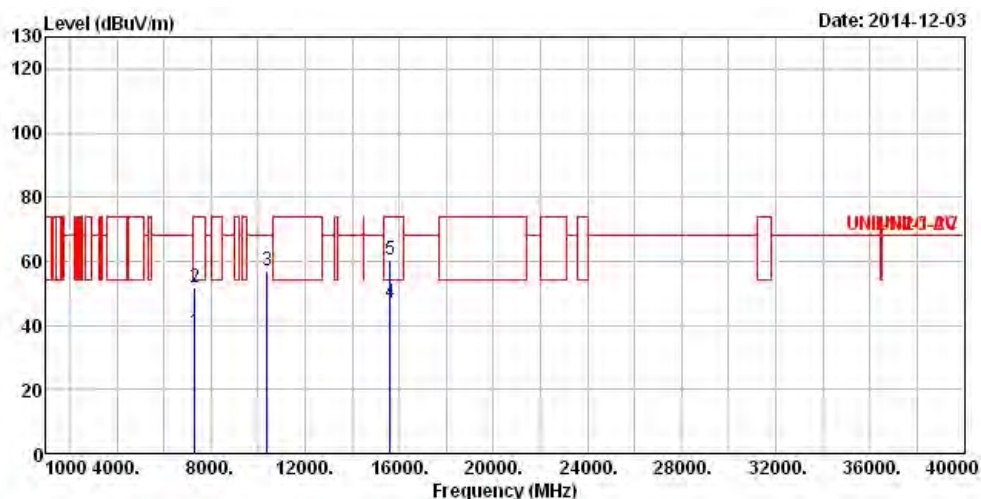

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7324.000	37.69	-16.31	54.00	26.99	36.09	7.28	32.67	Average	---	---
2	7324.000	52.01	-21.99	74.00	41.31	36.09	7.28	32.67	Peak	---	---
3	10400.000	57.06	-11.14	68.20	41.91	38.94	8.94	32.73	Peak	---	---
4	15600.000	46.97	-7.03	54.00	30.01	37.59	11.59	32.22	Average	---	---
5	15600.000	60.56	-13.44	74.00	43.60	37.59	11.59	32.22	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5200
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

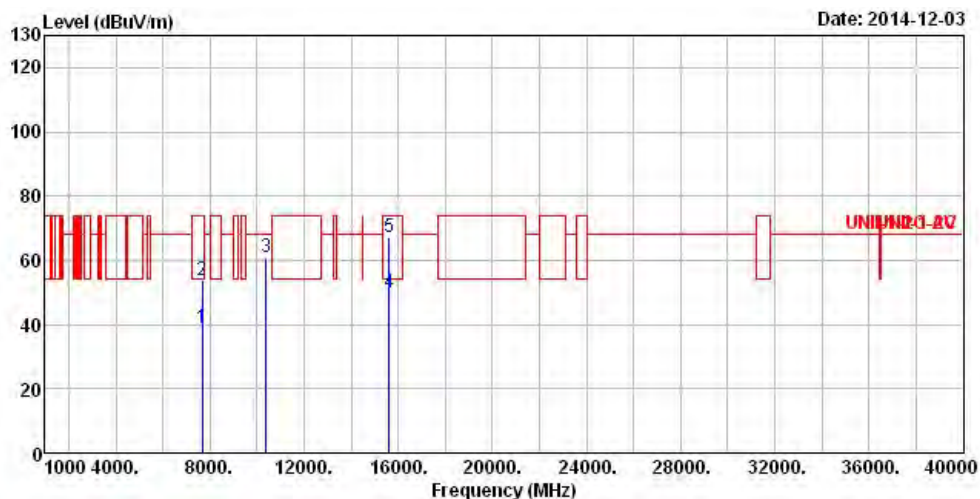

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7687.000	38.99	-15.01	54.00	27.35	36.68	7.71	32.75	Average	---	---
2	7687.000	53.49	-20.51	74.00	41.85	36.68	7.71	32.75	Peak	---	---
3	10400.000	60.91	-7.29	68.20	45.76	38.94	8.94	32.73	Peak	---	---
4	15600.000	49.72	-4.28	54.00	32.76	37.59	11.59	32.22	Average	---	---
5	15600.000	67.21	-6.79	74.00	50.25	37.59	11.59	32.22	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5240
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

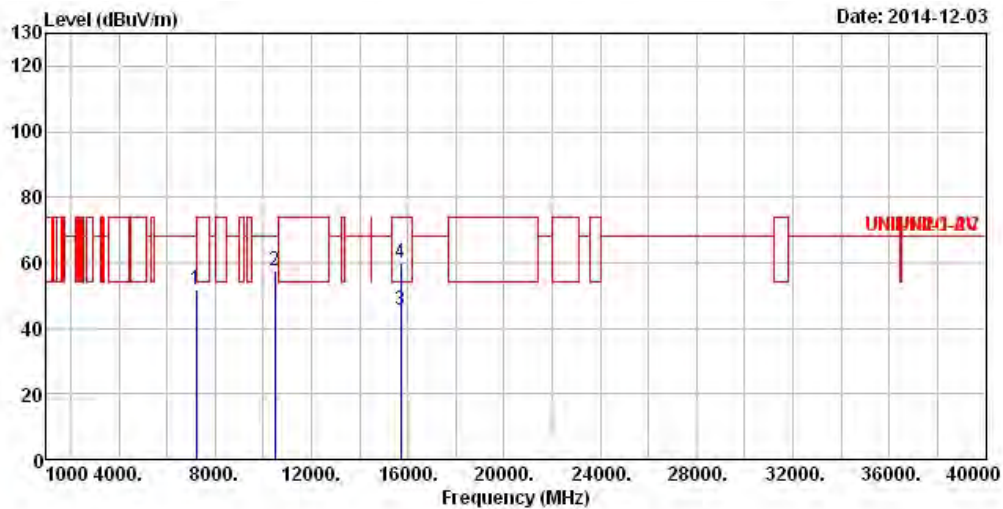

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7211.000	51.66	-16.54	68.20	41.30	35.80	7.20	32.64	Peak	---	---
2	10480.000	57.64	-10.56	68.20	42.41	38.91	8.99	32.67	Peak	---	---
3	15720.000	45.78	-8.22	54.00	29.09	37.35	11.59	32.25	Average	---	---
4	15720.000	59.74	-14.26	74.00	43.05	37.35	11.59	32.25	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5240
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

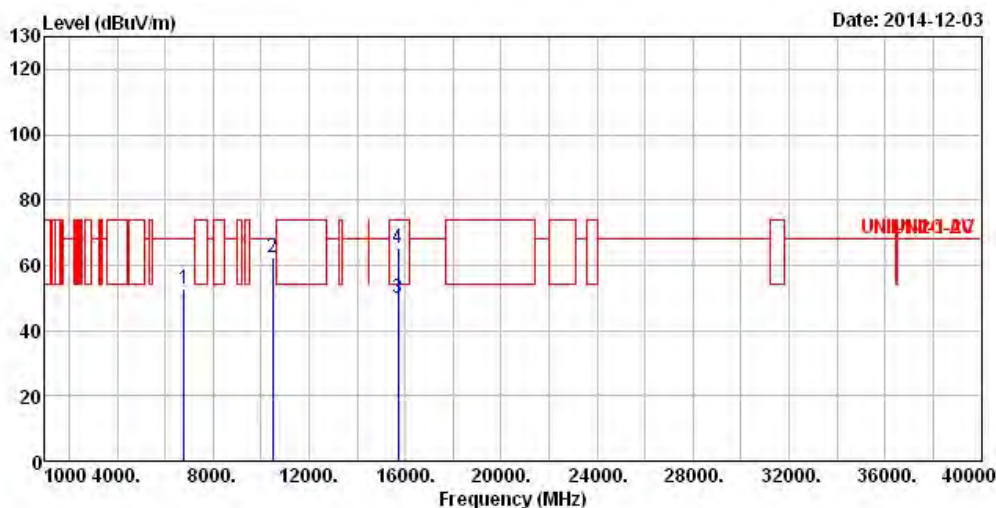

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6787.000	52.99	-15.21	68.20	43.77	34.90	6.86	32.54	Peak	---	---
2	10480.000	62.22	-5.98	68.20	46.99	38.91	8.99	32.67	Peak	---	---
3	15720.000	50.11	-3.89	54.00	33.42	37.35	11.59	32.25	Average	---	---
4	15720.000	65.21	-8.79	74.00	48.52	37.35	11.59	32.25	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT40	<b>Test Freq. (MHz)</b>	5190
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

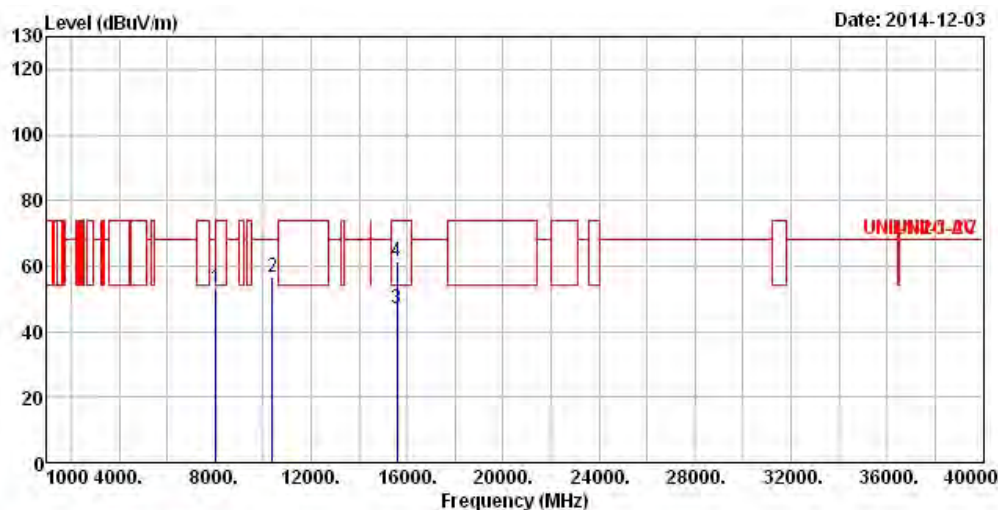

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8024.000	53.21	-14.99	68.20	40.71	37.04	8.26	32.80 Peak	---	---
2	10380.000	56.72	-11.48	68.20	41.58	38.95	8.94	32.75 Peak	---	---
3	15570.000	47.11	-6.89	54.00	30.06	37.66	11.59	32.20 Average	---	---
4	15570.000	61.57	-12.43	74.00	44.52	37.66	11.59	32.20 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT40	<b>Test Freq. (MHz)</b>	5190
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

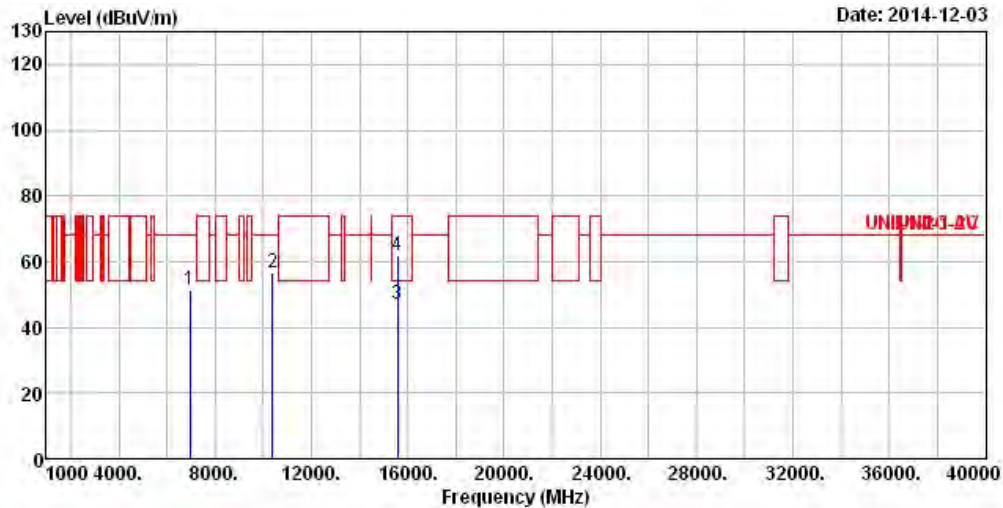

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	6941.000	51.21	-16.99	68.20	41.61	35.18	6.99	32.57	Peak	---
2	10380.000	56.79	-11.41	68.20	41.65	38.95	8.94	32.75	Peak	---
3	15570.000	47.11	-6.89	54.00	30.06	37.66	11.59	32.20	Average	---
4	15570.000	61.77	-12.23	74.00	44.72	37.66	11.59	32.20	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT40	<b>Test Freq. (MHz)</b>	5230
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

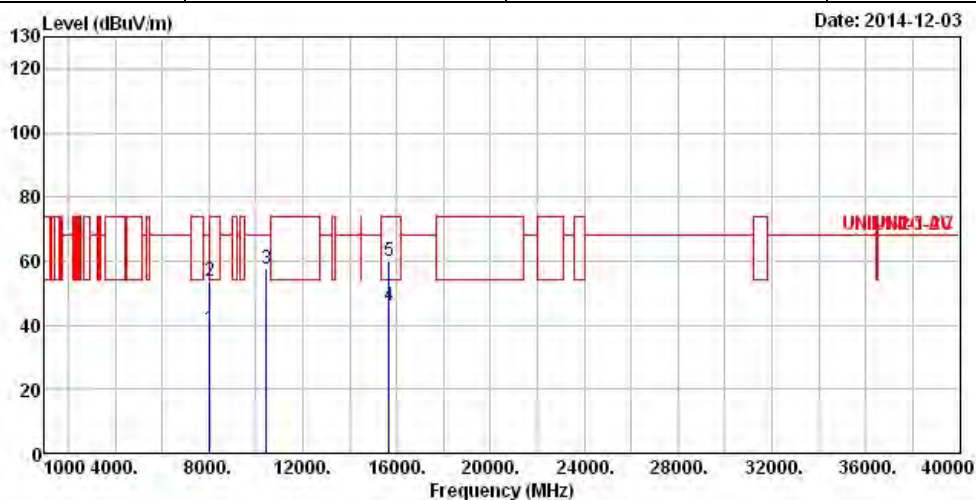

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8041.000	38.91	-15.09	54.00	26.39	37.08	8.24	32.80	Average	---	---
2	8041.000	53.78	-20.22	74.00	41.26	37.08	8.24	32.80	Peak	---	---
3	10460.000	57.51	-10.69	68.20	42.29	38.92	8.99	32.69	Peak	---	---
4	15690.000	46.21	-7.79	54.00	29.44	37.42	11.59	32.24	Average	---	---
5	15690.000	59.97	-14.03	74.00	43.20	37.42	11.59	32.24	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT40	<b>Test Freq. (MHz)</b>	5230
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

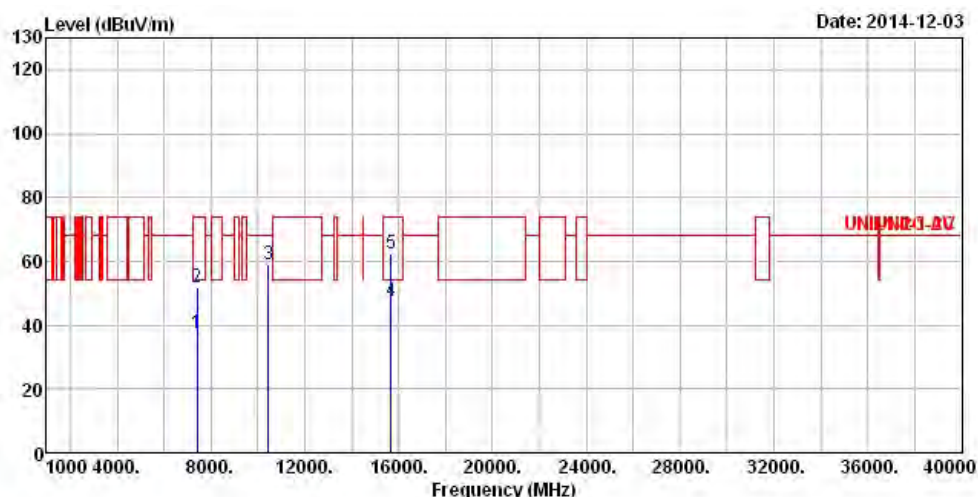

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7411.000	37.61	-16.39	54.00	26.67	36.29	7.34	32.69	Average	---	---
2	7411.000	52.01	-21.99	74.00	41.07	36.29	7.34	32.69	Peak	---	---
3	10460.000	58.99	-9.21	68.20	43.77	38.92	8.99	32.69	Peak	---	---
4	15690.000	47.56	-6.44	54.00	30.79	37.42	11.59	32.24	Average	---	---
5	15690.000	62.41	-11.59	74.00	45.64	37.42	11.59	32.24	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	VHT20	<b>Test Freq. (MHz)</b>	5180
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

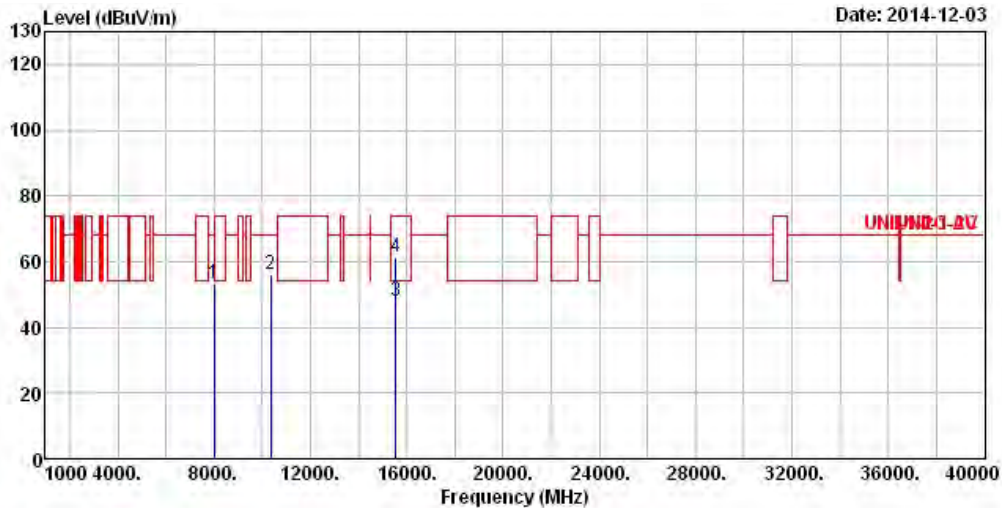

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8011.000	53.46	-14.74	68.20	41.00	37.00	8.26	32.80	Peak	---	---
2	10360.000	56.24	-11.96	68.20	41.14	38.95	8.92	32.77	Peak	---	---
3	15540.000	48.01	-5.99	54.00	30.89	37.73	11.59	32.20	Average	---	---
4	15540.000	61.24	-12.76	74.00	44.12	37.73	11.59	32.20	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	VHT20	<b>Test Freq. (MHz)</b>	5180
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

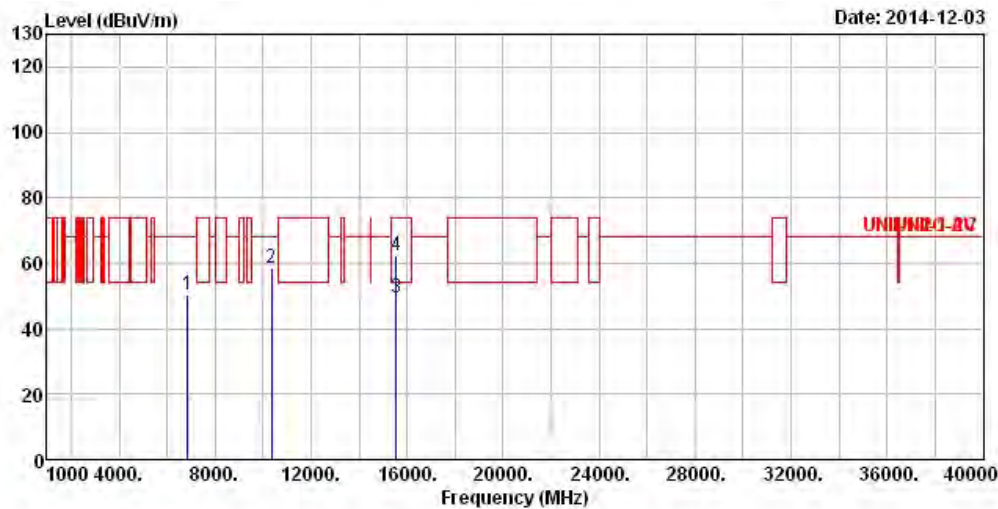

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6871.000	50.21	-17.99	68.20	40.75	35.05	6.96	32.55	Peak	---	---
2	10360.000	58.71	-9.49	68.20	43.61	38.95	8.92	32.77	Peak	---	---
3	15540.000	49.21	-4.79	54.00	32.09	37.73	11.59	32.20	Average	---	---
4	15540.000	62.21	-11.79	74.00	45.09	37.73	11.59	32.20	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	VHT20	<b>Test Freq. (MHz)</b>	5200
<b>N<sub>TX</sub></b>	1	<b>Polarization</b>	V

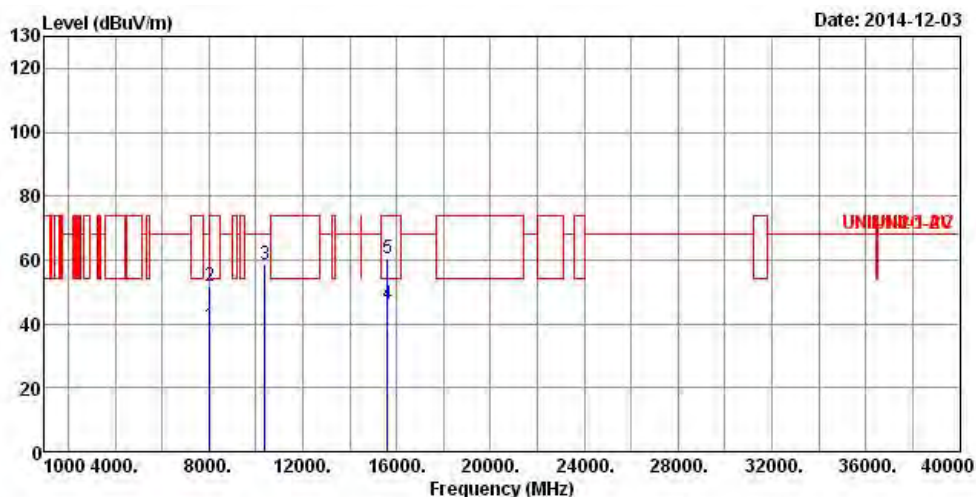

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8041.000	39.49	-14.51	54.00	26.97	37.08	8.24	32.80	Average	---	---
2	8041.000	52.01	-21.99	74.00	39.49	37.08	8.24	32.80	Peak	---	---
3	10400.000	58.74	-9.46	68.20	43.59	38.94	8.94	32.73	Peak	---	---
4	15600.000	46.21	-7.79	54.00	29.25	37.59	11.59	32.22	Average	---	---
5	15600.000	60.61	-13.39	74.00	43.65	37.59	11.59	32.22	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	VHT20	<b>Test Freq. (MHz)</b>	5200
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

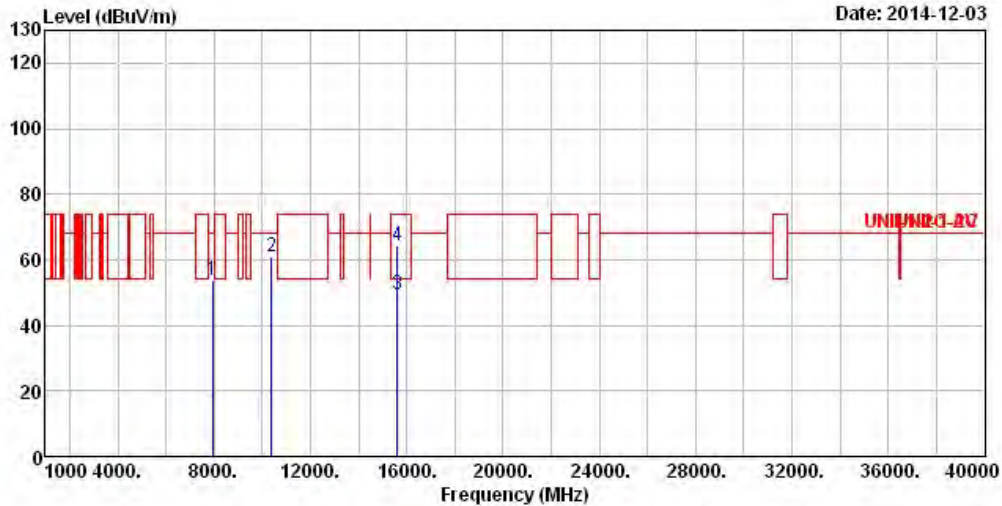

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7926.000	53.89	-14.31	68.20	41.55	36.92	8.21	32.79	Peak	---
2	10400.000	60.89	-7.31	68.20	45.74	38.94	8.94	32.73	Peak	---
3	15600.000	49.46	-4.54	54.00	32.50	37.59	11.59	32.22	Average	---
4	15600.000	64.26	-9.74	74.00	47.30	37.59	11.59	32.22	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	VHT20	<b>Test Freq. (MHz)</b>	5240
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

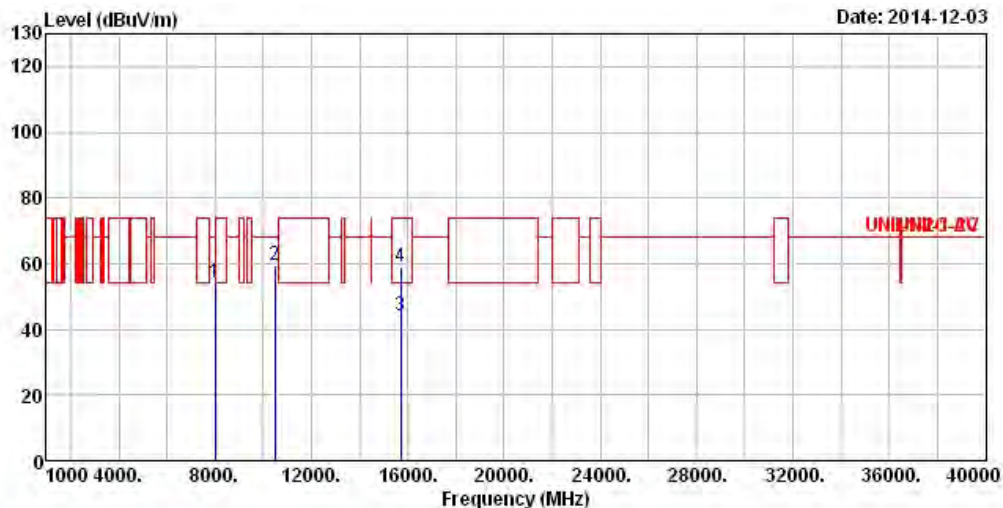


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8014.000	53.97	-14.23	68.20	41.47	37.04	8.26	32.80	Peak	---	---
2	10480.000	59.71	-8.49	68.20	44.48	38.91	8.99	32.67	Peak	---	---
3	15720.000	44.24	-9.76	54.00	27.55	37.35	11.59	32.25	Average	---	---
4	15720.000	59.11	-14.89	74.00	42.42	37.35	11.59	32.25	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.  
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	VHT20	<b>Test Freq. (MHz)</b>	5240
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

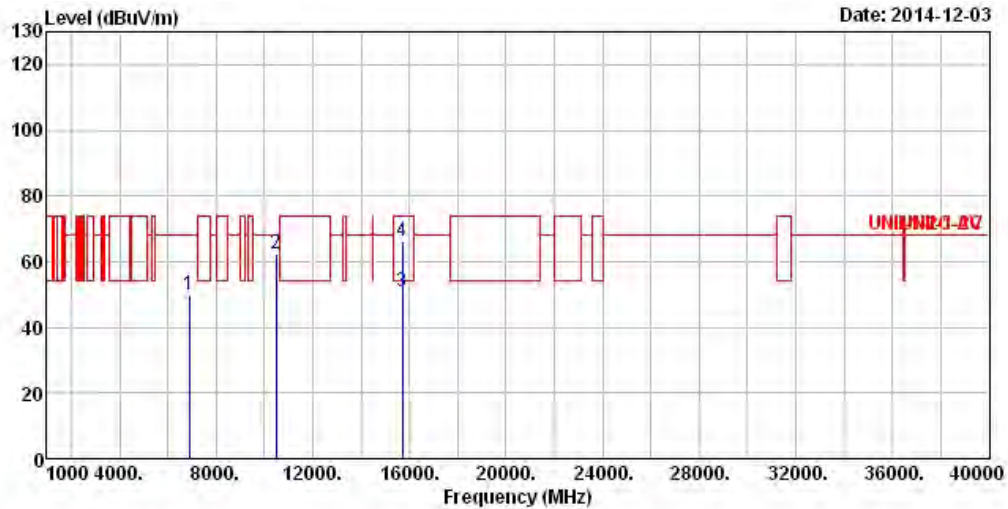

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6877.000	49.91	-18.29	68.20	40.42	35.08	6.96	32.55	Peak	---	---
2	10480.000	62.24	-5.96	68.20	47.01	38.91	8.99	32.67	Peak	---	---
3	15720.000	50.97	-3.03	54.00	34.28	37.35	11.59	32.25	Average	---	---
4	15720.000	66.01	-7.99	74.00	49.32	37.35	11.59	32.25	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	VHT40	<b>Test Freq. (MHz)</b>	5190
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

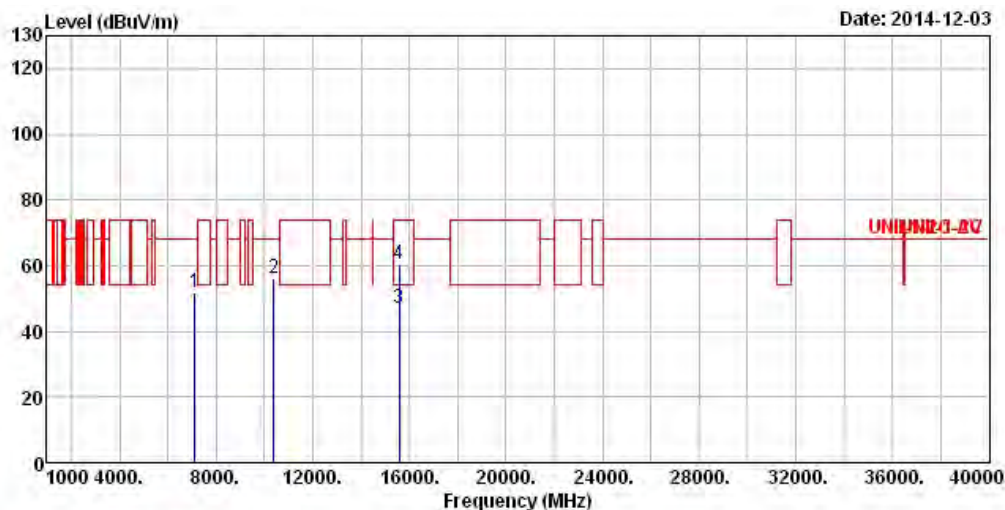

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7111.000	51.97	-16.23	68.20	41.90	35.55	7.14	32.62	Peak	---	---
2	10380.000	56.14	-12.06	68.20	41.00	38.95	8.94	32.75	Peak	---	---
3	15570.000	47.21	-6.79	54.00	30.16	37.66	11.59	32.20	Average	---	---
4	15570.000	60.34	-13.66	74.00	43.29	37.66	11.59	32.20	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	VHT40	<b>Test Freq. (MHz)</b>	5190
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

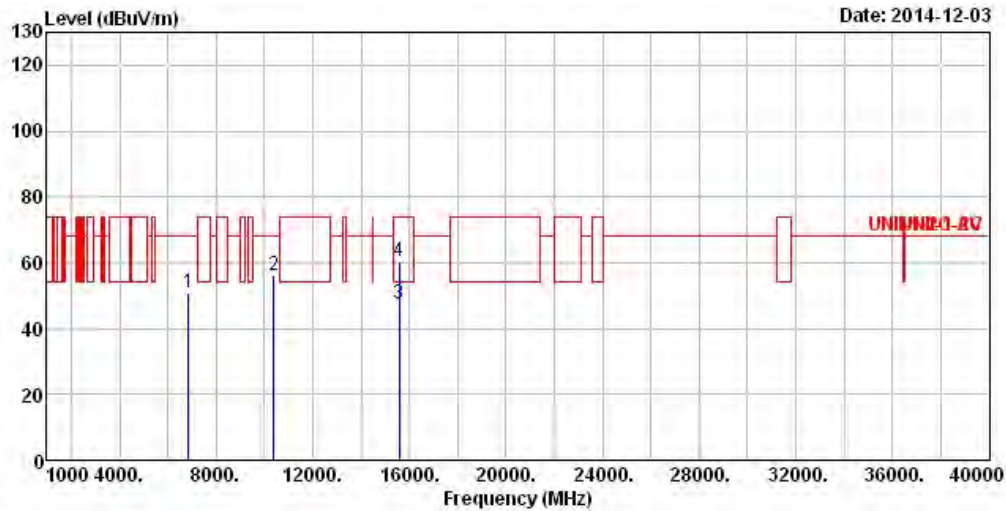

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	6872.000	50.91	-17.29	68.20	41.45	35.05	6.96	32.55 Peak	---	---
2	10380.000	55.89	-12.31	68.20	40.75	38.95	8.94	32.75 Peak	---	---
3	15570.000	47.59	-6.41	54.00	30.54	37.66	11.59	32.20 Average	---	---
4	15570.000	60.46	-13.54	74.00	43.41	37.66	11.59	32.20 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

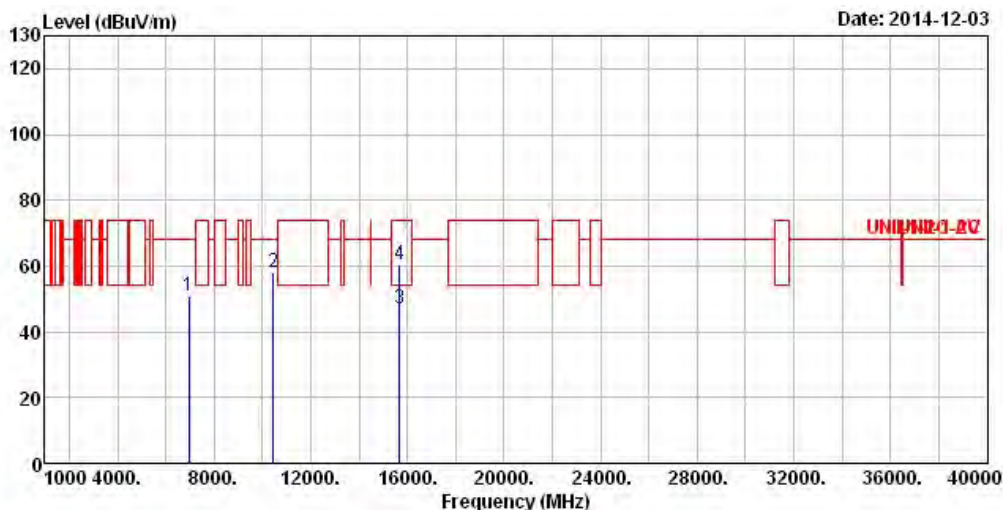

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	6971.000	50.77	-17.43	68.20	41.08	35.24	7.02	32.57	Peak	---
2	10460.000	57.89	-10.31	68.20	42.67	38.92	8.99	32.69	Peak	---
3	15690.000	46.79	-7.21	54.00	30.02	37.42	11.59	32.24	Average	---
4	15690.000	60.21	-13.79	74.00	43.44	37.42	11.59	32.24	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

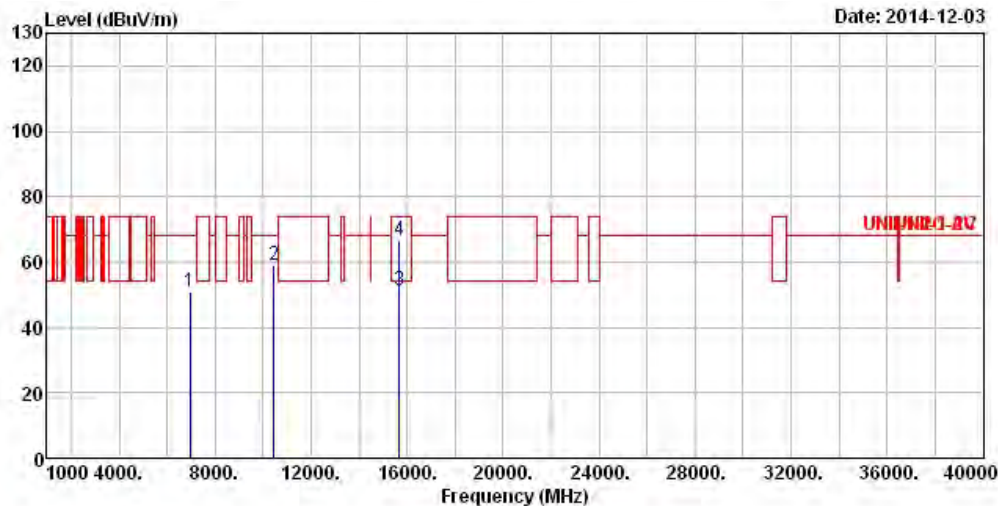

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m		cm	deg
1	6971.000	50.65	-17.55	68.20	40.96	35.24	7.02 32.57 Peak	---	---
2	10460.000	59.21	-8.99	68.20	43.99	38.92	8.99 32.69 Peak	---	---
3	15690.000	51.21	-2.79	54.00	34.44	37.42	11.59 32.24 Average	---	---
4	15690.000	66.64	-7.36	74.00	49.87	37.42	11.59 32.24 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	VHT80	<b>Test Freq. (MHz)</b>	5210
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

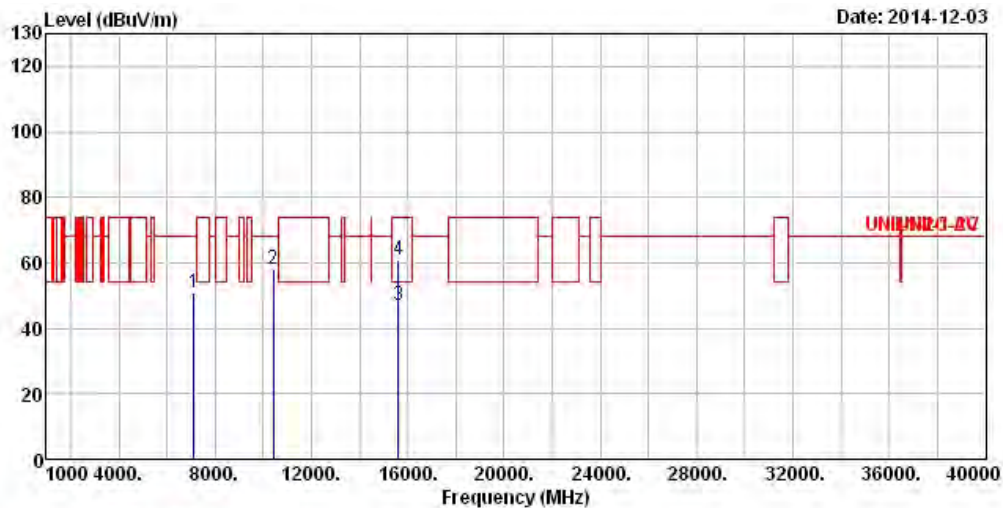

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7119.000	50.91	-17.29	68.20	40.80	35.59	7.14	32.62	Peak	---	---
2	10420.000	57.91	-10.29	68.20	42.74	38.93	8.97	32.73	Peak	---	---
3	15630.000	47.01	-6.99	54.00	30.13	37.52	11.59	32.23	Average	---	---
4	15630.000	60.71	-13.29	74.00	43.83	37.52	11.59	32.23	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	VHT80	<b>Test Freq. (MHz)</b>	5210
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

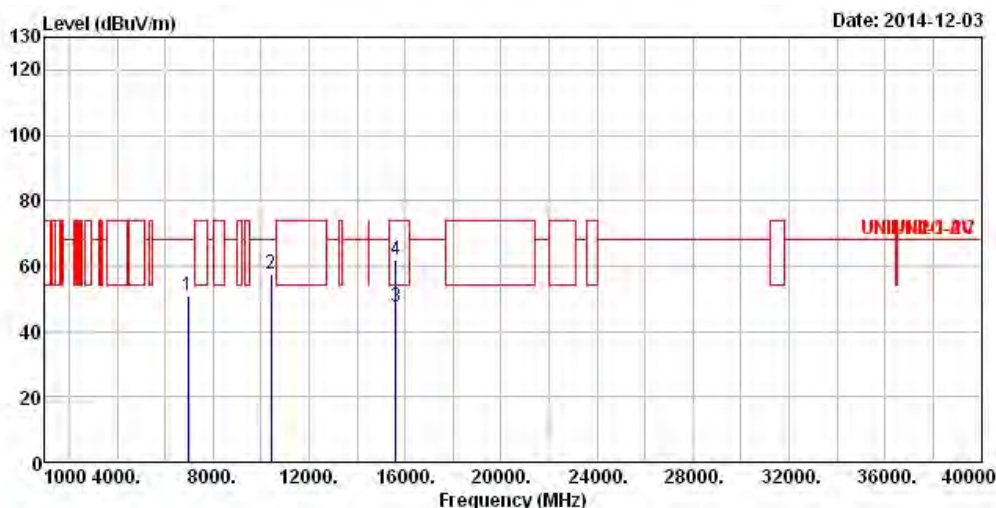

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	6971.000	51.03	-17.17	68.20	41.34	35.24	7.02	32.57	Peak	---
2	10420.000	57.64	-10.56	68.20	42.47	38.93	8.97	32.73	Peak	---
3	15630.000	47.26	-6.74	54.00	30.38	37.52	11.59	32.23	Average	---
4	15630.000	62.03	-11.97	74.00	45.15	37.52	11.59	32.23	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### 3.7 Frequency Stability

#### 3.7.1 Frequency Stability Limit

Frequency Stability Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/>	In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
<b>IEEE Std. 802.11n-2009</b>	
<input checked="" type="checkbox"/>	The transmitter center frequency tolerance shall be $\pm 20$ ppm maximum for the 5 GHz band and $\pm 25$ ppm maximum for the 2.4 GHz band.


#### 3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.7.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
<input checked="" type="checkbox"/>	Frequency stability with respect to ambient temperature
<input checked="" type="checkbox"/>	Frequency stability when varying supply voltage
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	For conducted measurements on devices with multiple transmit chains: Measurements need only to be performed on one of the active transmit chains (antenna outputs)
<input type="checkbox"/>	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

#### 3.7.4 Test Setup

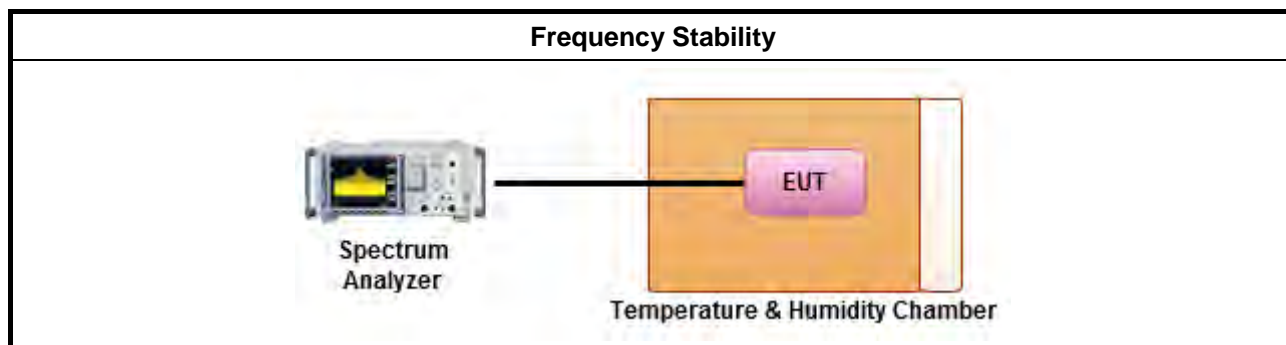

**3.7.5 Test Result of Frequency Stability**

Frequency Stability Result			
Mode		Frequency Stability (ppm)	
Condition	Freq. (MHz)	Test Frequency (MHz)	Frequency Stability (ppm)
T <sub>20°C</sub> V <sub>max</sub>	5180	5179.97352	-5.1120
T <sub>20°C</sub> V <sub>min</sub>	5180	5179.97352	-5.1120
T <sub>50°C</sub> V <sub>nom</sub>	5180	5179.98220	-3.4363
T <sub>40°C</sub> V <sub>nom</sub>	5180	5179.97135	-5.5309
T <sub>30°C</sub> V <sub>nom</sub>	5180	5179.97048	-5.6988
T <sub>20°C</sub> V <sub>nom</sub>	5180	5179.97352	-5.1120
T <sub>10°C</sub> V <sub>nom</sub>	5180	5179.97829	-4.1911
T <sub>0°C</sub> V <sub>nom</sub>	5180	5179.98350	-3.1853
T <sub>-10°C</sub> V <sub>nom</sub>	5180	5179.98480	-2.9344
T <sub>-20°C</sub> V <sub>nom</sub>	5180	5179.98524	-2.8494
Limit (ppm)		20	
Result		Complied	
Note 1: Measure at 85 % [Vmin] and 115 % [Vmax] of the nominal voltage [Vnom].			
Note 2: The nominal voltage refer test report clause 1.1.5 for EUT operational condition.			



## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2014	Conduction
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2014	Conduction
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Oct. 30, 2013	Conduction
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz~40GHz	Jan. 25, 2014	RF Conducted
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 15, 2014	RF Conducted
Signal Generator	R&S	SMR40	100116	10MHz ~ 10GHz	Jul. 31, 2014	RF Conducted
RF Cable-1m	HUBER+SUHNER	SUCOFLEX_104	SN 324557	30MHz ~ 26.5GHz	Dec. 02, 2013	RF Conducted
RF Cable-0.5m	HUBER+SUHNER	SUCOFLEX_103	10715/4 10716/4	30MHz ~ 26.5GHz	Dec. 02, 2013	RF Conducted

Note: Calibration Interval of instruments listed above is one year.

### < Radiated Emission Below 1GHz>

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 30, 2013	Radiation
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 03, 2013	Radiation
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Mar. 27, 2014	Radiation
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 21, 2013	Radiation
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 16, 2013	Radiation
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	Dec. 02, 2012	Radiation

Note: Calibration Interval of instruments listed above is two year.

**< Radiated Emission above 1GHz>**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 29, 2014	Radiation
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Sep. 01, 2014	Radiation
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Mar. 27, 2014	Radiation
Horn Antenna	ETS • LINDGREN	3115	6741	1GHz ~ 18GHz	Jun. 11, 2014	Radiation
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 10, 2014	Radiation
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec. 11, 2013	Radiation
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	EM	EM18G40G	060604	18GHz ~ 40GHz	Oct. 17.2013	Radiation

Note: Calibration Interval of instruments listed above is two year.