

SPECIFICATION FOR APPROVAL

Customer name Husme Technology Co., LTD

CUSTOMER P/N:A.02.026.0043

DESCRIPTION : P71/P75 DATE:2024/11/27

SPECIFICATION: Nanocrystalline coil /41.5/0.3 thickness/plus 20*0.8 diskette REV.NO.:A0

Outlet line 32+2/-1mm/ back glue 40*0.08

HRSW ELECTRONICS CO.,LTD to sign, seal

section	Confirmation/Date	Audit/Date	Wei Hanman	(Stamp the company seal)
Quality	Dong Wanhong	Lv Hui	Wei Hanman	
ENGINEERING	He Weihua	Wei Lihong	Wei Lihong	

remark:

Husme Technology acknowledges signing, sealing

section	Confirmation/Date	Audit/Date	Approval/Date	(Stamp the company seal)
Development engineering				
purchase				
Quality				

remark :

HRSW ELECTRONICS CO.,LTD


ADD: 2nd Floor, Building 1, No. 48 Huanguan Middle Road, Guanlan, Longhua New District, Shenzhen

TEL: 15112254520 FAX: +86-0755-28015170


page:1/2

SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

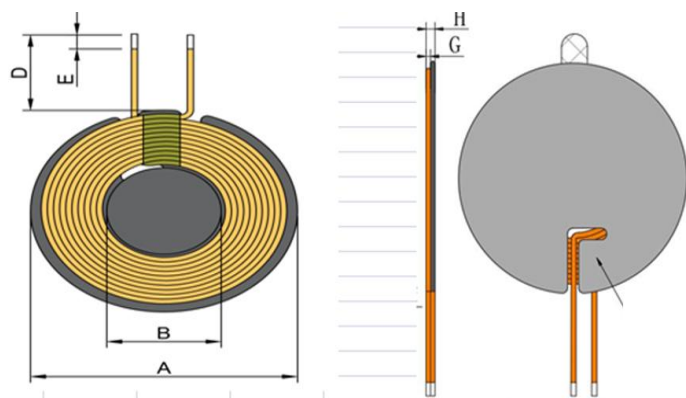

2. SCHEMATICS:



Note: 1 Add 20*0.8MM small magnetic disc in the middle with adhesive 2. Tear off the adhesive thickness within 1.25MM (outlet position 1.5MM)

A	B	G	D	E	H				
41.5±0.05	21.5±0.5	0.3±0.02	32+2/-1	2mm-4mm	1.25MAX				

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	Hot air wire 0.08*65 2UEW	11TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR		Operating temperature	HI-POT
TEST	Coil and diskette	S-F		At normal temperature	
CON	100KHz, 0.25V	AT 25°C			
SPEC	8.1uH±5%	70mΩ Max		0-80°C	

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	Hot air wire 0.08*65 strands	Hot air wire 0.08*65 strands	NANJINGJINNINGCO,LTD	
2	Lead-free tin strip	Lead-free tin strip	QIAODO	
3	Magnetic sheet	41.5*0.3 nanocrystalline magnetic sheet L slot	TAIYI CO.,LTD	
4	glue	Comes with 3M glue	LIANCHENG CO.,LTD	
5	High-temperature adhesive paper	3mm wide high temperature adhesive paper	CUDAK CO.,LTD	
6	Rubber backing	40*0.08	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	
DRAWN BY	CHECKED BY	APPROVED BY	
He Weihua	Wei Lihong	Wei Lihong	