

Applicant: Distribution Axessorize Inc

Product: Wireless Speaker

Model No.: S147

Trademark: AT&T

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 & FCC Part 15 Subpart C, Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Terry Tang

Manager

Dated: March 21, 2025

Results appearing herein relate only to the sample tested


The technical reports is issued errors and omissions exempt and is subject to

withdrawal at

## SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TW2503121-01E Page 2 of 44

Date: 2025-03-21



## **Special Statement:**

## FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

## Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

## **A2LA** (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

Date: 2025-03-21



# Test Report Conclusion Content

#### General Details..... 1.0 1.1 Test Lab Details.... 1.2 Applicant Details.... 4 1.3 Description of EUT .... 4 1.4 Submitted Sample.... Test Duration. 1.5 5 5 1.6 Test Uncertainty. 1.7 Test By..... 5 2.0 List of Measurement Equipment. 6 7 3.0 Technical Details..... 3.1 Summary of Test Results.... 7 3.2 7 Test Standards.... 4.0 7 EUT Modification.... 5.0 Power Line Conducted Emission Test. 8 5.1 Schematics of the Test..... 8 Test Method and Test Procedure.... 5.2 8 Configuration of the EUT..... 5.3 5.4 EUT Operating Condition.... 9 5.5 Conducted Emission Limit..... 9 5.6 Test Result. 6.0 Radiated Emission test.... 12 Test Method and Test Procedure. 12 6.1 6.2 Configuration of the EUT..... 13 EUT Operation Condition.... 6.3 13 6.4 Radiated Emission Limit.... 13 6.5 Test Result. 15 7.0 Band Edge..... 23 7.1 Test Method and Test Procedure.... 23 7.2 Radiated Test Setup. 23 7.3 Configuration of the EUT.... 23 7.4 EUT Operating Condition. 23 7.5 Band Edge Limit. 23 7.6 Band Edge Test Result. 24 8.0 Antenna Requirement 28 9.0 20dB bandwidth measurement. 29 10.0 FCC ID Label. 36 11.0 Photo of Test Setup and EUT View....

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2025-03-21



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

#### 1.2 Applicant Details

Applicant: Distribution Axessorize Inc

Address: 3800 St-Patrick, Suite 315 Montreal QC H4E 1A4 Canada

#### 1.3 Description of EUT

Product: Wireless Speaker

Manufacturer: Glory Star Technology Industrial Co., Ltd.

Address: Room2102, Block 1st, Yi Luan Building, Xixiang Road 230, BaoAn District,

Shenzhen, China

Trademark: AT&T

Model Number: S147

Additional Model Name N/A

Rating: Input: DC5V, 1A

Battery: DC3.7V, 500mAh Li-ion battery

Serial No.: 0000-4000

Hardware Version: HF-L155-65E(BT60)-V1

Software Version: V5.4

Operation Frequency: 2402-2480MHz Modulation Type: GFSK, JI/4DQPSK

Number of Channels: 79 Channel Separation: 1MHz

Antenna Designation PCB antenna with gain 2.499dBi maximum (Get from the antenna specification)

## 1.4 Submitted Sample: 2 Samples

#### 1.5 Test Duration

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2025-03-21



Page 5 of 44

2025-03-10 to 2025-03-21

## 1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty =3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Page 6 of 44

Report No.: TW2503121-01E

Date: 2025-03-21



| 2.0 Test Equipment |              |                  |              |              |            |  |  |
|--------------------|--------------|------------------|--------------|--------------|------------|--|--|
| Instrument Type    | Manufacturer | Model            | Serial No.   | Date of Cal. | Due Date   |  |  |
| ESPI Test Receiver | R&S          | ESPI 3           | 100379       | 2024-07-12   | 2025-07-11 |  |  |
| LISN               | R&S          | EZH3-Z5          | 100294       | 2024-07-12   | 2025-07-11 |  |  |
| LISN               | R&S          | EZH3-Z5          | 100253       | 2024-07-12   | 2025-07-11 |  |  |
| Impuls-Begrenzer   | R&S          | ESH3-Z2          | 100281       | 2024-07-12   | 2025-07-11 |  |  |
| Loop Antenna       | EMCO         | 6507             | 00078608     | 2022-07-18   | 2025-07-17 |  |  |
| Spectrum           | R&S          | FSIQ26           | 100292       | 2024-07-12   | 2025-07-11 |  |  |
| Horn Antenna       | A-INFO       | LB-180400-KF     | J211060660   | 2022-07-18   | 2025-07-17 |  |  |
| Horn Antenna       | R&S          | BBHA 9120D       | 9120D-631    | 2022-07-18   | 2025-07-17 |  |  |
| Power meter        | Anritsu      | ML2487A          | 6K00003613   | 2024-07-12   | 2025-07-11 |  |  |
| Power sensor       | Anritsu      | MA2491A          | 32263        | 2024-07-12   | 2025-07-11 |  |  |
| Bilog Antenna      | Schwarebeck  | VULB9163         | 9163/340     | 2022-07-18   | 2025-07-17 |  |  |
| 9*6*6 Anechoic     |              |                  | N/A          | 2022-07-26   | 2025-07-25 |  |  |
| EMI Test Receiver  | RS           | ESVB             | 826156/011   | 2024-07-12   | 2025-07-11 |  |  |
| EMI Test Receiver  | RS           | ESCS 30          | 834115/006   | 2024-07-12   | 2025-07-11 |  |  |
| Spectrum           | HP/Agilent   | E4407B           | MY50441392   | 2024-07-12   | 2025-07-11 |  |  |
| Spectrum           | RS           | FSP              | 1164.4391.38 | 2024-07-12   | 2025-07-11 |  |  |
| RF Cable           | Zhengdi      | ZT26-NJ-NJ-8M/FA |              | 2024-07-12   | 2025-07-11 |  |  |
| RF Cable           | Zhengdi      | 7m               |              | 2024-07-12   | 2025-07-11 |  |  |
| Pre-Amplifier      | Schwarebeck  | BBV9743          | #218         | 2024-07-12   | 2025-07-11 |  |  |
| Pre-Amplifier      | HP/Agilent   | 8449B            | 3008A00160   | 2024-07-12   | 2025-07-11 |  |  |
| LISN               | SCHAFFNER    | NNB42            | 00012        | 2024-07-12   | 2025-07-11 |  |  |
| ESPI Test Receiver | R&S          | ESPI 3           | 100379       | 2024-07-12   | 2025-07-11 |  |  |
| LISN               | R&S          | EZH3-Z5          | 100294       | 2024-07-12   | 2025-07-11 |  |  |

## 2.2 Automation Test Software

#### For Conducted Emission Test

| Name   | Version           |
|--------|-------------------|
| EZ-EMC | Ver.EMC-CON 3A1.1 |

## For Radiated Emissions

| Name  | Version |  |
|---|---------|--|
| EMI Test Software BL410-EV18.91                 | V18.905 |  |
| EMI Test Software BL410-EV18.806 High Frequency | V18.06  |  |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 44

Report No.: TW2503121-01E

Date: 2025-03-21



#### 3.0 Technical Details

## 3.1 Summary of test results

| The EUT has been | i tested according | g to the following | specifications: |
|------------------|--------------------|--------------------|-----------------|
|                  |                    |                    |                 |

| Standard  | Test Type                           | Result | Notes    |
|---|-------------------------------------|--------|----------|
| FCC Part 15, Paragraph 15.203                               | Antenna<br>Requirement              | Pass   | Complies |
| FCC Part 15, Paragraph 15.207                               | Conducted<br>Emission Test          | Pass   | Complies |
| FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit | Field Strength<br>of<br>Fundamental | Pass   | Complies |
| FCC Part 15, Paragraph 15.209                               | Radiated<br>Emission Test           | Pass   | Complies |
| FCC Part 15 Subpart C Paragraph 15.249(d) Limit             | Band Edge<br>Test                   | Pass   | Complies |
| FCC Part 15.215(c)  | 20dB<br>bandwidth                   | Pass   | Complies |

#### 3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

#### 4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2025-03-21



#### 5.0 Power Line Conducted Emission Test

#### 5.1 Schematics of the test

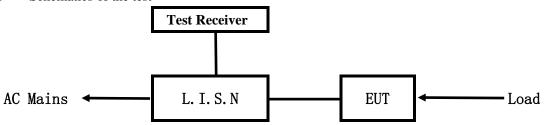


**EUT: Equipment Under Test** 

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

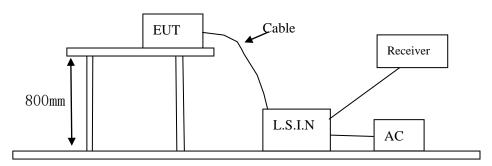

## 5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

#### A. EUT

| Device           | Manufacturer                                  | Model | FCC ID       |
|------------------|---|-------|--------------|
| Wireless Speaker | Glory Star Technology<br>Industrial Co., Ltd. | S147  | 2BK3OATTS147 |

#### B. Internal Device

| Device | Manufacturer | Model | FCC ID/DOC |
|--------|--------------|-------|------------|
| N/A    |              |       |            |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 9 of 44

Report No.: TW2503121-01E

Date: 2025-03-21



## C. Peripherals

| Device       | Manufacturer | Model   | Rating                             |
|--------------|--------------|---------|------------------------------------|
| Power Supply | Xiaomi       | CDQ02ZM | Input: 100-240V~, 50/60Hz, 1.2A;   |
|              |              |         | Output: DC5V, 3A; DC9V, 3A; DC12V, |
|              |              |         | 3A; DC15V, 3A; DC20V, 2.25A;       |

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

| Frequency        | Limits (dB μ V)  |               |  |  |
|------------------|------------------|---------------|--|--|
| (MHz)            | Quasi-peak Level | Average Level |  |  |
| 0.15 ~ 0.50      | 66.0~56.0*       | 56.0~46.0*    |  |  |
| $0.50 \sim 5.00$ | 56.0             | 46.0          |  |  |
| 5.00 ~ 30.00     | 60.0             | 50.0          |  |  |

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 Test Results:

Date: 2025-03-21



## A: Conducted Emission on Live Terminal (150kHz to 30MHz)


#### **EUT Operating Environment**

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Charging and Communication by BT** 

**Results: Pass** 

Please refer to following diagram for individual

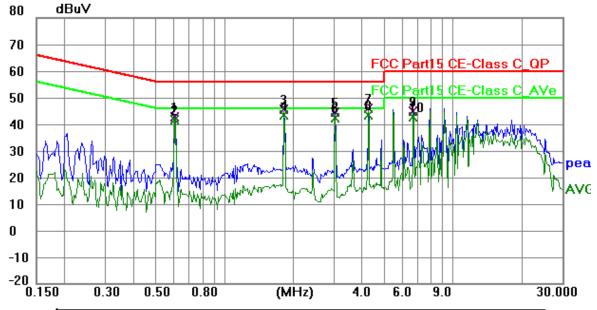

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Factor<br>(dB) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1   | 0.6063             | 32.31             | 10.43          | 42.74           | 56.00           | -13.26         | QP       | Р   |
| 2   | 0.6063             | 31.10             | 10.43          | 41.53           | 46.00           | -4.47          | AVG      | Р   |
| 3   | 1.8231             | 34.20             | 11.17          | 45.37           | 56.00           | -10.63         | QP       | Р   |
| 4   | 1.8231             | 32.14             | 11.17          | 43.31           | 46.00           | -2.69          | AVG      | Р   |
| 5   | 3.0390             | 32.73             | 11.69          | 44.42           | 56.00           | -11.58         | QP       | Р   |
| 6   | 3.0390             | 30.75             | 11.69          | 42.44           | 46.00           | -3.56          | AVG      | П   |
| 7   | 4.2519             | 33.70             | 12.10          | 45.80           | 56.00           | -10.20         | QP       | ъ   |
| 8   | 4.2519             | 31.18             | 12.10          | 43.28           | 46.00           | -2.72          | AVG      | Р   |
| 9   | 6.6816             | 32.10             | 12.75          | 44.85           | 60.00           | -15.15         | QP       | Р   |
| 10  | 6.6816             | 29.96             | 12.75          | 42.71           | 50.00           | -7.29          | AVG      | Р   |

Date: 2025-03-21



## B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


**EUT Operating Environment** 

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Communication by BT

**Results: Pass** 

Please refer to following diagram for individual

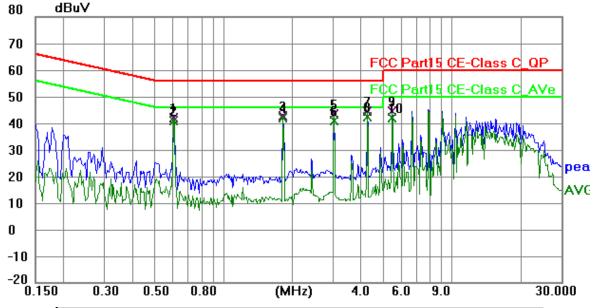

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Factor<br>(dB) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1   | 0.6063             | 31.52             | 10.43          | 41.95           | 56.00           | -14.05         | QP       | Р   |
| 2   | 0.6063             | 30.43             | 10.43          | 40.86           | 46.00           | -5.14          | AVG      | Р   |
| 3   | 1.8192             | 31.63             | 11.17          | 42.80           | 56.00           | -13.20         | QP       | Р   |
| 4   | 1.8192             | 30.69             | 11.17          | 41.86           | 46.00           | -4.14          | AVG      | Р   |
| 5   | 3.0350             | 31.81             | 11.69          | 43.50           | 56.00           | -12.50         | QP       | Р   |
| 6   | 3.0350             | 29.27             | 11.69          | 40.96           | 46.00           | -5.04          | AVG      | Р   |
| 7   | 4.2480             | 32.22             | 12.10          | 44.32           | 56.00           | -11.68         | QP       | Р   |
| 8   | 4.2480             | 30.08             | 12.10          | 42.18           | 46.00           | -3.82          | AVG      | Р   |
| 9   | 5.4608             | 32.10             | 12.42          | 44.52           | 60.00           | -15.48         | QP       | Р   |
| 10  | 5.4608             | 29.48             | 12.42          | 41.90           | 50.00           | -8.10          | AVG      | Р   |

Date: 2025-03-21



#### **6** Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 9kHz to 25 GHz was investigated. The frequency spectrum is set as follows:


| Frequency    | Detector   | RBW    | VBW    | Value      |
|--------------|------------|--------|--------|------------|
| 9KHz-150KHz  | Quasi-peak | 200Hz  | 600Hz  | Quasi-peak |
| 150KHz-30MHz | Quasi-peak | 9KHz   | 30KHz  | Quasi-peak |
| 30MHz-1GHz   | Quasi-peak | 120KHz | 300KHz | Quasi-peak |
| Above 1GHz   | Peak       | 1MHz   | 3MHz   | Peak       |
| ADOVE IGHZ   | Peak       | 1MHz   | 10Hz   | Average    |

(Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.

- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

#### **Block diagram of Test setup**


For radiated emissions from 9kHz to 30MHz

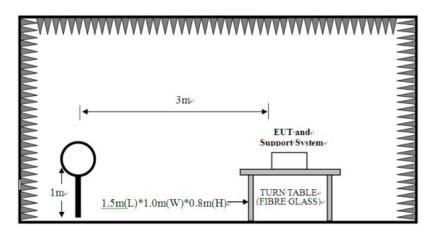


Date: 2025-03-21



For radiated emissions from 30MHz to1GHz

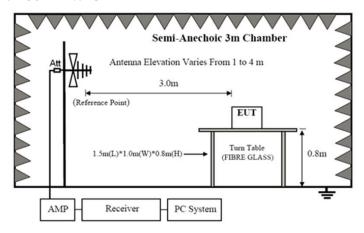

For radiated emissions above 1GHz

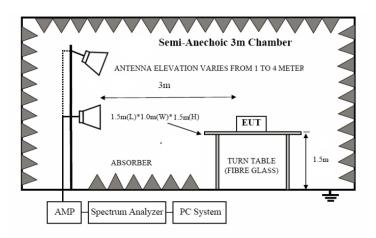

- 6.2 Configuration of the EUT
  Same as section 5.3 of this report
- 6.3 EUT Operating Condition

  Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

## A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

| Fundamental Frequency | Field Stre | ength of Fundamental (3m) | Field Strength of Harmonics (3m) |        |  |  |
|-----------------------|------------|---------------------------|----------------------------------|--------|--|--|
| (MHz)                 | mV/m       | dBuV/m                    | uV/m                             | dBuV/m |  |  |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2503121-01E Page 14 of 44

Date: 2025-03-21



| 2400-2483.5 50 | 94 (Average) | 114 (Peak) | 500 | 54 (Average) | 74 (Peak) |
|----------------|--------------|------------|-----|--------------|-----------|
|----------------|--------------|------------|-----|--------------|-----------|

Note: 1. RF Field Strength  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$ 

- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

## B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

| Frequency Range (MHz) | Distance (m) | Field strength (dB µ V/m)         |
|-----------------------|--------------|-----------------------------------|
| 0.009-0.490           | 3            | 20log(2400/F(kHz)) +40log (300/3) |
| 0.490-1.705           | 3            | 20log(24000/F(kHz)) +40log (30/3) |
| 1.705-30              | 3            | 69.5                              |
| 30-80                 | 3            | 40.                               |
| 88-216                | 3            | 43.5                              |
| 216-960               | 3            | 46.0                              |
| Above 960             | 3            | 54.0                              |

Note:

- 1. RF Voltage  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. The two modulation modes of GFSK, Pi/4D-QPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.
- 6. Battery was fully charged during test

Report No.: TW2503121-01E Page 15 of 44

Date: 2025-03-21




#### 6.5 Test result

## A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

#### **Horizontal**

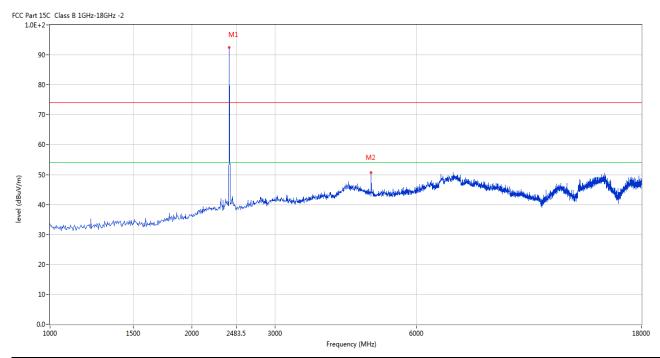


| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)   | (cm)   |            |         |
| 1   | 2402      | 92.49    | -3.57  | 114.0    | -21.51     | Peak     | 92.00 | 100    | Horizontal | Pass    |
| 2   | 4802.799  | 50.72    | 3.12   | 74.0     | -23.28     | Peak     | 82.00 | 100    | Horizontal | Pass    |

Report No.: TW2503121-01E Page 16 of 44

Date: 2025-03-21



### Vertical

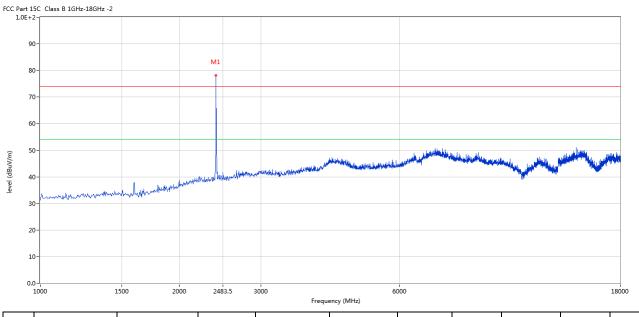

| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)   | (cm)   |          |         |
| 1   | 2402      | 78.16    | -3.57  | 114.0    | -35.84     | Peak     | 10.00 | 100    | Vertical | Pass    |


Report No.: TW2503121-01E Page 17 of 44

Date: 2025-03-21



Please refer to the following test plots for details: Middle Channel-2441MHz

#### **Horizontal**

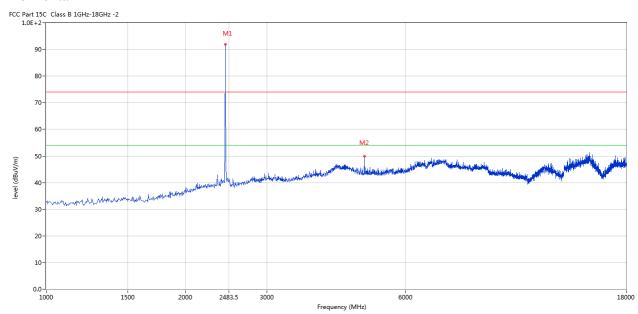


| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |            |         |
| 1   | 2441      | 91.96    | -3.57  | 114.0    | -22.04     | Peak     | 124.00 | 100    | Horizontal | Pass    |
| 2   | 4883.529  | 49.94    | 3.20   | 74.0     | -24.06     | Peak     | 81.00  | 100    | Horizontal | Pass    |

Report No.: TW2503121-01E Page 18 of 44

Date: 2025-03-21



## Vertical

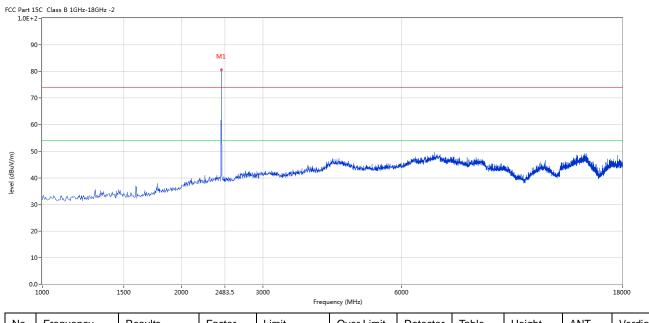

| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |          |         |
| 1   | 2441      | 80.70    | -3.57  | 114.0    | -33.30     | Peak     | 296.00 | 100    | Vertical | Pass    |


Report No.: TW2503121-01E Page 19 of 44

Date: 2025-03-21



Please refer to the following test plots for details: High Channel-2480MHz

#### Horizontal

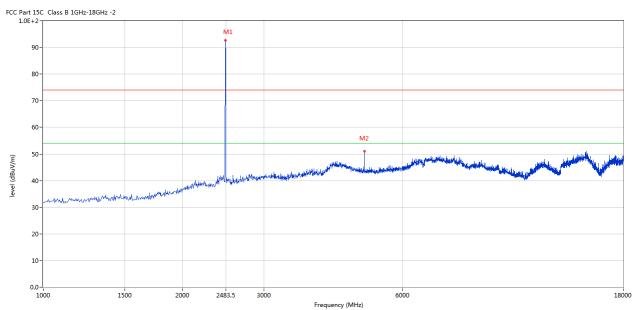

| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |            |         |
| 1   | 2480      | 92.91    | -3.57  | 114.0    | -21.09     | Peak     | 126.00 | 100    | Horizontal | Pass    |
| 2   | 4960.010  | 51.00    | 3.36   | 74.0     | -23.00     | Peak     | 141.00 | 100    | Horizontal | Pass    |


Page 20 of 44

Report No.: TW2503121-01E

Date: 2025-03-21



#### Vertical

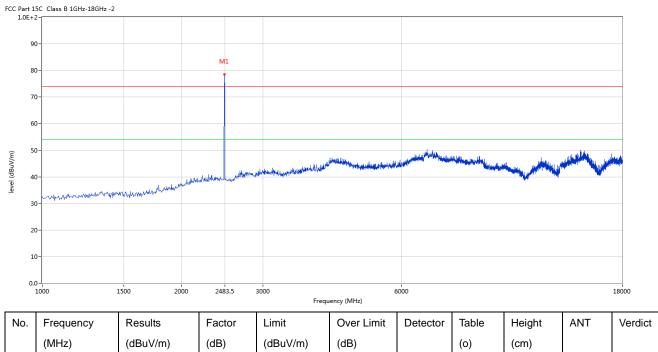

| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |          |         |
| 1   | 2480      | 78.59    | -3.57  | 114.0    | -35.41     | Peak     | 186.00 | 100    | Vertical | Pass    |

Note: (1) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (2) Margin=Emission-Limits
- (3) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (4) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise and less than the limit for more than 20dB. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2503121-01E Page 21 of 44

Date: 2025-03-21




# B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

**Results:** Pass

Please refer to following diagram for individual

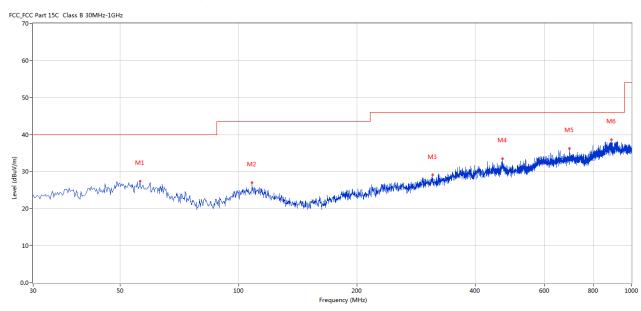

| No. | Frequency | Results  | Factor | Limit    | Margin | Detector | Table    | Height | Antenna    | Verdict |
|-----|-----------|----------|--------|----------|--------|----------|----------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)   |          | (Degree) | (cm)   |            |         |
| 1   | 56.183    | 27.38    | -5.04  | 40.0     | 12.62  | Peak     | 143.00   | 100    | Horizontal | Pass    |
| 2   | 108.308   | 26.98    | -5.98  | 43.5     | 16.52  | Peak     | 321.00   | 100    | Horizontal | Pass    |
| 3   | 311.957   | 29.08    | -3.72  | 46.0     | 16.92  | Peak     | 343.00   | 100    | Horizontal | Pass    |
| 4   | 470.270   | 33.53    | -0.13  | 46.0     | 12.47  | Peak     | 235.00   | 100    | Horizontal | Pass    |
| 5   | 695.981   | 36.23    | 2.44   | 46.0     | 9.77   | Peak     | 27.00    | 100    | Horizontal | Pass    |
| 6   | 890.417   | 38.67    | 4.91   | 46.0     | 7.33   | Peak     | 180.00   | 100    | Horizontal | Pass    |

Report No.: TW2503121-01E Page 22 of 44

Date: 2025-03-21




## Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

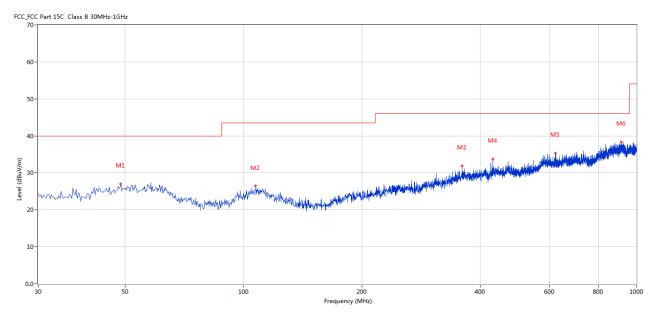

| No. | Frequency | Results  | Factor | Limit    | Margin | Detector | Table    | Height | Antenna  | Verdict |
|-----|-----------|----------|--------|----------|--------|----------|----------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)   |          | (Degree) | (cm)   |          |         |
| 1   | 48.668    | 27.04    | -5.27  | 40.0     | 12.96  | Peak     | 153.00   | 100    | Vertical | Pass    |
| 2   | 107.338   | 26.44    | -6.07  | 43.5     | 17.06  | Peak     | 0.00     | 100    | Vertical | Pass    |
| 3   | 359.718   | 31.85    | -1.86  | 46.0     | 14.15  | Peak     | 142.00   | 100    | Vertical | Pass    |
| 4   | 430.995   | 33.72    | -0.90  | 46.0     | 12.28  | Peak     | 36.00    | 100    | Vertical | Pass    |
| 5   | 622.522   | 35.31    | 1.54   | 46.0     | 10.69  | Peak     | 336.00   | 100    | Vertical | Pass    |
| 6   | 914.176   | 38.38    | 5.37   | 46.0     | 7.62   | Peak     | 79.00    | 100    | Vertical | Pass    |

Date: 2025-03-21




#### 7. Band Edge

#### 7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

## 7. 2 Radiated Test Setup

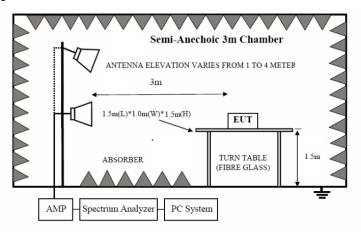

For the actual test configuration, please refer to the related items – Photos of Testing

## 7.3 Configuration of the EUT

Same as section 5.3 of this report

## 7.4 EUT Operating Condition

Same as section 5.4 of this report.

## 7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No.: TW2503121-01E Page 24 of 44

Date: 2025-03-21



#### 7.6 Test Result

| Product:     | Wireless Speaker     | Polarity     | Horizontal |
|--------------|----------------------|--------------|------------|
| Mode         | Keeping Transmitting | Test Voltage | DC3.7V     |
| Temperature  | 24 deg. C,           | Humidity     | 56% RH     |
| Test Result: | Pass                 |              |            |

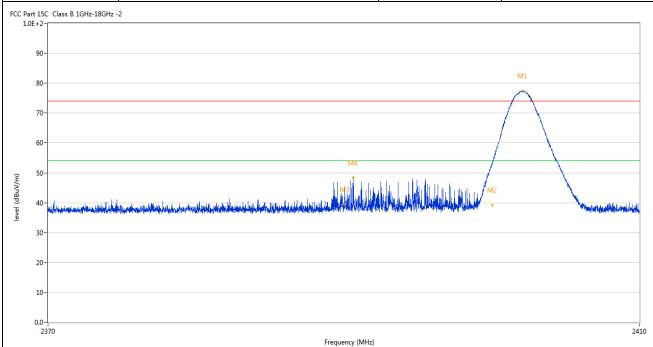

| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |          |         |
| 1   | 2402.032  | 77.35    | -3.57  | 74.0     | 3.35       | Peak     | 174.00 | 100    | Vertical | N/A     |
| 2   | 2400.000  | 53.62    | -3.57  | 74.0     | -20.38     | Peak     | 154.44 | 100    | Vertical | Pass    |
| 2** | 2400.000  | 39.11    | -3.57  | 54.0     | -14.89     | AV       | 154.44 | 100    | Vertical | Pass    |
| 3   | 2390.000  | 39.40    | -3.53  | 74.0     | -34.60     | Peak     | 205.00 | 100    | Vertical | Pass    |
| 4   | 2390.565  | 48.49    | -3.53  | 74.0     | -25.51     | Peak     | 339.00 | 100    | Vertical | Pass    |

Page 25 of 44

Report No.: TW2503121-01E

Date: 2025-03-21

2394.754

47.90

-3.55

74.0



| ]                   | Product:                          |   | Wireless                    | Speaker                                      |                                      | Dete             | ector                 |                    | Vertical              |                      |
|---------------------|-----------------------------------|---|-----------------------------|--|--------------------------------------|------------------|-----------------------|--------------------|-----------------------|----------------------|
|                     | Mode                              |   | Keeping T                   | ransmitting                                  |                                      | Test V           | oltage                |                    | DC3.7V                |                      |
| Te                  | mperature                         |   | 24 de                       | eg. C,                                       |                                      | Hum              | idity                 |                    | 56% RH                |                      |
| Те                  | est Result:                       |   | Pa                          | ass  |                                      | -                | _                     |                    |                       |                      |
| 5                   | 10-                               | orandoral deliferação in La Alberta primber | Heroodylahadakhadayahyahadk | in distance by selections of Laboratories in | Ma                                   | M4               | Mi                    | M1                 |                       |                      |
| 1                   | 0-                                |   |                             |  |                                      |                  |                       |                    |                       | 2410                 |
| 1 0.                | 0-2370                            |   |                             | 1  | Frequency (MHz)                      |                  |                       |                    |                       | 2410                 |
| 1                   | o-<br>0-<br>2370<br>Frequency     | Results                                     | Factor                      | Limit  | Over                                 | Detector         | Table                 | Height             | ANT                   | 1                    |
| 1 0.                | Frequency (MHz)                   | (dBuV/m)                                    | (dB)                        | (dBuV/m)                                     | Over<br>Limit (dB)                   |                  | (o)                   | (cm)               |                       | Verdi                |
| 1 0.                | o-<br>0-<br>2370<br>Frequency     |   |                             |  | Over                                 | Detector<br>Peak |                       | _                  | ANT<br>Horizontal     | 1                    |
| 2<br>1<br>0.<br>No. | Frequency (MHz)                   | (dBuV/m)                                    | (dB)                        | (dBuV/m)                                     | Over<br>Limit (dB)                   |                  | (o)                   | (cm)               |                       | Verdi<br>N/A         |
| 0.<br>No.           | Frequency (MHz) 2401.832          | (dBuV/m)<br>91.36                           | (dB)<br>-3.57               | (dBuV/m)<br>74.0                             | Over<br>Limit (dB)<br>17.36          | Peak             | (o)<br>88.00          | (cm)               | Horizontal            | Verdi                |
| 2<br>1<br>0.<br>No. | Frequency (MHz) 2401.832 2400.000 | (dBuV/m)<br>91.36<br>67.79                  | (dB)<br>-3.57<br>-3.57      | (dBuV/m)<br>74.0<br>74.0                     | Over<br>Limit (dB)<br>17.36<br>-6.21 | Peak<br>Peak     | (o)<br>88.00<br>88.00 | (cm)<br>100<br>100 | Horizontal Horizontal | Verdi<br>N/A<br>Pass |

-26.10

83.00

Peak

100

Horizontal

Pass

Page 26 of 44

Report No.: TW2503121-01E

Date: 2025-03-21

2\*\*

2483.500

41.79

-3.57

54.0



| Prod                              | duct:  |  | Wireles     | ss Speaker   |  | P   | olarity  |  | Horizont   | al                          |
|-----------------------------------|--|--|-------------|--------------|--|---|--|--|--|-----------------------------|
| Mo                                | ode  |  | Keeping '   | Transmitting |  | Tes   | t Voltage  |  | DC3.7V   | I                           |
| Tempe                             | erature  |  | 24 0        | deg. C,      |  | Hı  | ımidity  |  | 56% RF   | ł                           |
| Test R                            | Result:  |  | I           | Pass         |  |   |  |  |  |                             |
| Part 15C Cla<br>1.0E+2-           | ass B 1GHz-18GHz   | -2   |             |              |  |   |  |  |  |                             |
|                                   |  |  | M1<br>سرر   |              |  |   |  |  |  |                             |
| 90-                               |  |  |             |              |  |   |  |  |  |                             |
| 80-                               |  |  | -/-         |              |  |   |  |  |  |                             |
| 70-                               |  |  |             |              |  |   |  |  |  |                             |
| 60-                               |  |  |             |              |  |   |  |  |  |                             |
|                                   |  |  |             |              |  |   |  |  |  |                             |
|                                   |  |  | /           |              |  |   |  |  |  |                             |
| 50-                               | ا أعادان   | ndhah  | /           | M2           | i dolohia  | L   |  |  |  |                             |
|                                   |  |  | /<br>       | M2           | - Marian   |   |  | to be a long to the long of th | <del>ng ng play a tanàn</del> a a phirit na May na <sub>P</sub> alais a ao na ao am  |                             |
| 50-                               |  |  | /           | M2           | indel pile   |   |  |  | or the state of th | e in a consideration of the |
| 50 -<br>40 -                      | and the state of t | The state of the s | /           | M2           | Walter Control of the | Marie Marie Marie   | and the first of the second of |  | of the conductive plant and the part of th |                             |
| 50-                               | And the second second  |  | /           | M2           | in the second  |   |  | n palniplanduplated  | of the first and | etre de la company          |
| 50 -<br>40 -                      | oranic brook did believe   |  | /           | M2           | THE PARTY OF THE P |   | o de la la de la company   | ter den de fait peut dépt de de  | <del>Na parada</del> n paradan para  |                             |
| 50-<br>40-<br>30-<br>20-<br>10-   | polonic de polonic de la companya d   |  | /           |              |  | Marie Constitution of the | artifikit dirak  | n panahajak medilipi Andi  | of the first and the first and the second of   |                             |
| 30 -<br>20 -                      | orthography deliberation of the second   |  |             | M2           |  |   | orthodological party   | to provincial annual spirit for the  | <del>ng ph</del> ri <del>ada phriadhaa dh</del> irpartaigh   | 2500                        |
| 30 -<br>20 -<br>10 -<br>2470      | requency   | Results  | Factor      |              | 5  | Detector  | Table  | Height   | ANT  | ı                           |
| 30-<br>20-<br>10-<br>0.0-<br>2470 | requency<br>//Hz)  | Results<br>(dBuV/m)  | Factor (dB) | 2483.        | 5<br>Frequency (MHz)   |   |  |  |  | ı                           |
| 30-<br>20-<br>10-<br>2470         |  |  |             | 2483.        | 5<br>Frequency (MHz)   |   | Table  | Height   |  | 2500<br>Verd                |

-12.21

ΑV

136.00

100

Horizontal

Pass

Page 27 of 44

Report No.: TW2503121-01E

Date: 2025-03-21



|                | Product:  |  | Wireless    | Speaker      |  | Detec                                    | tor  |   | Vertical   |                 |
|----------------|---|--|-------------|--------------|--|--|--|---|--|-----------------|
|                | Mode  | K  | Keeping Tr  | ansmitting   |  | Test Vo                                  | ltage  |   | DC3.7V   |                 |
| Те             | emperature  |  | 24 de       | g. C,        |  | Humidity                                 |  |   | 56% RH   |                 |
| To             | est Result:   |  | Pas         | SS           |  |  |  |   |  |                 |
| CC Part        | 15C Class B 1GHz-18GHz<br>+2-   | -2   |             |              |  |  |  |   |  |                 |
|                |   |  |             |              |  |  |  |   |  |                 |
| ,              | 90-   |  |             |              |  |  |  |   |  |                 |
| :              | 80-   |  | M1          |              |  |  |  |   |  |                 |
|                | 70-   |  |             |              |  |  |  |   |  |                 |
|                | 60-   |  | _/          |              |  |  |  |   |  |                 |
|                |   |  |             |              |  |  |  |   |  |                 |
|                |   |  | /           |              |  |  |  |   |  |                 |
|                | 50-   |  |             | M2           |  |  | . 1  |   |  |                 |
|                |   | adiabatica mada attacherida and  |             |              | orken by a law policy label belief by by           |  | and the seal pale while  | Manufacture of the collection | napodáldoca y lastificacióls.  | a de la la como |
| level (dBuV/m) | 50-   | ni dina sada di manda da mark  |             |              | osabisherphalabitishirk                            | nikkali kale ka as isil                  | lu katolican katolika  | الجو <mark>ل</mark> وميرية والجويزية المراجع  | المالمة والمعارض والمنافض والم | 1 - 1 - 1       |
| level (dBuV/m) | 40-   | ophida wake wake a she water she are   |             |              | ona hunakadadididik                                | Mikitali kada (kan santari               | lichatebrendigter bier   | Hadron de estada e  | <del>ndunisida</del> na padika bidik   | d III.          |
| level (dBuV/m) | 40- <b>x. s. d. b. y. b. y. s. d. y. s. d.</b> | ogladisinik sondik mili metanlikan per   |             |              | erahi sherahashiri dirip                           | niki selika da Maran sela                | والمراجع وا | illendarea de Apontileo da Leve   | randinide.   | of a pro-       |
| level (dBuV/m) | 40-20-20-   | ogindelsende von de konstruiten de en production   |             |              | oranda alamada da | nakkishi dada dipencera sada             | والمراجع وا | Head was de de actividit de pr  | pataniskona pateisetekk  | ald three       |
| level (dBuV/m) | 30 -  | oplantistication and the water the grant   |             | 2483.5       | equency (MHz)                                      | estabilitada <mark>dina 40. sal</mark> a | d <sub>Lin</sub> dador, gadigata, bian   | ne de de ace de la constante d  | rapovidens partins side  | 2500            |
| level (dBuV/m) | 40-11.11.11.11.11.11.11.11.11.11.11.11.11.  | Results  | Factor      | 2483.5       |  | Detector                                 | Table  | Height  | ANT  |                 |
| level (dBuV/m) | 40  | A STATE OF THE PROPERTY OF THE | Factor (dB) | 2483.5<br>Fr | equency (MHz)                                      | 770-4(10-47)                             |  |   |  | 2500            |
| level (dBuV/m) | 30-<br>20-<br>10-<br>2470   | Results  |             | 2483.5<br>Fr | equency (MHz)  Over Limit                          | 770-4(10-47)                             | Table  | Height  |  | 2500            |

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

2. The two modulation modes of GFSK, Pi/4D-QPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.

Date: 2025-03-21



# Page 28 of 44

## 8.0 Antenna Requirement

## **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB antenna with gain 2.499dBi maximum. It fulfills the requirement of this section.

Test Result: Pass

Date: 2025-03-21



Page 29 of 44

## 9.0 20dB Bandwidth Measurement

## **Test Configuration**



#### **Test Procedure**

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

#### Limit

N/A

Page 30 of 44

Report No.: TW2503121-01E

Date: 2025-03-21



#### **Test Result**

| Product:       | Wireless Speaker    | Test Mo                                 | ode: Keep transmitting  |
|----------------|---------------------|---|---|
| Mode           | Keeping Transmittir | ng Test Vol                             | ltage DC3.7V  |
| Temperature    | 24 deg. C,          | Humid                                   | lity 56% RH   |
| Test Result:   | Pass                | Detect                                  | tor PK  |
| 20dB Bandwidth | 882kHz              |   |   |
| Ref 10 dE      | Bm *Att 20 dB       | *RBW 30 kHz<br>*VBW 100 kHz<br>SWT 5 ms | Marker 1 [T1 ] -1.25 dBm 2.401868000 GHz                      |
| 10<br>_0       | 1                   |   | ndB [T1] 20.00 dB BW 882.0000000000 kHz Temp 1 [T1 nd8] A     |
|                |                     | V 172                                   | 2.401586000 GHz  Temp 2 [T1 ndb]  -21.31 dBm  2.402468000 GHz |
| 30             |                     | 1                                       |   |
| 40             |                     |   | 3DB   |
| -60            |                     |   | my  |
| 70             |                     |   |   |
| 80<br>90       |                     |   |   |
| Center 2.4     | 402 GHz 30          | 00 kHz/                                 | Span 3 MHz  |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 31 of 44

Report No.: TW2503121-01E

Date: 2025-03-21



| Product:       | ,       | Wireless Spea | ker      | Test                      | Mode:       |             | Keep tran | smitting |
|----------------|---------|---------------|----------|---------------------------|-------------|-------------|-----------|----------|
| Mode           | Ke      | eping Transm  | itting   | Test `                    | Voltage     |             | DC3       | .7V      |
| Temperature    |         | 24 deg. C,    |          | Hur                       | nidity      | 56% RH      |           |          |
| Test Result:   |         | Pass          |          | Det                       | tector      |             | PF        | ζ        |
| 20dB Bandwidth |         | 882kHz        |          |                           |             |             |           |          |
| Ref 10 d       | Bm      | *Att 20 c     | * VBW    | 30 kHz<br>100 kHz<br>5 ms |             | 1 [T1<br>-1 | .11 dBm   |          |
| 10             |         |               |          |                           | ndB [T      | .000000     | l I       |          |
| _0             |         |               | 1        |                           | Temp 1      | [T1 nd]     |           | A        |
| PK             |         |               | MA       |                           |             |             | .84 dBm   |          |
| <b>-10</b>     |         |               |          |                           | 2<br>Temp 2 | .440586     | 000 GHz   |          |
|                |         | <b>/</b> /    |          | η,                        |             | -20         | l         |          |
| 20             |         | T1/           |          | T2<br>VA                  | 2           | .441468     | 000 GHz   |          |
| 30             |         |               |          |                           | l.          |             |           |          |
| 40             | f       |               |          |                           | o de de     |             |           |          |
| -50            |         |               |          |                           | <b>√</b>    | 1           |           | 3DB      |
| White the      | F       |               |          |                           |             |             | mor       |          |
| 60             |         |               |          |                           |             |             |           |          |
| 70             |         |               |          |                           |             |             |           |          |
| 80             |         |               |          |                           |             |             |           |          |
| -90            |         |               |          |                           |             |             |           |          |
| Center 2.      | 441 GHz | <u> </u>      | 300 kHz/ |                           |             | Spa         | n 3 MHz   |          |

Date: 18.MAR.2025 13:58:03

Page 32 of 44

Report No.: TW2503121-01E

Date: 2025-03-21



| Product:      | Wi     | ireless Speaker  |        | Test                  | Mode:                  |                    | Keep tran     | smitting |
|---------------|--------|------------------|--------|-----------------------|------------------------|--------------------|---------------|----------|
| Mode          | Keep   | oing Transmittin | g      | Test V                | Voltage                |                    | DC3           | .7V      |
| Temperature   |        | 24 deg. C,       |        | Hun                   | nidity                 | 56% RH             |               | RH       |
| Test Result:  |        | Pass             |        | Det                   | ector                  |                    | Pk            | ζ        |
| 0dB Bandwidth |        | 846kHz           |        |                       |                        |                    |               |          |
| Ref 10 d      | Bm *   | Att 20 dB        |        | ) kHz<br>)O kHz<br>ms |                        | .479868            | .24 dBm       |          |
| _0            |        | 1                |        |                       |                        | .000000<br>[T1 nd] | 000 kHz<br>B] | A        |
| PK 1AXH10     |        | M                | W      |                       | 2<br><del>Temo 2</del> | -21<br>.479622     | .39 dBm       |          |
| 20            |        | TJ N             | 7      | <b>V</b> T2           | 2                      | -21<br>.480468     | .32 dBm       |          |
| 30            |        |                  |        | V                     |                        |                    |               |          |
| -40           | كممر   |                  |        |                       | May 1                  |                    |               |          |
|               | 1      |                  |        |                       |                        | m                  |               | 3DB      |
| -50<br>W      | f      |                  |        |                       |                        | Ì                  | my            |          |
| 60            |        |                  |        |                       |                        |                    |               |          |
| 70            |        |                  |        |                       |                        |                    |               |          |
| 80<br>90      |        |                  |        |                       |                        |                    |               |          |
| Center 2.     | 48 GHz | 300              | ) kHz/ |                       |                        | Spa                | n 3 MHz       |          |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 33 of 44

Report No.: TW2503121-01E

Date: 2025-03-21



| Product:                               | V       | Wireless Sp  | peaker   |          | Test N       | Iode:  | Ke                         | ep transm | itting |
|--|---------|--------------|----------|----------|--------------|--------|----------------------------|-----------|--------|
| Mode                                   | Ke      | eping Tran   | smitting |          | Test Voltage |        | DC3.7V                     |           |        |
| Temperature                            |         | 24 deg.      | C,       |          | Humidity     |        |                            | 56% RI    | I      |
| Test Result:                           |         | Pass         |          |          | Dete         | ctor   |                            | PK        |        |
| 20dB Bandwidth                         |         | 1.272M       | Hz       |          |              | -      |                            |           |        |
|  |         |              |          | *RBW 3   | O kHz        | Marker | 1 [T1                      | ]         |        |
| <b>(5</b> /                            |         |              |          | ★VBW 1   |              |        |                            | .31 dBm   |        |
| Ref 10 dE                              | 3m      | *Att 20      | 0 dB     | SWT 5    | ms           |        | 2.401868                   |           |        |
| 10                                     |         |              |          |          |              | ndB [1 | _                          | .00 dB    |        |
| _0                                     |         |              | 1        |          |              | Temp 1 | [11]                       |           | A      |
| PK                                     |         |              | I ∧      | $\wedge$ |              |        | 1                          | .12 dBm   |        |
| -10                                    |         |              | h        | مما      | Λ            | Temp 2 | . 401394                   | 000 GHz   |        |
|  |         | M            | <b>V</b> | Cu       | . W          |        | -21                        | .37 dBm   |        |
| 20                                     |         | ليو <u>ا</u> |          |          |              | T2 2   | .402666                    | 000 GHz   |        |
|  |         | <i>)</i>     |          |          |              | 7      |                            |           |        |
| 30                                     |         |              |          |          |              |        |                            |           |        |
|  |         |              |          |          |              | Į į    |                            |           |        |
| -40                                    | ~       |              |          |          |              | fry    |                            |           |        |
| <i>f</i>                               | my      |              |          |          |              | ,      | $\mathcal{N}_{\mathbf{x}}$ |           |        |
| ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~ | W       |              |          |          |              |        | <u> </u>                   | W .       | 3DB    |
|  |         |              |          |          |              |        |                            | 7         |        |
| 60                                     |         |              |          |          |              |        |                            |           |        |
| - 00                                   |         |              |          |          |              |        |                            |           |        |
| 70                                     |         |              |          |          |              |        |                            |           |        |
|  |         |              |          |          |              |        |                            |           |        |
|  |         |              |          |          |              |        |                            |           |        |
| -80                                    |         |              |          |          |              |        |                            |           |        |
| -90                                    |         |              |          |          |              |        |                            |           |        |
| Center 2.4                             | 102 GHz |              | 300      | kHz/     |              |        | Spa                        | n 3 MHz   |        |

Date: 18.MAR.2025 14:18:39

Page 34 of 44

Report No.: TW2503121-01E

Date: 2025-03-21



| Product:      | Wireless  | Speaker     | Test Mode:   | Keep transmitting                          |  |  |
|---------------|-----------|-------------|--------------|--|--|--|
| Mode          | Keeping T | ransmitting | Test Voltage | DC3.7V                                     |  |  |
| Temperature   | 24 de     | eg. C,      | Humidity     | 56% RH                                     |  |  |
| Test Result:  | Pa        | iss         | Detector     | PK   |  |  |
| OdB Bandwidth | 1.236     | 5MHz        |              |  |  |  |
| Ref 10 dE     | 3m *Att   | * VBW       | 100 kHz      | 1 [T1 ]<br>-1.17 dBm<br>.440868000 GHz     |  |  |
| 10            |           | 1           |              | .236000000 MHz                             |  |  |
| -0<br>-0      |           |             | Temp 1       | [T1 ndB] A<br>-21.24 dBm<br>.440394000 GHz |  |  |
| -10           | 712       |             | Temp 2       | (T1 ndb)<br>-21.42 dBm<br>.441630000 GHz   |  |  |
| 20            |           |             |              |  |  |  |
| -40           | - Lu      |             |              |  |  |  |
| ~~~           |           |             |              | TW JOB                                     |  |  |
| 60            |           |             |              |  |  |  |
| 70            |           |             |              |  |  |  |
|               |           |             |              |  |  |  |
| 80            |           |             |              |  |  |  |
| -90           |           |             |              |  |  |  |

Date: 18.MAR.2025 14:19:22

Page 35 of 44

Report No.: TW2503121-01E

Date: 2025-03-21



| Product:         |        | Wireless S  | peaker   |                       | Test     | Test Mode:   |                   | Keep transmitting  |     |  |
|------------------|--------|-------------|----------|-----------------------|----------|--------------|-------------------|--------------------|-----|--|
| Mode             | K      | eeping Trar | smitting |                       | Test '   | Test Voltage |                   | DC3                | .7V |  |
| Temperature      |        | 24 deg.     | C,       |                       | Humidity |              | 56% RH            |                    |     |  |
| Test Result:     |        | Pass        |          |                       | Det      | tector       |                   | PI                 | ζ   |  |
| 20dB Bandwidth   |        | 1.272M      | Hz       |                       |          |              |                   |                    | •   |  |
| Ref 10 d         | Bm     | *Att 2      | 0 dB     | *RBW 30 *VBW 10 SWT 5 | 0 kHz    |              | .479868<br>1] 20  | .29 dBm<br>000 GHz |     |  |
| -0<br>-10<br>-10 |        | ~           |          | 1                     | <u> </u> | Temp 1       | <del>[Tl nd</del> | .69 dBm<br>000 GHz | A   |  |
| -20              |        |             |          |                       |          | T2 2         |                   | .33 dBm            |     |  |
| -40              |        |             |          |                       |          |              | M                 | r,                 | 3DB |  |
| 60               |        |             |          |                       |          |              |                   | 1                  |     |  |
| 70<br>80         |        |             |          |                       |          |              |                   |                    |     |  |
| -90              |        |             |          |                       |          |              |                   |                    |     |  |
| Center 2.        | 48 GHz |             | 300      | kHz/                  |          |              |                   | an 3 MHz           |     |  |

Date: 18.MAR.2025 14:19:46

Report No.: TW2503121-01E Page 36 of 44

Date: 2025-03-21




#### 10.0 FCC ID Label

#### FCC ID: 2BK3OATTS147

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### Mark Location:

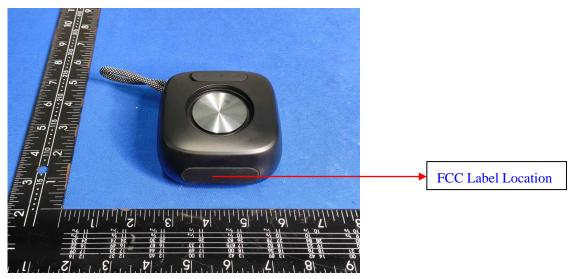

Page 37 of 44


Report No.: TW2503121-01E

Date: 2025-03-21



## 11.0 Photo of testing

#### 11.1 Conducted test View

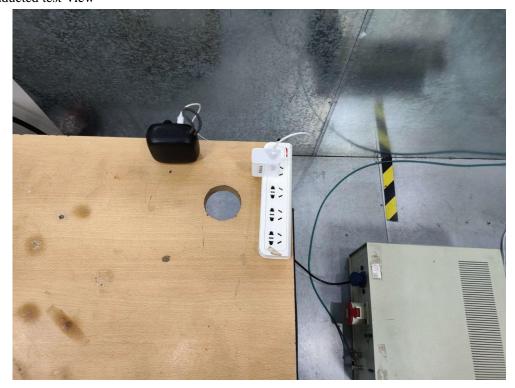

Page 38 of 44

Report No.: TW2503121-01E

Date: 2025-03-21



#### Radiated emission test view



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2025-03-21



## 11.2 Photographs – EUT

## Outside View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 40 of 44

Report No.: TW2503121-01E

Date: 2025-03-21



Outside View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 41 of 44 Report No.: TW2503121-01E

Date: 2025-03-21



Outside View




Page 42 of 44

Report No.: TW2503121-01E

Date: 2025-03-21



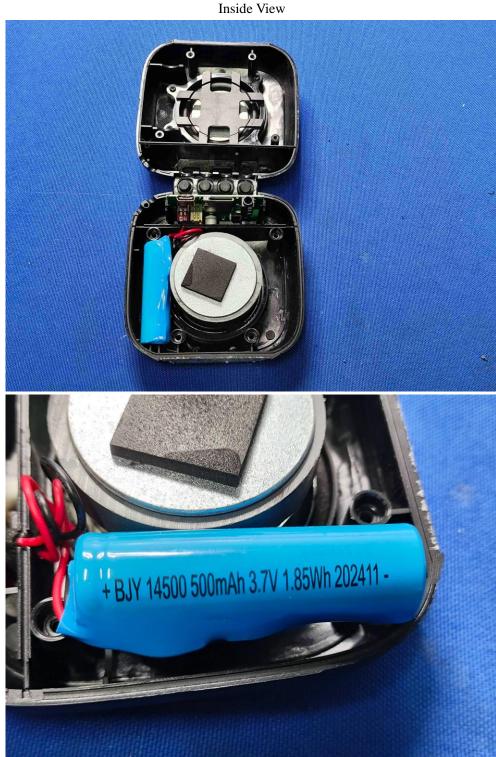

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into an will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 43 of 44

Report No.: TW2503121-01E

Date: 2025-03-21



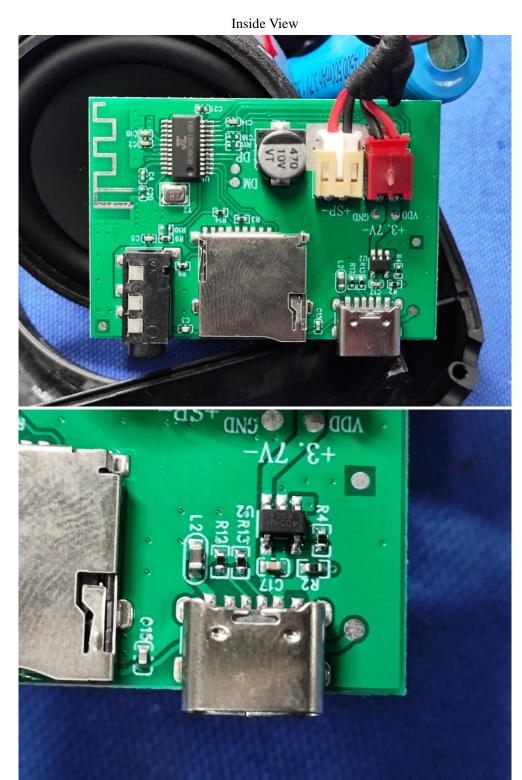

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: TW2503121-01E Page 44 of 44

Date: 2025-03-21



Inside View



-- End of the report--