



**313 West 12800 South, Suite 311**

**Draper, UT 84020**

**(801) 260-4040**

## **Test Report**

### **Certification**

<b>FCC ID</b>	YQN-B2-0027
<b>Equipment Under Test</b>	MultiRadlet
<b>Test Report Serial No</b>	V078122_02
<b>Dates of Test</b>	July 10th and 13th, 2023, November 26th and December 10-12, 2024, and January 2, 2025
<b>Report Issue Date</b>	March 14, 2025

<b>Test Specifications:</b>	<b>Applicant:</b>
FCC Part 15, Subpart C	ReconDynamics 8535 S 700 W #1A Sandy, UT 84070 U.S.A.



## Certification of Engineering Report

This report has been prepared by VPI Technology, Inc. to document compliance of the device described below with the requirements of Federal Communications Commission (FCC) Part 15, Subpart C. This report may be reproduced in full. Partial reproduction of this report may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

<b>Applicant</b>	ReconDynamics
<b>Manufacturer</b>	ReconDynamics
<b>Brand Name</b>	ReconDynamics
<b>Model Name</b>	MultiRadlet
<b>Model Number(s)</b>	P1-0110-00, P1-0110-01, P1-0110-02, P1-0110-03
<b>FCC ID</b>	YQN-B2-0027

On this 14<sup>th</sup> day of March 2025, I, individually and for VPI Technology, Inc., certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge, and are made in good faith.

Although NVLAP has accredited the VPI Technology, Inc. EMC testing facilities, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

VPI Technology, Inc.



Tested by: Benjamin N. Antczak



Reviewed by: Jason Stewart

Revision History		
Revision	Description	Date
01	Original Report Release	March 14, 2025
02	Adding family model numbers	March 21, 2025

## Table of Contents

1	Client Information.....	5
1.1	Applicant.....	5
1.2	Manufacturer.....	5
2	Equipment Under Test (EUT).....	6
2.1	Identification of EUT.....	6
2.2	Description of EUT.....	6
2.3	EUT and Support Equipment.....	7
2.4	Interface Ports on EUT.....	8
2.5	Modification Incorporated/Special Accessories on EUT.....	8
2.6	Deviation from Test Standard.....	8
3	Test Specification, Methods and Procedures.....	9
3.1	Test Specification.....	9
3.2	Methods & Procedures.....	9
3.3	Test Procedure.....	13
4	Operation of EUT During Testing.....	14
4.1	Operating Environment.....	14
4.2	Operating Modes.....	14
4.3	EUT Exercise Software.....	14
5	Summary of Test Results.....	15
5.1	FCC Part 15, Subpart C.....	15
5.2	Result.....	15
6	Measurements, Examinations and Derived Results.....	16
6.1	General Comments.....	16
6.2	Test Results.....	16
6.3	Sample Measurement Calculations.....	40
7	Test Procedures and Test Equipment.....	41
7.1	Conducted Emissions at Mains Ports.....	41
7.2	Direct Connection at the Antenna Port Test.....	42
7.3	Radiated Emissions.....	43
7.4	Equipment Calibration.....	44
7.5	Measurement Uncertainty.....	45
8	Photographs.....	46

## 1 Client Information

### 1.1 Applicant

<b>Company Name</b>	ReconDynamics 8535 S 700 W #1A Sandy, UT 84070 U.S.A.
<b>Contact Name</b>	Deric Eldredge
<b>Title</b>	Director of Hardware Engineering

### 1.2 Manufacturer

<b>Company Name</b>	ReconDynamics 8535 S 700 W #1A Sandy, UT 84070 U.S.A.
<b>Contact Name</b>	Deric Eldredge
<b>Title</b>	Director of Hardware Engineering

## 2 Equipment Under Test (EUT)

### 2.1 Identification of EUT

<b>Brand Name</b>	ReconDynamics
<b>Model Number</b>	MultiRadlet
<b>Serial Number</b>	Engineering Unit
<b>Dimensions (cm)</b>	3.0 x 3.0 x 0.5 (Module)
	4.0 x 4.0 x 0.6 (Module in Test Board)
	14.0 x 16.5 x 8.0 (Enclosure with Internal Wire-wound Antenna)
<b>Mfr. Declared Antenna Gain (dBi)</b>	8.0 (L-Com HG908UP Monopole Antenna) 8.0 (L-Com HG908P-RTP Patch Antenna) 2.2 (G-NiceRF SW915-TH12 Wound Wire Antenna)


### 2.2 Description of EUT

The MultiRadlet is a wireless module which transmits in the 902-928MHz band. Transmissions in this band can operate as FHSS, which was evaluated and found to be compliant as a §15.247 transmitter. For testing, EUT is powered by a CUI SWI6-3.3-N LPS. For testing the internal Wound Wire Antenna, the module was installed in a host PCB with the full RF path. All other evaluations were performed on the module on a Test Board. The following table contains the channel plans for each band. Evaluated frequencies are indicated by bold text.

#### 902-928 MHz FHSS Channel Plan

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
<i>1</i>	<b>902.2</b>	18	909	35	915.8	52	922.6
2	902.6	19	909.4	36	916.2	53	923
3	903	20	909.8	37	916.6	54	923.4
4	903.4	21	910.2	38	917	55	923.8
5	903.8	22	910.6	39	917.4	56	924.2
6	904.2	23	911	40	917.8	57	924.6
7	904.6	24	911.4	41	918.2	58	925
8	905	25	911.8	42	918.6	59	925.4
9	905.4	26	912.2	43	919	60	925.8
10	905.8	27	912.6	44	919.4	61	926.2
11	906.2	28	913	45	919.8	62	926.6
12	906.6	29	913.4	46	920.2	63	927
13	907	30	913.8	47	920.6	64	927.4
14	907.4	31	914.2	48	921	<b>65</b>	<b>927.8</b>

15	907.8	32	914.6	49	921.4		
16	908.2	<b>33</b>	<b>915</b>	50	921.8		
17	908.6	34	915.4	51	922.2		

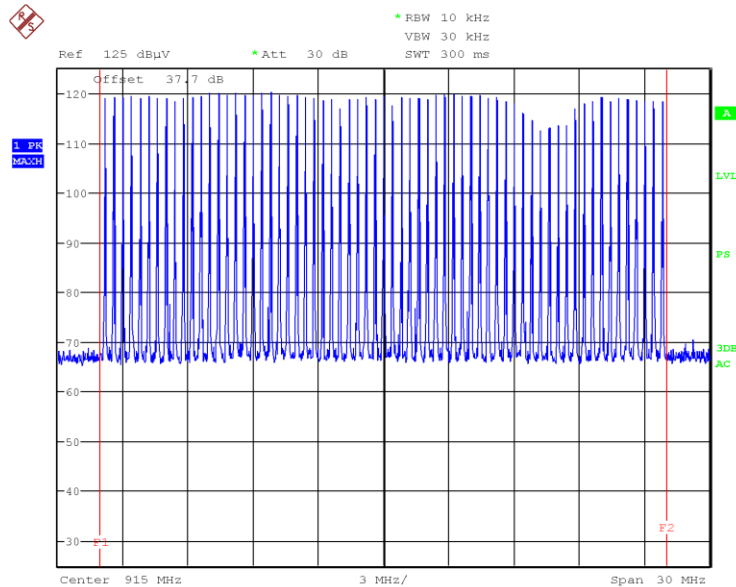

**Graph 1: EUT Channel Plot**

This report covers the FHSS transmitter circuitry of the device subject to FCC §15.247. EUT can also operate as a DTS transmitter in the 902-928MHz, and 2.4GHz ISM bands, evaluated separately in VPI Technology, Inc. report V078120\_01.

## 2.3 EUT and Support Equipment

The EUT and support equipment used during the test are listed below.

Brand Name Model Number Serial Number	Description	Name of Interface Ports / Interface Cables
BN: ReconDynamics MN: MultiRadlet (Note 1) SN: Engineering Unit	Wireless Module	See Section 2.4
BN: CUI Inc MN: SWI6-3.3-N SN: N/A	LPS	DC Input / Barrel Plug and Direct Solder
BN: Fujitsu MN: NH532 SN: N/A	Laptop PC for Radio Control	Debug Serial / Custom RJ45 and Direct Solder

Notes: (1) EUT

(2) Interface port connected to EUT (See Section 2.4)

The support equipment listed above was not modified in order to achieve compliance with this standard.

## **2.4 Interface Ports on EUT**

There are no interface ports on the EUT. Control and DC power wires were soldered directly to the EUT.

## **2.5 Modification Incorporated/Special Accessories on EUT**

The following modifications were made to the EUT by the Client during testing to comply with the specification. This report is not complete without an accompanying signed attestation, that the product will have all of the documented modifications incorporated into the product when manufactured and placed on the market.

- While transmitting as FHSS in the 902-928MHz band, EUT transmit set level shall be 15 dBm or less.

## **2.6 Deviation from Test Standard**

There were no deviations from the test specification.



### 3 Test Specification, Methods and Procedures

#### 3.1 Test Specification

<b>Title</b>	FCC PART 15, Subpart C (47 CFR 15) 15.203, 15.207, and 15.247 Limits and methods of measurement of radio interference characteristics of radio frequency devices.
<b>Purpose of Test</b>	The tests were performed to demonstrate initial compliance

#### 3.2 Methods & Procedures

##### 3.2.1 §15.203 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

##### 3.2.2 §15.207 Conducted Limits

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50*	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\*Decreases with the logarithm of the frequency.

**Table 1: Limits for conducted emissions at mains ports of Class B ITE.**

##### 3.2.3 §15.247 Operation within the bands 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz

- Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions.

- 1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400 – 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.
    - i. For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
    - ii. Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.
    - iii. Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.
  - 2) Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
- b) The maximum peak output power of the intentional radiator shall not exceed the following:
- 1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
  - 2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.
  - 3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725 – 5850 MHz bands: 1 watt. As an alternative to a peak power measurement,

compliance with the Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

- 4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- c) Operation with directional antenna gains greater than 6 dBi.
- 1) Fixed point-to-point operation:
    - i. Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.
    - ii. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.
    - iii. Fixed, point-to-point operation, as used in paragraphs (b)(4)(i) and (b)(4)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.
  - 2) In addition to the provisions in paragraphs (b)(1), (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:
    - i. Different information must be transmitted to each receiver.
    - ii. If the transmitter employs an antenna system that emits multiple directional beams but does not emit multiple directional beams

simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna /antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

- A. The directional gain shall be calculated as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or staff having the highest gain.
  - B. A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.
- iii. If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.
- iv. Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.
- d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
- e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
- f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. The digital

modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

- g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.
- h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.
- i) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Note: Spread spectrum systems are sharing these bands on a noninterference basis with systems supporting critical Government requirements that have been allocated the usage of these bands, secondary only to ISM equipment operated under the provisions of Part 18 of this Chapter. Many of these Government systems are airborne radiolocation systems that emit a high EIRP which can cause interference to other users. Also, investigations of the effect of spread spectrum interference to U. S. Government operations in the 902-928 MHz band may require a future decrease in the power limits allowed for spread spectrum operation.

### 3.3 Test Procedure

VPI Technology, Inc. is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Lab Code: 100272-0, which is effective until September 30, 2025. VPI Technology, Inc. carries FCC Accreditation Designation Number US5263. VPI Technology main office is located at 313 W 12800 S, Suite 311, Draper, UT 84020. The testing was performed according to the procedures in ANSI C63.10-2013, KDB 558074, and 47 CFR Part 15.

## 4 Operation of EUT During Testing

### 4.1 Operating Environment

Power Supply	3.3VDC from 120 VAC
AC Mains Frequency	N/A from 60 Hz

### 4.2 Operating Modes

While transmitting in the 900MHz band from the internal wound-wire antenna, the transmitter was tested in a single orientation per the ReconDynamics' assurance that a single installation orientation is used with the 900MHz radio (with the exception of fundamental frequency measurements, which were tested in three orthogonal orientations).

While transmitting from external antennas, the transmitters was tested in a single orientation relative to the single orientation of the antennas (see reference photos in Section 8).

All antennas and bands were tested while in a constant transmit mode at the upper, middle, and lower channels. The AC mains voltage to the AC adapter was varied as required by §15.31(e) with no change seen in the voltage supplied to the transmitter or in transmitter characteristics

### 4.3 EUT Exercise Software

Internal ReconDynamics firmware was used to exercise the EUT.

## 5 Summary of Test Results

### 5.1 FCC Part 15, Subpart C

#### 5.1.1 Summary of Tests

Section	Environmental Phenomena	Frequency Range (MHz)	Result
15.203	Antenna Requirements	Structural requirement	Complied
15.207	Conducted Disturbance at Mains Ports	0.15 to 30	Complied
15.247(a)	Channel Separation	902-928	Complied
15.247(a)	20 dB Bandwidth	902-928	Complied
15.247(a)	Time of Occupancy	902-928	Complied
15.247(b)	Peak Output Power	902-928	Complied
15.247(d)	Radiated Spurious Emissions	30 – 10000	Complied

### 5.2 Result

In the configuration tested, the EUT complied with the requirements of the specification.



## 6 Measurements, Examinations and Derived Results

### 6.1 General Comments

This section contains the test results only. Details of the test methods used and a list of the test equipment used during the measurements can be found in Section 7 of this report.

When calculations in this report require EUT antenna gains, those values have been provided by the manufacturer unless otherwise noted.

### 6.2 Test Results

#### 6.2.1 §15.203 Antenna Requirements

The EUT can transmit on one antenna at a time. It contains an internal Helical antenna and provisions for an external antenna. EUT was tested with two external antenna types: an L-Com HG908P-RTP patch antenna with a manufacturer declared gain of 8dBi and an L-Com HG908UP monopole antenna with a manufacturer declared gain of 8dBi. The internal antenna is a wound wire G-NiceRF SW915-TH12 and has a manufacturer declared gain of 2.2dBi.

External antenna gains exceed 6dBi by 2dB, therefore the conducted limit for use of those antennas is reduced by 2dB.

#### Result

The EUT complied with the specification.

#### 6.2.2 Conducted Emissions at Mains Ports Data (Hot Lead)

Frequency (MHz)	Detector	Receiver Reading (dBμV)	Correction Factor (dB)	Measured Level (dBμV)	Class B Limit (dBμV)	Margin (dB)
0.18	Peak (Note 1)	29.6	9.9	39.5	54.3	-14.8
0.41	Peak (Note 1)	24.7	9.9	34.6	47.6	-13.0
0.57	Peak (Note 1)	20.8	10.0	30.8	46.0	-15.2
0.67	Peak (Note 1)	21.1	10.0	31.1	46.0	-15.0
1.8	Peak (Note 1)	18.8	10.0	28.9	46.0	-17.2
4.2	Peak (Note 1)	17.5	10.2	27.7	46.0	-18.3
7.0	Peak (Note 1)	14.4	10.4	24.7	50.0	-25.3
18.3	Peak (Note 1)	13.4	11.1	24.5	50.0	-25.6
Note 1: The reference detector used for the measurements was Quasi-Peak or Peak and the data was compared to the average limit; therefore, the EUT was deemed to meet both the average and quasi-peak limits.						

#### 6.2.3 Conducted Emissions at Mains Ports Data (Neutral Lead)

Frequency (MHz)	Detector	Receiver Reading (dBμV)	Correction Factor (dB)	Measured Level (dBμV)	Class B Limit (dBμV)	Margin (dB)
0.16	Peak (Note 1)	31.7	10.0	41.7	55.5	-13.8
0.43	Peak (Note 1)	22.4	10.0	32.5	47.3	-14.9
0.62	Peak (Note 1)	19.8	10.0	29.8	46.0	-16.2



Frequency (MHz)	Detector	Receiver Reading (dBμV)	Correction Factor (dB)	Measured Level (dBμV)	Class B Limit (dBμV)	Margin (dB)
0.94	Peak (Note 1)	17.3	10.1	27.3	46.0	-18.7
2.6	Peak (Note 1)	15.8	10.1	26.0	46.0	-20.1
4.6	Peak (Note 1)	16.8	10.3	27.1	46.0	-18.9
16.3	Peak (Note 1)	12.5	11.0	23.5	50.0	-26.5
24.4	Peak (Note 1)	12.4	11.6	24.1	50.0	-25.9
<p>Note 1: The reference detector used for the measurements was Quasi-Peak or Peak and the data was compared to the average limit; therefore, the EUT was deemed to meet both the average and quasi-peak limits.</p> <p>Note 2: The reference detector used for the measurements was quasi-peak and average and the data was compared to the respective limits.</p>						

## Result


The EUT complied with the specification limit by a margin of 13.0 dB.

#### 6.2.4 §15.247(a) Emissions Bandwidth


Frequency (MHz)	Emissions 20 dB bandwidth (kHz)
902.2	23.7
915.0	23.7
927.8	24.4

#### Result


In the configuration tested, the 20 dB bandwidth was less than 25 kHz; therefore, the system shall have a minimum carrier frequency separation of 25kHz. The 20 dB bandwidth was also less than 250kHz, therefore the system shall have at least 50 hopping frequencies and average dwell time shall not be greater than 0.4 seconds in any 20 second period.

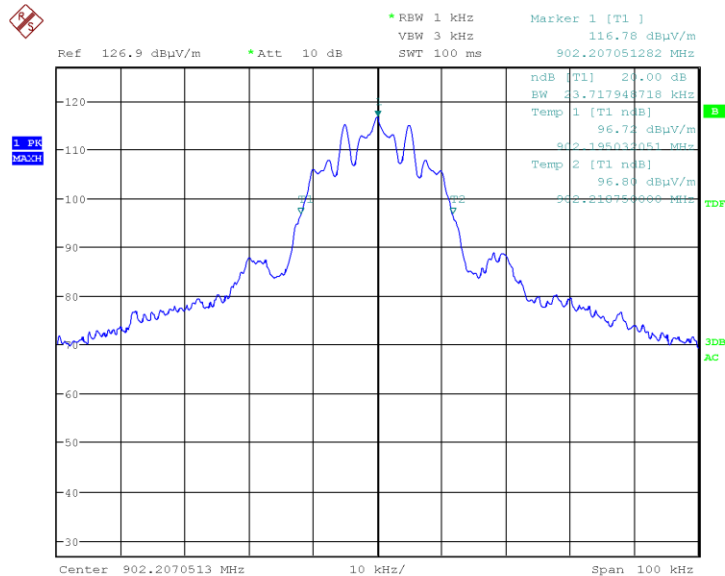

Graph 2: Lowest Channel Bandwidth

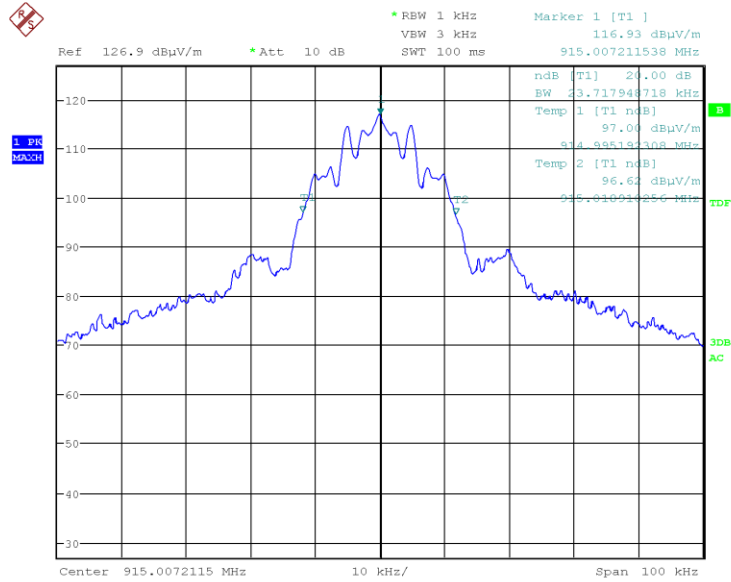


Graph 3: Middle Channel Bandwidth

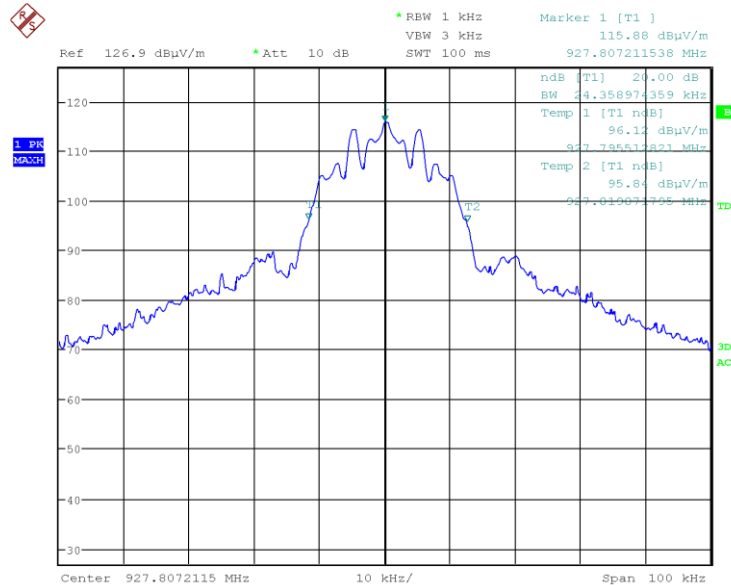


Graph 4: Highest Channel Bandwidth

## 6.2.5 §15.247(a) Channel Map and Separation


The EUT uses 65 channels that have a bandwidth less than 250 kHz; therefore, the EUT must have an average time of occupancy on any frequency that is no greater than 0.4 seconds in a period of 10 seconds. See the plots and calculations below.

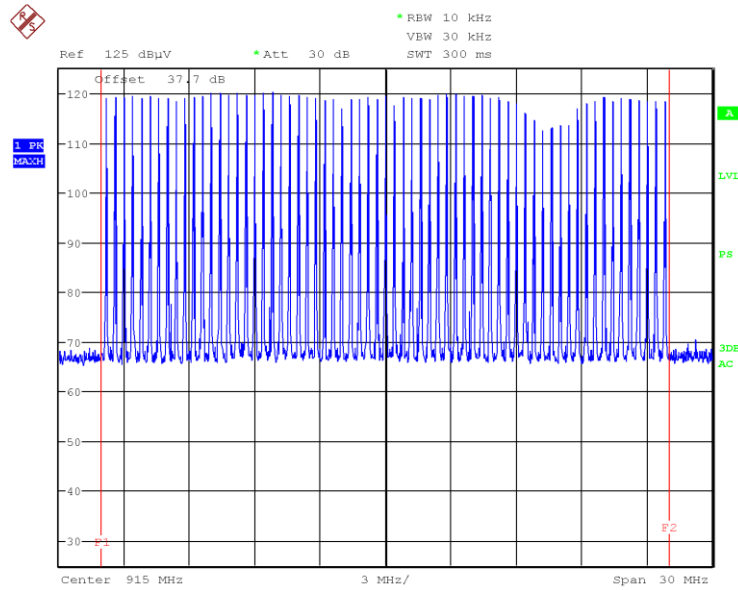


**Graph 5: Full Authorized Band Channel Hopping Map**

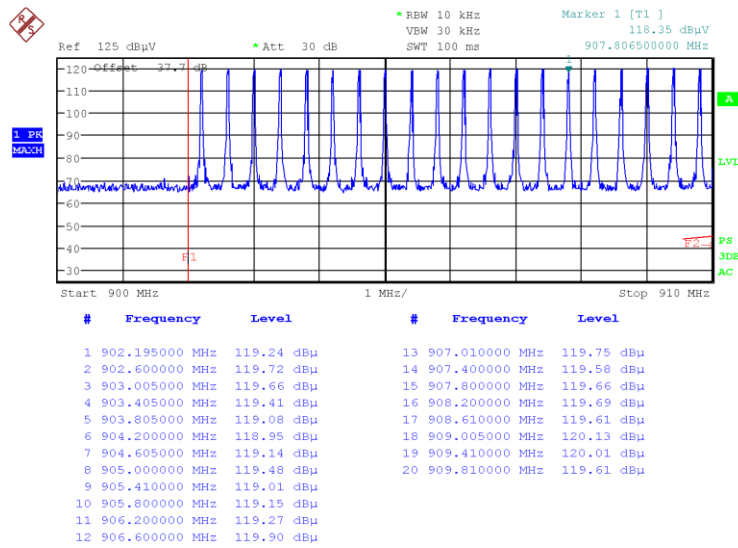


**Graph 6: Hopping Mode Channels from 900MHz to 910MHz Containing 20 Channels**

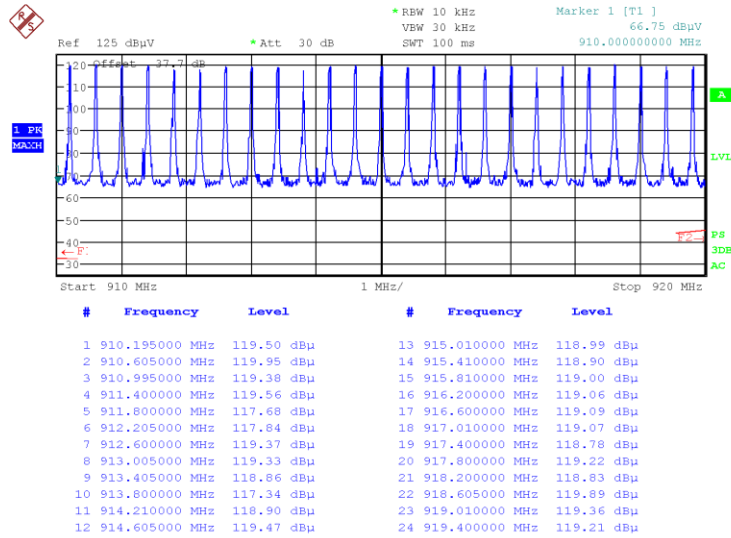

Graph 7: Hopping Mode Channels from 910MHz to 920MHz Containing 25 Channels

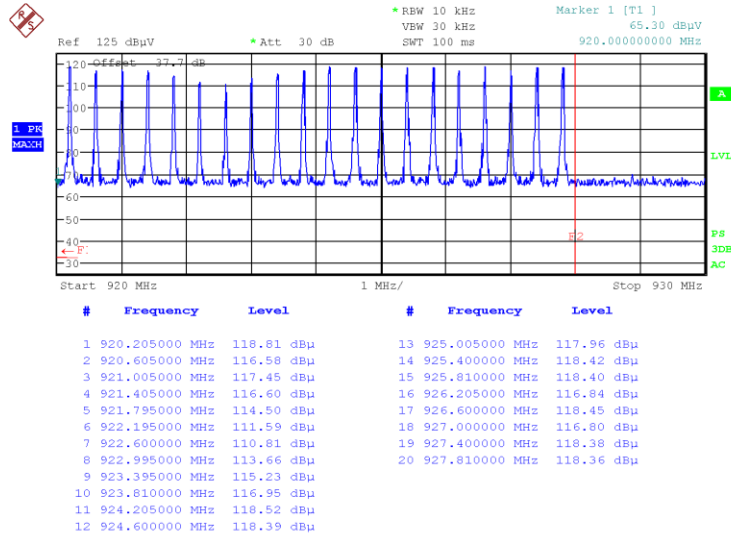

Graph 8: Hopping Mode Channels from 920MHz to 930MHz Containing 20 Channels

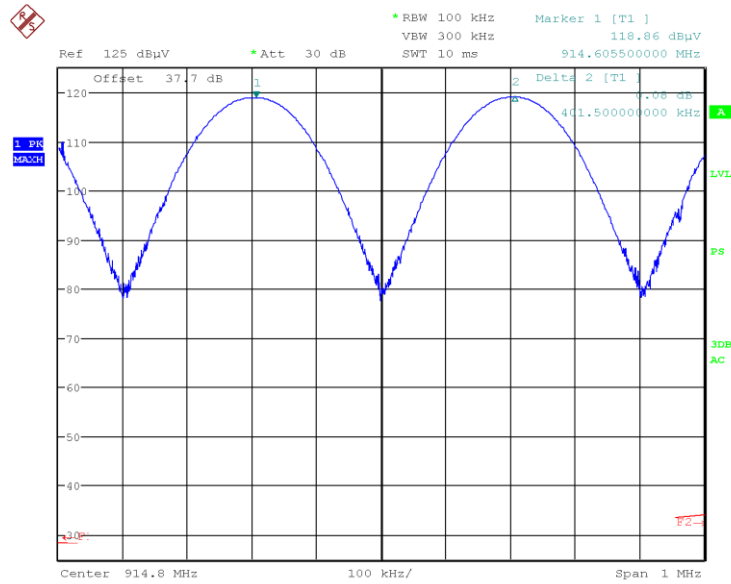


**Graph 9: Hopping Mode Channel Separation is 401.5 kHz**


## Result

In the configuration tested, the system has over 50 hopping channels and carrier frequency separation greater than 25kHz. Therefore, the EUT complied with the requirements of the specification.

### 6.2.6 §15.247(a) Time of Occupancy

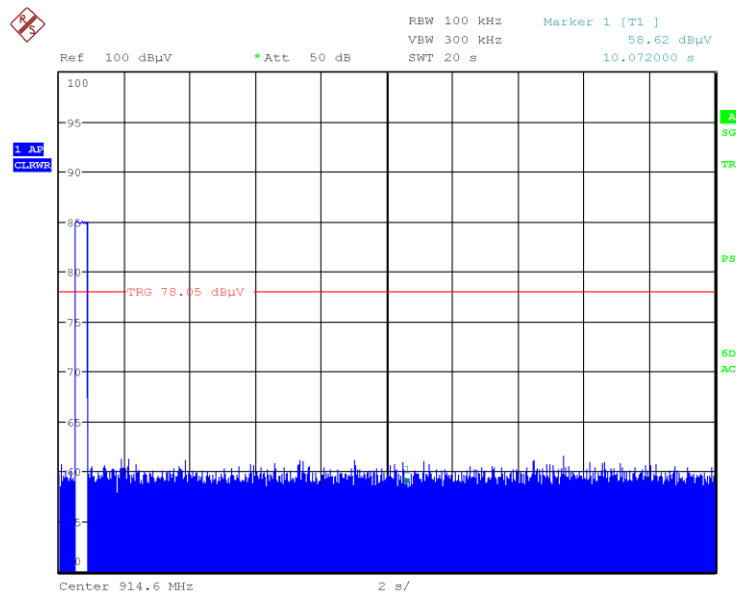

**Graph 10: Hopping Mode Timing, Showing a Single Hit on 914.6 MHz in 10 Seconds**

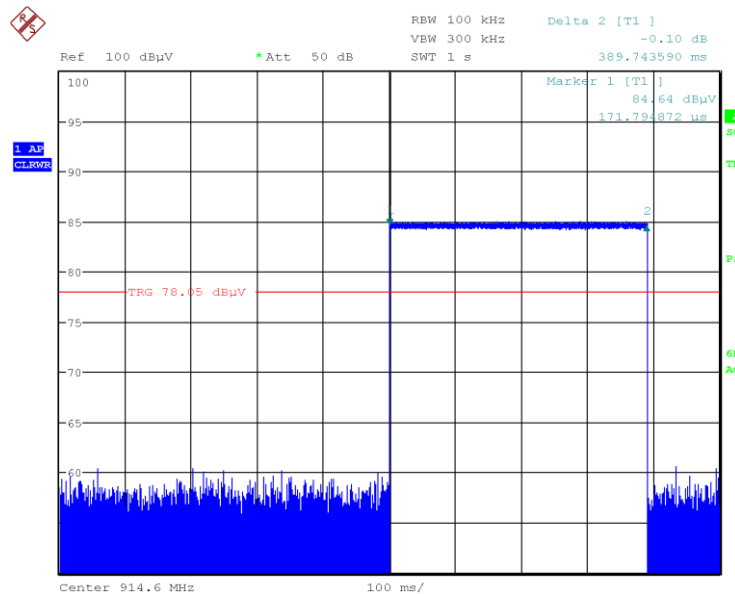

### Graph 11: Hopping Mode Timing, Showing a 398ms Dwell Time per Channel

## Result

In the configuration tested, the system dwells for no more than 0.4 seconds per 20 second period. Therefore, the EUT complied with the requirements of the specification.


### 6.2.7 §15.247(b)(3) Peak Output Power

The maximum peak RF Conducted output power measured for this device was 17.3 dBm or 53.7 mW. The limit is 30 dBm or 1 Watt when using antennas with 6 dBi or less gain. The limit is reduced by an amount equal to the antenna gain above 6 dBi. The worst-case antenna has a manufacturer reported gain of 8 dBi, which reduces the conducted output power limit by 2dB. Therefore, the limit is 28dBm, or 631.0 mW.


Frequency (MHz)	Measured Output Power (dBm)	Output Power (mW)
902.2	17.3	53.7
915.0	16.9	49.0
927.8	16.1	40.7

## Result

In the configuration tested, the RF peak output power was less than 631.0 mW; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).

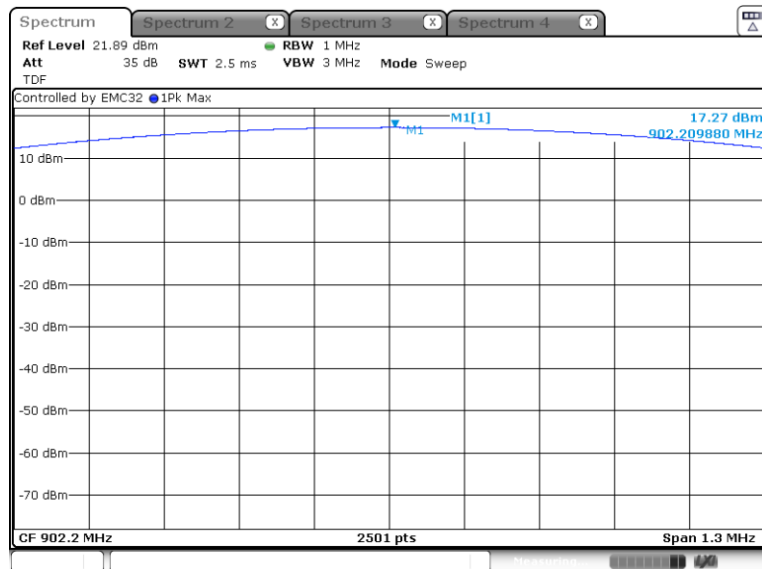


Graph 12: Lowest Channel Output Power Plot

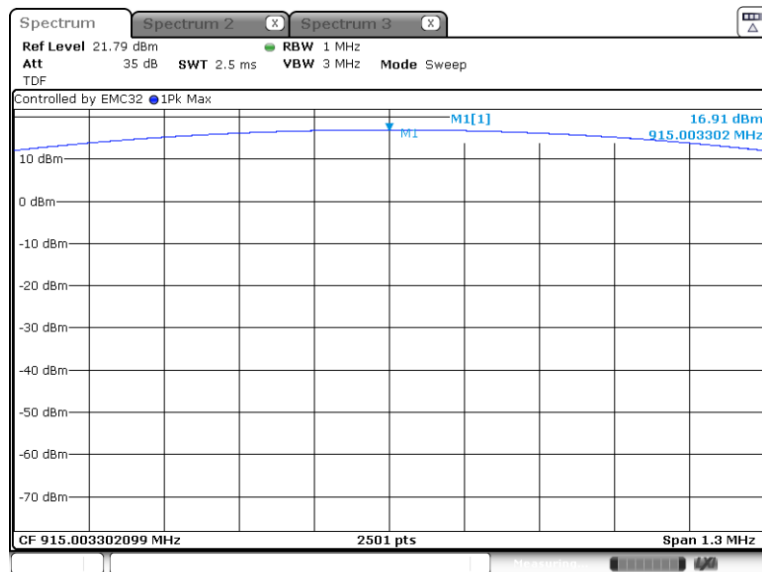

Graph 13: Middle Channel Output Power



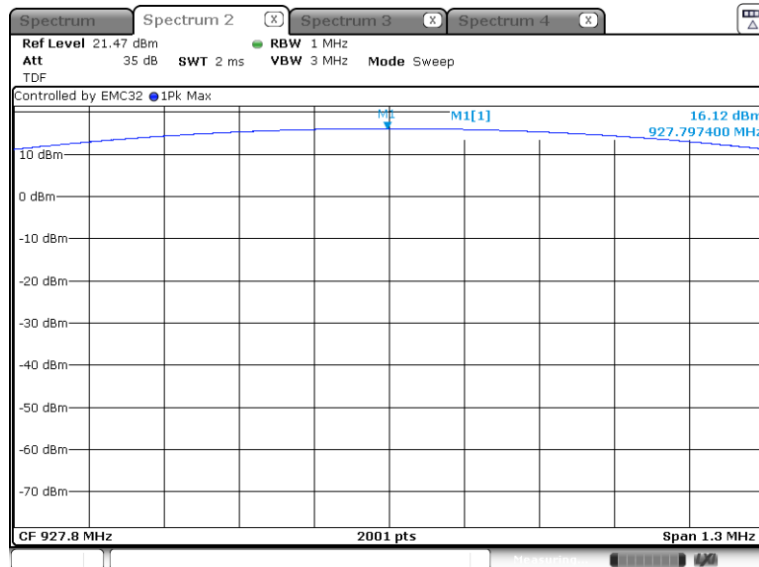

Graph 14: Highest Channel Output Power Plot

## 6.2.8 §15.247(d) Spurious Emissions

### Radiated Spurious Emissions, Including those in the Restricted Bands of §15.205

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental emission was investigated to measure any radiated emissions in the restricted bands. The following tables show measurements of any emission that fell into the restricted bands of §15.205. The tables show the worst-case emission measured from the EUT. For frequencies above 18.0 GHz, a measurement distance of 1 meter was used. The noise floor was a minimum of 6 dB below the limit. The emissions in the restricted bands must meet the limits specified in §15.209. Tabular data for each of the spurious emissions is shown below for each of the units per antenna type. Plots of the band edges are also shown.

### Result

All emissions in the restricted bands of §15.205 met the limits specified in §15.209; therefore, the EUT complies with the specification.

### Internal Helical Antenna (G-NiceRF SW915-TH12)

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1804.3	Peak	Vertical	55.2	-4.7	50.5	79.5	-29.0
1804.5	Average	Vertical	54.8	-4.7	50.1	59.5	-9.4
1804.4	Peak	Horizontal	59.8	-4.7	55.1	79.5	-24.4
1804.4	Average	Horizontal	59.4	-4.7	54.7	59.5	-4.8
2706.5	Peak	Vertical	56.9	-1.2	55.8	79.5	-23.7
2706.7	Average	Vertical	56.5	-1.2	55.3	59.5	-4.2
2706.6	Peak	Horizontal	59.7	-1.2	58.5	79.5	-21.0
2706.6	Average	Horizontal	59.5	-1.2	58.3	59.5	-1.2

3608.9	Peak	Vertical	53.2	2.8	56.0	79.5	-23.5
3608.9	Average	Vertical	52.7	2.8	55.4	59.5	-4.1
3608.8	Peak	Horizontal	53.0	2.8	55.7	79.5	-23.8
3608.9	Average	Horizontal	52.4	2.8	55.1	59.5	-4.4
4513.4	Peak	Vertical	38.6	4.8	43.4	79.5	-36.1
4511.0	Average	Vertical	36.2	4.8	41.0	59.5	-18.5
4511.8	Peak	Horizontal	38.4	4.8	43.2	79.5	-36.3
4510.8	Average	Horizontal	36.3	4.8	41.0	59.5	-18.5
5413.4	Peak	Vertical	41.9	7.4	49.3	79.5	-30.2
5413.4	Average	Vertical	40.6	7.4	48.0	59.5	-11.5
5413.1	Peak	Horizontal	41.4	7.4	48.8	79.5	-30.7
5413.3	Average	Horizontal	40.3	7.4	47.8	59.5	-11.7
6315.4	Peak	Vertical	38.6	8.5	47.1	79.5	-32.4
6315.5	Average	Vertical	36.4	8.5	45.0	59.5	-14.5
6315.6	Peak	Horizontal	38.9	8.5	47.5	79.5	-32.0
6315.5	Average	Horizontal	37.1	8.5	45.6	59.5	-13.9
7223.4	Peak	Vertical	35.3	10.6	45.8	79.5	-33.7
7219.7	Average	Vertical	29.0	10.6	39.6	59.5	-19.9
7218.5	Peak	Horizontal	35.1	10.6	45.6	79.5	-33.9
7217.6	Average	Horizontal	28.8	10.5	39.4	59.5	-20.1
8119.2	Peak	Vertical	34.5	11.6	46.1	79.5	-33.4
8125.3	Average	Vertical	28.3	11.6	39.8	59.5	-19.7
8128.3	Peak	Horizontal	34.9	11.6	46.4	79.5	-33.1
8119.9	Average	Horizontal	28.6	11.6	40.2	59.5	-19.3
9029.2	Peak	Vertical	35.3	12.6	47.9	79.5	-31.6
9019.0	Average	Vertical	28.7	12.6	41.3	59.5	-18.2
9025.0	Peak	Horizontal	35.0	12.6	47.5	79.5	-32.0
9013.7	Average	Horizontal	28.2	12.6	40.8	59.5	-18.7

**Table 2: Transmitting at the Lowest Frequency (G-NiceRF SW915-TH12)**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1829.9	Peak	Vertical	51.7	-4.6	47.1	79.5	-32.4
1830.0	Average	Vertical	51.2	-4.6	46.6	59.5	-12.9
1830.1	Peak	Horizontal	58.1	-4.6	53.5	79.5	-26.0
1830.1	Average	Horizontal	57.7	-4.6	53.1	59.5	-6.4
2745.0	Peak	Vertical	50.9	-1.1	49.8	79.5	-29.7

2745.0	Average	Vertical	50.0	-1.1	48.9	59.5	-10.6
2745.0	Peak	Horizontal	53.6	-1.1	52.5	79.5	-27.0
2745.0	Average	Horizontal	53.0	-1.1	51.9	59.5	-7.6
3660.2	Peak	Vertical	50.9	3.1	54.0	79.5	-25.5
3660.0	Average	Vertical	50.4	3.1	53.5	59.5	-6.0
3660.0	Peak	Horizontal	50.4	3.1	53.5	79.5	-26.0
3660.0	Average	Horizontal	49.8	3.1	53.0	59.5	-6.5
4575.0	Peak	Vertical	40.8	4.9	45.7	79.5	-33.8
4575.0	Average	Vertical	39.7	4.9	44.6	59.5	-14.9
4575.2	Peak	Horizontal	40.0	4.9	44.9	79.5	-34.6
4575.3	Average	Horizontal	39.1	4.9	44.0	59.5	-15.5
5489.8	Peak	Vertical	41.0	7.6	48.7	79.5	-30.8
5490.3	Average	Vertical	39.6	7.6	47.2	59.5	-12.3
5490.1	Peak	Horizontal	39.6	7.6	47.2	79.5	-32.3
5490.1	Average	Horizontal	38.4	7.6	46.0	59.5	-13.5
6404.9	Peak	Vertical	37.5	8.5	46.0	79.5	-33.5
6405.4	Average	Vertical	36.2	8.5	44.7	59.5	-14.8
6405.1	Peak	Horizontal	39.7	8.5	48.1	79.5	-31.4
6405.1	Average	Horizontal	37.5	8.5	46.0	59.5	-13.5
7314.3	Peak	Vertical	35.5	11.1	46.6	79.5	-32.9
7328.5	Average	Vertical	28.7	11.1	39.8	59.5	-19.7
7326.1	Peak	Horizontal	35.5	11.1	46.6	79.5	-32.9
7313.3	Average	Horizontal	29.2	11.1	40.3	59.5	-19.2
8232.6	Peak	Vertical	35.1	11.8	46.9	79.5	-32.6
8238.5	Average	Vertical	28.9	11.8	40.6	59.5	-18.9
8235.2	Peak	Horizontal	35.5	11.8	47.2	79.5	-32.3
8235.0	Average	Horizontal	29.7	11.8	41.5	59.5	-18.0
9147.4	Peak	Vertical	35.9	12.4	48.3	79.5	-31.2
9147.0	Average	Vertical	29.0	12.4	41.4	59.5	-18.1
9146.3	Peak	Horizontal	34.9	12.4	47.3	79.5	-32.2
9155.2	Average	Horizontal	29.2	12.4	41.6	59.5	-17.9


**Table 3: Transmitting at the Middle Frequency (G-NiceRF SW915-TH12)**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1855.6	Peak	Vertical	47.7	-4.5	43.3	79.5	-36.2
1855.6	Average	Vertical	47.0	-4.5	42.5	59.5	-17.0


1855.5	Peak	Horizontal	48.0	-4.5	43.5	79.5	-36.0
1855.6	Average	Horizontal	47.2	-4.5	42.7	59.5	-16.8
2783.3	Peak	Vertical	55.7	-0.9	54.8	79.5	-24.7
2783.4	Average	Vertical	55.1	-0.9	54.2	59.5	-5.3
2783.4	Peak	Horizontal	59.6	-0.9	58.7	79.5	-20.8
2783.4	Average	Horizontal	59.5	-0.9	58.6	59.5	-0.9
3711.1	Peak	Vertical	52.6	3.4	56.0	79.5	-23.5
3711.1	Average	Vertical	51.9	3.4	55.3	59.5	-4.2
3711.1	Peak	Horizontal	50.6	3.4	54.0	79.5	-25.5
3711.1	Average	Horizontal	49.9	3.4	53.3	59.5	-6.2
4638.8	Peak	Vertical	39.9	5.2	45.0	79.5	-34.5
4639.0	Average	Vertical	38.4	5.2	43.5	59.5	-16.0
4639.1	Peak	Horizontal	38.6	5.2	43.8	79.5	-35.7
4639.4	Average	Horizontal	36.4	5.2	41.6	59.5	-17.9
5571.4	Peak	Vertical	38.0	7.5	45.5	79.5	-34.0
5569.4	Average	Vertical	35.4	7.5	42.9	59.5	-16.6
5566.6	Peak	Horizontal	37.7	7.5	45.2	79.5	-34.3
5566.3	Average	Horizontal	35.3	7.5	42.8	59.5	-16.7
6487.2	Peak	Vertical	36.8	8.4	45.2	79.5	-34.3
6496.1	Average	Vertical	34.8	8.4	43.2	59.5	-16.3
6494.7	Peak	Horizontal	37.0	8.4	45.4	79.5	-34.1
6494.7	Average	Horizontal	34.8	8.4	43.2	59.5	-16.3
7430.3	Peak	Vertical	34.8	11.2	46.0	79.5	-33.5
7425.7	Average	Vertical	28.6	11.3	39.8	59.5	-19.7
7427.3	Peak	Horizontal	35.5	11.3	46.7	79.5	-32.8
7421.6	Average	Horizontal	28.5	11.3	39.8	59.5	-19.7
8341.0	Peak	Vertical	35.9	12.0	47.9	79.5	-31.6
8359.2	Average	Vertical	28.4	12.0	40.5	59.5	-19.0
8350.2	Peak	Horizontal	35.2	12.0	47.2	79.5	-32.3
8350.2	Average	Horizontal	28.9	12.0	40.9	59.5	-18.6
9274.6	Peak	Vertical	36.2	12.5	48.6	79.5	-30.9
9275.7	Average	Vertical	29.5	12.5	42.0	59.5	-17.5
9277.4	Peak	Horizontal	35.6	12.5	48.1	79.5	-31.4
9278.9	Average	Horizontal	28.8	12.5	41.2	59.5	-18.3

**Table 4: Transmitting at the Highest Frequency (G-NiceRF SW915-TH12)**

No other emissions were seen in the restricted bands

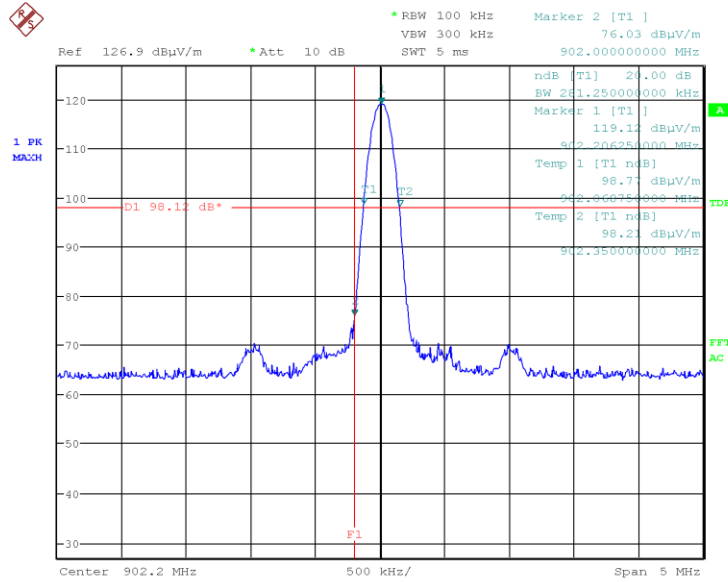

**Graph 15: Radiated Lower Band Edge Plot (G-NiceRF SW915-TH12)**

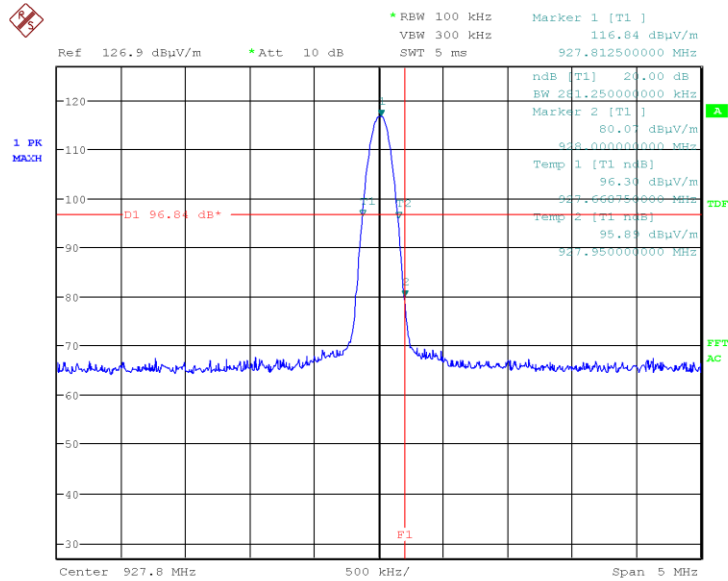

**Graph 16: Radiated Upper Band Edge Plot (G-NiceRF SW915-TH12)**

**External Monopole Antenna (L-Com HG908UP)**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1804.5*	Peak	Vertical	67.2	-4.7	62.5	100.2	-37.7
1804.4*	Average	Vertical	67.1	-4.7	62.4	80.2	-17.8
1804.4*	Peak	Horizontal	70.6	-4.7	65.9	100.2	-34.3
1804.4*	Average	Horizontal	70.6	-4.7	65.9	80.2	-14.3
2706.6	Peak	Vertical	58.0	-1.2	56.8	79.5	-22.7
2706.6	Average	Vertical	57.8	-1.2	56.7	59.5	-2.8
2706.6	Peak	Horizontal	57.5	-1.2	56.3	79.5	-23.2
2706.6	Average	Horizontal	57.2	-1.2	56.0	59.5	-3.5
3608.7	Peak	Vertical	52.3	2.8	55.0	79.5	-24.5
3608.9	Average	Vertical	51.5	2.8	54.3	59.5	-5.2
3608.8	Peak	Horizontal	56.8	2.8	59.6	79.5	-19.9
3608.8	Average	Horizontal	56.6	2.8	59.3	59.5	-0.2
4511.0	Peak	Vertical	44.6	4.8	49.4	79.5	-30.1
4511.1	Average	Vertical	43.9	4.8	48.7	59.5	-10.8
4511.1	Peak	Horizontal	45.4	4.8	50.2	79.5	-29.3
4511.1	Average	Horizontal	44.2	4.8	49.0	59.5	-10.5
5413.4	Peak	Vertical	39.6	7.4	47.0	79.5	-32.5
5413.1	Average	Vertical	38.2	7.4	45.6	59.5	-13.9
5413.3	Peak	Horizontal	43.6	7.4	51.0	79.5	-28.5
5413.3	Average	Horizontal	42.1	7.4	49.5	59.5	-10.0
6315.3	Peak	Vertical	38.4	8.5	46.9	79.5	-32.6
6315.3	Average	Vertical	37.6	8.5	46.1	59.5	-13.4
6315.4	Peak	Horizontal	40.0	8.5	48.5	79.5	-31.0
6315.4	Average	Horizontal	39.0	8.5	47.5	59.5	-12.0
7219.3	Peak	Vertical	35.4	10.6	46.0	79.5	-33.5
7217.8	Average	Vertical	29.7	10.5	40.2	59.5	-19.3
7214.9	Peak	Horizontal	35.7	10.5	46.2	79.5	-33.3
7217.7	Average	Horizontal	30.7	10.5	41.3	59.5	-18.2
8112.5	Peak	Vertical	35.3	11.6	46.9	79.5	-32.6
8119.9	Average	Vertical	28.7	11.6	40.2	59.5	-19.3
8123.9	Peak	Horizontal	34.5	11.6	46.1	79.5	-33.4
8116.9	Average	Horizontal	28.1	11.6	39.8	59.5	-19.7
9025.1	Peak	Vertical	35.1	12.6	47.7	79.5	-31.8
9021.9	Average	Vertical	29.5	12.6	42.1	59.5	-17.4

9022.0	Peak	Horizontal	36.6	12.6	49.2	79.5	-30.3
9022.0	Average	Horizontal	30.2	12.6	42.8	59.5	-16.7
*Harmonic emission does not fall in a 15.205 restricted band; harmonic emission's peak limit is 20dB down from the highest peak measured in a 100kHz RBW. For this antenna in FHSS mode, 120.2dBuV/m was the highest measured value, and the limit is therefore 100.2dBuV/m. Average emission limit is shown as 20dB below the peak limit in the non-restricted band.							

**Table 5: Transmitting at the Lowest Frequency (L-Com HG908UP)**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1830.1	Peak	Vertical	52.8	-4.4	48.4	79.5	-31.1
1830.1	Average	Vertical	52.2	-4.4	47.8	59.5	-11.7
1829.9	Peak	Horizontal	51.9	-4.4	47.5	79.5	-32.0
1829.9	Average	Horizontal	51.7	-4.4	47.3	59.5	-12.2
2744.9	Peak	Vertical	53.3	-1.0	52.3	79.5	-27.2
2745.2	Average	Vertical	52.9	-1.0	51.9	59.5	-7.6
2745.1	Peak	Horizontal	52.5	-1.0	51.5	79.5	-28.0
2745.1	Average	Horizontal	52.0	-1.0	51.1	59.5	-8.4
3660.0	Peak	Vertical	55.9	3.2	59.1	79.5	-20.4
3660.0	Average	Vertical	55.7	3.2	58.9	59.5	-0.6
3660.0	Peak	Horizontal	51.0	3.2	54.2	79.5	-25.3
3660.2	Average	Horizontal	50.6	3.2	53.8	59.5	-5.7
4574.8	Peak	Vertical	42.1	5.2	47.3	79.5	-32.2
4574.8	Average	Vertical	40.7	5.2	45.9	59.5	-13.6
4575.1	Peak	Horizontal	42.3	5.2	47.5	79.5	-32.0
4575.1	Average	Horizontal	40.2	5.2	45.4	59.5	-14.1
5489.8	Peak	Vertical	45.4	7.6	53.1	79.5	-26.4
5490.0	Average	Vertical	44.6	7.6	52.3	59.5	-7.2
5490.0	Peak	Horizontal	47.6	7.6	55.3	79.5	-24.2
5490.2	Average	Horizontal	47.0	7.6	54.7	59.5	-4.8
6405.1	Peak	Vertical	41.6	8.5	50.0	79.5	-29.5
6405.1	Average	Vertical	40.5	8.5	48.9	59.5	-10.6
6405.0	Peak	Horizontal	40.7	8.5	49.1	79.5	-30.4
6404.8	Average	Horizontal	39.0	8.5	47.5	59.5	-12.0
7310.5	Peak	Vertical	35.8	10.9	46.7	79.5	-32.8
7320.0	Average	Vertical	30.4	10.9	41.3	59.5	-18.2
7310.9	Peak	Horizontal	35.3	10.9	46.2	79.5	-33.3
7320.1	Average	Horizontal	29.6	10.9	40.5	59.5	-19.0

8244.4	Peak	Vertical	35.0	11.5	46.5	79.5	-33.0
8235.1	Average	Vertical	28.8	11.5	40.2	59.5	-19.3
8236.0	Peak	Horizontal	35.8	11.5	47.3	79.5	-32.2
8235.3	Average	Horizontal	29.8	11.5	41.2	59.5	-18.3
9140.4	Peak	Vertical	35.6	12.4	48.0	79.5	-31.5
9154.2	Average	Vertical	28.8	12.3	41.1	59.5	-18.4
9154.8	Peak	Horizontal	35.3	12.3	47.6	79.5	-31.9
9140.5	Average	Horizontal	29.4	12.4	41.7	59.5	-17.8

**Table 6: Transmitting at the Middle Frequency (L-Com HG908UP)**


Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1855.6	Peak	Vertical	61.5	-4.5	57.0	79.5	-22.5
1855.6	Average	Vertical	61.4	-4.5	56.9	59.5	-2.6
1855.6	Peak	Horizontal	63.5	-4.5	59.0	79.5	-20.5
1855.6	Average	Horizontal	63.4	-4.5	58.9	59.5	-0.6
2783.4	Peak	Vertical	55.4	-0.9	54.5	79.5	-25.0
2783.4	Average	Vertical	55.1	-0.9	54.2	59.5	-5.3
2783.5	Peak	Horizontal	56.7	-0.9	55.8	79.5	-23.7
2783.5	Average	Horizontal	56.5	-0.9	55.6	59.5	-3.9
3711.3	Peak	Vertical	47.8	3.4	51.1	79.5	-28.4
3711.3	Average	Vertical	47.2	3.4	50.5	59.5	-9.0
3711.1	Peak	Horizontal	47.6	3.4	51.0	79.5	-28.5
3711.3	Average	Horizontal	46.7	3.4	50.1	59.5	-9.4
4638.9	Peak	Vertical	41.9	5.2	47.0	79.5	-32.5
4639.0	Average	Vertical	40.4	5.2	45.5	59.5	-14.0
4638.9	Peak	Horizontal	41.4	5.2	46.5	79.5	-33.0
4639.1	Average	Horizontal	39.8	5.2	45.0	59.5	-14.5
5562.0	Peak	Vertical	38.0	7.6	45.5	79.5	-34.0
5566.9	Average	Vertical	35.8	7.5	43.3	59.5	-16.2
5566.7	Peak	Horizontal	39.7	7.5	47.2	79.5	-32.3
5566.7	Average	Horizontal	37.9	7.5	45.4	59.5	-14.1
6494.2	Peak	Vertical	36.9	8.4	45.3	79.5	-34.2
6494.9	Average	Vertical	34.8	8.4	43.3	59.5	-16.2
6494.7	Peak	Horizontal	37.9	8.4	46.4	79.5	-33.1
6494.7	Average	Horizontal	36.1	8.4	44.5	59.5	-15.0
7417.8	Peak	Vertical	35.3	11.3	46.6	79.5	-32.9




7417.6	Average	Vertical	28.8	11.3	40.1	59.5	-19.4
7430.2	Peak	Horizontal	35.5	11.2	46.7	79.5	-32.8
7426.4	Average	Horizontal	28.3	11.3	39.5	59.5	-20.0
8351.1	Peak	Vertical	35.5	12.0	47.5	79.5	-32.0
8358.3	Average	Vertical	28.5	12.0	40.5	59.5	-19.0
8343.0	Peak	Horizontal	34.7	12.0	46.7	79.5	-32.8
8351.6	Average	Horizontal	28.9	12.0	40.9	59.5	-18.6
9285.5	Peak	Vertical	35.9	12.5	48.4	79.5	-31.1
9275.0	Average	Vertical	28.7	12.5	41.2	59.5	-18.3
9271.4	Peak	Horizontal	35.4	12.4	47.9	79.5	-31.6
9278.5	Average	Horizontal	29.3	12.5	41.8	59.5	-17.7

**Table 7: Transmitting at the Highest Frequency (L-Com HG908UP)**

No other emissions were seen in the restricted bands

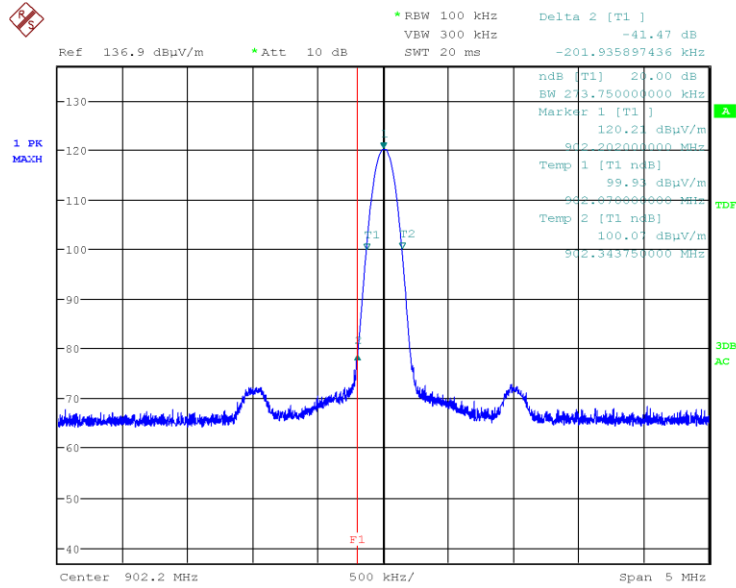

**Graph 17: Radiated Lower Band Edge Plot (L-Com HG908UP)**

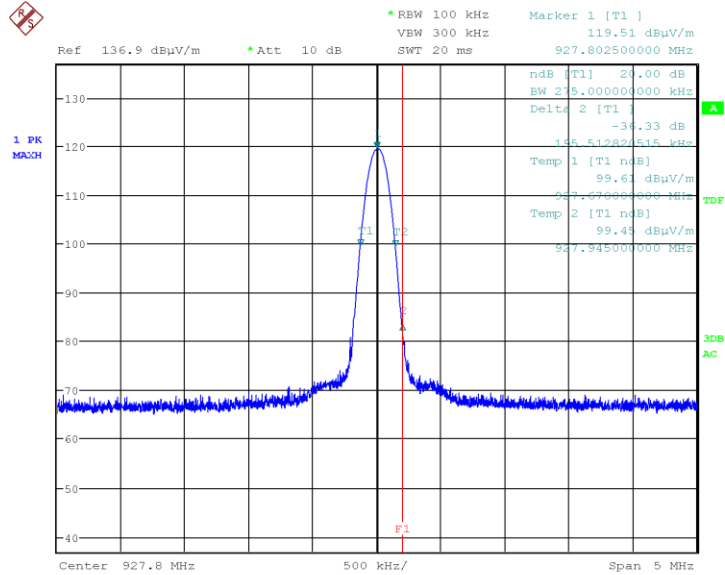

**Graph 18: Radiated Upper Band Edge Plot (L-Com HG908UP)**

**External Patch Antenna (L-Com HG908P-RTP)**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1804.7	Peak	Vertical	45.9	3.6	49.5	79.5	-30.0
1804.3	Average	Vertical	45.5	3.6	49.1	59.5	-10.4
1804.3	Peak	Horizontal	45.1	3.6	48.7	79.5	-30.8
1804.5	Average	Horizontal	44.4	3.6	48	59.5	-11.5
2706.7	Peak	Vertical	45.9	5.9	51.8	79.5	-27.7
2706.6	Average	Vertical	45.5	5.9	51.4	59.5	-8.1
2706.6	Peak	Horizontal	47.1	5.9	53.0	79.5	-26.5
2706.7	Average	Horizontal	46.5	5.9	52.4	59.5	-7.1
3608.7	Peak	Vertical	45.4	8.5	53.9	79.5	-25.6
3608.9	Average	Vertical	44.8	8.5	53.3	59.5	-6.2
3609.0	Peak	Horizontal	43.7	8.5	52.2	79.5	-27.3
3608.9	Average	Horizontal	43.0	8.5	51.5	59.5	-8.0
4511.3	Peak	Vertical	35.9	9.4	45.3	79.5	-34.2
4511.3	Average	Vertical	34.3	9.4	43.7	59.5	-15.8
4511.4	Peak	Horizontal	36.2	9.4	45.6	79.5	-33.9
4511.1	Average	Horizontal	34.4	9.4	43.8	59.5	-15.7
5409.3	Peak	Vertical	33.9	11.2	45.1	79.5	-34.4
5416.3	Average	Vertical	31.3	11.2	42.5	59.5	-17.0
5413.1	Peak	Horizontal	34.6	11.2	45.8	79.5	-33.7
5413.3	Average	Horizontal	32.2	11.2	43.4	59.5	-16.1
6315.2	Peak	Vertical	37.1	12.3	49.4	79.5	-30.1
6315.4	Average	Vertical	36.5	12.3	48.8	59.5	-10.7
6315.4	Peak	Horizontal	38.0	12.3	50.3	79.5	-29.2
6315.4	Average	Horizontal	37.0	12.3	49.3	59.5	-10.2
7217.3	Peak	Vertical	28.3	15.0	43.3	79.5	-36.2
7226.5	Average	Vertical	22.3	15.0	37.3	59.5	-22.2
7219.3	Peak	Horizontal	28.1	15.0	43.1	79.5	-36.4
7217.7	Average	Horizontal	21.7	15.0	36.7	59.5	-22.8
8119.8	Peak	Vertical	27.7	17.3	45.0	79.5	-34.5
8119.7	Average	Vertical	21.4	17.3	38.7	59.5	-20.8
8120.0	Peak	Horizontal	27.3	17.3	44.6	79.5	-34.9
8119.7	Average	Horizontal	22.7	17.3	40.0	59.5	-19.5
9023.2	Peak	Vertical	26.9	19.4	46.3	79.5	-33.2
9022.3	Average	Vertical	20.1	19.4	39.5	59.5	-20.0

9030.5	Peak	Horizontal	26.2	19.4	45.6	79.5	-33.9
9022.0	Average	Horizontal	19.7	19.4	39.1	59.5	-20.4

**Table 8: Transmitting at the Lowest Frequency (L-Com HG908P-RTP)**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1830.1	Peak	Vertical	44.7	3.7	48.4	79.5	-31.1
1829.9	Average	Vertical	44.4	3.7	48.1	59.5	-11.4
1830.2	Peak	Horizontal	44.5	3.7	48.2	79.5	-31.3
1829.9	Average	Horizontal	43.6	3.7	47.3	59.5	-12.2
2745.2	Peak	Vertical	41.4	5.9	47.3	79.5	-32.2
2744.8	Average	Vertical	40.2	5.9	46.1	59.5	-13.4
2745.0	Peak	Horizontal	45.4	5.9	51.3	79.5	-28.2
2745.0	Average	Horizontal	44.7	5.9	50.6	59.5	-8.9
3660.3	Peak	Vertical	40.0	8.7	48.7	79.5	-30.8
3660.3	Average	Vertical	38.0	8.7	46.7	59.5	-12.8
3660.0	Peak	Horizontal	40.8	8.7	49.5	79.5	-30.0
3660.0	Average	Horizontal	38.9	8.7	47.6	59.5	-11.9
4573.6	Peak	Vertical	34.1	9.6	43.7	79.5	-35.8
4575.3	Average	Vertical	31.5	9.6	41.1	59.5	-18.4
4573.7	Peak	Horizontal	33.9	9.6	43.5	79.5	-36.0
4575.1	Average	Horizontal	31.2	9.6	40.8	59.5	-18.7
5488.8	Peak	Vertical	34.1	11.2	45.3	79.5	-34.2
5488.8	Average	Vertical	31.9	11.2	43.1	59.5	-16.4
5491.8	Peak	Horizontal	34.6	11.2	45.8	79.5	-33.7
5494.2	Average	Horizontal	32.8	11.2	44.0	59.5	-15.5
6405.1	Peak	Vertical	33.4	12.3	45.7	79.5	-33.8
6405.2	Average	Vertical	30.9	12.3	43.2	59.5	-16.3
6398.0	Peak	Horizontal	32.4	12.3	44.7	79.5	-34.8
6405.4	Average	Horizontal	30.1	12.3	42.4	59.5	-17.1
7323.3	Peak	Vertical	28.4	15.5	43.9	79.5	-35.6
7326.5	Average	Vertical	21.9	15.5	37.4	59.5	-22.1
7321.0	Peak	Horizontal	28.0	15.5	43.5	79.5	-36.0
7311.8	Average	Horizontal	21.5	15.5	37.0	59.5	-22.5
8228.2	Peak	Vertical	27.4	17.6	45.0	79.5	-34.5
8227.6	Average	Vertical	20.8	17.6	38.4	59.5	-21.1
8231.5	Peak	Horizontal	26.8	17.6	44.4	79.5	-35.1

8244.0	Average	Horizontal	20.5	17.6	38.1	59.5	-21.4
9147.2	Peak	Vertical	26.8	19.4	46.2	79.5	-33.3
9150.6	Average	Vertical	20.5	19.4	39.9	59.5	-19.6
9147.7	Peak	Horizontal	26.3	19.4	45.7	79.5	-33.8
9159.0	Average	Horizontal	19.8	19.4	39.2	59.5	-20.3


**Table 9: Transmitting at the Middle Frequency (L-Com HG908P-RTP)**

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1855.5	Peak	Vertical	45.9	3.9	49.8	79.5	-29.7
1855.6	Average	Vertical	45.1	3.9	49.0	59.5	-10.5
1855.7	Peak	Horizontal	46.4	3.9	50.3	79.5	-29.2
1855.7	Average	Horizontal	46.0	3.9	49.9	59.5	-9.6
2783.0	Peak	Vertical	37.7	6.0	43.7	79.5	-35.8
2783.4	Average	Vertical	35.4	6.0	41.4	59.5	-18.1
2783.6	Peak	Horizontal	40.1	6.0	46.1	79.5	-33.4
2783.5	Average	Horizontal	38.4	6.0	44.4	59.5	-15.1
3711.1	Peak	Vertical	41.2	8.9	50.1	79.5	-29.4
3711.0	Average	Vertical	39.9	8.9	48.8	59.5	-10.7
3711.1	Peak	Horizontal	39.9	8.9	48.8	79.5	-30.7
3711.6	Average	Horizontal	38.3	8.9	47.2	59.5	-12.3
4639.0	Peak	Vertical	33.6	9.7	43.3	79.5	-36.2
4637.7	Average	Vertical	31.1	9.7	40.8	59.5	-18.7
4637.8	Peak	Horizontal	33.8	9.7	43.5	79.5	-36.0
4637.8	Average	Horizontal	31.5	9.7	41.2	59.5	-18.3
5563.4	Peak	Vertical	33.7	11.2	44.9	79.5	-34.6
5564.8	Average	Vertical	31.6	11.2	42.8	59.5	-16.7
5566.8	Peak	Horizontal	33.8	11.2	45.0	79.5	-34.5
5570.2	Average	Horizontal	31.4	11.2	42.6	59.5	-16.9
6499.3	Peak	Vertical	32.7	12.4	45.1	79.5	-34.4
6489.7	Average	Vertical	30.0	12.4	42.4	59.5	-17.1
6487.8	Peak	Horizontal	32.8	12.4	45.2	79.5	-34.3
6495.3	Average	Horizontal	30.7	12.4	43.1	59.5	-16.4
7427.7	Peak	Vertical	27.1	15.7	42.8	79.5	-36.7
7424.1	Average	Vertical	20.7	15.7	36.4	59.5	-23.1
7424.2	Peak	Horizontal	28.0	15.7	43.7	79.5	-35.8
7424.2	Average	Horizontal	22.2	15.7	37.9	59.5	-21.6


8343.1	Peak	Vertical	26.9	17.9	44.8	79.5	-34.7
8343.5	Average	Vertical	20.3	17.9	38.2	59.5	-21.3
8346.6	Peak	Horizontal	26.6	17.9	44.5	79.5	-35.0
8345.4	Average	Horizontal	19.9	17.9	37.8	59.5	-21.7
9285.0	Peak	Vertical	26.3	19.7	46.0	79.5	-33.5
9284.6	Average	Vertical	20.0	19.7	39.7	59.5	-19.8
9286.6	Peak	Horizontal	27.0	19.7	46.7	79.5	-32.8
9271.6	Average	Horizontal	20.1	19.7	39.8	59.5	-19.7

**Table 10: Transmitting at the Highest Frequency (L-Com HG908P-RTP)**

No other emissions were seen in the restricted bands

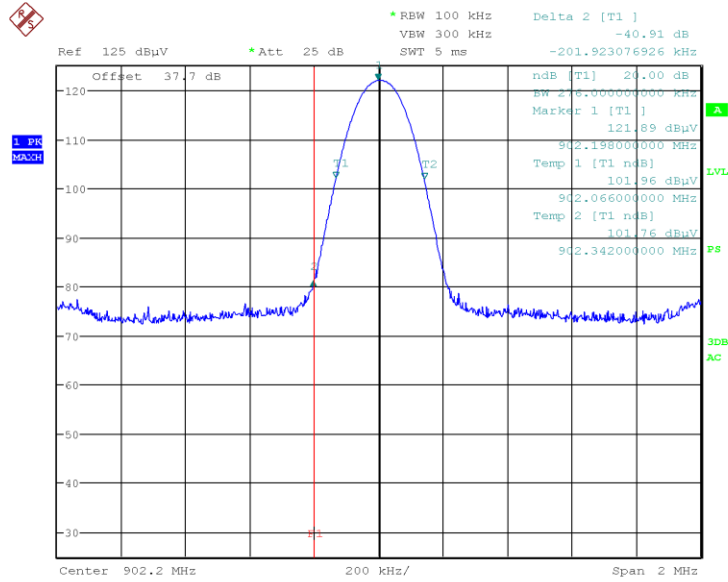

**Graph 19: Radiated Lower Band Edge Plot (L-Com HG908P-RTP)**

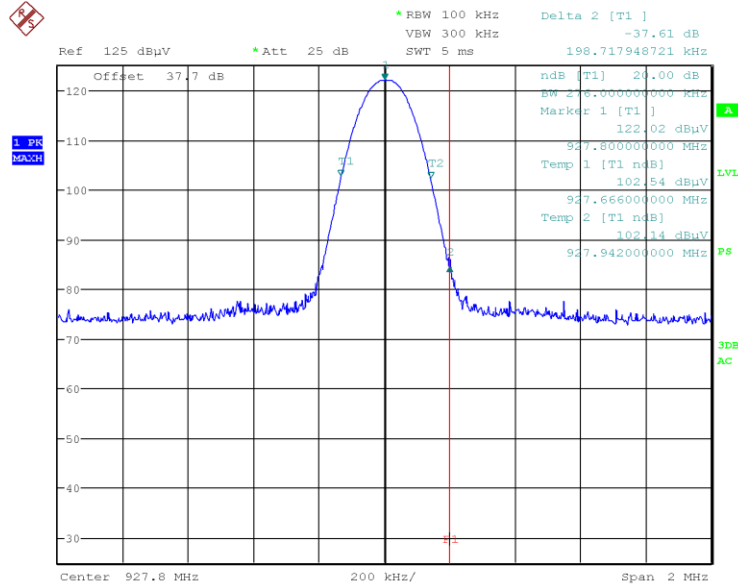

**Graph 20: Radiated Upper Band Edge Plot (L-Com HG908P-RTP)**

## 6.3 Sample Measurement Calculations

### 6.3.1 Field Strength Calculations

The field strength is calculated by adding the *Correction Factor* (*Antenna Factor* + *Cable Factor*), to the measured level from the receiver. The receiver amplitude reading is compensated for any amplifier gain. The basic equation with a sample calculation is shown below:

$$\begin{aligned}\text{Receiver Amplitude Reading} &= \text{Receiver Reading} - \text{Amplifier Gain} \\ \text{Correction Factor} &= \text{Antenna Factor} + \text{Cable Factor} \\ \text{Field Strength} &= \text{Receiver Amplitude Reading} + \text{Correction Factor}\end{aligned}$$

#### Example

Assuming a *Receiver Reading* of 42.5 dBμV is obtained from the receiver, the *Amplifier Gain* is 26.5 dB, the *Antenna Factor* is 4.5 dB, and the *Cable Factor* is 4.0 dB. The *Field Strength* is calculated by subtracting the *Amplifier Gain* and adding the *Correction Factor*, giving a *Field Strength* of 24.5 dBμV/m.

$$\begin{aligned}\text{Receiver Amplitude Reading} &= 42.5 - 26.5 = 16.0 \text{ dB}\mu\text{V/m} \\ \text{Correction Factor} &= 4.5 + 4.0 = 8.5 \text{ dB} \\ \text{Field Strength} &= 16.0 + 8.5 = 24.5 \text{ dB}\mu\text{V/m}\end{aligned}$$

### 6.3.2 Conducted Measurement Value Calculations

A conducted emission value is calculated by adding the *Correction Factor* (*LISN Transducer Factor* + *Cable Factor*) to the measured value from the receiver. The LISN contains an internal 10dB (nominal) attenuation accounted for in the LISN Transducer Factor. Amplifiers are not utilized for this measurement. The basic equation with a sample calculation is shown below:

$$\begin{aligned}\text{Correction Factor} &= \text{LISN Transducer Factor} + \text{Cable Factor} \\ \text{Conducted Emission Value} &= \text{Receiver Amplitude Reading} + \text{Correction Factor}\end{aligned}$$

#### Example

Assuming a *Receiver Reading* of 20.8 dBμV is obtained from the receiver, *LISN Transducer Factor* is 10.1 dB, and the *Cable Factor* is 0.3 dB. The *Conducted Emissions Value* is calculated by adding the *Correction Factor*, giving a *Conducted Emissions Value* of 31.2 dBμV.

$$\begin{aligned}\text{Receiver Amplitude Reading} &= 20.8 \text{ dB}\mu\text{V} \\ \text{Correction Factor} &= 10.1 + 0.3 = 10.4 \text{ dB} \\ \text{Conducted Emissions Value} &= 20.8 + 10.4 = 31.2 \text{ dB}\mu\text{V}\end{aligned}$$



## 7 Test Procedures and Test Equipment

### 7.1 Conducted Emissions at Mains Ports

The conducted emissions at mains and telecommunications ports from the EUT were measured using a spectrum analyzer with a quasi-peak adapter for peak, quasi-peak and average readings. The quasi-peak adapter uses a bandwidth of 9 kHz, with the spectrum analyzer's resolution bandwidth set at 100 kHz, for readings in the 150 kHz to 30 MHz frequency ranges.

The conducted emissions at mains ports measurements are performed in a screen room using a (50  $\Omega$ /50  $\mu$ H) Line Impedance Stabilization Network (LISN).

Where mains flexible power cords are longer than 1 m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

Where the EUT is a collection of devices with each device having its own power cord, the point of connection for the LISN is determined from the following rules:

- Each power cord, which is terminated in a mains supply plug, shall be tested separately.
- Power cords, which are not specified by the manufacturer to be connected via a host unit, shall be tested separately.
- Power cords which are specified by the manufacturer to be connected via a host unit or other power supplying equipment shall be connected to that host unit and the power cords of that host unit connected to the LISN and tested.
- Where a special connection is specified, the necessary hardware to effect the connection is supplied by the manufacturer for the testing purpose.
- When testing equipment with multiple mains cords, those cords not under test are connected to an artificial mains network (AMN) different than the AMN used for the mains cord under test.

For testing, desktop EUT are placed on a non-conducting table at least 0.8 meters from the metallic floor and placed 40 cm from the vertical coupling plane (copper plating in the wall behind EUT table). Floor standing equipment is placed directly on the earth grounded floor.

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer/Receiver	Rohde & Schwarz	ESU40	V033119	12/02/2024	12/02/2025
Spectrum Analyzer/Signal Analyzer	Rohde & Schwarz	FSV40	V044352	03/05/2024	03/05/2026
LISN	Teseq	NNB 51	V045406	12/19/2024	12/19/2025
Conductance Cable Wanship Upper Site	VPI Labs	Cable J	V034832	12/19/2024	12/19/2025
EMC32 Measurement Software	Rohde & Schwarz	10.60.20	N/A	N/A	N/A

**Table 11: List of equipment used for conducted emissions testing at mains ports.**

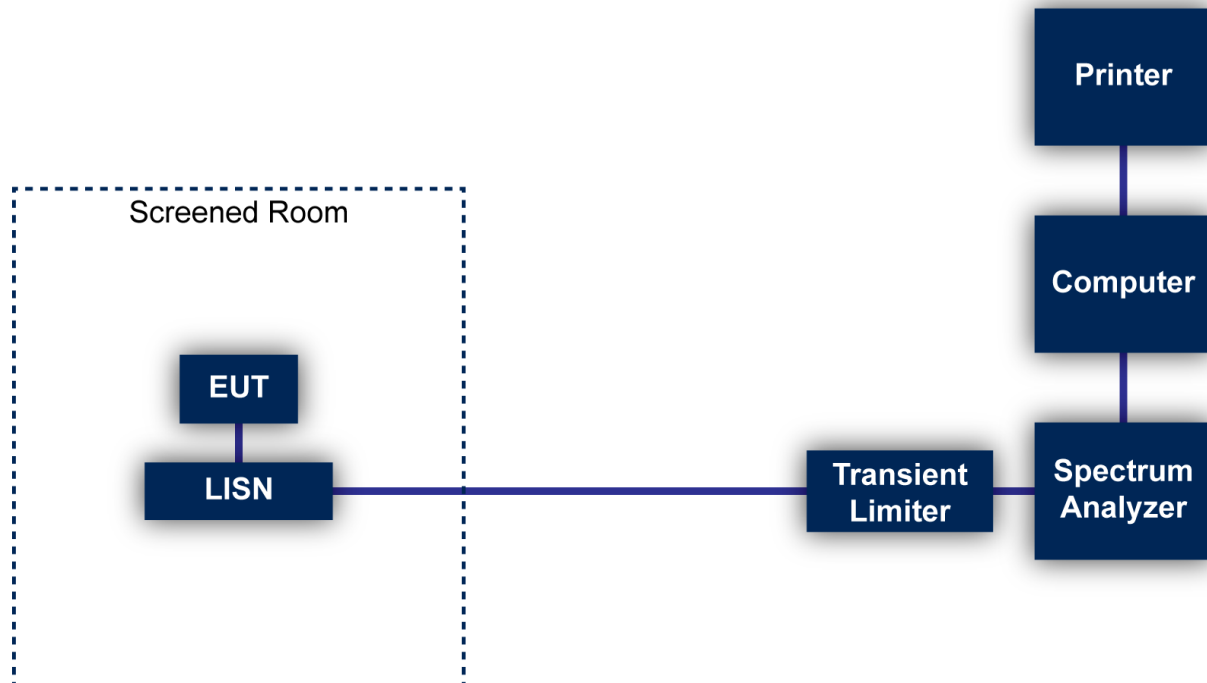


Figure 1: Conducted Emissions Test

## 7.2 Direct Connection at the Antenna Port Test

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer/Receiver	Rohde & Schwarz	ESU40	V033119	12/02/2024	12/02/2025
Spectrum Analyzer/Signal Analyzer	Rohde & Schwarz	FSV40	V044352	03/05/2024	03/05/2026
6 dB Attenuator	Pasternack	PE7004-6	V033645	12/19/2024	12/19/2025
Low Loss Cable	N/A	N/A	V034173	12/19/2024	12/19/2025

### 7.2.1 Test Configuration Block Diagram



Figure 2: Direct Connection at the Antenna Port Test

## 7.3 Radiated Emissions

The radiated emissions from the EUT were measured using a spectrum analyzer with a quasi-peak adapter for peak and quasi-peak readings.

A preamplifier with a fixed gain of 51 dB was used to increase the sensitivity of the measuring instrumentation. The quasi-peak adapter uses a bandwidth of 120 kHz, with the spectrum analyzer's resolution bandwidth set at 1 MHz, for readings in the 30 to 1000 MHz frequency ranges. For frequencies below 30 MHz, a 9 kHz resolution Bandwidth was used.

A loop antenna was used to measure frequencies below 30 MHz. A biconilog antenna was used to measure the frequency range of 30 to 1000 MHz, at a distance of 3 meters from the EUT. The readings obtained by these antennas are correlated to the levels obtained with a tuned dipole antenna by adding antenna factors. A double-ridged guide antenna was used to measure the emissions at frequencies above 1000 MHz at a 3 meter or 1 meter distance from the EUT.

The configuration of the EUT was varied to find the maximum radiated emission. The EUT was connected to the peripherals listed in Section 2.3 via the interconnecting cables listed in Section 2.4. A technician manually manipulated these interconnecting cables to obtain worst-case radiated emissions. The EUT was rotated 360 degrees, and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission. Where there were multiple interface ports all of the same type, cables are either placed on all of the ports or cables added to these ports until the emissions do not increase by more than 2 dB.


Desktop EUT are measured on a non-conducting table 0.8 meters above the ground plane. For frequencies above 1000 MHz, the EUT is placed on a table 1.5 meters above the ground plane. The table is placed on a turntable, which is level with the ground plane. For equipment normally placed on floors, the equipment shall be placed directly on the turntable.

For radiated emissions testing that is performed at distances closer than the specified distance; an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer/Receiver	Rohde & Schwarz	ESU40	V033119	12/02/2024	12/02/2025
Spectrum Analyzer/Signal Analyzer	Rohde & Schwarz	FSV40	V044352	03/05/2024	03/05/2026
Loop Antenna	EMCO	6502	V034216	04/27/2023	04/27/2025
Biconilog Antenna	EMCO	3142E	V057461	06/06/2023	06/06/2025
Power Amplifier	HP	8447E	V034189	12/19/2024	12/19/2025
Double Ridged Guide Antenna	EMCO	3115	V034413	01/25/2023	01/25/2025
Standard Gain Horn	ETS-Lindgren	3160-09	V034223	ICO	ICO
High Frequency Amplifier	Miteq	AFS4-001018000-35-10P-4	V033997	12/19/2024	12/19/2025
900 MHz High Pass Filter	Micro-Tronics	HPM50108-03	V034185	12/19/2024	12/19/2025

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
2.4 GHz High Pass Filter	Micro-Tronics	HPM50111-03	V034183	12/19/2024	12/19/2025
2.4 GHz Notch Filter	Micro-Tronics	BRM50702-03	V034213	12/19/2024	12/19/2025
6' High Frequency Cable	Microcoax	UFB197C-0-0720-000000	V033638	12/19/2024	12/19/2025
20' High Frequency Cable	Microcoax	UFB197C-1-3120-000000	V033979	12/19/2024	12/19/2025
3 Meter Radiated Emissions Cable Wanship Upper Site	Microcoax	UFB205A-0-4700-000000	V033639	12/19/2024	12/19/2025
EMC32 Test Software	Rohde & Schwarz	10.60.20	N/A	N/A	N/A

**Table 12: List of equipment used for radiated emissions testing.**

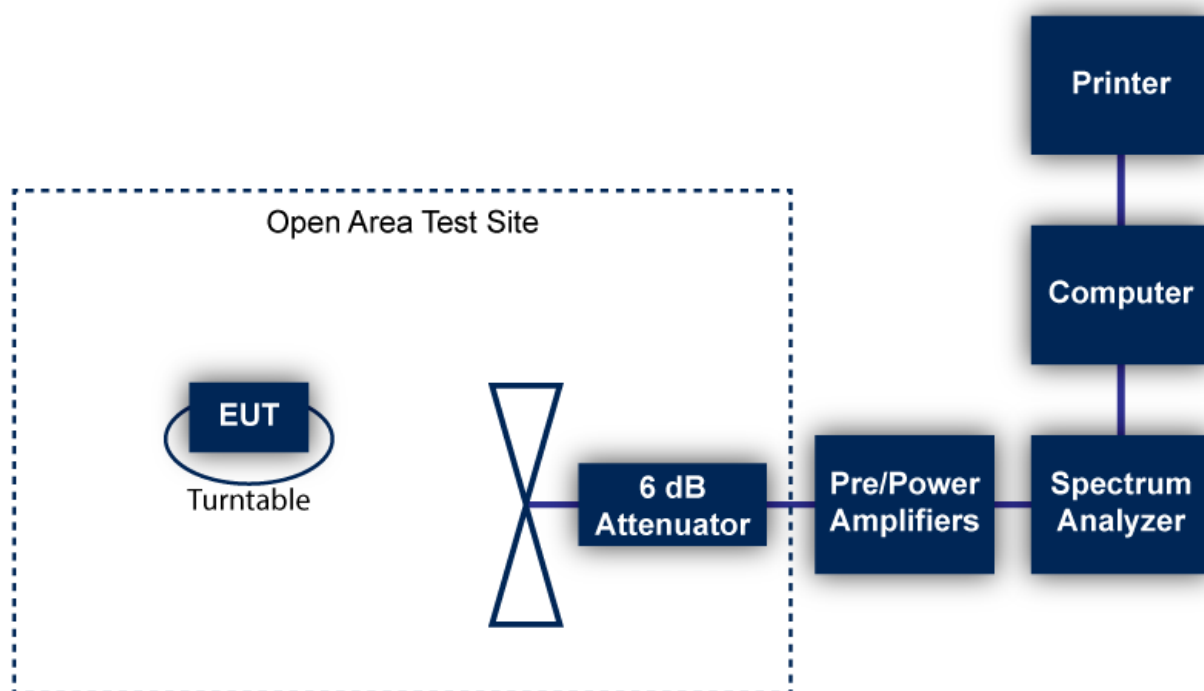

**Figure 3: Radiated Emissions Test**

## 7.4 Equipment Calibration

All applicable equipment is calibrated using either an independent calibration laboratory or VPI Technology, Inc. personnel at intervals defined in ANSI C63.4:2014 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.


## 7.5 Measurement Uncertainty

Test	Uncertainty ( $\pm$ dB)	Confidence (%)
Conducted Emissions	2.8	95
Radiated Emission (9 kHz to 30 MHz)	3.3	95
Radiated Emissions (30 MHz to 1 GHz)	3.4	95
Radiated Emissions (1 GHz to 18 GHz)	5.0	95
Radiated Emissions (18 GHz to 40 GHz)	4.1	95

## 8 Photographs




**Photograph 1: Front View Radiated Emissions Worst-Case Configuration 900 MHz Internal Antenna – Frequencies Below 1000 MHz**

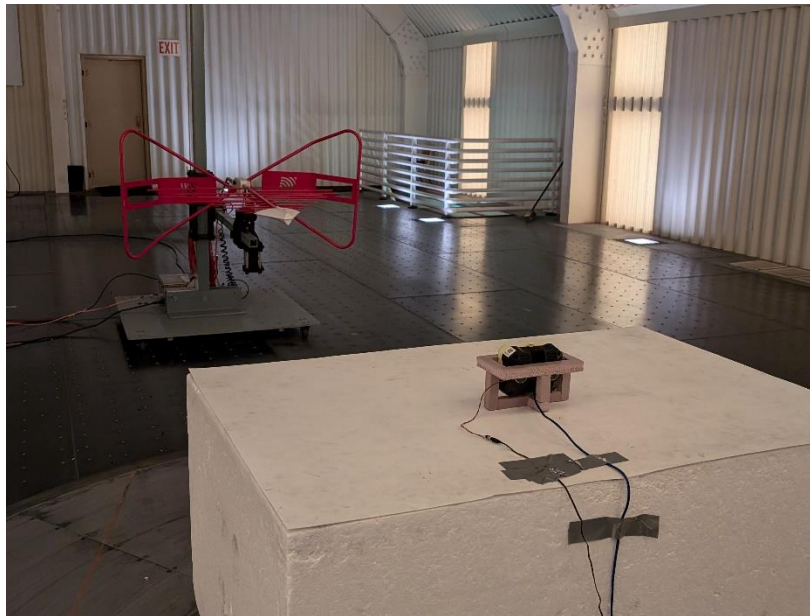

**Photograph 2: Back View Radiated Emissions Worst-Case Configuration 900 MHz Internal Antenna – Frequencies Below 1000 MHz**



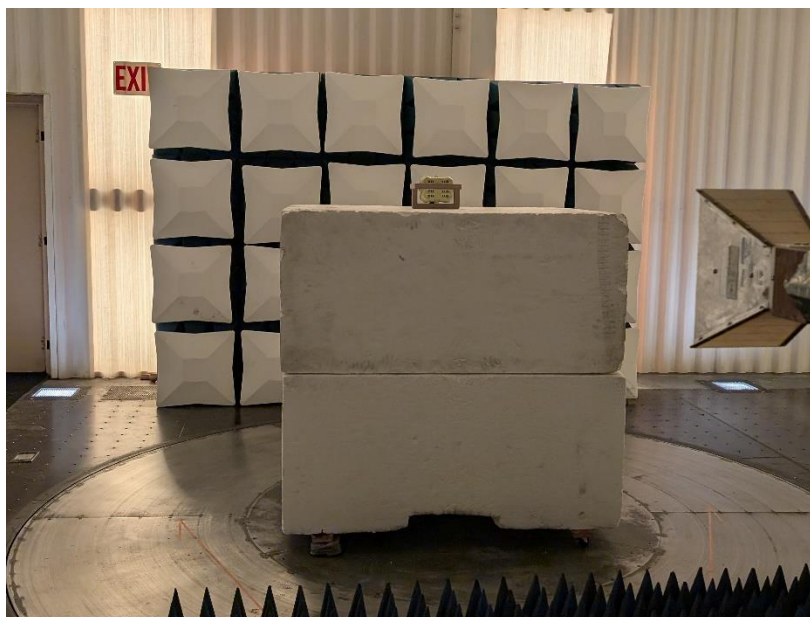

**Photograph 3: Front View Radiated Emissions Worst-Case Configuration 900 MHz Internal Antenna – Frequencies Above 1000 MHz**



**Photograph 4: Back View Radiated Emissions Worst-Case Configuration 900 MHz Internal Antenna – Frequencies Above 1000 MHz**



**Photograph 5: Front View Radiated Emissions Worst-Case Configuration 900 MHz Monopole Antenna – Frequencies Below 1000 MHz**



**Photograph 6: Back View Radiated Emissions Worst-Case Configuration 900 MHz Monopole Antenna – Frequencies Below 1000 MHz**






**Photograph 7: Front View Radiated Emissions Worst-Case Configuration 900 MHz Monopole Antenna – Frequencies Above 1000 MHz**




**Photograph 8: Back View Radiated Emissions Worst-Case Configuration 900 MHz Monopole Antenna – Frequencies Above 1000 MHz**



**Photograph 9: Front View Radiated Emissions Worst-Case Configuration 900 MHz Patch Antenna – Frequencies Below 1000 MHz**

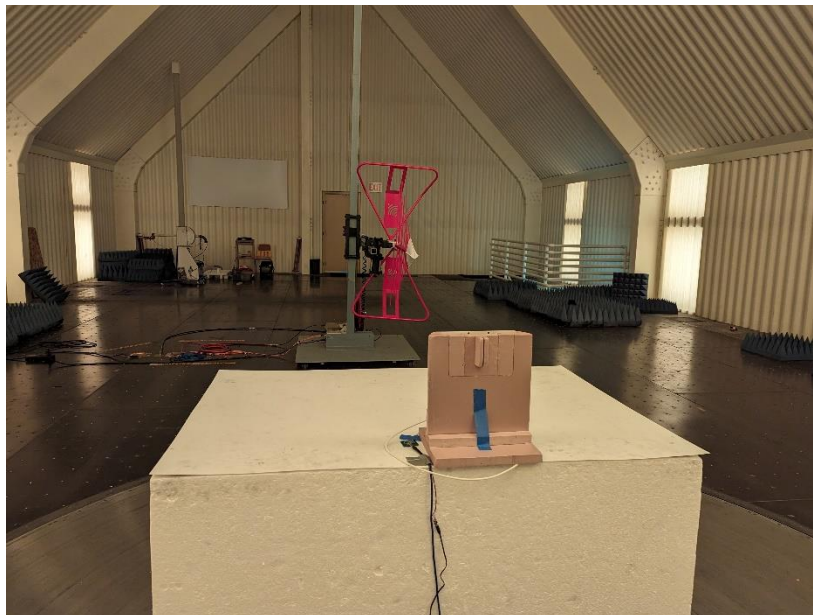

**Photograph 10: Back View Radiated Emissions Worst-Case Configuration 900 MHz Patch Antenna – Frequencies Below 1000 MHz**

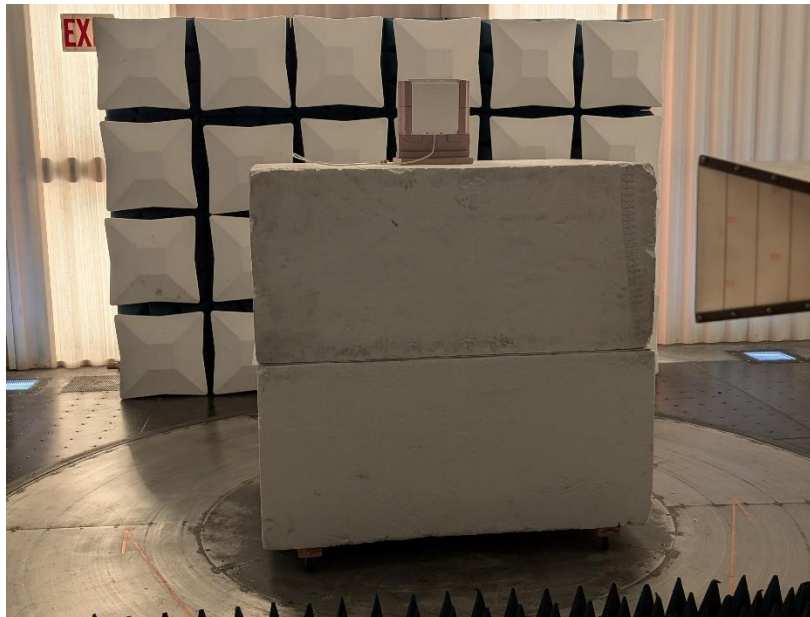

**Photograph 11: Front View Radiated Emissions Worst-Case Configuration 900 MHz Patch Antenna – Frequencies Above 1000 MHz**




**Photograph 12: Back View Radiated Emissions Worst-Case Configuration 900 MHz Patch Antenna – Frequencies Above 1000 MHz**






**Photograph 13: Front View Conducted Emissions Worst-Case Configuration**

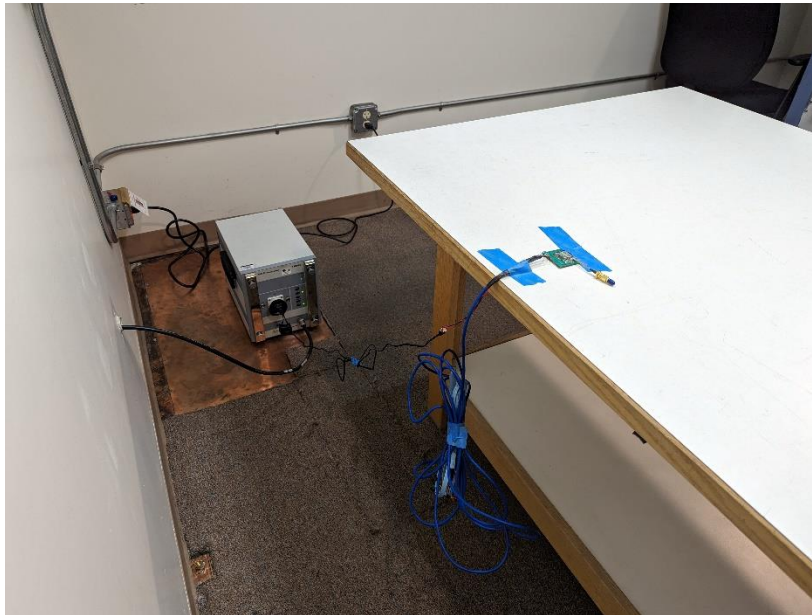


**Photograph 14: Back View Conducted Emissions Worst-Case Configuration**




**Photograph 15: Front View of the EUT Enclosure (EUT for all 900MHz Internal Antenna Testing)**

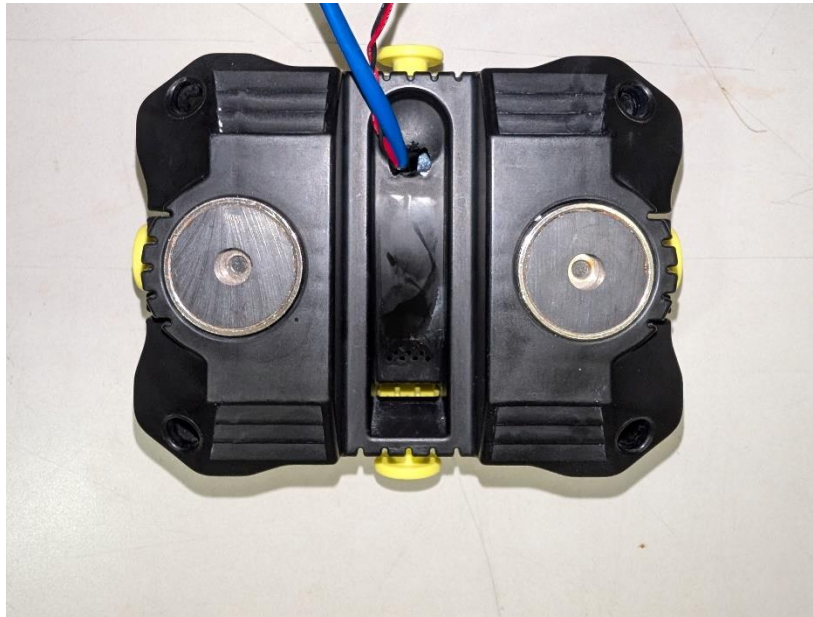


**Photograph 16: Back View of the EUT Enclosure (EUT for all 900MHz Internal Antenna Testing)**

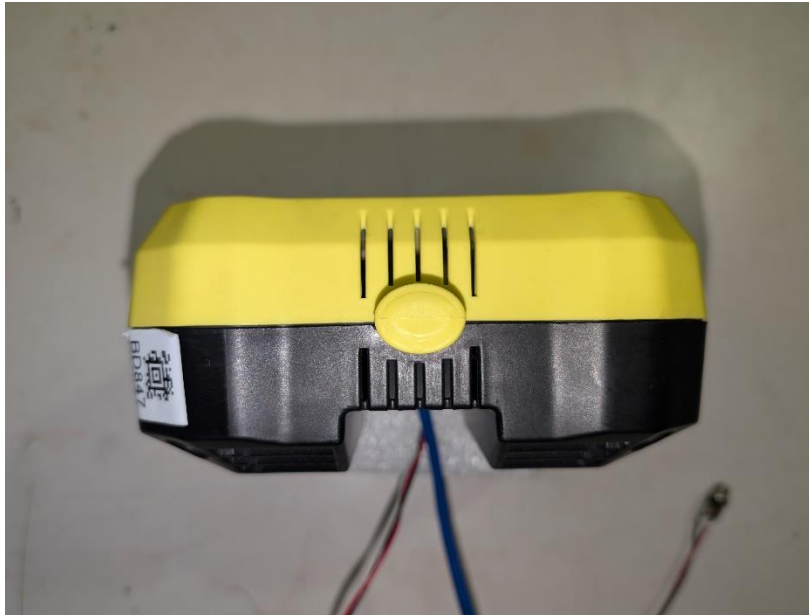


**Photograph 17: Side 1 View of the EUT Enclosure (EUT for all 900MHz Internal Antenna Testing)**

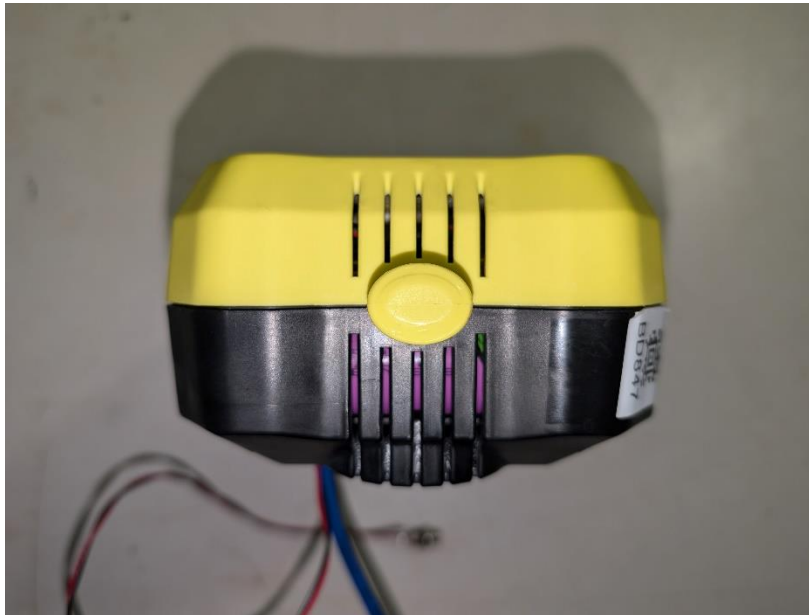

**Photograph 18: Side 2 View of the EUT Enclosure (EUT for all 900MHz Internal Antenna Testing)**

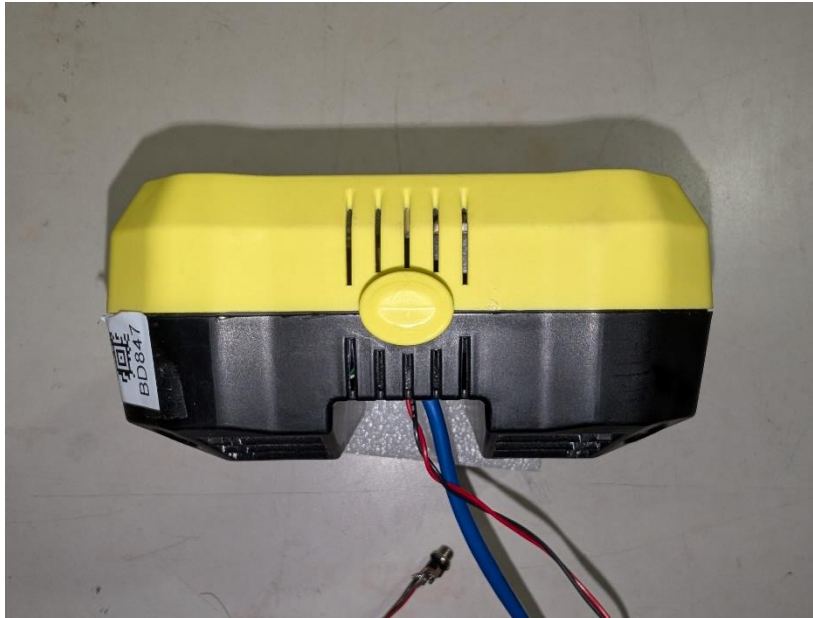


**Photograph 19: Side 3 View of the EUT Enclosure (EUT for all 900MHz Internal Antenna Testing)**

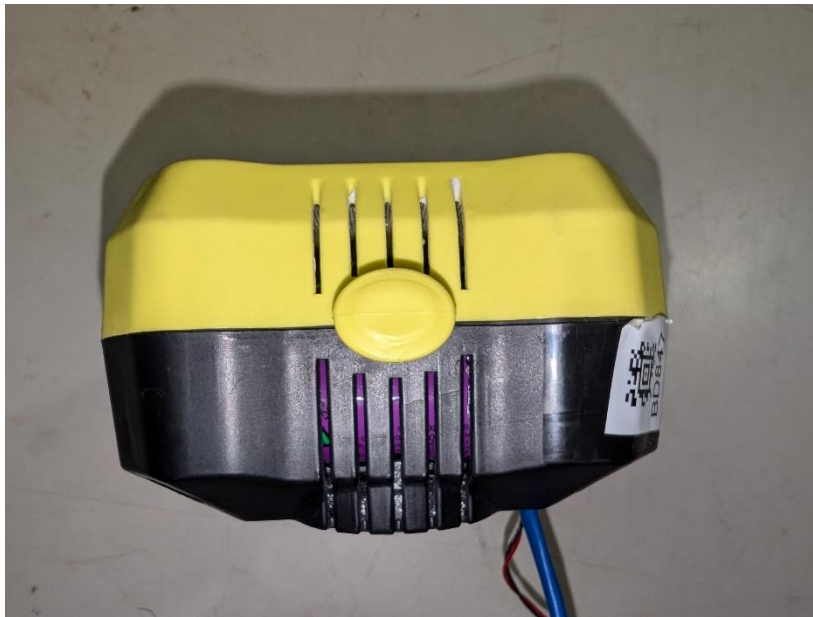


**Photograph 20: Side 2 View of the EUT Enclosure (EUT for all 900MHz Internal Antenna Testing)**



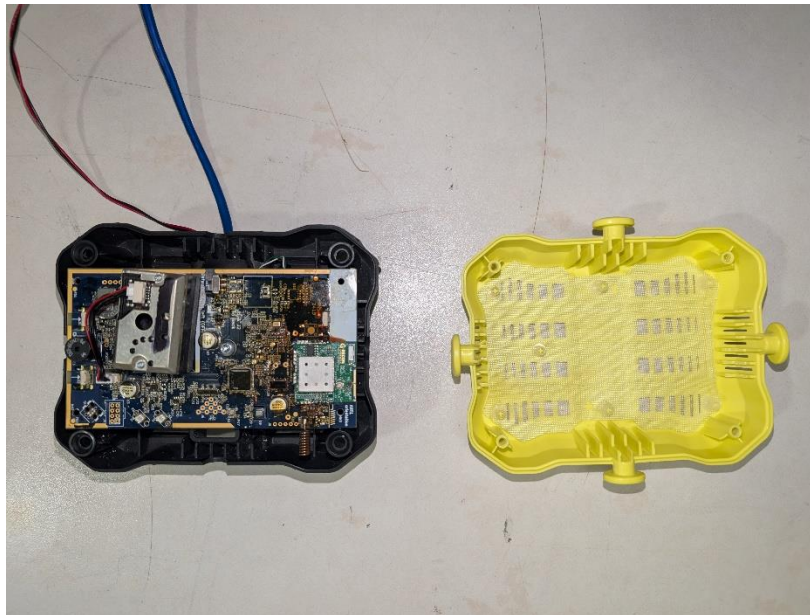


**Photograph 21: View of the EUT Enclosure Cover Removed**

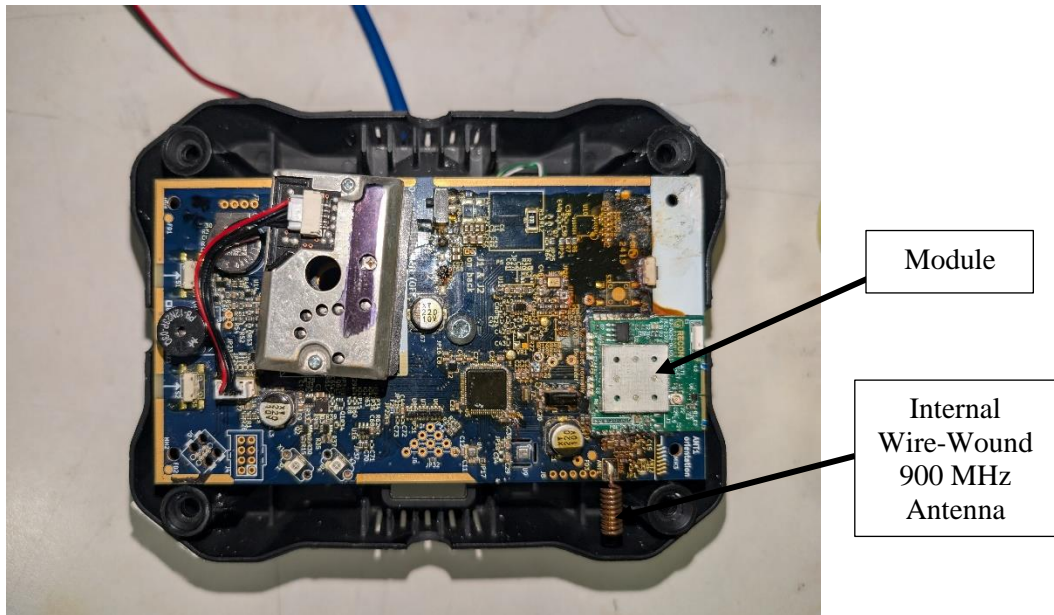


**Photograph 22: View of the Module in the Host PCB with Enclosure Cover Removed**




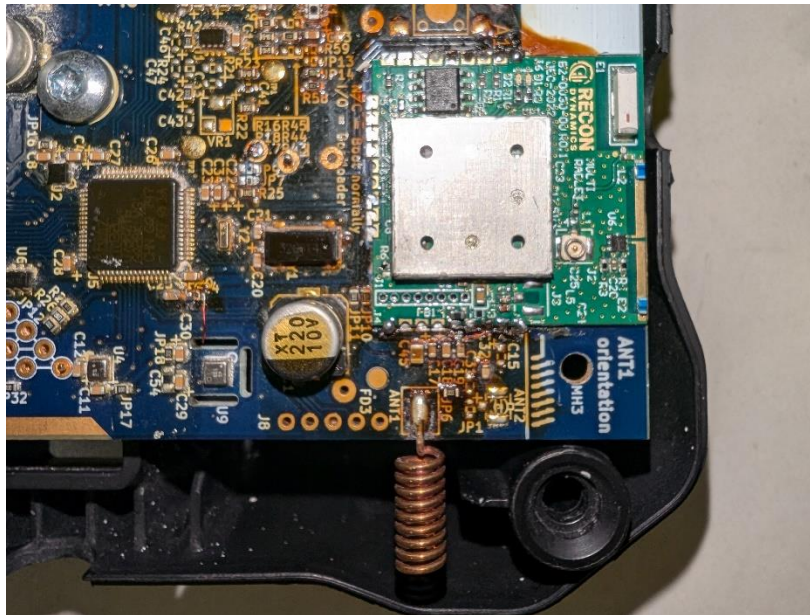


**Photograph 23: Closeup View of Front of Module in the Host PCB and the RF Circuitry of the Wire-Wound Internal 900MHz Antenna**

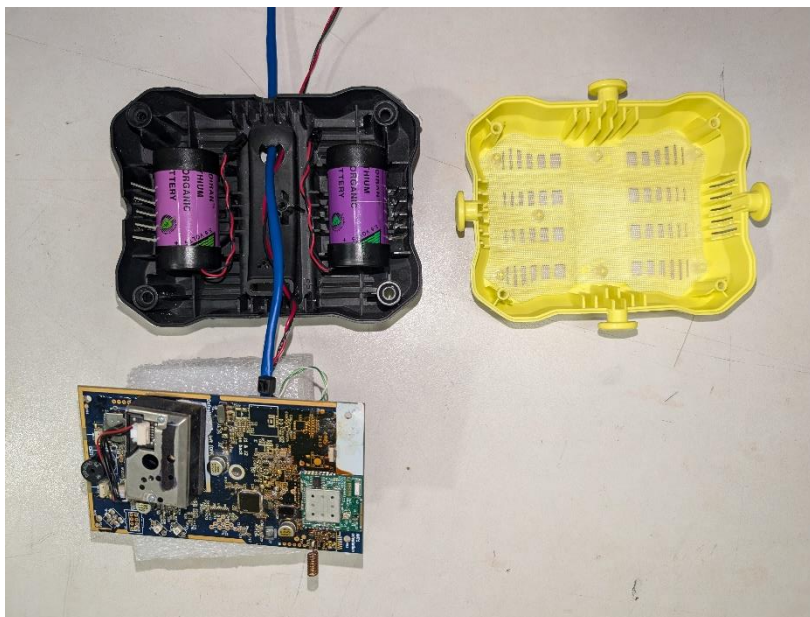


**Photograph 24: View of the Host PCB Removed from the Enclosure**

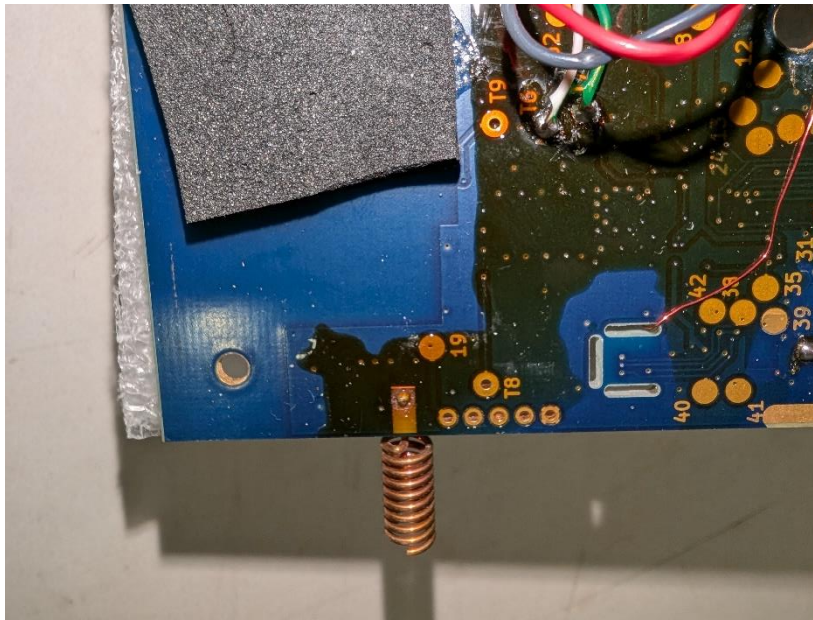


**Photograph 25: Closeup View of Front of the RF Circuitry of the Wire-Wound Internal 900MHz Antenna on the Bottom of the Host PCB**

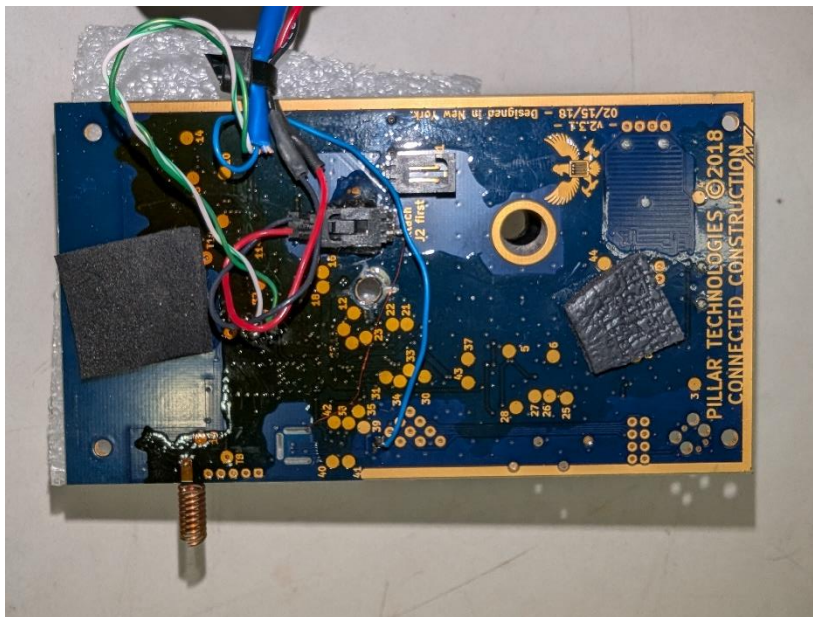

**Photograph 26: Back View of Module in the Host PCB and the RF Circuitry of the Wire-Wound Internal 900MHz Antenna**

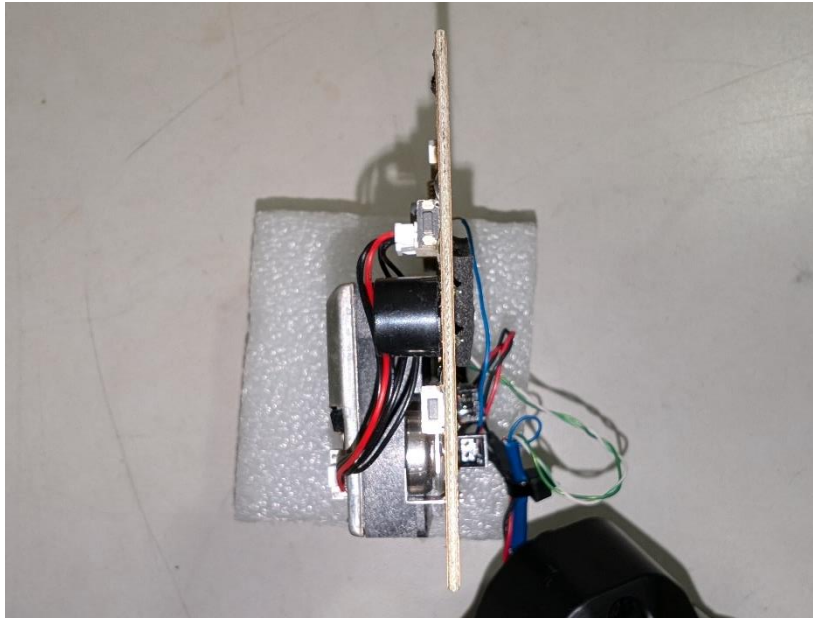


**Photograph 27: Side 1 of the Host PCB**

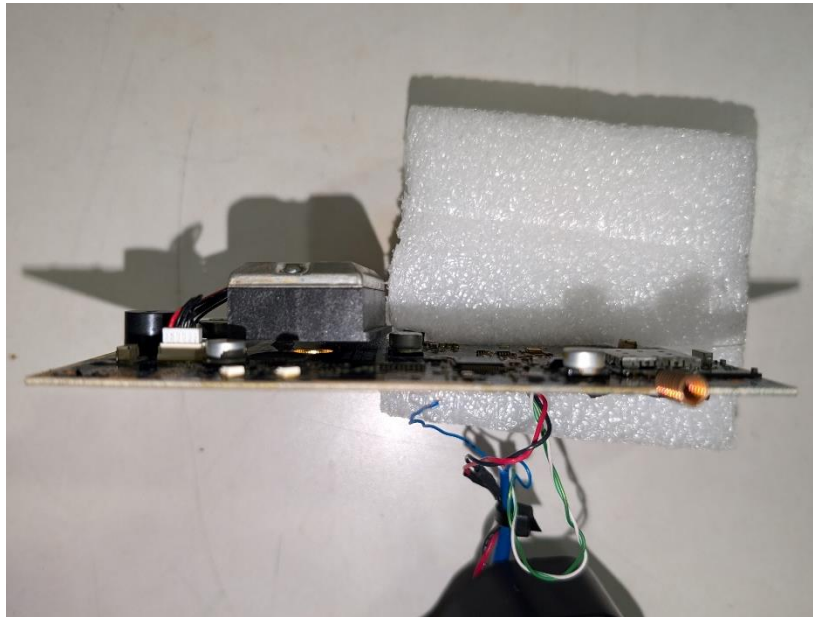


**Photograph 28: Side 2 of the Host PCB**




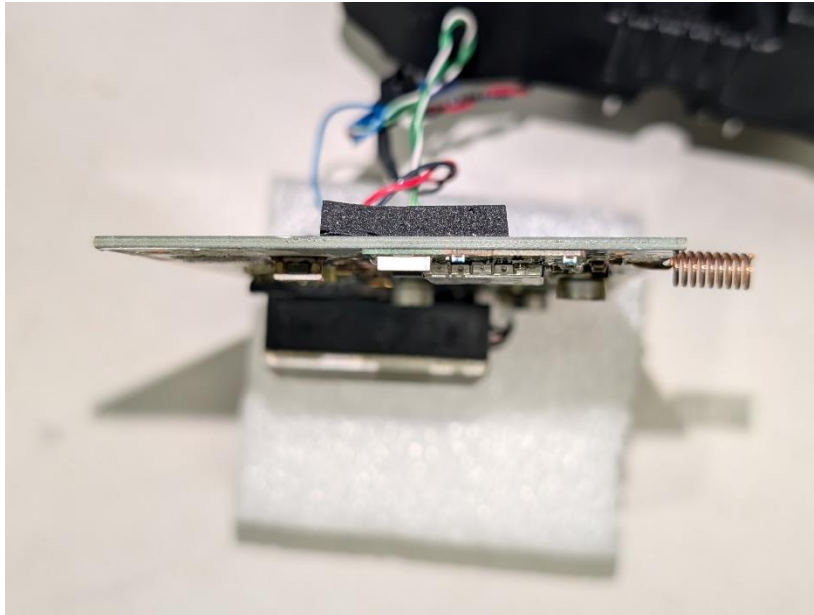


**Photograph 29: Side 3 of the Host PCB**

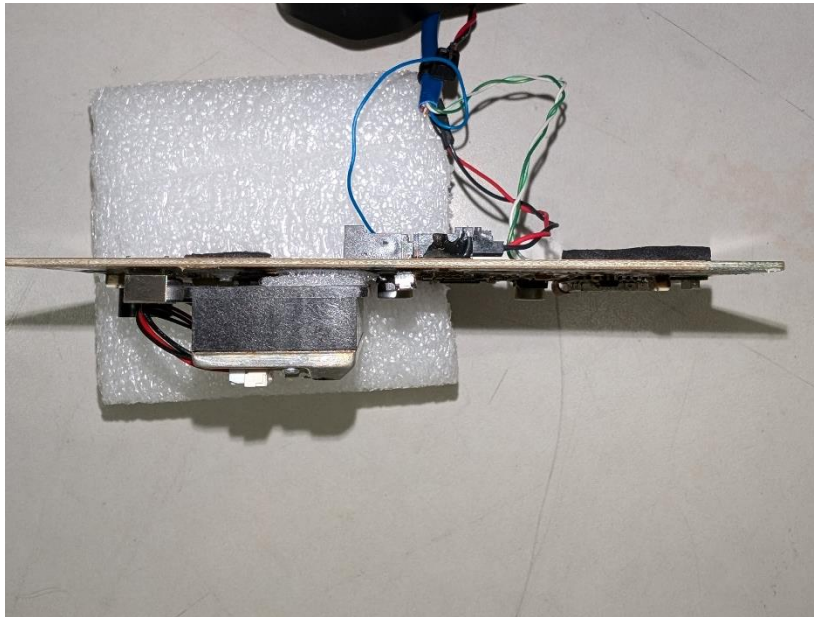


**Photograph 30: Side 4 of the Host PCB**

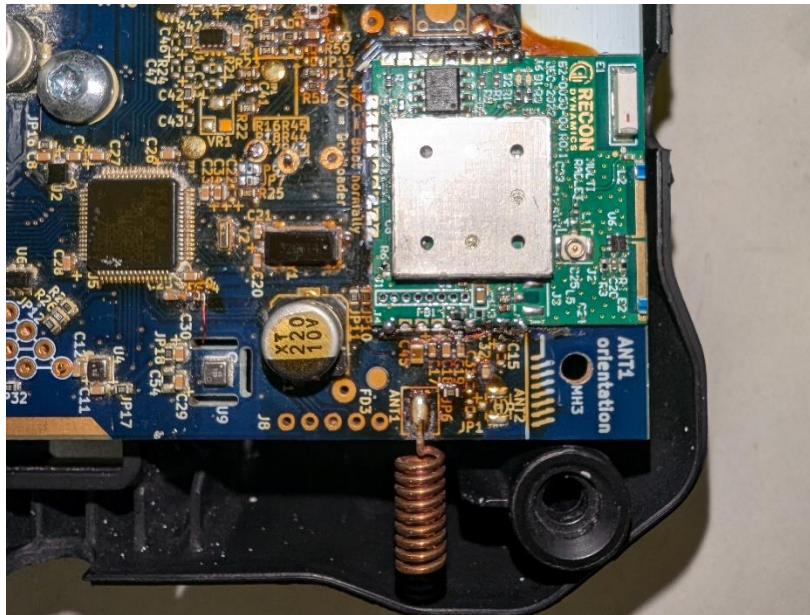


**Photograph 31: View of Front of Module in the Host PCB and the RF Circuitry of the Wire-Wound Internal 900MHz Antenna**

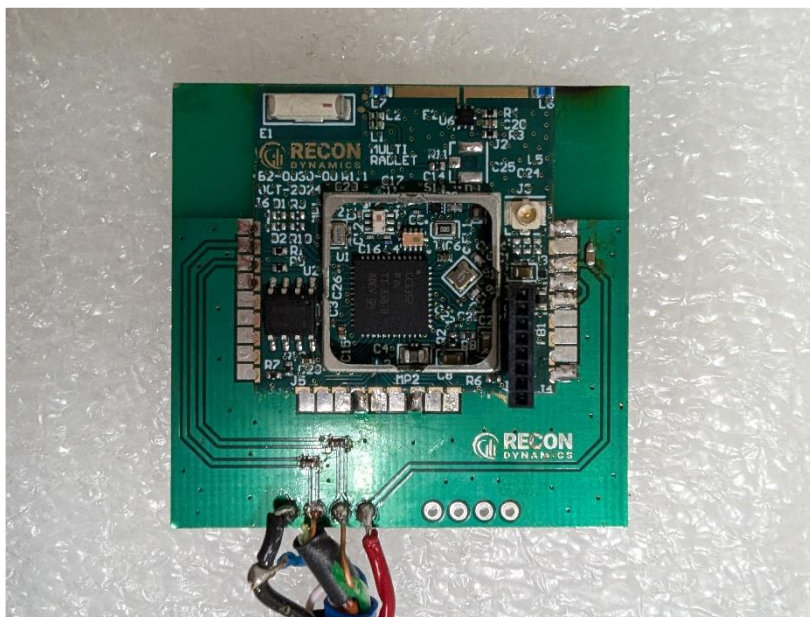

**Photograph 32: View of Front of Module with RF Shield Removed (EUT for All Testing Except Internal 900Mhz Antenna)**

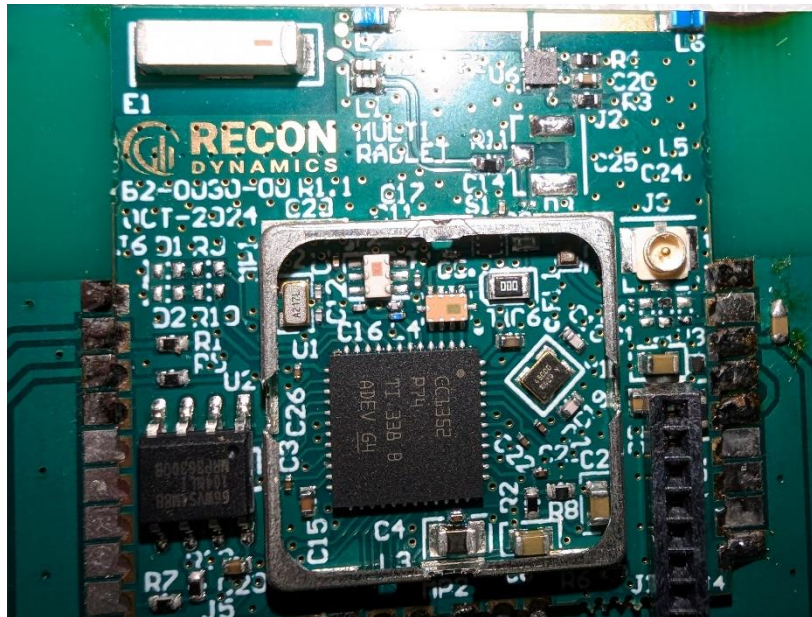

**Photograph 33: Close-up View of Front of Module with RF Shield Removed (EUT for All Testing Except Internal 900Mhz Antenna)**

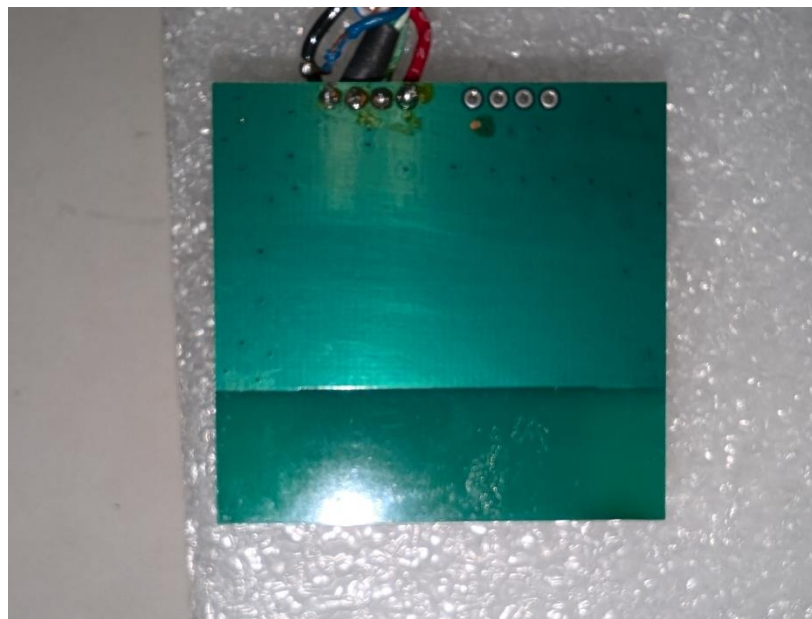

**Photograph 34: View of Back of Module**






**Photograph 35: View of Side 1 of Module**



**Photograph 36: View of Side 2 of Module**

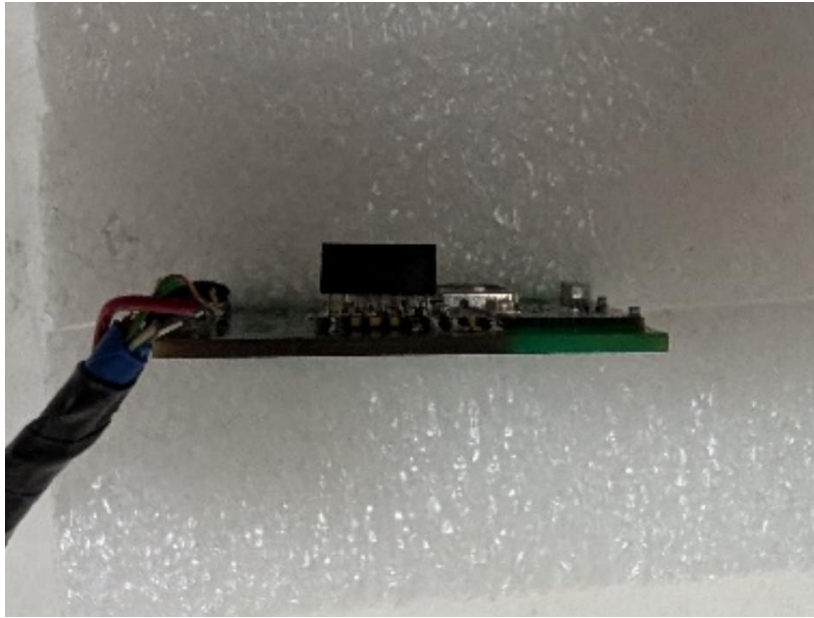

**Photograph 37: View of Side 3 of Module**



**Photograph 38: View of Side 4 of Module**



**--- End of Report ---**