

102-2_LTE FDD Band 12_10M_QPSK_50%RB_0Offset_Body Front(10mm)_Ch23095

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 40.265$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 707.5 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095 50%RB/Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.279 W/kg

Ch23095 50%RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.89 V/m; Power Drift = 0.01 dB



Peak SAR (extrapolated) = 0.327 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.105 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 0.250 W/kg

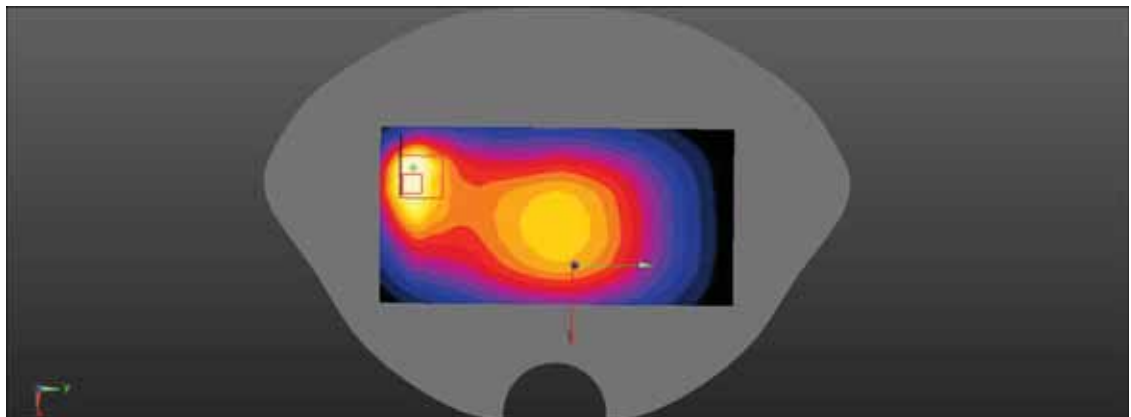

103_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Body Hotspot Back(10mm)_Ch23095

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 40.265$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 707.5 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.316 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.60 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.185 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 71.9%

Maximum value of SAR (measured) = 0.311 W/kg

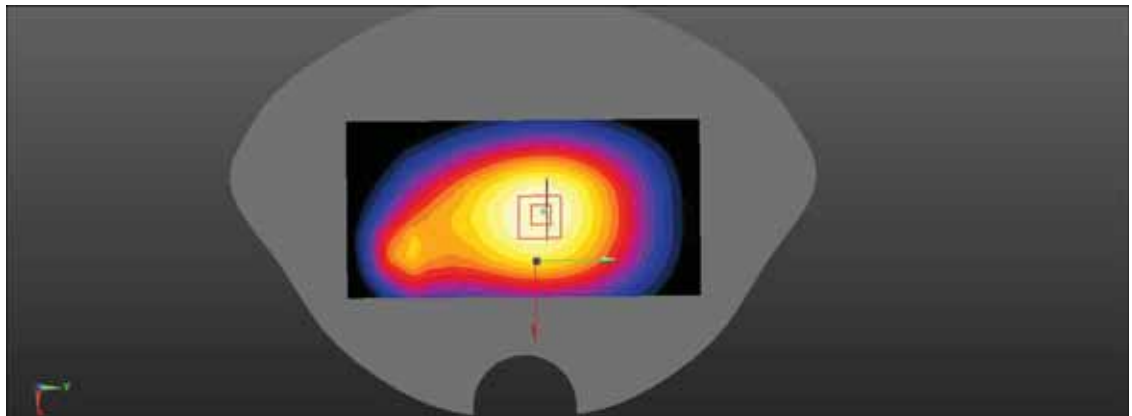

103-2_LTE FDD Band 12_10M_QPSK_50%RB_0Offset_Body Hotspot Back(10mm)_Ch23095

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 40.265$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 707.5 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Configuration/Ch23095 50%RB/Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.268 W/kg

Configuration/Ch23095 50%RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.15 V/m; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 71.4%

Maximum value of SAR (measured) = 0.265 W/kg

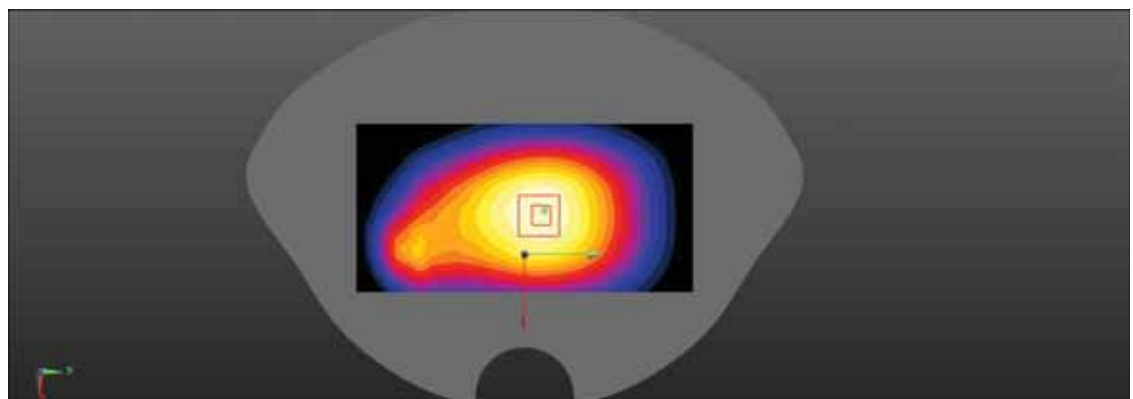

104_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Body Hotspot Front(10mm)_Ch23095

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 40.265$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 707.5 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.321 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.10 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.357 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.116 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.9%

Maximum value of SAR (measured) = 0.279 W/kg

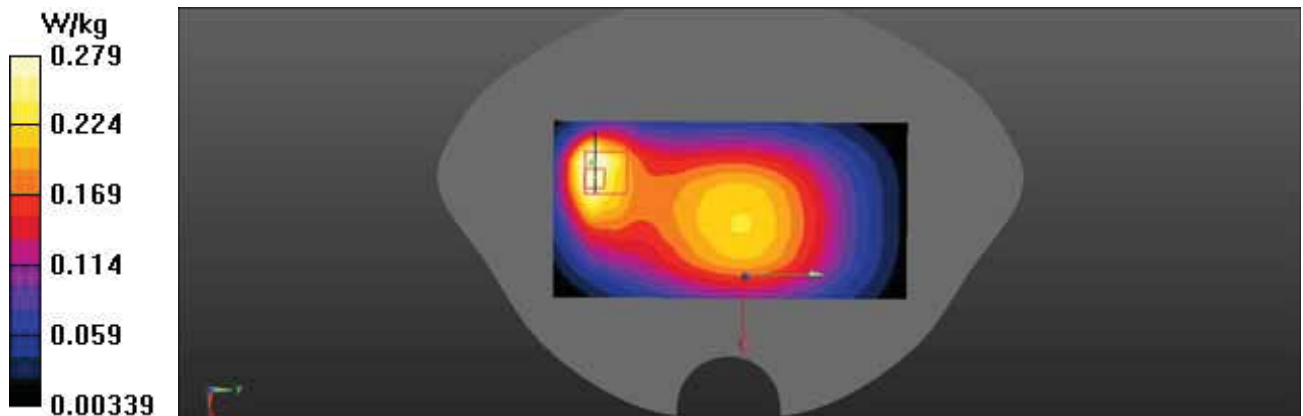

104-2_LTE FDD Band 12_10M_QPSK_50%RB_0Offset_Body Hotspot Front(10mm)_Ch23095

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 40.265$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 707.5 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095 50%RB/Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.284 W/kg

Ch23095 50%RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.08 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.102 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 0.242 W/kg

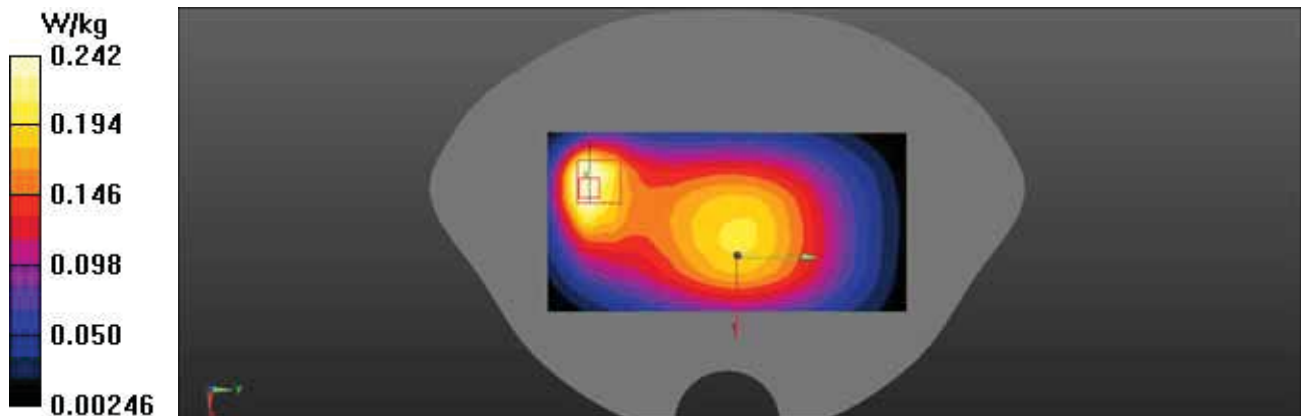

105_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Body Hotspot Left(10mm)_Ch23095

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 40.265$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 707.5 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (31x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.475 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.66 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.545 W/kg

SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.239 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 64.7%

Maximum value of SAR (measured) = 0.475 W/kg

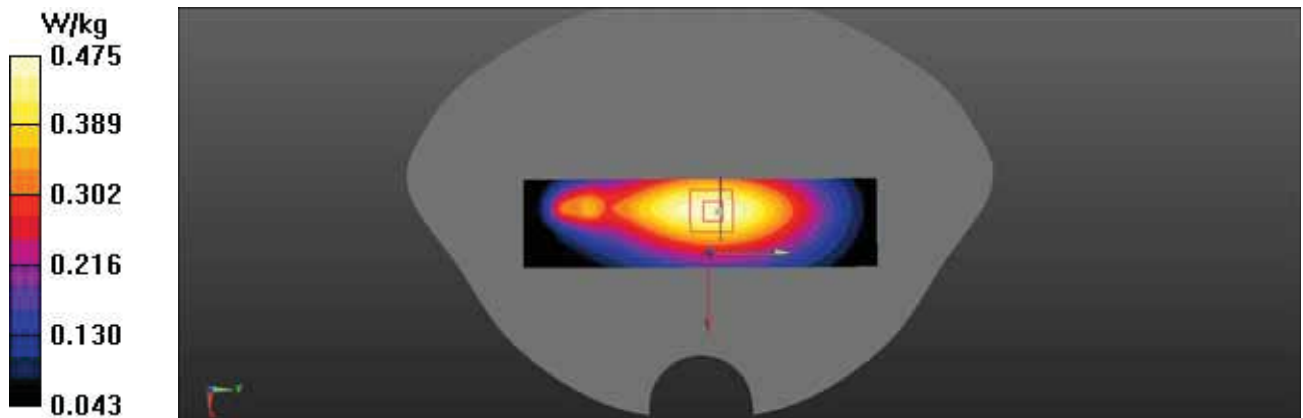

105-2_LTE FDD Band 12_10M_QPSK_50%RB_0Offset_Body Hotspot Left(10mm)_Ch23095

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 40.265$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 707.5 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095 50%RB/Area Scan (31x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.417 W/kg

Ch23095 50%RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.93 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.208 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 64.1%

Maximum value of SAR (measured) = 0.417 W/kg

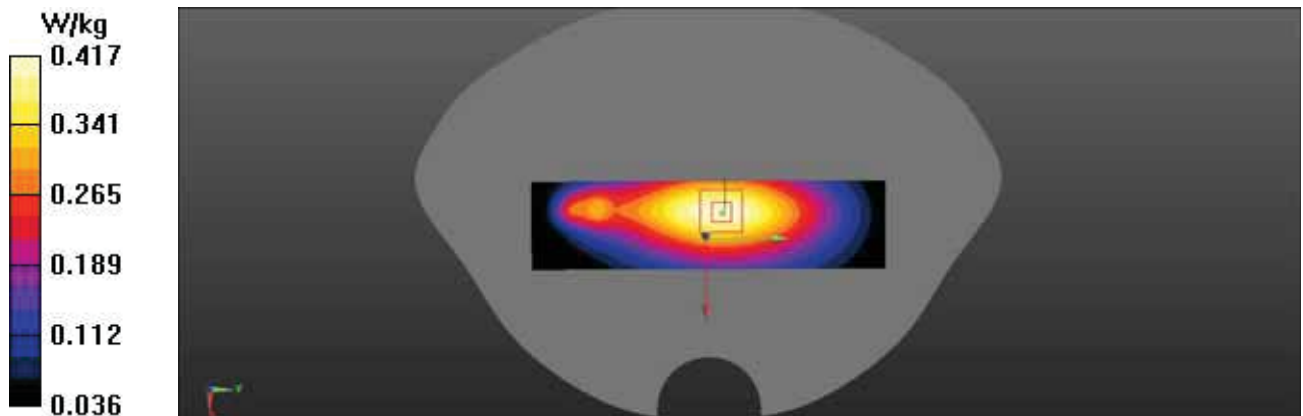

106_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Body Hotspot Right(10mm)_Ch23095

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 40.265$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 707.5 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (31x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.230 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.74 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.270 W/kg

SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.116 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 64.1%

Maximum value of SAR (measured) = 0.234 W/kg

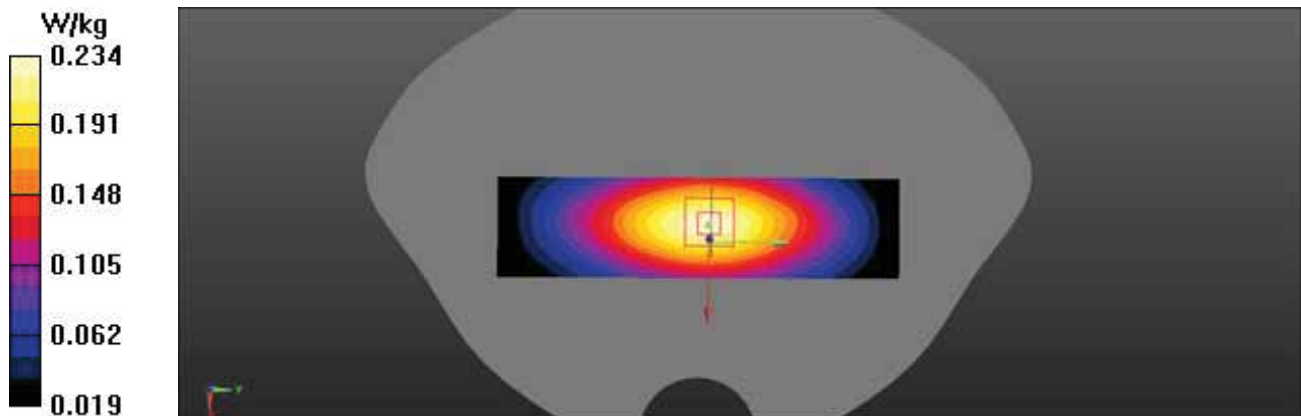

106-2_LTE FDD Band 12_10M_QPSK_50%RB_0Offset_Body Hotspot Right(10mm)_Ch23095

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 40.265$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 707.5 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095 50%RB/Area Scan (31x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.201 W/kg

Ch23095 50%RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.71 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.102 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 63.2%

Maximum value of SAR (measured) = 0.204 W/kg

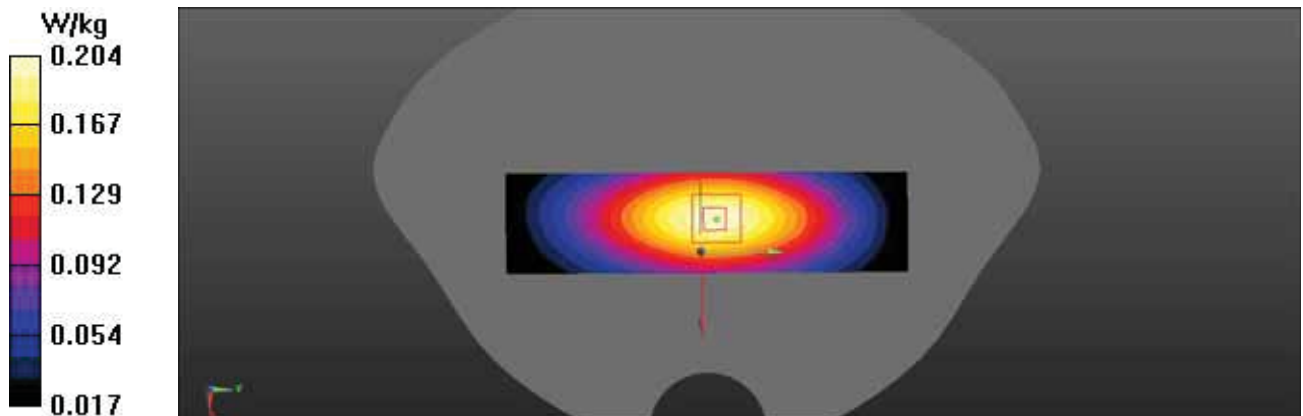

107_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Body Hotspot Bottom(10mm)_Ch23095

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 40.265$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 707.5 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (21x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.293 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.19 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.389 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.086 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 40.6%

Maximum value of SAR (measured) = 0.278 W/kg

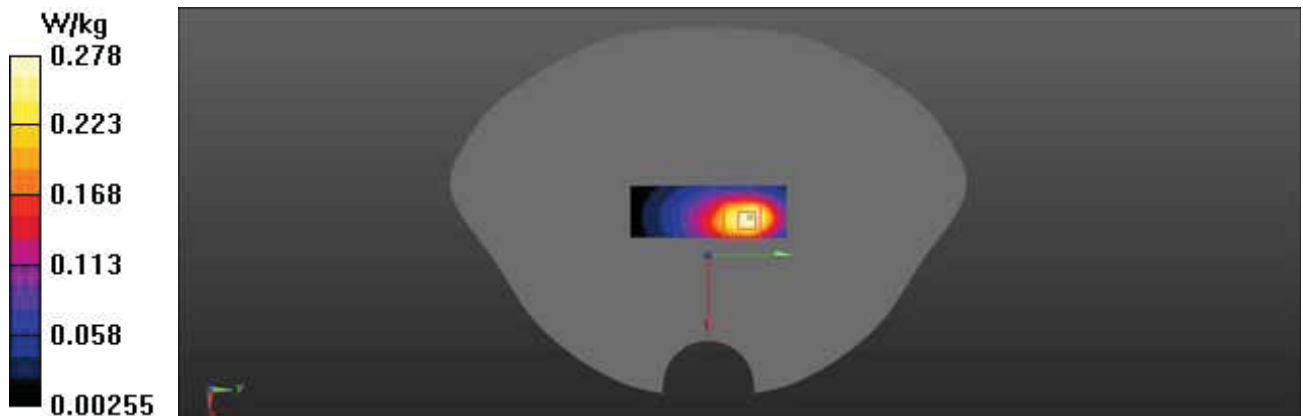

107-2_LTE FDD Band 12_10M_QPSK_50%RB_0Offset_Body Hotspot Bottom(10mm)_Ch23095

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 40.265$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 707.5 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095 50%RB/Area Scan (21x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.258 W/kg

Ch23095 50%RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.18 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.075 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 39.1%

Maximum value of SAR (measured) = 0.247 W/kg

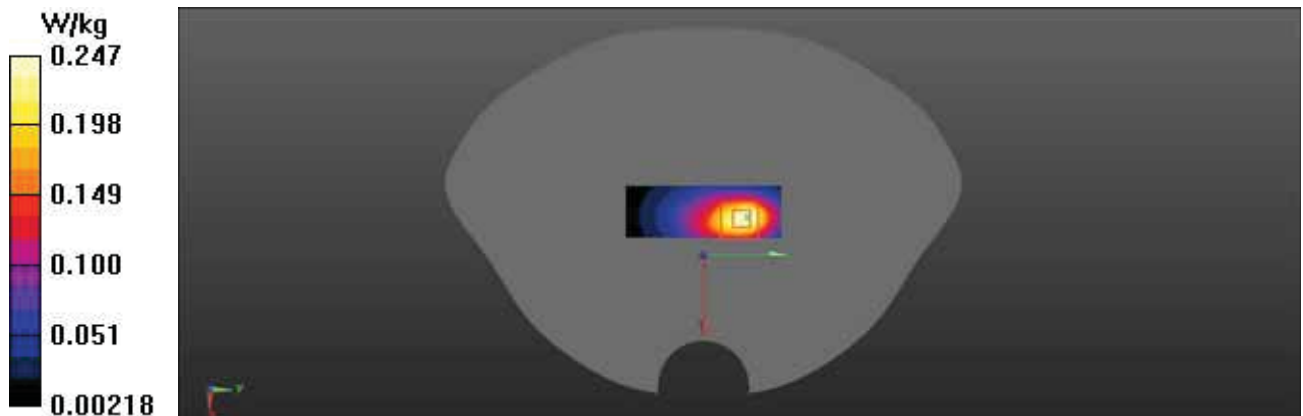

109_LTE FDD Band 13_10M_QPSK_1RB_0Offset_Head Left Cheek_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.214 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.13 V/m ; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.174 W/kg ; SAR(10 g) = 0.131 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 77.5%

Maximum value of SAR (measured) = 0.210 W/kg

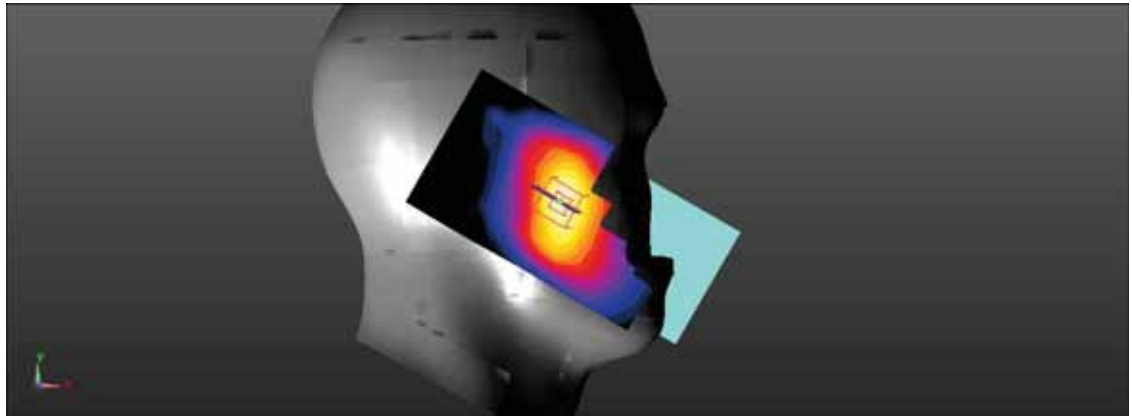

109-2_LTE FDD Band 13_10M_QPSK_50%RB_0Offset_Head Left Cheek_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230 50%RB/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.167 W/kg

Ch23230 50%RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.31 V/m ; Power Drift = 0.09 dB



Peak SAR (extrapolated) = 0.180 W/kg

SAR(1 g) = 0.136 W/kg ; SAR(10 g) = 0.102 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 76.6%

Maximum value of SAR (measured) = 0.166 W/kg

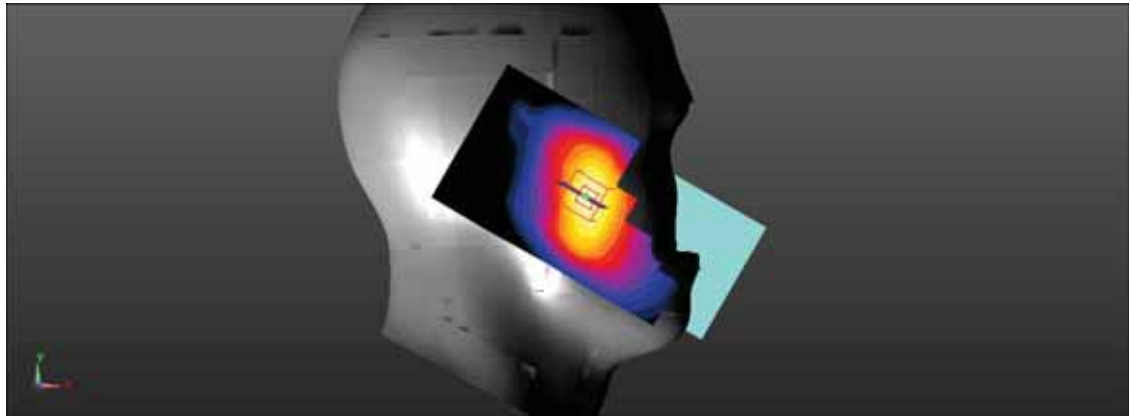

110_LTE FDD Band 13_10M_QPSK_1RB_0Offset_Head Left Tilt_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.111 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.70 V/m ; Power Drift = 0.13 dB



Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.094 W/kg ; SAR(10 g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.4%

Maximum value of SAR (measured) = 0.109 W/kg

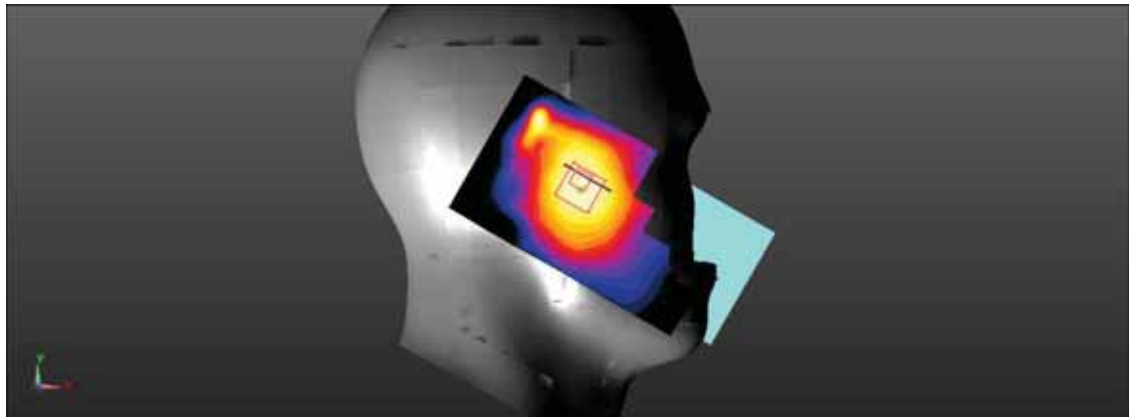

110-2_LTE FDD Band 13_10M_QPSK_50%RB_0Offset_Head Left Tilt_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230 50%RB/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0886 W/kg

Ch23230 50%RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.53 V/m ; Power Drift = -0.10 dB



Peak SAR (extrapolated) = 0.0940 W/kg

SAR(1 g) = 0.076 W/kg ; SAR(10 g) = 0.059 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 80.2%

Maximum value of SAR (measured) = 0.0878 W/kg

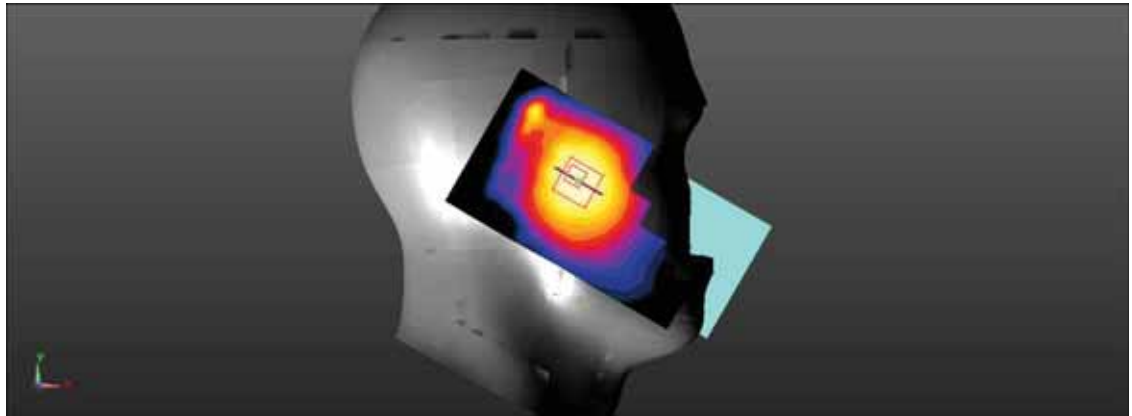

111_LTE FDD Band 13_10M_QPSK_1RB_0Offset_Head Right Cheek_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.181 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.20 V/m ; Power Drift = 0.15 dB



Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.153 W/kg ; SAR(10 g) = 0.115 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 78.4%

Maximum value of SAR (measured) = 0.182 W/kg

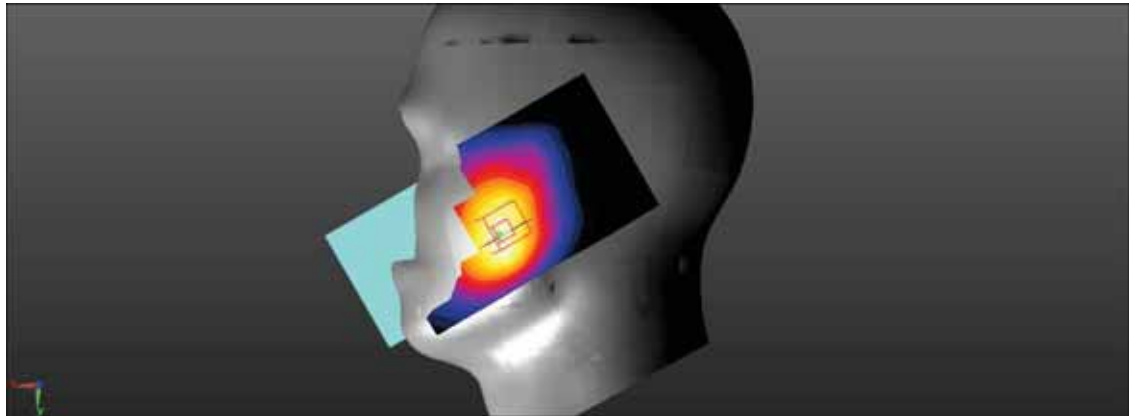

111-2_LTE FDD Band 13_10M_QPSK_50%RB_0Offset_Head Right Cheek_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230 50%RB/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.140 W/kg

Ch23230 50%RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.66 V/m ; Power Drift = 0.05 dB



Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.119 W/kg ; SAR(10 g) = 0.089 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 77.7%

Maximum value of SAR (measured) = 0.142 W/kg

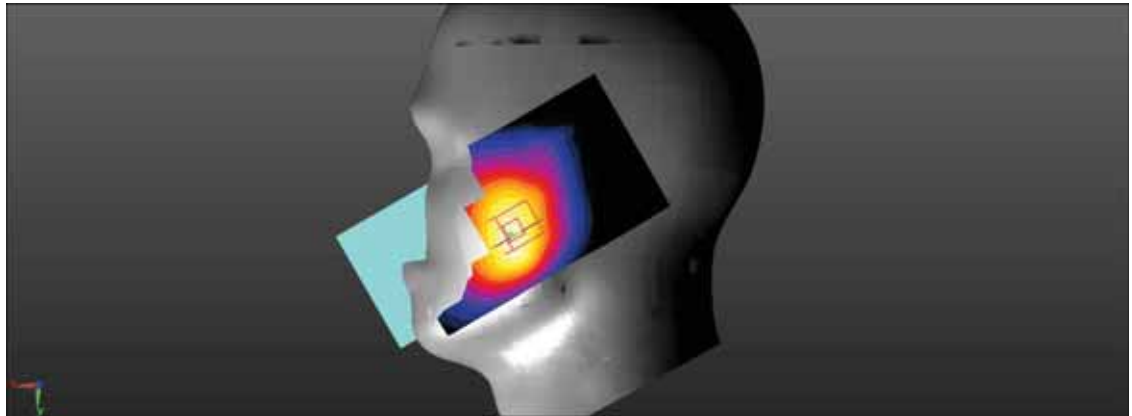

112_LTE FDD Band 13_10M_QPSK_1RB_0Offset_Head Right Tilt_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.117 W/kg

ConfiguCh23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.09 V/m ; Power Drift = 0.12 dB



Peak SAR (extrapolated) = 0.139 W/kg

SAR(1 g) = 0.068 W/kg ; SAR(10 g) = 0.047 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 58%

Maximum value of SAR (measured) = 0.0918 W/kg

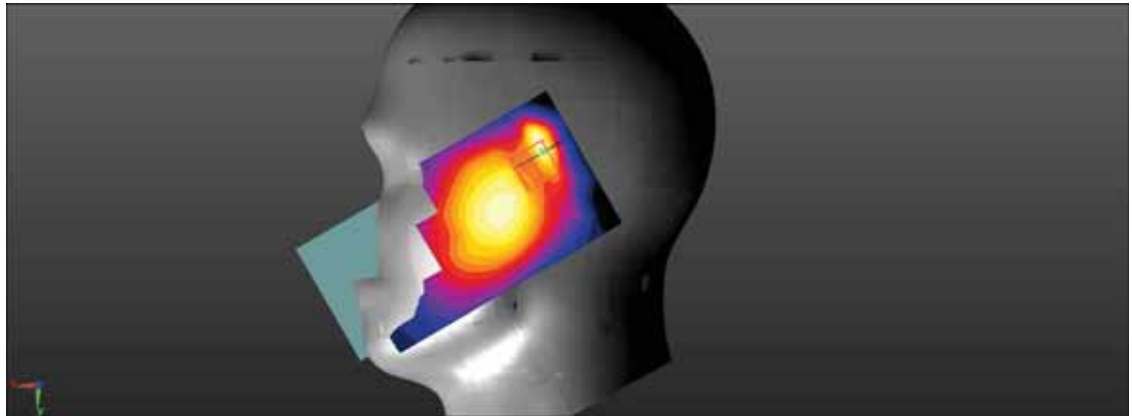

112-2_LTE FDD Band 13_10M_QPSK_50%RB_0Offset_Head Right Tilt_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230 50%RB/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0925 W/kg

Ch23230 50%RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.09 V/m ; Power Drift = -0.15 dB



Peak SAR (extrapolated) = 0.109 W/kg

SAR(1 g) = 0.052 W/kg ; SAR(10 g) = 0.036 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 38.4%

Maximum value of SAR (measured) = 0.0702 W/kg

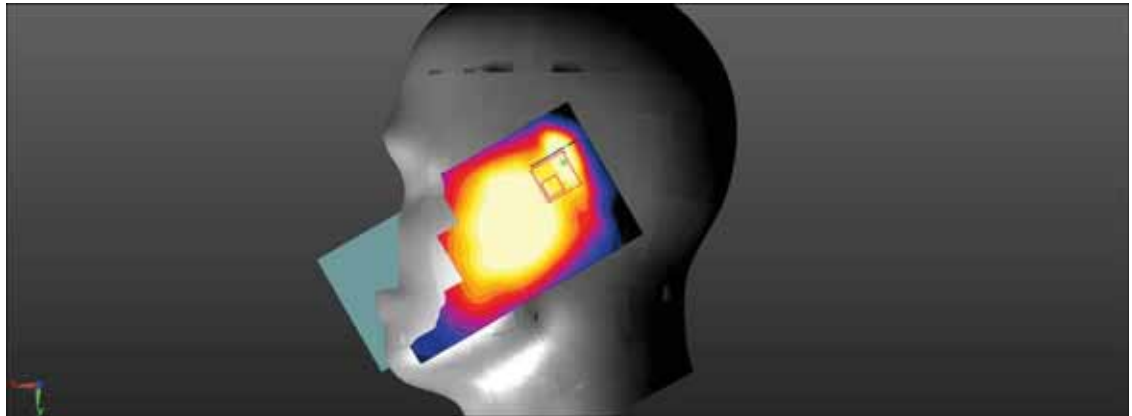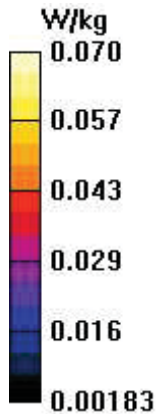

113_LTE FDD Band 13_10M_QPSK_1RB_0Offset_Body Back(10mm)_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230/Area Scan (61x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.274 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.48 V/m ; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.219 W/kg ; SAR(10 g) = 0.161 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.5%

Maximum value of SAR (measured) = 0.272 W/kg

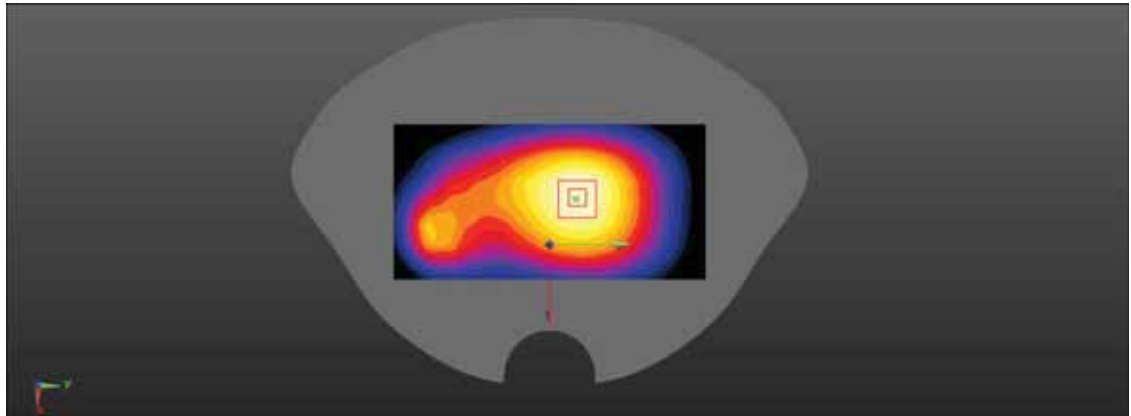

113-2_LTE FDD Band 13_10M_QPSK_50%RB_0Offset_Body Back(10mm)_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230 50%RB/Area Scan (61x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.207 W/kg

Ch23230 50%RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.17 V/m ; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.165 W/kg ; SAR(10 g) = 0.122 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.6%

Maximum value of SAR (measured) = 0.205 W/kg

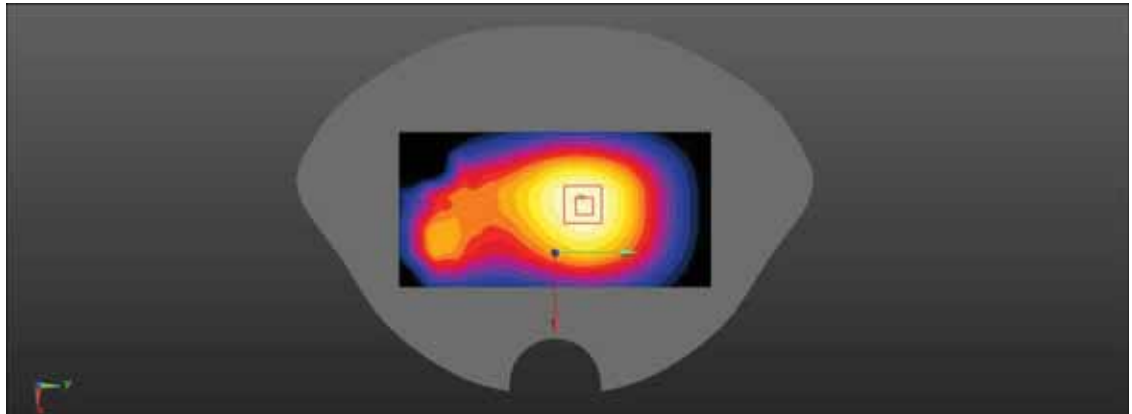

114_LTE FDD Band 13_10M_QPSK_1RB_0Offset_Body Front(10mm)_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230/Area Scan (61x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.286 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.17 V/m ; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.313 W/kg

SAR(1 g) = 0.185 W/kg ; SAR(10 g) = 0.116 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 61.3%

Maximum value of SAR (measured) = 0.256 W/kg

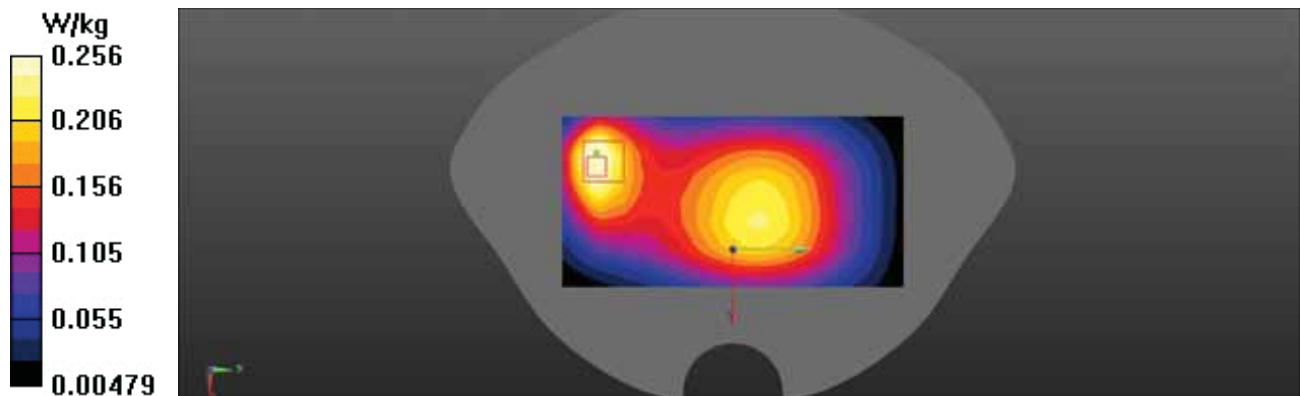

114-2_LTE FDD Band 13_10M_QPSK_50%RB_0Offset_Body Front(10mm) _Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230 50%RB/Area Scan (61x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.212 W/kg

Ch23230 50%RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.76 V/m ; Power Drift = -0.06 dB



Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.136 W/kg ; SAR(10 g) = 0.085 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 61.1%

Maximum value of SAR (measured) = 0.189 W/kg

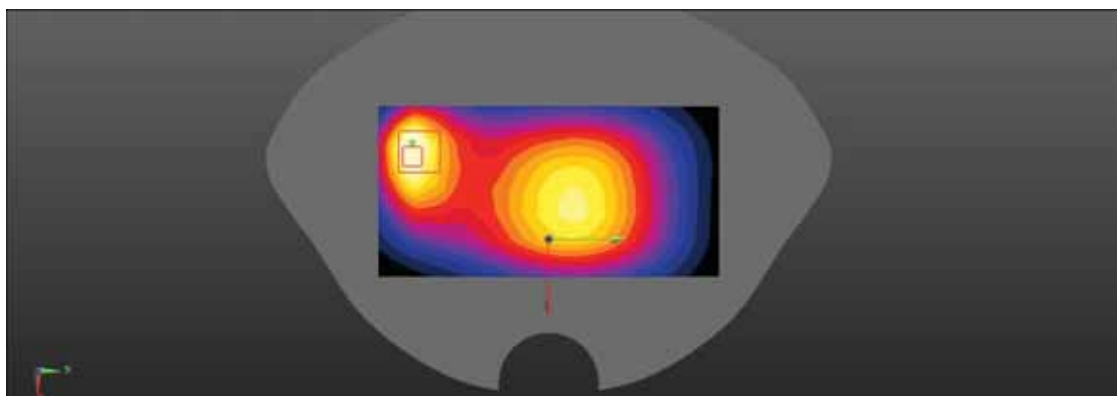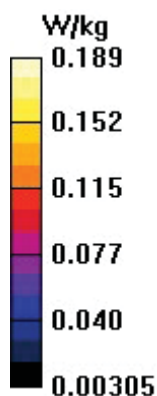

115_LTE FDD Band 13_10M_QPSK_1RB_0Offset_Body Hotspot Back(10mm)_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230/Area Scan (61x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.267 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.43 V/m ; Power Drift = 0.01 dB



Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.213 W/kg ; SAR(10 g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.4%

Maximum value of SAR (measured) = 0.265 W/kg

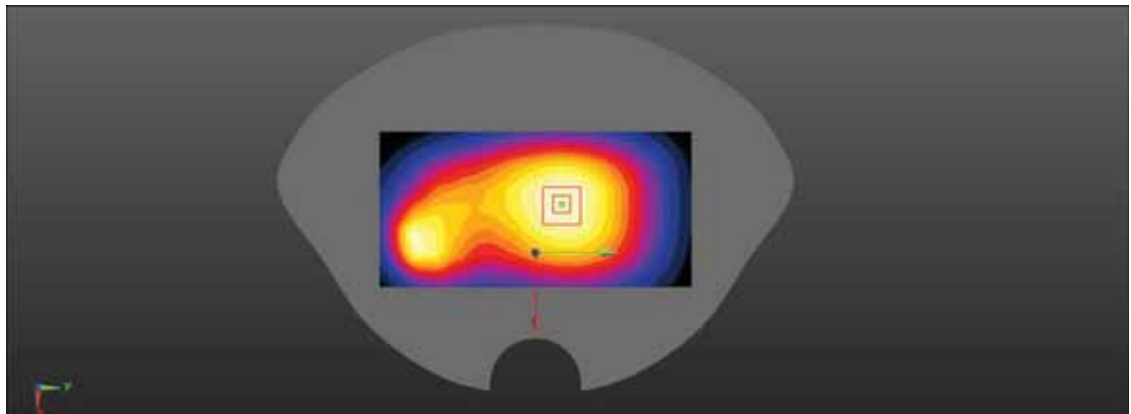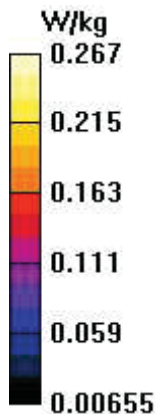

115-2_LTE FDD Band 13_10M_QPSK_50%RB_0Offset_Body Hotspot Back(10mm)_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230 50%RB/Area Scan (61x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.199 W/kg

Ch23230 50%RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.04 V/m ; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.159 W/kg ; SAR(10 g) = 0.117 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72%

Maximum value of SAR (measured) = 0.197 W/kg

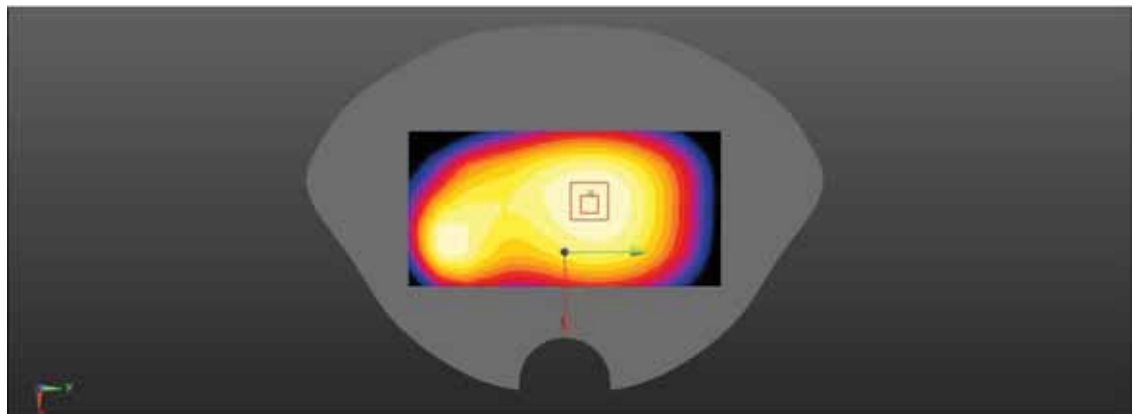

116_LTE FDD Band 13_10M_QPSK_1RB_0Offset_Body Hotspot Front(10mm) _Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230/Area Scan (61x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.299 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.07 V/m ; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.333 W/kg

SAR(1 g) = 0.192 W/kg ; SAR(10 g) = 0.119 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 0.278 W/kg

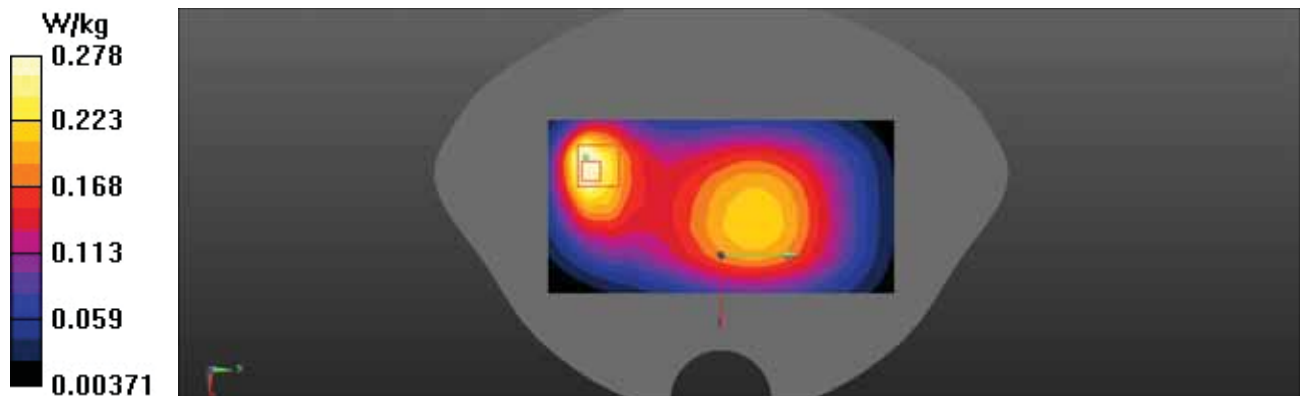

116-2_LTE FDD Band 13_10M_QPSK_50%RB_0Offset_Body Hotspot Front (10mm)_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230 50%RB/Area Scan (61x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.218 W/kg

Ch23230 50%RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.83 V/m ; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.141 W/kg ; SAR(10 g) = 0.087 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.9%

Maximum value of SAR (measured) = 0.202 W/kg

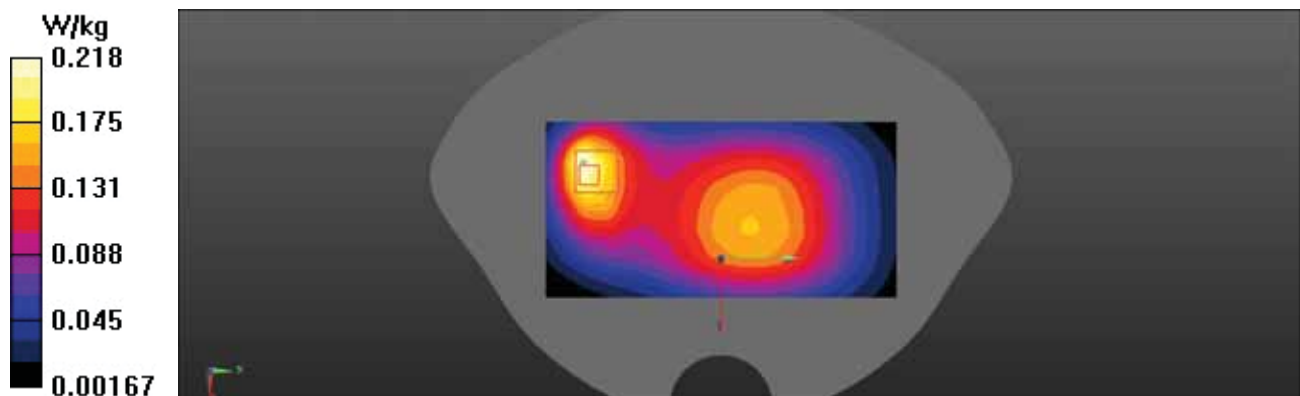

**117_LTE FDD Band 13_10M_QPSK_1RB_0Offset_Body Hotspot
Left(10mm)_Ch23230****DUT: S6505L**

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^{\circ}\text{C}$; Liquid Temperature : $22.5 \text{ }^{\circ}\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Configuration/Ch23230/Area Scan (21x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.296 W/kg

Configuration/Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.38 V/m ; Power Drift = -0.03 dB



Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.224 W/kg ; SAR(10 g) = 0.149 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 64.5%

Maximum value of SAR (measured) = 0.302 W/kg

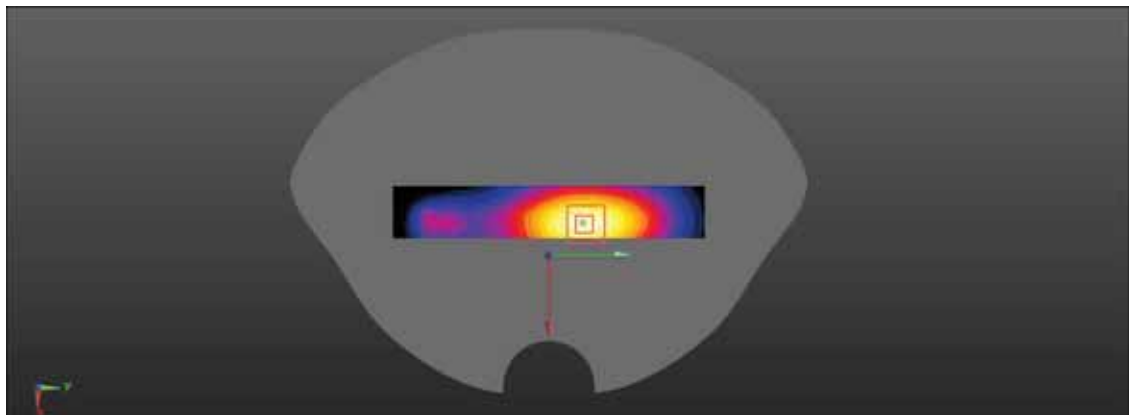

117-2_LTE FDD Band 13_10M_QPSK_50%RB_0Offset_Body Hotspot Left(10mm)_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230 50%RB/Area Scan (21x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.246 W/kg

Ch23230 50%RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.87 V/m ; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.187 W/kg ; SAR(10 g) = 0.124 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 64.4%

Maximum value of SAR (measured) = 0.250 W/kg

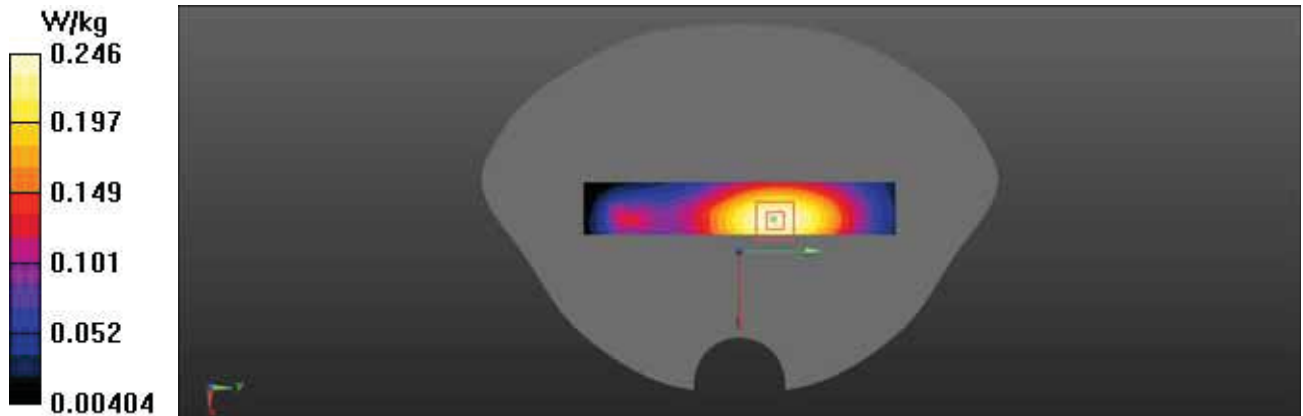

118_LTE FDD Band 13_10M_QPSK_1RB_0Offset_Body Hotspot Right(10mm)_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230/Area Scan (21x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.187 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.66 V/m ; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.143 W/kg ; SAR(10 g) = 0.095 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 63.9%

Maximum value of SAR (measured) = 0.189 W/kg

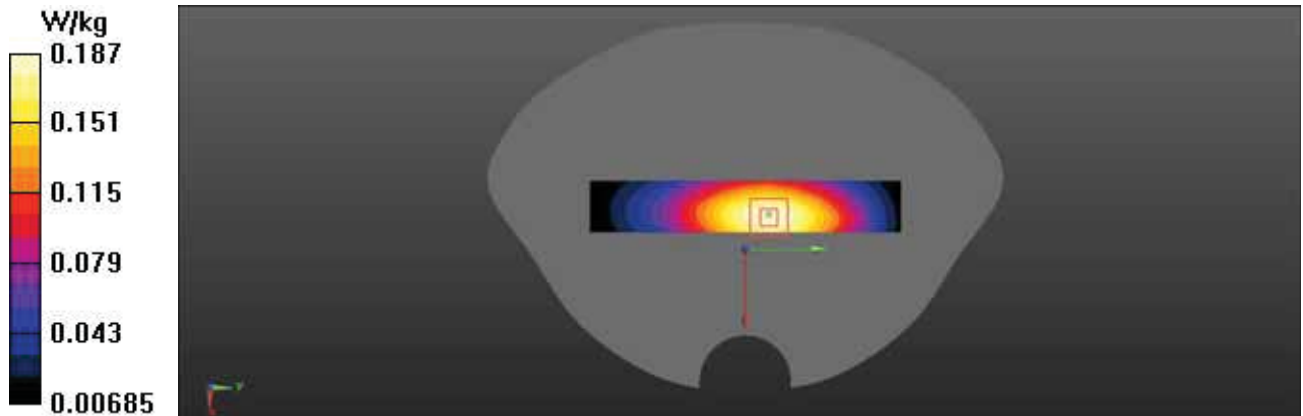

118-2_LTE FDD Band 13_10M_QPSK_50%RB_0Offset_Body Hotspot Right(10mm)_Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230 50%RB/Area Scan (21x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.146 W/kg

Ch23230 50%RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.76 V/m ; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.109 W/kg ; SAR(10 g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 64.2%

Maximum value of SAR (measured) = 0.146 W/kg

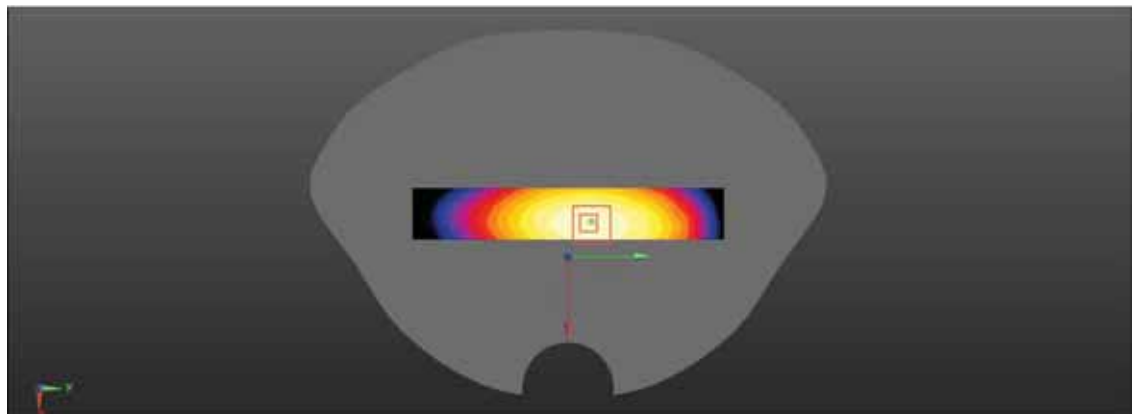

120_LTE FDD Band 13_10M_QPSK_1RB_0Offset_Body Hotspot Bottom(10mm) _Ch23230

DUT: S6505L

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.005$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(9.81, 9.81, 9.81) @ 782 MHz; Calibrated: 11/16/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/23/2020
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23230/Area Scan (21x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.338 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.59 V/m ; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.206 W/kg ; SAR(10 g) = 0.114 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 43.7%

Maximum value of SAR (measured) = 0.340 W/kg

