

FCC Test Report

Report No.: RFBBQZ-WTW-P20120983

FCC ID: PY321100533

Test Model: WAX206

Received Date: Dec. 30, 2020

Test Date: Jan. 15 ~ May 21, 2021

Issued Date: May 27, 2021

**Applicant and
Manufacturer:** NETGEAR INC.

Address: 350 East Plumeria Drive, San Jose, CA 95134, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results.....	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes.....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	13
3.5 General Description of Applied Standards and References	14
4 Test Types and Results	15
4.1 Radiated Emission and Bandedge Measurement	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement	15
4.1.2 Test Instruments	16
4.1.3 Test Procedures.....	17
4.1.4 Deviation from Test Standard	18
4.1.5 Test Set Up	18
4.1.6 EUT Operating Conditions.....	19
4.1.7 Test Results	20
4.2 Conducted Emission Measurement.....	34
4.2.1 Limits of Conducted Emission Measurement	34
4.2.2 Test Instruments	34
4.2.3 Test Procedures.....	35
4.2.4 Deviation from Test Standard	35
4.2.5 Test Setup.....	35
4.2.6 EUT Operating Conditions.....	35
4.2.7 Test Results	36
4.3 6 dB Bandwidth Measurement.....	38
4.3.1 Limits of 6 dB Bandwidth Measurement.....	38
4.3.2 Test Setup.....	38
4.3.3 Test Instruments	38
4.3.4 Test Procedure	38
4.3.5 Deviation from Test Standard	38
4.3.6 EUT Operating Conditions.....	38
4.3.7 Test Results	39
4.4 Occupied Bandwidth Measurement.....	41
4.4.1 Test Setup.....	41
4.4.2 Test Instruments	41
4.4.3 Test Procedure	41
4.4.4 Deviation from Test Standard	41
4.4.5 EUT Operating Conditions.....	41
4.4.6 Test Results	42
4.5 Conducted Output Power Measurement	44
4.5.1 Limits of Conducted Output Power Measurement.....	44
4.5.2 Test Setup.....	44
4.5.3 Test Instruments	44
4.5.4 Test Procedures.....	44
4.5.5 Deviation from Test Standard	44
4.5.6 EUT Operating Conditions.....	44
4.5.7 Test Results	45

4.6	Power Spectral Density Measurement	47
4.6.1	Limits of Power Spectral Density Measurement.....	47
4.6.2	Test Setup.....	47
4.6.3	Test Instruments	47
4.6.4	Test Procedure	47
4.6.5	Deviation from Test Standard	48
4.6.6	EUT Operating Condition	48
4.6.7	Test Results	49
4.7	Conducted Out of Band Emission Measurement	54
4.7.1	Limits of Conducted Out of Band Emission Measurement.....	54
4.7.2	Test Setup.....	54
4.7.3	Test Instruments	54
4.7.4	Test Procedure	54
4.7.5	Deviation from Test Standard	54
4.7.6	EUT Operating Condition	54
4.7.7	Test Results	55
5	Pictures of Test Arrangements.....	72
	Annex A- Band Edge Measurement	73
	Appendix – Information of the Testing Laboratories	79

Release Control Record

Issue No.	Description	Date Issued
RFBBQZ-WTW-P20120983	Original Release	May 27, 2021

1 Certificate of Conformity

Product: NETGEAR WiFi 6 AX3200 Dual Band Access Point

Brand: NETGEAR

Test Model: WAX206

Sample Status: Engineering Sample

Applicant: NETGEAR INC.

Test Date: Jan. 15 ~ May 21, 2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Lena Wang , Date: May 27, 2021
Lena Wang / Specialist

Approved by : Dylan Chiou , Date: May 27, 2021
Dylan Chiou / Senior Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -18.38 dB at 0.16173 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.1 dB at 4874 MHz, 2390 MHz and 2483.50 MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is i-pex(MHF).

Note:

- For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.79 dB
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	NETGEAR WiFi 6 AX3200 Dual Band Access Point
Brand	NETGEAR
Test Model	WAX206
Status of EUT	Engineering Sample
Power Supply Rating	12.0 Vdc (adapter)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to 600 Mbps 802.11ac: up to 800 Mbps
Operating Frequency	2412 ~ 2462 MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20), 802.11ac (VHT20) 7 for 802.11n (HT40), 802.11ac (VHT40)
Output Power	CDD Mode: 800.539 mW Beamforming Mode: 703.477 mW
Antenna Type	Refer to Note as below
Antenna Connector	Refer to Note as below
Accessory Device	Refer to Note as below
Data Cable Supplied	Refer to Note as below

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides 4 completed transmitters and 4 receivers.

Modulation Mode	Tx Function	Beamforming Mode
802.11b	4TX	Not Support
802.11g	4TX	Not Support
802.11n (HT20)	4TX	Support
802.11n (HT40)	4TX	Support
802.11ac (VHT20)	4TX	Support
802.11ac (VHT40)	4TX	Support

* For 802.11n CDD mode and Beamforming mode are presented in power output test item. For other test items, CDD mode is the worst case for final tests after pretesting.

2. The EUT contains following accessory devices.

3. Adapter 1	
Brand	NETGEAR
Model	ADS-40FPA-12 12030EPCU-L ADS-40FPA-12 12030EPC-L
P/N	332-11525-01
Input Power	100-120Vac~60Hz
Output Power	12Vdc, 2.5A
Power line	1.8m non-shielded DC cable without core

Adapter 2	
Brand	NETGEAR
Model	AD2067F10
P/N	332-10797-01
Input Power	100-120Vac~50/60Hz
Output Power	12Vdc, 2.5A
Power line	1.8m non-shielded DC cable without core

* Adapter 1 was chosen for final test and presented in the test report.

4. The following antennas were provided to the EUT.

Ant. Type	Metal		
Connector Type	i-pex(MHF)		
Directional Gain (dBi)			
2400-2500	5180-5240	5745-5825	
6.81	6.85	7.02	

* For detailed antenna information, please refer to the Operational Description-Antenna Specification report.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20 / VHT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

7 channels are provided for 802.11n (HT40 / VHT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442
4	2427	8	2447
5	2432	9	2452
6	2437		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE $\geq$ 1G:** Radiated Emission above 1 GHz

RE<1G: Radiated Emission below 1 GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

NOTE: "-" means no effect.

NOTE: Radiated emission test (below 1GHz) and power line conducted emission test items chosen the worst maximum power.

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11ac (VHT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11ac (VHT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11n (VHT40)	3 to 9	9	OFDM	BPSK	6.5

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11n (VHT40)	1 to 11	9	OFDM	BPSK	6.5

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
-	802.11ac (VHT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11ac (VHT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11ac (VHT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11ac (VHT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Tank Wu
RE<1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Hans Wu
PLC	25 deg. C, 65 % RH	120 Vac, 60 Hz	Tank Wu
APCM	25 deg. C, 65 % RH	120 Vac, 60 Hz	Ivan Tseng

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is $\geq 98\%$, duty factor is not required.


Duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $8.4/8.475 = 0.991$

802.11g: Duty cycle = $1.384/1.454 = 0.952$, Duty factor = $10 * \log(1/0.952) = 0.21$

802.11ac (VHT20): Duty cycle = $1.305/1.367 = 0.955$, Duty factor = $10 * \log(1/0.955) = 0.20$

802.11ac (VHT40): Duty cycle = $0.644/0.705 = 0.913$, Duty factor = $10 * \log(1/0.913) = 0.39$

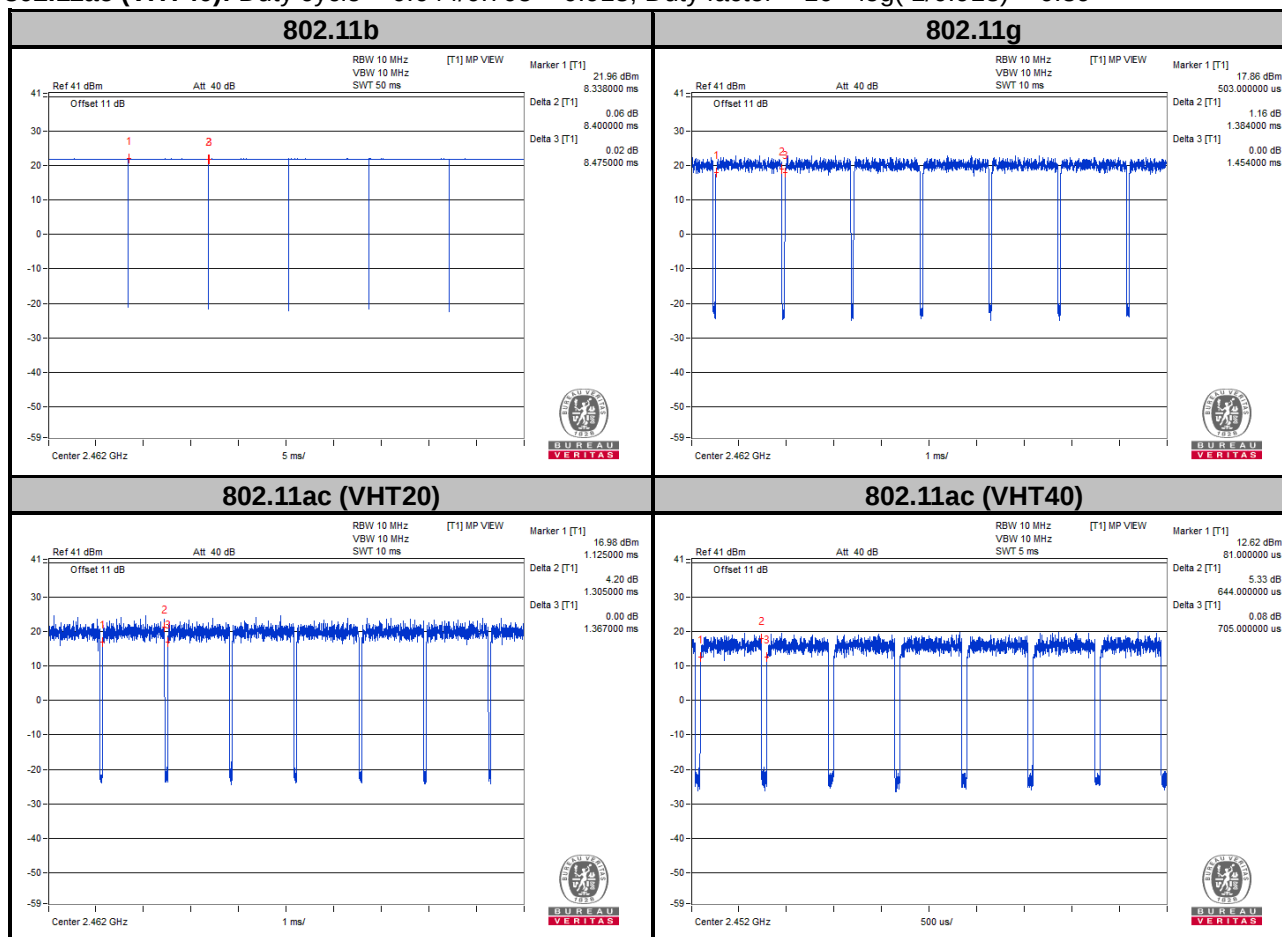

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID
A	Notebook	DELL	E5410	1HC2XM1	N/A
B	Load	N/A	N/A	N/A	N/A

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	LAN	4	1.5	N	0	RJ45, Cat5e
2.	LAN	1	10	N	0	RJ45, Cat5e

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Items A acted as communication partners to transfer data.

3.4.1 Configuration of System under Test

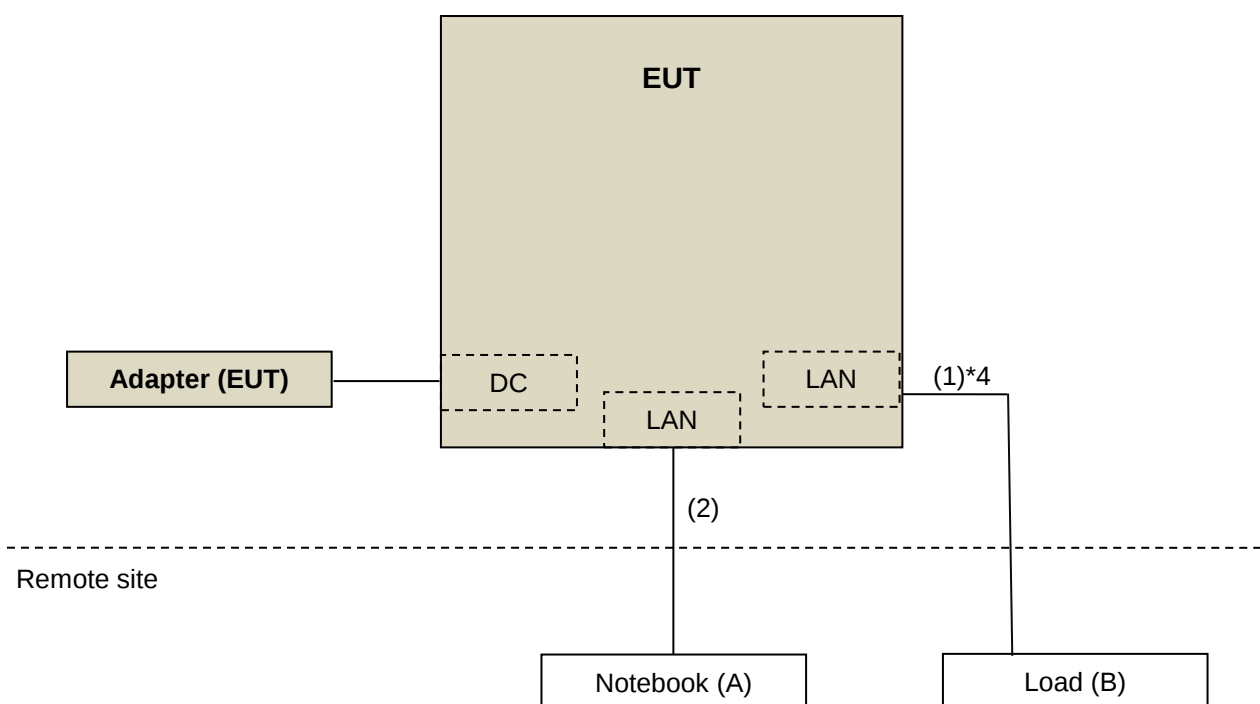

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Dec. 31, 2020	Dec. 30, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Sep. 16, 2020	Sep. 15, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Nov. 03, 2020	Nov. 02, 2021
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Nov. 22, 2020	Nov. 21, 2021
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 22, 2020	Nov. 21, 2021
Loop Antenna TESEQ	HLA 6121	45745	Jul. 06, 2020	Jul. 05, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10631	Jun. 08, 2020	Jun. 07, 2021
Preamplifier KEYSIGHT (Above 1GHz)	83017A	MY53270295	Jun. 08, 2020	Jun. 07, 2021
RF Coaxial Cable WORKEN With 5dB PAD	8D-FB	Cable-CH4-01	Aug. 16, 2020	Aug. 15, 2021
RF Coaxial Cable EMCI	EMC102-KM-KM-3000	150929	Aug. 16, 2020	Aug. 15, 2021
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	Aug. 16, 2020	Aug. 15, 2021
RF signal cable HUBER+SUHNER	SUCOFLEX 104	MY 13380+295012/04	Jun. 08, 2020	Jun. 07, 2021
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03 (250724)	Jun. 08, 2020	Jun. 07, 2021
Software BV ADT	ADT_Radiated_V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021703	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Pre-amplifier (18GHz-40GHz) EMC	EMC184045B	980175	Sep. 04, 2020	Sep. 03, 2021
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55190004/MY55190007/MY55210005	Jul. 13, 2020	Jul. 12, 2021

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 4.

4.1.3 Test Procedures

For Radiated Emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

For Radiated Emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
(11b: RBW = 1 MHz, VBW = 10 Hz ; 11g: RBW = 1 MHz, VBW = 1 kHz ;
11n (VHT20): RBW = 1 MHz, VBW = 1 kHz ; 11n (VHT40): RBW = 1 MHz, VBW = 2 kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


<Radiated Emission below 30 MHz>

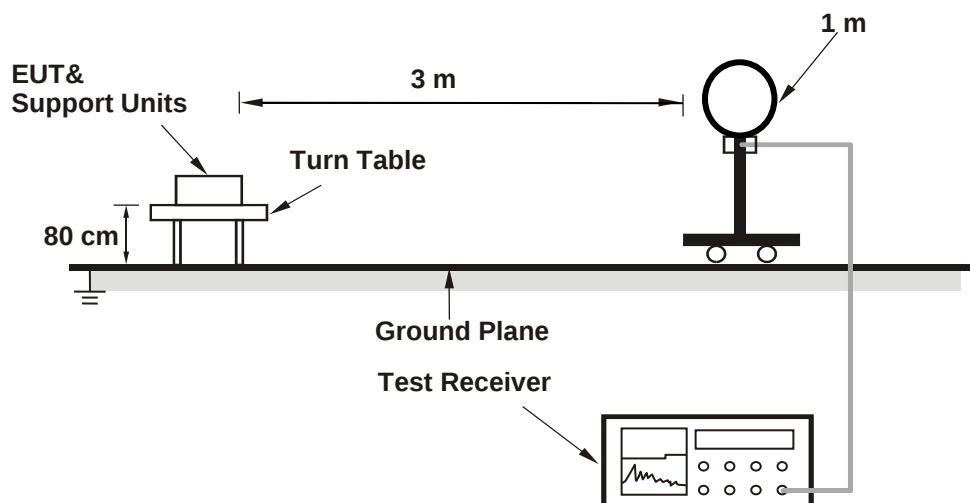

<Radiated Emission 30 MHz to 1 GHz>

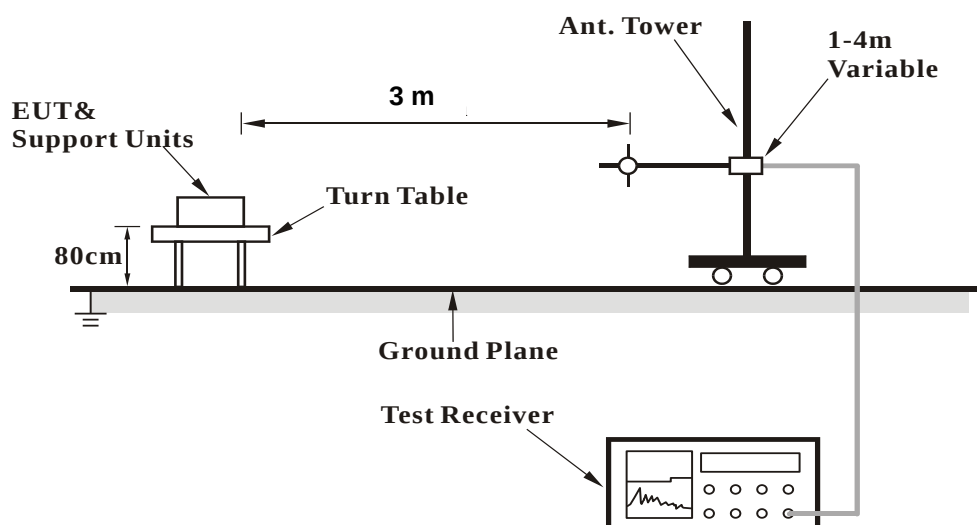

<Radiated Emission above 1 GHz>

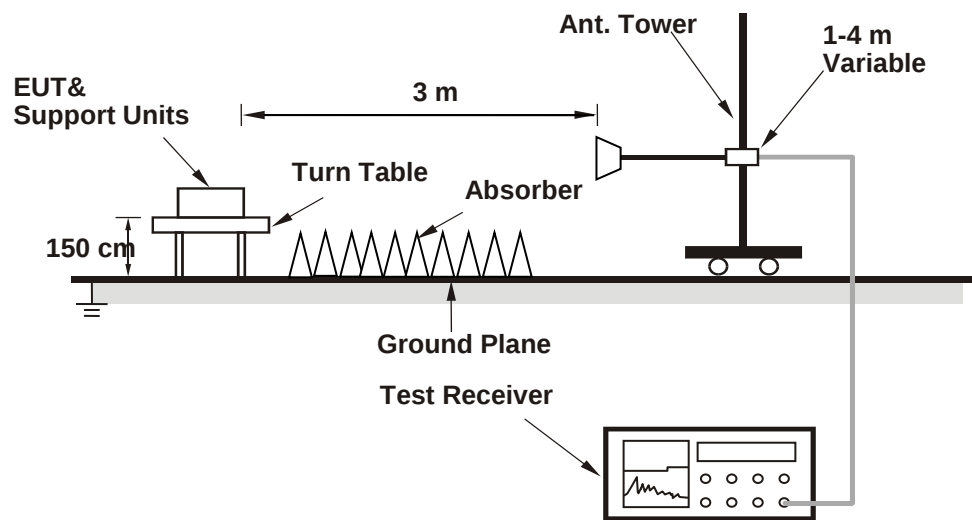

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1 GHz Data :

802.11b

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.3 PK	74.0	-12.7	2.37 H	242	28.3	33.0
2	2390.00	48.3 AV	54.0	-5.7	2.37 H	242	15.3	33.0
3	*2412.00	113.7 PK			2.37 H	242	80.6	33.1
4	*2412.00	111.5 AV			2.37 H	242	78.4	33.1
5	4824.00	57.3 PK	74.0	-16.7	1.08 H	151	45.9	11.4
6	4824.00	53.8 AV	54.0	-0.2	1.08 H	151	42.4	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.8 PK	74.0	-12.2	1.78 V	286	28.8	33.0
2	2390.00	49.9 AV	54.0	-4.1	1.78 V	286	16.9	33.0
3	*2412.00	115.4 PK			1.78 V	286	82.3	33.1
4	*2412.00	113.2 AV			1.78 V	286	80.1	33.1
5	4824.00	56.2 PK	74.0	-17.8	1.68 V	175	44.8	11.4
6	4824.00	53.2 AV	54.0	-0.8	1.68 V	175	41.8	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	117.1 PK			2.36 H	270	84.1	33.0
2	*2437.00	114.9 AV			2.36 H	270	81.9	33.0
3	4874.00	59.9 PK	74.0	-14.1	1.00 H	223	48.6	11.3
4	4874.00	53.9 AV	54.0	-0.1	1.00 H	223	42.6	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	117.9 PK			1.76 V	355	84.9	33.0
2	*2437.00	115.6 AV			1.76 V	355	82.6	33.0
3	4874.00	59.2 PK	74.0	-14.8	1.73 V	183	47.9	11.3
4	4874.00	53.1 AV	54.0	-0.9	1.73 V	183	41.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.2 PK			1.91 H	277	83.2	33.0
2	*2462.00	113.9 AV			1.91 H	277	80.9	33.0
3	2483.50	61.4 PK	74.0	-12.6	1.91 H	277	28.3	33.1
4	2483.50	50.5 AV	54.0	-3.5	1.91 H	277	17.4	33.1
5	4924.00	57.0 PK	74.0	-17.0	1.10 H	153	45.7	11.3
6	4924.00	53.8 AV	54.0	-0.2	1.10 H	153	42.5	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.1 PK			1.62 V	357	85.1	33.0
2	*2462.00	115.9 AV			1.62 V	357	82.9	33.0
3	2483.50	62.2 PK	74.0	-11.8	1.62 V	357	29.1	33.1
4	2483.50	51.2 AV	54.0	-2.8	1.62 V	357	18.1	33.1
5	4924.00	51.8 PK	74.0	-22.2	1.60 V	184	40.5	11.3
6	4924.00	47.2 AV	54.0	-6.8	1.60 V	184	35.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11g

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.3 PK	74.0	-3.7	2.05 H	286	37.3	33.0
2	2390.00	53.6 AV	54.0	-0.4	2.05 H	286	20.6	33.0
3	*2412.00	116.5 PK			2.05 H	286	83.4	33.1
4	*2412.00	107.6 AV			2.05 H	286	74.5	33.1
5	4824.00	58.7 PK	74.0	-15.3	1.03 H	217	47.3	11.4
6	4824.00	46.6 AV	54.0	-7.4	1.03 H	217	35.2	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.5 PK	74.0	-5.5	1.89 V	355	35.5	33.0
2	2390.00	53.9 AV	54.0	-0.1	1.89 V	355	20.9	33.0
3	*2412.00	116.2 PK			1.89 V	355	83.1	33.1
4	*2412.00	107.4 AV			1.89 V	355	74.3	33.1
5	4824.00	55.1 PK	74.0	-18.9	1.61 V	180	43.7	11.4
6	4824.00	43.0 AV	54.0	-11.0	1.61 V	180	31.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	121.0 PK			2.36 H	273	88.0	33.0
2	*2437.00	111.4 AV			2.36 H	273	78.4	33.0
3	4874.00	59.2 PK	74.0	-14.8	2.18 H	147	47.9	11.3
4	4874.00	46.0 AV	54.0	-8.0	2.18 H	147	34.7	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	121.9 PK			1.78 V	351	88.9	33.0
2	*2437.00	112.1 AV			1.78 V	351	79.1	33.0
3	4874.00	55.1 PK	74.0	-18.9	1.63 V	177	43.8	11.3
4	4874.00	43.2 AV	54.0	-10.8	1.63 V	177	31.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.4 PK			1.91 H	265	84.4	33.0
2	*2462.00	108.0 AV			1.91 H	265	75.0	33.0
3	2483.50	70.4 PK	74.0	-3.6	1.91 H	265	37.3	33.1
4	2483.50	53.9 AV	54.0	-0.1	1.91 H	265	20.8	33.1
5	4924.00	55.1 PK	74.0	-18.9	1.04 H	218	43.8	11.3
6	4924.00	42.5 AV	54.0	-11.5	1.04 H	218	31.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.9 PK			2.27 V	286	84.9	33.0
2	*2462.00	108.6 AV			2.27 V	286	75.6	33.0
3	2483.50	68.7 PK	74.0	-5.3	2.27 V	286	35.6	33.1
4	2483.50	53.9 AV	54.0	-0.1	2.27 V	286	20.8	33.1
5	4924.00	53.4 PK	74.0	-20.6	1.69 V	183	42.1	11.3
6	4924.00	40.0 AV	54.0	-14.0	1.69 V	183	28.7	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11ac (VHT20)

RF Mode	TX 802.11ac (VHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.3 PK	74.0	-4.7	2.18 H	259	36.3	33.0
2	2390.00	53.5 AV	54.0	-0.5	2.18 H	259	20.5	33.0
3	*2412.00	111.4 PK			2.18 H	259	78.3	33.1
4	*2412.00	100.4 AV			2.18 H	259	67.3	33.1
5	4824.00	56.3 PK	74.0	-17.7	1.03 H	219	44.9	11.4
6	4824.00	43.2 AV	54.0	-10.8	1.03 H	219	31.8	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.8 PK	74.0	-5.2	2.35 V	309	35.8	33.0
2	2390.00	53.8 AV	54.0	-0.2	2.35 V	309	20.8	33.0
3	*2412.00	112.5 PK			2.35 V	309	79.4	33.1
4	*2412.00	101.6 AV			2.35 V	309	68.5	33.1
5	4824.00	53.5 PK	74.0	-20.5	1.72 V	186	42.1	11.4
6	4824.00	39.3 AV	54.0	-14.7	1.72 V	186	27.9	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ac (VHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	120.3 PK			1.93 H	261	87.3	33.0
2	*2437.00	109.5 AV			1.93 H	261	76.5	33.0
3	2483.50	66.7 PK	74.0	-7.3	1.93 H	261	33.6	33.1
4	2483.50	53.8 AV	54.0	-0.2	1.93 H	261	20.7	33.1
5	4874.00	57.8 PK	74.0	-16.2	2.77 H	52	46.5	11.3
6	4874.00	46.7 AV	54.0	-7.3	2.77 H	52	35.4	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	121.6 PK			1.71 V	345	88.6	33.0
2	*2437.00	111.5 AV			1.71 V	345	78.5	33.0
3	2483.50	65.6 PK	74.0	-8.4	1.71 V	345	32.5	33.1
4	2483.50	53.2 AV	54.0	-0.8	1.71 V	345	20.1	33.1
5	4874.00	54.8 PK	74.0	-19.2	1.79 V	183	43.5	11.3
6	4874.00	43.9 AV	54.0	-10.1	1.79 V	183	32.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ac (VHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.9 PK			2.18 H	245	79.9	33.0
2	*2462.00	102.7 AV			2.18 H	245	69.7	33.0
3	2483.50	69.8 PK	74.0	-4.2	2.18 H	245	36.7	33.1
4	2483.50	53.7 AV	54.0	-0.3	2.18 H	245	20.6	33.1
5	4924.00	53.4 PK	74.0	-20.6	1.02 H	148	42.1	11.3
6	4924.00	40.6 AV	54.0	-13.4	1.02 H	148	29.3	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.1 PK			2.53 V	274	81.1	33.0
2	*2462.00	103.3 AV			2.53 V	274	70.3	33.0
3	2483.50	70.1 PK	74.0	-3.9	2.53 V	274	37.0	33.1
4	2483.50	53.9 AV	54.0	-0.1	2.53 V	274	20.8	33.1
5	4924.00	52.5 PK	74.0	-21.5	1.71 V	169	41.2	11.3
6	4924.00	39.5 AV	54.0	-14.5	1.71 V	169	28.2	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11ac (VHT40)

RF Mode	TX 802.11ac (VHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.3 PK	74.0	-5.7	2.74 H	245	35.3	33.0
2	2390.00	53.8 AV	54.0	-0.2	2.74 H	245	20.8	33.0
3	*2422.00	109.5 PK			2.74 H	245	76.5	33.0
4	*2422.00	99.6 AV			2.74 H	245	66.6	33.0
5	4844.00	52.9 PK	74.0	-21.1	1.13 H	159	41.6	11.3
6	4844.00	39.2 AV	54.0	-14.8	1.13 H	159	27.9	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.7 PK	74.0	-8.3	2.89 V	290	32.7	33.0
2	2390.00	53.2 AV	54.0	-0.8	2.89 V	290	20.2	33.0
3	*2422.00	109.8 PK			2.89 V	290	76.8	33.0
4	*2422.00	99.9 AV			2.89 V	290	66.9	33.0
5	4844.00	52.6 PK	74.0	-21.4	1.72 V	175	41.3	11.3
6	4844.00	38.8 AV	54.0	-15.2	1.72 V	175	27.5	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ac (VHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.5 PK	74.0	-7.5	2.13 H	105	33.5	33.0
2	2390.00	53.8 AV	54.0	-0.2	2.13 H	105	20.8	33.0
3	*2437.00	111.7 PK			2.13 H	105	78.7	33.0
4	*2437.00	101.7 AV			2.13 H	105	68.7	33.0
5	4874.00	52.8 PK	74.0	-21.2	1.51 H	145	41.5	11.3
6	4874.00	39.2 AV	54.0	-14.8	1.51 H	145	27.9	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.4 PK	74.0	-6.6	1.74 V	348	34.4	33.0
2	2390.00	53.8 AV	54.0	-0.2	1.74 V	348	20.8	33.0
3	*2437.00	114.8 PK			1.74 V	348	81.8	33.0
4	*2437.00	103.4 AV			1.74 V	348	70.4	33.0
5	2483.50	69.4 PK	74.0	-4.6	1.74 V	348	36.3	33.1
6	2483.50	53.6 AV	54.0	-0.4	1.74 V	348	20.5	33.1
7	4874.00	52.5 PK	74.0	-21.5	1.69 V	172	41.2	11.3
8	4874.00	38.7 AV	54.0	-15.3	1.69 V	172	27.4	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ac (VHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	110.1 PK			2.43 H	267	77.1	33.0
2	*2452.00	100.5 AV			2.43 H	267	67.5	33.0
3	2483.50	68.9 PK	74.0	-5.1	2.43 H	267	35.8	33.1
4	2483.50	53.7 AV	54.0	-0.3	2.43 H	267	20.6	33.1
5	4904.00	53.2 PK	74.0	-20.8	1.03 H	156	41.8	11.4
6	4904.00	39.6 AV	54.0	-14.4	1.03 H	156	28.2	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	110.5 PK			2.24 V	213	77.5	33.0
2	*2452.00	100.9 AV			2.24 V	213	67.9	33.0
3	2483.50	69.4 PK	74.0	-4.6	2.24 V	213	36.3	33.1
4	2483.50	53.9 AV	54.0	-0.1	2.24 V	213	20.8	33.1
5	4904.00	52.5 PK	74.0	-21.5	1.75 V	181	41.1	11.4
6	4904.00	39.0 AV	54.0	-15.0	1.75 V	181	27.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

9 kHz ~ 30 MHz Data:

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

30 MHz ~ 1 GHz Worst-Case Data:


802.11n (VHT40)

RF Mode	TX 802.11ac (VHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	58.04	26.3 QP	40.0	-13.7	2.00 H	157	35.7	-9.4
2	120.13	24.1 QP	43.5	-19.4	1.49 H	252	35.2	-11.1
3	206.48	25.5 QP	43.5	-18.0	2.00 H	50	37.3	-11.8
4	261.78	25.4 QP	46.0	-20.6	2.00 H	51	34.5	-9.1
5	400.52	31.3 QP	46.0	-14.7	2.00 H	65	37.2	-5.9
6	939.95	40.1 QP	46.0	-5.9	1.00 H	295	33.3	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

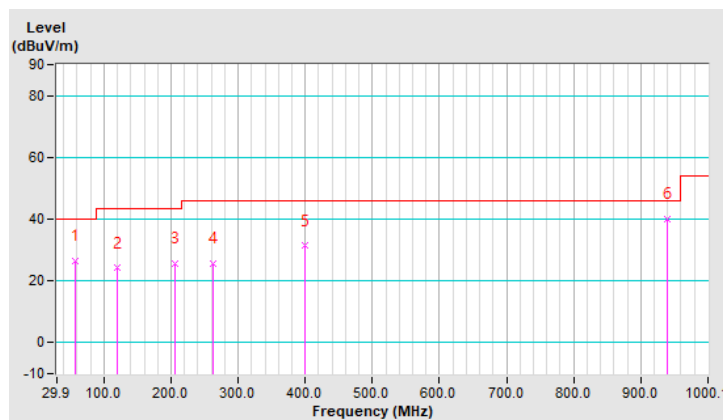


RF Mode	TX 802.11ac (VHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.77	34.8 QP	40.0	-5.2	1.49 V	109	45.2	-10.4
2	94.90	31.9 QP	43.5	-11.6	1.00 V	319	46.0	-14.1
3	227.82	27.4 QP	46.0	-18.6	1.00 V	319	38.9	-11.5
4	400.52	31.8 QP	46.0	-14.2	1.00 V	11	37.7	-5.9
5	625.60	33.5 QP	46.0	-12.5	1.00 V	265	34.0	-0.5
6	938.98	38.4 QP	46.0	-7.6	1.49 V	192	31.6	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

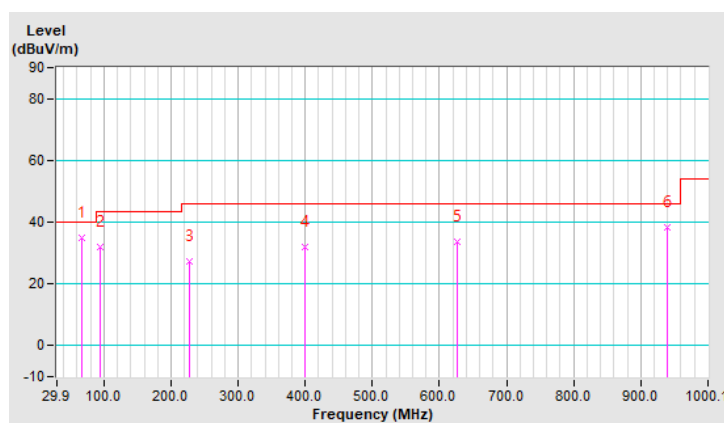

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESR3	102783	Dec. 21, 2020	Dec. 20, 2021
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 04, 2020	Sep. 03, 2021
LISN/AMN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Feb. 10, 2020	Feb. 09, 2021
LISN/AMN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Aug. 18, 2020	Aug. 17, 2021
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2 (Conduction 2).
 3. The VCCI Site Registration No. is C-12047.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

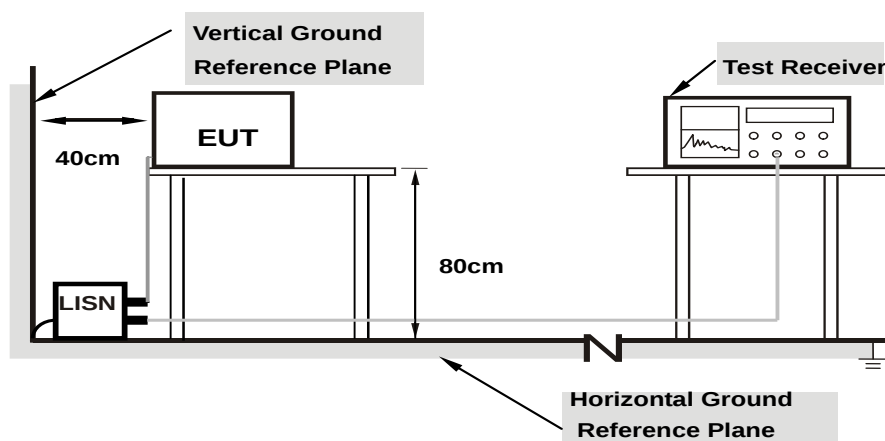

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.


4.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Tank Wu	Test Date	2021/1/15

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16173	9.65	37.34	20.94	46.99	30.59	65.37	55.37	-18.38	-24.78
2	0.17737	9.66	34.64	18.78	44.30	28.44	64.61	54.61	-20.31	-26.17
3	0.19301	9.66	30.12	12.44	39.78	22.10	63.91	53.91	-24.13	-31.81
4	0.45889	9.66	19.41	13.07	29.07	22.73	56.71	46.71	-27.64	-23.98
5	7.56727	9.77	22.85	17.06	32.62	26.83	60.00	50.00	-27.38	-23.17
6	20.63449	9.86	21.27	15.40	31.13	25.26	60.00	50.00	-28.87	-24.74

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

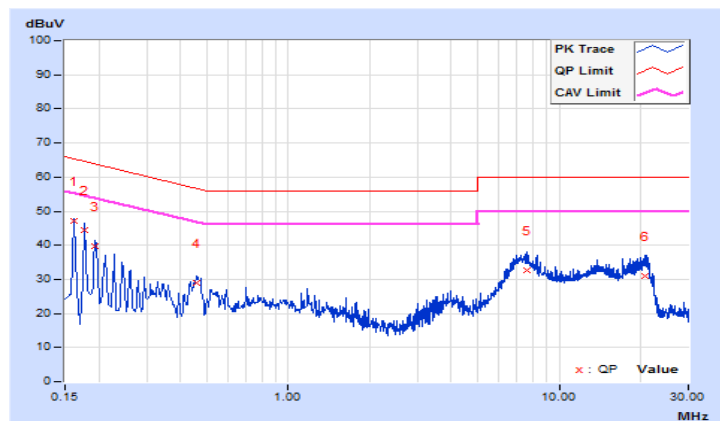


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Tank Wu	Test Date	2021/1/15

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16173	9.68	37.19	20.39	46.87	30.07	65.37	55.37	-18.50	-25.30
2	0.18122	9.68	34.38	18.40	44.06	28.08	64.43	54.43	-20.37	-26.35
3	0.19692	9.68	30.55	12.75	40.23	22.43	63.74	53.74	-23.51	-31.31
4	0.46669	9.68	21.99	12.62	31.67	22.30	56.57	46.57	-24.90	-24.27
5	7.53599	9.81	23.99	18.33	33.80	28.14	60.00	50.00	-26.20	-21.86
6	21.36566	9.98	19.73	13.79	29.71	23.77	60.00	50.00	-30.29	-26.23

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

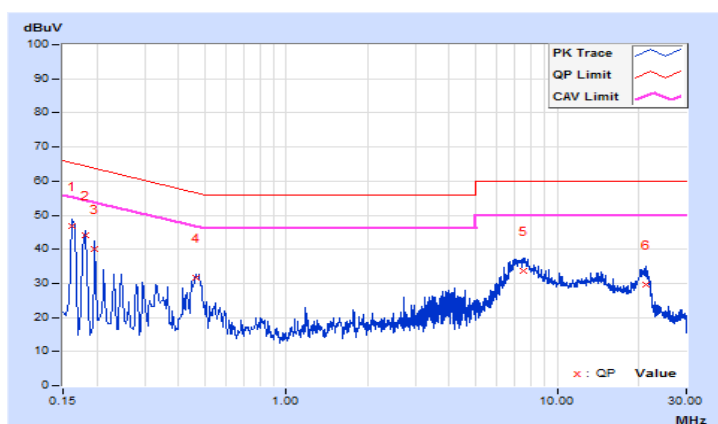


4.3 6 dB Bandwidth Measurement

4.3.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	9.12	8.14	8.13	9.12	0.5	Pass
6	2437	9.13	9.14	9.14	9.12	0.5	Pass
11	2462	9.12	9.13	9.13	9.12	0.5	Pass

802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	15.17	15.15	15.18	15.17	0.5	Pass
6	2437	15.19	15.17	15.18	15.18	0.5	Pass
11	2462	15.18	15.19	15.15	15.18	0.5	Pass

802.11ac (VHT20)


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	15.18	15.15	15.16	15.18	0.5	Pass
6	2437	15.19	16.29	15.18	15.16	0.5	Pass
11	2462	15.17	15.74	15.17	15.15	0.5	Pass

802.11ac (VHT40)


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
3	2422	35.27	35.28	35.26	35.23	0.5	Pass
6	2437	35.24	35.22	35.25	35.24	0.5	Pass
9	2452	35.25	35.27	35.27	35.25	0.5	Pass

Spectrum Plot of Worst Value


802.11b

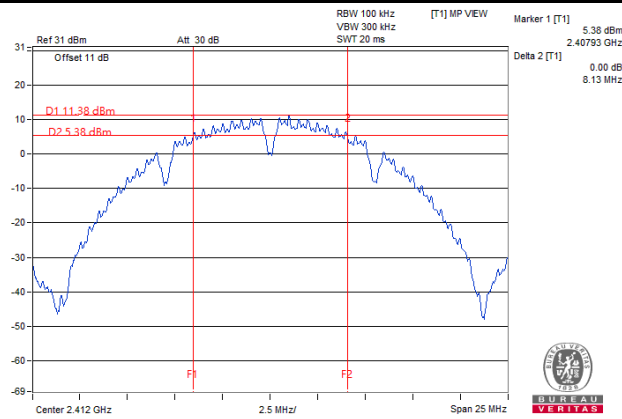


802.11g

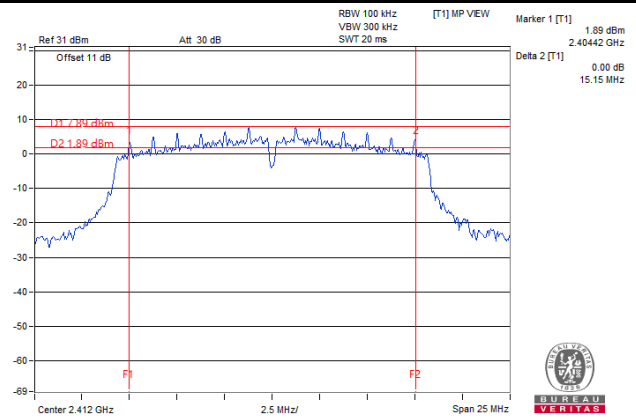

802.11ac (VHT20)

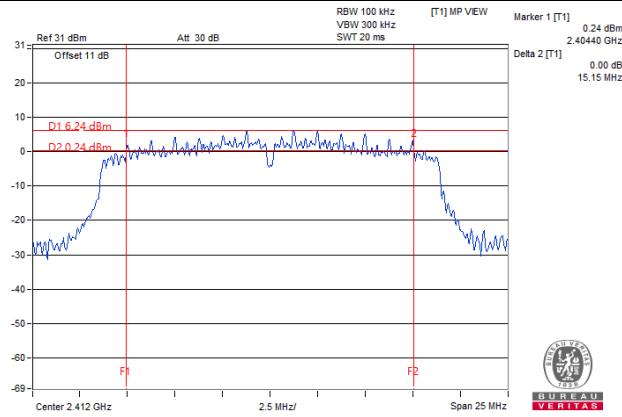


802.11ac (VHT40)

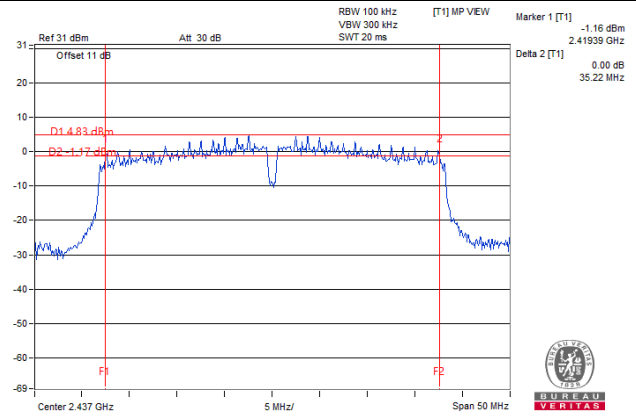

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.4 Deviation from Test Standard

No deviation.

4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.6 Test Results

802.11b

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3	
1	2412	13.68	13.86	13.80	13.86	Pass
6	2437	14.04	14.16	14.04	13.80	Pass
11	2462	13.80	14.04	14.04	13.80	Pass

802.11g

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3	
1	2412	16.68	16.68	16.68	16.56	Pass
6	2437	26.16	23.88	21.36	22.44	Pass
11	2462	16.80	16.68	16.68	16.44	Pass

802.11ac (VHT20)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3	
1	2412	17.64	17.64	17.64	17.64	Pass
6	2437	23.28	24.84	22.80	19.92	Pass
11	2462	17.64	17.52	17.64	17.64	Pass

802.11ac (VHT40)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3	
3	2422	36.00	36.36	36.12	36.36	Pass
6	2437	36.12	36.36	36.12	36.48	Pass
9	2452	36.00	36.48	36.00	36.36	Pass

Spectrum Plot of Worst Value


802.11b

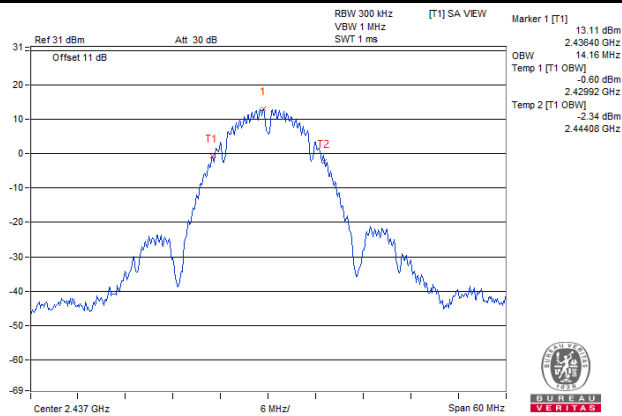


802.11g

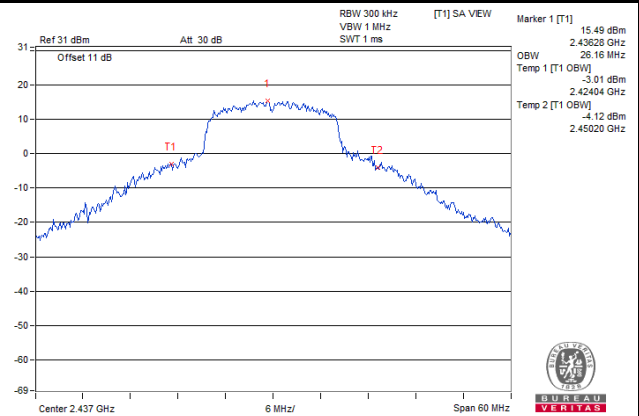

802.11ac (VHT20)

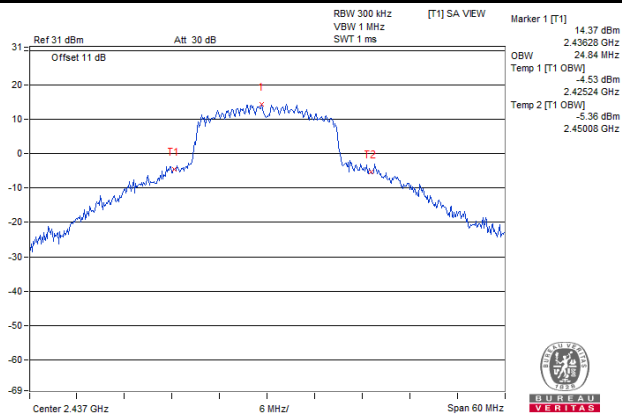

802.11ac (VHT40)

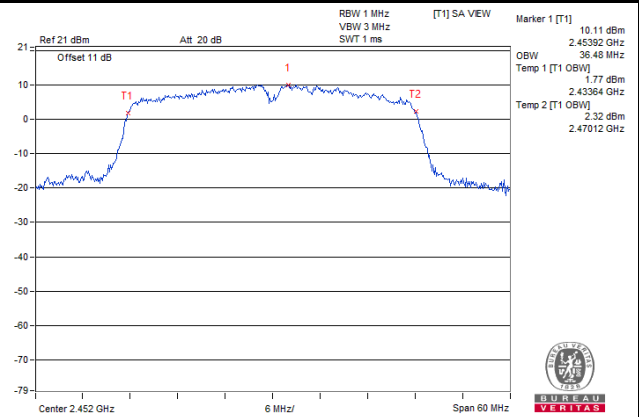

4.5 Conducted Output Power Measurement

4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(NANT/NSS)$ dB or 3 dB, whichever is less for 20 MHz channel widths with $NANT \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(NANT/NSS)$ dB.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

CDD Mode

802.11b

Channel	Frequency (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	20.75	20.14	20.03	20.33	430.714	26.34	30	Pass
6	2437	21.63	21.25	20.72	21.59	541.142	27.33	30	Pass
11	2462	20.53	20.08	20.43	20.36	433.889	26.37	30	Pass

802.11g

Channel	Frequency (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	18.35	17.76	17.58	17.94	247.604	23.94	30	Pass
6	2437	23.01	23.04	22.89	23.11	800.539	29.03	30	Pass
11	2462	16.73	16.41	16.62	16.64	182.902	22.62	30	Pass

802.11ac (VHT20)

Channel	Frequency (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	16.74	16.22	15.98	16.18	170.209	22.31	30	Pass
6	2437	22.72	22.35	22.09	22.62	703.477	28.47	30	Pass
11	2462	15.95	15.71	15.96	15.76	153.71	21.87	30	Pass

802.11ac (VHT40)

Channel	Frequency (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	15.97	15.33	15.33	15.63	144.335	21.59	30	Pass
6	2437	17.41	17.02	16.81	17.12	204.927	23.12	30	Pass
9	2452	14.79	14.32	14.03	14.04	107.814	20.33	30	Pass

Beamforming Mode

802.11ac (VHT20)

Channel	Frequency (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	16.74	16.22	15.98	16.18	170.209	22.31	29.19	Pass
6	2437	22.72	22.35	22.09	22.62	703.477	28.47	29.19	Pass
11	2462	15.95	15.71	15.96	15.76	153.71	21.87	29.19	Pass

Note: Directional gain = 6.81 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (6.81 - 6) = 29.19$ dBm.

802.11ac (VHT40)

Channel	Frequency (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	15.97	15.33	15.33	15.63	144.335	21.59	29.19	Pass
6	2437	17.41	17.02	16.81	17.12	204.927	23.12	29.19	Pass
9	2452	14.79	14.32	14.03	14.04	107.814	20.33	29.19	Pass


Note: Directional gain = 6.81 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (6.81 - 6) = 29.19$ dBm.

4.6 Power Spectral Density Measurement

4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

For Average Power (Duty cycle $\geq 98\%$)

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

For Average Power (Duty cycle < 98%)

- a. Measure the duty cycle (x).
- b. Set instrument center frequency to DTS channel center frequency.
- c. Set span to at least 1.5 times the OBW.
- d. Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e. Set VBW $\geq 3 \times \text{RBW}$.
- f. Detector = power averaging (RMS) or sample detector (when RMS not available).
- g. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- h. Sweep time = auto couple.
- i. Do not use sweep triggering. Allow sweep to "free run".
- j. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k. Use the peak marker function to determine the maximum amplitude level.
- l. Add $10 \log (1/x)$, where x is the duty cycle measured in step (a, to the measured PSD to compute the average PSD during the actual transmission time.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results

802.11b

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=4) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-13.41	6.02	-7.39	7.19	Pass
	6	2437	-12.12	6.02	-6.1	7.19	Pass
	11	2462	-13.18	6.02	-7.16	7.19	Pass
1	1	2412	-13.19	6.02	-7.17	7.19	Pass
	6	2437	-12.08	6.02	-6.06	7.19	Pass
	11	2462	-12.38	6.02	-6.36	7.19	Pass
2	1	2412	-13.34	6.02	-7.32	7.19	Pass
	6	2437	-11.88	6.02	-5.86	7.19	Pass
	11	2462	-12.41	6.02	-6.39	7.19	Pass
3	1	2412	-13.07	6.02	-7.05	7.19	Pass
	6	2437	-12.12	6.02	-6.1	7.19	Pass
	11	2462	-13.18	6.02	-7.16	7.19	Pass

NOTE:

1. Directional gain = 6.81 dBi > 6 dBi, so the power density limit shall be reduced to $8 - (6.81 - 6) = 7.19$ dBm.
2. Method 2) c) of power density measurement of KDB 662911 is using for calculating total power density.

802.11g

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=4) dB	Duty Factor (dB)	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-18.03	6.02	0.21	-11.8	7.19	Pass
	6	2437	-11.69	6.02	0.21	-5.46	7.19	Pass
	11	2462	-19.06	6.02	0.21	-12.83	7.19	Pass
1	1	2412	-17.3	6.02	0.21	-11.07	7.19	Pass
	6	2437	-12.44	6.02	0.21	-6.21	7.19	Pass
	11	2462	-18.79	6.02	0.21	-12.56	7.19	Pass
2	1	2412	-17.59	6.02	0.21	-11.36	7.19	Pass
	6	2437	-12.78	6.02	0.21	-6.55	7.19	Pass
	11	2462	-18.09	6.02	0.21	-11.86	7.19	Pass
3	1	2412	-18.54	6.02	0.21	-12.31	7.19	Pass
	6	2437	-11.69	6.02	0.21	-5.46	7.19	Pass
	11	2462	-19.06	6.02	0.21	-12.83	7.19	Pass

NOTE:

1. Directional gain = 6.81 dBi > 6 dBi, so the power density limit shall be reduced to $8 - (6.81 - 6) = 7.19$ dBm.
2. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT20)

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=4) dB	Duty Factor (dB)	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-19.37	6.02	0.2	-13.15	7.19	Pass
	6	2437	-13.53	6.02	0.2	-7.31	7.19	Pass
	11	2462	-19.55	6.02	0.2	-13.33	7.19	Pass
1	1	2412	-18.87	6.02	0.2	-12.65	7.19	Pass
	6	2437	-12.91	6.02	0.2	-6.69	7.19	Pass
	11	2462	-18.87	6.02	0.2	-12.65	7.19	Pass
2	1	2412	-18.78	6.02	0.2	-12.56	7.19	Pass
	6	2437	-13.57	6.02	0.2	-7.35	7.19	Pass
	11	2462	-18.94	6.02	0.2	-12.72	7.19	Pass
3	1	2412	-19.47	6.02	0.2	-13.25	7.19	Pass
	6	2437	-13.53	6.02	0.2	-7.31	7.19	Pass
	11	2462	-19.55	6.02	0.2	-13.33	7.19	Pass

NOTE:

- Directional gain = 6.81 dBi > 6 dBi, so the power density limit shall be reduced to $8 - (6.81 - 6) = 7.19$ dBm.
- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT40)


TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=4) dB	Duty Factor (dB)	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	3	2422	-23.38	6.02	0.39	-16.97	7.19	Pass
	6	2437	-21.84	6.02	0.39	-15.43	7.19	Pass
	9	2452	-23.61	6.02	0.39	-17.2	7.19	Pass
1	3	2422	-22.28	6.02	0.39	-15.87	7.19	Pass
	6	2437	-21.65	6.02	0.39	-15.24	7.19	Pass
	9	2452	-24.08	6.02	0.39	-17.67	7.19	Pass
2	3	2422	-22.93	6.02	0.39	-16.52	7.19	Pass
	6	2437	-21.07	6.02	0.39	-14.66	7.19	Pass
	9	2452	-23.66	6.02	0.39	-17.25	7.19	Pass
3	3	2422	-24.16	6.02	0.39	-17.75	7.19	Pass
	6	2437	-21.84	6.02	0.39	-15.43	7.19	Pass
	9	2452	-23.61	6.02	0.39	-17.2	7.19	Pass

NOTE:


1. Directional gain = 6.81 dBi > 6 dBi, so the power density limit shall be reduced to $8 - (6.81 - 6) = 7.19$ dBm.
2. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b

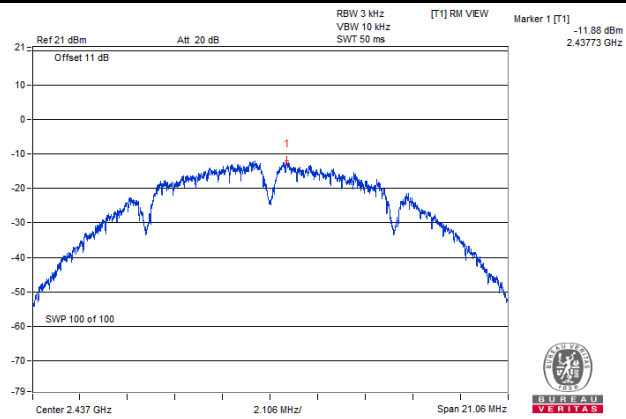


802.11g

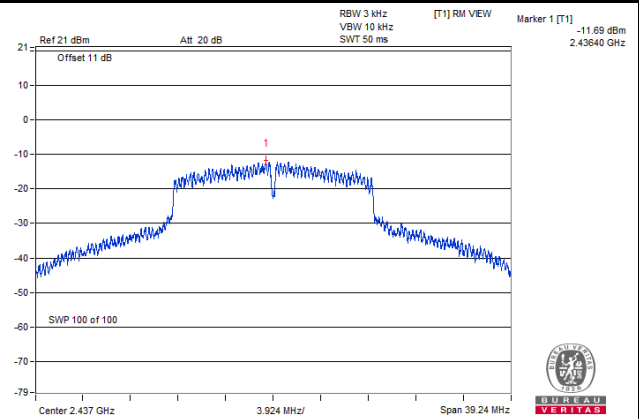

802.11ac (VHT20)

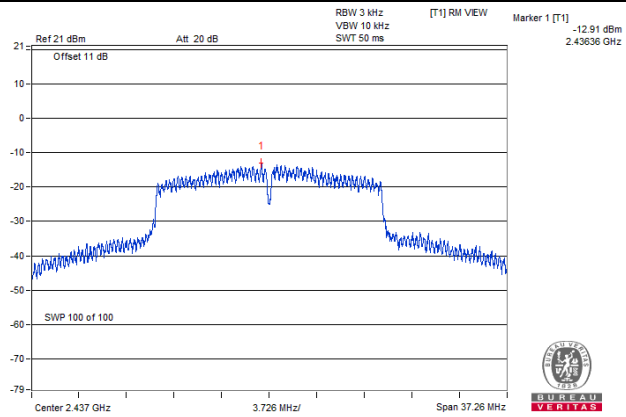

802.11ac (VHT40)

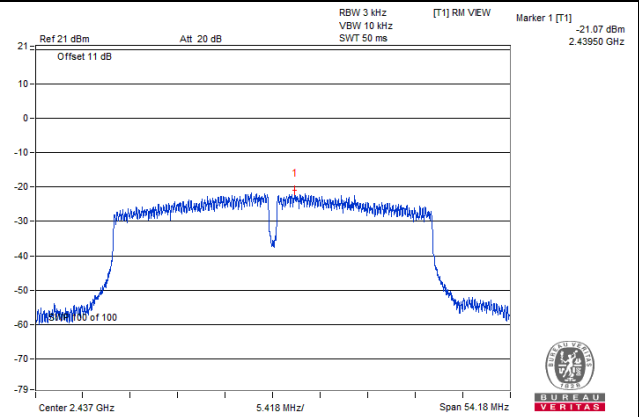


4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits of Conducted Out of Band Emission Measurement

Below -30 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.7.7 Test Results

The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 30 dB offset below D1. It shows compliance with the requirement.

802.11b



CHAIN 0

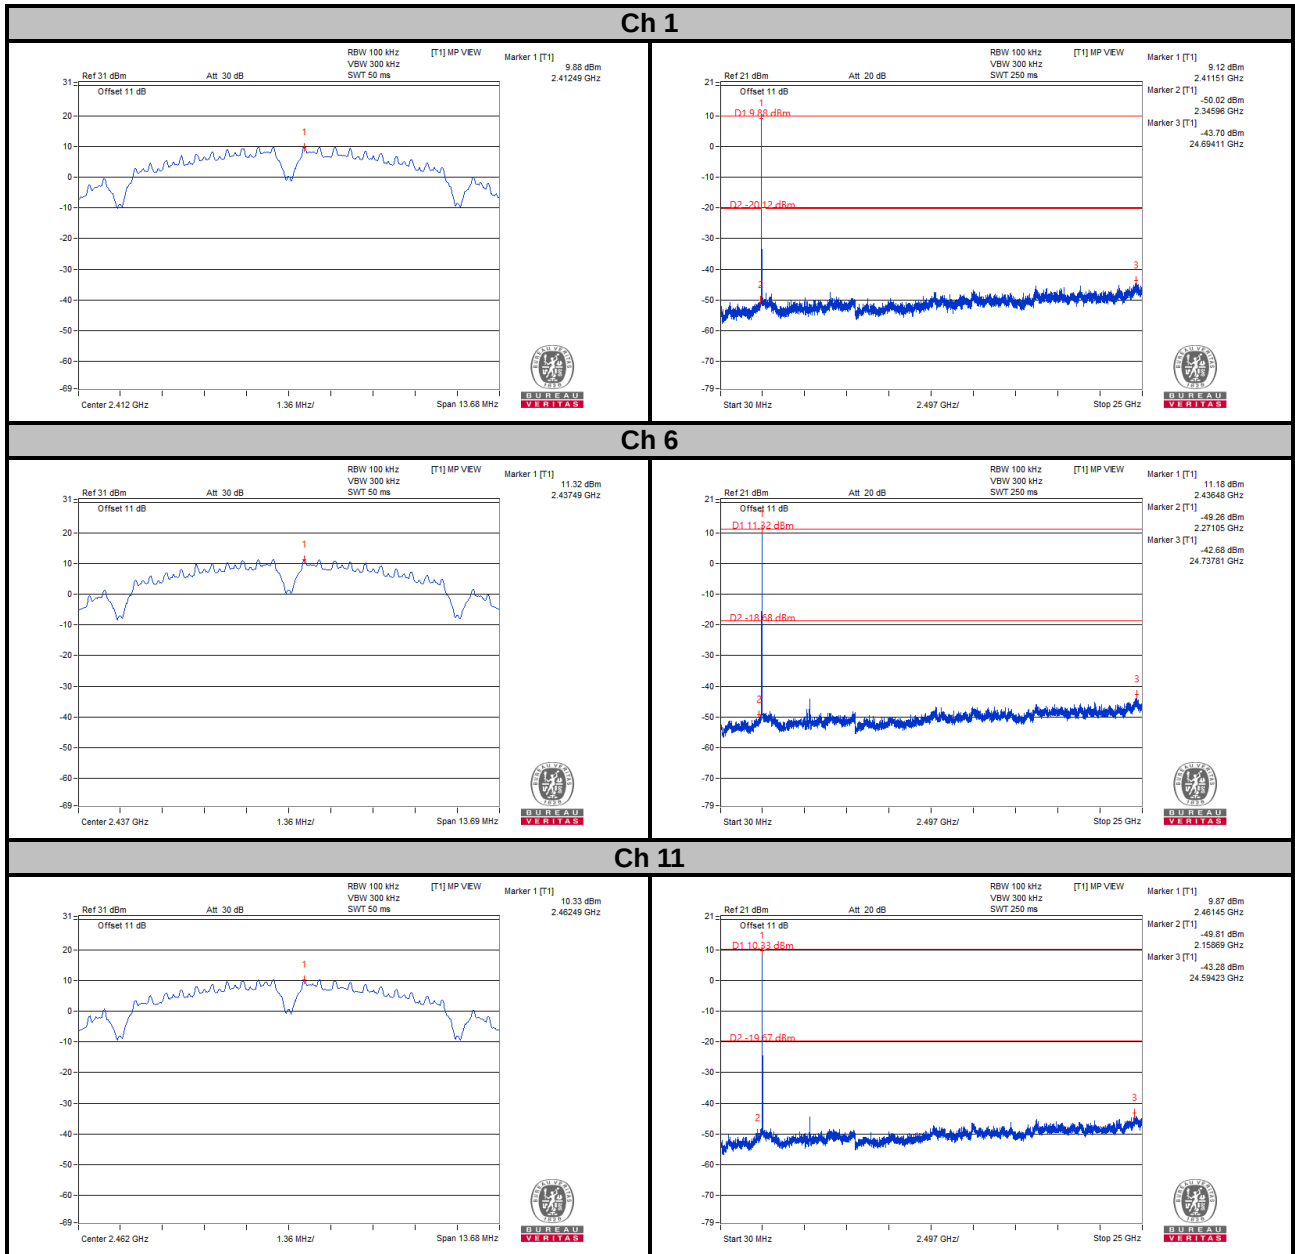


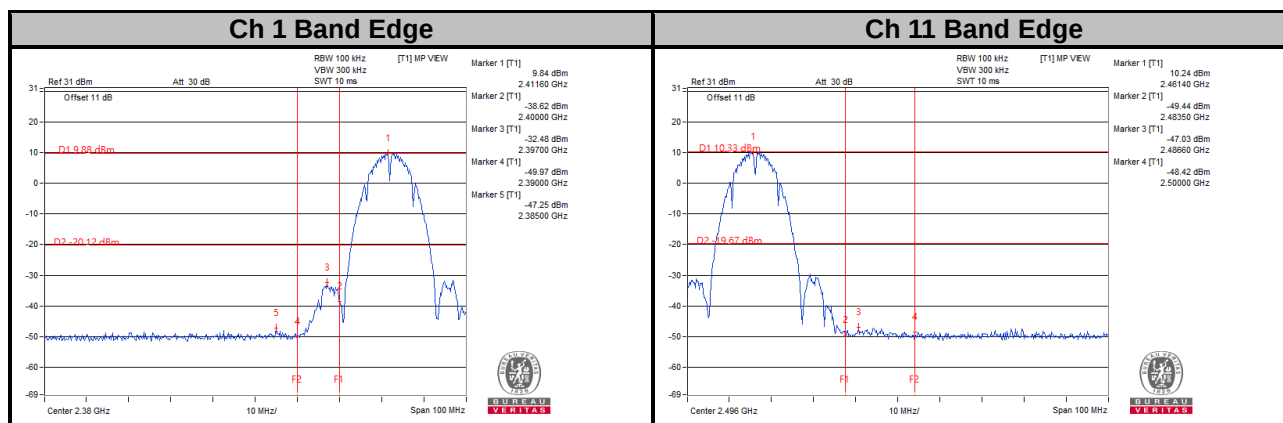


CHAIN 1



Ch 1

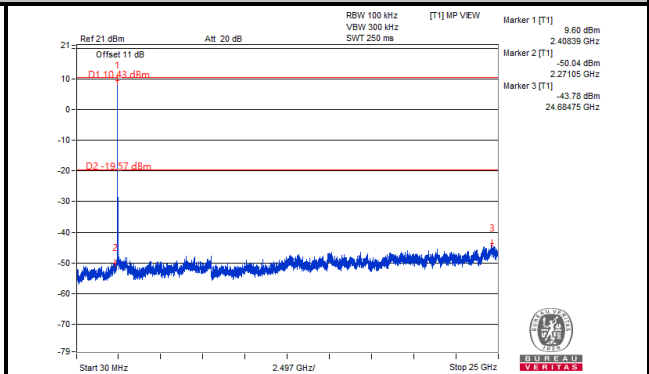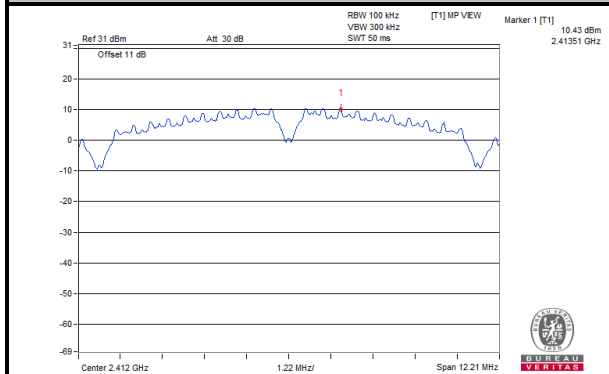


Ch 6

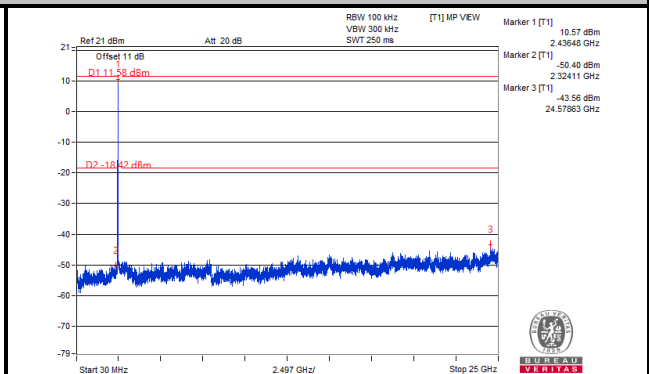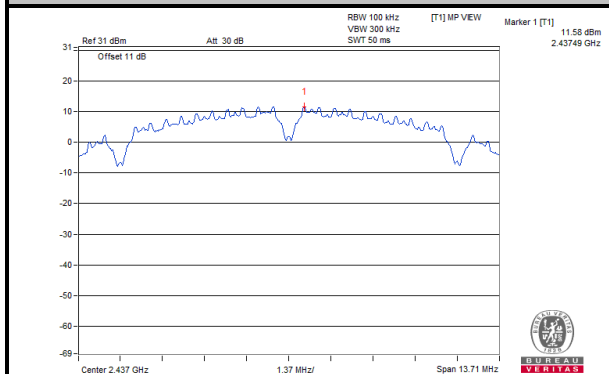


Ch 11

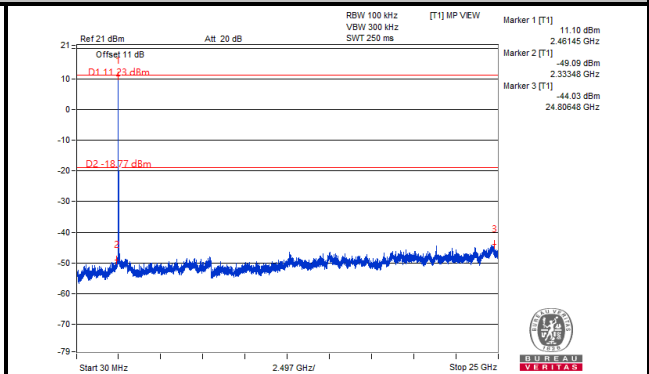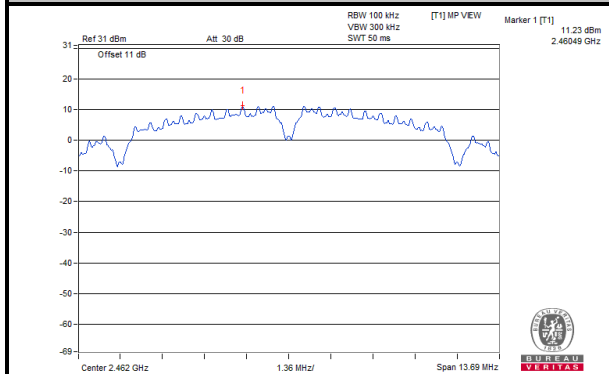

Ch 1 Band Edge


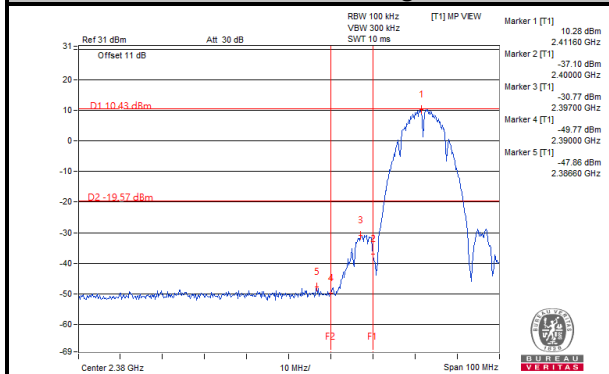


Ch 11 Band Edge


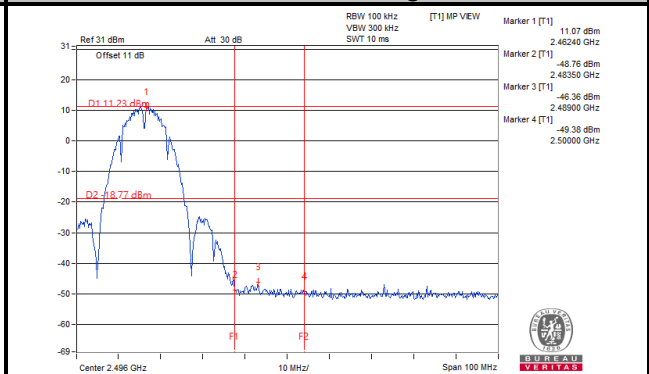


CHAIN 2



Ch 1

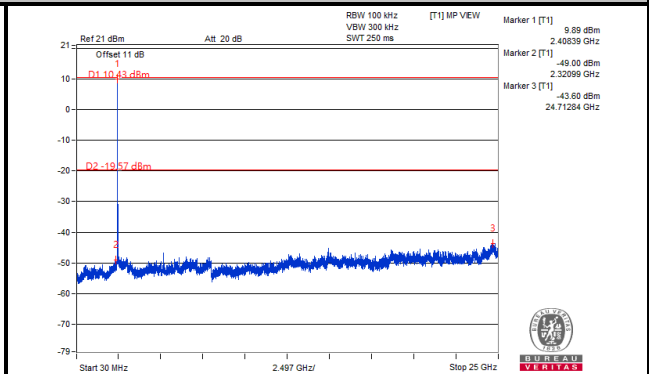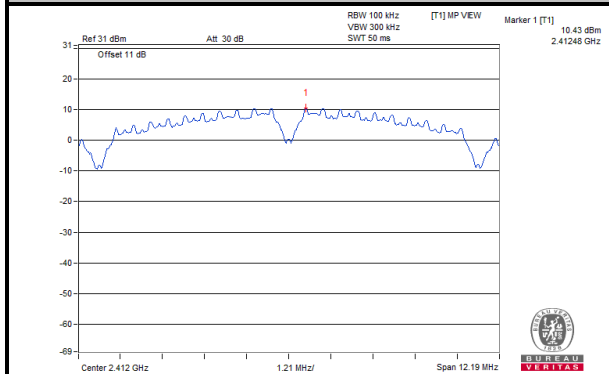


Ch 6

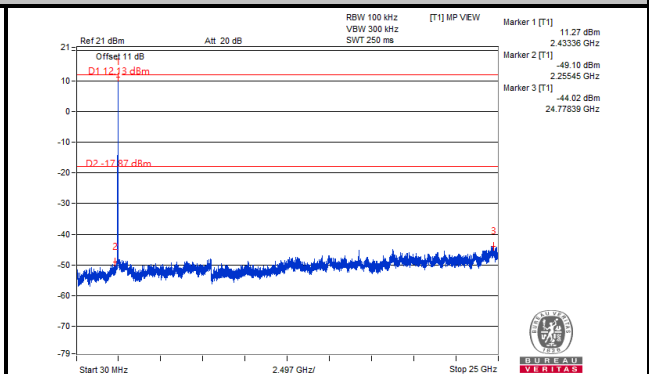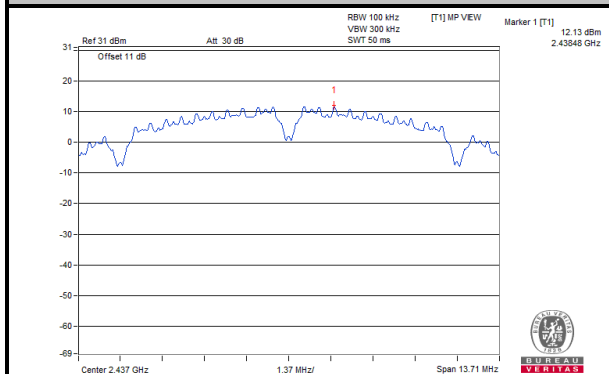


Ch 11

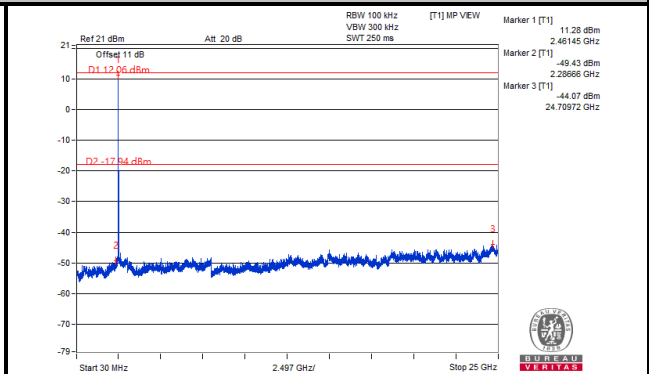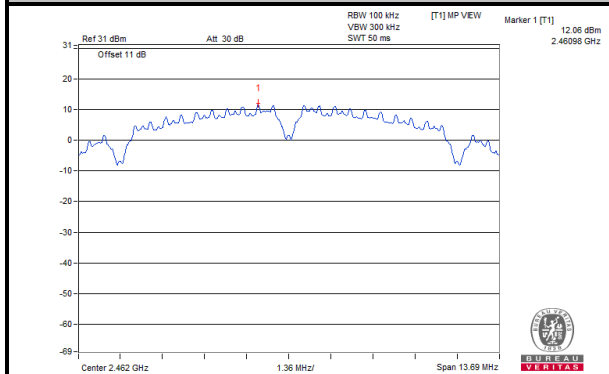

Ch 1 Band Edge


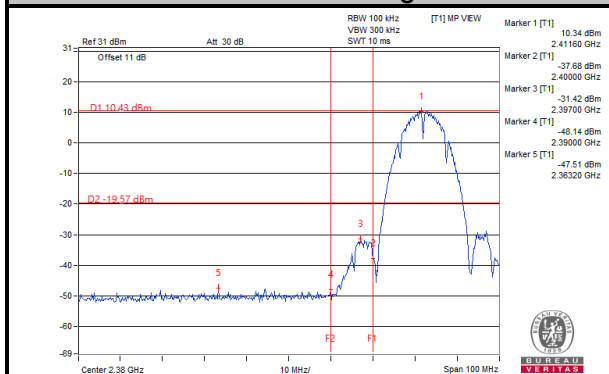


Ch 11 Band Edge


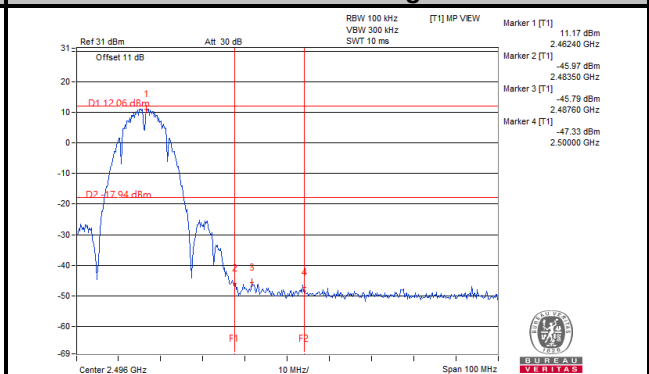


CHAIN 3



Ch 1

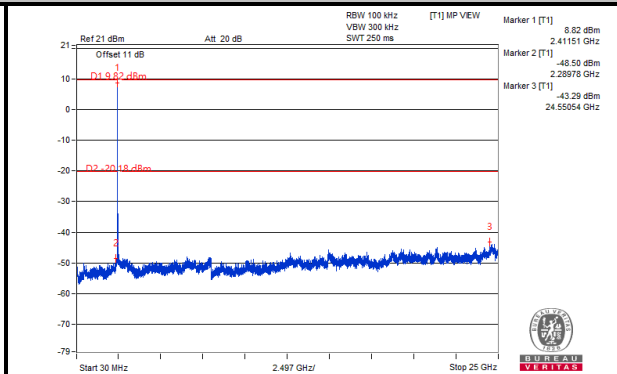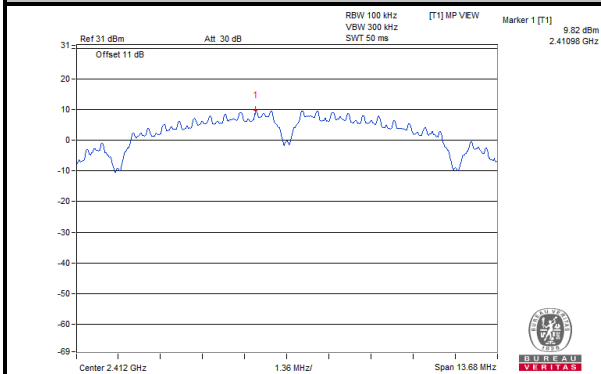


Ch 6

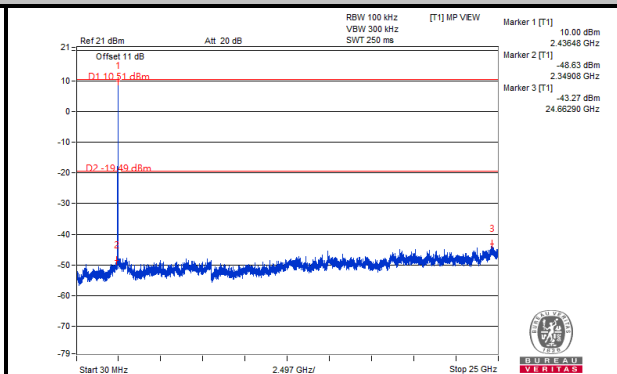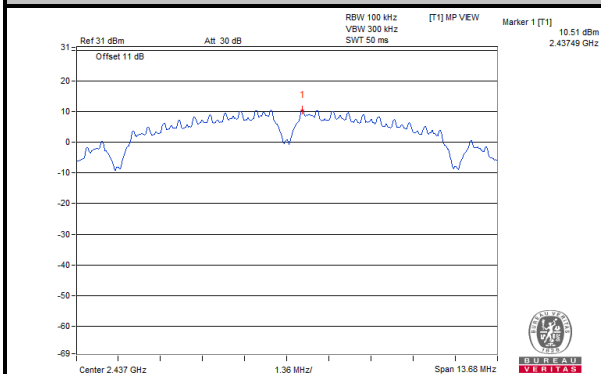


Ch 11

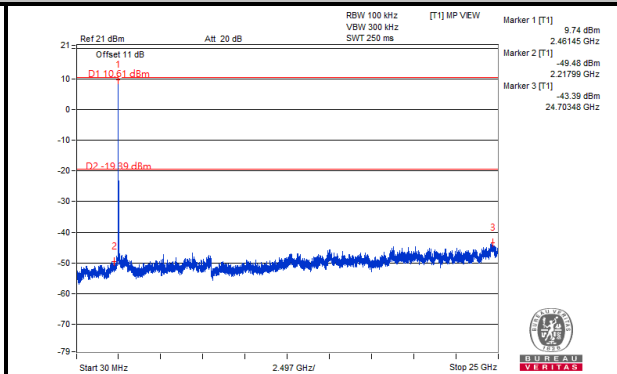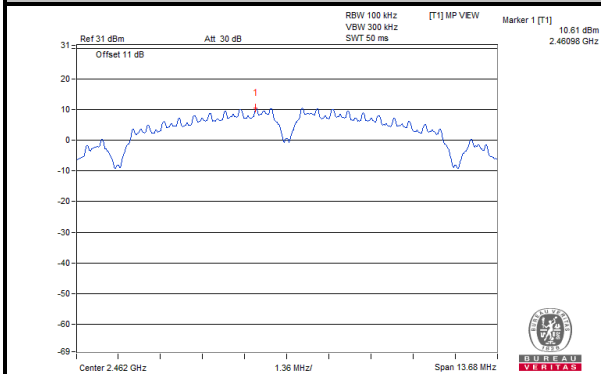


Ch 1 Band Edge

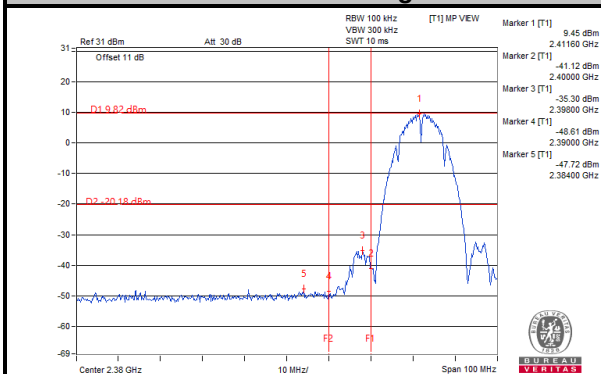

Ch 11 Band Edge


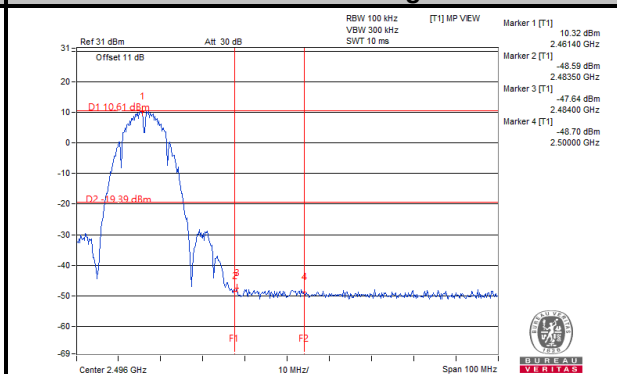


802.11g
CHAIN 0


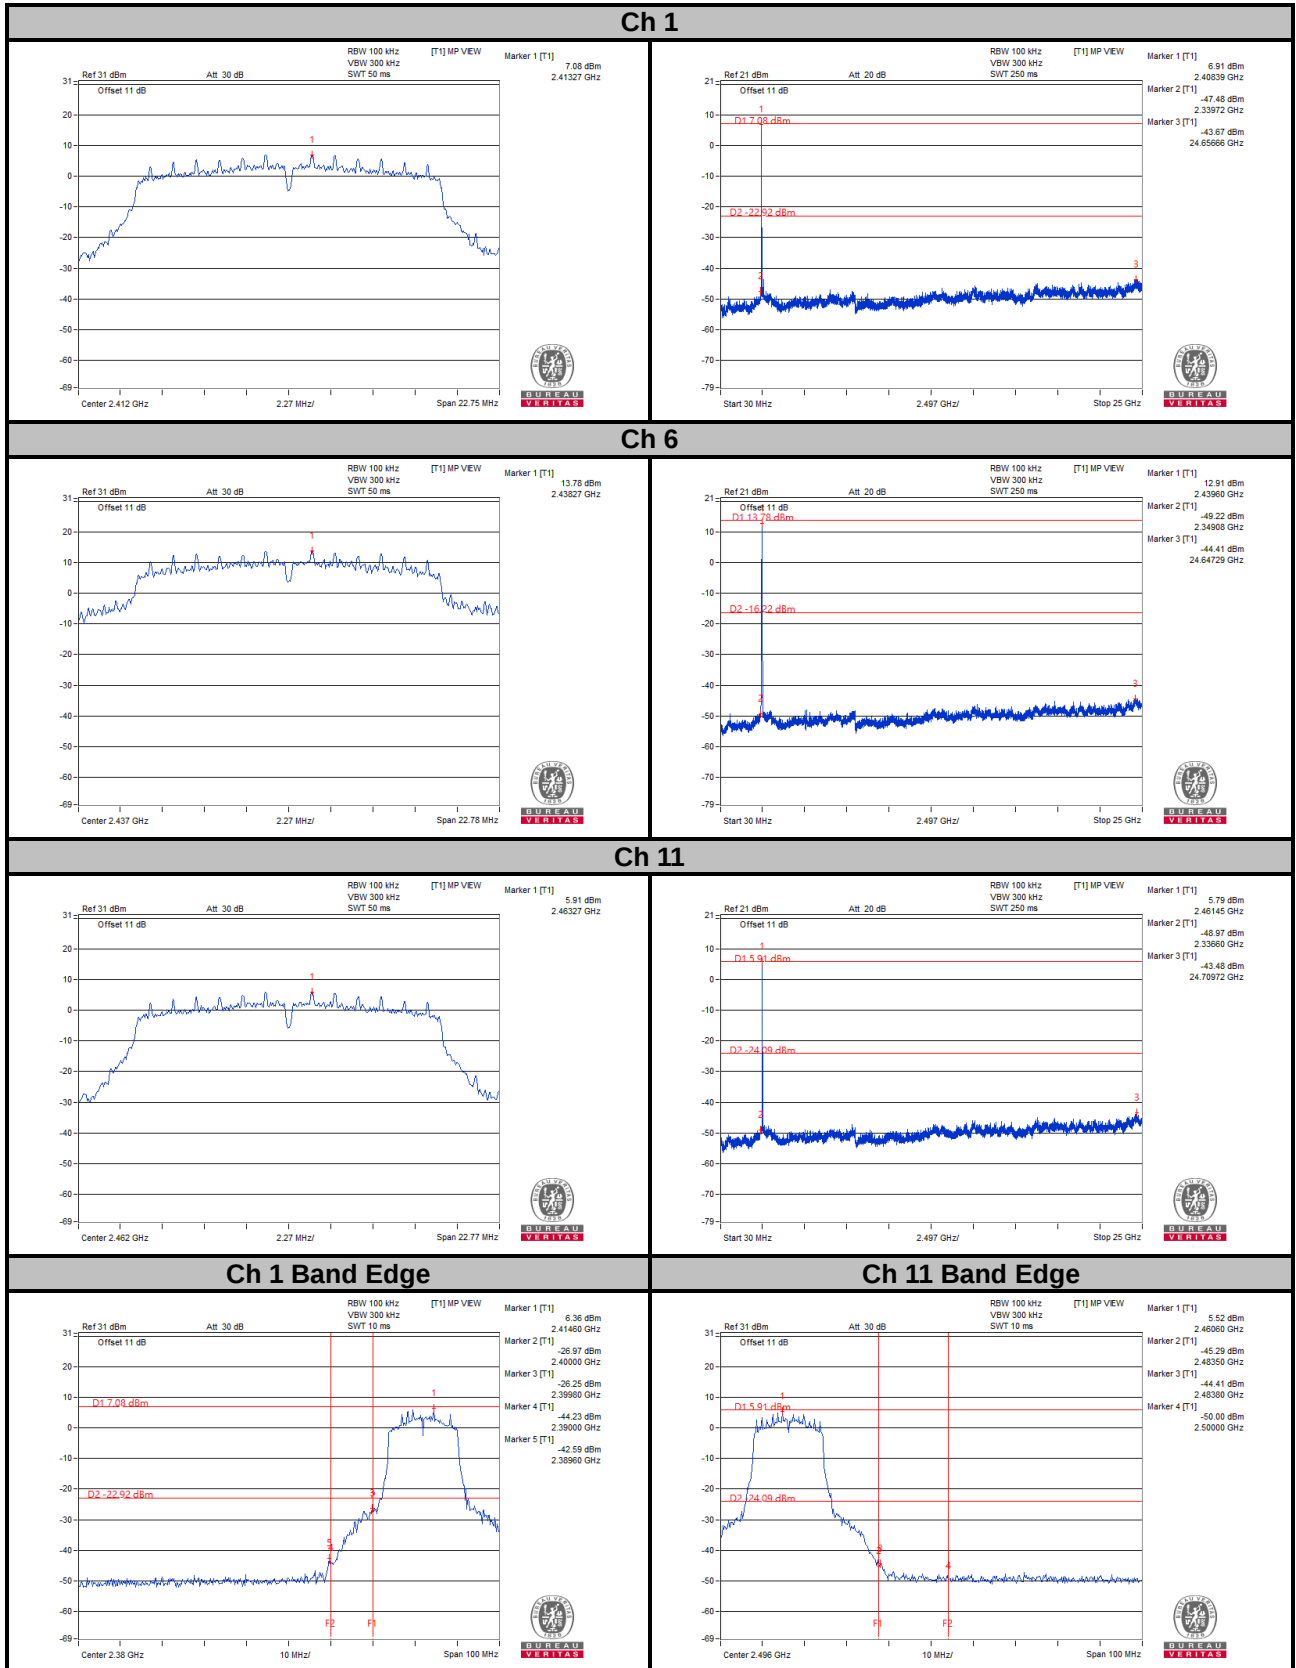


CHAIN 1



Ch 1

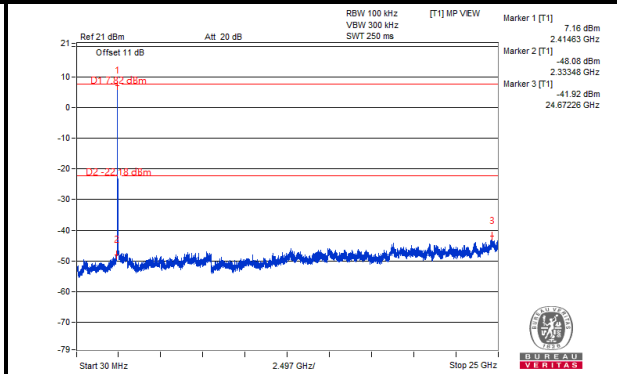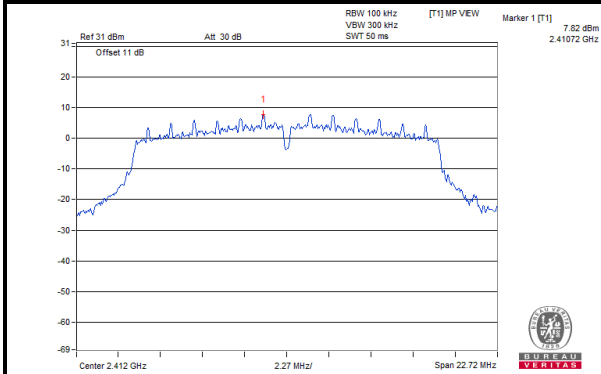


Ch 6

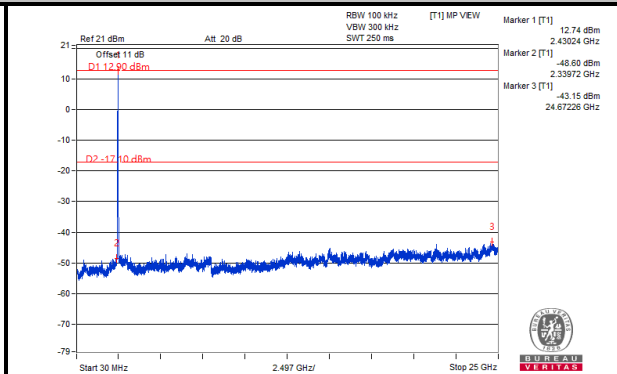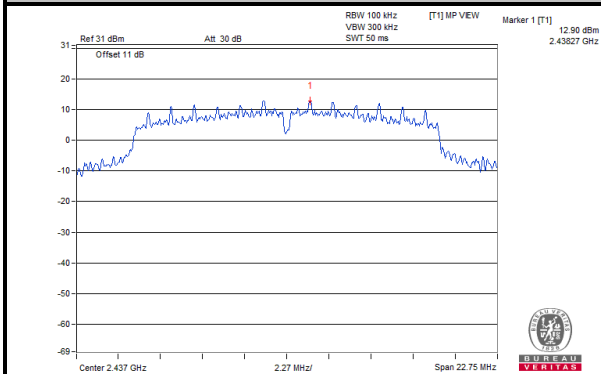


Ch 11

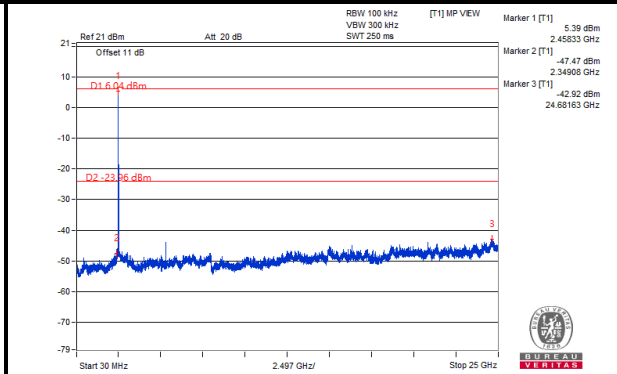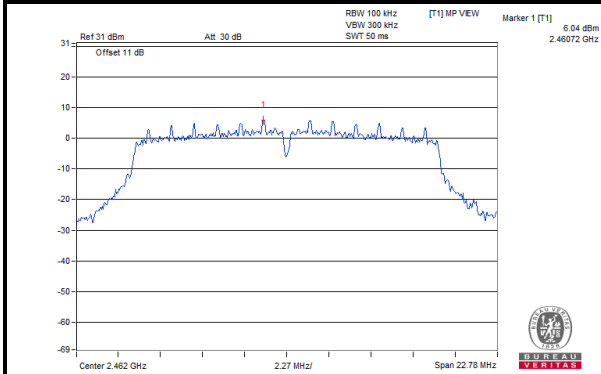

Ch 1 Band Edge


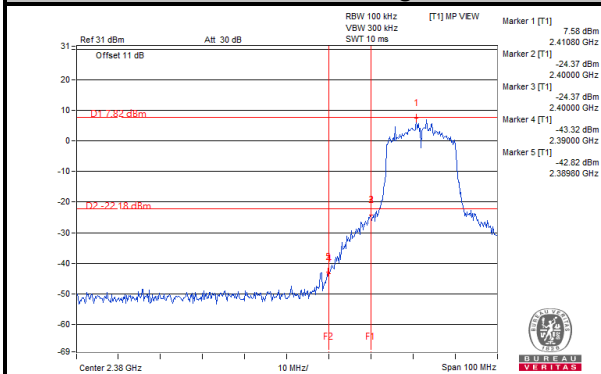


Ch 11 Band Edge


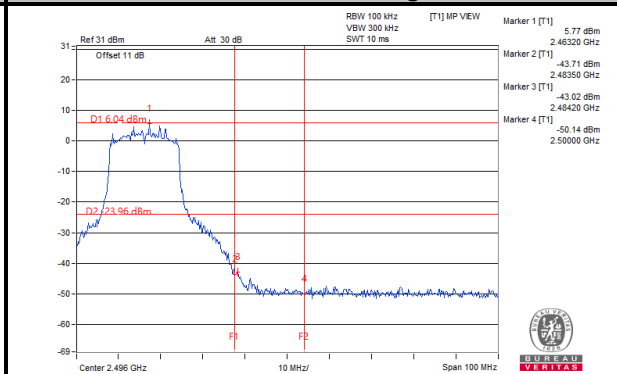


CHAIN 2



Ch 1

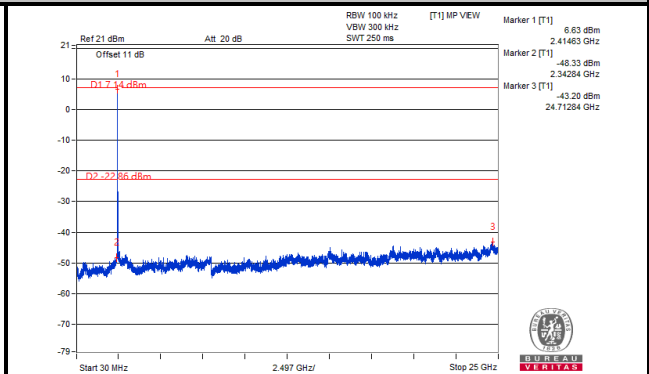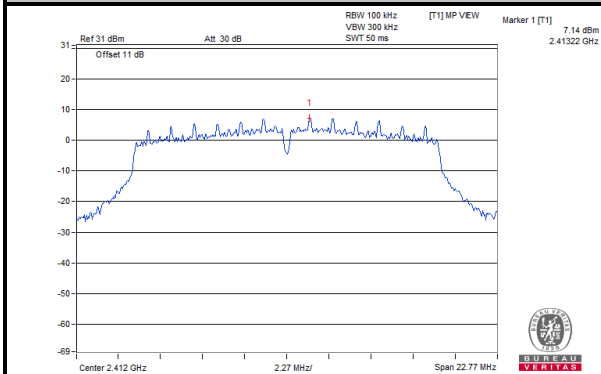


Ch 6

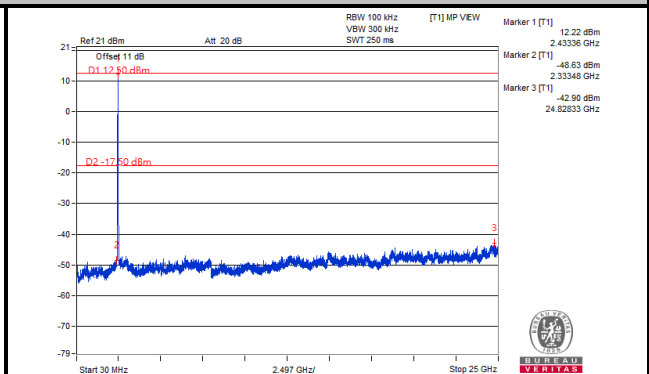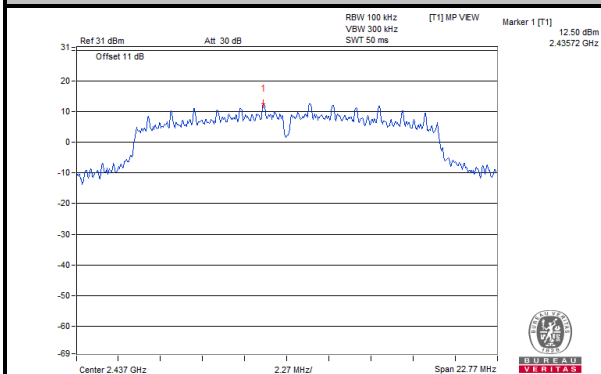


Ch 11

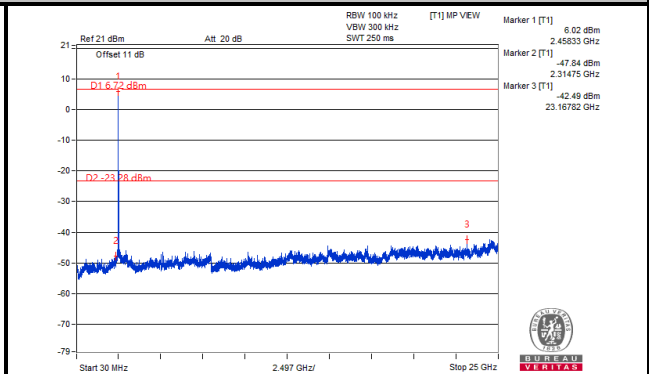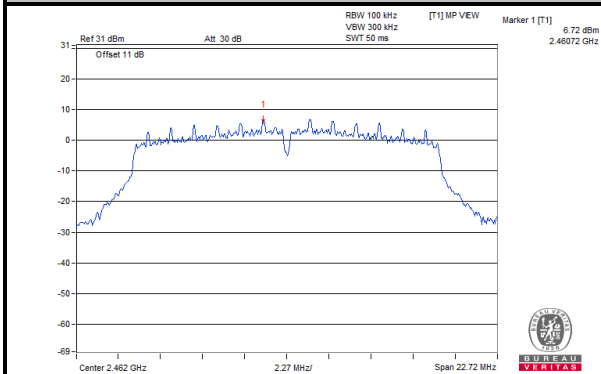

Ch 1 Band Edge


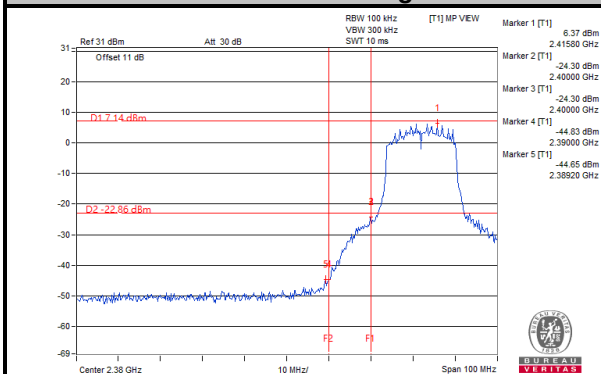


Ch 11 Band Edge


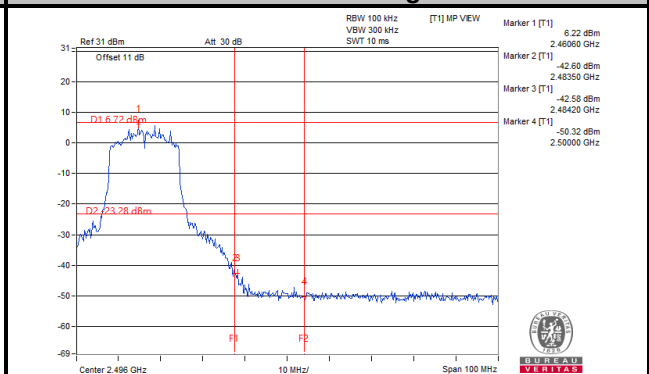


CHAIN 3



Ch 1

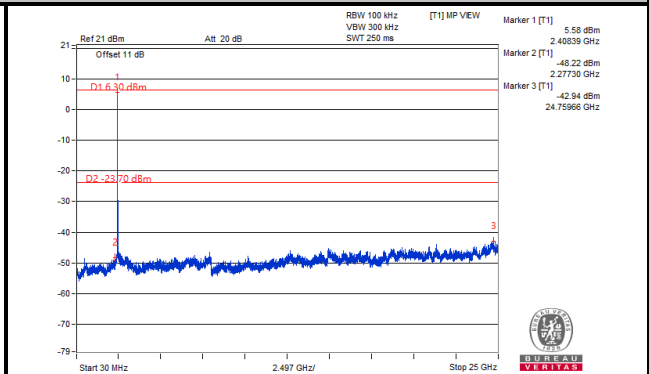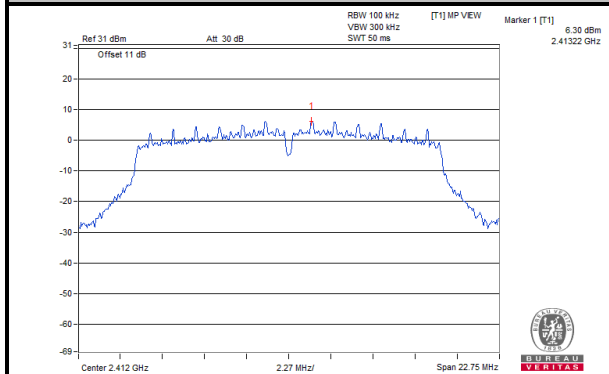


Ch 6

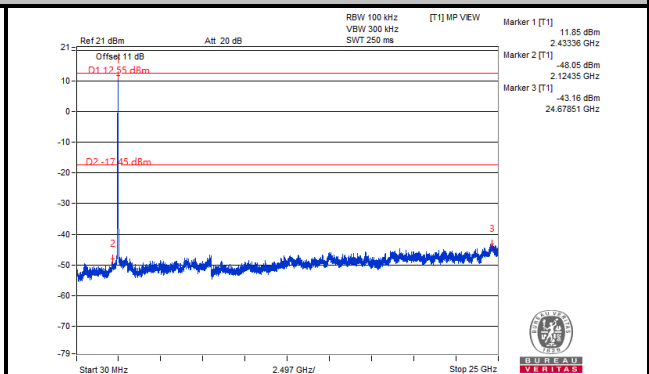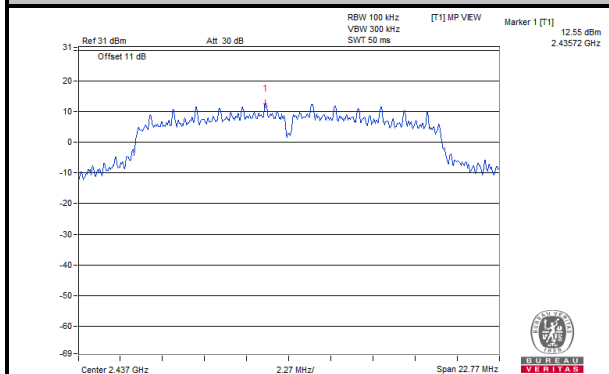


Ch 11

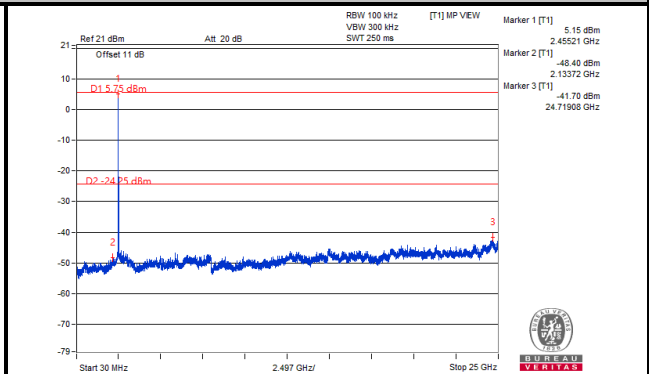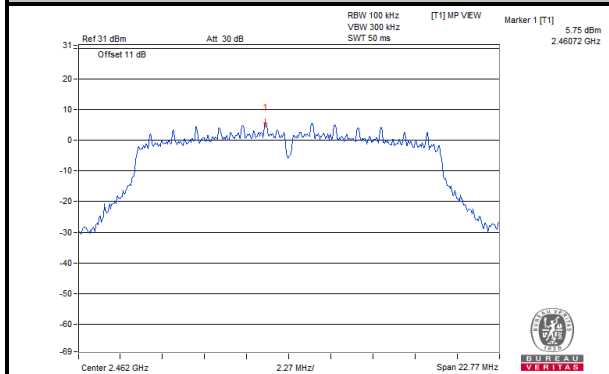

Ch 1 Band Edge

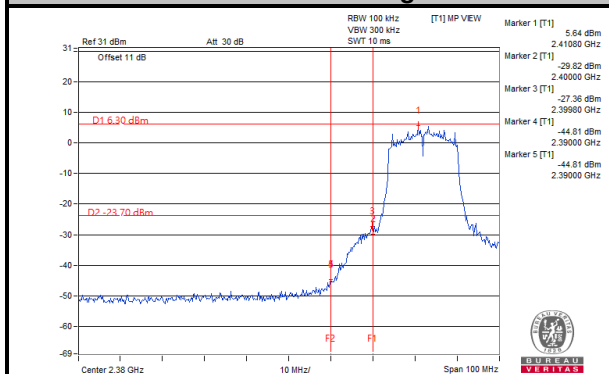


Ch 11 Band Edge

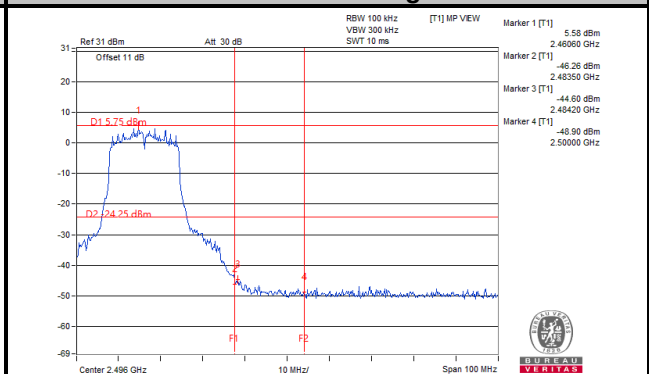



802.11ac (VHT20)

CHAIN 0


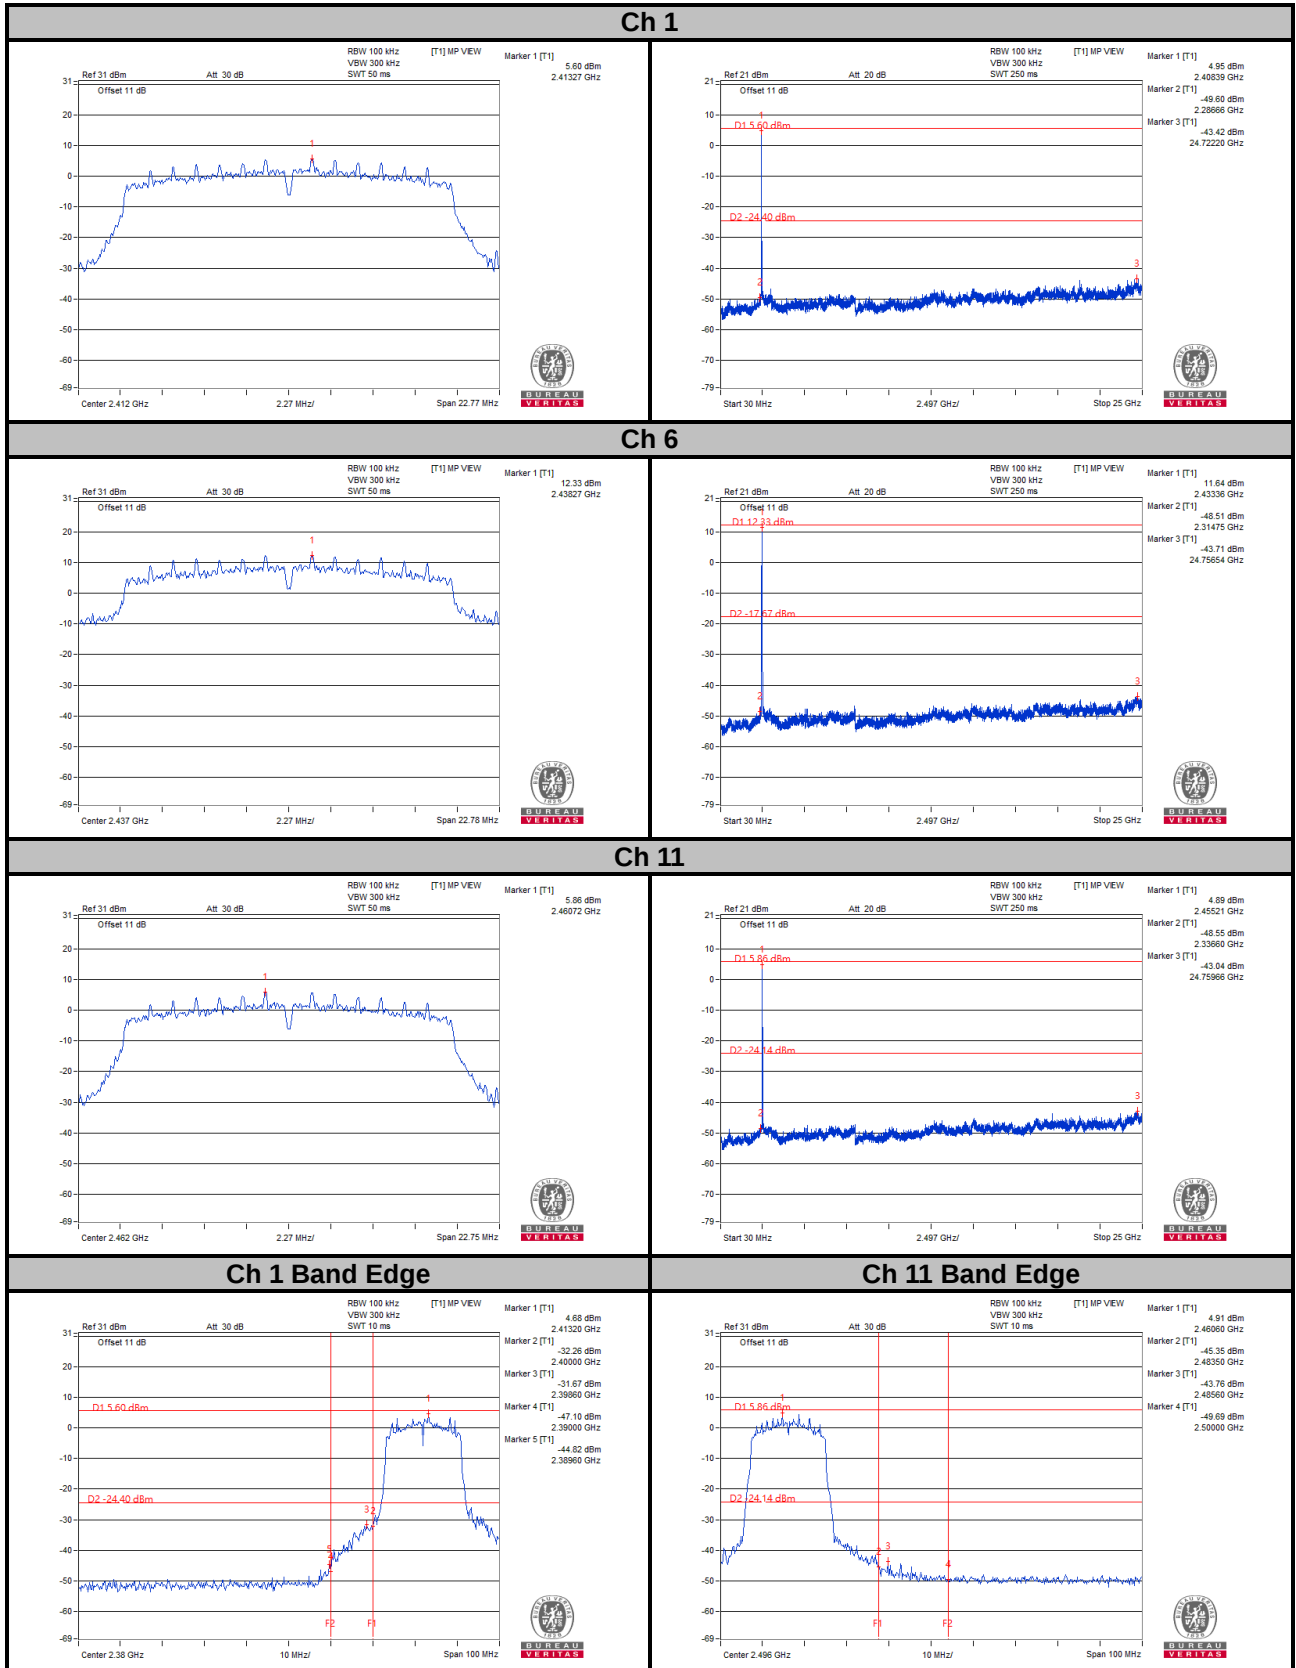


CHAIN 1



Ch 1

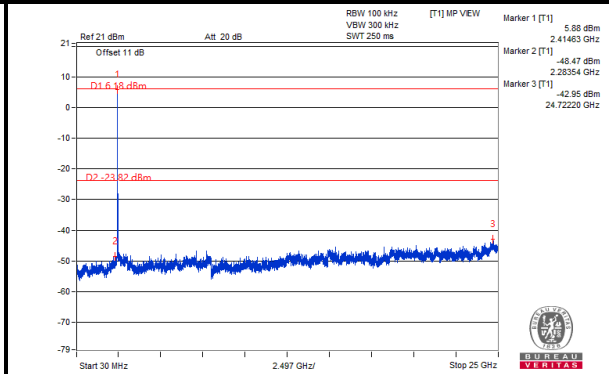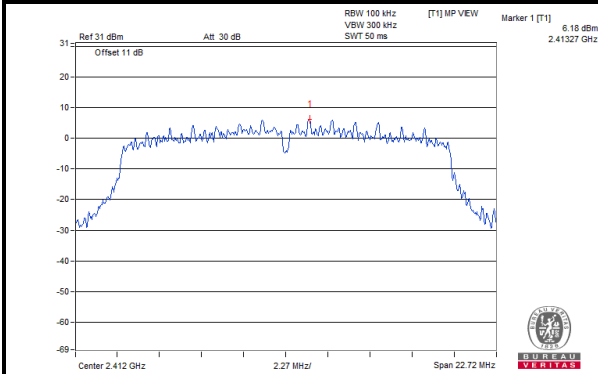


Ch 6

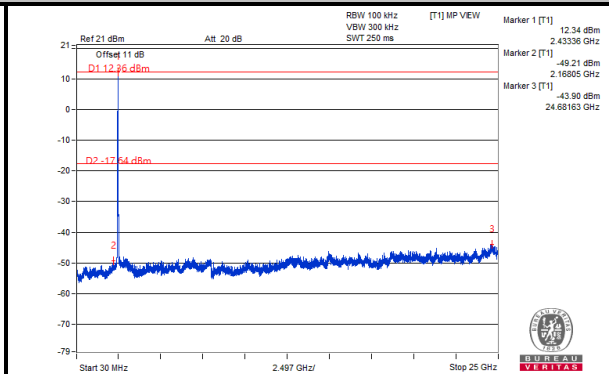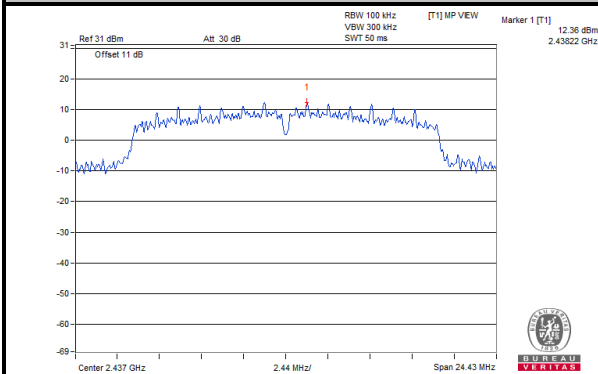


Ch 11

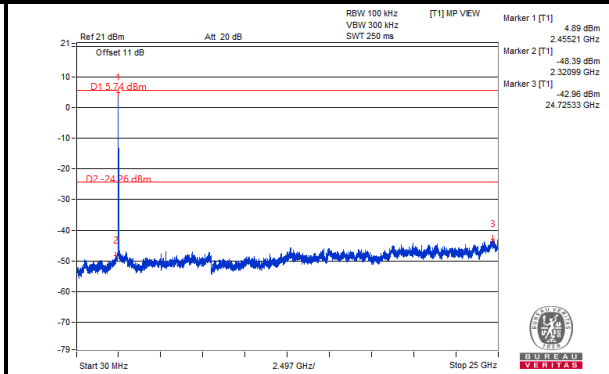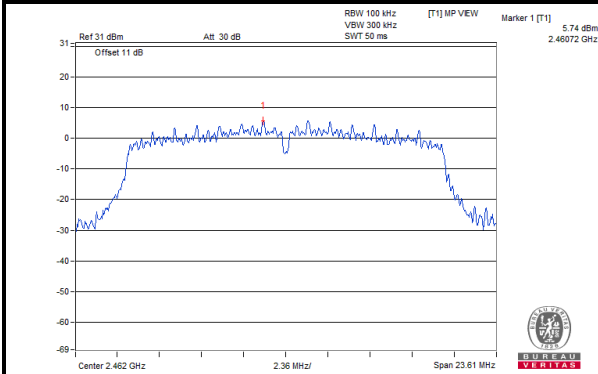

Ch 1 Band Edge


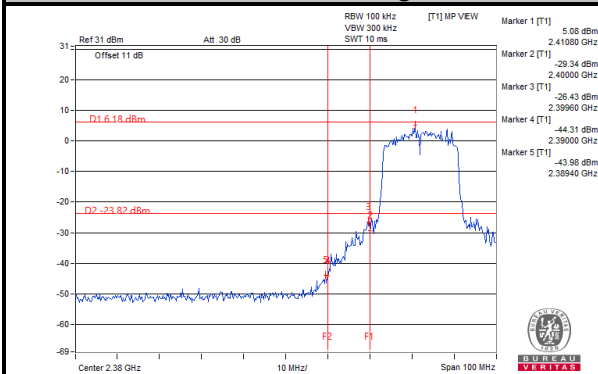


Ch 11 Band Edge


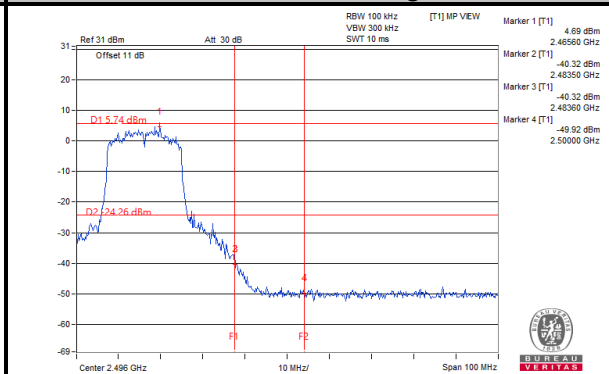


CHAIN 2



Ch 1

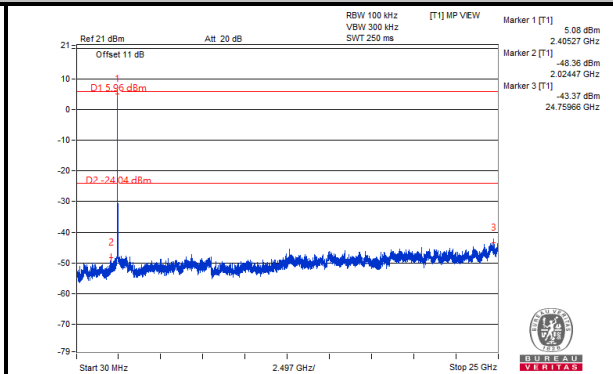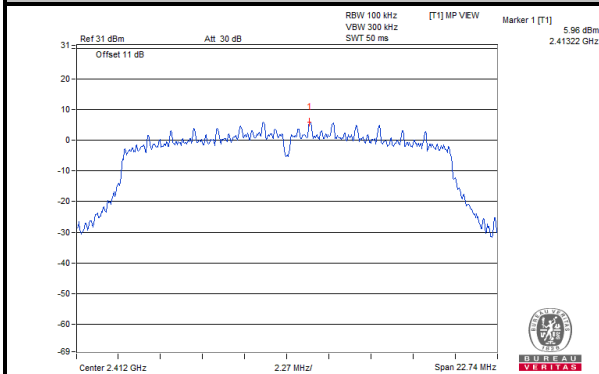


Ch 6

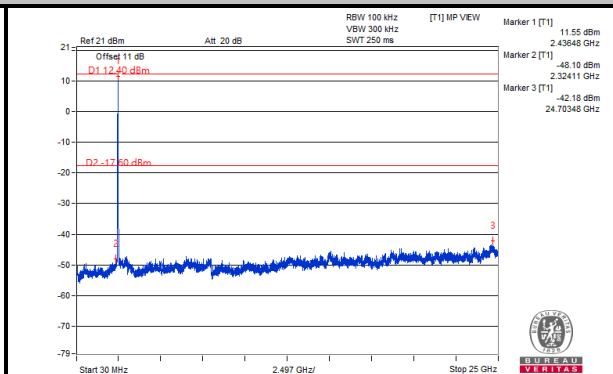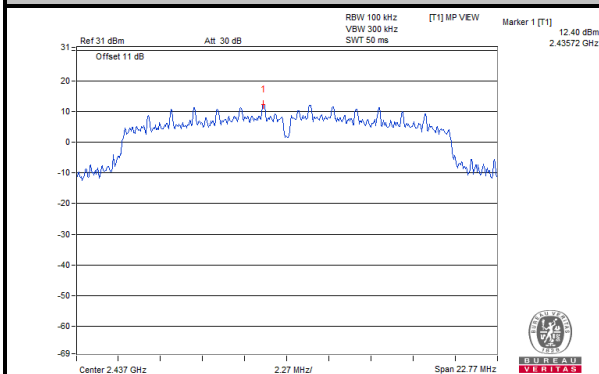


Ch 11

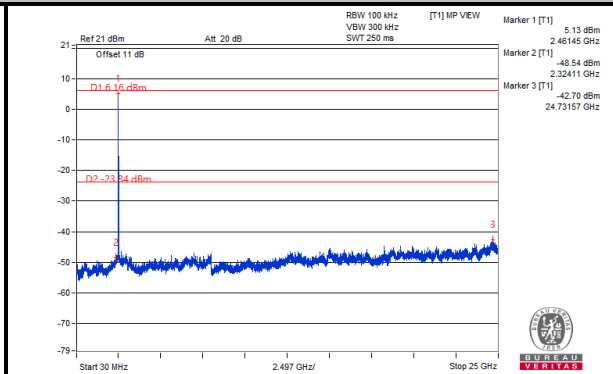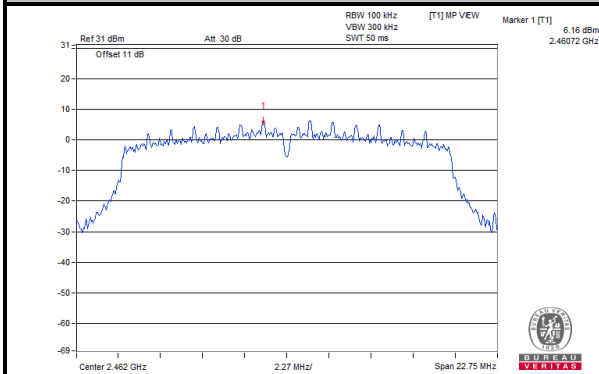

Ch 1 Band Edge


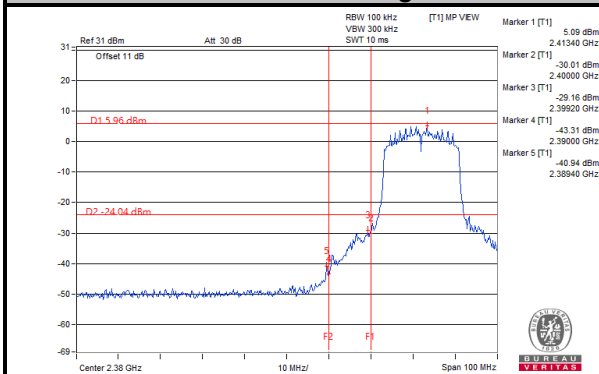


Ch 11 Band Edge


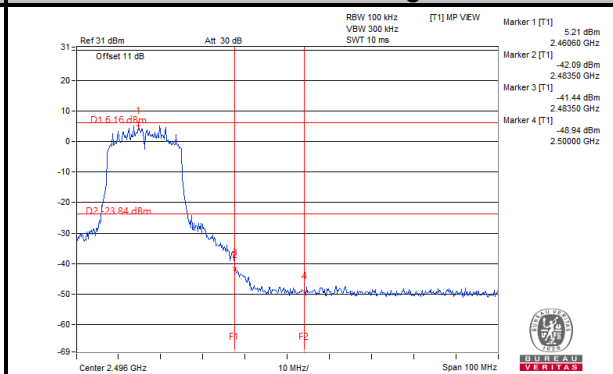


CHAIN 3



Ch 1

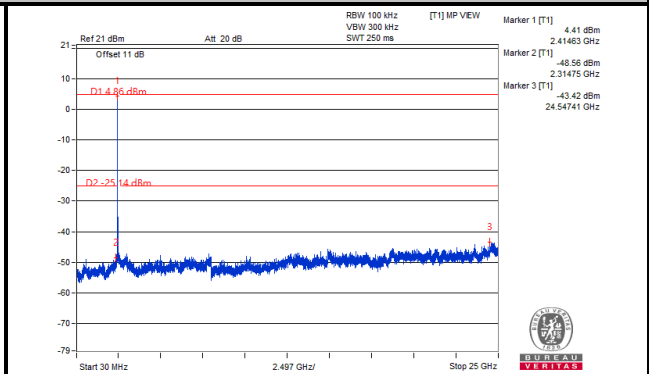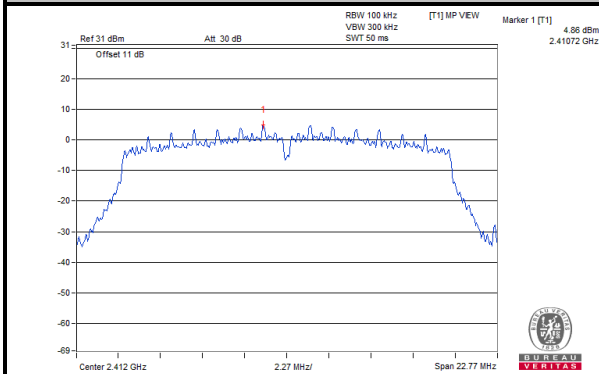


Ch 6

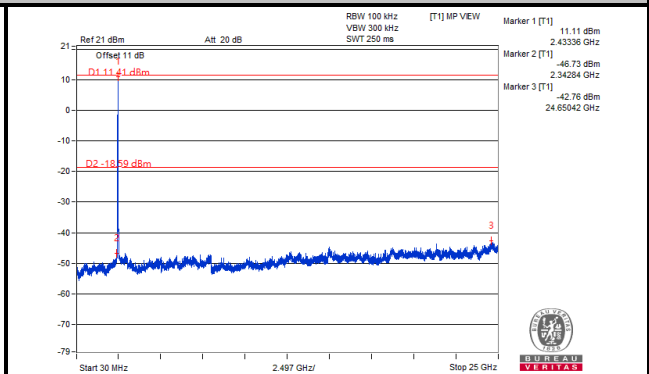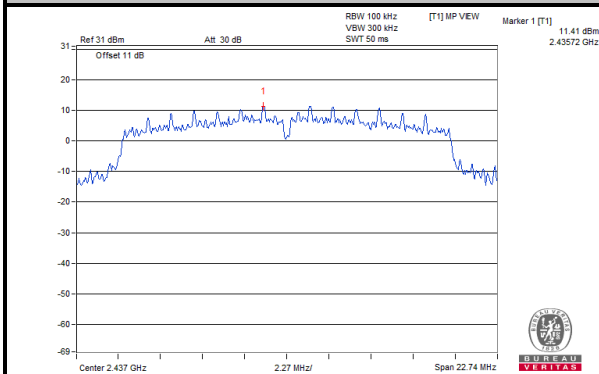


Ch 11

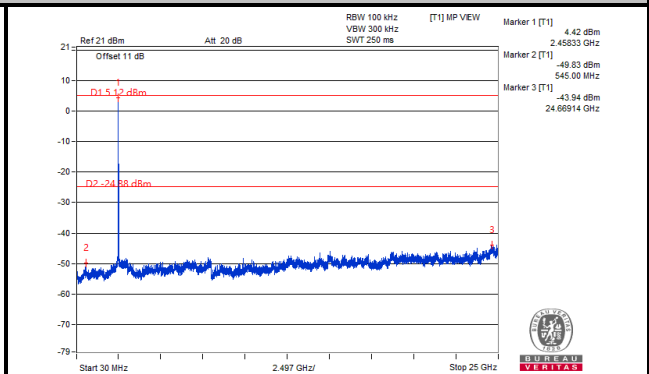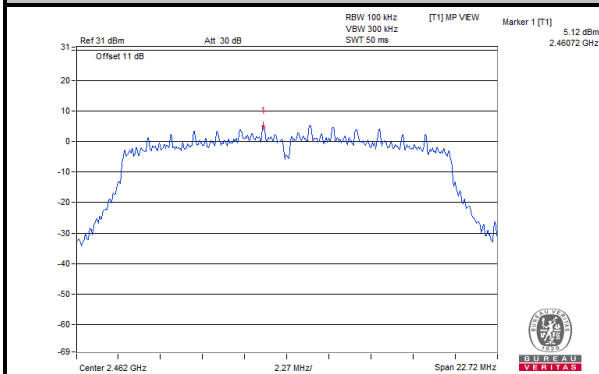

Ch 1 Band Edge

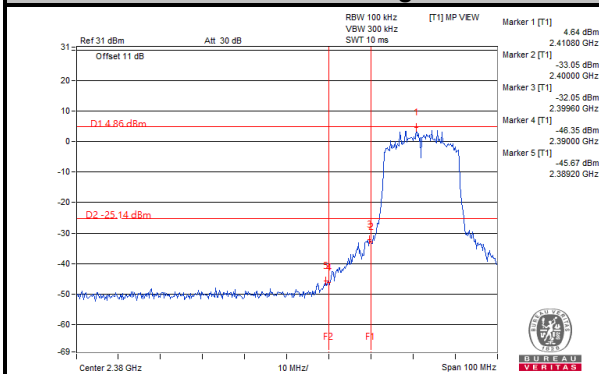


Ch 11 Band Edge

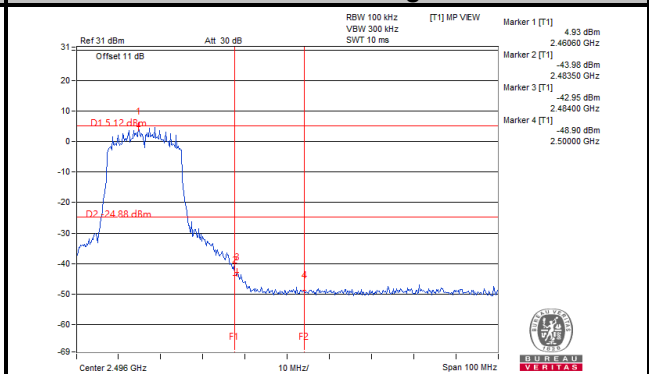



802.11ac (VHT40)

CHAIN 0


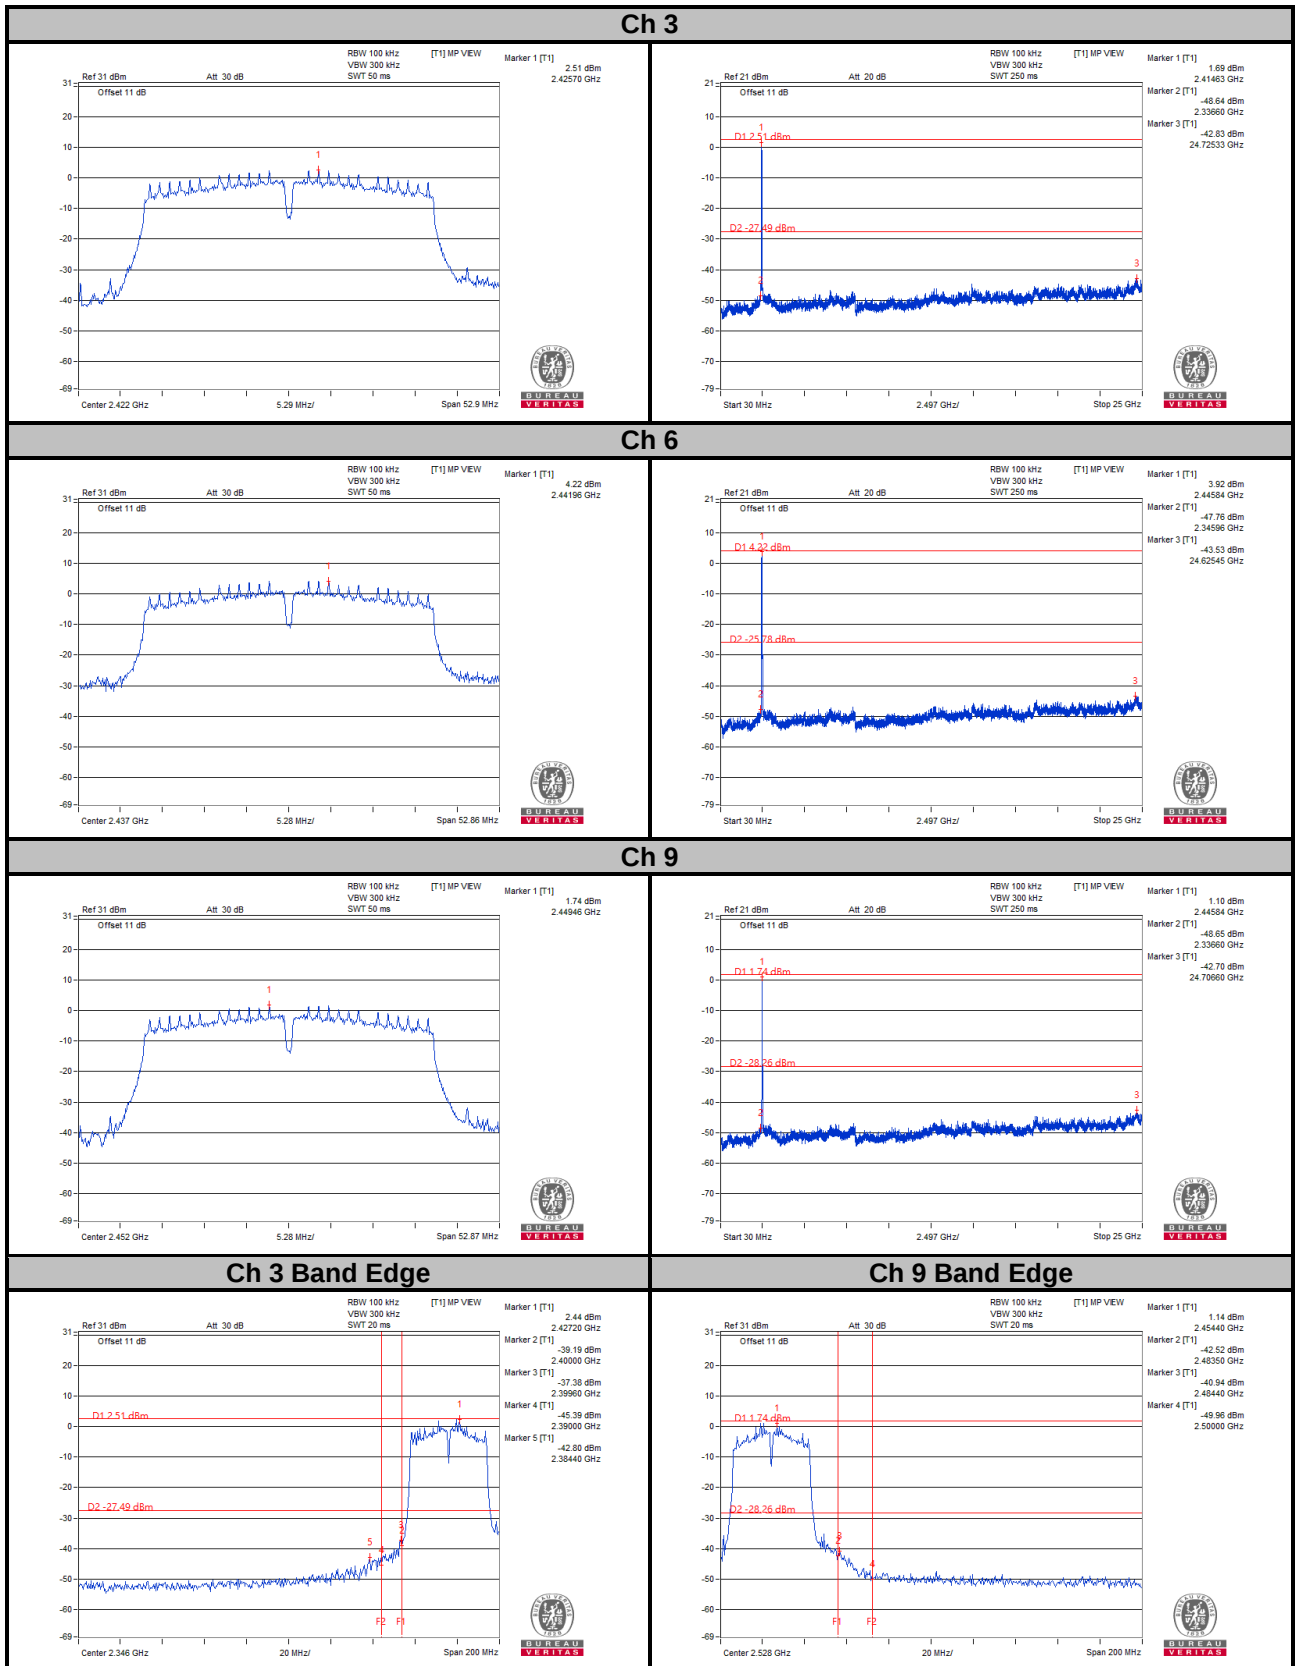


CHAIN 1



Ch 3

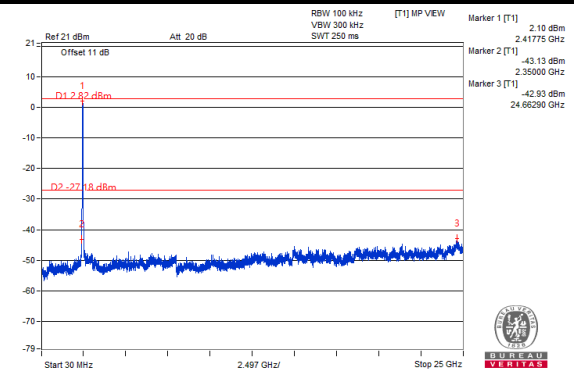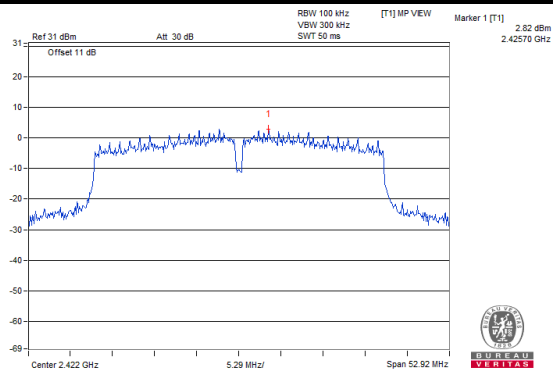


Ch 6

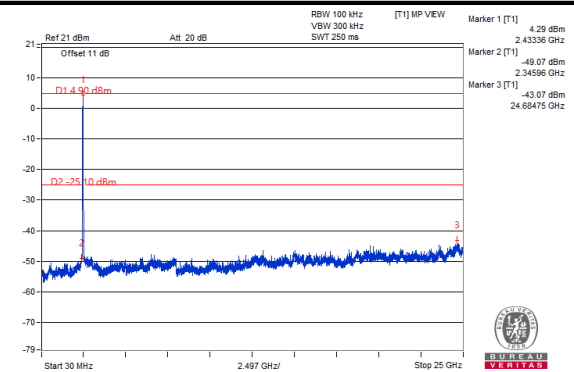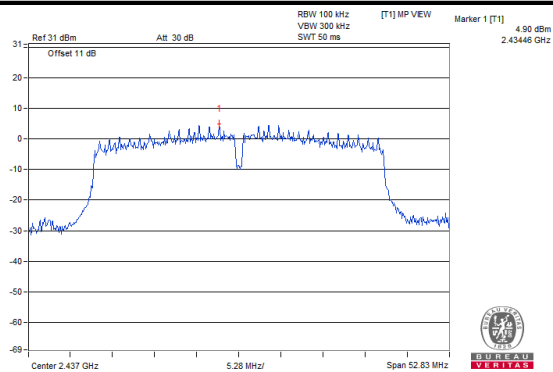


Ch 9

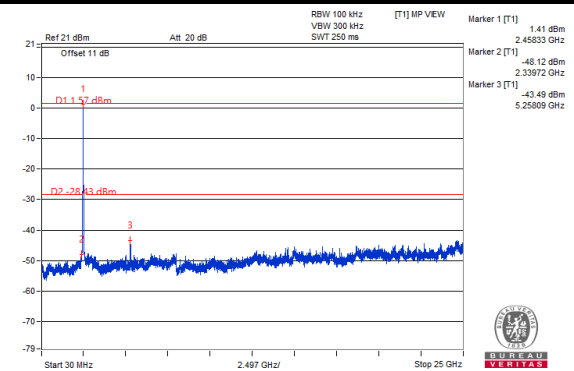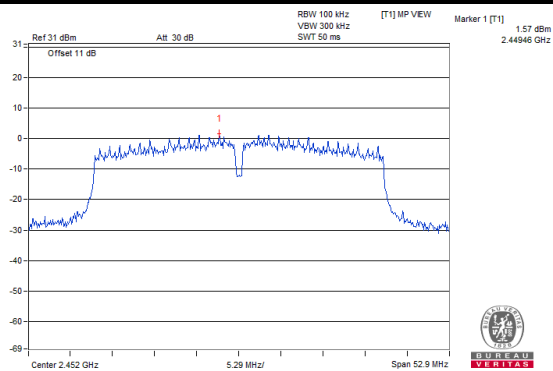

Ch 3 Band Edge


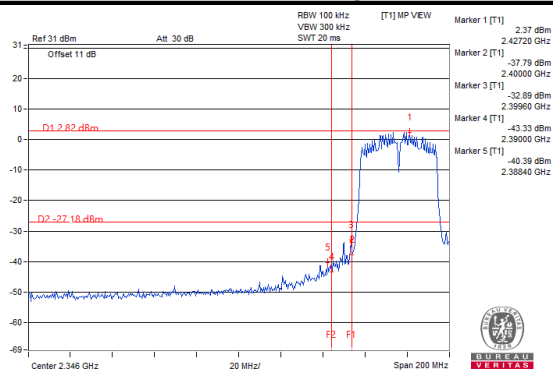


Ch 9 Band Edge


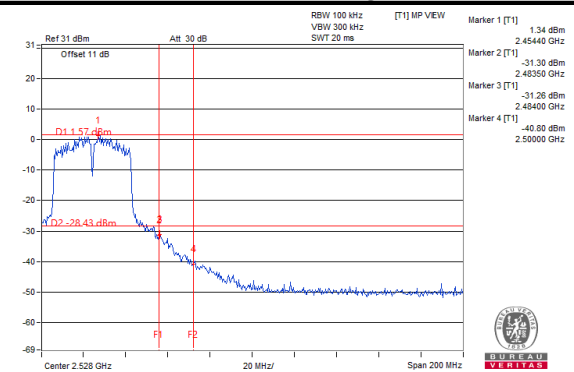


CHAIN 2



Ch 3

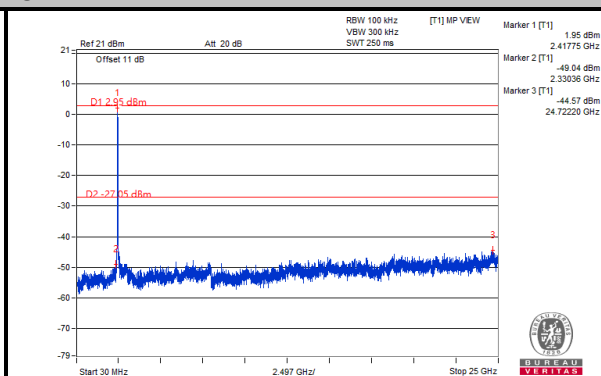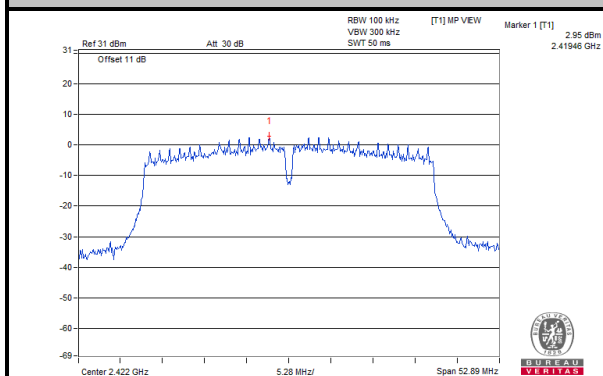


Ch 6

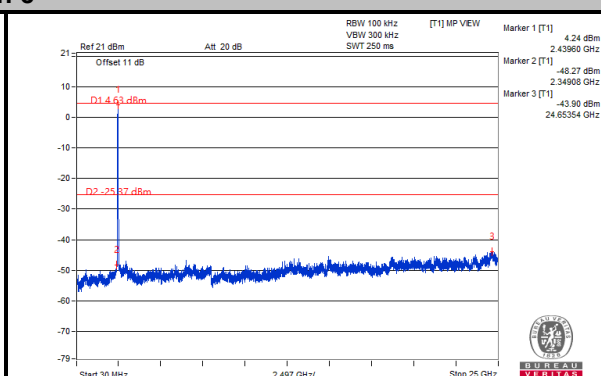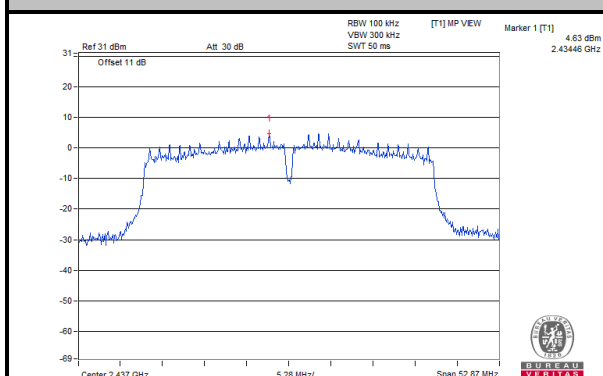


Ch 9

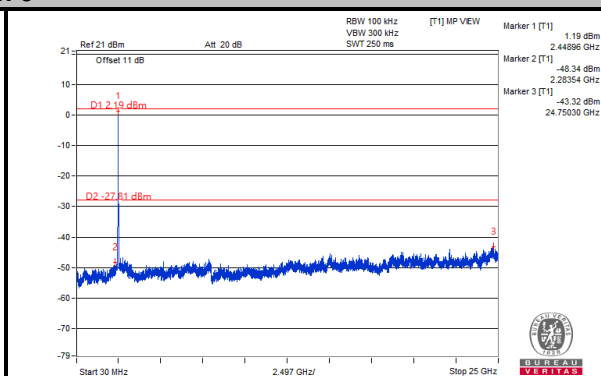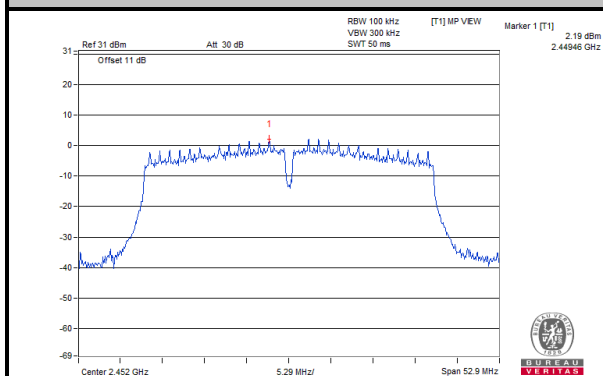

Ch 3 Band Edge


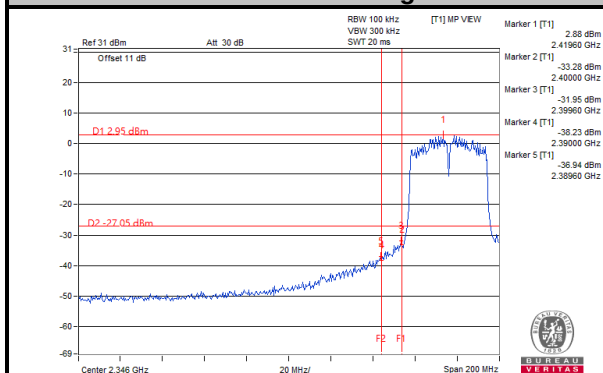


Ch 9 Band Edge


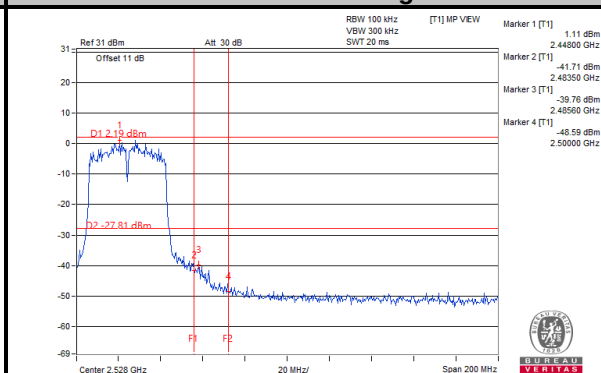


CHAIN 3



Ch 3

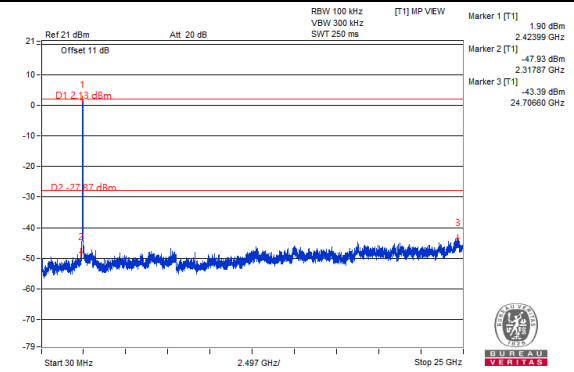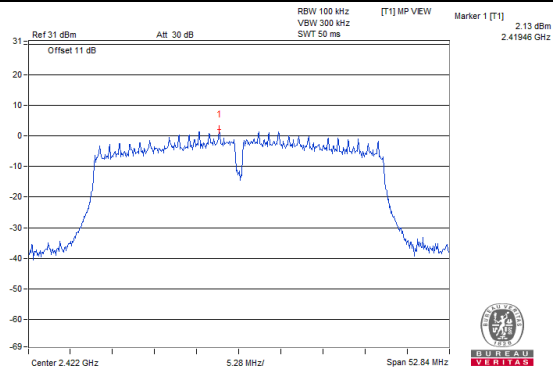


Ch 6

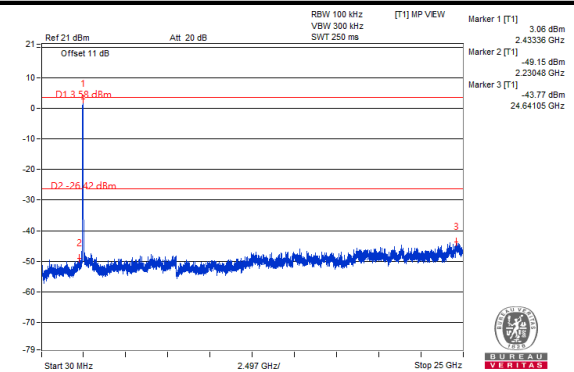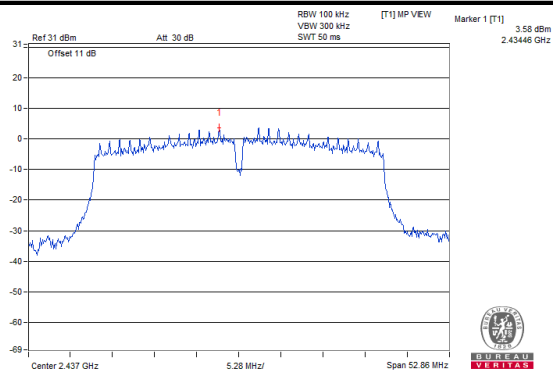


Ch 9

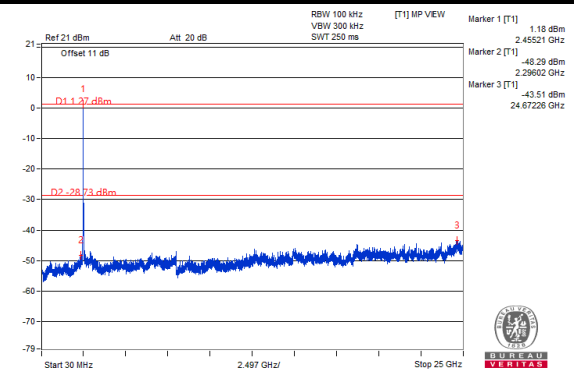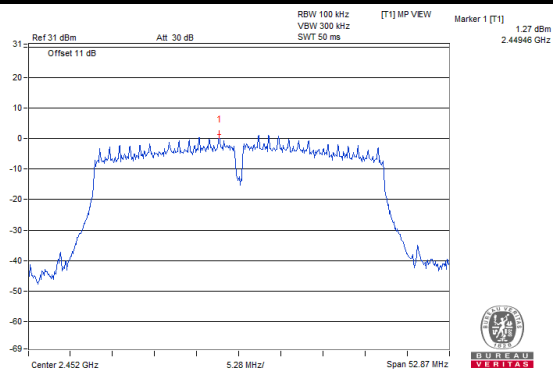

Ch 3 Band Edge

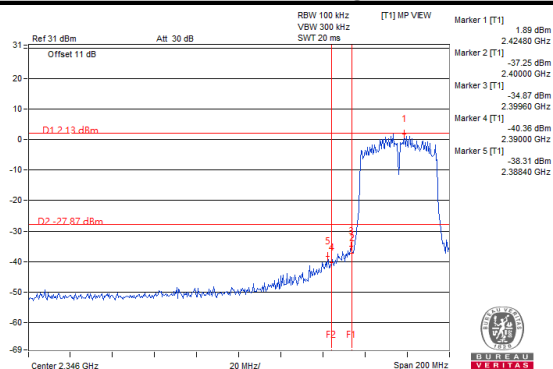

Ch 9 Band Edge

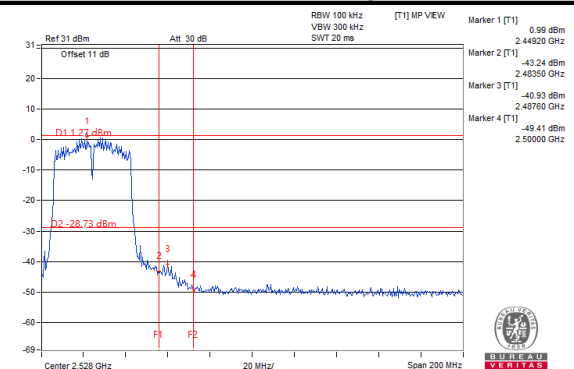


5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Band Edge Measurement


802.11b

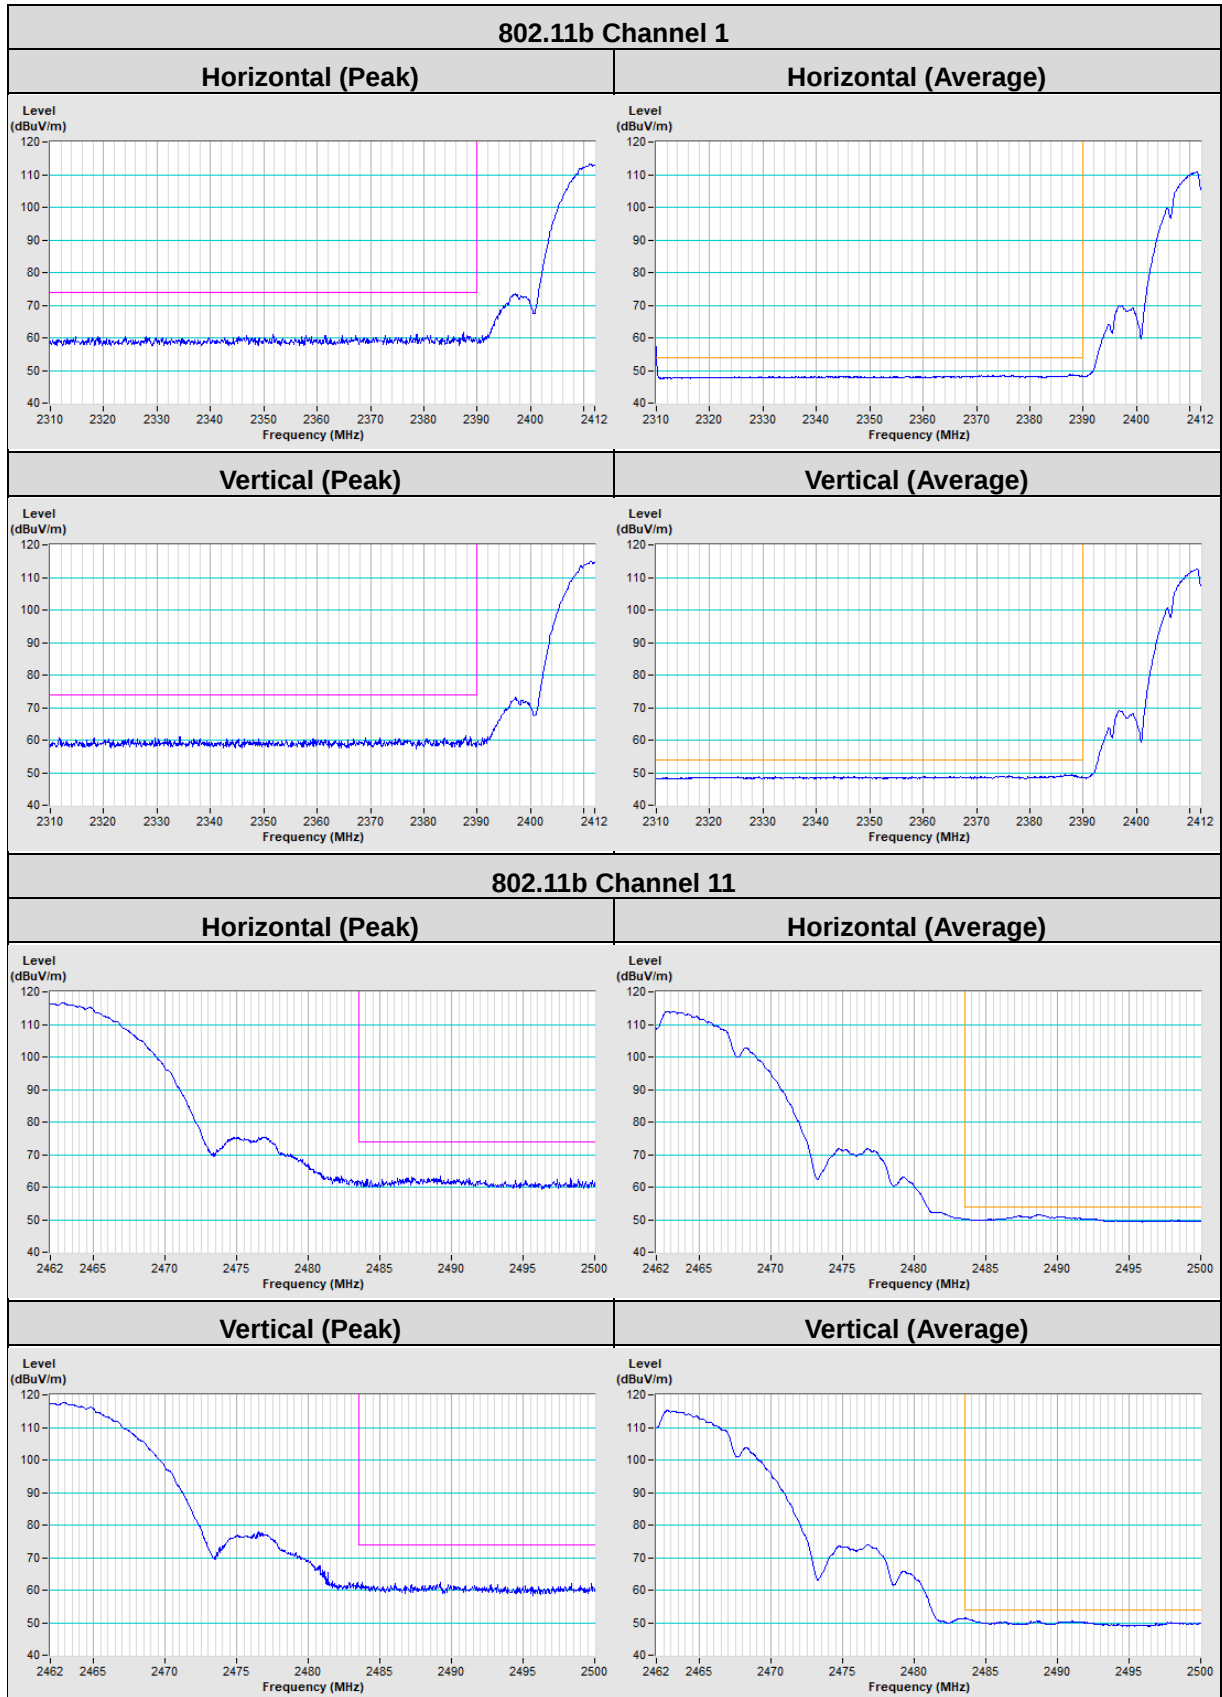


802.11g

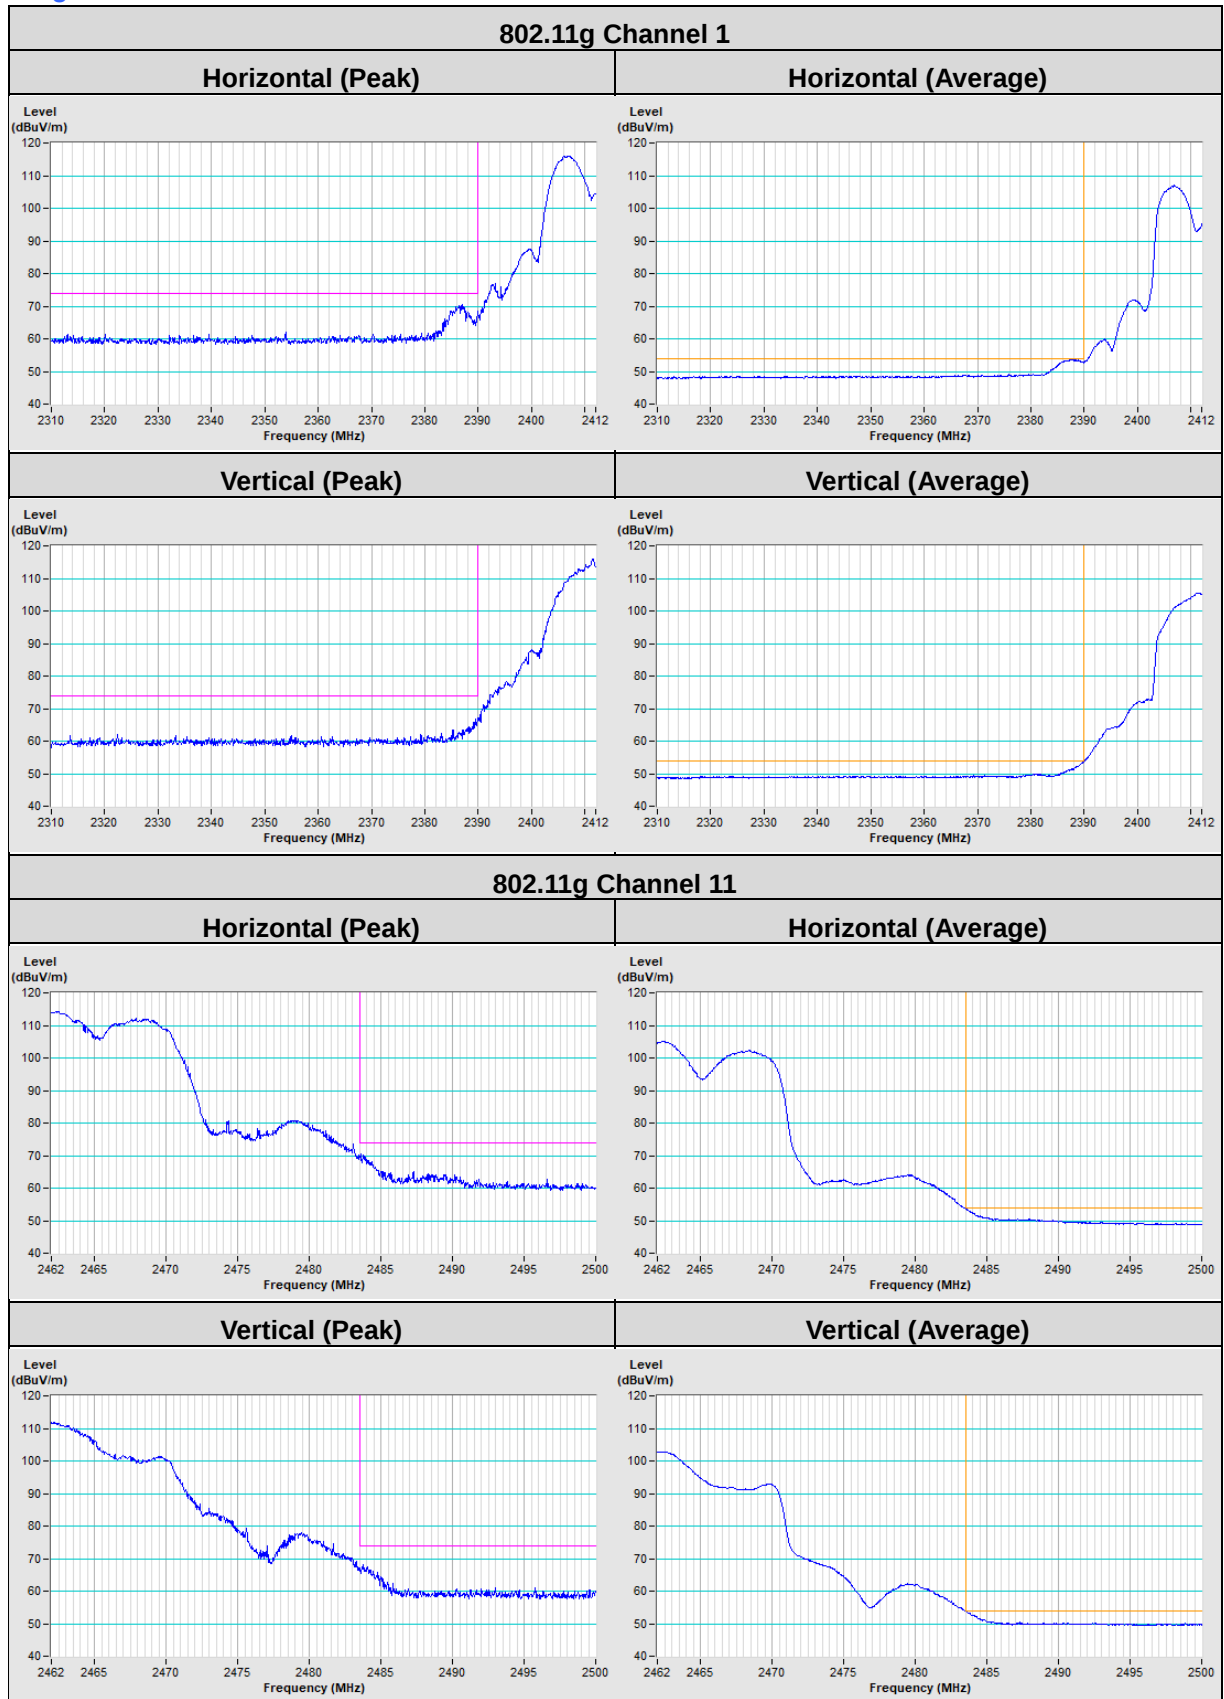



802.11ac (VHT20)

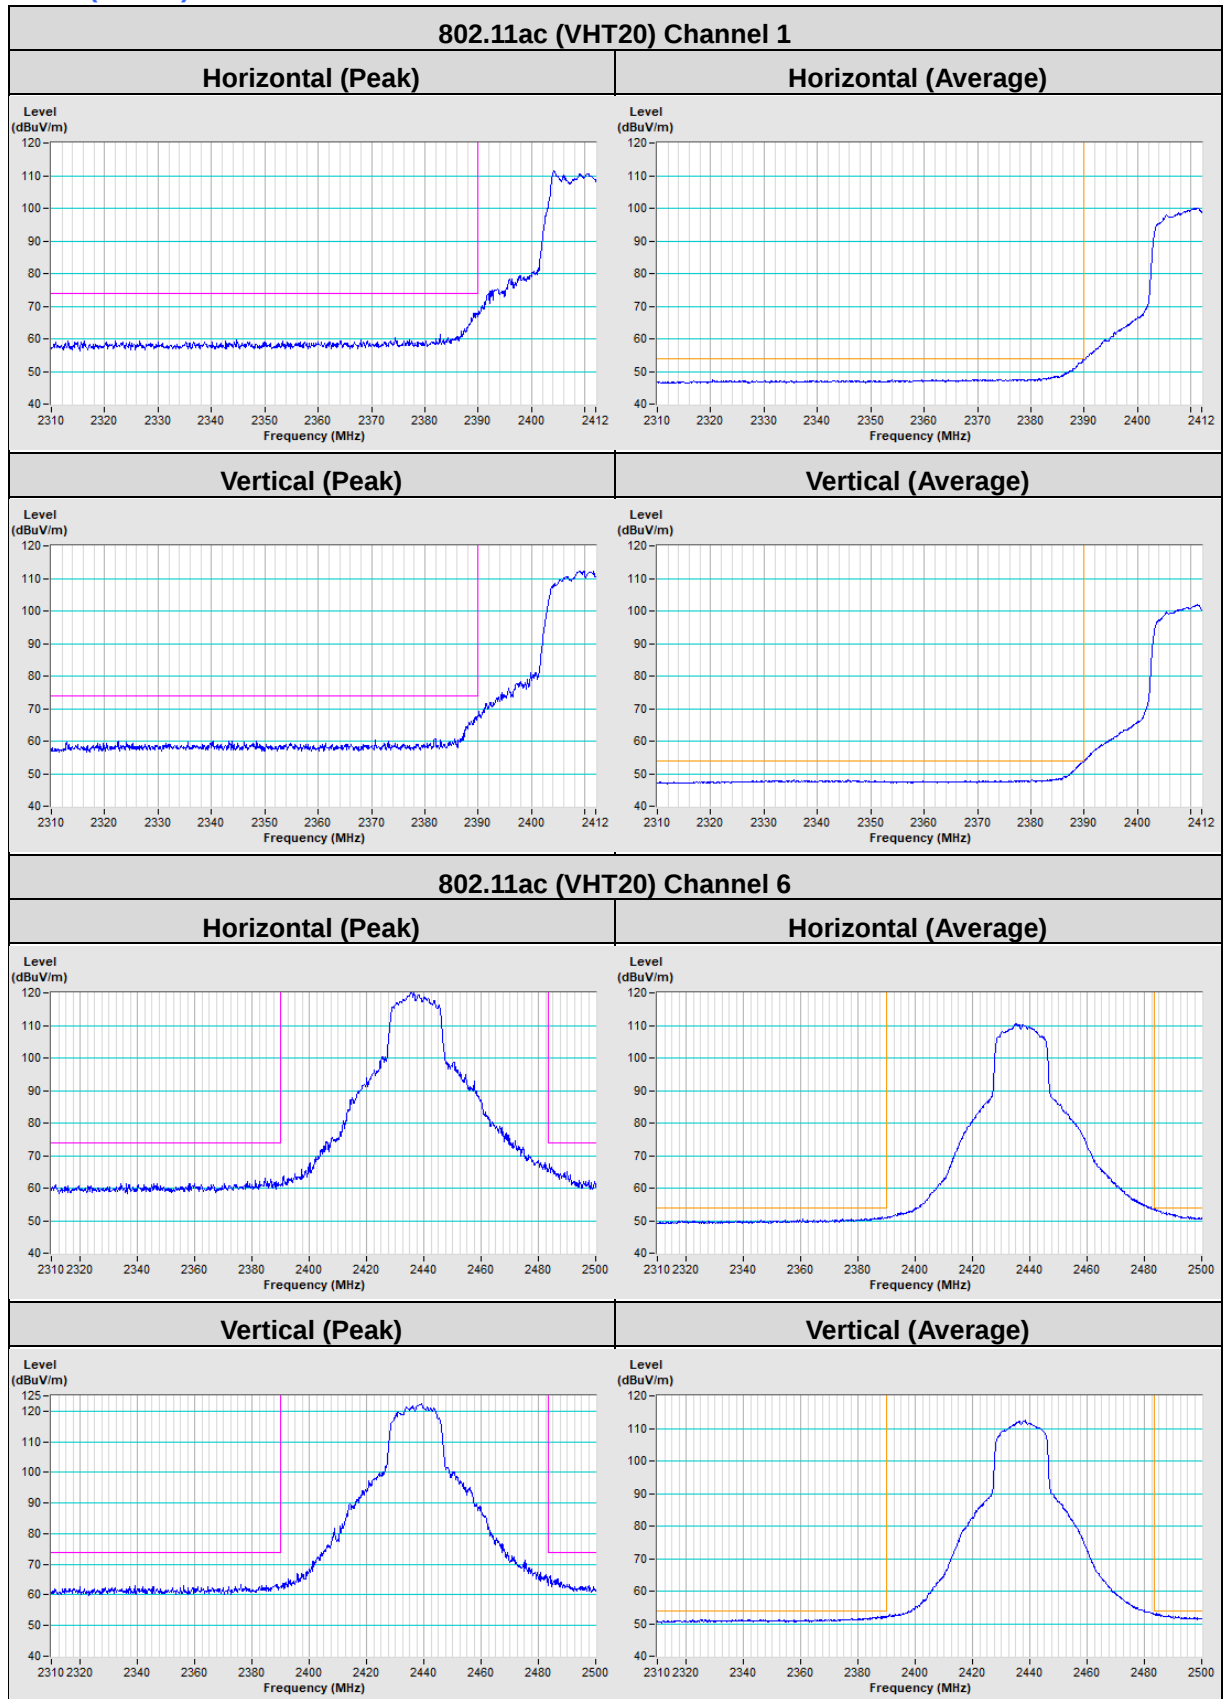

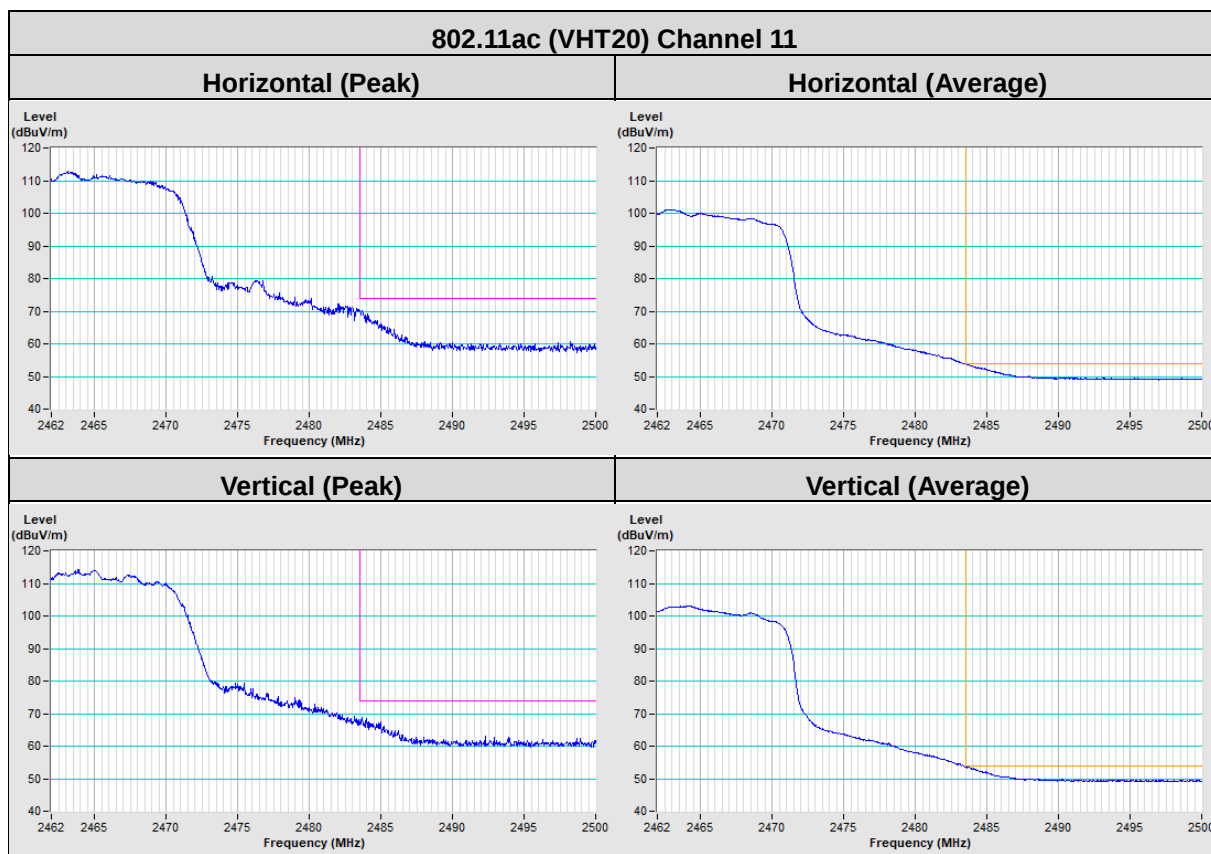

802.11ac (VHT40)

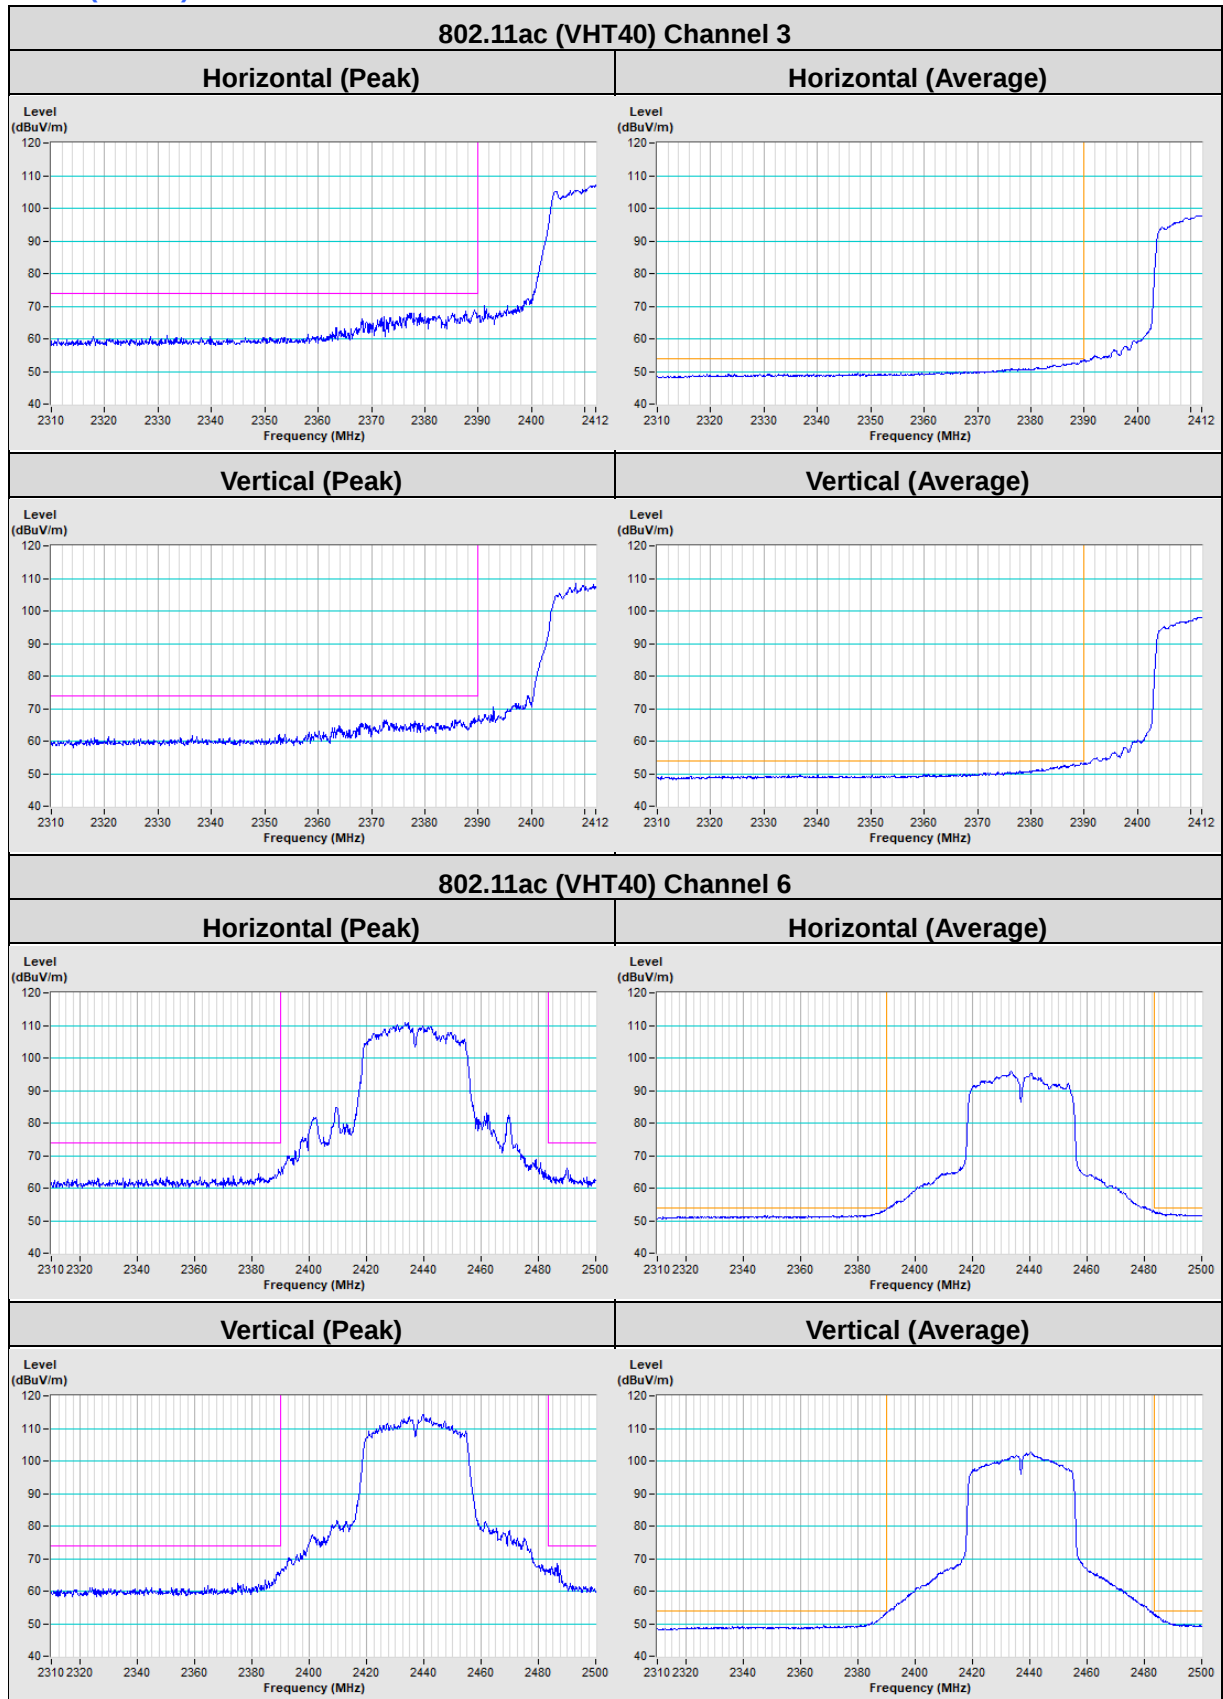

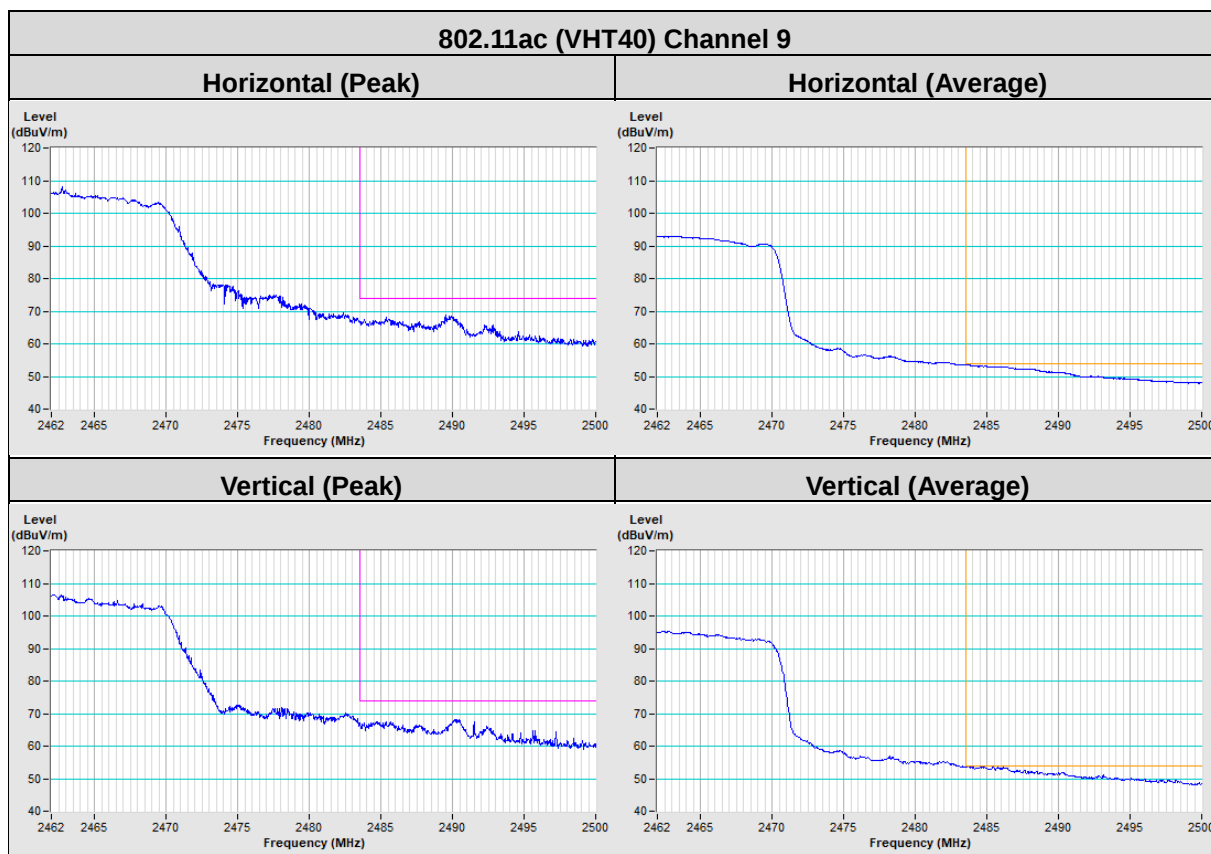

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---