




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/9/2005 9:56:38 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom	Relative Permittivity:	50.99
Relative Humidity:	50%	Conductivity:	1.904
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-34.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-141.00 mm
Antenna Configuration:	main normal configuration	Max E Field:	6.87 V/m
Test Frequency:	2437MHz	SAR 1g:	0.068 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.039 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.018 W/kg
Type of Modulation:		SAR End:	0.018 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

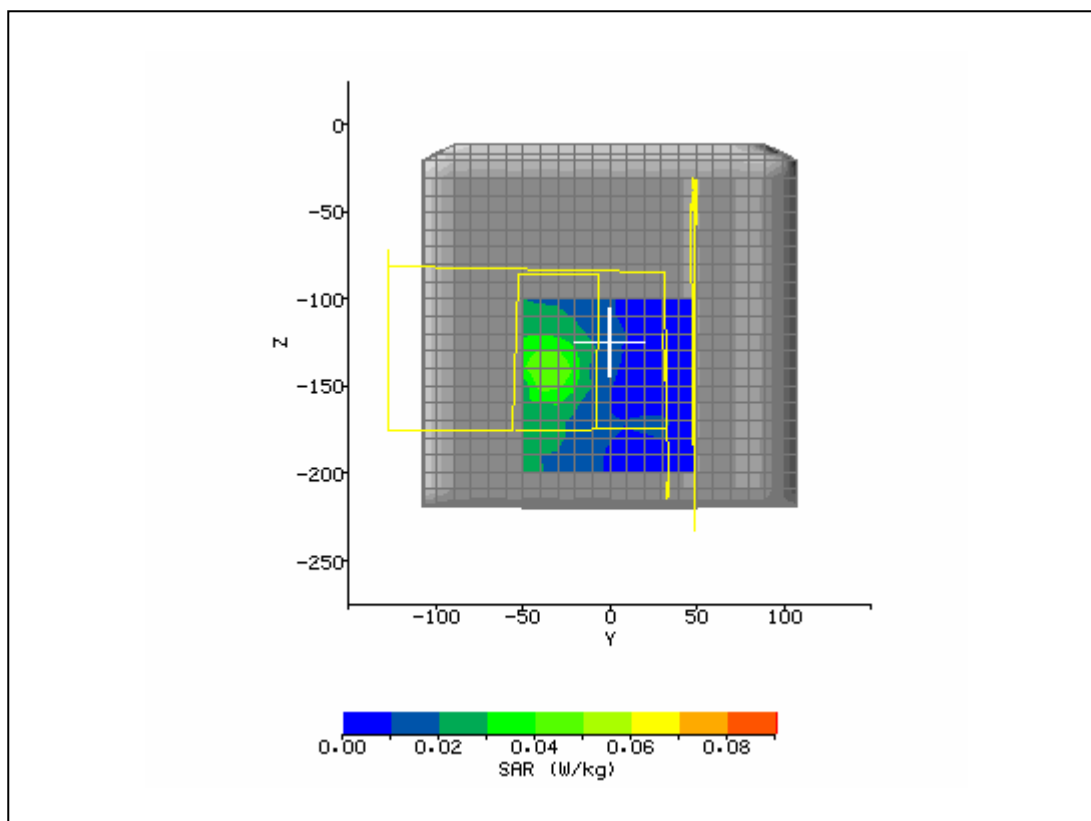


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/9/2005 11:19:41 AM	DUT Battery Model/No:	
Filename:	normlap6_2mbs_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom	Relative Permittivity:	50.99
Relative Humidity:	50%	Conductivity:	1.904
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-2.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-122.00 mm
Antenna Configuration:	main tablet configuration	Max E Field:	5.38 V/m
Test Frequency:	2437 1Mb/SMHz	SAR 1g:	0.045 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.026 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.018 W/kg
Type of Modulation:		SAR End:	0.018 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

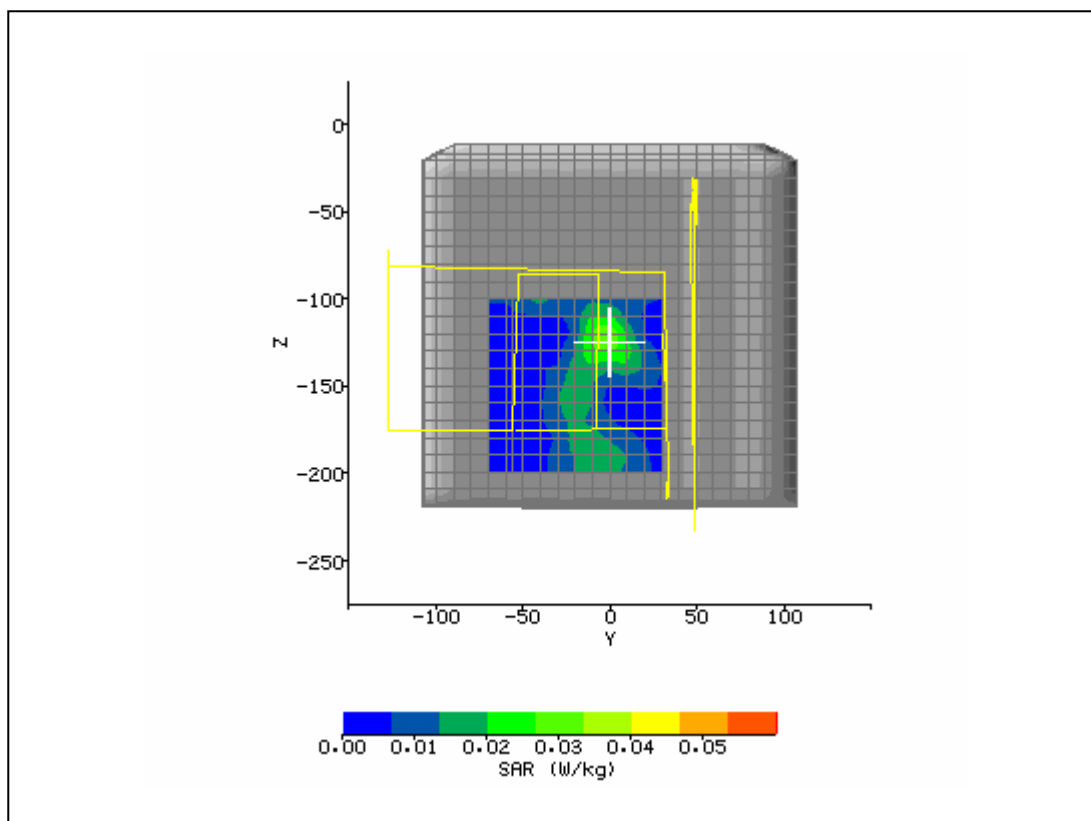

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/9/2005 12:06:57 PM	DUT Battery Model/No:	
Filename:	tab_main6lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom	Relative Permittivity:	50.99
Relative Humidity:	50%	Conductivity:	1.904
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	13.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-184.00 mm
Antenna Configuration:	Aux tablet configuration	Max E Field:	7.26 V/m
Test Frequency:	2437 1Mb/SMHz	SAR 1g:	0.077 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.040 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.022 W/kg
Type of Modulation:		SAR End:	0.023 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.15 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

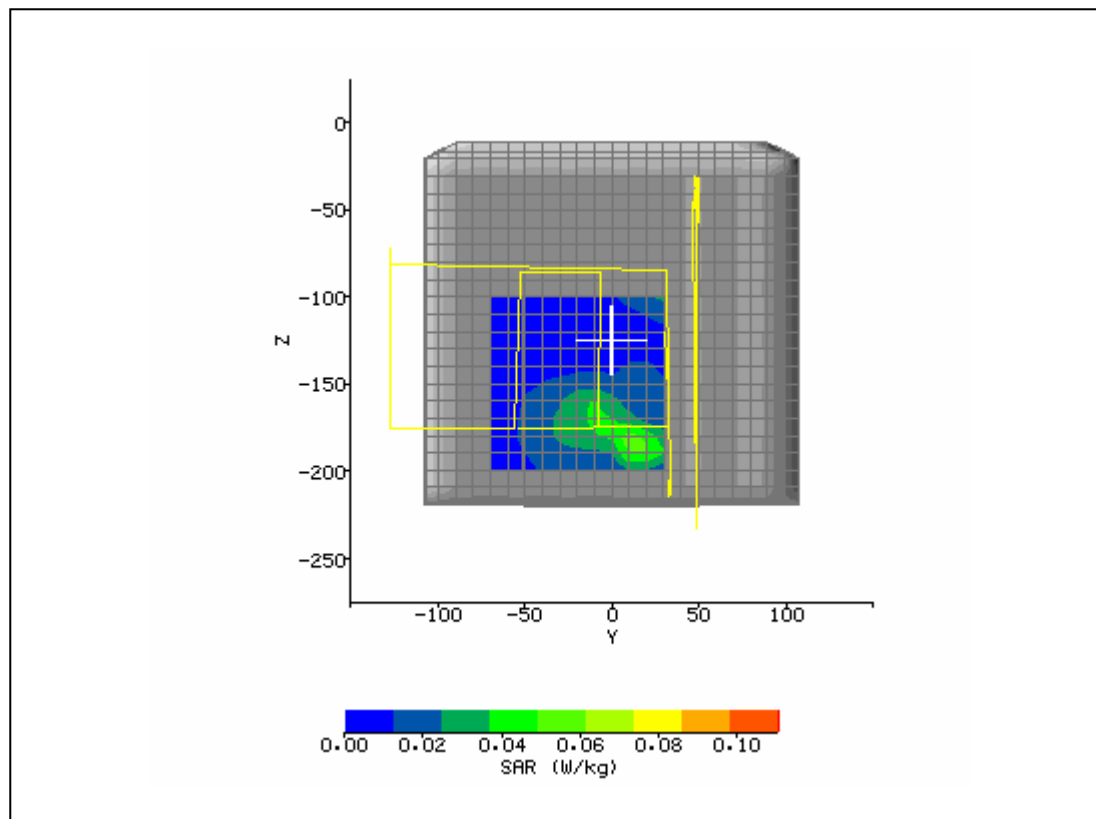

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/9/2005 12:52:22 PM	DUT Battery Model/No:	
Filename:	tab_aux6lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom	Relative Permittivity:	51.01
Relative Humidity:	50%	Conductivity:	1.862
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	3.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-186.00 mm
Antenna Configuration:	Aux tablet configuration	Max E Field:	7.36 V/m
Test Frequency:	2412 1Mb/SMHz	SAR 1g:	0.075 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.040 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.023 W/kg
Type of Modulation:		SAR End:	0.023 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

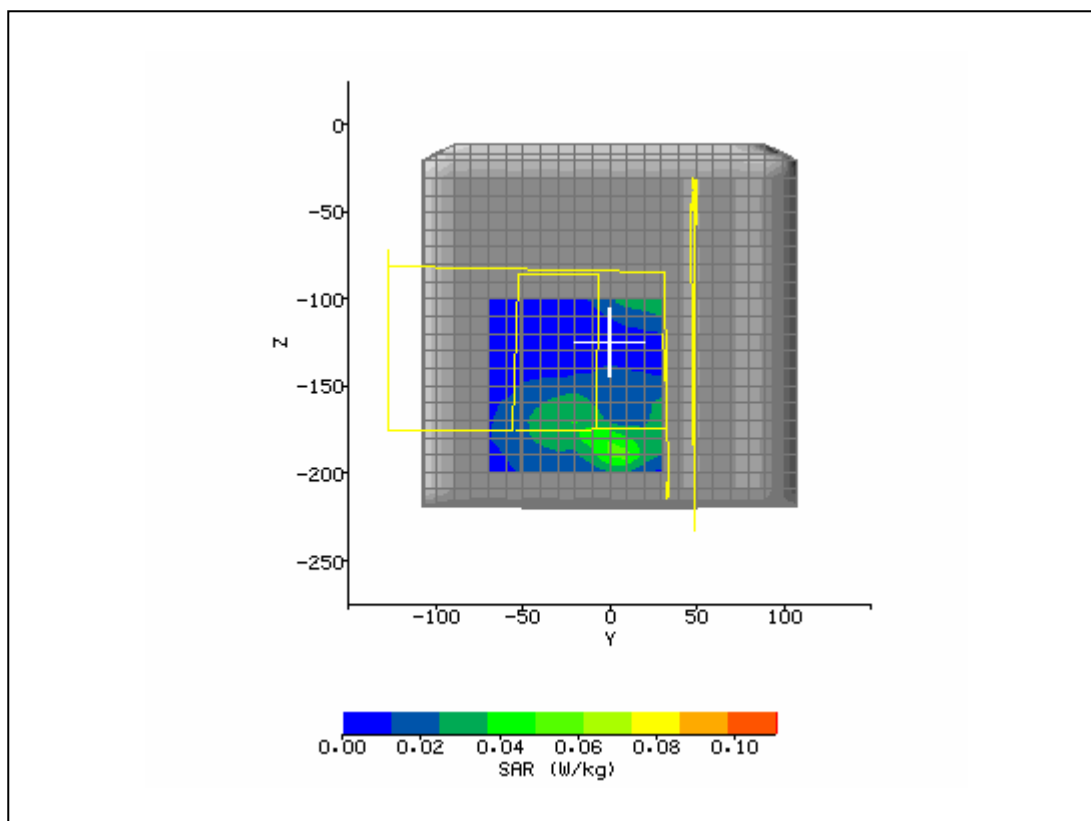

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/9/2005 1:24:49 PM	DUT Battery Model/No:	
Filename:	tab_aux1lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom	Relative Permittivity:	50.85
Relative Humidity:	50%	Conductivity:	1.941
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	0.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-182.00 mm
Antenna Configuration:	Aux tablet configuration	Max E Field:	7.14 V/m
Test Frequency:	2462 1Mb/SMHz	SAR 1g:	0.077 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.041 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.022 W/kg
Type of Modulation:		SAR End:	0.022 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.13 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

