

# TEST REPORT

**Report No.:** 8236EU010903W2

**Applicant:** SimplyTech Electronics Inc.

**Address:** 1407 Broadway Suite 1703 New York, NY 10018

**Product Name:** Super Fast Charging Slim Power Bank

**Model No.:** SLIM-FAST-5K-BLK (refer to clause 2.4)

**Trademark:** N/A

**FCC ID:** 2BKTL-MAG5KS

**Test Standard(s):** 47 CFR Part 1 Subpart I Section 1.1310  
47 CFR Part 2, Subpart J, Section 2.1091

**Date of Receipt:** Dec. 09, 2024

**Test Date:** Dec. 09, 2024 – Dec. 27, 2024


**Date of Issue:** Jan. 20, 2025

**ISSUED BY:**

SHENZHEN EU TESTING LABORATORY LIMITED



**Prepared by:**



Mikey Zhu/ Engineer

**Reviewed and Approved by:**



Sally Zhang/ Manager

### Revision Record

| Report Version | Issued Date   | Description | Status |
|----------------|---------------|-------------|--------|
| V0             | Jan. 20, 2025 | Original    | Valid  |
|                |               |             |        |
|                |               |             |        |



## Table of Contents

|                |                                     |           |
|----------------|-------------------------------------|-----------|
| <b>1</b>       | <b>COVER PAGE.....</b>              | <b>1</b>  |
| <b>2</b>       | <b>GENERAL INFORMATION .....</b>    | <b>4</b>  |
| 2.1            | APPLICANT INFORMATION.....          | 4         |
| 2.2            | MANUFACTURER INFORMATION.....       | 4         |
| 2.3            | FACTORY INFORMATION.....            | 4         |
| 2.4            | GENERAL DESCRIPTION OF E.U.T.....   | 4         |
| 2.5            | TECHNICAL INFORMATION OF E.U.T..... | 5         |
| <b>3</b>       | <b>TEST SUMMARY .....</b>           | <b>6</b>  |
| 3.1            | TEST STANDARD .....                 | 6         |
| 3.2            | TEST VERDICT.....                   | 6         |
| 3.3            | TEST LABORATORY .....               | 6         |
| <b>4</b>       | <b>TEST CONFIGURATION.....</b>      | <b>7</b>  |
| 4.1            | TEST ENVIRONMENT .....              | 7         |
| 4.2            | TEST EQUIPMENT .....                | 7         |
| 4.3            | TEST MODE .....                     | 8         |
| 4.4            | MEASUREMENT UNCERTAINTY .....       | 8         |
| <b>5</b>       | <b>TEST METHODOLOGY.....</b>        | <b>9</b>  |
| 5.1            | REFERENCE EVALUATION METHOD .....   | 9         |
| 5.2            | LIMIT .....                         | 9         |
| 5.3            | TEST SETUP DIAGRAM .....            | 10        |
| 5.4            | MEASUREMENT PROCEDURE .....         | 11        |
| 5.5            | EVALUATION RESULT .....             | 16        |
| <b>ANNEX A</b> | <b>TEST SETUP PHOTOS.....</b>       | <b>17</b> |

## 2 General Information

### 2.1 Applicant Information

|           |   |
|-----------|---|
| Applicant | SimplyTech Electronics Inc.                 |
| Address   | 1407 Broadway Suite 1703 New York, NY 10018 |

### 2.2 Manufacturer Information

|              |   |
|--------------|---|
| Manufacturer | SimplyTech Electronics Inc.                 |
| Address      | 1407 Broadway Suite 1703 New York, NY 10018 |

### 2.3 Factory Information

|         |   |
|---------|---|
| Factory | SimplyTech Electronics Inc.                 |
| Address | 1407 Broadway Suite 1703 New York, NY 10018 |

### 2.4 General Description of E.U.T.

|                                      |   |
|--------------------------------------|---|
| Product Name                         | Super Fast Charging Slim Power Bank   |
| Model No. Under Test                 | SLIM-FAST-5K-BLK  |
| List Model No.                       | SLIM-FAST-5K-WHT  |
| Description of Model differentiation | All models are same with electrical parameters and internal circuit structure, but only differ in appearance color and model name.<br>(this information provided by the customer)   |
| Rating(s)                            | Micro Input: 5V---2A, 9V---2A<br>Type-C Output: 5V---3A, 9V---2.22A, 12V---1.67A<br>USB Output: 5V---3A, 9V---2A, 12V---1.5A<br>Wireless Charging Output: 5W, 7.5W, 10W, 15W<br>Lithium Battery: 3.7V, 5000mAh, 18.5Wh  |
| Product Type                         | <input type="checkbox"/> Mobile<br><input checked="" type="checkbox"/> Portable<br><input type="checkbox"/> Fix Location  |
| Test Sample No.                      | -1/2(Normal Sample), -2/2(Engineering Sample)   |
| Hardware Version                     | V1.0  |
| Software Version                     | V1.0  |
| Remark                               | 1) The above information are declared by the applicant, EU-LAB is not responsible for the information accuracy provided by the applicant.<br>2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. |

## 2.5 Technical Information of E.U.T.

|                                   |                               |
|-----------------------------------|-------------------------------|
| Network and Wireless Connectivity | Wireless Power Transfer (WPT) |
|-----------------------------------|-------------------------------|

The requirement for the following technical information of the EUT was tested in this report:

|                     |   |
|---------------------|---|
| Technology          | <b>WPT</b>  |
| Operating Frequency | 110.1-205KHz  |
| Modulation Type     | FSK   |
| Antenna Type        | Coil Antenna  |
| Antenna Gain(Peak)  | 0 dBi   |
| Remark              | The above information is declared by the applicant, EU-LAB is not responsible for the information accuracy provided by the applicant. |

### 3 Test Summary

#### 3.1 Test Standard

The tests were performed according to following standards:

| No. | Identity                                 | Document Title   |
|-----|--|--|
| 1   | 47 CFR Part 1 Subpart I Section 1.1310   | Radio frequency radiation exposure limits.   |
| 2   | 47 CFR Part 2, Subpart J, Section 2.1091 | Radiofrequency radiation exposure evaluation: mobile devices                           |
| 3   | KDB 680106 D01v04                        | RF exposure consideration for low power consumer wireless power transfer applications. |

Remark:

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the emission/immunity should be checked to ensure compliance has been maintained.

#### 3.2 Test Verdict

| No. | Description            | FCC Part No.   | Verdict | Remark |
|-----|------------------------|--|---------|--------|
| 1   | RF Exposure Evaluation | FCC 1.1310<br>FCC 2.1091<br>KDB 680106 D01 Wireless Power Transfer v04 | Pass    | --     |

#### 3.3 Test Laboratory

|                               |  |
|-------------------------------|--|
| Test Laboratory               | Shenzhen EU Testing Laboratory Limited   |
| Address                       | 101, Building B1, Fuqiao Fourth Area, Qiaotou Community, Fuhai Subdistrict, Baoan District, Shenzhen, Guangdong, China |
| Designation Number            | CN1368   |
| Test Firm Registration Number | 952583   |

## 4 Test Configuration

### 4.1 Test Environment

During the measurement, the normal environmental conditions were within the listed ranges:

|                            |                         |                |
|----------------------------|-------------------------|----------------|
| Relative Humidity          | 30% to 60%              |                |
| Atmospheric Pressure       | 86 kPa to 106 kPa       |                |
| Temperature                | NT (Normal Temperature) | +15°C to +35°C |
| Working Voltage of the EUT | NV (Normal Voltage)     | 120 VAC, 60Hz  |

### 4.2 Test Equipment

| Equipment                                    | Manufacturer | Model No | Serial No | Cal Date   | Cal Due Date |
|--|--------------|----------|-----------|------------|--------------|
| Electric and Magnetic Field Probe - Analyzer | Narda        | EHP-200A | EE-405    | 2024/02/15 | 2025/02/14   |

Electric and Magnetic Field Probe - Analyzer EHP-200A detailed parameters are as follows.

|                          |  |
|--------------------------|--|
| Dynamic range            | >80  |
| SPAN                     | 0 to FULL SPAN                                 |
| RBW                      | 1 kHz, 3 kHz, 10 kHz, 30 kHz, 100 kHz, 300 kHz |
| Measurement range        | > 94 dB  |
| Calibration              | internal E2PROM                                |
| Temperature error        | 0.02 dB/°C                                     |
| Dimensions               | 92 x 92 x 109 mm                               |
| Weight                   | 550 g  |
| Preamplifier             | selectable ON/OFF, 14dB                        |
| Units                    | V/m, A/m, uT, mW/cm2, W/m2                     |
| Internal battery         | 3.7 V - 5.55 Ah Li-Ion, rechargeable           |
| Operation                | > 12 hours                                     |
| Recharging time          | < 8 hours                                      |
| External supply          | 10 to 15 Vdc, I = approx. 560 mA               |
| Optical fiber connection | up to 40 m (USB-OC)<br>up to 80 m (8053-OC)    |
| Firmware updating        | through the optical link via EHP200-TS         |
| Self test                | automatic at power on                          |
| Operating temperature    | -10°C to +50°C                                 |
| Storage temperature      | -20°C to +70°C                                 |
| Enviromental protection  | IP42   |

### 4.3 Test Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

| No.   | Description                         | Remark |
|---|-------------------------------------|--------|
| TM1   | Wireless Output (5W) + Empty Load   |        |
| TM2   | Wireless Output (5W) + Half Load    |        |
| TM3   | Wireless Output (5W) + Full Load    |        |
| TM4   | Wireless Output (7.5W) + Empty Load |        |
| TM5   | Wireless Output (7.5W) + Half Load  |        |
| TM6   | Wireless Output (7.5W) + Full Load  |        |
| TM7   | Wireless Output (10W) + Empty Load  |        |
| TM8   | Wireless Output (10W) + Half Load   |        |
| TM9   | Wireless Output (10W) + Full Load   |        |
| TM10  | Wireless Output (15W) + Empty Load  | Record |
| TM11  | Wireless Output (15W) + Half Load   |        |
| TM12  | Wireless Output (15W) + Full Load   |        |
| TM13  | Standby                             |        |
| <b>Note:</b><br>1. All the conditions have been tested. It is found that TM10 is the worst mode, and the data in the report only reflects the worst mode. |                                     |        |

### 4.4 Measurement Uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Test Item                               | Measurement Uncertainty |
|---|-------------------------|
| Magnetic field measurements(3kHz~10MHz) | ±14.6%                  |
| Electric field measurements(3kHz~10MHz) | ±17.3%                  |



## 5 Test Methodology

### 5.1 Reference Evaluation Method

- ✧ ANSI C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz.
- ✧ FCC KDB publication 680106 D01 RF Exposure Wireless Charging Apps v04: RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications
- ✧ FCC CFR 47 Part 1.1310: Radiofrequency radiation exposure limits.
- ✧ FCC CFR 47 Part 2.1093: Radiofrequency radiation exposure evaluation: portable devices
- ✧ FCC CFR 47 Part 18.107: Industrial, Scientific, and Medical Equipment
- ✧ April 2024 TCBC Workshop: Part 18 Wireless Power Transfer Devices: Clarifications on KDB 680106v04 and ECR Processes.

### 5.2 Limit

According to FCC CFR 47 § 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in § 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

**TABLE 1 TO § 1.1310(E)(1)—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

| Frequency range (MHz)   | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Averaging time (minutes) |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| <b>(i) Limits for Occupational/Controlled Exposure</b>          |                               |                               |                                     |                          |
| 0.3-3.0   | 614                           | 1.63                          | *(100)                              | ≤6                       |
| 3.0-30  | 1842/f                        | 4.89/f                        | *(900/f <sup>2</sup> )              | <6                       |
| 30-300  | 61.4                          | 0.163                         | 1.0                                 | <6                       |
| 300-1,500   |                               |                               | f/300                               | <6                       |
| 1,500-100,000   |                               |                               | 5                                   | <6                       |
| <b>(ii) Limits for General Population/Uncontrolled Exposure</b> |                               |                               |                                     |                          |
| 0.3-1.34  | 614                           | 1.63                          | *(100)                              | <30                      |
| 1.34-30   | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | <30                      |
| 30-300  | 27.5                          | 0.073                         | 0.2                                 | <30                      |
| 300-1,500   |                               |                               | f/1500                              | <30                      |
| 1,500-100,000   |                               |                               | 1.0                                 | <30                      |


*f* = frequency in MHz. \* = Plane-wave equivalent power density.

Note 1: Occupational/ controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.


Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

### 5.3 Test Setup Diagram


#### For Mobile Exposure Conditions:

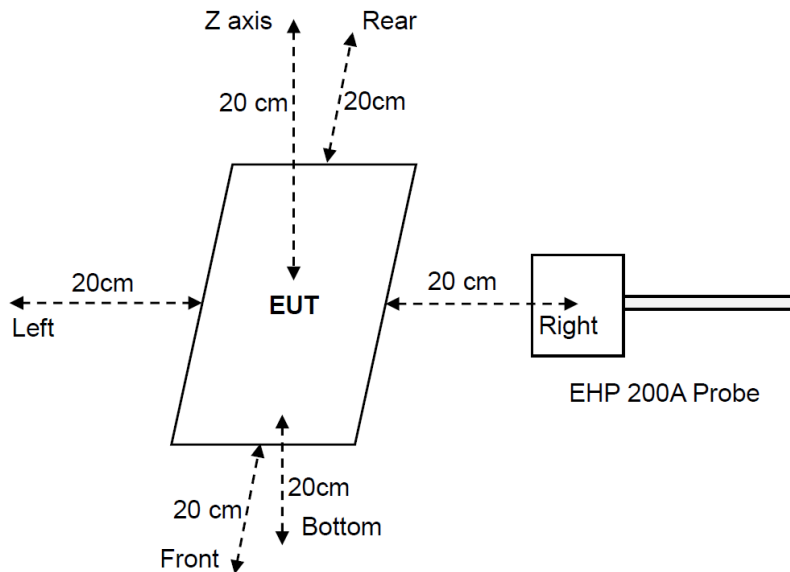

#### For Portable Exposure Conditions:

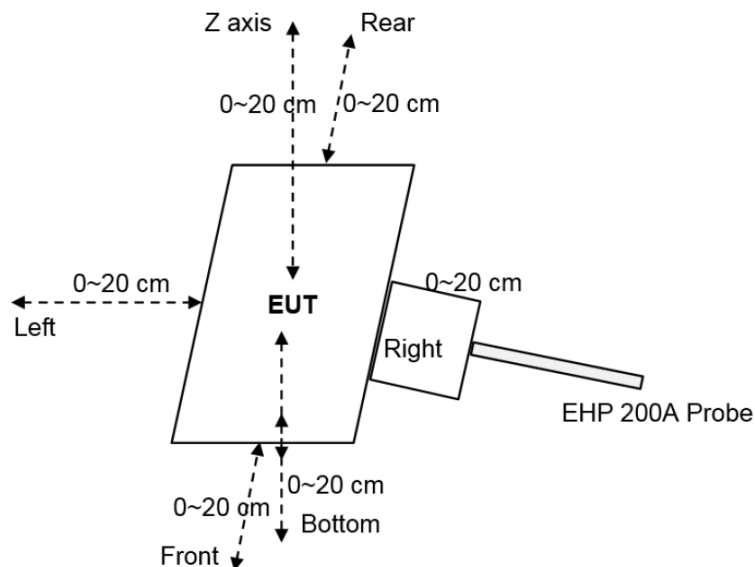

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The distance of the points (A, B, C, D, E, F) is 0,2,4,6,8,10,12,14,16,18,20cm.
- 3) The values tested by the probe are X, Y and Z on three axes perpendicular to the edge of the device. Top and bottom side coincident with the axis (Y) of the main coil.

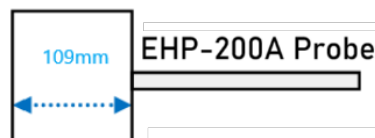


Note: The EHP-200A Probe has a diameter of 10.9cm and a radius of 5.45cm.

## 5.4 Measurement Procedure

### For Portable Exposure Conditions:


- 1) The portable test modes have covered the considerations of the mobile test, only record the test data of the portable conditions in this report.
- 2) Operating modes with client device (1%, 50%, 99% battery status of client device), have been tested, only show the data of worst case of 1% battery status of client device.
- 3) Test performed with all the radiating structures operating at maximum power at the same time.
- 4) E-field and H-field measurements are taken along all three axes the device from 0cm to 20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing elements is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable.
- 5) Validation of Field Estimates
  - a) If R is the probe radius and the probe tip is in contact with the coil, then the probe center is R cm from the coil surface as bellow picture:

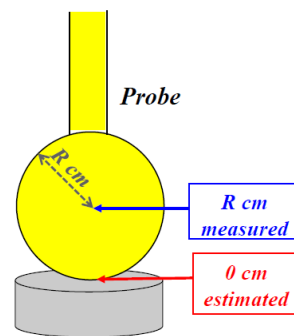

- b) The probe then is measuring the field correctly at R cm from the surface, and only estimating the field at the 0 cm point of contact with the coil surface.
- c) The validation requires showing that the model used to estimate the field provides data within 30% accuracy for at least the two, 2-cm-spaced closest points to where the estimates were made.
- d) If there is only on estimated value, then a single validation point is sufficient.
- e) Validation Example for 4 cm Probe Radius as following


Step 1:

### Validation Example for 4 cm Probe Radius

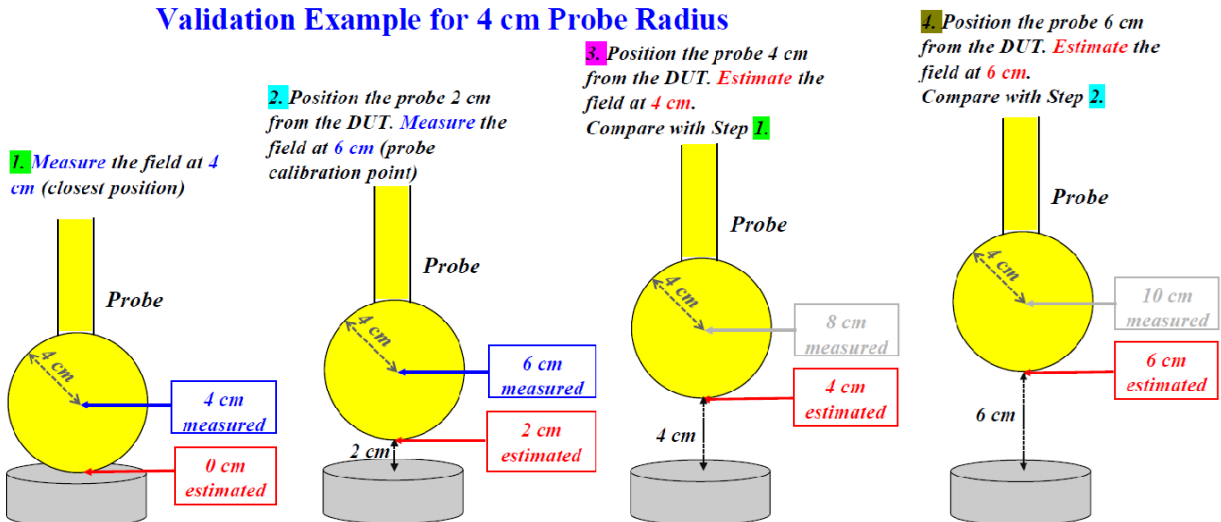


Step 2:

### Validation Example for 4 cm Probe Radius

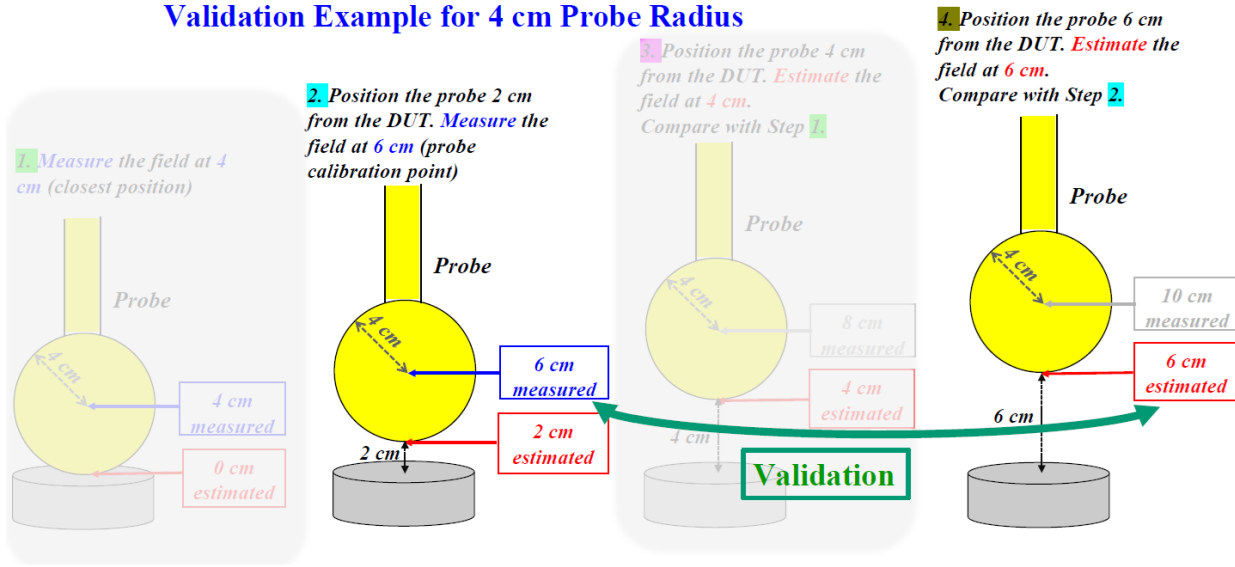

Step 3:

### Validation Example for 4 cm Probe Radius

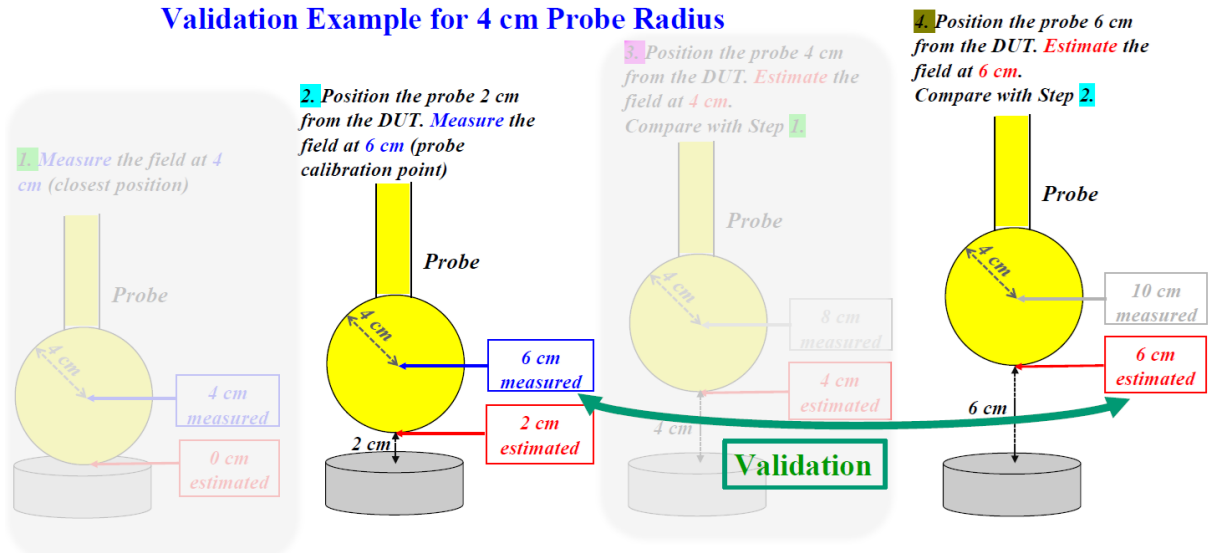


#### Description of the Validation Example for 4 cm Probe Radius

- Assume that  $R=4$  cm. The field at 0 cm can only be estimated, but the field at 4 cm is measured exactly (at the center of the probe)
- Move the probe at 2 cm from the surface. The field at 2 cm can still only be estimated, but the field at 6 cm is measured exactly.
- Compare the estimate with the values at the same positions where the field was measured exactly (i.e. 4 cm and 6 cm)
- The difference between measurements and estimates needs to be no more than 30%.
- The validation of the estimates needs to be for the two closest points to the coil, but at least 2 cm apart (in this case they are). This is to avoid a validation at, say 2 cm and another on at 2.1 cm, that is essentially a repetition.

6) According to Calibration information and specification about EHP-200A Probe, the probe's sensitive elements center are 8mm below the external surface, and the dimensions is 92\*92\*109mm, so the actual 0cm field strengths need to be estimated for the positions that are not reachable, only the result of test distance 2cm~20cm was measured value. The Extrapolated Value Calculation Method is described below.


|  | Length (mm) | Width (mm) | Height (mm) |
|---|-------------|------------|-------------|
|   | 109         | 92         | 92          |

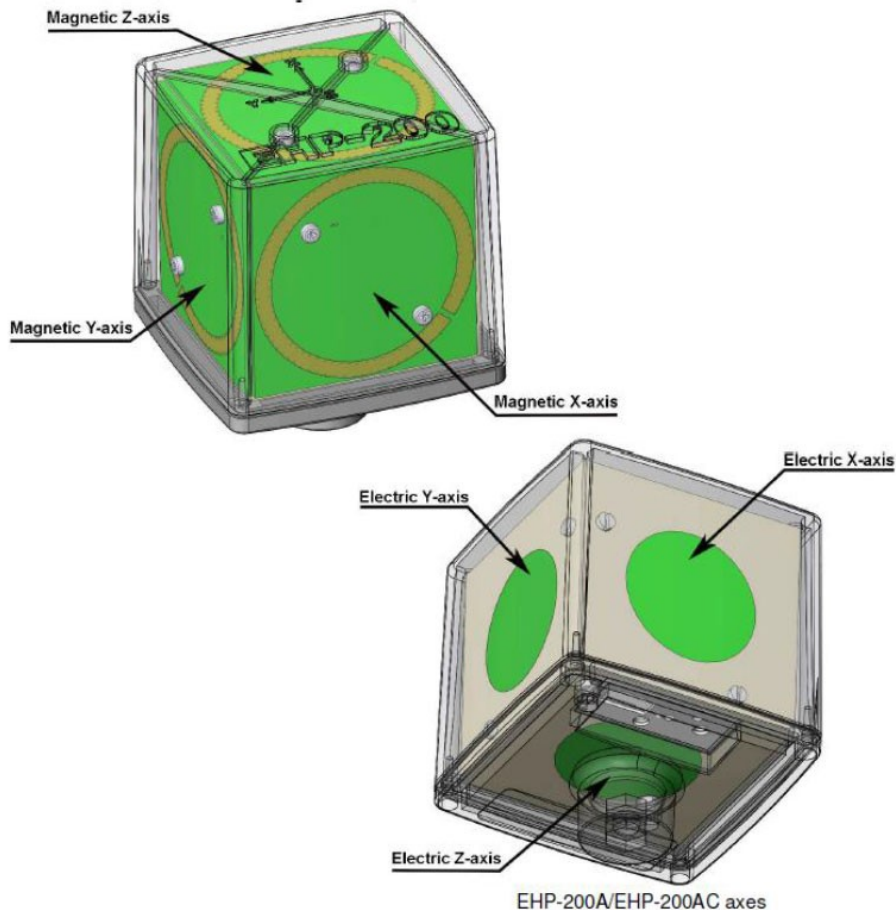

The sensitive elements are located approximately 8 mm below the external surface

Estimated method for portable RF Exposure condition:


We use Biot-Savart formula theory to estimate the strength of the magnetic field that the measuring instrument cannot measure. According to Biot-Savart formula:

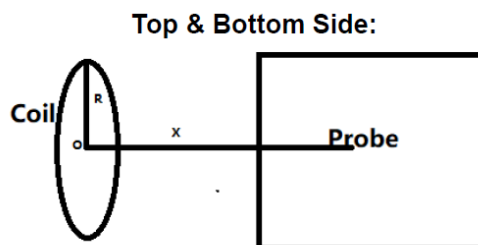

$$B = \frac{\mu_0 * I * N * R^2}{2 * (R^2 + x^2)^{3/2}}$$



Front, left, right & rear Side:

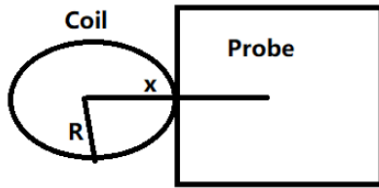

$$B = \frac{\mu_0 * I * N}{2 * x}$$

Where:

B: means H-field value.

$\mu_0$ : space permeability;  $\mu_0 = 4\pi * 10^{-7}$ :

I: A current element passing through a coil;

R: means the Radius of coil;



Test Distance: The distance from the sensing element of the probe to the edge of the device surface

x: means the center of the coil to the sensing elements of the probe. (For top & bottom side: x=test distance.

For other side: x=test distance +R)

N: Number of turns.

The conditions of EUT:

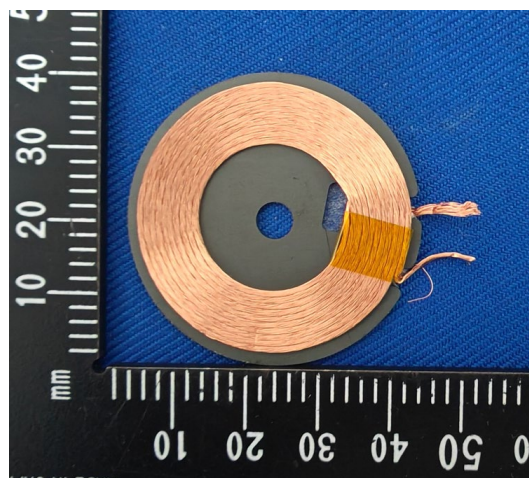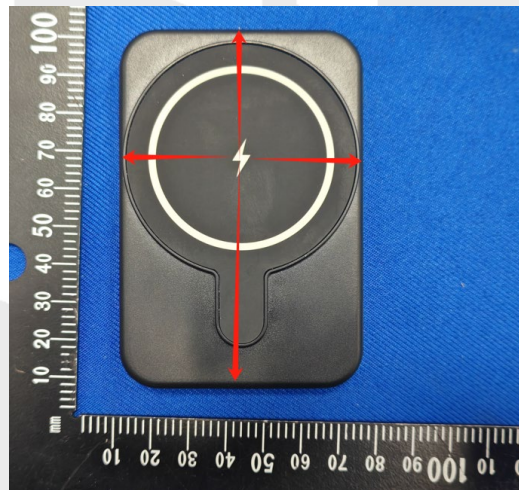

N=10

**For validation purposes:**

If the value to show a **30% agreement** between the model and the (E-and/or H-Field) probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.

**Validation:**

| Magnetic Field Emissions |        |        |        |        |        |        |                       |
|--------------------------|--------|--------|--------|--------|--------|--------|-----------------------|
| Test Distance (cm)       | Top    | Bottom | Front  | Rear   | Left   | Right  | Conclusion            |
| 2cm(estimated) (A/m)     | 0.3673 | 0.2724 | 0.2419 | 0.2533 | 0.1749 | 0.2784 | Compliance within 30% |
| 2cm(measured) (A/m)      | 0.4377 | 0.3319 | 0.2651 | 0.2834 | 0.1812 | 0.2979 |                       |
| Agreement (%)            | 17.49  | 19.69  | 9.15   | 11.22  | 3.54   | 6.77   |                       |

| Magnetic Field Emissions |        |        |        |        |        |        |                       |
|--------------------------|--------|--------|--------|--------|--------|--------|-----------------------|
| Test Distance (cm)       | Top    | Bottom | Front  | Rear   | Left   | Right  | Conclusion            |
| 4cm(estimated) (A/m)     | 0.2313 | 0.1985 | 0.1919 | 0.2188 | 0.1574 | 0.2352 | Compliance within 30% |
| 4cm(measured) (A/m)      | 0.2513 | 0.2276 | 0.2272 | 0.2318 | 0.1627 | 0.2516 |                       |
| Agreement (%)            | 8.29   | 13.66  | 16.85  | 5.77   | 3.31   | 6.74   |                       |

**Note:**

1. The percent ratio of agreement is the difference between the estimated and measured values divided by the average of the estimated and measured values.
2. EUT is a loop/coil emitting structure, so E-field not required. Just record the H-field value.

## 5.5 Evaluation Result

Test Condition: Test Mode 10 operating with client device (1% battery status of client device)

| Distance<br>(cm) | H-Field Results (A/m) |        |        |        |        |        | Limit<br>(A/m) | Conclusion |
|------------------|-----------------------|--------|--------|--------|--------|--------|----------------|------------|
|                  | Top                   | Bottom | Left   | Right  | Front  | Back   |                |            |
| 0                | 0.6255                | 0.4838 | 0.3151 | 0.3229 | 0.2494 | 0.3400 | 1.63           | Compliance |
| 2                | 0.4377                | 0.3319 | 0.2651 | 0.2834 | 0.1812 | 0.2979 | 1.63           | Compliance |
| 4                | 0.2513                | 0.2276 | 0.2272 | 0.2318 | 0.1627 | 0.2516 | 1.63           | Compliance |
| 6                | 0.2093                | 0.1835 | 0.1607 | 0.1802 | 0.1431 | 0.2148 | 1.63           | Compliance |
| 8                | 0.1767                | 0.1537 | 0.1291 | 0.1449 | 0.1212 | 0.1657 | 1.63           | Compliance |
| 10               | 0.1678                | 0.1493 | 0.1019 | 0.1157 | 0.0735 | 0.1434 | 1.63           | Compliance |
| 12               | 0.1641                | 0.1435 | 0.0844 | 0.0939 | 0.0626 | 0.1221 | 1.63           | Compliance |
| 14               | 0.1579                | 0.1347 | 0.0683 | 0.0752 | 0.0534 | 0.1034 | 1.63           | Compliance |
| 16               | 0.1526                | 0.1251 | 0.0547 | 0.0628 | 0.0377 | 0.0755 | 1.63           | Compliance |
| 18               | 0.1486                | 0.1203 | 0.0463 | 0.0539 | 0.0286 | 0.0639 | 1.63           | Compliance |
| 20               | 0.1435                | 0.1187 | 0.0375 | 0.0468 | 0.0145 | 0.0563 | 1.63           | Compliance |



ANNEX A TEST SETUP PHOTOS

**PHOTO 1**


Test Position: Top  
Distance: 0cm



**PHOTO 2**



**PHOTO 3**

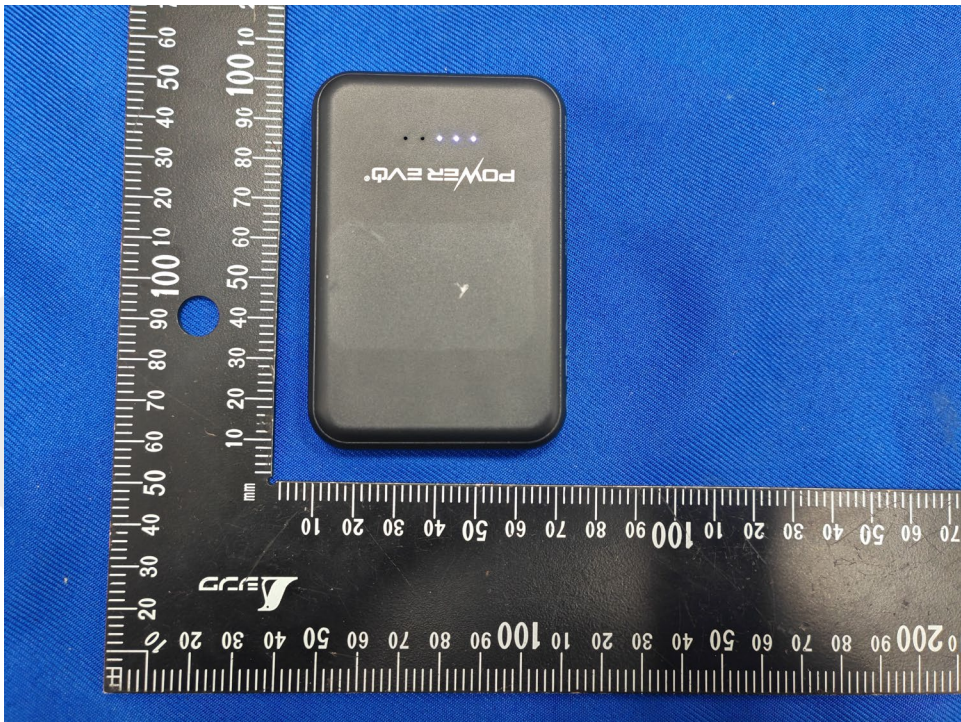

## STATEMENT

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--- End of Report ---