



## **REGULATORY COMPLIANCE TEST REPORT**

**FCC Part 15 Subpart C 15.250**

**Report No.: CATA04-U14 Rev A**

**Company:** Catapult Sports Pty Ltd

**Model Name:** Vector Receiver (VA7601)

## REGULATORY COMPLIANCE TEST REPORT

**Company:** Catapult Sports Pty Ltd

**Model Name:** Vector Receiver (VA7601)

**To:** FCC CFR 47 Part 15 Subpart C 15.250

**Test Report Serial No.:** CATA04-U14 Rev A

This report supersedes: NONE

**Applicant:** Catapult Sports Pty Ltd Company  
75-83 High St Prahran  
Melbourne, Victoria 3181  
Australia

**Issue Date:** 1st April 2022

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
575 Boulder Court  
Pleasanton California 94566  
USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**

## Table of Contents

<b>1. ACCREDITATION, LISTINGS &amp; RECOGNITION .....</b>	<b>4</b>
1.1. TESTING ACCREDITATION .....	4
1.2. RECOGNITION .....	5
1.3. PRODUCT CERTIFICATION .....	6
<b>2. DOCUMENT HISTORY .....</b>	<b>7</b>
<b>3. TEST RESULT CERTIFICATE .....</b>	<b>8</b>
<b>4. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>	<b>9</b>
4.1. Normative References .....	9
4.2. Test and Uncertainty Procedure .....	10
<b>5. PRODUCT DETAILS AND TEST CONFIGURATIONS .....</b>	<b>11</b>
5.1. Technical Details .....	11
5.2. Scope Of Test Program .....	12
5.3. Equipment Model(s) and Serial Number(s) .....	13
5.4. Antenna Details .....	13
5.5. Cabling and I/O Ports .....	13
5.6. Test Configurations .....	13
5.7. Equipment Modifications .....	13
5.8. Deviations from the Test Standard .....	13
<b>6. TEST SUMMARY .....</b>	<b>14</b>
<b>7. TEST EQUIPMENT CONFIGURATION(S) .....</b>	<b>15</b>
7.1. Conducted Test Setup .....	15
7.2. Radiated Emissions - 3m Chamber .....	16
<b>8. MEASUREMENT AND PRESENTATION OF TEST DATA .....</b>	<b>19</b>
<b>9. TEST RESULTS .....</b>	<b>20</b>
9.1. WB Bandwidth .....	20
9.2. Transmit Power .....	22
9.3. Peak Power Density .....	24
9.4. Transmitter Spurious Band Emissions .....	26
9.4.1. <i>Transmitter Spurious Emissions</i> .....	28
9.4.2. <i>GPS Band Emissions</i> .....	39

## 1. ACCREDITATION, LISTINGS & RECOGNITION

### 1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2017. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



## 1.2. RECOGNITION

MiCOM Labs, Inc is widely recognized for its wireless testing and certification capabilities. In addition to being recognized for Testing and Certification under Phase 2 Mutual Recognition Agreements (MRA) with Canada, Europe, United Kingdom and Japan, our international recognition includes Conformity Assessment Body (CAB) designation status under agreements with Asia Pacific (APEC) MRA Phase 1 countries giving acceptance of MiCOM test reports. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	MRA Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Test Site Designation #: US1084
Canada	Industry Canada (ISED)	FCB	APEC MRA 2	US0159 Test Company #: 4143A
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	Japan MRA 2	RCB 210
	Japan Approvals Institute for Telecommunication Equipment (JATE)			
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA 2	NB 2280
United Kingdom	Department for Business, Energy & Industrial Strategy (BEIS)	AB	UK MRA 2	AB 2280
Mexico	Instituto Federal de Telecomunicaciones (IFT)	CAB	Mexico MRA 1	US0159
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)			
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)			
Singapore	Infocomm Development Authority (IDA)			
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)			
Vietnam	Ministry of Communication (MIC)			

TCB- Telecommunications Certification Bodies (TCB)

FCB – Foreign Certification Body

CAB – Conformity Assessment Body

NB – Notified Body;

AB – Approved Body

MRA – Mutual Recognition Agreement

### *MRA Phases*

*Phase I - recognition for product testing*

*Phase II – recognition for both product testing and certification*

### 1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)  
Industry Canada – Certification Body, CAB Identifier – US0159  
Europe – Notified Body (NB), NB Identifier - 2280  
UK – Approved Body (AB), AB Identifier - 2280  
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

## 2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	31st March 2022	Draft report for client review.
Rev A	1 <sup>st</sup> April 2022	Initial release.

In the above table the latest report revision will replace all earlier versions.



### 3. TEST RESULT CERTIFICATE

<b>Manufacturer:</b> Catapult Sports Pty Ltd 75-83 High St Prahran Melbourne, Victoria 3181 Australia	<b>Tested By:</b> MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
<b>Model:</b> Vector Receiver (VA7601)	<b>Telephone:</b> +1 925 462 0304
<b>Equipment Type:</b> Hand Held Communications Device	<b>Fax:</b> +1 925 462 0306
<b>S/N's:</b> None Provided	
<b>Test Date(s):</b> 25 <sup>th</sup> -26 <sup>th</sup> October 2021, 22 <sup>nd</sup> March 2022	<b>Website:</b> www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart C 15.250	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

#### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



  
\_\_\_\_\_  
Graeme Grieve  
Quality Manager MiCOM Labs, Inc.

  
\_\_\_\_\_  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.



## **4. REFERENCES AND MEASUREMENT UNCERTAINTY**

### **4.1. Normative References**

REF.	PUBLICATION	YEAR	TITLE
I	15.250	Feb 2005	Operation of wideband systems within the band 5925-7250 MHz.
II	A2LA	5 <sup>th</sup> Oct 2020	R105 - Requirement's When Making Reference to A2LA Accreditation Status
III	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
IV	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
V	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
VI	M 3003	Edition 3 Nov.2012	Expression of Uncertainty and Confidence in Measurements
VII	FCC 47 CFR Part 2.1033	2016	FCC requirements and rules regarding photographs and test setup diagrams.

## **4.2. Test and Uncertainty Procedure**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

## 5. PRODUCT DETAILS AND TEST CONFIGURATIONS

### 5.1. Technical Details

Details	Description
Purpose:	Test of the Catapult Sports Pty Ltd Vector Receiver VA7601 to FCC Part 15 Subpart 15.250.
Applicant:	Catapult Sports Pty Ltd 75-83 High St Prahran Melbourne, Victoria 3181 Australia
Manufacturer:	As applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	CATA04-U14 Rev A
Date EUT received:	25 <sup>th</sup> October 2021
Standard(s) applied:	FCC Part 15 Subpart C 15.250
Dates of test (from - to):	25 <sup>th</sup> -26 <sup>th</sup> October 2021, 22 <sup>nd</sup> March 2022
No of Units Tested:	1
Product Family Name:	Vector Receiver
Model(s):	VA7601
Location for use:	Indoors and Outdoors
Declared Frequency Range(s):	6489.60 GHz;
Type of Modulation:	BPM/BPSK
EUT Modes of Operation:	WB
Declared Nominal Output Power (dBm):	-22 dBm
Rated Input Voltage and Current:	POE: 48Vdc 350mA DC 3.7- 36V 2A Max, 12V Nominal
Operating Temperature Range:	-20C to +85C
Equipment Dimensions:	175 x 130 x 59.5 mm
Weight:	520 g
Hardware Rev:	MP
Software Rev:	8.1.0
Product Application:	Hand Held Communications Device

## **5.2. Scope Of Test Program**

### **Catapult Sports Pty Ltd Company Vector Receiver (VA7601)**

The scope of the test program was to test the Catapult Sports Pty Ltd Company VA7601 in the frequency range 5925 - 7250 MHz for compliance against the following specification:-

#### **FCC CFR 47 Part 15 Subpart C 15.250**

Operation of wideband systems within the band 5925 -7250 MHz

### 5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description	Manufacturer	Model No.	Serial No.
EUT	Hand Held Communications Device	Catapult Sports Pty Ltd	VA7601	None Provided

### 5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	Catapult Sports Pty Ltd	PCB	Omni	6.00	--	--	--	3100-10000
BF Gain - Beamforming Gain Dir BW - Directional BeamWidth X-Pol - Cross Polarization								

### 5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# of Ports	Screened	Connector Type	Data Type	Data Rate(s)
USB	5m	1	Yes	USB	Digital	Unknown

### 5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
5925-7250 MHz				
WB	--	--	6489.60	--

### 5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

### 5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE


## 6. TEST SUMMARY

### List of Measurements

Test Header	Result	Data Link
WB Bandwidth	Complies	<a href="#">View Data</a>
Peak Power	Complies	<a href="#">View Data</a>
Peak Power Density	Complies	<a href="#">View Data</a>
Spurious Radiated Emissions	Complies	<a href="#">View Data</a>
Spurious Radiated Emissions in GPS Bands	Complies	<a href="#">View Data</a>
Shutdown Timing Requirements	Complies	<a href="#">View Data</a>
Comments: None		

## 7. TEST EQUIPMENT CONFIGURATION(S)

### 7.1. Conducted Test Setup

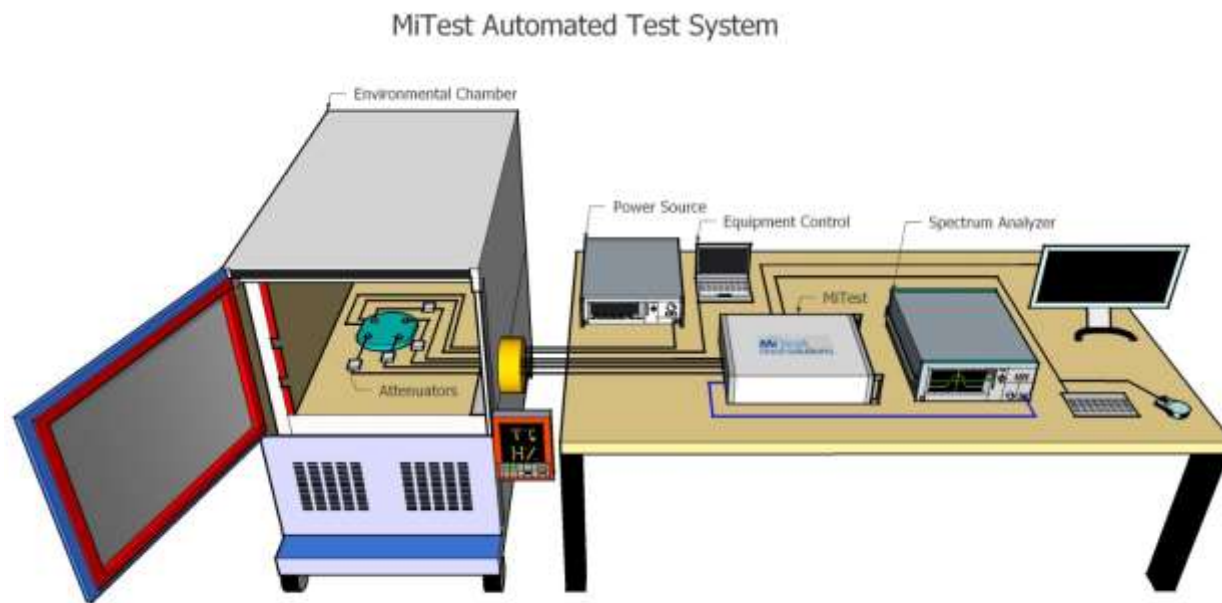

A full system calibration was performed on the test station and any resulting system losses (or gains) were considered in the production of all final measurement data.


Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
249	Thermocouple; Resistance Thermometer	Thermotronics	GR2105-02	9340 #2	30 Oct 2022
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	8 Oct 2022
398	MiTest RF Conducted Test Software	MiCOM	MiTest ATS	Version 4.2.3.0	Not Required
405	DC Power Supply 0-60V	Agilent	6654A	MY4001826	Cal when used
408	USB to GPIB interface	National Instruments	GPIB-USB HS	14C0DE9	Not Required
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2023
75	Environmental Chamber	Theratron	SE-300-2-2	27946	20 Feb 2023




## 7.2. Radiated Emissions - 3m Chamber

The following tests were performed using the radiated test set-up shown in the diagram below. Radiated emissions above and below 1GHz.

Radiated Emissions Above 1GHz Test Setup

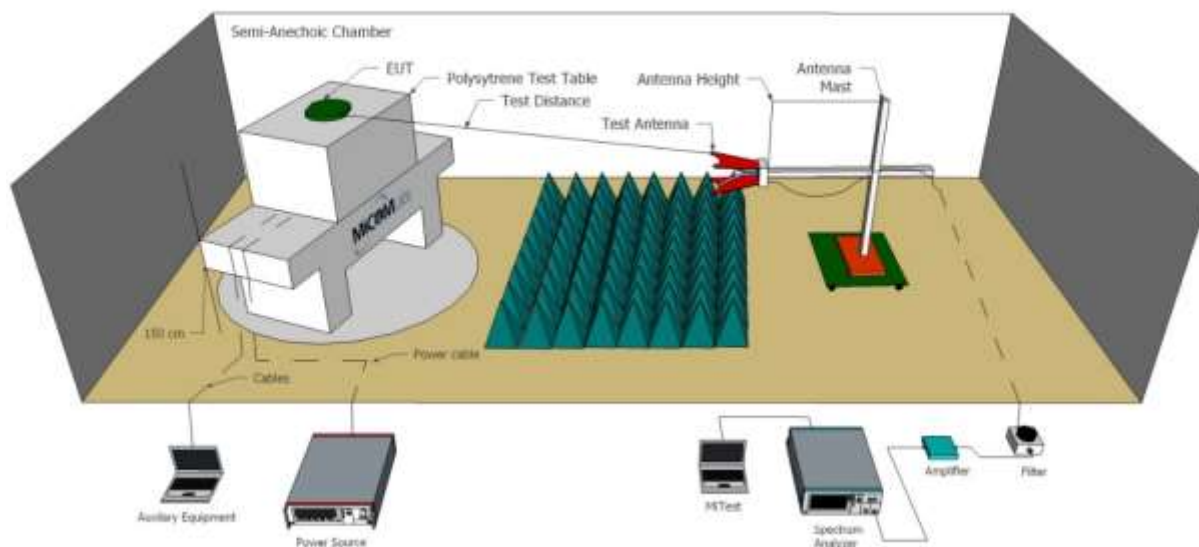

Radiated Emissions Below 1GHz Test Setup

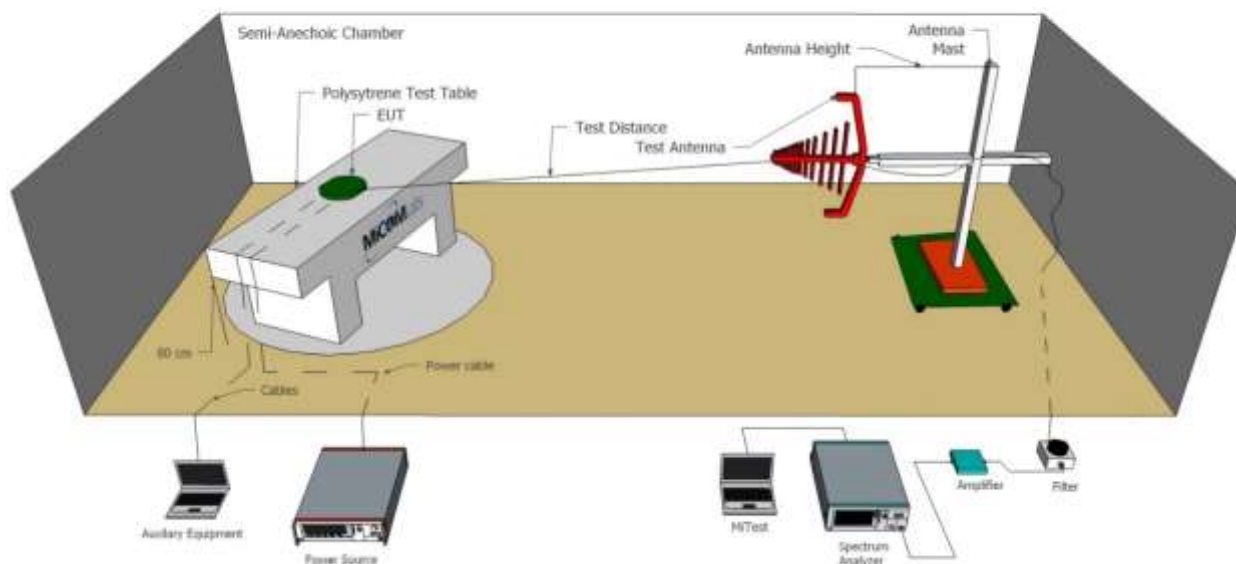

A full system calibration was performed on the test station and any resulting system losses (or gains) were considered in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	8 Oct 2022
298	3M Radiated Emissions Chamber Maintenance Check	MiCOM	3M Chamber	298	24 Jul 2022
330	Variac 0-280 Vac	Staco Energy Co	3PN1020B	0546	Cal when used
336	Active loop Ant 10kHz to 30 MHz	EMCO	EMCO 6502	00060498	29 Nov 2022
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	29 Sep 2023
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	29 Sep 2022
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	6 Oct 2022
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	27 Oct 2022
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	30 Sep 2023
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	2 Nov 2022
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	27 Oct 2022
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	27 Oct 2022
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	27 Oct 2022
466	Low Pass Filter DC-1500 MHz	Mini-Circuits	NLP-1750+	VUU10401438	6 Oct 2022
476	Low Pass dc-2200MHz	Mini Circuits	15542 NLP-	VUU13801345	6 Oct 2022

	filter		2400+		
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	23 Jun 2022
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	23 Jun 2022
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2023
554	Precision SMA Cable	Fairview Microwave	SCE18060101-400CM	554	23 Jun 2022
555	Rhode & Schwarz Receiver (Firmware Version : 2.00 SP1)	Rhode & Schwarz	ESW 44	101893	28 Jun 2023
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used

## 8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

## 9. TEST RESULTS


### 9.1. WB Bandwidth

Conducted Test Conditions for WB Bandwidth			
Standard:	FCC CFR 47 Part 15 Subpart C 15.250	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	WB Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	ANSI C63.10 Section 10.1; 5.1(a)(b) 15.250(a)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		
<b>Test Procedure for WB Bandwidth Measurement</b> The spectrum analyzer is configured with a 1 MHz RBW and RMS trace capture. In order to clearly identify the required limits and thus measurement procedures it is essential to define the operating bandwidth of the WB DUT, the operating bandwidth of the WB DUT test shall be the -10 dBc bandwidth of the intended WB signal under normal operational conditions. The Resolution Bandwidth was set to 1MHz RBW IAW ANSI C63.10.  Test configuration and setup used for the measurement was per the Radiated Test Set-up section specified in this document.			

### Equipment Configuration for WB Bandwidth

<b>Variant:</b>	WB	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	-	<b>Antenna Gain (dBi):</b>	6.0
<b>Modulation:</b>	--	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

Test Frequency	Measured 10 dB Bandwidth (MHz)	10 dB Bandwidth (MHz)			
MHz	Port A	Highest	Lowest		
6489.60	761.68	761.68	761.68		

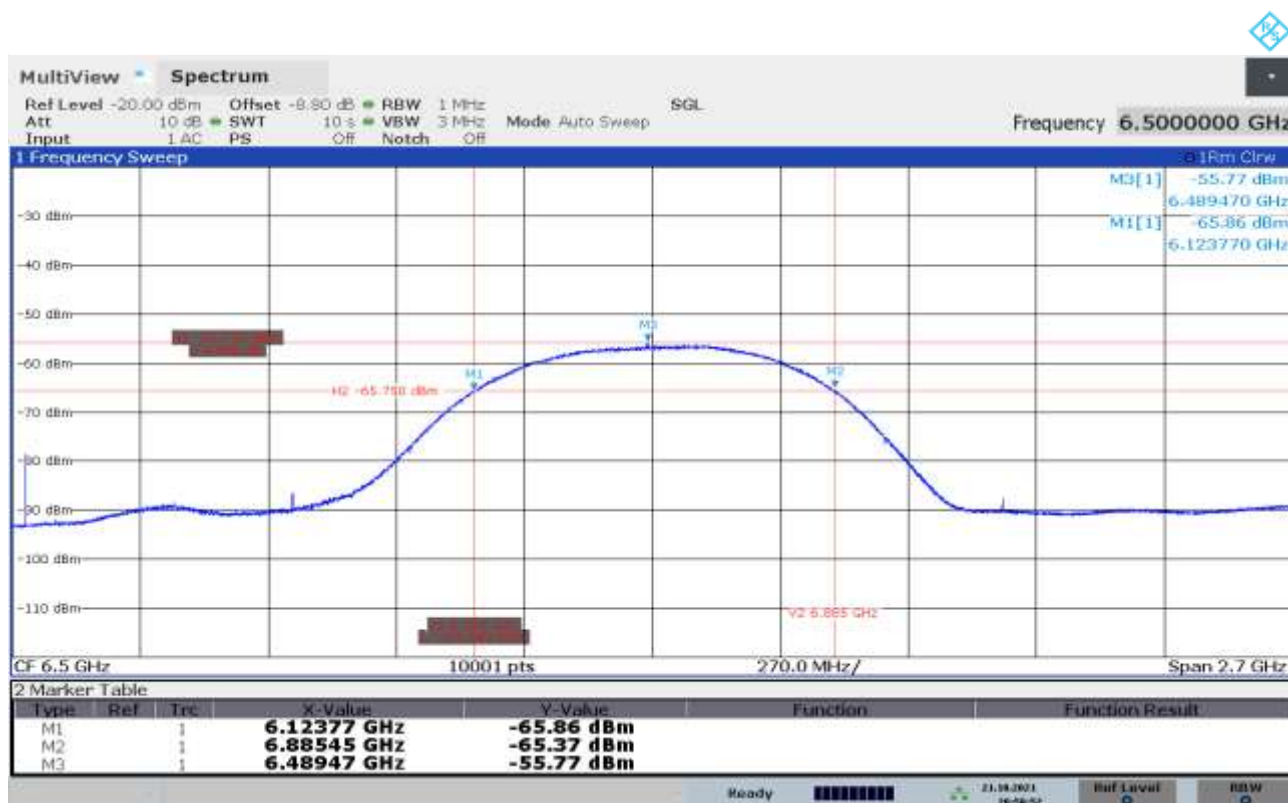

Date: 21.OCT.2021 20:58:53

### Traceability to Industry Recognized Test Methodologies

<b>Work Instruction:</b>	WI-03 MEASURING RF SPECTRUM MASK
<b>Measurement Uncertainty:</b>	±2.81 dB

The above values are representative of the worst-case value between polarities and based on the power measurements.

## 9.2. Transmit Power

Conducted Test Conditions for Maximum Radiated Output Power			
Standard:	FCC CFR 47 Part 15 Subpart C 15.250	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Radiated Emissions WB Transmission	Rel. Humidity (%):	32 - 45
Standard Section(s):	ANSI C63.10 Section 10.3.5; 5.3.1; Section 4 Annex 15.250 (d)(1)	Pressure (mBars):	999 - 1001
Reference Document(s):	None		
<b>Test Procedure for WB Transmission</b>  Testing was performed under ambient conditions at nominal voltage.  Test configuration and setup used for the measurement was per the Radiated Test Set-up section specified in this document.			
<b>Operating Frequency Band:</b> 5925-7250 MHz			
<b>Limits Maximum EIRP (dBm)</b>			
Frequency (MHz)	EIRP Limit (dBm)	EIRP at 3 Meters (dBuv/m)	
5925-7250	-41.3	53.9	




### Equipment Configuration for RF Output Power

<b>Variant:</b>	WB	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	-	<b>Antenna Gain (dBi):</b>	2.0
<b>Modulation:</b>	-	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

### Test Measurement Results

Test Frequency MHz	Measured Radiated Output Power (dBuV/m)	EIRP + Duty Cycle Correction Factor (99%)	Limit (dBuV/n)	Margin (dB)	EUT Power Setting
6489.60	53.70	54.70	53.9	-0.99	16.0

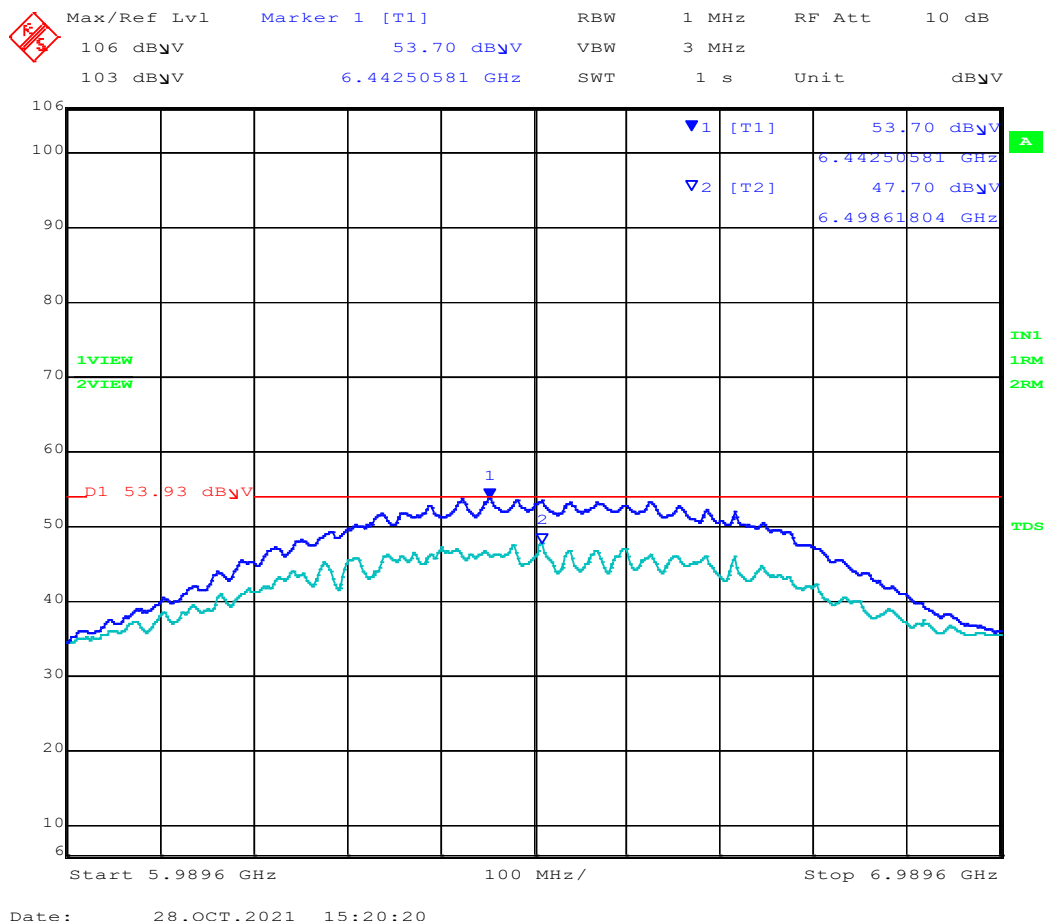

### Traceability to Industry Recognized Test Methodologies

<b>Work Instruction:</b>	WI-01 MEASURING RF OUTPUT POWER
<b>Uncertainty:</b>	±1.33 dB

### 9.3. Peak Power Density


Test Conditions for Maximum Peak Power Density			
Standard:	FCC CFR 47 Part 15 Subpart C 15.250	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Radiated Emissions WB Transmission	Rel. Humidity (%):	32 - 45
Standard Section(s):	ANSI C63.10 Section 10.3.6; 5.3.1; Section 4 Annex 15.250 (d)(3)	Pressure (mBars):	999 - 1001
Reference Document(s):	None		
<b>Test Procedure for WB Transmission</b>  Testing was performed under ambient conditions at nominal voltage.  Test configuration and setup used for the measurement was per the Radiated Test Set-up section specified in this document. Supporting KDB's referenced below.  <b>Operating Frequency Band:</b> 5925-7250 MHz  <b>Limits Maximum EIRP (dBm)</b>			
Frequency (MHz)	EIRP Limit (dBm/50MHz)	EIRP Limit (dBm/1MHz)	
5925-7250	0	-34	

### Equipment Configuration for Peak Power Density

<b>Variant:</b>	WB	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	-	<b>Antenna Gain (dBi):</b>	6.0
<b>Modulation:</b>	--	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

### Test Measurement Results

Test Frequency MHz	Measured Peak Power Density (dBm)	EIRP + Duty Cycle Correction Factor (99%)	Limit (dBm)	Margin (dB)	EUT Power Setting
6489.60	-21.09	-15.09	0.0	-15.09	16.0

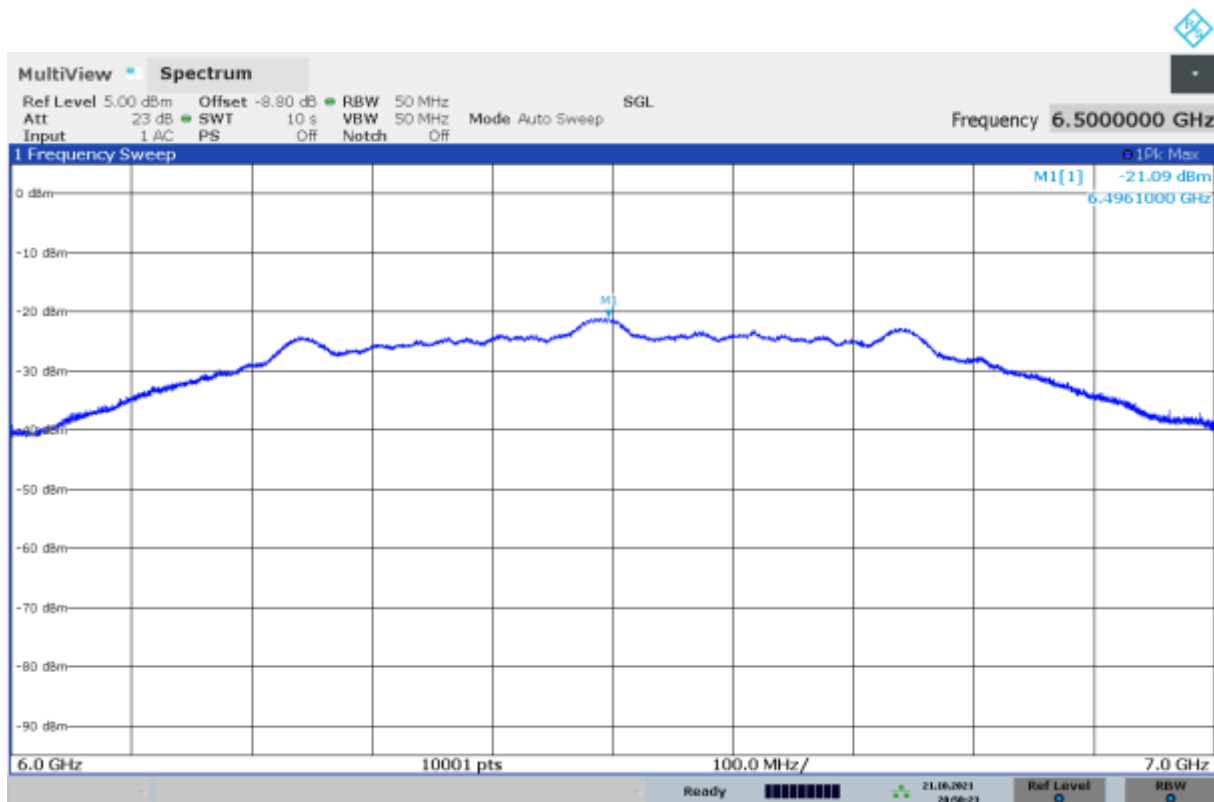

Date: 21.OCT.2021 20:50:24

### Traceability to Industry Recognized Test Methodologies

<b>Work Instruction:</b>	WI-01 MEASURING RF OUTPUT POWER
<b>Uncertainty:</b>	±1.33 dB

## 9.4. Transmitter Spurious Band Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions			
<b>Standard:</b>	FCC CFR 47 Part 15 Subpart C 15.250	<b>Ambient Temp. (°C):</b>	20.0 - 24.5
<b>Test Heading:</b>	Radiated Spurious Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	ANSI C63.10 Section 10.2 + 10.3; 5.3.1 15.250 (d)(1)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

### Test Procedure for Radiated Spurious and Band-Edge Emissions

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in max hold mode. Depending on the frequency band spanned a notch filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

### Limits for Restricted Bands (15.205, 15.209)

Peak emission: 68.23 dBuV/m

Average emission: 54 dBuV/m

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss

FCC 15.250(d)(1) Measurements made at 1 meter to meet noise floor to limit requirements

Frequency Range		Average Limit	
MHz	MHz	EIRP (dBm)	EIRP at 1 Meters (dBuV/m)
960	1610	-75.30	29.40
1610	1990	-63.40	41.40
1990	3100	-61.30	43.40
3100	5925	-51.30	53.40
5925	7250	-41.30	63.40
5925	10600	-51.30	53.40
10600	18000	-61.30	43.40
18000	40000	-61.3	43.40

Radiated Spurious Emissions in the GPS Bands FCC 15.250 (d)(2)

Frequency Range		Average Limit	
MHz	MHz	EIRP (dBm)	EIRP at 1 Meters (dBuV/m)
1164	1240	-85.3	19.47
1559	1610	-85.3	19.47

50 MHz Peak Emissions 15.250 (d)(3)

There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs and this 50 MHz bandwidth must be contained within the 5925-7250 MHz band. The peak EIRP limit is  $20 \log (RBW/50)$  dBm where RBW is the resolution bandwidth in megahertz that is employed by the measurement instrument. RBW shall not be lower than 1 MHz or greater than 50 MHz. The video bandwidth of the measurement instrument shall not be less than RBW. If RBW is greater than 3 MHz, the application for certification filed with the Commission shall contain a detailed description of the test procedure, calibration of the test setup, and the instrumentation employed in the testing

### 9.4.1. Transmitter Spurious Emissions


#### Equipment Configuration for Radiated Digital Emissions

<b>Antenna:</b>	Integral	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	Not Applicable	<b>Modulation:</b>	-
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	6489.60	<b>Data Rate:</b>	Not Applicable
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

#### Test Measurement Results



Variant: WB, Test Freq: 6489.60 MHz, Power Setting: 16, Duty Cycle (%): 99

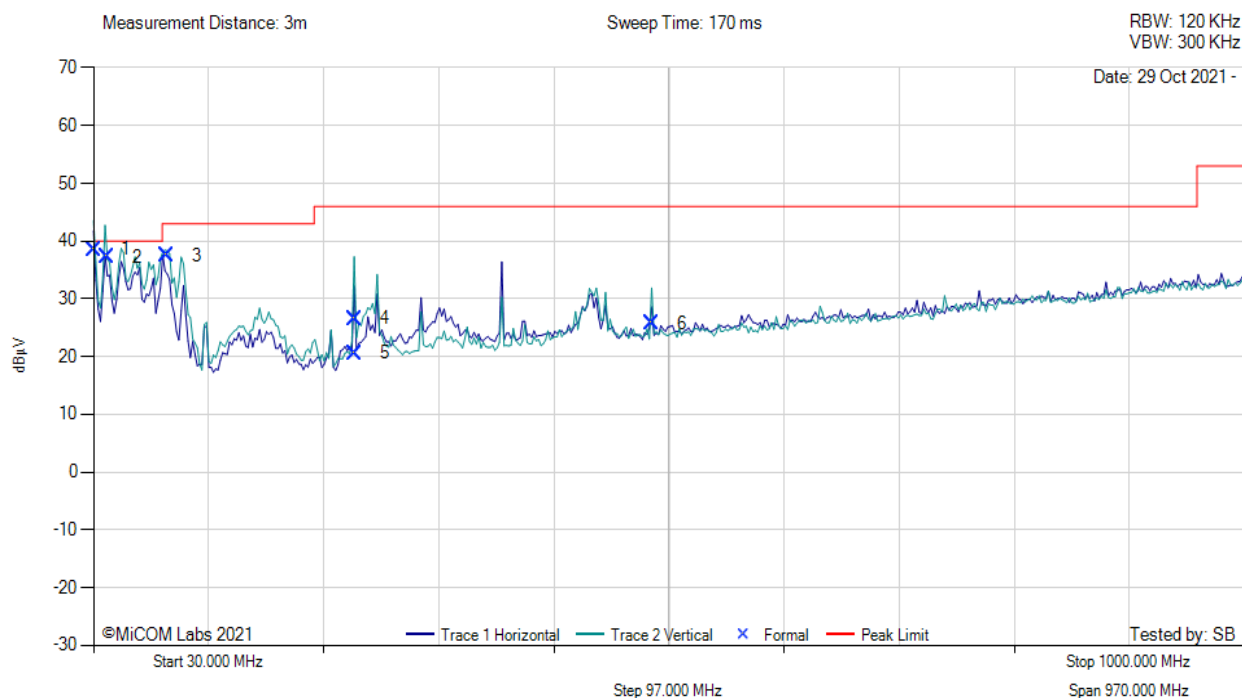

#### 30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	31.02	43.68	3.55	-8.71	38.52	MaxQP	Vertical	98	164	40.0	-1.5	Pass
2	41.03	49.78	3.66	-16.19	37.25	MaxQP	Vertical	98	350	40.0	-2.8	Pass
3	91.52	54.07	4.01	-20.68	37.40	MaxQP	Vertical	100	189	43.0	-5.6	Pass
4	250.05	38.08	4.72	-16.22	26.58	Peak (Scan)	Vertical	100	0	47.0	-20.4	Pass
5	250.10	32.05	4.72	-16.22	20.55	Peak (Scan)	Horizontal	100	0	47.0	-26.5	Pass
6	500.07	30.14	5.59	-9.98	25.75	Peak (Scan)	Vertical	100	0	47.0	-21.3	Pass

### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Integral	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	6.0	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.60	<b>Data Rate:</b>	
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS 960MHz-1.00GHz

Test Freq: 6489.60 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

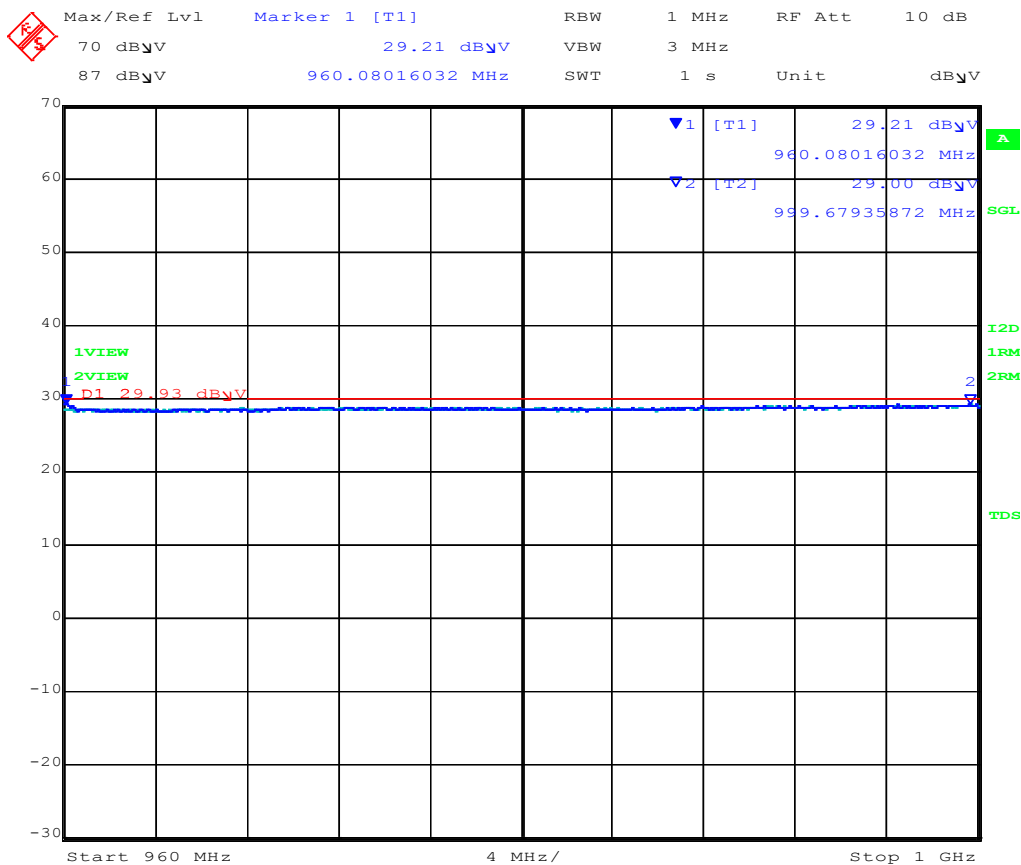

Date: 29.OCT.2021 11:51:11

960.00– 1000.00 MHz									
Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	960.08*	29.21	Average	Horizontal	150	0	29.4	-0.19	Pass
2	999.67*	29.00	Average	Vertical	150	0	29.4	-0.40	Pass

Test Notes: None



### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Integral	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	6.0	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.60	<b>Data Rate:</b>	
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

### Test Measurement Results



### RADIATED SPURIOUS EMISSIONS 1.0-1.61GHz

Test Freq: 6489.60 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

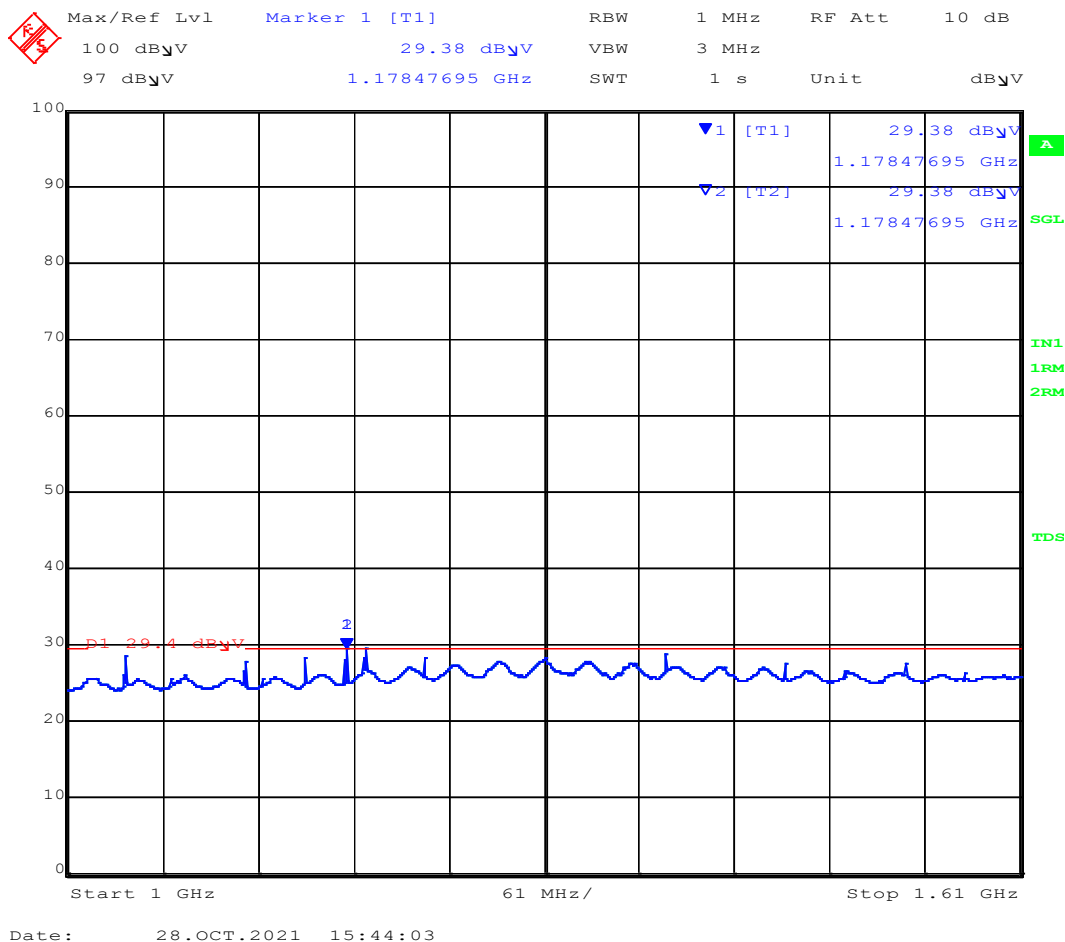

Date: 28.OCT.2021 15:44:03

### 1000.00– 1610.00 MHz

Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1299.4	27.34	Average	Horizontal	150	0	29.4	-2.06	Pass
2	1298.2	27.34	Average	Vertical	150	0	29.4	-2.06	Pass

Test Notes: None

### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Integral	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	6.0	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.60	<b>Data Rate:</b>	
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS 1.61-1.99GHz

Test Freq: 6489.60 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

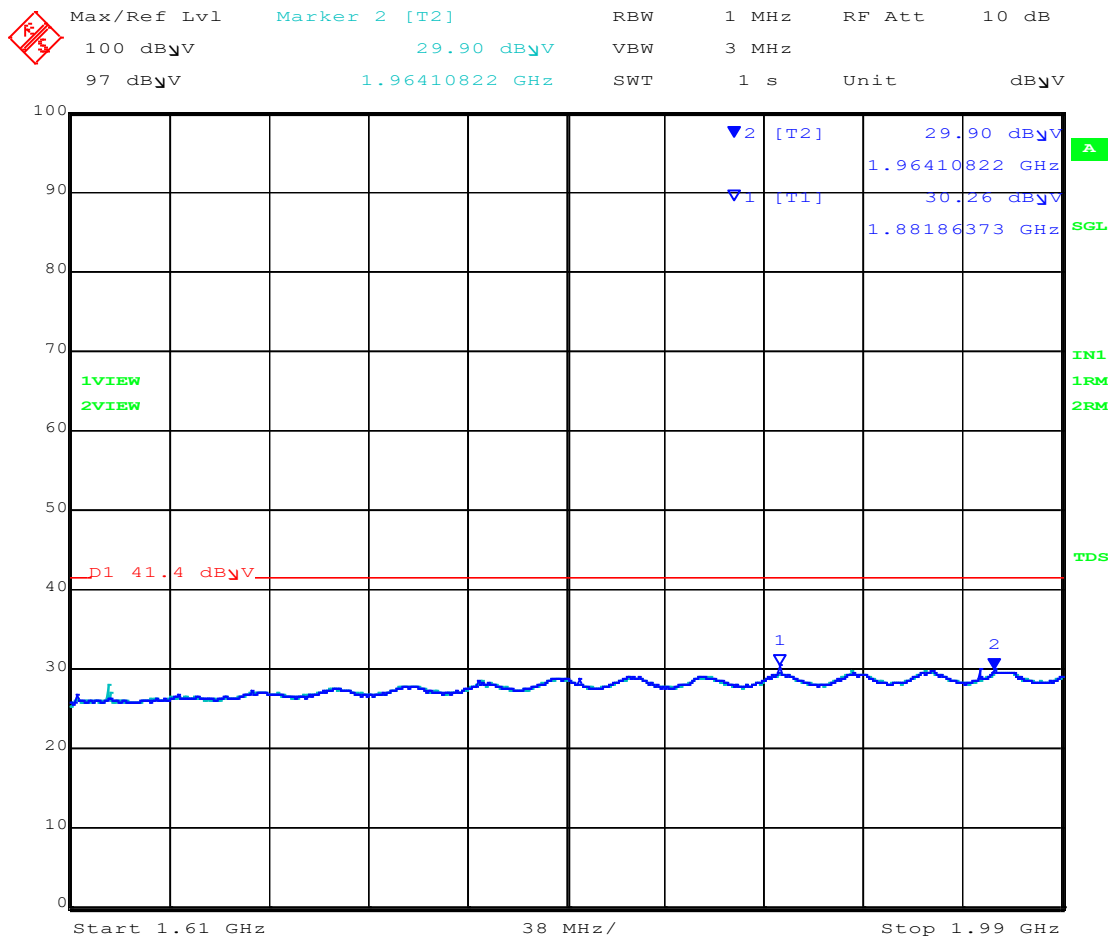

Date: 28.OCT.2021 15:46:26

1610.00 – 1990.00 MHz									
Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1881.86	30.26	Average	Horizontal	150	0	41.40	-11.14	Pass
2	1964.10	29.90	Average	Vertical	150	0	41.40	-11.50	Pass

**Test Notes:** None

### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Integral	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	6.0	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.60	<b>Data Rate:</b>	
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

### Test Measurement Results



### RADIATED SPURIOUS EMISSIONS 1.99-3.1GHz

Test Freq: 6489.60 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

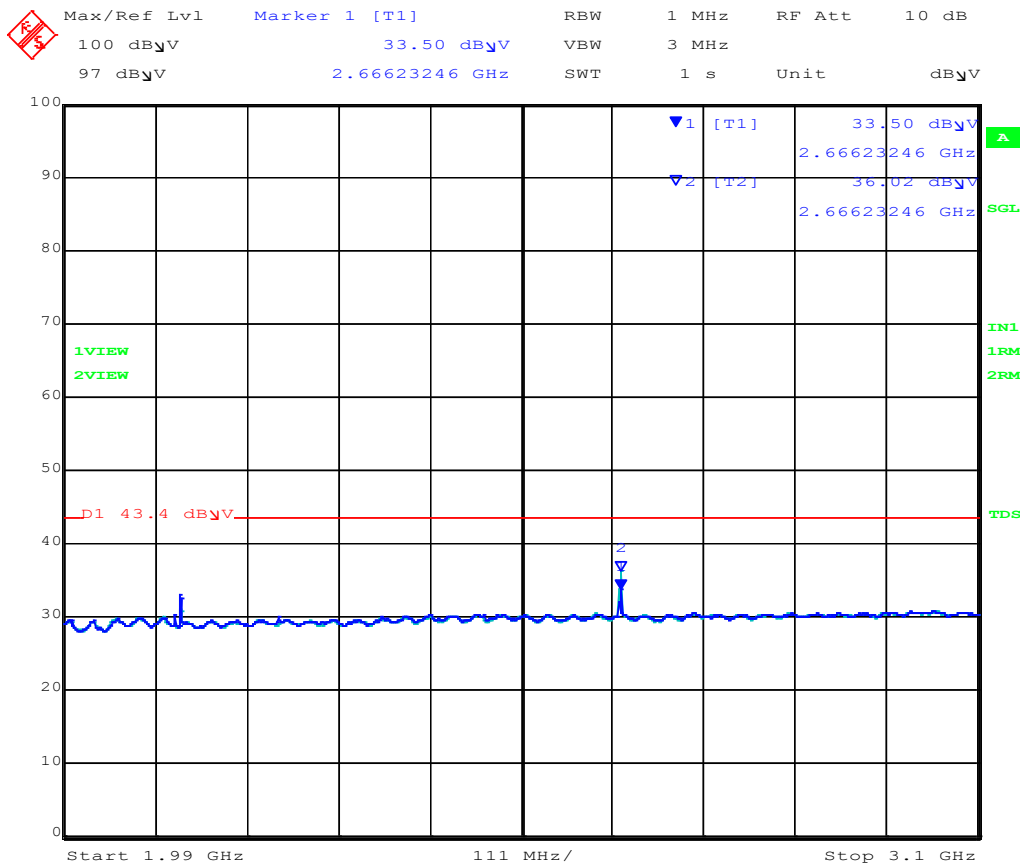

Date: 28.OCT.2021 15:49:44

### 1990.00 – 3100.00 MHz

Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2662.32	33.50	Average	Horizontal	150	0	43.40	-9.90	Pass
2	2666.23	36.02	Average	Vertical	150	0	43.40	-7.38	Pass

Test Notes: None

### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Integral	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	6.0	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.60	<b>Data Rate:</b>	
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

### Test Measurement Results



### RADIATED SPURIOUS EMISSIONS 3.1-5.925GHz

Test Freq: 6489.60 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

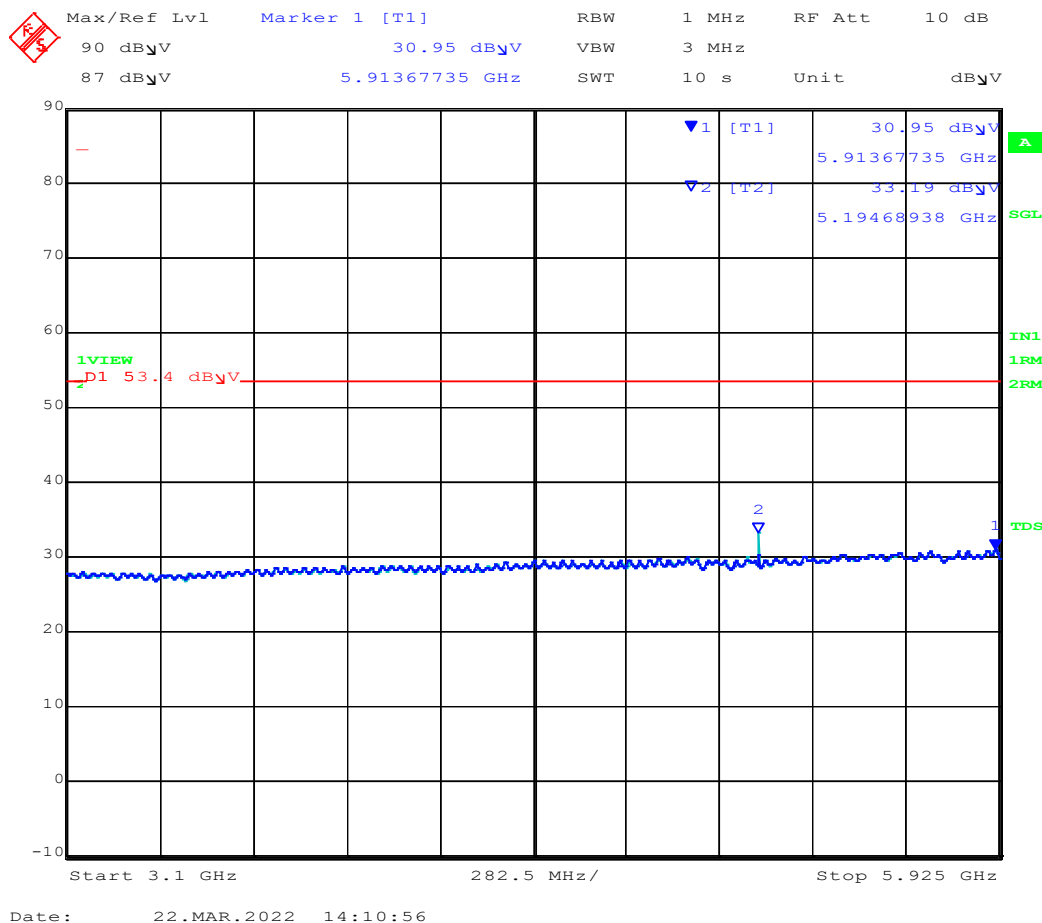

### 3100.00 – 10600.00 MHz

Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5913.67	30.95	Average	Horizontal	150	0	53.4	-22.45	Pass
2	5194.68	33.19	Average	Vertical	150	0	53.4	-20.21	Pass

Test Notes: None

### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Integral	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	6.0	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.60	<b>Data Rate:</b>	
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS 5.925-7.250GHz

Test Freq: 6489.60 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

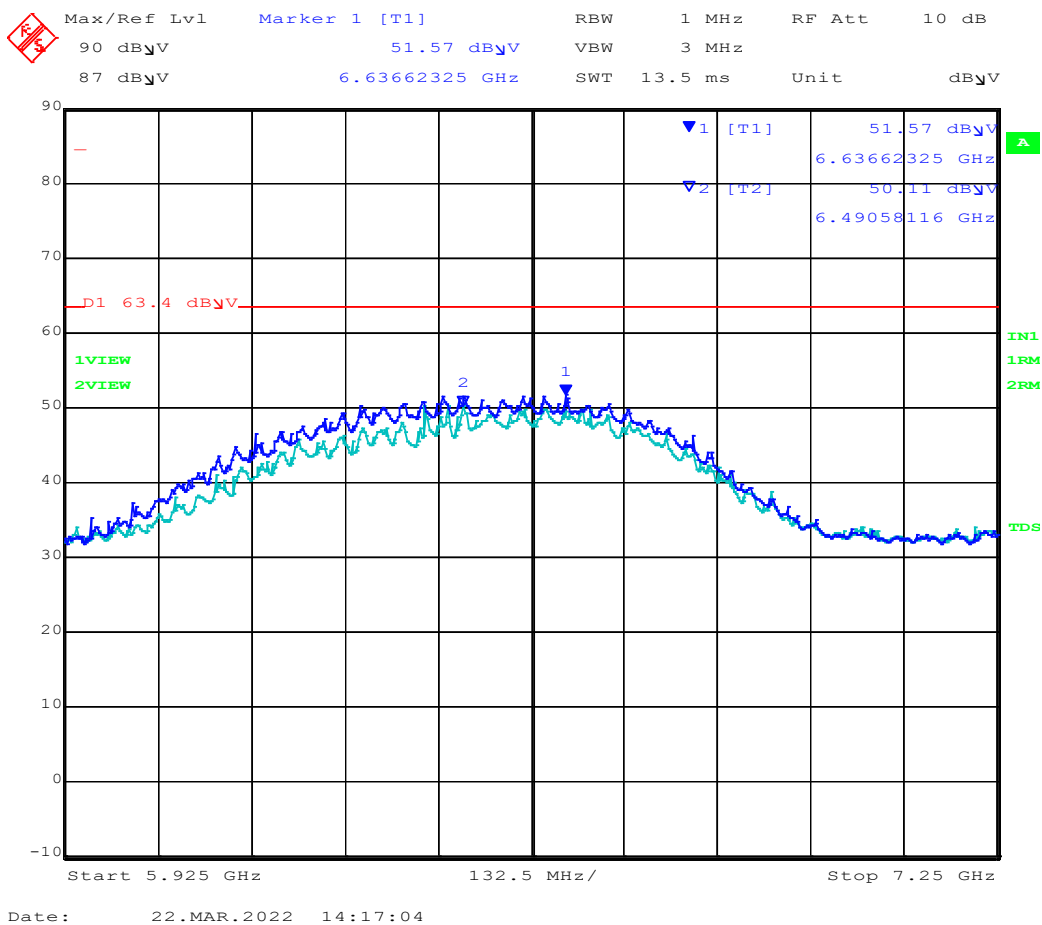

#### 5925.00 – 7250.00 MHz

Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	6636.62	51.57	Average	Horizontal	150	0	63.4	-11.83	Pass
2	6490.58	50.11	Average	Vertical	150	0	63.4	-13.29	Pass

Test Notes: None

### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Integral	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	6.0	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.60	<b>Data Rate:</b>	
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS 7.250-10.600GHz

Test Freq: 6489.60 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

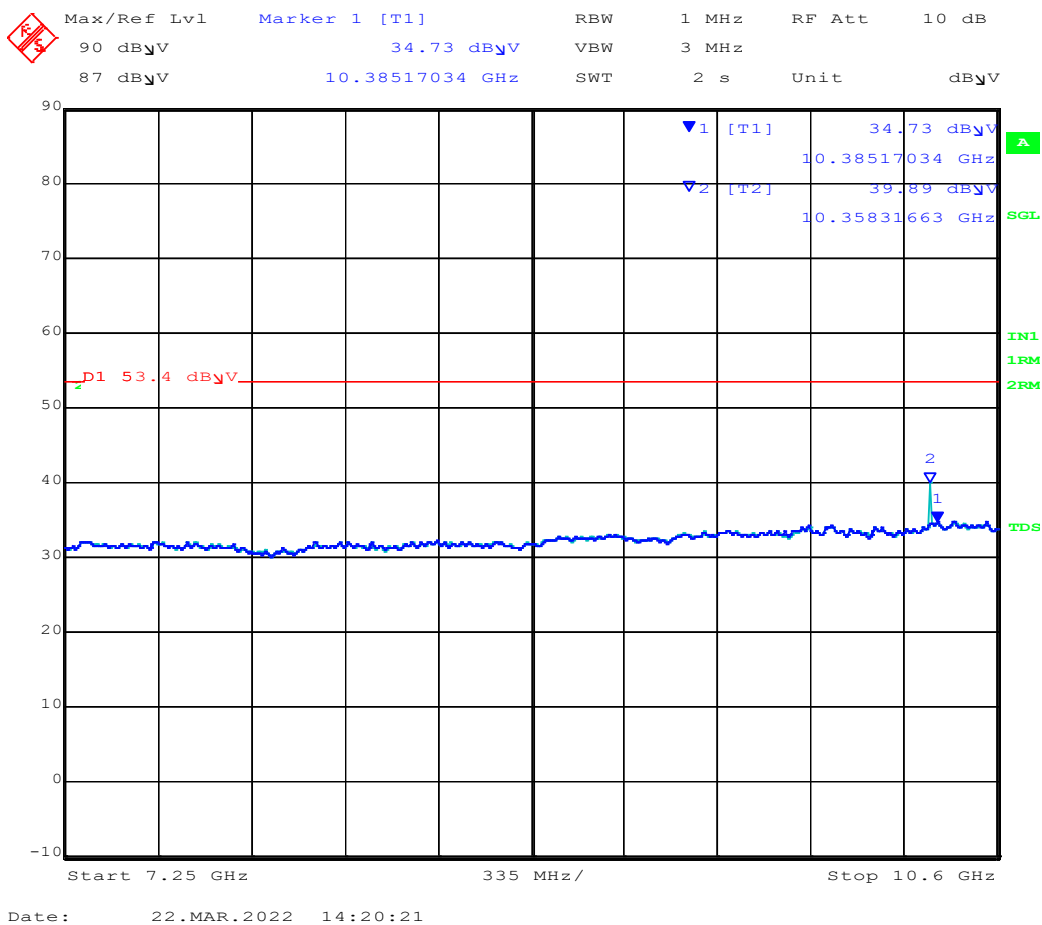

#### 7250.00 – 10600.00 MHz

Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1038.51	34.73	Average	Horizontal	150	0	53.4	-18.67	Pass
2	1035.83	39.89	Average	Vertical	150	0	53.4	-13.51	Pass

Test Notes: None

### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Integral	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	6.0	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.60	<b>Data Rate:</b>	
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

### Test Measurement Results



### RADIATED SPURIOUS EMISSIONS 10.6-18GHz

Test Freq: 6489.60 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

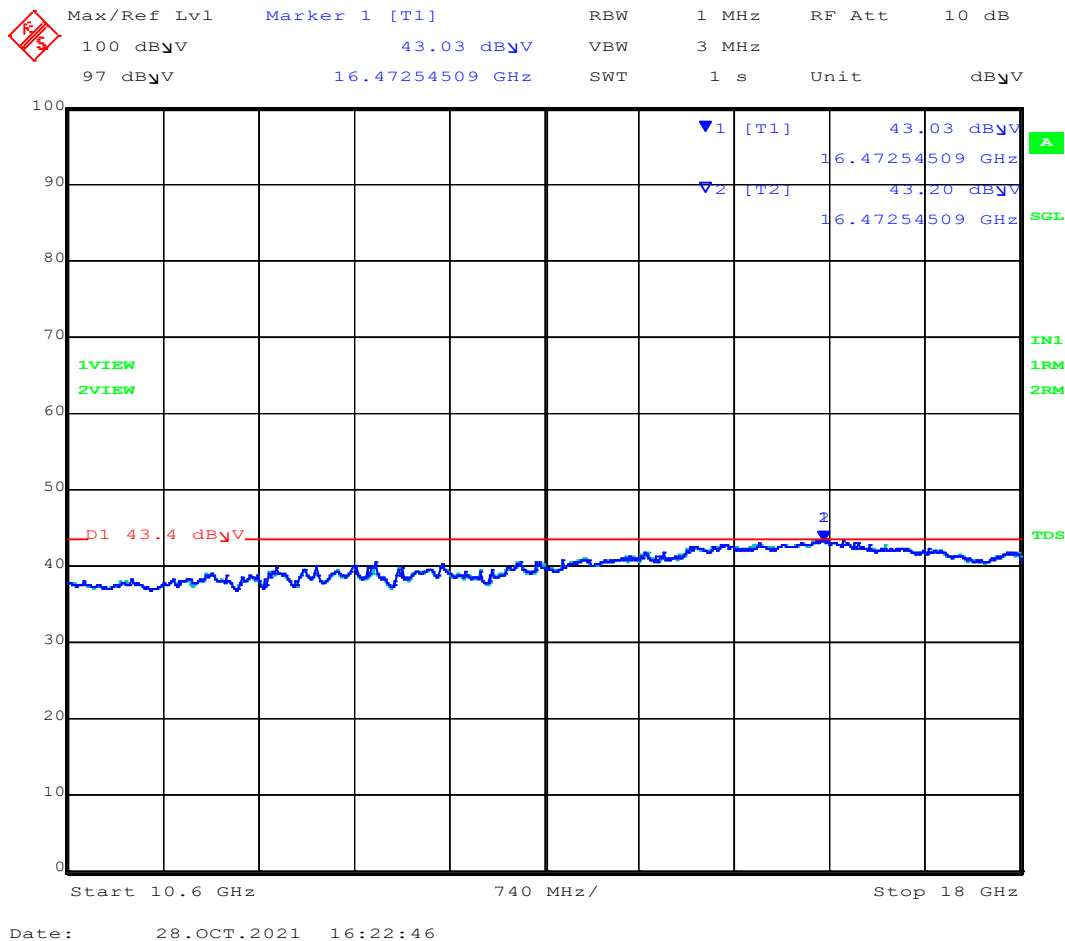

### 10600.00 – 18000.00 MHz

Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	16472.25	43.03	Average	Vertical	150	0	43.4	-0.37	Pass
2	16472.54	43.20	Average	Horizontal	150	0	43.4	-0.20	Pass

Test Notes: None

Issue Date: 1st April 2022

Page: 36 of 41

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

MiCOM Labs, 575 Boulder Court, Pleasanton, California 94566 USA, Phone: +1 (925) 462 0304, Fax: +1 (925) 462 0306, [www.micomlabs.com](http://www.micomlabs.com)



### Equipment Configuration for Spurious Emissions Horizontal (Worst Case)


<b>Antenna:</b>	Integral	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	6.0	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.60	<b>Data Rate:</b>	
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

### Test Measurement Results



### RADIATED SPURIOUS EMISSIONS 18-26GHz

Test Freq: 6489.60 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

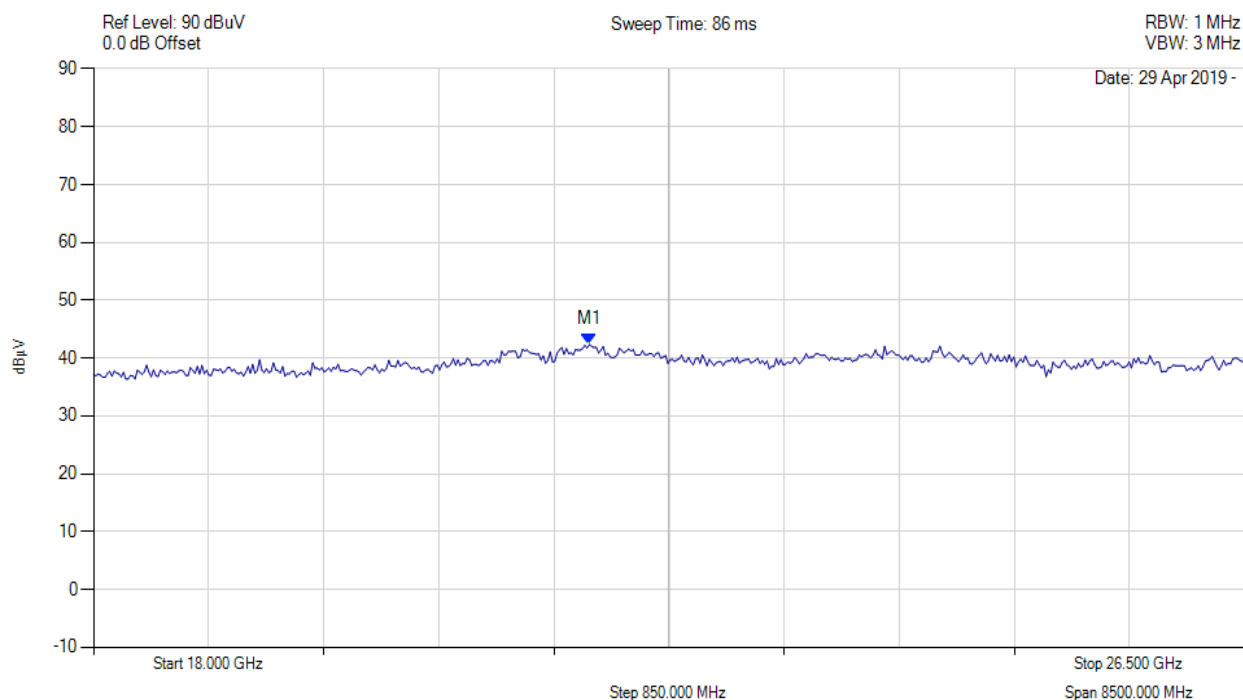

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 21.662 GHz : 42.352 dBuV	Pass

Note: Emissions were higher for horizontal polarity as such only horizontal is reported.

### Equipment Configuration for Spurious Emissions Horizontal (Worst Case)


<b>Antenna:</b>	Integral	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	6.0	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.60	<b>Data Rate:</b>	
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

### Test Measurement Results



### RADIATED SPURIOUS EMISSIONS 26 – 40 GHz

Test Freq: 6489.60 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

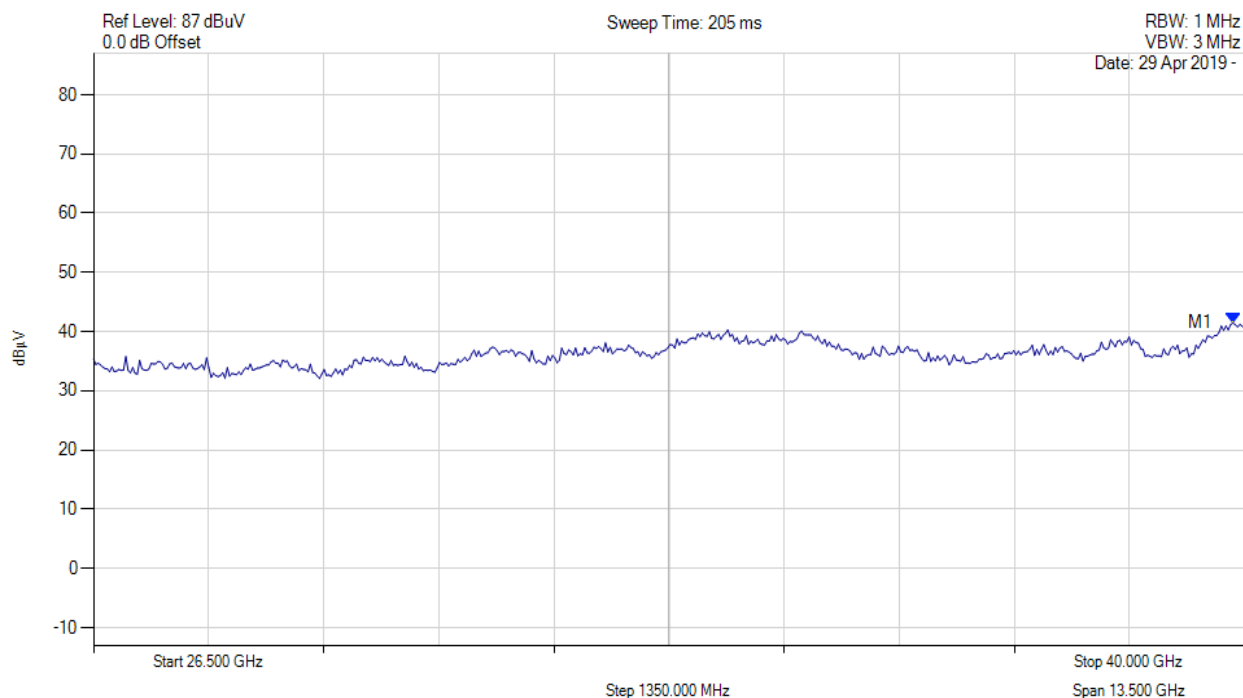

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 21.662 GHz : 42.352 dBuV	Pass

Note: Emissions were higher for horizontal polarity as such only horizontal is reported.

### 9.4.2. GPS Band Emissions


Equipment Configuration for Spurious Emissions			
<b>Antenna:</b>	Integral	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	6.0	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.60	<b>Data Rate:</b>	
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS GPS 1.164-1.240GHz

Test Freq: 6489.60 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

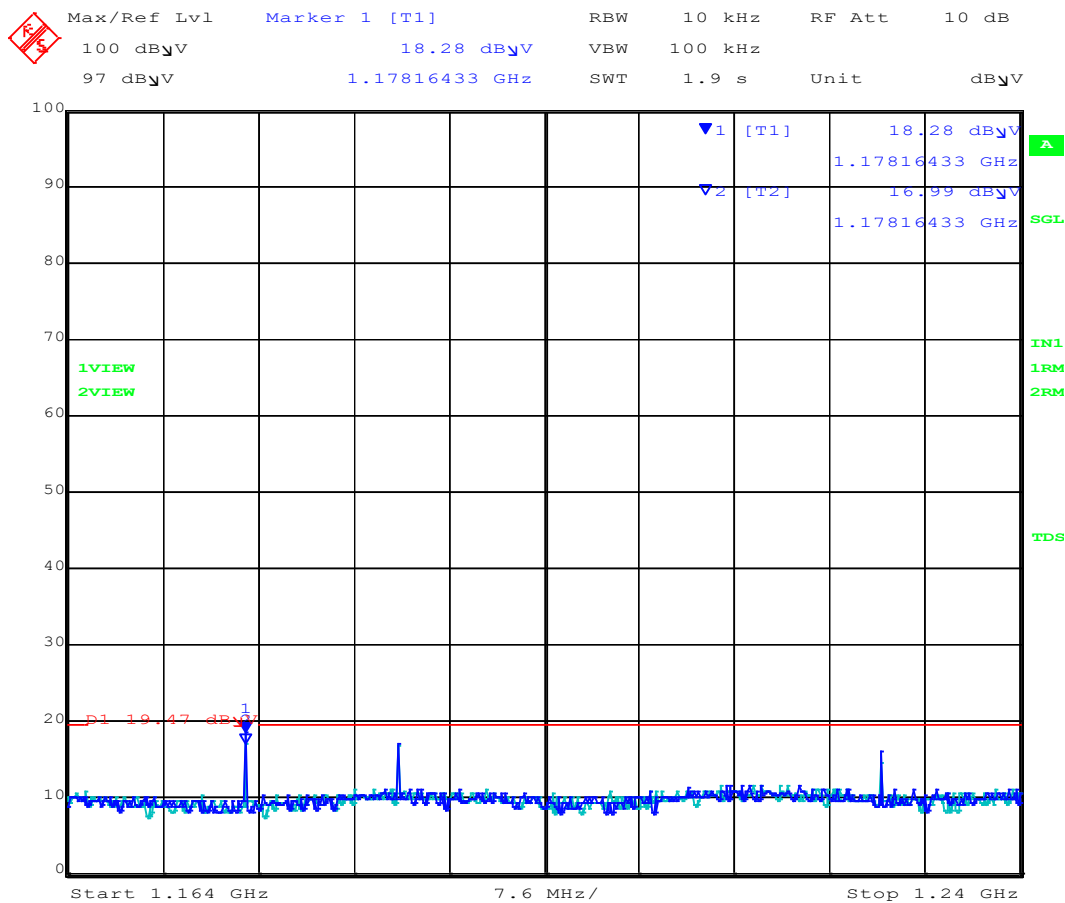

Date: 28.OCT.2021 16:04:42

1164.00-1240.00 MHz									
Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1178.164	18.28	Average	Vertical	150	0	19.47	-1.19	Pass
2	1178.16	16.99	Average	Horizontal	150	0	19.47	-2.48	Pass
Test Notes: None									


Equipment Configuration for Spurious Emissions			
Antenna:	Integral	Variant:	WB
Antenna Gain (dBi):	6.0	Modulation:	--
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99%
Channel Frequency (MHz):	6489.60	Data Rate:	
Power Setting:	16	Tested By:	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS GPS 1.164-1.240GHz

Test Freq: 6489.60 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

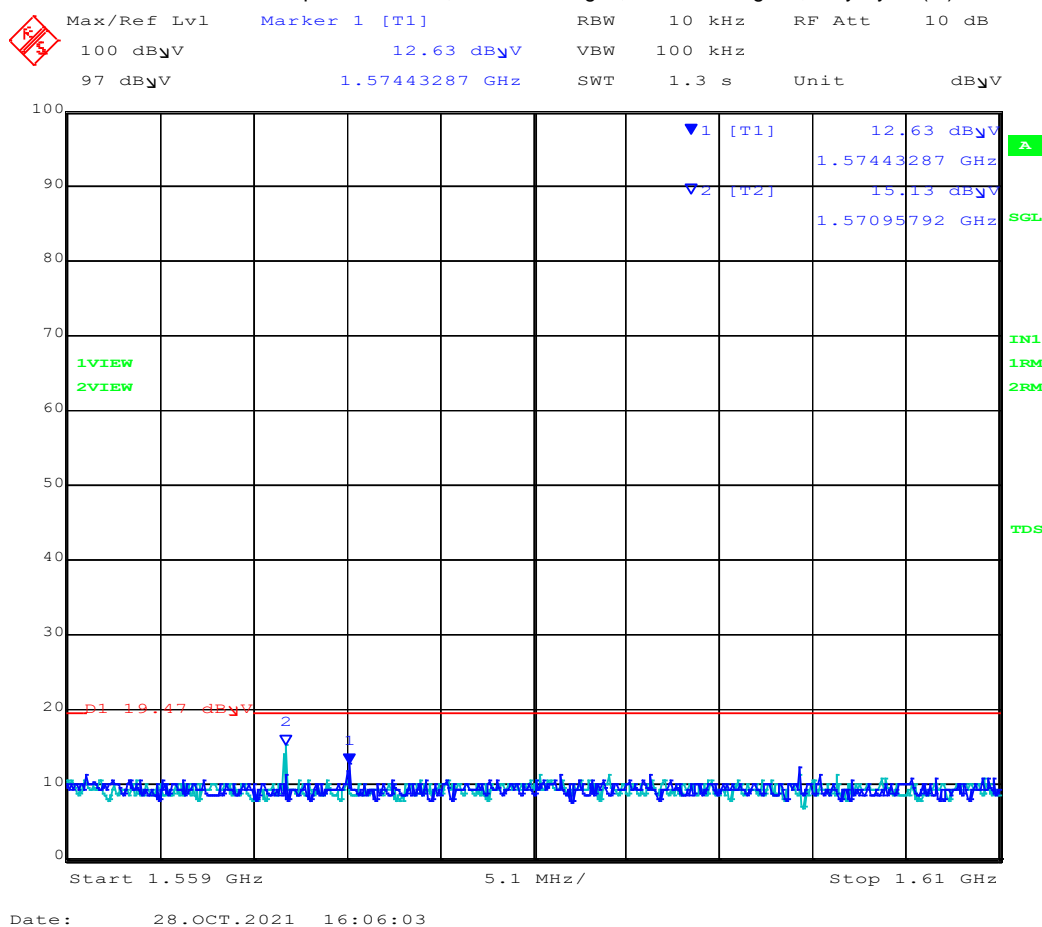

1559.00-1610.00 MHz									
Num	Frequency MHz	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
No Signals Found within 6 dB of Limit									
Test Notes: None									



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: +1 (925) 462 0304  
Fax: +1 (925) 462 0306  
[www.micomlabs.com](http://www.micomlabs.com)