	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

RF EXPOSURE EVALUATION

SPECIFIC ABSORPTION RATE

**FCC OET Bulletin 65, Supp. C
IC RSS-102 Issue 2**

SAR TEST REPORT

FOR

E.F. JOHNSON CO.

PORTABLE FM PTT RADIO TRANSCEIVER

MODEL: 242-5172

**FCC ID: ATH2425171
(Class II Permissive Change)**

IC: 933B-2425171

Test Report Serial No.

060206ATH-T759-S90F

Test Report Revision No.

Revision 1.0 (Initial Release)

Test Location


**Celltech Compliance Testing & Engineering Lab
(Celltech Labs Inc.)
1955 Moss Court
Kelowna, BC
Canada
V1Y 9L3**


Test Report Prepared By:

**Cheri Frangiadakis
Test Report Writer
Celltech Labs Inc.**

Test Report Reviewed By:

**Jonathan Hughes
General Manager
Celltech Labs Inc.**

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 1 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

Test Location CELLTECH LABS INC. Testing and Engineering Services 1955 Moss Court Kelowna, B.C. Canada V1Y 9L3 Phone: 250-448-7047 Fax: 250-448-7046 e-mail: info@celltechlabs.com web site: www.celltechlabs.com		Company Information E.F. JOHNSON CO. 123 North State St. Waseca, MN 56093 USA	
FCC IDENTIFIER: ATH2425171 IC IDENTIFIER: 933B-2425171 Model No.(s) Tested: 242-5172			
Test Requirement(s): FCC 47 CFR §2.1093; Health Canada Safety Code 6 Test Procedure(s): FCC OET Bulletin 65, Supplement C (Edition 01-01) Industry Canada RSS-102 Issue 2 FCC Device Classification: Licensed Non-Broadcast Transmitter Held to Face (TNF) Device Description: Portable FM PTT Radio Transceiver			
Transmit Frequency Range(s) Tested: 762-776 MHz (Receive & Transmit Talk-Around) 792-806 MHz (Transmit) 806-824 MHz (Transmit) 851-869 MHz (Receive & Transmit Talk-Around) Max. RF Output Power Tested: 35.1 dBm (3.24 Watts) Conducted (814.5125 MHz) 35.1 dBm (3.24 Watts) Conducted (823.9875 MHz) 35.2 dBm (3.31 Watts) Conducted (859.5125 MHz) Antenna Type(s) Tested: ½-Wave Whip (P/N: 501-0105-013) ¼-Wave Stubby (P/N: 501-0105-012) Battery Type(s) Tested: NiMH 7.5 V 3600 mAh (P/N: 587-5100-360)			
Body-Worn Accessories Tested: Plastic Belt-Clip with Metal Spring Connector (P/N: 585-5100-128) Audio Accessories Tested: Speaker-Microphone with Antenna (P/N: 589-0015-058) Speaker-Microphone (P/N: 589-0015-057) Boom-Microphone Headset (P/N: 589-0015-059)			
Max. SAR Level(s) Evaluated: Face-held: 3.00 W/kg (1g average) - 50% Duty Cycle Body-worn: 4.61 W/kg (1g average) - 50% Duty Cycle			
Class II Permissive Change(s): New Mechanical Changes			

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and Industry Canada RSS-102 Issue 2 for the Occupational / Controlled Exposure environment. All measurements were performed in accordance with the SAR system manufacturer recommendations.


I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.

Test Report Approved By:

Sean Johnston
SAR Lab Manager
Celltech Labs Inc.



Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 2 of 53



	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

TABLE OF CONTENTS

1.0 INTRODUCTION	4
2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT)	4
3.0 SAR MEASUREMENT SYSTEM	5
4.0 SAR MEASUREMENT SUMMARY	6
5.0 DETAILS OF SAR EVALUATION	7
6.0 EVALUATION PROCEDURES	8
7.0 SYSTEM PERFORMANCE CHECK	9
8.0 SIMULATED EQUIVALENT TISSUES	10
9.0 SAR SAFETY LIMITS	10
10.0 ROBOT SYSTEM SPECIFICATIONS	11
11.0 PROBE SPECIFICATION (ET3DV6)	12
12.0 SAM PHANTOM V4.0C	12
13.0 SIDE PLANAR PHANTOM	12
14.0 DEVICE HOLDER	12
15.0 TEST EQUIPMENT LIST	13
16.0 MEASUREMENT UNCERTAINTIES	14
MEASUREMENT UNCERTAINTIES (Cont.)	15
17.0 REFERENCES	16
APPENDIX A - SAR MEASUREMENT DATA	17
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA	28
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	31
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	34
APPENDIX E - SYSTEM VALIDATION	51
APPENDIX F - PROBE CALIBRATION	52
APPENDIX G - SAM PHANTOM CERTIFICATE OF CONFORMITY	53


	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

1.0 INTRODUCTION

This measurement report demonstrates that the E.F. JOHNSON CO. Model: 242-5172 Portable FM PTT Radio Transceiver FCC ID: ATH2425171, with the Class II Permissive Change(s) described in this report, complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the Occupational / Controlled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]) and IC RSS-102 Issue 2 (see reference [4]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT)

Test Requirement(s)	FCC Rule Part 47 CFR §2.1093		
	Health Canada Safety Code 6		
Test Procedure(s)	FCC OET Bulletin 65, Supplement C (01-01)		
	Industry Canada RSS-102 Issue 2		
Device Classification	Licensed Non-Broadcast Transmitter Held to Face (TNF)		
Device Description	Portable FM PTT Radio Transceiver		
RF Exposure Category	Occupational / Controlled Environment		
FCC IDENTIFIER	ATH2425171		
IC IDENTIFIER	933B-2425171		
Model(s) Tested	242-5172		
Serial No.(s) Tested	CTD00007725	Production Unit	
Transmit Frequency Range(s) Tested	762-776 MHz	Receive and Transmit Talk-Around	
	792-806 MHz	Transmit	
	806-824 MHz	Transmit	
	851-869 MHz	Receive and Transmit Talk-Around	
	Note: The Low Band (762-806 MHz) was not tested for SAR based on lower power level (3 W)		
Max. RF Conducted Output Power Measured	35.1 dBm	3.24 Watts	814.5125 MHz
	35.1 dBm	3.24 Watts	823.9875 MHz
	35.2 dBm	3.31 Watts	859.5125 MHz
Antenna Type(s) Tested	½ Wave Whip	Length - 182 mm	P/N: 501-0105-013
	¼ Wave Stubby	Length - 99 mm	P/N: 501-0105-012
Battery Type(s) Tested	NiMH	7.5 V, 3600 mAh	P/N: 587-5100-360
Body-Worn Accessories Tested	Plastic Belt-Clip with Metal Spring Connector		P/N: 585-5100-128
Audio Accessories Tested	Speaker-Microphone with Antenna		P/N: 589-0015-058
	Speaker-Microphone		P/N: 589-0015-057
	Boom-Microphone Headset		P/N: 589-0015-059
Class II Permissive Change(s)	New Mechanical Changes		


Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 4 of 53

3.0 SAR MEASUREMENT SYSTEM


Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



DASY4 SAR Measurement System with SAM phantom & validation dipole

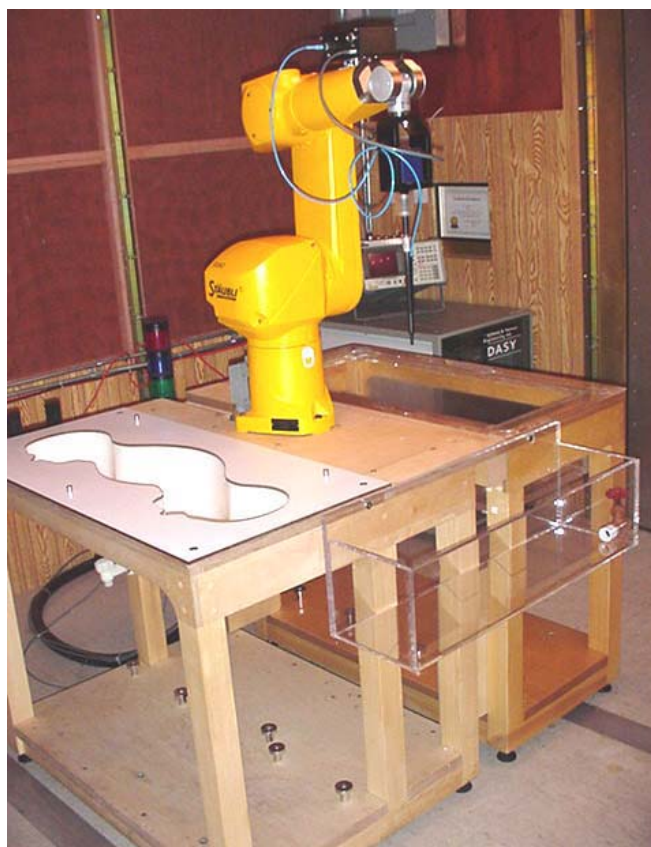

DASY4 SAR Measurement System with Plexiglas side planar phantom

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

5.0 DETAILS OF SAR EVALUATION

The E.F. JOHNSON CO. Model: 242-5172 Portable FM PTT Radio Transceiver FCC ID: ATH2425171, with the Class II Permissive Change(s) described in this report, was compliant for localized Specific Absorption Rate (Occupational / Controlled Exposure) based on the test provisions and conditions described below. Detailed photographs of the test setup are shown in Appendix D.

Face-Held Configuration

1. The Radio Transceiver (DUT) was evaluated for face-held configuration with the front of the DUT placed parallel to the outer surface of the planar phantom at a 2.5 cm separation distance.
2. The Speaker-Microphone with Antenna (DUT) was evaluated for face-held configuration connected to the Radio Transceiver with the front of the DUT placed parallel to the outer surface of the planar phantom at a 2.5 cm separation distance.

Body-Worn Configuration


3. The Radio Transceiver (DUT) was evaluated for body-worn configuration with the back of the DUT placed parallel to the outer surface of the planar phantom. The attached Belt-Clip accessory was touching the outer surface of the planar phantom and provided a 1.3 cm separation distance between the back of the DUT and the planar phantom. The DUT was evaluated for body-worn SAR with speaker-microphone and boom-microphone headset accessories.
4. The Speaker-Microphone with Antenna (DUT) was evaluated for body-worn configuration with the back of the DUT placed parallel to the outer surface of the planar phantom. The attached Lapel-Clip was touching the outer surface of the planar phantom and provided a 1.2 cm separation distance between the back of the DUT and the planar phantom.


Test Modes & Power Settings

5. The conducted power levels were measured prior to each test using a Gigatronics 8652A Universal Power Meter according to the procedures described in FCC 47 CFR §2.1046.
6. The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.

Test Conditions

7. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluations. The temperatures reported were consistent for all measurement periods.
8. The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C).

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 7 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

6.0 EVALUATION PROCEDURES


- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
(ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.


An area scan was determined as follows:

- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.

A 1 g and 10 g spatial peak SAR was determined as follows:

- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1 g and 10 g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Depending on the device type under evaluation, zoom scans for frequencies ≥ 800 MHz are typically determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 8 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2


8.0 SIMULATED EQUIVALENT TISSUES


The simulated tissue mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to ensure air bubbles are not trapped during the mixing process. The fluid was prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURES		
	Brain Tissue Simulant	Body Tissue Simulant
INGREDIENT	835 MHz DUT Evaluation	835 MHz System Performance Check
		835 MHz DUT Evaluation
Water	40.71 %	53.79 %
Sugar	56.63 %	45.13 %
Salt	1.48 %	0.98 %
HEC	0.99 %	--
Bactericide	0.19 %	0.10 %

9.0 SAR SAFETY LIMITS


EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.		
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.		

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 10 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

10.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner:	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability:	0.02 mm
No. of axis:	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor:	AMD Athlon XP 2400+
Clock Speed:	2.0 GHz
Operating System:	Windows XP Professional
<u>Data Converter</u>	
Features:	Signal Amplifier, multiplexer, A/D converter, and control logic
Software:	DASY4 software
Connecting Lines:	Optical downlink for data and status info. Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function:	Real-time data evaluation for field measurements and surface detection
Hardware:	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections:	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model:	ET3DV6
Serial No.:	1387
Construction:	Triangular core fiber optic detection system
Frequency:	10 MHz to 6 GHz
Linearity:	±0.2 dB (30 MHz to 3 GHz)
<u>Phantom(s)</u>	
Type:	Side Planar Phantom
Shell Material:	Plexiglas
Bottom Thickness:	2.0 mm ± 0.1 mm
Outer Dimensions:	75.0 cm (L) x 22.5 cm (W) x 20.5 cm (H); Back Plane: 25.7 cm (H)
Type:	SAM V4.0C
Shell Material:	Fiberglass
Thickness:	2.0 ±0.1 mm
Volume:	Approx. 25 liters

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver		Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 11 of 53

11.0 PROBE SPECIFICATION (ET3DV6)


Construction: Symmetrical design with triangular core
 Built-in shielding against static charges
 PEEK enclosure material (resistant to organic solvents, glycol)
Calibration: In air from 10 MHz to 2.5 GHz
 In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)
Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity: ± 0.2 dB in brain tissue (rotation around probe axis)
 ± 0.4 dB in brain tissue (rotation normal to probe axis)
Dynamic Range: 5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Surface Detect: ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions: Overall length: 330 mm
 Tip length: 16 mm
 Body diameter: 12 mm
 Tip diameter: 6.8 mm
 Distance from probe tip to dipole centers: 2.7 mm
Application: General dosimetry up to 3 GHz
 Compliance tests of mobile phone



ET3DV6 E-Field Probe

12.0 SAM PHANTOM V4.0C

The SAM phantom V4.0C is a fiberglass shell phantom with a 2.0 mm (+/-0.2 mm) shell thickness for left and right head and flat planar area integrated in a wooden table. The shape of the fiberglass shell corresponds to the phantom defined by SCC34-SC2. The device holder positions are adjusted to the standard measurement positions in the three sections (see Appendix G for specifications of the SAM phantom V4.0C).



SAM Phantom

13.0 SIDE PLANAR PHANTOM

The side planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of portable radio transceivers. The side planar phantom is mounted on the side of the DASY4 compact system table.




Plexiglas Side Planar Phantom

14.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.





Device Holder

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure	SAR	FCC 47 CFR §2.1093 IC RSS-102 Issue 2

15.0 TEST EQUIPMENT LIST

USED	TEST EQUIPMENT	ASSET NO.	SERIAL NO.	DATE CALIBRATED		CALIBRATION DUE DATE
	DESCRIPTION					
x	Schmid & Partner DASY4 System	-	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	N/A	N/A	N/A
x	-Robot	00046	599396-01	N/A	N/A	N/A
	-DAE4	00019	353	21Jun06		21Jun07
x	-DAE3	00018	370	08Feb06		08Feb07
x	-ET3DV6 E-Field Probe	00016	1387	16Mar06		16Mar07
	-EX3DV4 E-Field Probe	00125	3547	14Feb06		14Feb07
	-300 MHz Validation Dipole	00023	135	25Oct05		25Oct06
	-450 MHz Validation Dipole	00024	136	25Oct05		25Oct06
	-835 MHz Validation Dipole	00022	411	Brain	28Mar06	28Mar07
x				Body	27Mar06	27Mar07
	-900 MHz Validation Dipole	00020	054	Brain	06Jun06	06Jun07
				Body	06Jun06	06Jun07
	-1800 MHz Validation Dipole	00021	247	Brain	08Jun06	08Jun07
				Body	09Jun06	09Jun07
	-1900 MHz Validation Dipole	00032	151	Brain	09Jun06	09Jun07
				Body	12Jun06	12Jun07
	-2450 MHz Validation Dipole	00025	150	Brain	20Sep05	20Sep06
				Body	24Apr06	24Apr07
	-5800 MHz Validation Dipole	00126	1031	Brain	15Mar06	15Mar07
x	-SAM Phantom V4.0C	00154	1033	N/A		N/A
	-Barski Planar Phantom	00155	03-01	N/A		N/A
x	-Plexiglas Side Planar Phantom	00156	161	N/A		N/A
	-Plexiglas Validation Planar Phantom	00157	137	N/A		N/A
x	ALS-PR-DIEL Dielectric Probe Kit	00160	260-00953	N/A		N/A
x	Gigatronics 8652A Power Meter	00110	1835801	12Apr06		12Apr07
	Gigatronics 8652A Power Meter	00007	1835272	03Feb06		03Feb07
x	Gigatronics 80701A Power Sensor	00011	1833542	03Feb06		03Feb07
	Gigatronics 80701A Power Sensor	00012	1834350	12Sep05		12Sep06
x	Gigatronics 80701A Power Sensor	00013	1833713	03Feb06		03Feb07
	Gigatronics 80701A Power Sensor	00014	1833699	07Sep05		07Sep06
x	HP 8753ET Network Analyzer	00134	US39170292	18Apr06		18Apr07
x	HP 8648D Signal Generator	00005	3847A00611	N/A		N/A
	Rohde & Schwarz SMR40 Signal Generator	00006	100104	06Apr06		06Apr07
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	N/A		N/A
	HP E4408B Spectrum Analyzer	00015	US39240170	02Feb06		02Feb07


Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 13 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

16.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V _i or V _{eff}
Measurement System						
Probe calibration	5.5	Normal	1	1	5.5	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	0.7	1.9	∞
Spherical isotropy of the probe	9.6	Rectangular	1.732050808	0.7	3.9	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0.8	Rectangular	1.732050808	1	0.5	∞
Integration time	2.6	Rectangular	1.732050808	1	1.5	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Test Sample Related						
Device positioning	2.9	Normal	1	1	2.9	12
Device holder uncertainty	3.6	Normal	1	1	3.6	8
Power drift	5	Rectangular	1.732050808	1	2.9	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	2.5	Normal	1	0.64	1.6	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	2.5	Normal	1	0.6	1.5	∞
Combined Standard Uncertainty					10.58	
Expanded Uncertainty (k=2)					21.16	


Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

MEASUREMENT UNCERTAINTIES (Cont.)


UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V _i or V _{eff}
Measurement System						
Probe calibration	5.5	Normal	1	1	5.5	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Test Sample Related						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	2.5	Normal	1	0.64	1.6	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	2.5	Normal	1	0.6	1.5	∞
Combined Standard Uncertainty					8.79	
Expanded Uncertainty (k=2)					17.57	


Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2


17.0 REFERENCES


- [1] Federal Communications Commission, "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada, "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada, "Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 2: November 2005.
- [5] IEEE Standard 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] Schmid & Partner Engineering AG, "DASY4 Manual" V4.5: March 2005.

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 16 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure	SAR	FCC 47 CFR §2.1093 IC RSS-102 Issue 2

APPENDIX A - SAR MEASUREMENT DATA

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver		Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 17 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Date Tested: 06/21/2006

Face-Held SAR - Handheld Radio Transceiver - Whip Antenna - NiMH Battery - 814.5125 MHz

DUT: EF Johnson Model: 242-5172; Type: Portable FM PTT Radio Transceiver; Serial: CTD00007725

Ambient Temp: 24.8 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 102.5 kPa; Humidity: 34%

Communication System: FM

RF Output Power: 35.1 dBm (Conducted)

7.5V 3600mAh NiMH Battery Pack (P/N: 587-5100-360)

Frequency: 814.5125 MHz; Channel 8; Duty Cycle: 1:1

Medium: HSL835 ($\sigma = 0.91$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.35, 6.35, 6.35); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 08/02/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Channel 8

Area Scan (8x25x1): Measurement grid: dx=15mm, dy=15mm


Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Channel 8


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.4 V/m; Power Drift = -1.65 dB

Peak SAR (extrapolated) = 4.03 W/kg

SAR(1 g) = 3.03 mW/g; SAR(10 g) = 2.25 mW/g

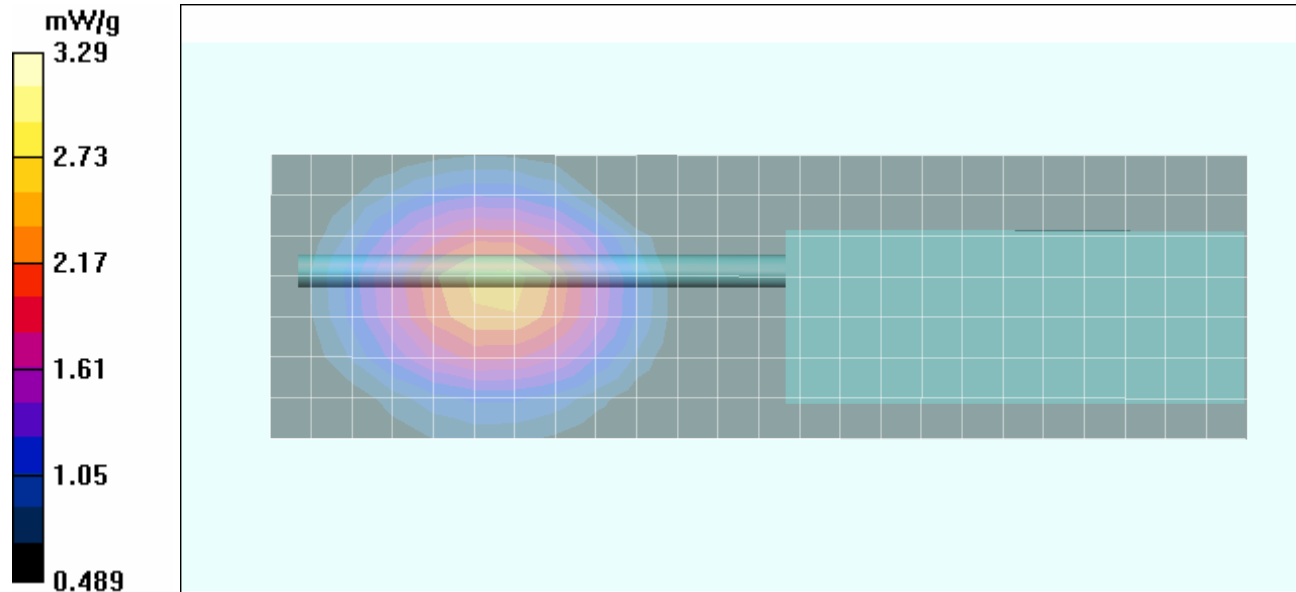

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 18 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Date Tested: 06/21/2006

Face-Held SAR - Handheld Radio Transceiver - Stubby Antenna - NiMH Battery - 814.5125 MHz

DUT: EF Johnson Model: 242-5172; Type: Portable FM PTT Radio Transceiver; Serial: CTD00007725

Ambient Temp: 24.8 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 102.5 kPa; Humidity: 34%

Communication System: FM

RF Output Power: 35.1 dBm (Conducted)

7.5V 3600mAh NiMH Battery Pack (P/N: 587-5100-360)

Frequency: 814.5125 MHz; Channel 8; Duty Cycle: 1:1

Medium: HSL835 ($\sigma = 0.91$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.35, 6.35, 6.35); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 08/02/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Channel 8

Area Scan (8x25x1): Measurement grid: dx=15mm, dy=15mm


Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Channel 8


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 44.0 V/m; Power Drift = -1.75 dB


Peak SAR (extrapolated) = 5.43 W/kg


SAR(1 g) = 4.01 mW/g; SAR(10 g) = 2.97 mW/g

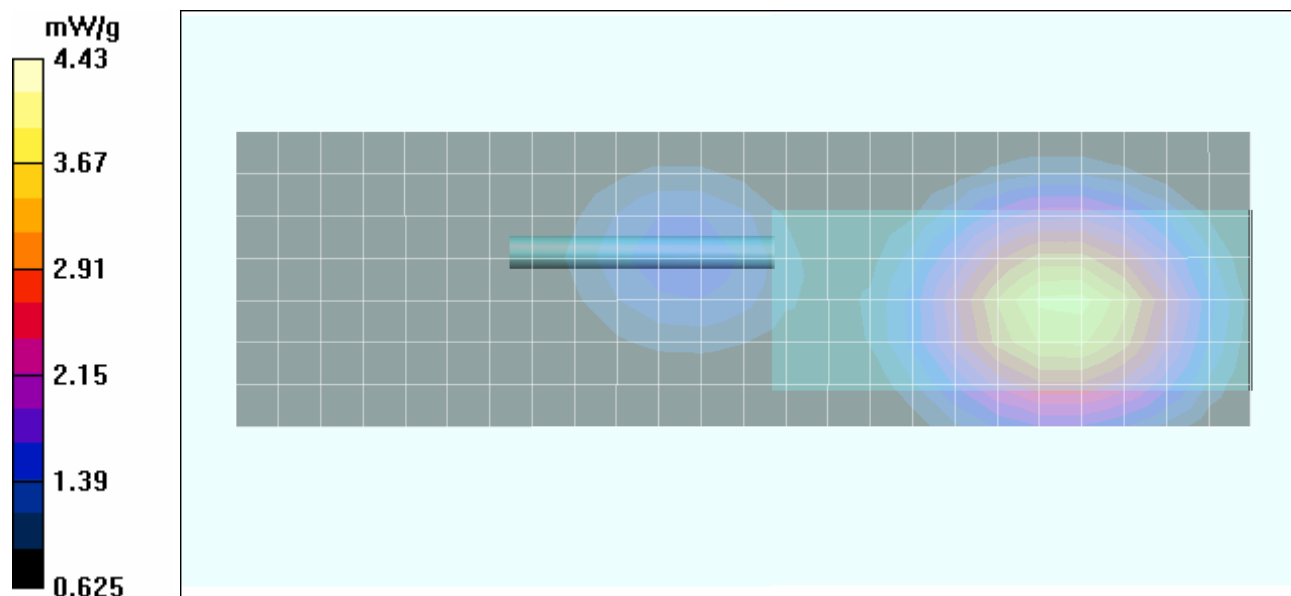

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

Z-Axis Scan

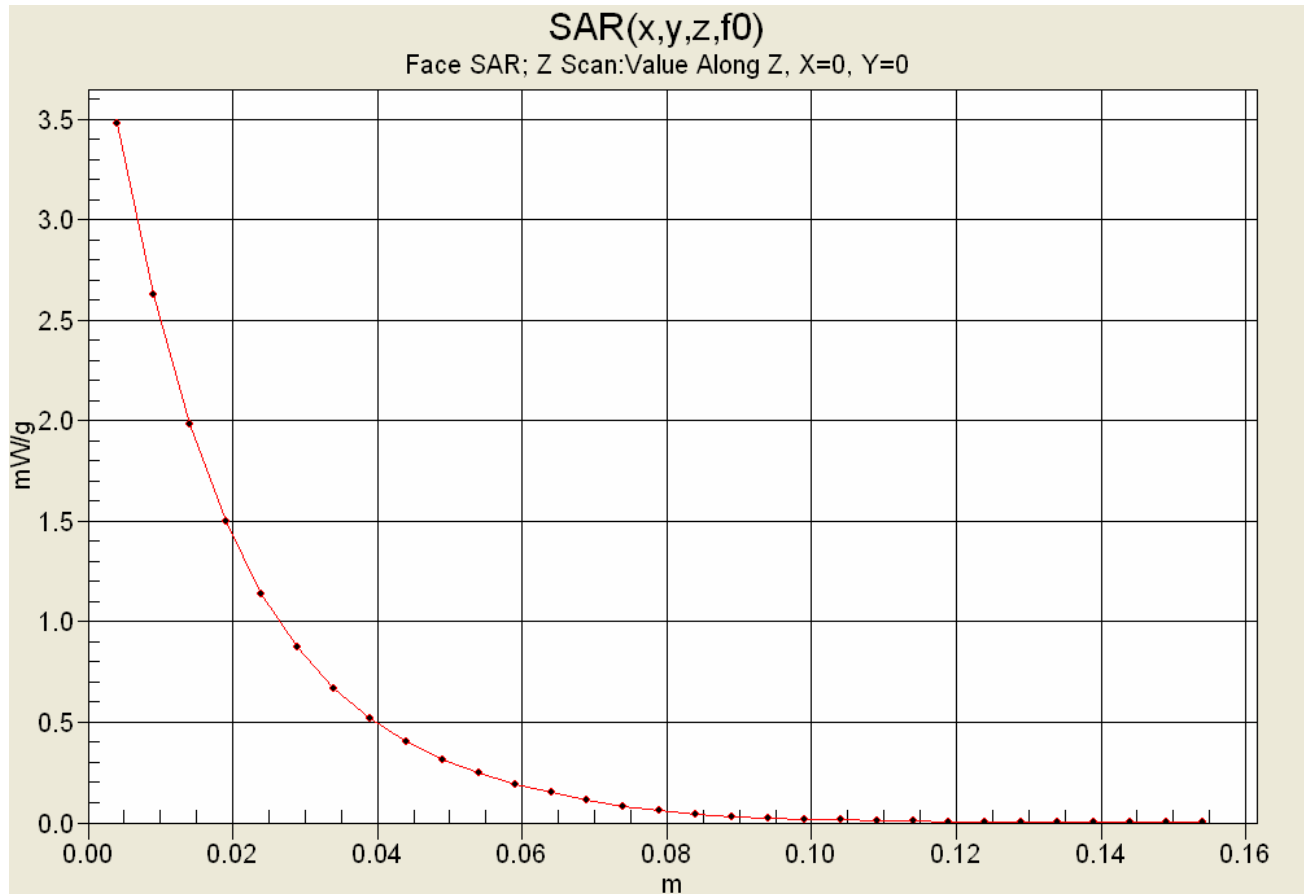

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Date Tested: 06/21/2006

Face-Held SAR - Speaker-Mic with Antenna - Stubby Antenna - NiMH Battery - 859.5125 MHz

DUT: EF Johnson Model: 242-5172; Type: Portable FM PTT Speaker-Microphone with Antenna; P/N: 589-0015-058

Ambient Temp: 24.8 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 102.5 kPa; Humidity: 34%

Communication System: FM

RF Output Power: 35.2 dBm (Conducted)

7.5V 3600mAh NiMH Battery Pack (P/N: 587-5100-360)

Frequency: 859.5125 MHz; Channel 11; Duty Cycle: 1:1

Medium: HSL835 ($\sigma = 0.91$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.35, 6.35, 6.35); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 08/02/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Channel 11

Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm


Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Channel 11


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 51.0 V/m; Power Drift = -1.67 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 1.60 mW/g; SAR(10 g) = 1.17 mW/g

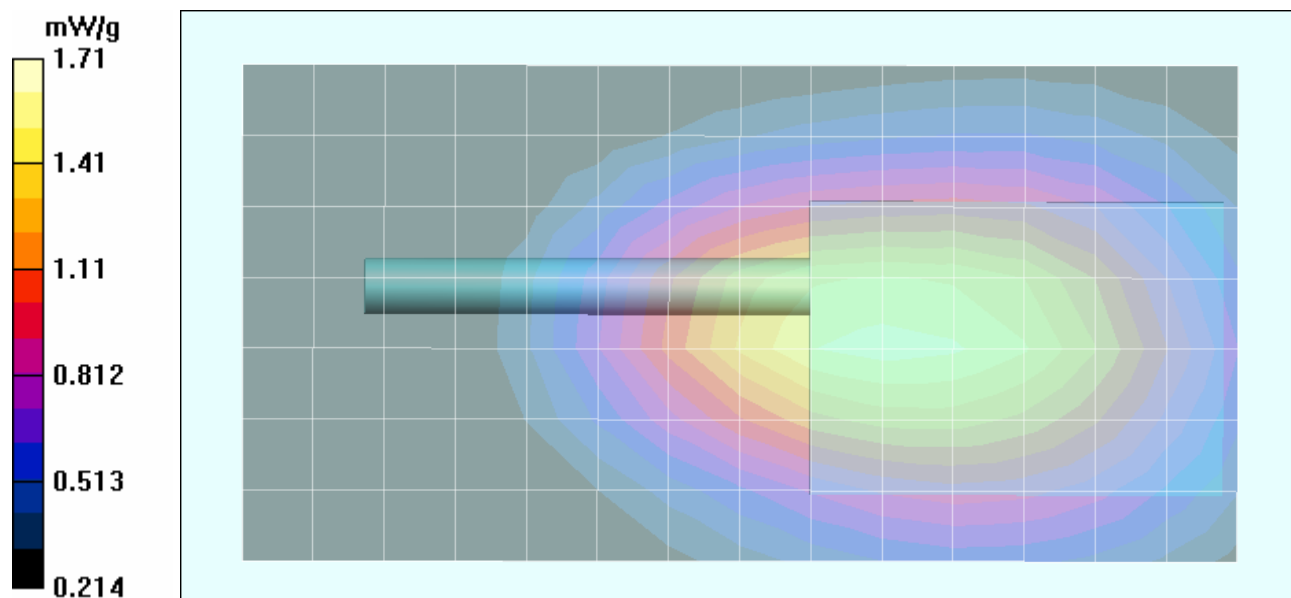

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 21 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure	SAR	FCC 47 CFR §2.1093 IC RSS-102 Issue 2

Date Tested: 06/21/2006

Body-Worn SAR - Speaker-Mic with Antenna - Stubby Antenna - NiMH Battery - 859.5125 MHz

DUT: EF Johnson Model: 242-5172; Type: Portable FM PTT Speaker-Microphone with Antenna; P/N: 589-0015-058

Body-Worn Accessory: Lapel-Clip; Audio Accessory: None

Ambient Temp: 24.4 °C; Fluid Temp: 23.0 °C; Barometric Pressure: 102.5 kPa; Humidity: 35%

Communication System: FM

RF Output Power: 35.2 dBm (Conducted)

7.5V 3600mAh NiMH Battery Pack (P/N: 587-5100-360)

Frequency: 859.5125 MHz; Channel 11; Duty Cycle: 1:1

Medium: M835 ($\sigma = 0.99$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.04, 6.04, 6.04); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 08/02/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 1.2 cm Lapel-Clip Separation Distance to Planar Phantom - Channel 11

Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - 1.2 cm Lapel-Clip Separation Distance to Planar Phantom - Channel 11

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 88.8 V/m; Power Drift = -1.56 dB

Peak SAR (extrapolated) = 7.13 W/kg

SAR(1 g) = 5.11 mW/g; SAR(10 g) = 3.47 mW/g



Body-Worn SAR - 1.2 cm Lapel-Clip Separation Distance to Planar Phantom - Channel 11


Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 90.5 V/m; Power Drift = -1.84 dB

Peak SAR (extrapolated) = 8.45 W/kg

SAR(1 g) = 6.04 mW/g; SAR(10 g) = 3.98 mW/g

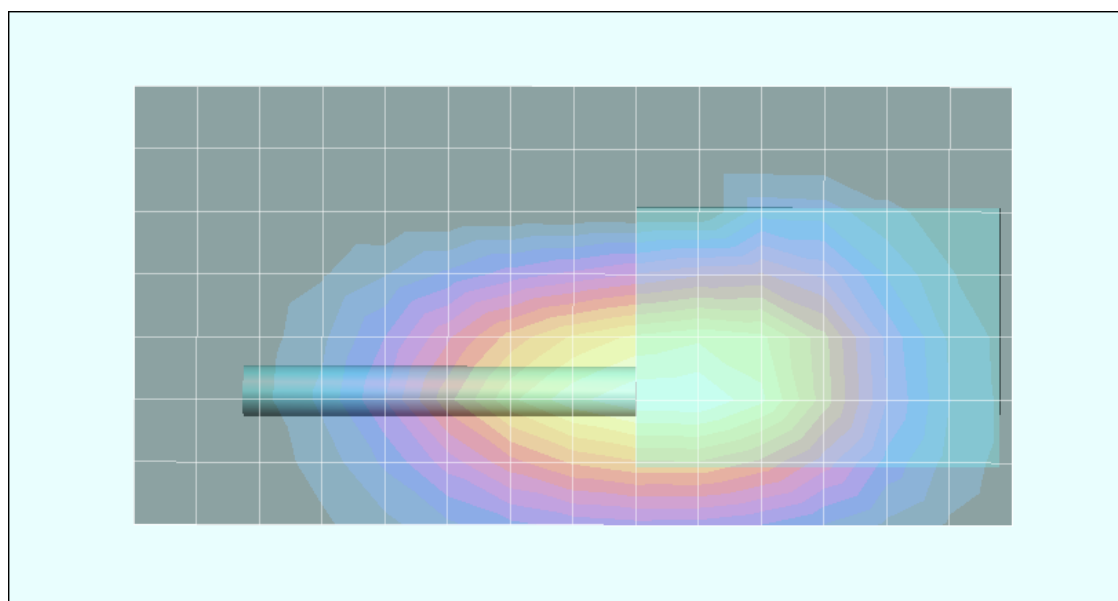


Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						


	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2


SAR-versus-Time Power Droop Evaluation

Body-Worn Configuration
 Speaker-Microphone with Antenna
 NiMH Battery Pack
 Stubby Antenna
 859.5125 MHz

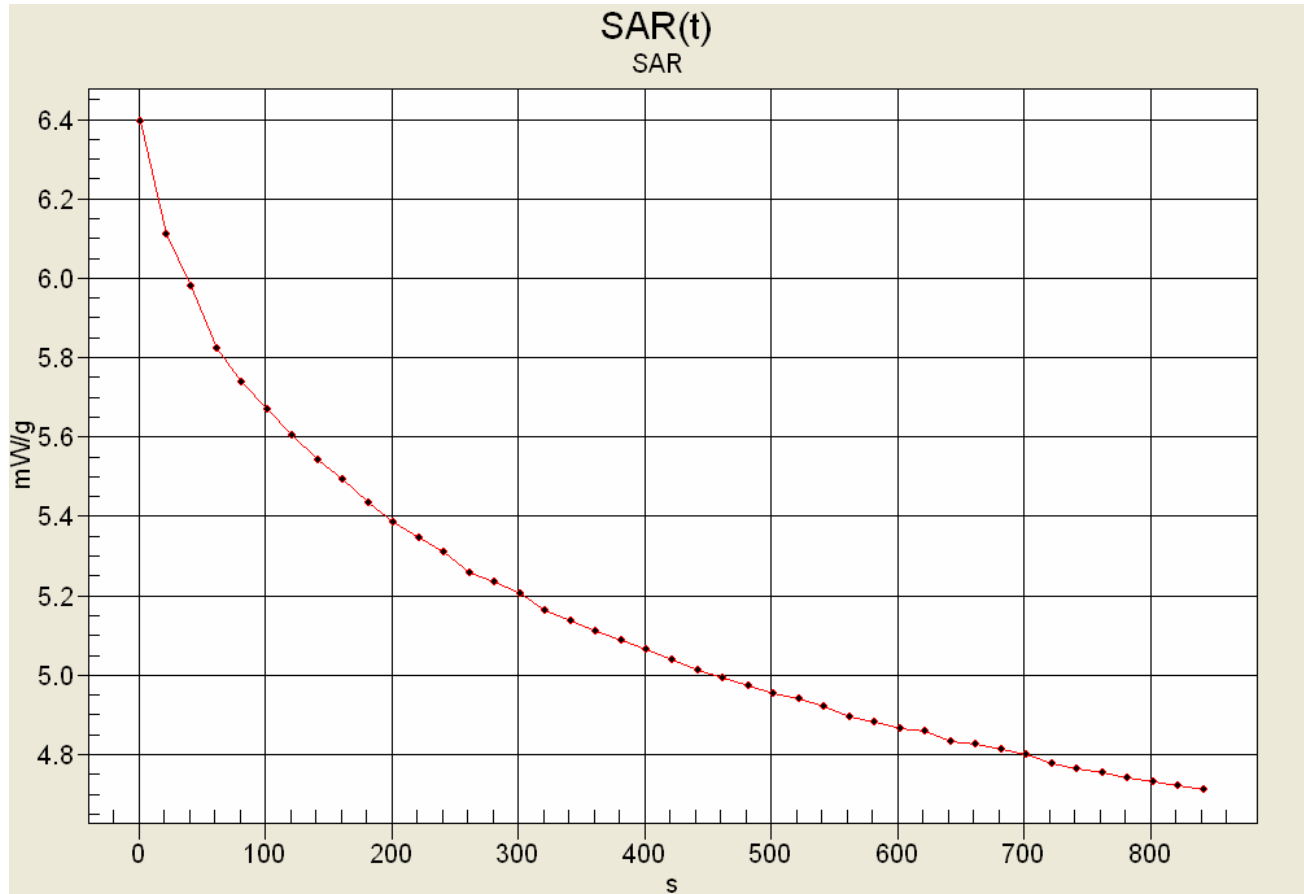

Max SAR: 6.39441 mW/g
 Low SAR: 4.7125 mW/g (-1.33 dB)
 SAR after 340s: 5.13816 mW/g (-0.95 dB)
 (340s = Zoom Scan Duration)
 (840s = Area Scan Duration)

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 23 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Date Tested: 06/21/2006

Body-Worn SAR - Handheld Radio Transceiver - Whip Antenna - NiMH Battery - 823.9875 MHz

DUT: EF Johnson Model: 242-5172; Type: Portable FM PTT Radio Transceiver; Serial: CTD00007725

Body-Worn Accessory: Belt-Clip (P/N: 585-5100-128)

Audio Accessory: Boom-Microphone Headset (P/N: 589-0015-059)

Ambient Temp: 24.4 °C; Fluid Temp: 23.0 °C; Barometric Pressure: 102.5 kPa; Humidity: 35%

Communication System: FM

RF Output Power: 35.1 dBm (Conducted)

7.5V 3600mAh NiMH Battery Pack (P/N: 587-5100-360)

Frequency: 823.9875 MHz; Channel 9; Duty Cycle: 1:1

Medium: M835 ($\sigma = 0.99$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.04, 6.04, 6.04); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 08/02/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 1.3 cm Belt-Clip Separation Distance to Planar Phantom - Channel 9

Area Scan (8x25x1): Measurement grid: dx=15mm, dy=15mm


Body-Worn SAR - 1.3 cm Belt-Clip Separation Distance to Planar Phantom - Channel 9


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 12.7 V/m; Power Drift = -0.468 dB

Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 7.80 mW/g; SAR(10 g) = 5.51 mW/g

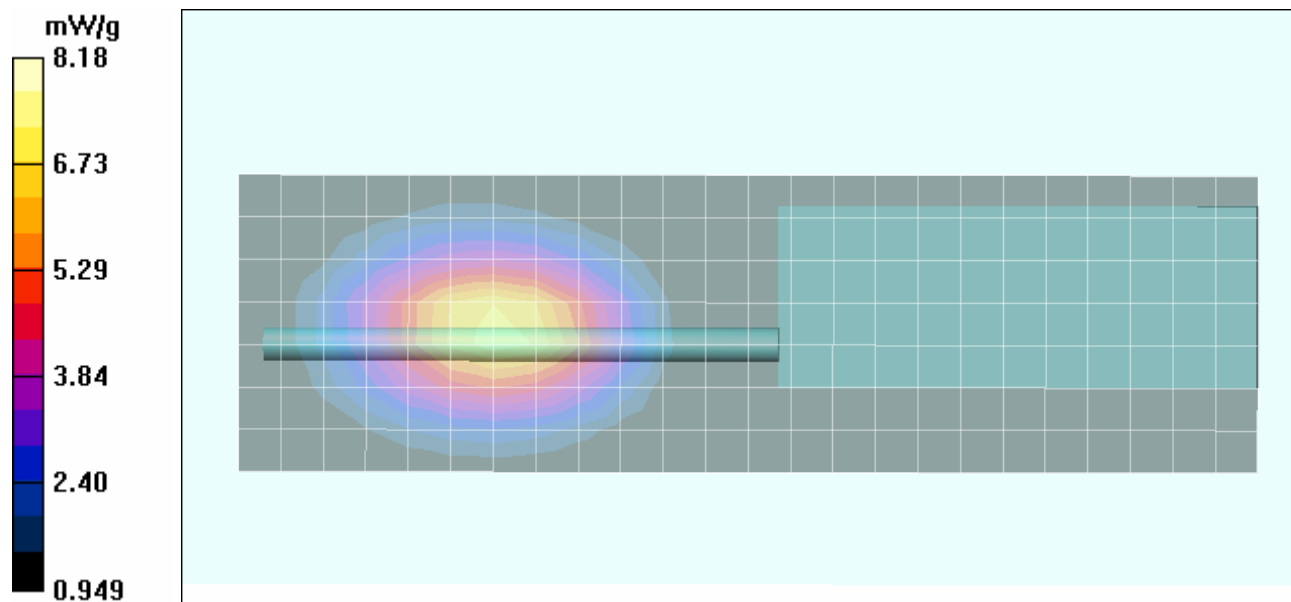

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 24 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Date Tested: 06/21/2006

Body-Worn SAR - Handheld Radio Transceiver - Stubby Antenna - NiMH Battery - 814.5125 MHz

DUT: EF Johnson Model: 242-5172; Type: Portable FM PTT Radio Transceiver; Serial: CTD00007725

Body-Worn Accessory: Belt-Clip (P/N: 585-5100-128)

Audio Accessory: Boom-Microphone Headset (P/N: 589-0015-059)

Ambient Temp: 24.4 °C; Fluid Temp: 23.0 °C; Barometric Pressure: 102.5 kPa; Humidity: 35%

Communication System: FM

RF Output Power: 35.1 dBm (Conducted)

7.5V 3600mAh NiMH Battery Pack (P/N: 587-5100-360)

Frequency: 814.5125 MHz; Channel 8; Duty Cycle: 1:1

Medium: M835 ($\sigma = 0.99$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.04, 6.04, 6.04); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 08/02/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 1.3 cm Belt-Clip Separation Distance to Planar Phantom - Channel 8

Area Scan (8x25x1): Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - 1.3 cm Belt-Clip Separation Distance to Planar Phantom - Channel 8

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 69.7 V/m; Power Drift = 0.134 dB

Peak SAR (extrapolated) = 8.12 W/kg

SAR(1 g) = 4.30 mW/g; SAR(10 g) = 2.82 mW/g


Body-Worn SAR - 1.3 cm Belt-Clip Separation Distance to Planar Phantom - Channel 8


Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 69.7 V/m; Power Drift = 0.134 dB

Peak SAR (extrapolated) = 6.96 W/kg

SAR(1 g) = 5.28 mW/g; SAR(10 g) = 3.77 mW/g

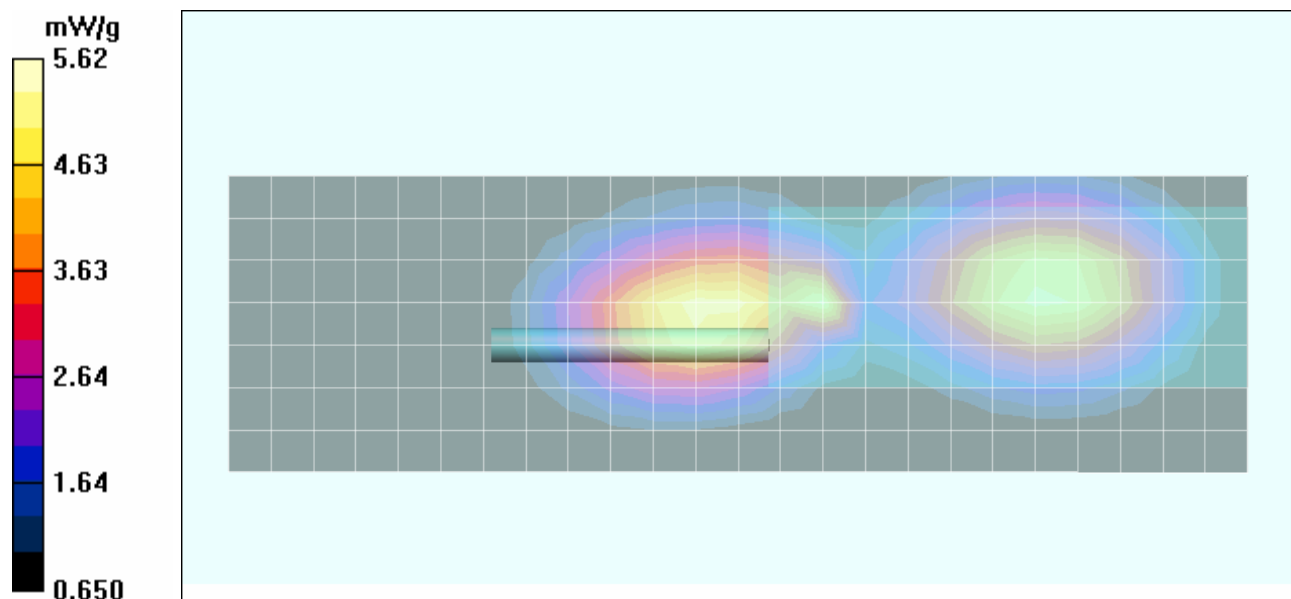

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 25 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Date Tested: 06/21/2006

Body-Worn SAR - Handheld Radio Transceiver - Whip Antenna - NiMH Battery - 814.5125 MHz

DUT: EF Johnson Model: 242-5172; Type: Portable FM PTT Radio Transceiver; Serial: CTD00007725

Body-Worn Accessory: Belt-Clip (P/N: 585-5100-128)

Audio Accessory: Speaker-Microphone (P/N: 589-0015-057)

Ambient Temp: 24.4 °C; Fluid Temp: 23.0 °C; Barometric Pressure: 102.5 kPa; Humidity: 35%

Communication System: FM

RF Output Power: 35.1 dBm (Conducted)

7.5V 3600mAh NiMH Battery Pack (P/N: 587-5100-360)

Frequency: 814.5125 MHz; Channel 8; Duty Cycle: 1:1

Medium: M835 ($\sigma = 0.99$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.04, 6.04, 6.04); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 08/02/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 1.3 cm Belt-Clip Separation Distance to Planar Phantom - Channel 8

Area Scan (8x25x1): Measurement grid: dx=15mm, dy=15mm



Body-Worn SAR - 1.3 cm Belt-Clip Separation Distance to Planar Phantom - Channel 8


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = -0.733 dB


Peak SAR (extrapolated) = 9.68 W/kg


SAR(1 g) = 7.42 mW/g; SAR(10 g) = 5.42 mW/g

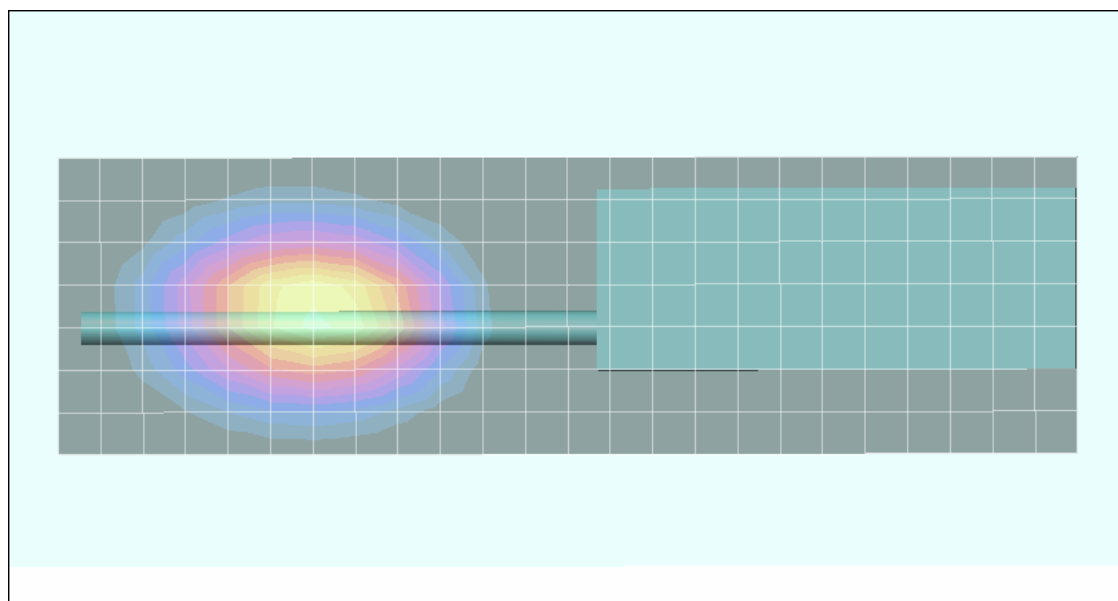


Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						


Z-Axis Scan

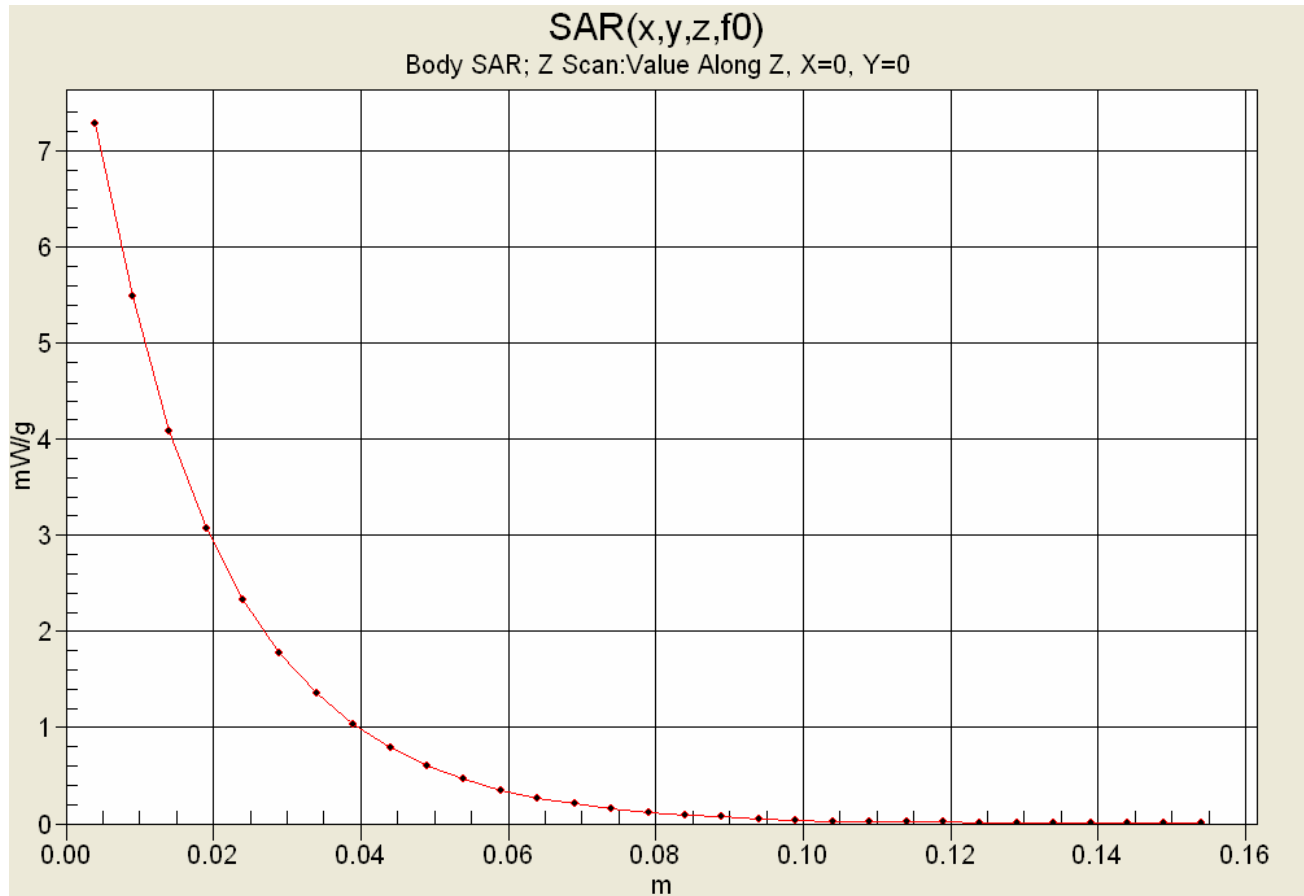

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 28 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Date Tested: 06/21/2006

System Performance Check (Body) - 835 MHz Dipole

DUT: Dipole 835 MHz; Model: D835V2; Type: System Performance Check; Serial: 411; Validation: 03/27/2006

Ambient Temp: 24.4 °C; Fluid Temp: 23.0 °C; Barometric Pressure: 102.5 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: M835 ($\sigma = 0.99$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.04, 6.04, 6.04); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 08/02/2006
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

835 MHz Dipole - System Performance Check/Area Scan (6x10x1):

Measurement grid: dx=10mm, dy=10mm


835 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 52.1 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 3.45 W/kg


SAR(1 g) = 2.34 mW/g; SAR(10 g) = 1.54 mW/g

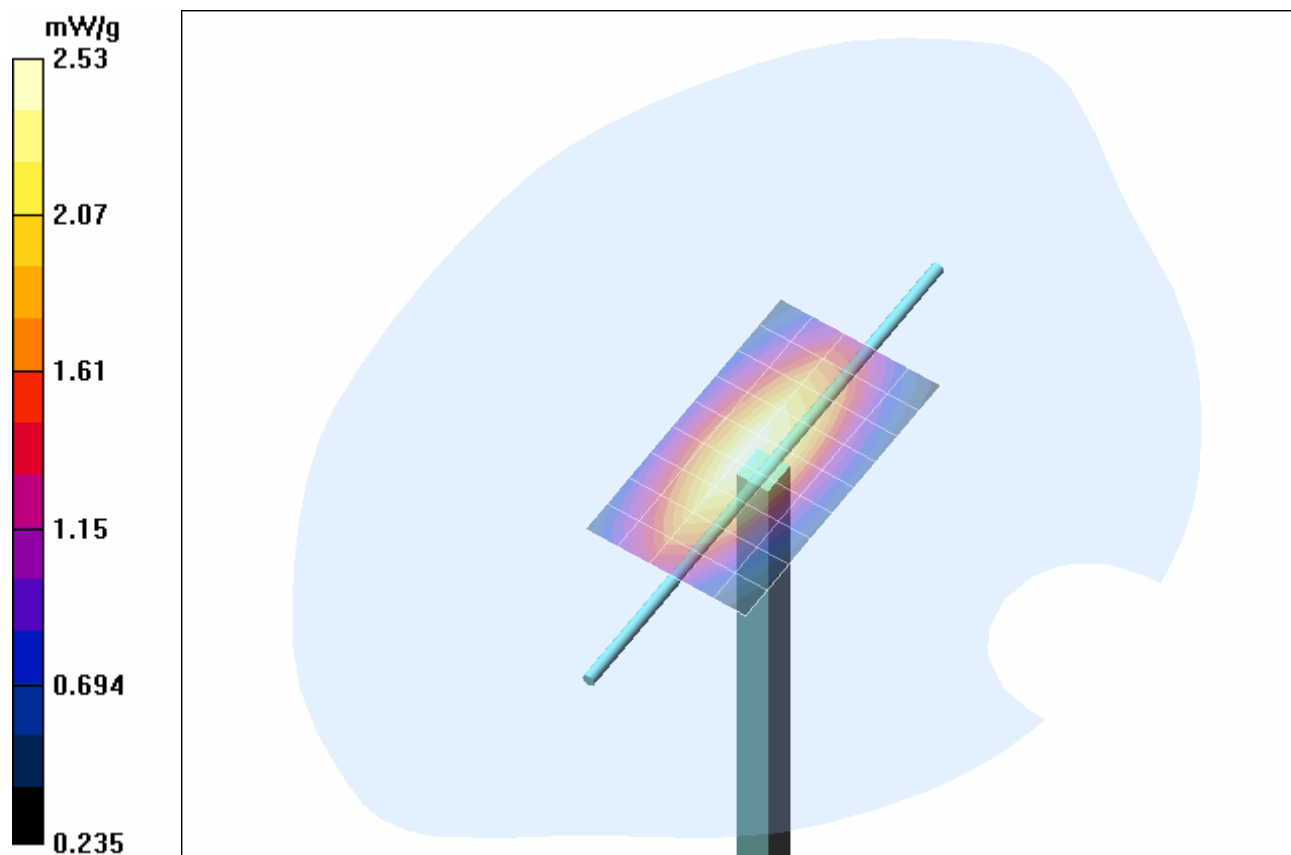



Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

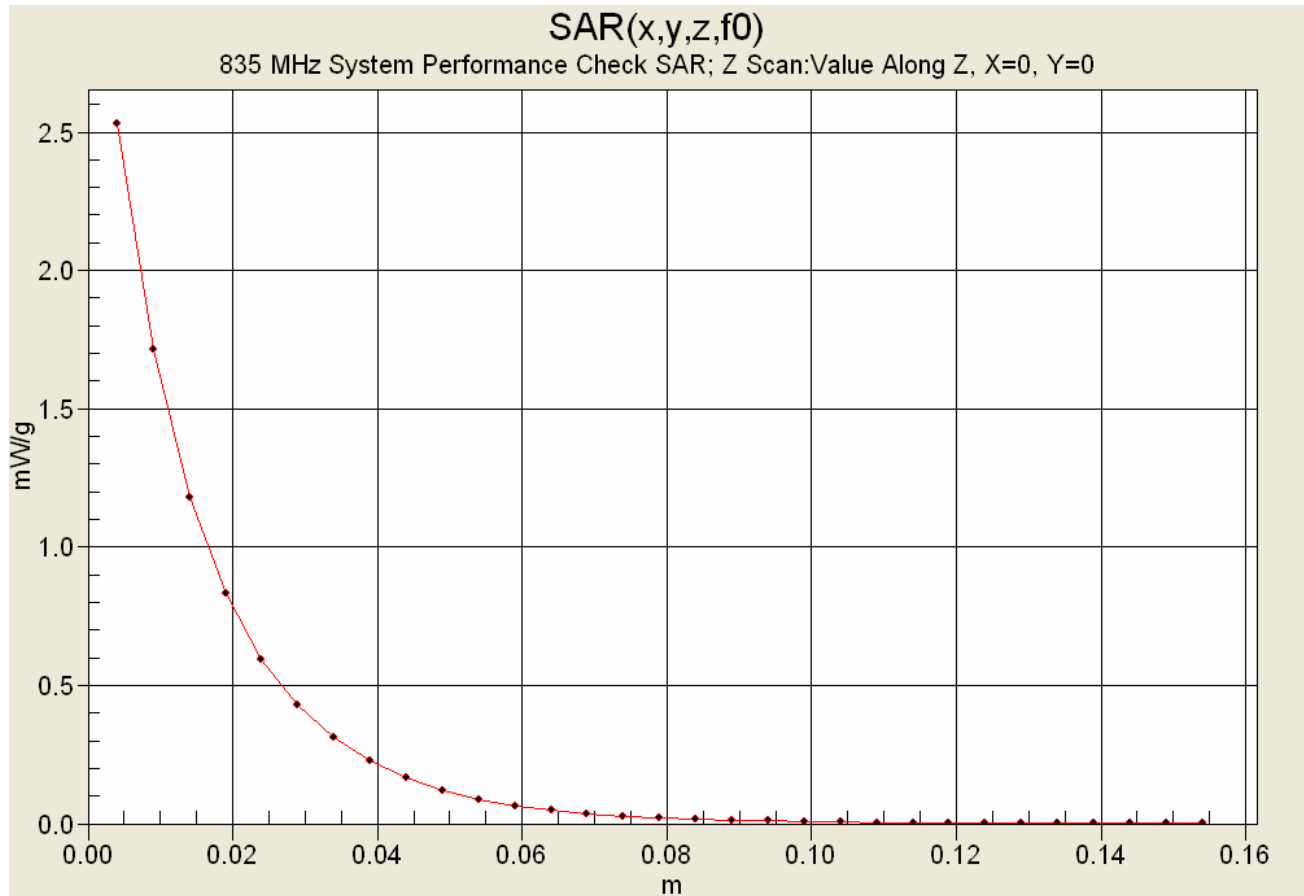
Z-Axis Scan




Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 30 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 31 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

835 MHz System Performance Check & DUT Evaluation (Body)

Celltech Labs Inc.
Test Result for UIM Dielectric Parameter
Wed 21/Jun/2006
Frequency (GHz)

FCC_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma


FCC_eB FCC Limits for Body Epsilon


FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7350	55.59	0.96	53.72	0.88
0.7450	55.55	0.96	53.68	0.89
0.7550	55.51	0.96	53.57	0.90
0.7650	55.47	0.96	53.40	0.91
0.7750	55.43	0.97	53.40	0.93
0.7850	55.39	0.97	53.09	0.93
0.7950	55.36	0.97	53.06	0.95
0.8050	55.32	0.97	52.99	0.95
0.8150	55.28	0.97	52.85	0.96
0.8250	55.24	0.97	52.76	0.97
0.8350	55.20	0.97	52.78	0.99
0.8450	55.17	0.98	52.52	1.00
0.8550	55.14	0.99	52.44	1.01
0.8650	55.11	1.01	52.31	1.01
0.8750	55.08	1.02	52.16	1.03
0.8850	55.05	1.03	52.16	1.04
0.8950	55.02	1.04	52.07	1.05
0.9050	55.00	1.05	51.96	1.06
0.9150	55.00	1.06	51.75	1.07
0.9250	54.98	1.06	51.75	1.08
0.9350	54.96	1.07	51.62	1.09

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 32 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure	SAR	FCC 47 CFR §2.1093
				IC RSS-102 Issue 2

835 MHz DUT Evaluation (Face)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Wed 21/Jun/2006

Frequency (GHz)


FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon


FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM


Test_s Sigma of UIM

Freq	FCC_eHFCC	sHFCC	Test_e	Test_s
0.7350	42.02	0.89	41.85	0.81
0.7450	41.97	0.89	41.70	0.82
0.7550	41.92	0.89	41.80	0.83
0.7650	41.86	0.89	41.47	0.84
0.7750	41.81	0.90	41.26	0.85
0.7850	41.76	0.90	41.21	0.86
0.7950	41.71	0.90	41.13	0.87
0.8050	41.66	0.90	40.96	0.87
0.8150	41.60	0.90	41.01	0.89
0.8250	41.55	0.90	40.85	0.90
0.8350	41.50	0.90	40.65	0.91
0.8450	41.50	0.91	40.58	0.92
0.8550	41.50	0.92	40.58	0.93
0.8650	41.50	0.93	40.38	0.94
0.8750	41.50	0.94	40.38	0.95
0.8850	41.50	0.95	40.20	0.96
0.8950	41.50	0.96	40.19	0.97
0.9050	41.50	0.97	40.00	0.99
0.9150	41.50	0.98	39.82	1.00
0.9250	41.48	0.98	39.71	1.01
0.9350	41.46	0.99	39.74	1.01

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 33 of 53


	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS



Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver		Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 34 of 53

FACE-HELD SAR TEST SETUP PHOTOGRAPHS



Radio Transceiver with Stubby Antenna & NiMH Battery
2.5 cm Separation Distance to Planar Phantom

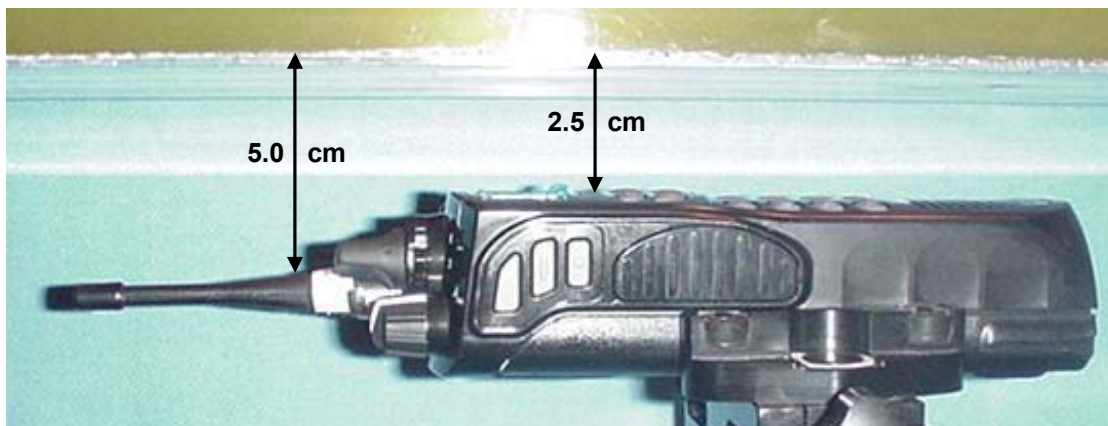



FACE-HELD SAR TEST SETUP PHOTOGRAPHS Radio Transceiver with Whip Antenna & NiMH Battery 2.5 cm Separation Distance to Planar Phantom

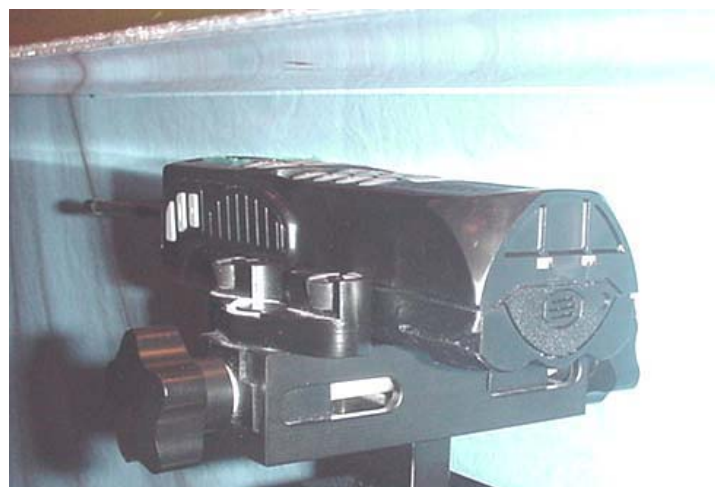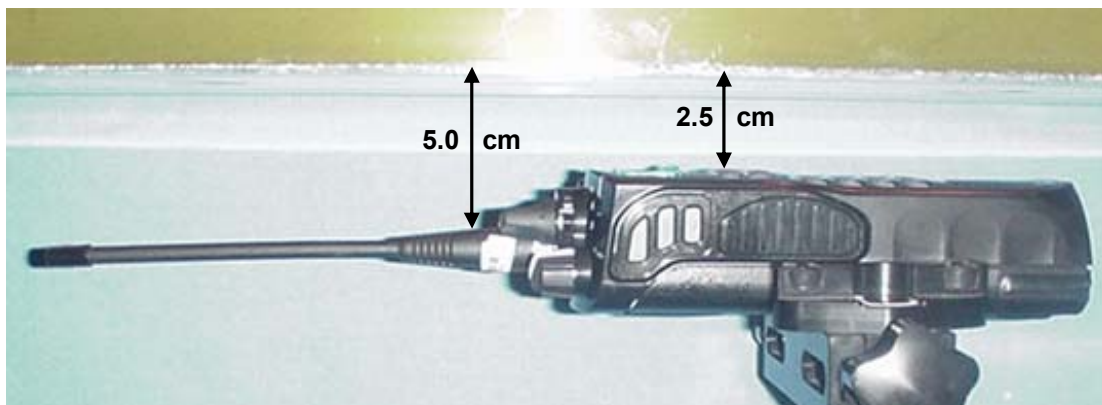


FACE-HELD SAR TEST SETUP PHOTOGRAPHS **Speaker-Microphone Antenna Version with Stubby Antenna & NiMH Battery** **2.5 cm Separation Distance to Planar Phantom**

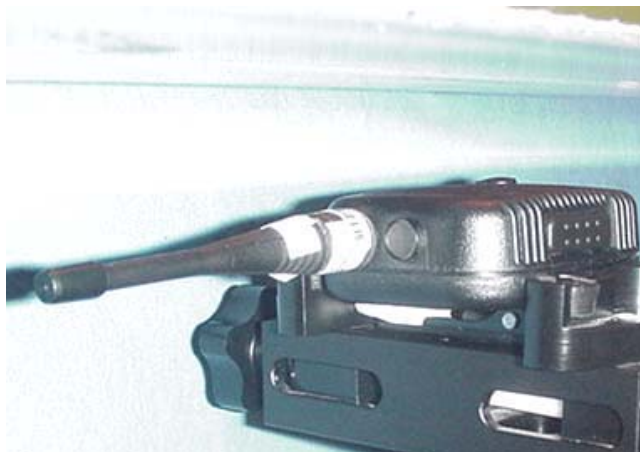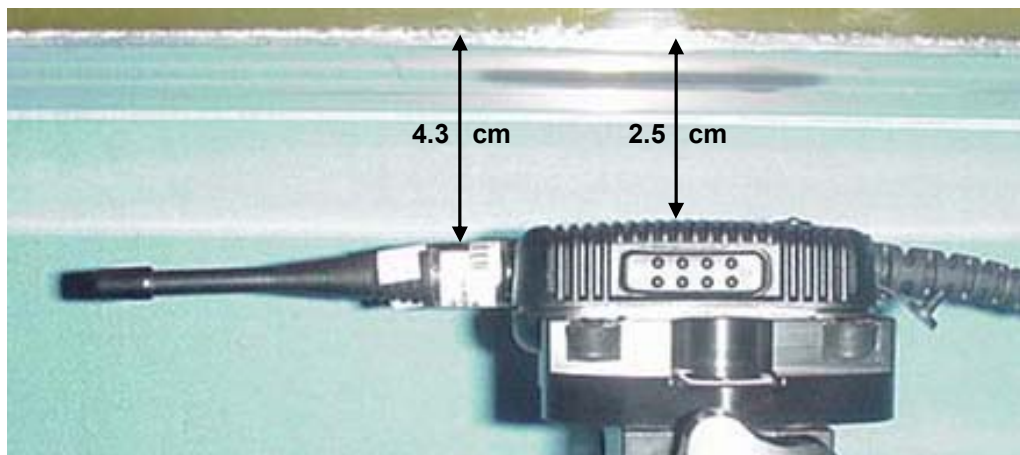


BODY-WORN SAR TEST SETUP PHOTOGRAPHS
Radio Transceiver with Stubby Antenna, NiMH Battery, & Boom-Microphone Headset
1.3 cm Belt-Clip Separation Distance to Planar Phantom

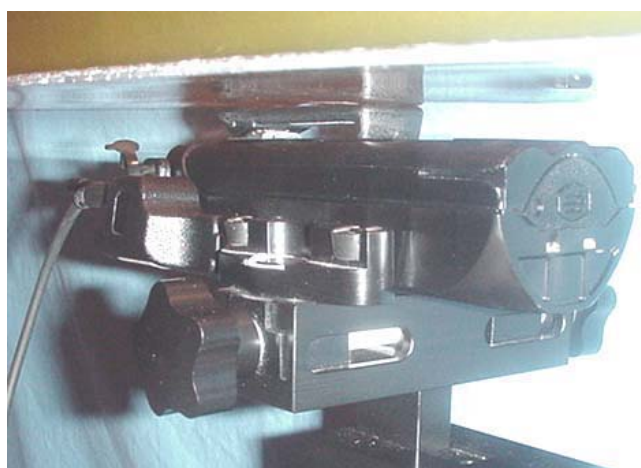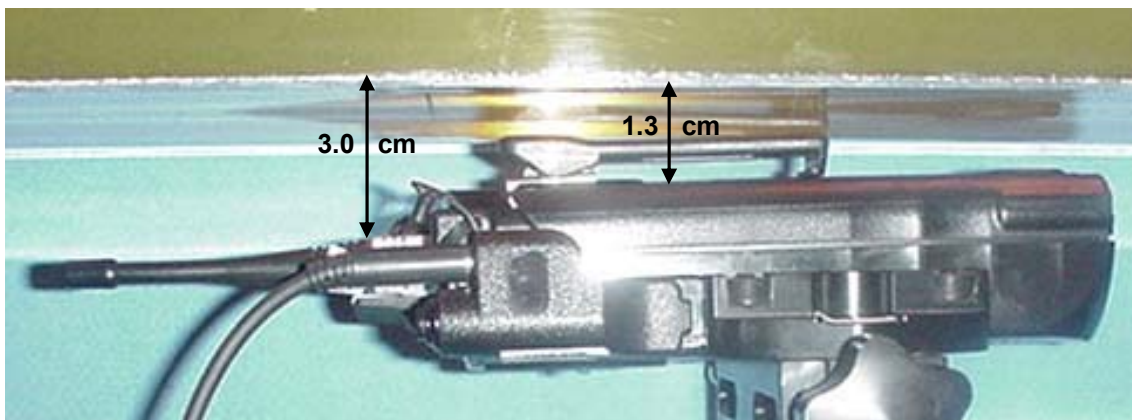


BODY-WORN SAR TEST SETUP PHOTOGRAPHS
Radio Transceiver with Whip Antenna, NiMH Battery, & Boom-Microphone Headset
1.3 cm Belt-Clip Separation Distance to Planar Phantom

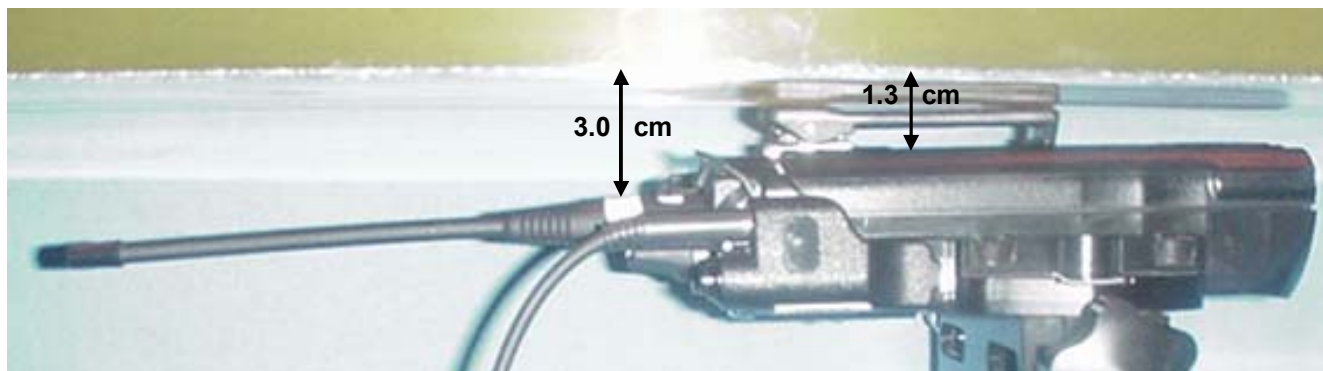

BODY-WORN SAR TEST SETUP PHOTOGRAPHS
Radio Transceiver with Whip Antenna, NiMH Battery, & Speaker-Microphone
1.3 cm Belt-Clip Separation Distance to Planar Phantom

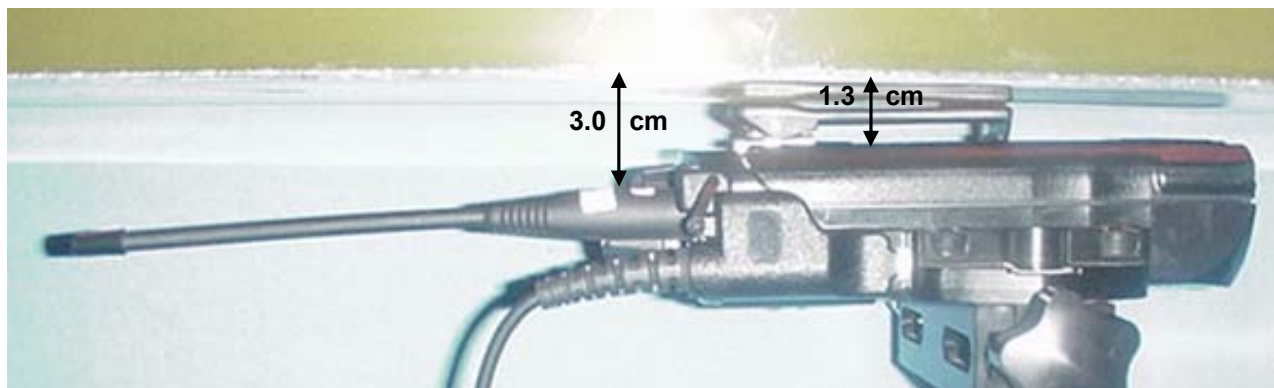

BODY-WORN SAR TEST SETUP PHOTOGRAPHS
Speaker-Microphone Antenna Version with Stubby Antenna & NiMH Battery
1.2 cm Lapel-Clip Separation Distance to Planar Phantom

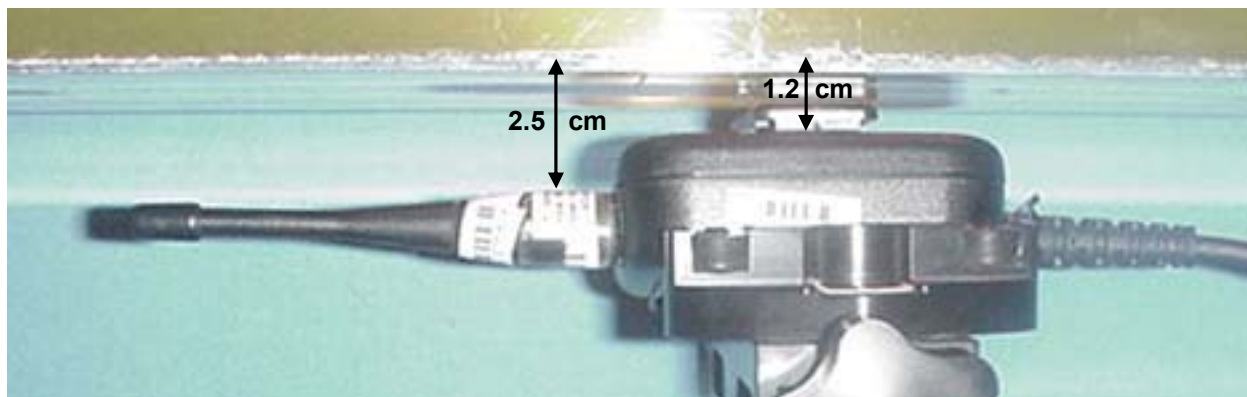


DUT PHOTOGRAPHS



Front of DUT
with Whip Antenna



Front of DUT
with Stubby Antenna

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure	SAR	FCC 47 CFR §2.1093
				IC RSS-102 Issue 2


DUT PHOTOGRAPHS




Back of DUT



Back of DUT with Belt-Clip

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 43 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure	SAR	FCC 47 CFR §2.1093
				IC RSS-102 Issue 2

DUT PHOTOGRAPHS



Top end of DUT




Bottom end of DUT




Stubby Antenna (P/N: 501-0105-012)



Whip Antenna (P/N: 501-0105-013)

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 44 of 53

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

DUT PHOTOGRAPHS




Right Side of DUT & Belt-Clip



Left Side of DUT & Belt-Clip




Belt-Clip Body-worn Accessory (Plastic with metal spring connector)
(P/N: 585-5100-128)

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 45 of 53

The image displays three perspectives of a black, rectangular EFJohnson Model 587 Ultra High Capacity NiMH battery. The left view shows the front face with a label containing the part number P6A83001, capacity 503206030, and other identifiers. The middle view shows the top surface with a latch mechanism and two small labels. The right view shows the back face with a large label detailing the model number (Model 587 - 5100 - 360), voltage (3.6 Vdc), and safety warnings. The battery has a textured black finish and rounded corners.

NiMH Battery

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure	SAR	FCC 47 CFR §2.1093
				IC RSS-102 Issue 2


DUT PHOTOGRAPHS



Radio with Boom-Microphone Headset Audio Accessory



Radio with Speaker-Microphone Audio Accessory

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 47 of 53

DUT PHOTOGRAPHS

Speaker-Microphone Antenna Version



Front Side



Top end




Left Side



Right Side



Bottom end

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure	SAR	FCC 47 CFR §2.1093
				IC RSS-102 Issue 2

DUT PHOTOGRAPHS

Speaker-Microphone Antenna Version




Speaker-Microphone with Stubby Antenna




Left Side with Stubby Antenna



Right Side with Stubby Antenna


Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 49 of 53


	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

DUT PHOTOGRAPHS

Handheld Radio Transceiver & Speaker-Microphone Antenna Version



Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 50 of 53

	Date of Evaluation:	March 27, 2006	Document Serial No.:	SV835B-032706-R1	
	Evaluation Type:	System Validation	Validation Dipole:	835 MHz	Body

835 MHz SYSTEM VALIDATION DIPOLE

Type:

835 MHz Validation Dipole

Asset Number:

00022

Serial Number:

411

Place of Validation:

Celltech Labs Inc.

Date of Validation:

March 27, 2006


Celltech Labs Inc. hereby certifies that the 835 MHz System Validation (Body) was performed on the date indicated above.

Performed by:

Sean Johnston

Approved by:

Spencer Watson


	Date of Evaluation:	March 27, 2006	Document Serial No.:	SV835B-032706-R1	
	Evaluation Type:	System Validation	Validation Dipole:	835 MHz	Body

1. Validation Dipole Construction & Electrical Characteristics



The validation dipole was constructed in accordance with the IEEE Standard “Annex G (informative) Reference dipoles for use in system validation”. The electrical properties were measured using an HP 8753ET Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 15.0mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:

Feed point impedance at 835MHz $\text{Re}\{Z\} = 47.627\Omega$
 $\text{Im}\{Z\} = -0.67188\Omega$

Return Loss at 835MHz -31.954dB

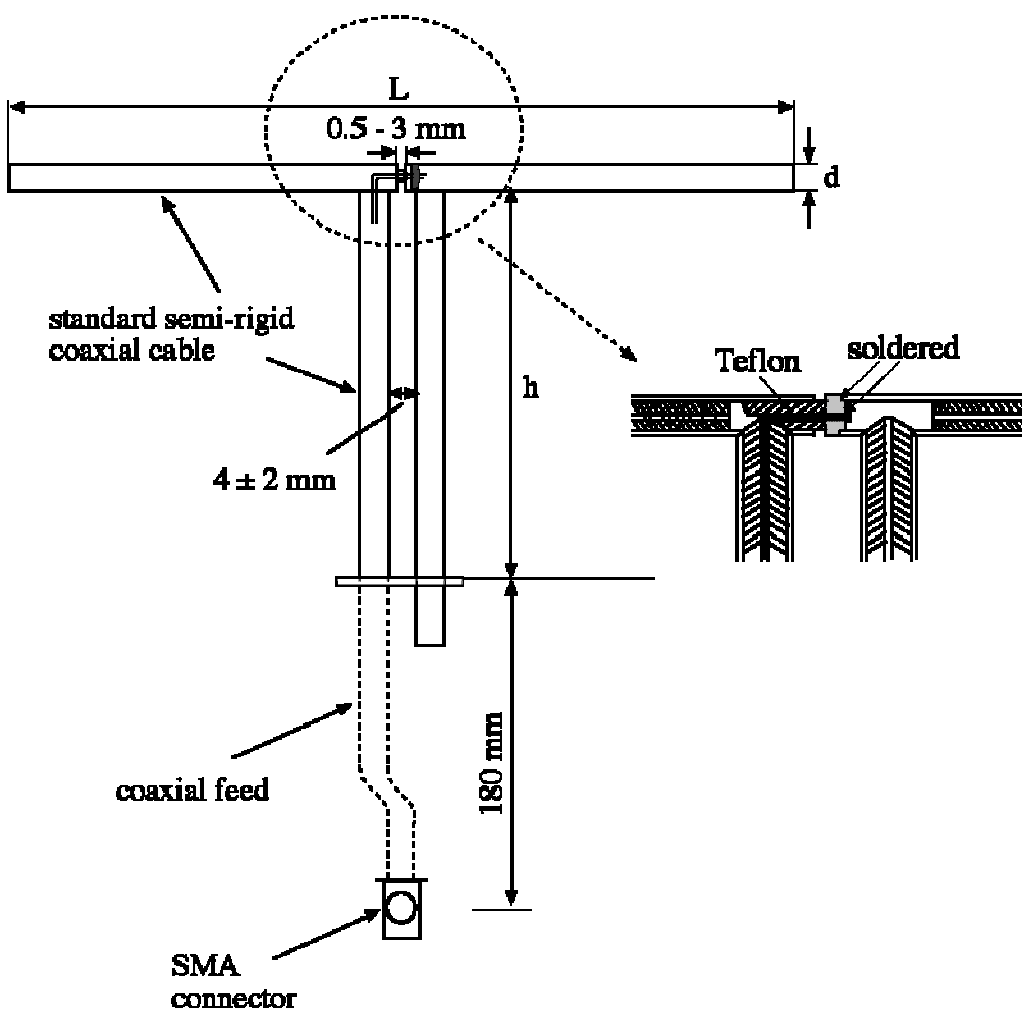

2. Validation Dipole VSWR Data

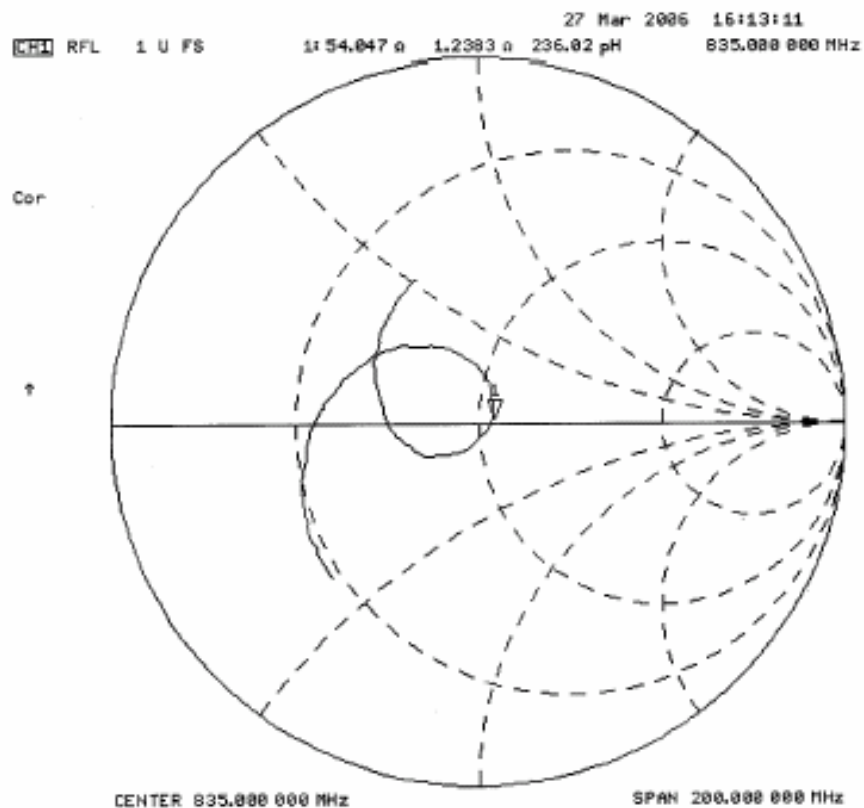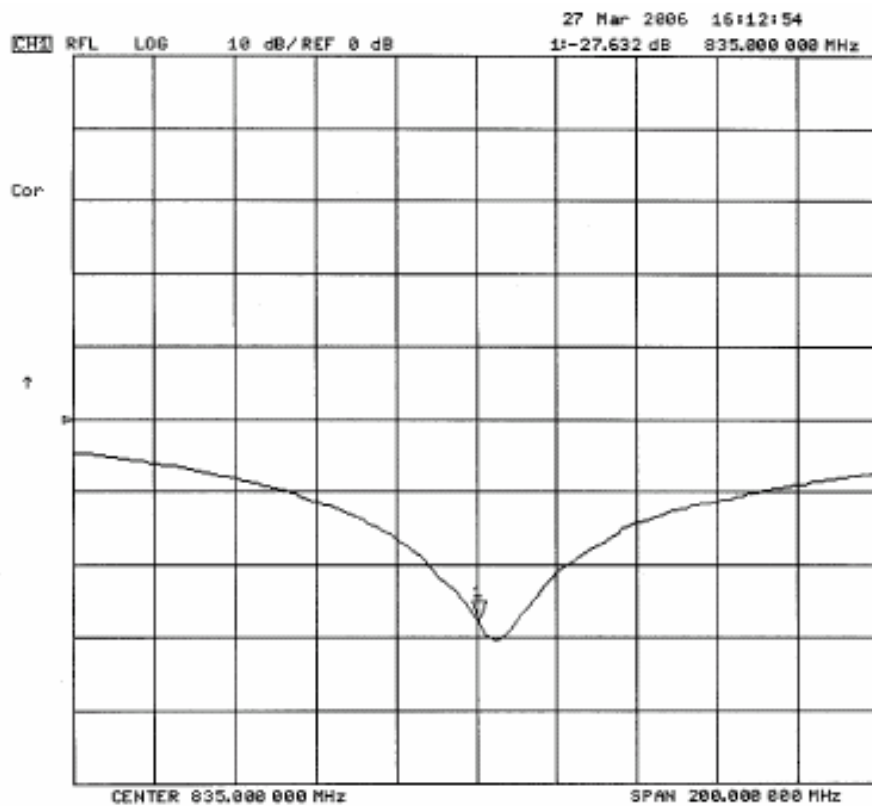


3. Validation Dipole Dimensions

Frequency (MHz)	L (mm)	h (mm)	d (mm)
300	420.0	250.0	6.2
450	288.0	167.0	6.2
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.8	30.6	3.6
3000	41.5	25.0	3.6

4. Validation Phantom


The validation phantom is the SAM (Specific Anthropomorphic Mannequin) phantom manufactured by Schmid & Partner Engineering AG. The SAM phantom is a Fiberglass shell integrated in a wooden table. The shape of the shell corresponds to the phantom defined by SCC34-SC2. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness: 2.0 ± 0.1 mm
Filling Volume: Approx. 25 liters
Dimensions: 50 cm (W) x 100 cm (L)

	Date of Evaluation:	March 27, 2006	Document Serial No.:	SV835B-032706-R1	
	Evaluation Type:	System Validation	Validation Dipole:	835 MHz	Body


5. 835 MHz System Validation Setup



	Date of Evaluation:	March 27, 2006	Document Serial No.:	SV835B-032706-R1	
	Evaluation Type:	System Validation	Validation Dipole:	835 MHz	Body

6. 835 MHz Validation Dipole Setup



	Date of Evaluation:	March 27, 2006	Document Serial No.:	SV835B-032706-R1	
	Evaluation Type:	System Validation	Validation Dipole:	835 MHz	Body

7. Measurement Conditions


The SAM phantom was filled with 835 MHz body tissue simulant with the following parameters:

Relative Permittivity: 53.7 (-2.7% from target)
 Conductivity: 0.94 mho/m (-3% from target)
 Fluid Temperature: 20.8 °C
 Fluid Depth: ≥ 15.0 cm

Environmental Conditions:
 Ambient Temperature: 22.6 °C
 Barometric Pressure: 101.8 kPa
 Humidity: 30 %


The 835 MHz body tissue simulant consisted of the following ingredients:

Ingredient	Percentage by weight
Water	53.79%
Sugar	45.13%
Salt	0.98%
Dowicil 75	0.10%
Target Dielectric Parameters at 22 °C	$\epsilon_r = 55.2 (+/- 5\%)$ $\sigma = 0.97 \text{ S/m } (+/- 5\%)$


	Date of Evaluation:	March 27, 2006	Document Serial No.:	SV835B-032706-R1	
	Evaluation Type:	System Validation	Validation Dipole:	835 MHz	Body

8. SAR Measurement

Measurements were made at the planar section of the SAM phantom using a dosimetric E-field probe ET3DV5 (S/N: 1590, conversion factor 6.47). The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the following procedures.

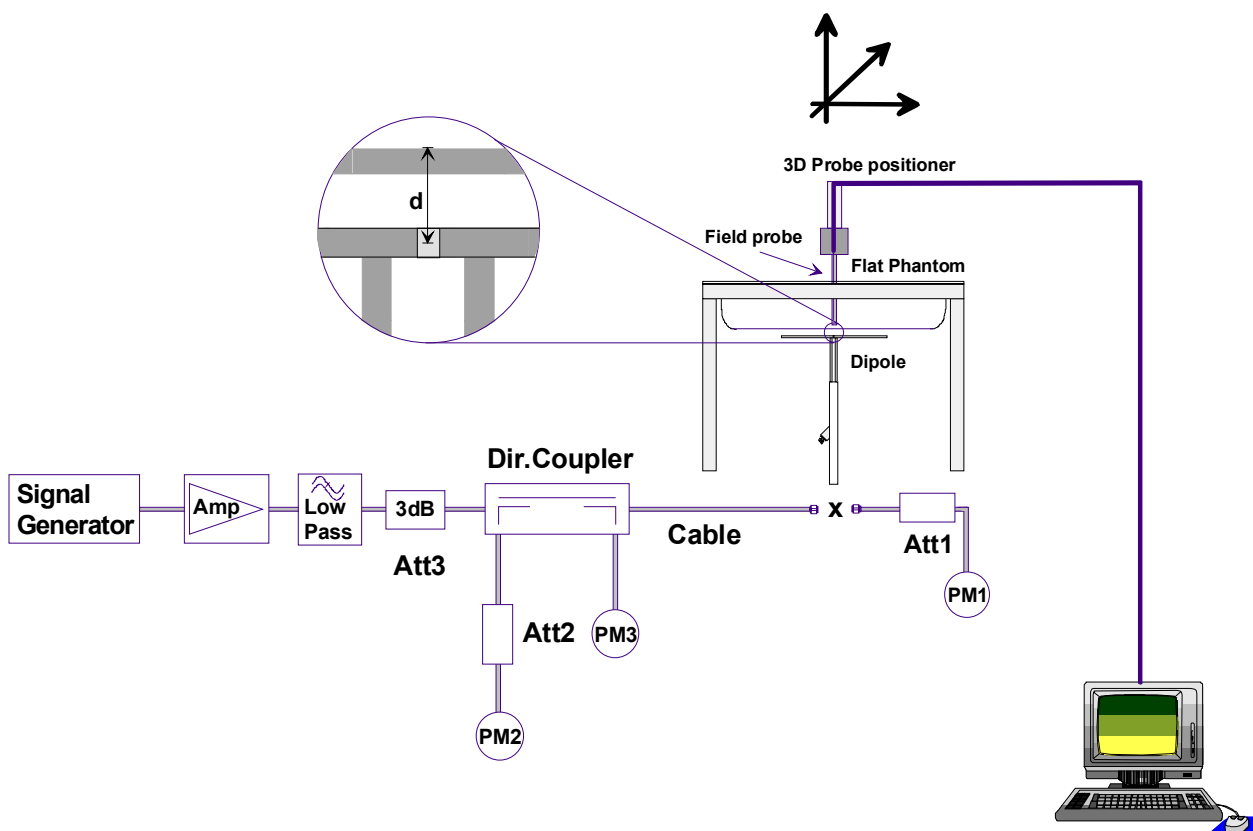

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

	Date of Evaluation:	March 27, 2006	Document Serial No.:	SV835B-032706-R1	
	Evaluation Type:	System Validation	Validation Dipole:	835 MHz	Body

9. Validation Dipole SAR Test Results


Ten SAR measurements were performed in order to achieve repeatability and to establish an average target value (W/kg).

Validation Measurement	SAR @ 0.25W Input averaged over 1g	SAR @ 1W Input averaged over 1g	SAR @ 0.25W Input averaged over 10g	SAR @ 1W Input averaged over 10g	Max SAR @ 0.25W Input
Test 1	2.46	9.84	1.62	6.48	2.65
Test 2	2.46	9.84	1.62	6.48	2.66
Test 3	2.46	9.84	1.62	6.48	2.67
Test 4	2.47	9.88	1.62	6.48	2.68
Test 5	2.43	9.72	1.60	6.40	2.64
Test 6	2.43	9.72	1.59	6.36	2.63
Test 7	2.42	9.68	1.59	6.36	2.59
Test 8	2.46	9.84	1.62	6.48	2.64
Test 9	2.47	9.88	1.62	6.48	2.65
Test10	2.45	9.80	1.62	6.48	2.61
Average SAR	2.451	9.804	1.612	6.448	2.642

IEEE Target SAR @ 1 Watt Input averaged over 1 gram (W/kg)		Measured SAR @ 1 Watt Input averaged over 1 gram (W/kg)	Deviation from Target (%)	IEEE Target SAR @ 1 Watt Input averaged over 10 grams (W/kg)		Measured SAR @ 1 Watt Input averaged over 10 grams (W/kg)	Deviation from Target (%)
9.71	+/- 10%	9.804	+1.0%	6.38	+/- 10%	6.448	+1.1%

Dipole Type	Distance [mm]	Frequency [MHz]	SAR (1g) [W/kg]	SAR (10g) [W/kg]	SAR (peak) [W/kg]
D300V2	15	300	3.02	2.06	4.36
D450V2	15	450	5.01	3.36	7.22
D835V2	15	835	9.71	6.38	14.1
D900V2	15	900	11.1	7.17	16.3
D1450V2	10	1450	29.6	16.6	49.8
D1500V2	10	1500	30.8	17.1	52.1
D1640V2	10	1640	34.4	18.7	59.4
D1800V2	10	1800	38.5	20.3	67.5
D1900V2	10	1900	39.8	20.8	69.6
D2000V2	10	2000	40.9	21.2	71.5
D2450V2	10	2450	51.2	23.7	97.6
D3000V2	10	3000	61.9	24.8	136.7

Table 32.1: Numerical reference SAR values for SPEAG dipoles and flat phantom filled with body-tissue simulating liquid. Note: All SAR values normalized to 1 W forward power.

	Date of Evaluation:	March 27, 2006	Document Serial No.:	SV835B-032706-R1	
	Evaluation Type:	System Validation	Validation Dipole:	835 MHz	Body

835 MHz Dipole System Validation (Body) - March 27, 2006

DUT: Dipole 835 MHz; Model: D835V2; Serial: 411; Calibrated: 03/27/2006
Ambient Temp: 22.6 °C; Fluid Temp: 20.8 °C; Barometric Pressure: 101.8 kPa; Humidity: 30%
Communication System: CW
Frequency: 835 MHz; Duty Cycle: 1:1
Medium: M835 ($\sigma = 0.94$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³)
- Probe: ET3DV6 - SN1590; ConvF(6.47, 6.47, 6.47); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

835 MHz Dipole System Validation/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

835 MHz Dipole System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 55.0 V/m; Power Drift = 0.027 dB
SAR(1 g) = 2.46 mW/g; SAR(10 g) = 1.62 mW/g
Maximum value of SAR (measured) = 2.65 mW/g

835 MHz Dipole System Validation/Zoom Scan 3 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.8 V/m; Power Drift = 0.029 dB
SAR(1 g) = 2.46 mW/g; SAR(10 g) = 1.62 mW/g
Maximum value of SAR (measured) = 2.66 mW/g

835 MHz Dipole System Validation/Zoom Scan 4 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.5 V/m; Power Drift = 0.075 dB
SAR(1 g) = 2.46 mW/g; SAR(10 g) = 1.62 mW/g
Maximum value of SAR (measured) = 2.67 mW/g

835 MHz Dipole System Validation/Zoom Scan 5 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.9 V/m; Power Drift = 0.010 dB
SAR(1 g) = 2.47 mW/g; SAR(10 g) = 1.62 mW/g
Maximum value of SAR (measured) = 2.68 mW/g

835 MHz Dipole System Validation/Zoom Scan 6 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 55.0 V/m; Power Drift = -0.087 dB
SAR(1 g) = 2.43 mW/g; SAR(10 g) = 1.6 mW/g
Maximum value of SAR (measured) = 2.64 mW/g


835 MHz Dipole System Validation/Zoom Scan 7 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.6 V/m; Power Drift = -0.017 dB
SAR(1 g) = 2.43 mW/g; SAR(10 g) = 1.59 mW/g
Maximum value of SAR (measured) = 2.63 mW/g

835 MHz Dipole System Validation/Zoom Scan 8 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.1 V/m; Power Drift = -0.023 dB
SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.59 mW/g
Maximum value of SAR (measured) = 2.59 mW/g


835 MHz Dipole System Validation/Zoom Scan 9 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.6 V/m; Power Drift = -0.004 dB
SAR(1 g) = 2.46 mW/g; SAR(10 g) = 1.62 mW/g
Maximum value of SAR (measured) = 2.64 mW/g


835 MHz Dipole System Validation/Zoom Scan 10 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.5 V/m; Power Drift = 0.012 dB
SAR(1 g) = 2.47 mW/g; SAR(10 g) = 1.62 mW/g
Maximum value of SAR (measured) = 2.65 mW/g

835 MHz Dipole System Validation/Zoom Scan 11 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.5 V/m; Power Drift = -0.005 dB
SAR(1 g) = 2.45 mW/g; SAR(10 g) = 1.62 mW/g
Maximum value of SAR (measured) = 2.61 mW/g

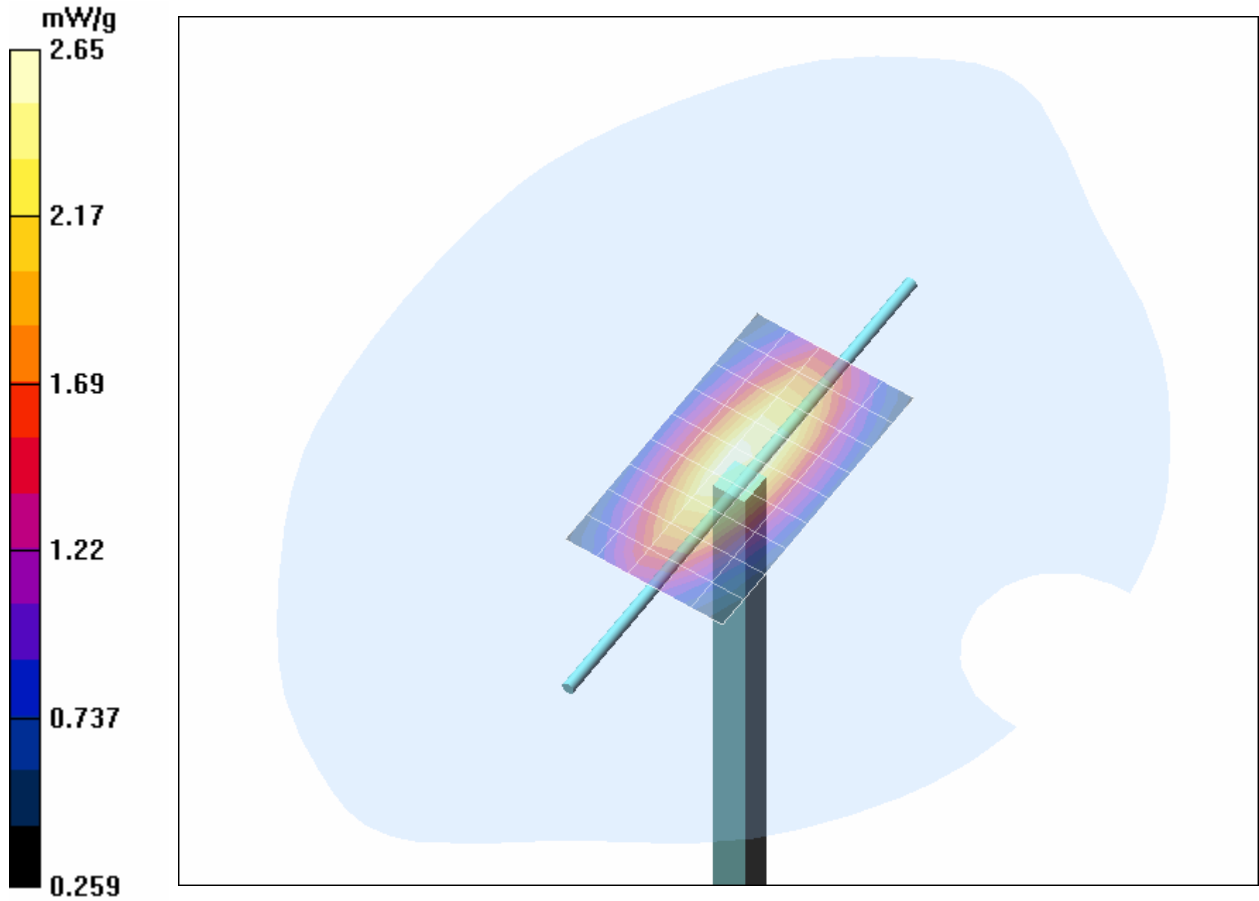

1 g average of 10 measurements: 2.451 mW/g
10 g average of 10 measurements: 1.612 mW/g

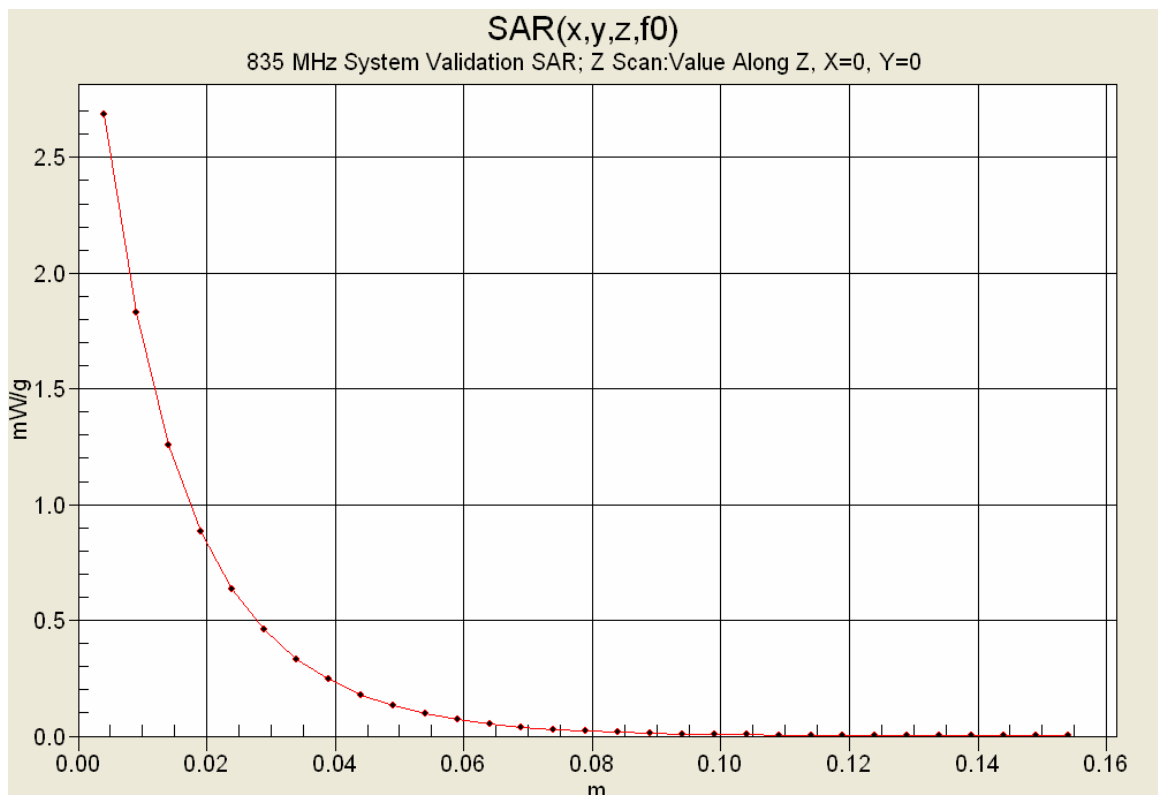

	Date of Evaluation:	March 27, 2006	Document Serial No.:	SV835B-032706-R1	
	Evaluation Type:	System Validation	Validation Dipole:	835 MHz	Body

10. Measured Fluid Dielectric Parameters

835 MHz System Validation (Body)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Mon 27/Mar/2006

Frequency(GHz)

FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma


FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma


Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7350	55.59	0.96	54.23	0.86
0.7450	55.55	0.96	54.00	0.87
0.7550	55.51	0.96	54.00	0.88
0.7650	55.47	0.96	54.04	0.89
0.7750	55.43	0.97	53.97	0.90
0.7850	55.39	0.97	54.01	0.90
0.7950	55.36	0.97	53.96	0.91
0.8050	55.32	0.97	53.85	0.92
0.8150	55.28	0.97	53.79	0.93
0.8250	55.24	0.97	53.69	0.94
0.8350	55.20	0.97	53.68	0.94
0.8450	55.17	0.98	53.35	0.95
0.8550	55.14	0.99	53.18	0.96
0.8650	55.11	1.01	53.25	0.98
0.8750	55.08	1.02	53.26	0.98
0.8850	55.05	1.03	53.11	0.99
0.8950	55.02	1.04	53.11	1.00
0.9050	55.00	1.05	52.96	1.01
0.9150	55.00	1.06	52.91	1.02
0.9250	54.98	1.06	52.93	1.03
0.9350	54.96	1.07	52.58	1.03

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

APPENDIX F - PROBE CALIBRATION

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver		Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 52 of 53



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech Labs**

Certificate No: **ET3-1387_Mar06**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1387**

Calibration procedure(s) **QA CAL-01.v5**
Calibration procedure for dosimetric E-field probes

Calibration date: **March 16, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41495277	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41498087	3-May-05 (METAS, No. 251-00466)	May-06
Reference 3 dB Attenuator	SN: S5054 (3c)	11-Aug-05 (METAS, No. 251-00499)	Aug-06
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-05 (METAS, No. 251-00467)	May-06
Reference 30 dB Attenuator	SN: S5129 (30b)	11-Aug-05 (METAS, No. 251-00500)	Aug-06
Reference Probe ES3DV2	SN: 3013	2-Jan-06 (SPEAG, No. ES3-3013_Jan06)	Jan-07
DAE4	SN: 654	2-Feb-06 (SPEAG, No. DAE4-654_Feb06)	Feb-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov 06

Calibrated by: **Katja Pokovic** **Technical Manager**

Approved by: **Niels Kuster** **Quality Manager**

Signature

Issued: March 16, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1387

Manufactured:	September 21, 1999
Last calibrated:	March 18, 2005
Recalibrated:	March 16, 2006

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1387**Sensitivity in Free Space^A****Diode Compression^B**

NormX	1.62 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	92 mV
NormY	1.72 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	92 mV
NormZ	1.72 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	92 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	9.3	5.0
SAR _{be} [%]	With Correction Algorithm	0.1	0.2

Sensor Offset

Probe Tip to Sensor Center **2.7 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

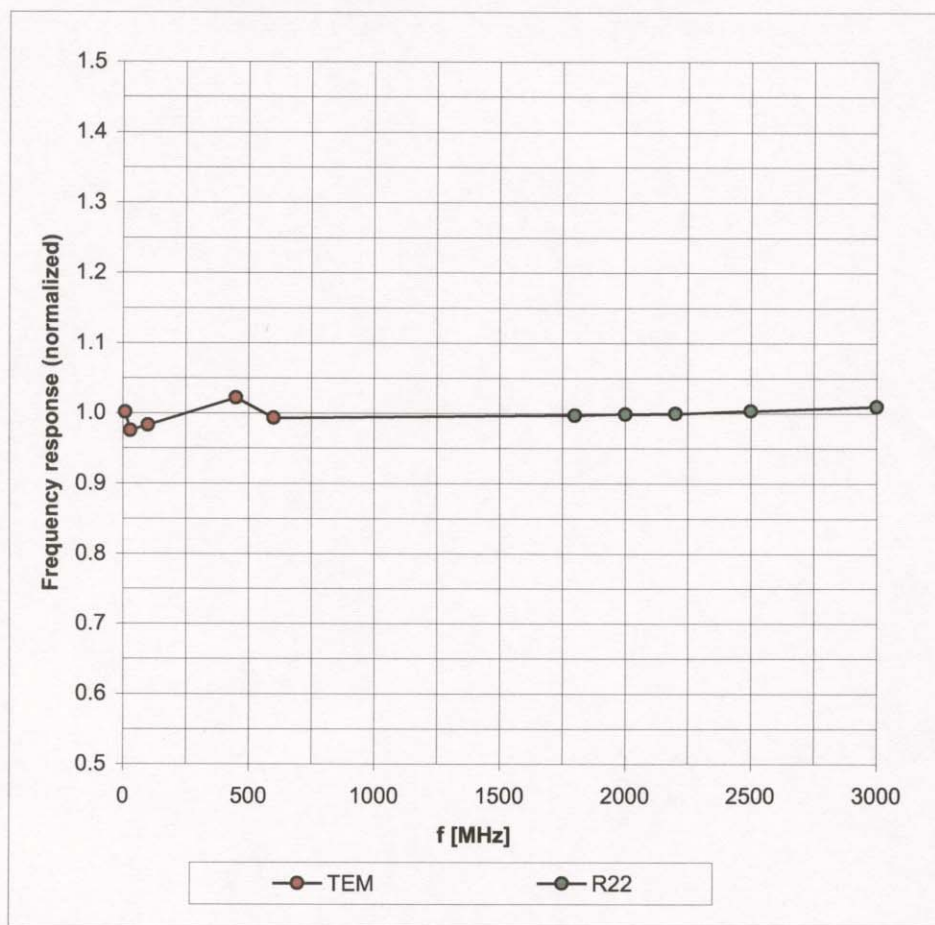


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

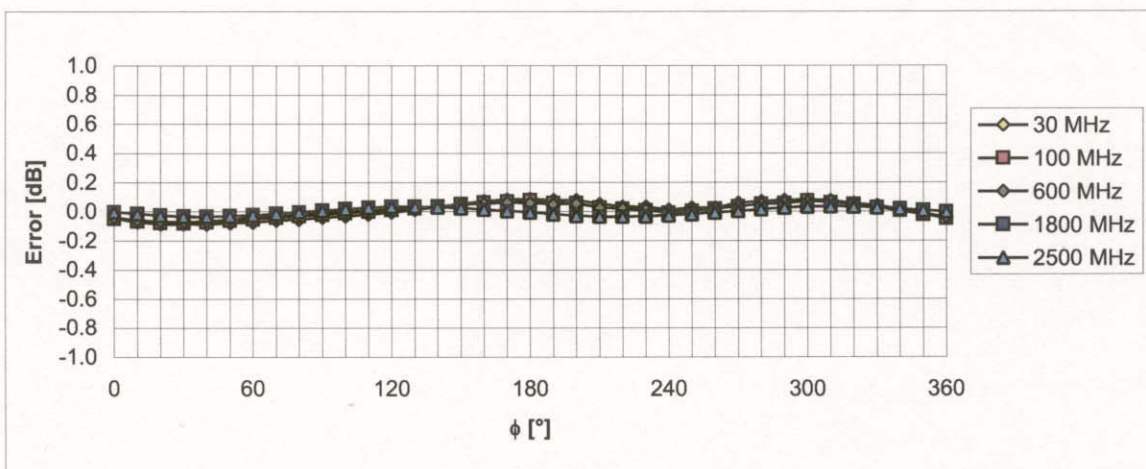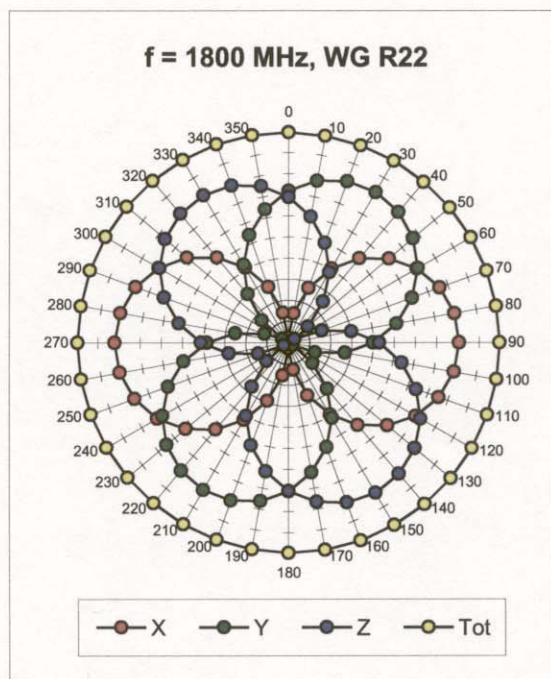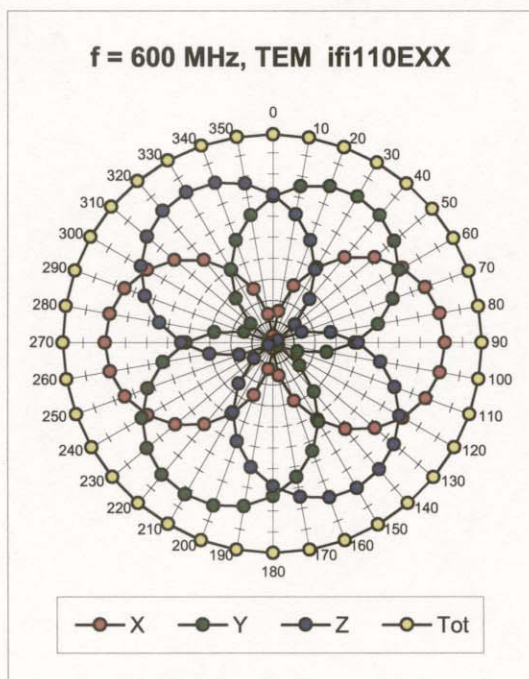



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$)

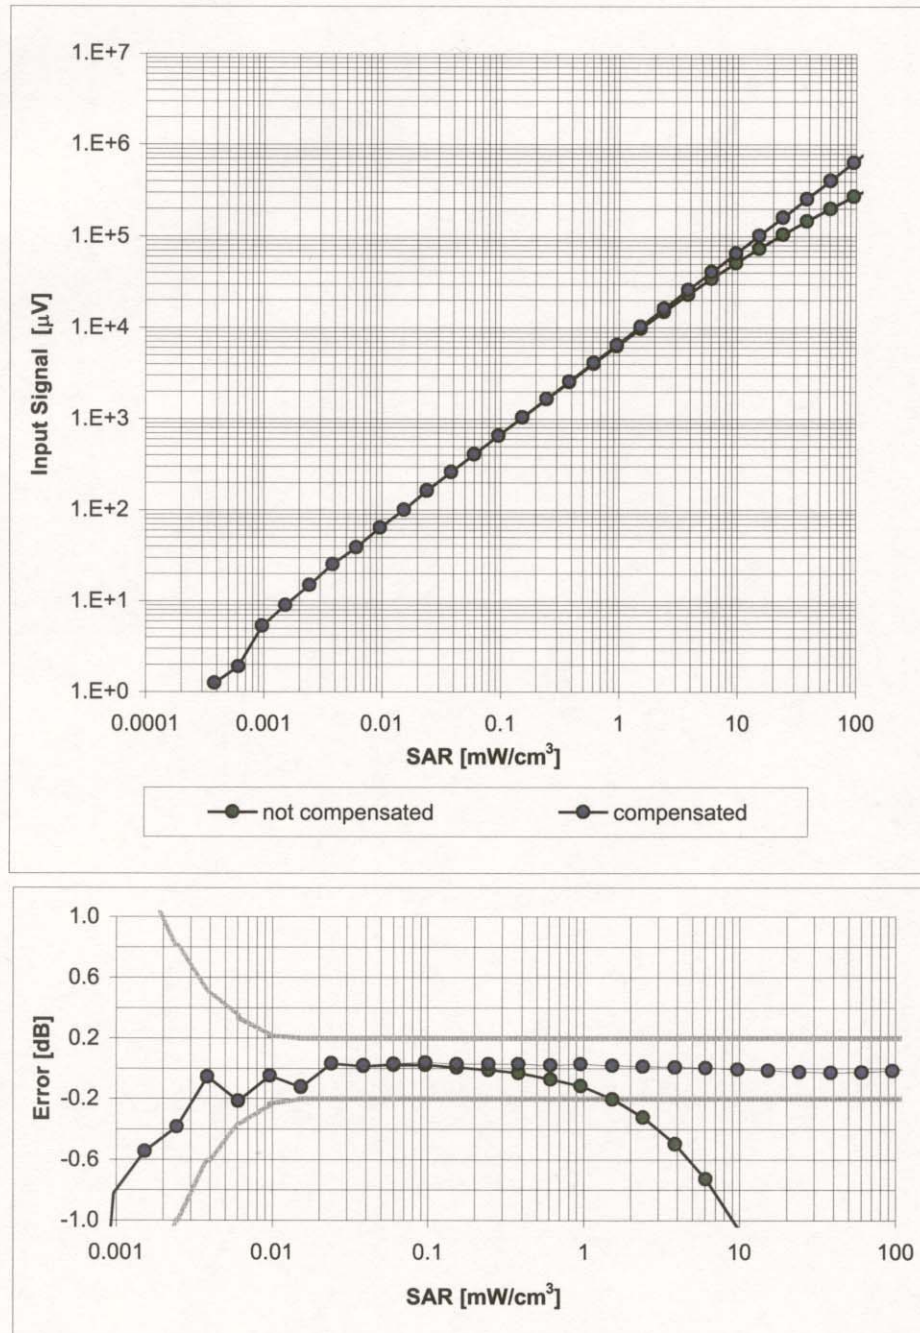

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

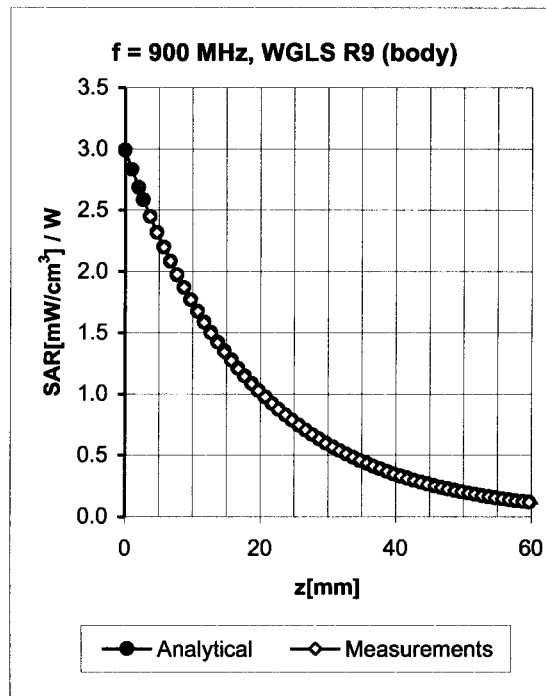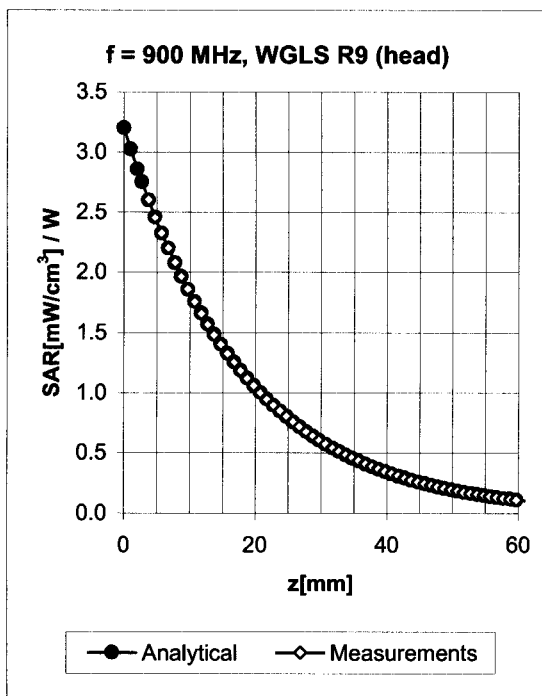


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.62	1.86	6.35 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.59	1.97	6.04 ± 11.0% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ , θ), $f = 900$ MHz

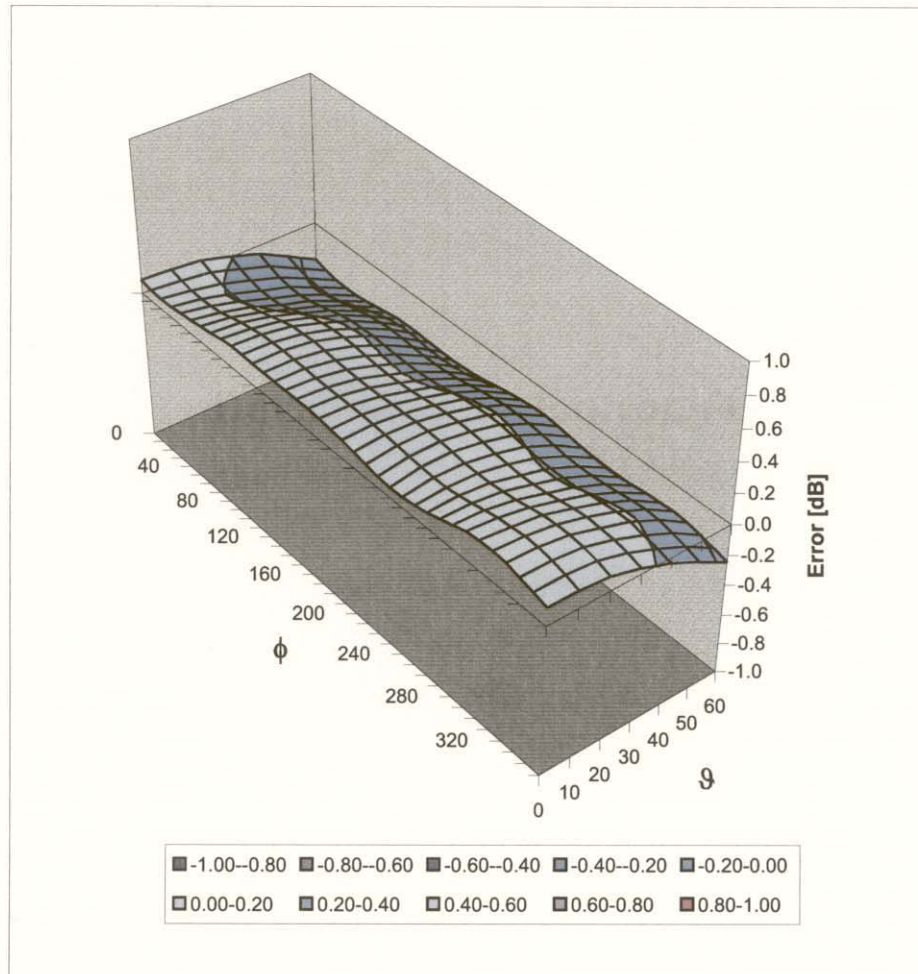

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

Additional Conversion Factors

for Dosimetric E-Field Probe

Type:

ET3DV6

Serial Number:

1387

Place of Assessment:

Zurich

Date of Assessment:


March 18, 2006

Probe Calibration Date:

March 16, 2006

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz or at 1800 MHz.

Assessed by:




Dosimetric E-Field Probe ET3DV6 SN:1387

Conversion factor (\pm standard deviation)


150 \pm 50 MHz	ConvF	8.6 \pm 10%	$\epsilon_r = 52.3 \pm 5\%$ $\sigma = 0.76 \pm 5\%$ mho/m (head tissue)
150 \pm 50 MHz	ConvF	8.2 \pm 10%	$\epsilon_r = 61.9 \pm 5\%$ $\sigma = 0.80 \pm 5\%$ mho/m (body tissue)
300 \pm 50 MHz	ConvF	7.8 \pm 9%	$\epsilon_r = 45.3 \pm 5\%$ $\sigma = 0.87 \pm 5\%$ mho/m (head tissue)
450 \pm 50 MHz	ConvF	7.4 \pm 8%	$\epsilon_r = 43.5 \pm 5\%$ $\sigma = 0.87 \pm 5\%$ mho/m (head tissue)
450 \pm 50 MHz	ConvF	7.3 \pm 8%	$\epsilon_r = 56.7 \pm 5\%$ $\sigma = 0.94 \pm 5\%$ mho/m (body tissue)
750 \pm 50 MHz	ConvF	6.6 \pm 7%	$\epsilon_r = 41.8 \pm 5\%$ $\sigma = 0.89 \pm 5\%$ mho/m (head tissue)
750 \pm 50 MHz	ConvF	6.4 \pm 7%	$\epsilon_r = 55.4 \pm 5\%$ $\sigma = 0.96 \pm 5\%$ mho/m (body tissue)
1925 \pm 50 MHz	ConvF	5.0 \pm 7%	$\epsilon_r = 39.8 \pm 5\%$ $\sigma = 1.48 \pm 5\%$ mho/m (head tissue)
1925 \pm 50 MHz	ConvF	4.7 \pm 7%	$\epsilon_r = 53.2 \pm 5\%$ $\sigma = 1.60 \pm 5\%$ mho/m (body tissue)

Important Note:

For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.
 Please see also Section 4.7 of the DASY4 Manual.

	Test Report Serial No.:	060206ATH-T759-S90F	Test Report Revision No.:	Revision 1.0
	Date(s) of Evaluation:	June 21, 2006	Test Report Issue Date:	August 15, 2006
	Description of Tests:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

APPENDIX G - SAM PHANTOM CERTIFICATE OF CONFORMITY

Company:	E.F. JOHNSON CO.	Model:	242-5172	FCC ID:	ATH2425171	IC:	933B-2425171	
DUT Type:	Portable FM PTT Radio Transceiver			Freq.:	762-776 / 792-806 / 806-824 / 851-869 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 53 of 53

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 BA
Series No	TP-1002 and higher
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland

Tests

The series production process used allows the limitation to test of first articles.
Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT'IS CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz – 3 GHz Relative permittivity < 5 Loss tangent < 0.05.	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9


(*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date 18.11.2001

Signature / Stamp



**Schmid & Partner
Engineering AG**



Zeughausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 79