



FCC EVALUATION REPORT FOR CERTIFICATION

Manufacturer: Ohsung Electronics Co., Ltd.

Date of Issue: January 26, 2017

#181 Gongdan-dong, Gumi-si, Gyeongsangbuk-Do

Order Number: GETEC-C1-16-468

South Korea

Test Report Number: GETEC-E3-16-062

Attn: Mr. Hak Ki, Kim / General Manager

Test Site: GUMI UNIVERSITY EMC CENTER

(Test firm Registration Number: 269701)

FCC ID. : OZ5URCHSR200

Applicant : Ohsung Electronics Co., Ltd.

Rule Part(s) : FCC Part 15 Subpart C-Intentional Radiator § 15.247

Test Method : ANSI C63.10 (2013)

Equipment Class : Digital Transmission System(DTS)

EUT Type : RF Remote Controller

Type of Authority : Certification

Model Name : HS-R200

Trade Mark : URC

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10 (2013)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the vest of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,

Soon-Hoon Jeong, Senior Engineer
GUMI UNIVERSITY EMC CENTER

Jae-Hoon Jeong, Technical Manager
GUMI UNIVERSITY EMC CENTER



CONTENTS

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
3. PRODUCT INFORMATION	6
3.1 DESCRIPTION OF EUT.....	6
3.2 DEFINITION OF MODELS	6
3.3 SUPPORT EQUIPMENT / CABLES USED	7
3.4 MODIFICATION ITEM(S)	7
4. ANTENNA REQUIREMENT - §15.203	8
4.1 DESCRIPTION OF ANTENNA.....	8
5. DESCRIPTION OF TESTS.....	8
5.1 TEST CONDITION.....	8
6. REFERENCES STANDARDS	8
7. SUMMARY OF TEST RESULTS	9
8. 6 DB BANDWIDTH MEASUREMENT	10
8.1 OPERATING ENVIRONMENT	10
8.2 TEST SET-UP (LAYOUT)	10
8.3 LIMIT	10
8.4 TEST EQUIPMENT USED.....	10
8.5 TEST TEST PROCEDURE	10
8.6 TEST RESULT	11
9. CONDUCTED MAXIMUM PEAK OUTPUT POWER MEASUREMENT	18
9.1 OPERATING ENVIRONMENT	18
9.2 TEST SET-UP (LAYOUT)	18
9.3 LIMIT	18
9.4 TEST EQUIPMENT USED.....	18
9.5 TEST PROCEDURE	18
9.6 TEST RESULT	19
10. POWER SPECTRAL DENSITY MEASUREMENT	20
10.1 OPERATING ENVIRONMENT	20
10.2 TEST SET-UP (LAYOUT)	20
10.3 LIMIT	20
10.4 TEST EQUIPMENT USED.....	20
10.5 TEST PROCEDURE	20
10.6 TEST RESULT	21
11. CONDUCTED SPURIOUS EMISSION & OUT OF BAND EMISSION	28
11.1 OPERATING ENVIRONMENT.....	28
11.2 TEST SET-UP (LAY-OUT).....	28
11.3 LIMIT	28
11.4 TEST EQUIPMENT USED	28
11.5 TEST PROCEDURE.....	28
11.6 TEST RESULT	29



12. AC POWER LINE CONDUCTED EMISSION	38
12.1 OPERATING ENVIRONMENT	39
12.2 TEST SET-UP	39
12.3 MEASUREMENT UNCERTAINTY.....	39
12.4 LIMIT	40
12.5 TEST EQUIPMENT USED.....	40
12.6 TEST DATA FOR CONDUCTED EMISSION	40
13. RADIATED SPURIOUS & RESTRICTED BAND EDGE EMISSION.....	44
13.1 OPERATING ENVIRONMENT	45
13.2 TEST SET-UP.....	45
13.3 MEASUREMENT UNCERTAINTY	45
13.4 LIMIT	46
13.5 TEST EQUIPMENT USED.....	46
13.6 TEST DATA FOR RADIATED SPURIOUS EMISSION.....	47
13.7 TEST DATA FOR RADIATED RESTRICTED BAND EDGE EMISSION	51
14. SAMPLE CALCULATIONS.....	52
14.1 EXAMPLE 1 :	52
14.2 EXAMPLE 2 :	52
15. RECOMMENDATION & CONCLUSION.....	53
 APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – LABELLING	
APPENDIX C – BLOCK DIAGRAM	
APPENDIX D – SCHEMATIC DIAGRAM	
APPENDIX E – TEST SETUP PHOTOGRAPH	
APPENDIX F – EXTERNAL PHOTOGRAPH	
APPENDIX G – INTERNAL PHOTOGRAPH	
APPENDIX H – USER’S MANUAL	
APPENDIX I – OPERATIONAL DESCRIPTION	
APPENDIX J – ANTENNA SPECIFICATION	
APPENDIX K – PART LIST	
APPENDIX L – RF EXPOSURE EVALUATION	



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: Ohsung Electronics Co., Ltd.

Applicant Address: #141 Gongdan-dong, Gumi-si, Gyeongbuk, Republic of Korea

Manufacturer: Ohsung Electronics Co., Ltd.

Manufacturer Address: #141 Gongdan-dong, Gumi-si, Gyeongbuk, Republic of Korea

Contact Person: Hak Ki, Kim / General Manager

Telephone Number: +82-54-468-7281 **Fax Number:** +82-54-461-8368

- **FCC ID.** OZ5URCHSR200
- **Equipment Class** Digital Transmission System (DTS)
- **EUT Type** RF Remote Controller
- **Model Name** HS-R200
- **Rule Part(s)** FCC Part 15 Subpart C-Intentional Radiator § 15.247
- **Test Method** ANSI C63.10 (2013)
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.10 (2013), KDB558074 D01 DTS Meas Guidance v03r05(April 8,2016)
- **Dates of Test** December 15 ~ December 29, 2016
- **Place of Test** GUMI UNIVERSITY EMC CENTER (FCC Test firm Registration No.: 269701)
37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea
- **Test Report Number** GETEC-E3-16-062
- **Dates of Issue** December 24, 2016

EUT Type: RF Remote Controller

FCC ID.: OZ5URCHSR200





2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2009) was used in determining radiated and conducted emissions emanating from **Ohsung Electronics Co., Ltd. RF Remote Controller (Model name: HS-R200)**

These measurement tests were conducted at **GUMI UNIVERSITY EMC CENTER**.

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Gyeongnam 641-713, Korea

This test site is one of the highest point of GUMI UNIVERSITY at about 200 kilometers away from Seoul city and 40 kilometers away from Daejeon city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.10 (2013)

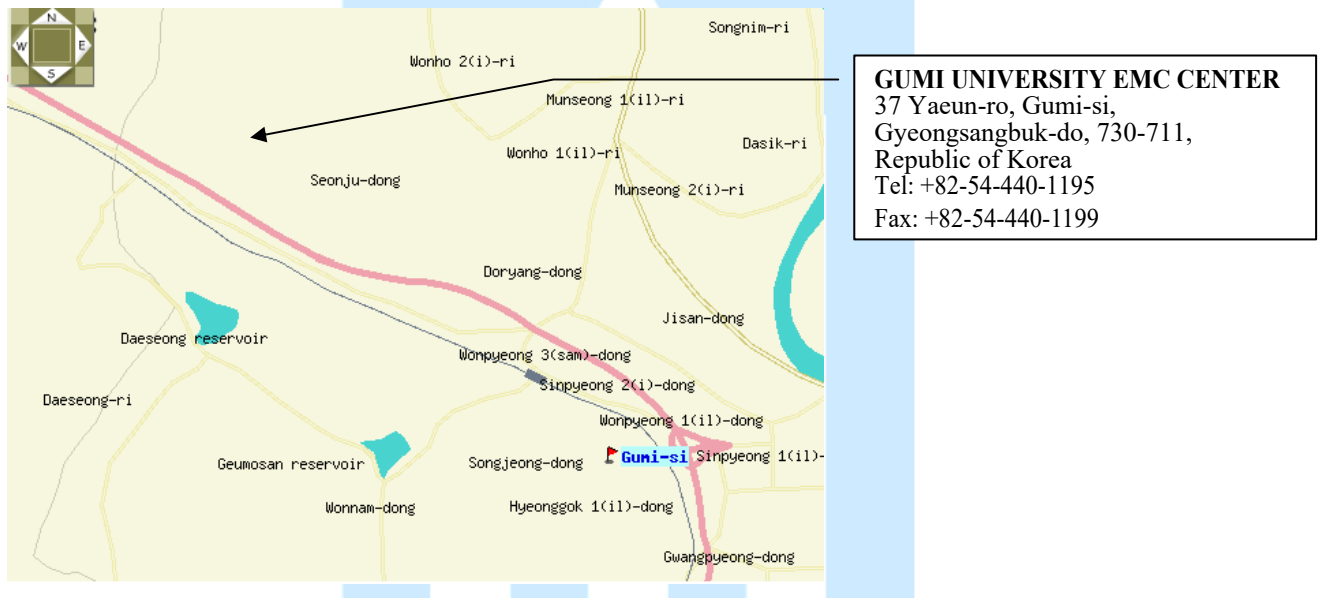


Fig 1. The map above shows the Gumi University in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **Ohsung Electronics Co., Ltd. RF Remote Controller**
(Model Name: HS-R200) FCC ID.: OZ5URCHSR200

- Equipment	: RF Remote Controller
- Model name	: HS-R200
- Brand name	: RF REMOTE CONTROLLER
- Serial number	: Proto type
- Electrical Rating	: DC 3.7 V (Lithium Ion Battery)
- Manufacturer	: Ohsung electronics Co., Ltd.
- Channel Separations	: 5 MHz
- Type of Modulation	: DSSS, OFDM
- Channel frequency	: 2 412 MHz ~ 2 462 MHz
- Number of channel	: 11
- Type of chain	: One
- Antenna specification	: Manufacturer: Ohsung Electronics Co., Ltd. Antenna type : PCB pattern antenna Gain : 5.42 dBi
- Hardware version	: v0.0.0
- Software version	: v1.2.3.0

3.2 Definition of models

-None.



3.3 Support Equipment / Cables used

3.3.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
Notebook Computer ¹⁾	SAMSUNG	NT-Q45	S/N: CNBA4300168AI00682D5800 FCC ID.: None.
Uart board	Ohsung Electronics Co., Ltd.	Proto type	S/N : None. FCC ID.: None.

Note)

1) The Support Equipment use only setting to the test mode.

3.3.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
RF Remote Controller	Ohsung Electronics CO., LTD.	HS-R200	S/N: None. FCC ID.: None.
AC/DC Adaptor	DEE VAN ENTERPRISE CO LTD	DSA-6PF-05 FUS 050100	S/N: None. FCC ID.: DoC

3.3.3 Used Cable(s)

Cable Name	Condition	Description
AC/DC Adaptor	Connected with EUT and AC/DC Adaptor.	Unshielded. 0.75 m

3.4 Modification Item(s)

-. None

EUT Type: RF Remote Controller

FCC ID.: OZ5URCHSR200





4. Antenna Requirement - §15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

4.1 Description of Antenna

The **Ohsung Electronics Co., Ltd. Remote Controller**, comply with the requirement of §15.203 with a PCB printed antenna permanently attached to the transmitter.

5. Description of tests

5.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used.

The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency: 3.7 V (Lithium Ion Battery) / DC
- Operating condition during the test(s) :
 - Continuous RF transmitting mode with nominal maximum RF output power.
 - Operating channel frequency and modulation technology

Mode	Available channel	Frequency	Modulation Technology
IEEE 802.11b	1 ~ 11	2412 ~ 2462 MHz	DSSS
IEEE 802.11g	1 ~ 11	2412 ~ 2462 MHz	OFDM
IEEE 802.11n	1 ~ 11	2412 ~ 2462 MHz	OFDM

- EUT set condition (RF power setting value)

Test Software version	Channel	RF power setting value
Tera tum v4.8.9	1 ~ 11	7

6. References Standards

- FCC Part 15 (2009) Subpart C-Intentional Radiator §15.247
- ANSI C 63.10 (2013): American National Standard for Testing Unlicensed Wireless Devices
- KDB 558074 D01 DTS meas Guidance v03r05 (April 08, 2016): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247



7. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Result
§15.247(a)(2)	6 dB Bandwidth	Pass
§15.247(b)(3)	Conducted Maximum Peak Output Power	Pass
§15.247(e)	Power Spectral Density	Pass
§15.247(d)	Conducted Out of Band Emission Emissions	Pass
§15.207(a)	AC Power line Conducted Emissions	Pass
§15.205, 15.209	Radiated Spurious Emissions	Pass
§15.247(d), 15.205, 15.209	Radiated Restricted Band Edge	Pass




8. 6 dB Bandwidth Measurement

8.1 Operating environment

Temperature : 23.9 °C
Relative Humidity : 24.3 % R.H.

8.2 Test Set-up (Layout)

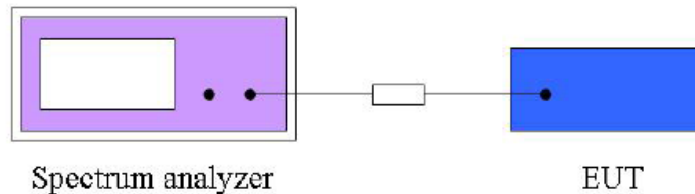

8.3 Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

8.4 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - FSP	Rohde & Schwarz	spectrum Analyzer	101431	Dec. 08, 2017
■ - 56-10	Weinschel	10 dB Attenuator	53184	Apr. 20, 2017

8.5 Test Test Procedure

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



8.6 Test result

- Test Date : December 15, 2016
- Reference Standard : Part 15 Subpart C, Sec. 15.247(a)(2)
- Test Procedure(s) : ANSI C63.10 (2013), KDB558074 D01 DTS Meas Guidance v03r05(April 8,2016)
- Operating Condition : RF transmitting mode (1 ch: 2 412 MHz, 6 ch: 2 437 MHz, 11 ch: 2 462 MHz)
- Power Source : DC 3.7 V

IEEE 802.11b

Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Result
2 412	7.86	0.50	Complies
2 437	7.62	0.50	Complies
2 462	7.92	0.50	Complies


IEEE 802.11g

Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Result
2 412	13.50	0.50	Complies
2 437	13.32	0.50	Complies
2 462	13.62	0.50	Complies

IEEE 802.11n


Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Result
2 412	14.04	0.50	Complies
2 437	15.84	0.50	Complies
2 462	15.84	0.50	Complies

6 dB Bandwidth Plot on Configuration : IEEE 802.11b 1ch

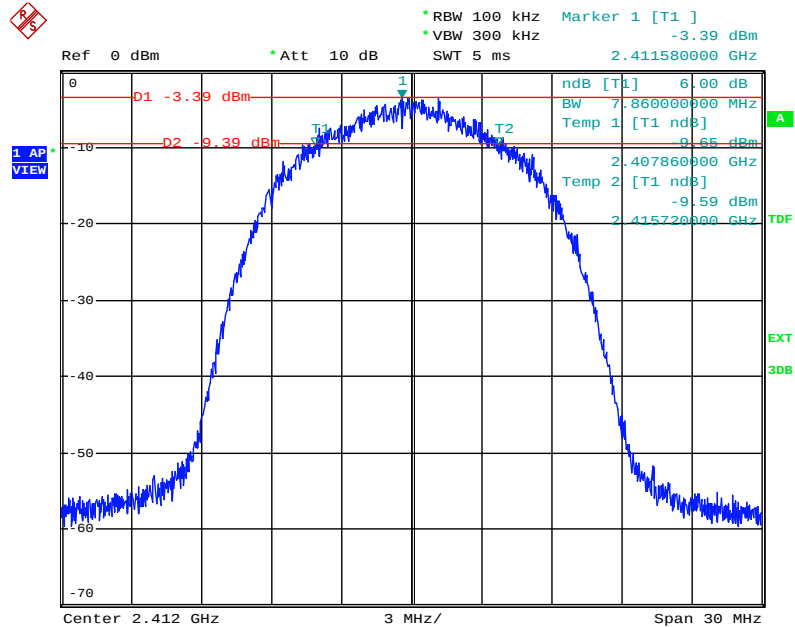

Date: 15.DEC.2016 13:39:01

6 dB Bandwidth Plot on Configuration : IEEE 802.11b 6ch

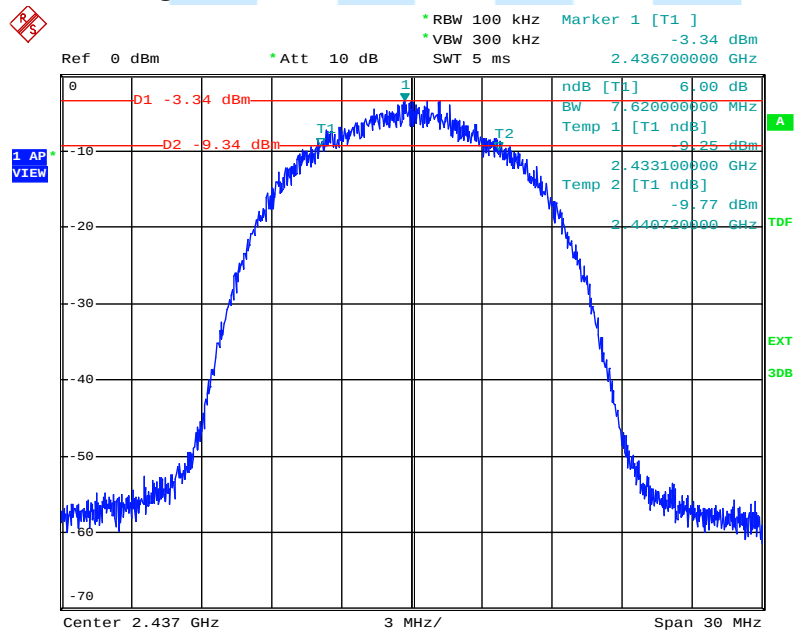

Date: 15.DEC.2016 13:43:58


EUT Type: RF Remote Controller

FCC ID.: OZ5URCHSR200






6 dB Bandwidth Plot on Configuration : IEEE 802.11b 11ch

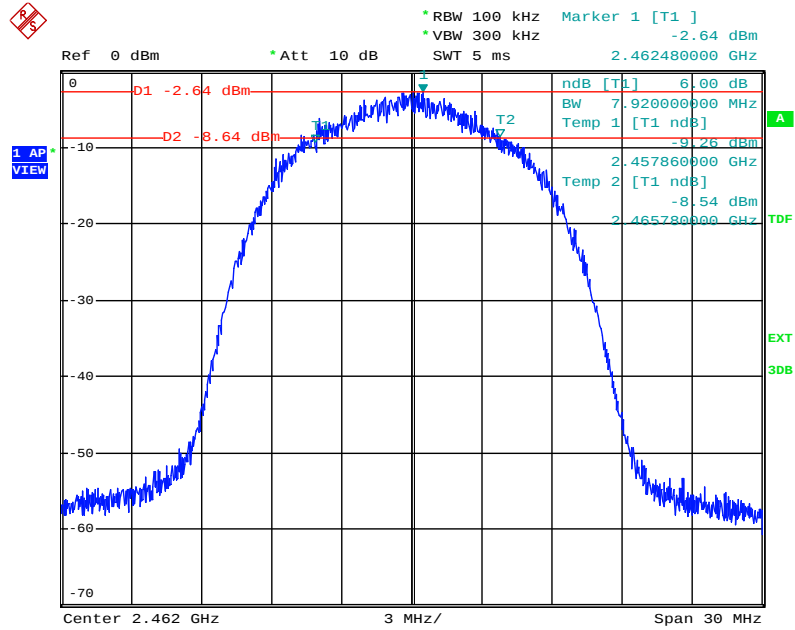


Date: 15.DEC.2016 13:45:35

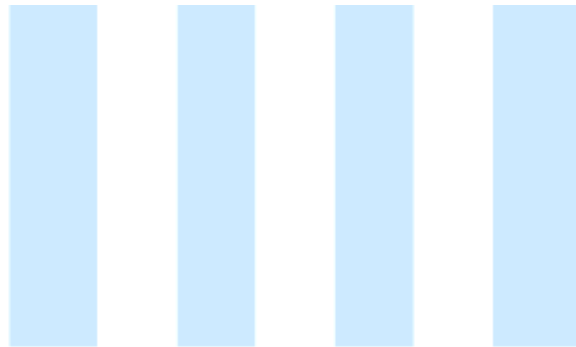




6 dB Bandwidth Plot on Configuration : IEEE 802.11g 1ch

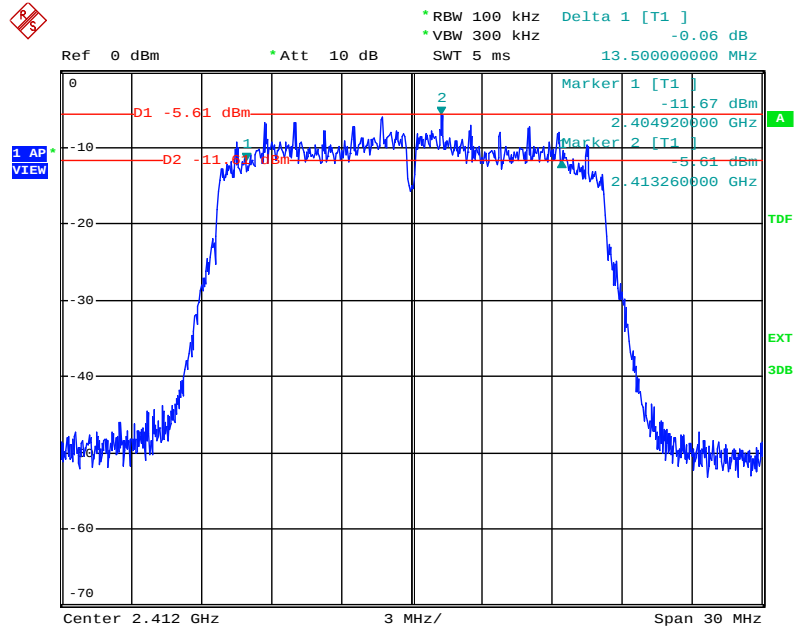

Date: 15.DEC.2016 14:02:15

6 dB Bandwidth Plot on Configuration : IEEE 802.11g 6ch

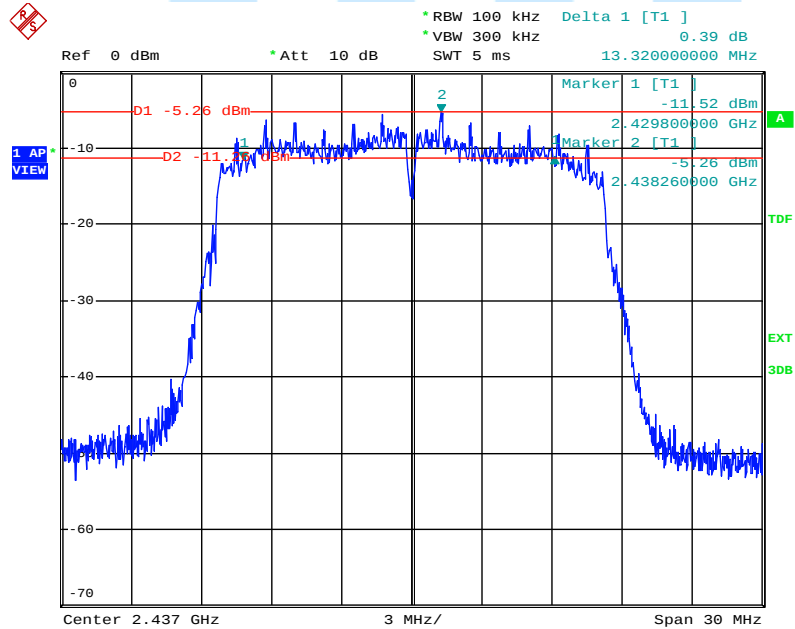

Date: 15.DEC.2016 13:58:16


EUT Type: RF Remote Controller

FCC ID.: OZ5URCHSR200






6 dB Bandwidth Plot on Configuration : IEEE 802.11g 11ch

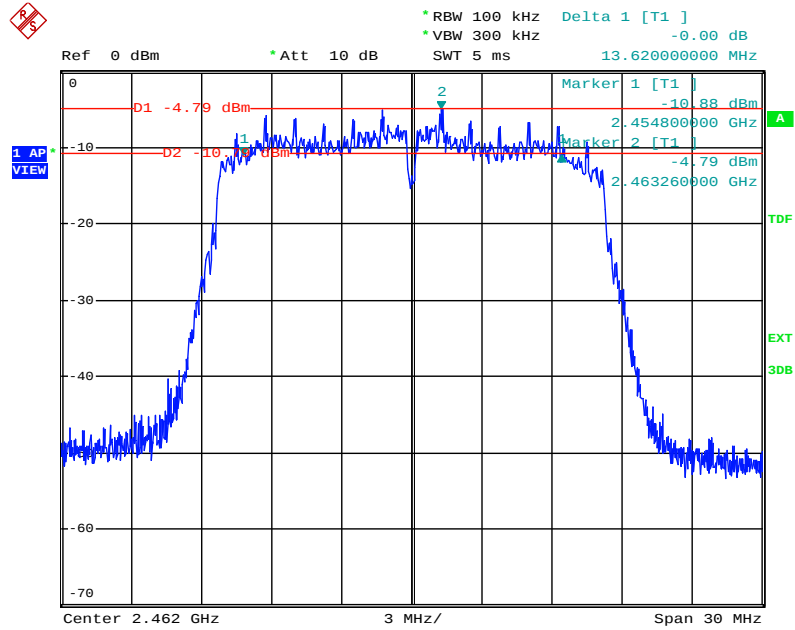


Date: 15.DEC.2016 13:54:55

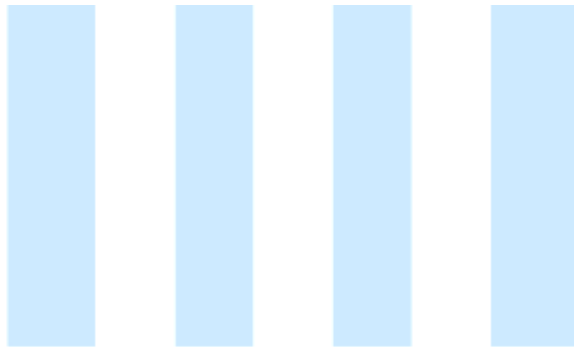




6 dB Bandwidth Plot on Configuration : IEEE 802.11n 1ch

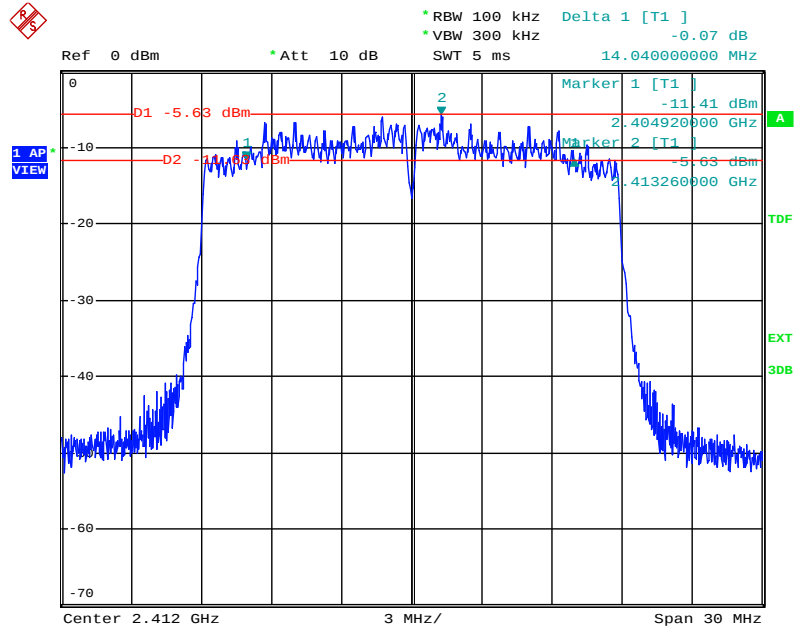

Date: 15.DEC.2016 14:05:45

6 dB Bandwidth Plot on Configuration : IEEE 802.11n 6ch

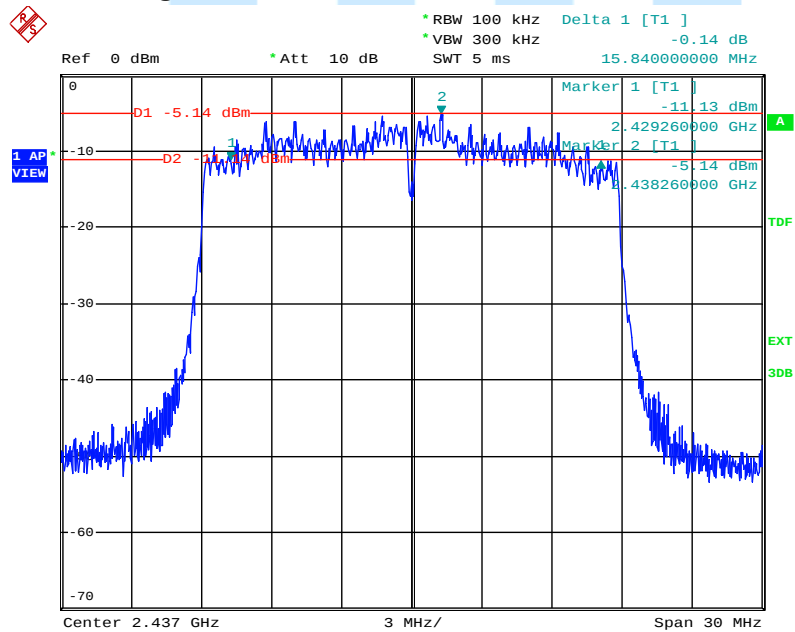

Date: 15.DEC.2016 14:14:11


EUT Type: RF Remote Controller

FCC ID.: OZ5URCHSR200






6 dB Bandwidth Plot on Configuration : IEEE 802.11n 11ch

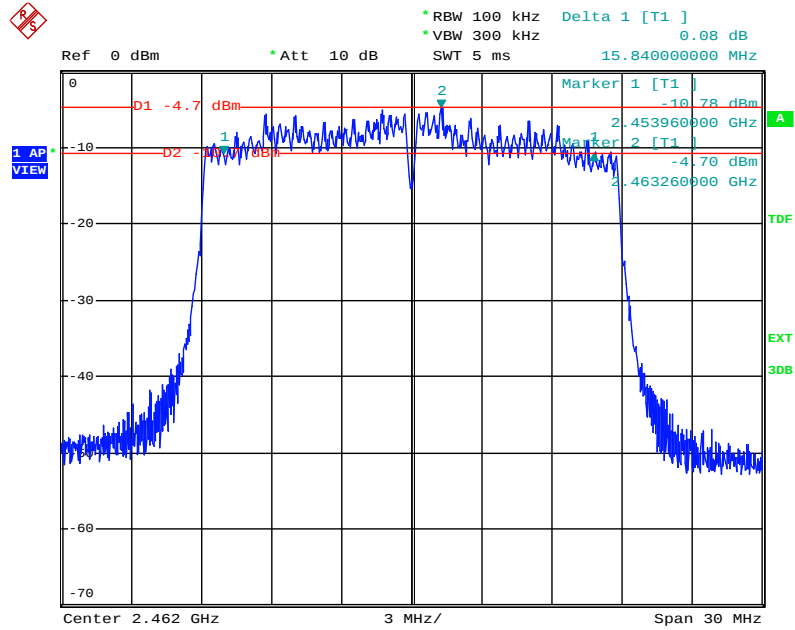

Date: 15.DEC.2016 14:16:13

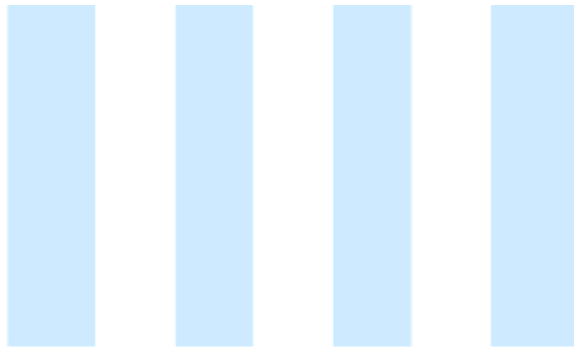




9. Conducted Maximum Peak Output Power Measurement

9.1 Operating environment

Temperature : 20.5 °C
Relative Humidity : 38.9 % R.H.

9.2 Test Set-up (Layout)

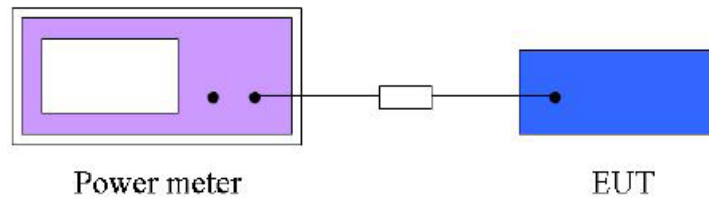

9.3 Limit

For systems using digital modulation in the (2 400~2 483.5) MHz, the limit for peak output power is 30 dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

9.4 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - NRV-Z32	Rohde & Schwarz	Peak Power sensor	100049	Dec. 06, 2017
■ - NRVD	Rohde & Schwarz	Dual Channel Power Meter	837794/048	Apr 19, 2017
■ - NRP-Z51	Rohde & Schwarz	Power sensor	1138.0005.02	Apr. 20, 2017
■ - 56-10	Weinschel	10 dB Attenuator	53184	Apr. 20. 2017

9.5 Test Procedure

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.



9.6 Test Result

- Test Date : December 20, 2016
- Reference Standard : Part 15 Subpart C, Sec. 15.247(a)(2)
- Test Procedure(s) : ANSI C63.10 (2013), KDB558074 D01 DTS Meas Guidance v03r05(April 8,2016)
- Operating Condition : RF transmitting mode (1 ch: 2 412 MHz, 6 ch: 2 437 MHz, 11 ch: 2 462 MHz)
- Power Source : DC 3.7 V

IEEE 802.11b

Frequency (MHz)	Average Conducted Power ¹⁾ (dBm)	Peak Conducted Power (dBm)	Max. Limit (dBm)	Result
2 412	4.56	5.56	30.00	Complies
2 437	4.97	6.06	30.00	Complies
2 462	5.48	6.56	30.00	Complies

Note: 1) The Average output power is reference data for RF Exposure.

IEEE 802.11g

Frequency (MHz)	Average Conducted Power ¹⁾ (dBm)	Peak Conducted Power (dBm)	Max. Limit (dBm)	Result
2 412	5.00	11.29	30.00	Complies
2 437	5.15	11.75	30.00	Complies
2 462	5.78	12.44	30.00	Complies

Note: 1) The Average output power is reference data for RF Exposure.

IEEE 802.11n

Frequency (MHz)	Average Conducted Power ¹⁾ (dBm)	Peak Conducted Power (dBm)	Max. Limit (dBm)	Result
2 412	5.23	10.67	30.00	Complies
2 437	5.61	11.77	30.00	Complies
2 462	6.11	11.88	30.00	Complies

Note: 1) The Average output power is reference data for RF Exposure.




10. Power Spectral Density Measurement

10.1 Operating Environment

Temperature : 25.8 °C
Relative Humidity : 17.8 % R.H.

10.2 Test Set-up (Layout)

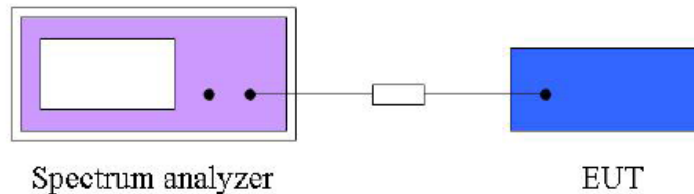

10.3 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

10.4 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - FSP	Rohde & Schwarz	spectrum Analyzer	101431	Dec. 08, 2017
■ - 56-10	Weinschel	10 dB Attenuator	53184	Apr. 20, 2017

10.5 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to 3 kHz
- Set the VBW to 10 kHz
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.



10.6 Test Result

- Test Date : December 15, 2016
- Reference Standard : Part 15 Subpart C, Sec. 15.247(a)(2)
- Test Procedure(s) : ANSI C63.10 (2013), KDB558074 D01 DTS Meas Guidance v03r05(April 8,2016)
- Operating Condition : RF transmitting mode (1 ch: 2 412 MHz, 6 ch: 2 437 MHz, 11 ch: 2 462 MHz)
- Power Source : DC 3.7 V

IEEE 802.11b

Frequency	PSD (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
2 412 MHz	-17.94	8.00	Complies
2 437 MHz	-17.81	8.00	Complies
2 462 MHz	-17.64	8.00	Complies

IEEE 802.11g


Frequency	PSD (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
2 412 MHz	-18.21	8.00	Complies
2 437 MHz	-18.26	8.00	Complies
2 462 MHz	-18.64	8.00	Complies

IEEE 802.11n

Frequency	PSD (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
2 412 MHz	-19.07	8.00	Complies
2 437 MHz	-20.05	8.00	Complies
2 462 MHz	-18.97	8.00	Complies




Power Density Plot on configuration : IEEE 802.11b 1ch

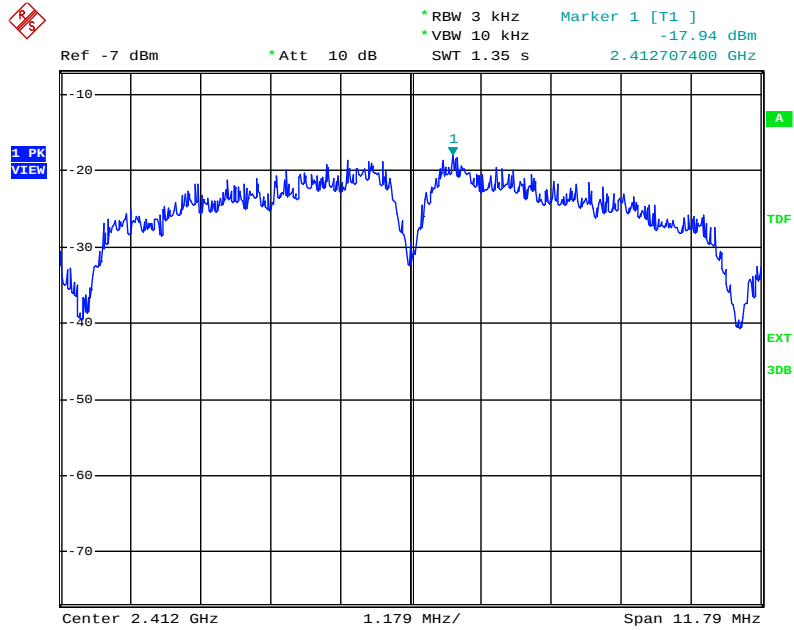

Date: 15.DEC.2016 15:17:22

Power Density Plot on configuration : IEEE 802.11b 6ch

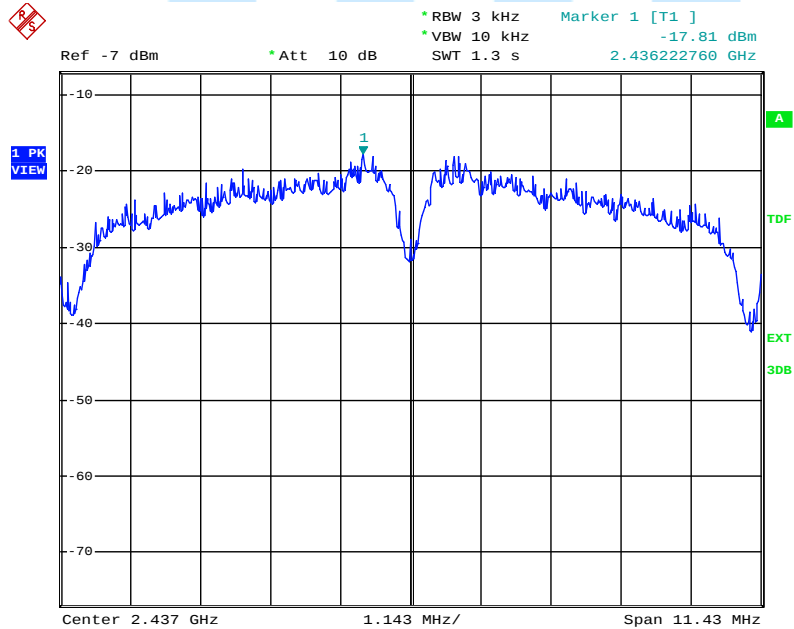

Date: 15.DEC.2016 15:25:53


EUT Type: RF Remote Controller

FCC ID.: OZ5URCHSR200






Power Density Plot on configuration : IEEE 802.11b 11ch

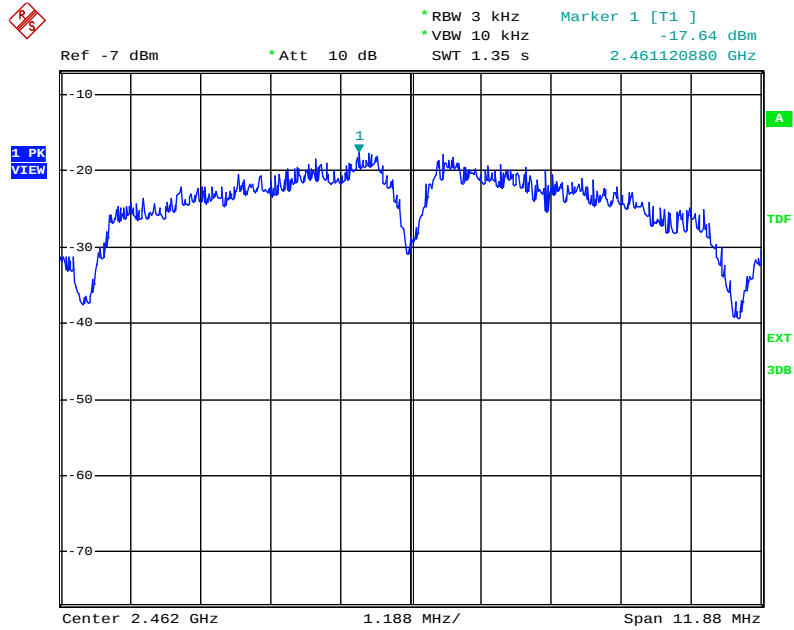


Date: 15.DEC.2016 15:27:56

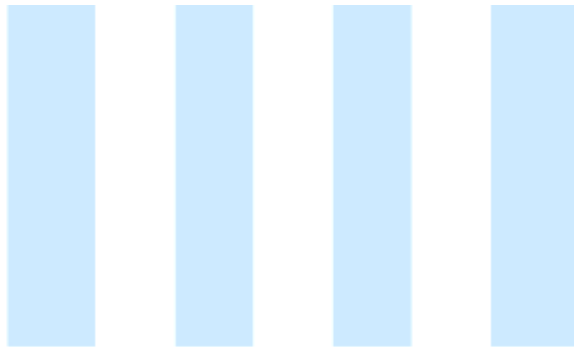




Power Density Plot on configuration : IEEE 802.11g 1ch

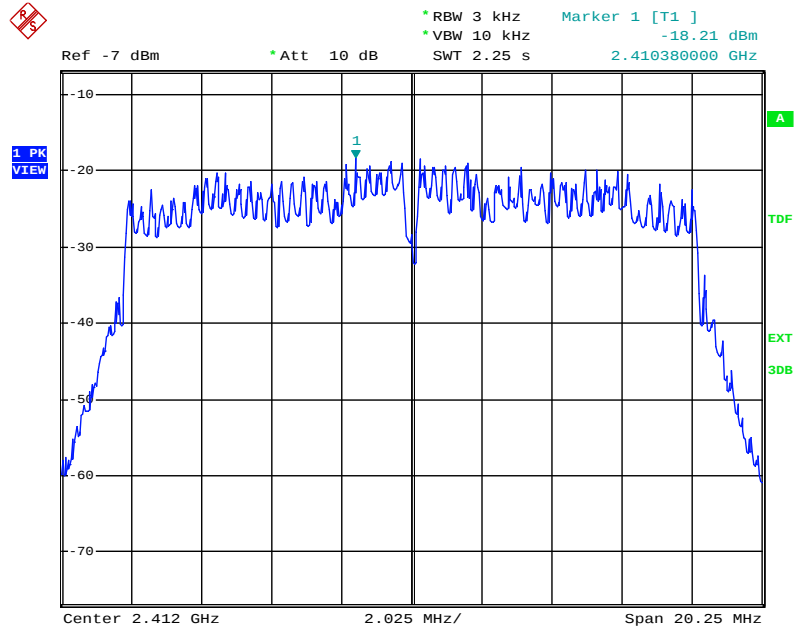

Date: 15.DEC.2016 15:35:18

Power Density Plot on configuration : IEEE 802.11g 6ch

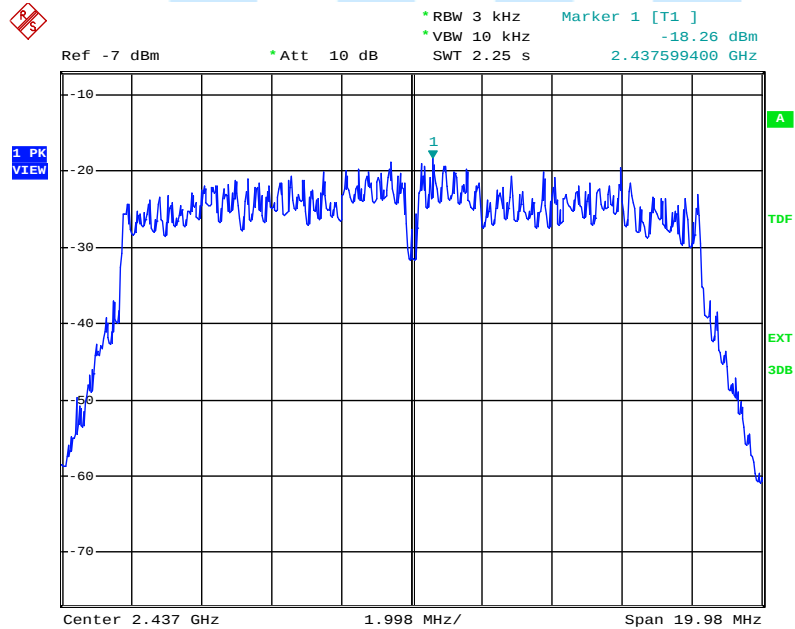

Date: 15.DEC.2016 15:43:29


EUT Type: RF Remote Controller

FCC ID.: OZ5URCHSR200






Power Density Plot on configuration : IEEE 802.11g 11ch

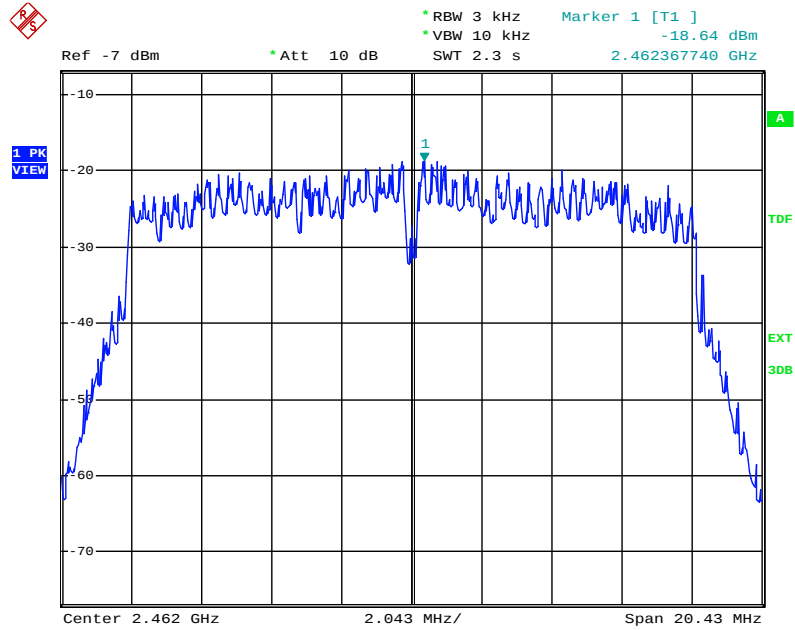


Date: 15.DEC.2016 15:44:40

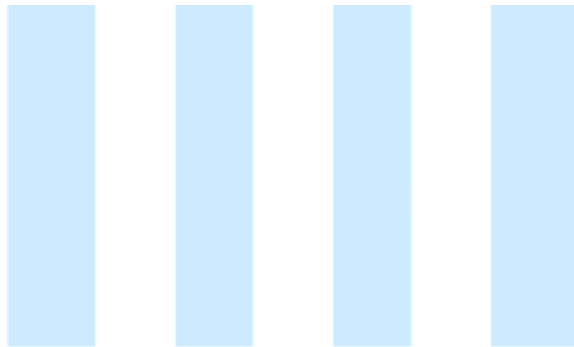




Power Density Plot on configuration : IEEE 802.11n 1ch

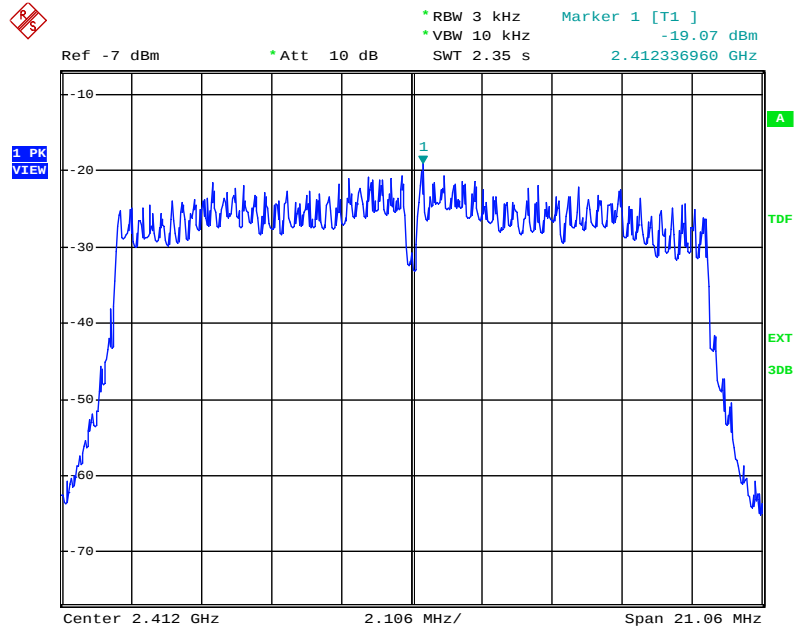

Date: 15.DEC.2016 15:00:58

Power Density Plot on configuration : IEEE 802.11n 6ch

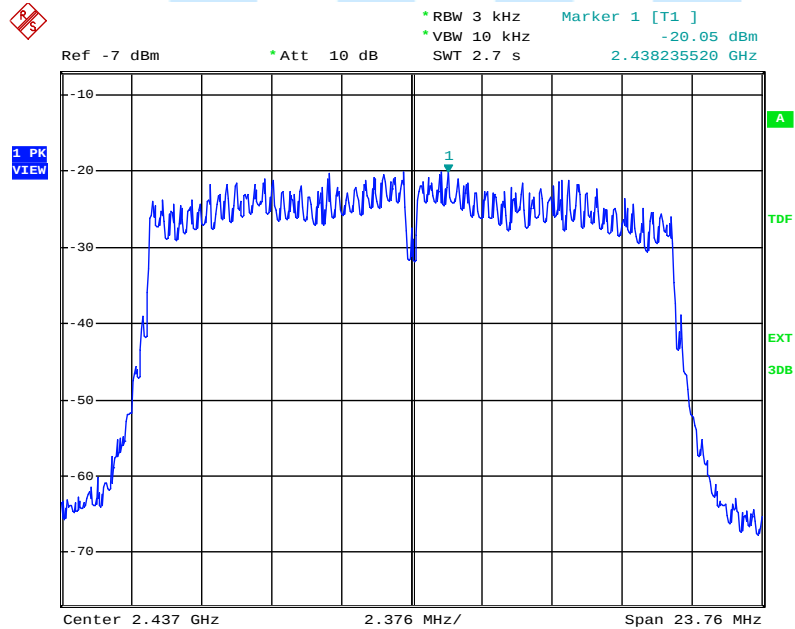

Date: 15.DEC.2016 15:06:48


EUT Type: RF Remote Controller

FCC ID.: OZ5URCHSR200






Power Density Plot on configuration : IEEE 802.11n 11ch

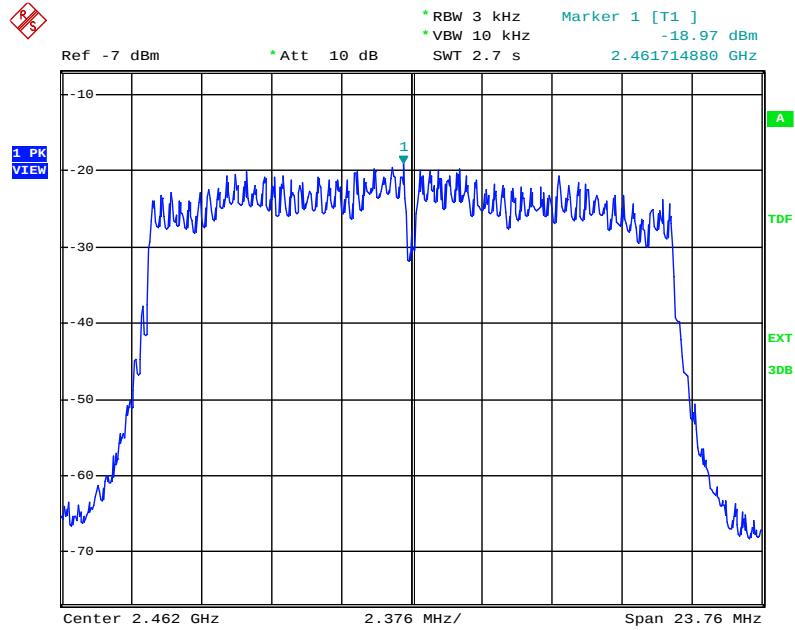

Date: 15.DEC.2016 15:08:33

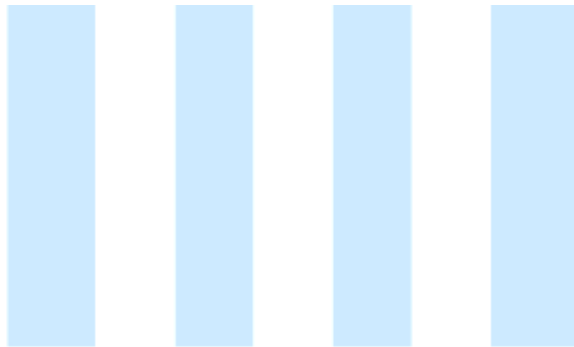




11. Conducted Spurious Emission & Out of Band Emission

11.1 Operating environment

Temperature : 26.3 °C
Relative Humidity : 17.6 % R.H.

11.2 Test set-up (Lay-out)

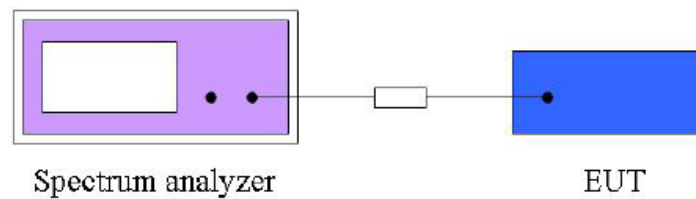

11.3 Limit

Below -20 dB of the highest emission level of operating band (in 100 kHz resolution band width)

11.4 Test equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - FSP	Rohde & Schwarz	spectrum Analyzer	101431	Dec. 08, 2017
■ - 56-10	Weinschel	10 dB Attenuator	53184	Apr. 20, 2017

11.5 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to 3 kHz
- Set the VBW to 10 kHz
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.



11.6 Test Result

- Test Date : December 15, 2016
- Reference standard : Part 15 Subpart C, Sec. 15.247(a)(2)
- Test Procedure(s) : ANSI C63.10 (2013), KDB558074 D01 DTS Meas Guidance v03r05(April 8,2016)
- Operating condition : RF transmitting mode (1 ch: 2 412 MHz, 6 ch: 2 437 MHz, 11 ch: 2 462 MHz)
- Power Source : DC 3.7 V

Conducted Spurious Emission IEEE 802.11b

Operating Frequency	100 kHz PSD (dBm)	Spurious Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	-3.59	-50.91	-47.32	-20.00	Complies
2 437 MHz	-2.92	-51.14	-48.22		Complies
2 462 MHz	-2.82	-50.19	-47.37		Complies

IEEE 802.11g

Operating Frequency	100 kHz PSD (dBm)	Spurious Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	-5.52	-51.82	-46.30	-20.00	Complies
2 437 MHz	-5.01	-50.88	-45.87		Complies
2 462 MHz	-4.73	-51.61	-46.88		Complies

IEEE 802.11n

Operating Frequency	100 kHz PSD (dBm)	Spurious Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	-5.55	-50.62	-45.07	-20.00	Complies
2 437 MHz	-5.04	-50.76	-45.72		Complies
2 462 MHz	-4.88	-50.99	-46.11		Complies



Conducted Out of Band(Band Edge) Emission
IEEE 802.11b

Operating Frequency	100 kHz PSD (dBm)	Bandedge Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	-3.59	-57.18	-53.59	-20.00	Complies
2 462 MHz	-2.82	-57.68	-54.86		Complies


IEEE 802.11g

Operating Frequency	100 kHz PSD (dBm)	Bandedge Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	-5.52	-48.34	-42.82	-20.00	Complies
2 462 MHz	-4.73	-50.76	-46.03		Complies

IEEE 802.11n


Operating Frequency	100 kHz PSD (dBm)	Bandedge Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	-5.55	-48.15	-42.60	-20.00	Complies
2 462 MHz	-4.88	-50.86	-45.98		Complies

Conducted spurious Emission Plot on Configuration : IEEE 802.11b 1ch

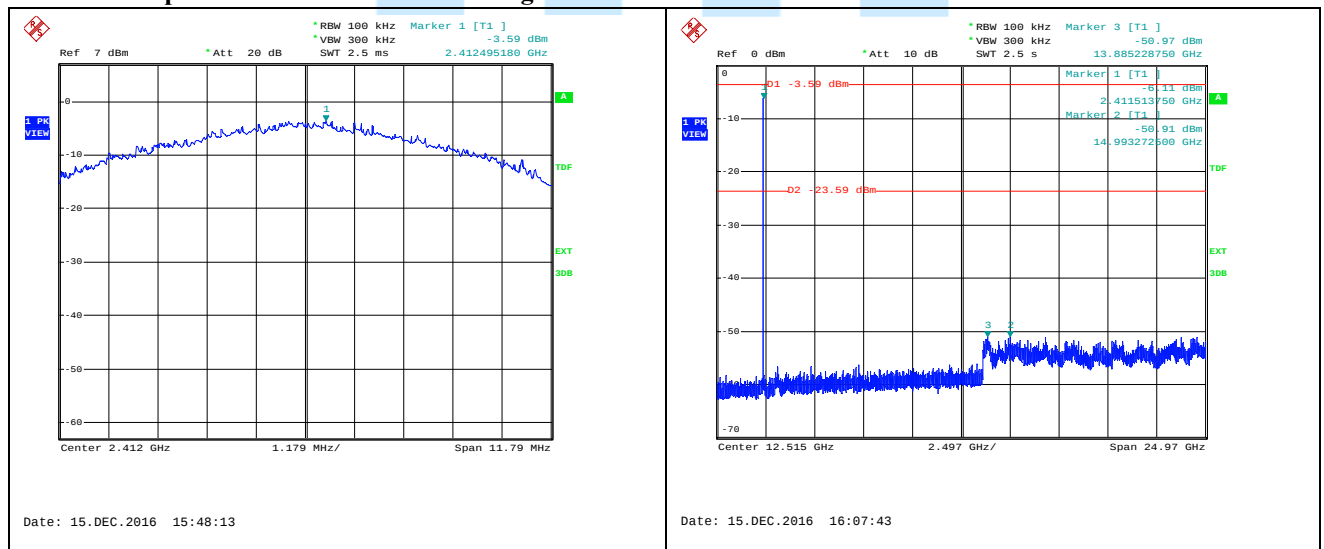




Conducted spurious Emission Plot on Configuration : IEEE 802.11b 6ch

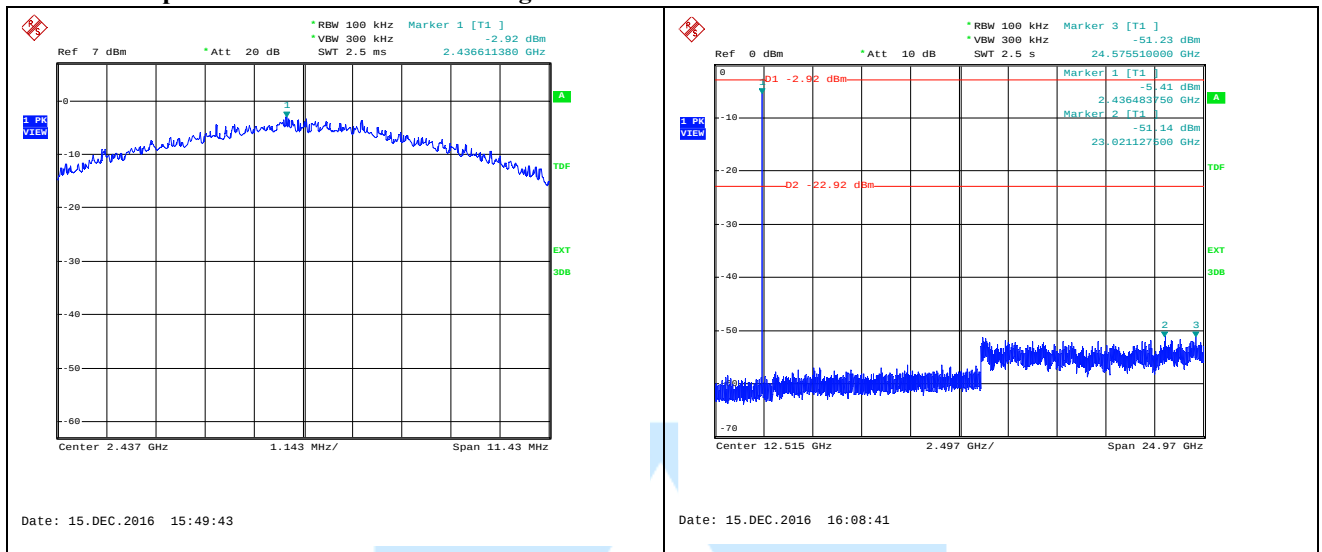


Conducted spurious Emission Plot on Configuration : IEEE 802.11b 11ch

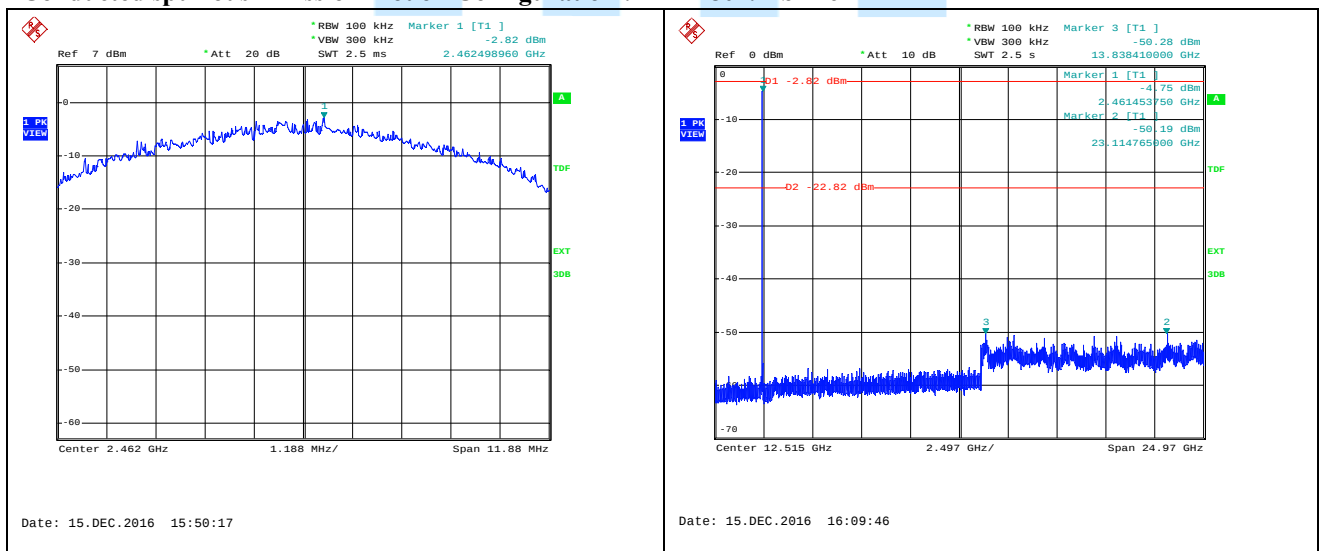




Conducted spurious Emission Plot on Configuration : IEEE 802.11g 1ch

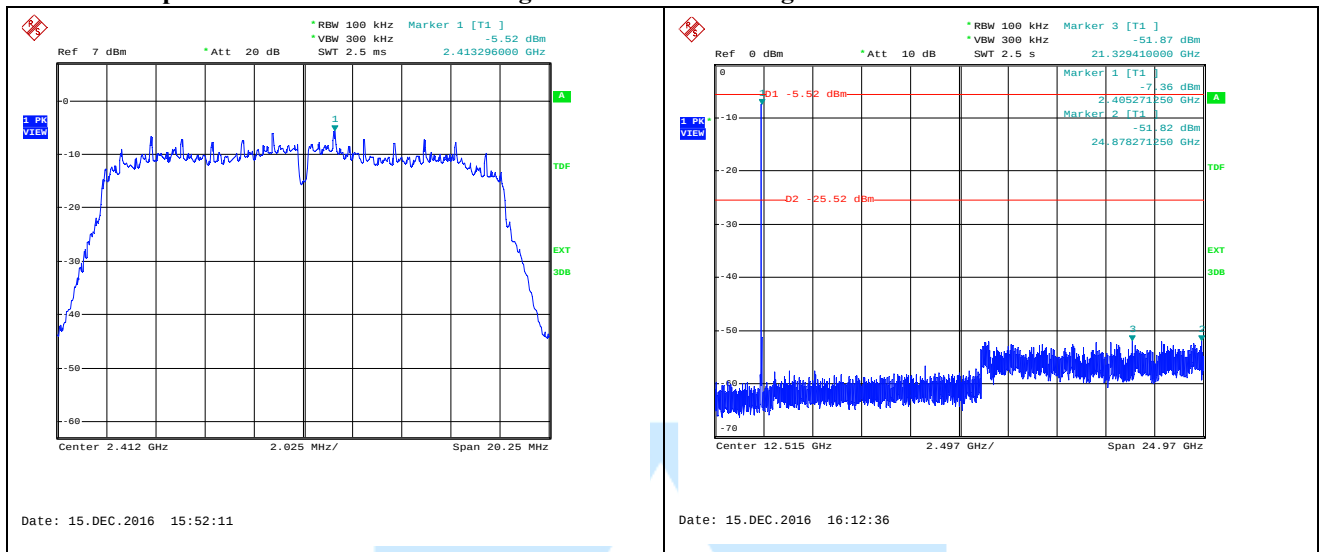


Conducted spurious Emission Plot on Configuration : IEEE 802.11g 6ch

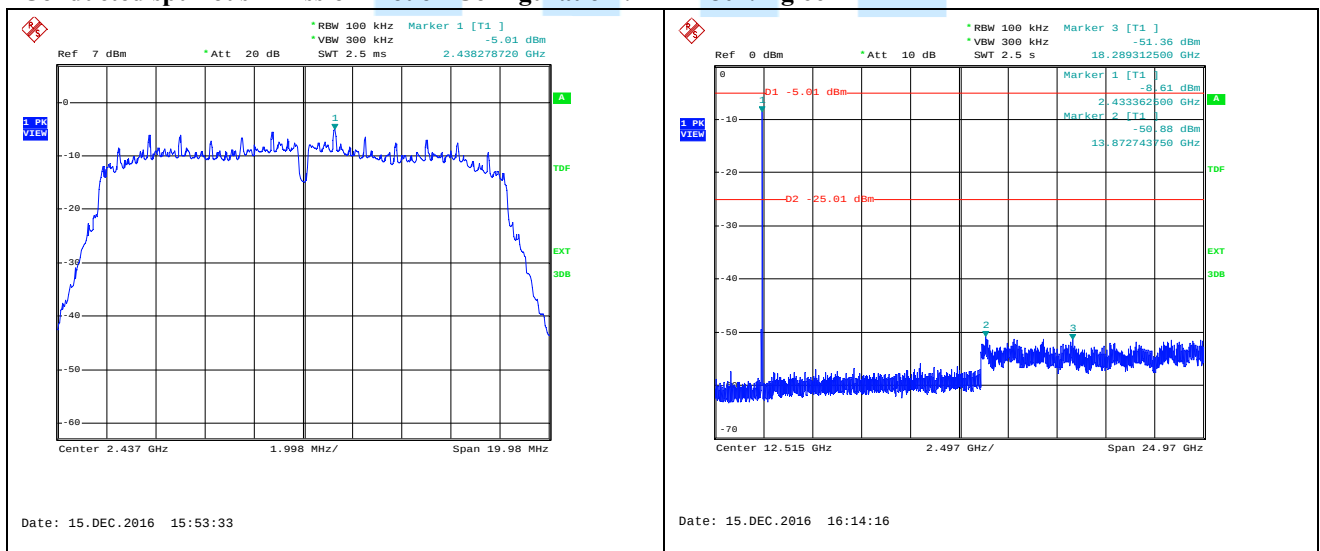




Conducted spurious Emission Plot on Configuration : IEEE 802.11g 11ch

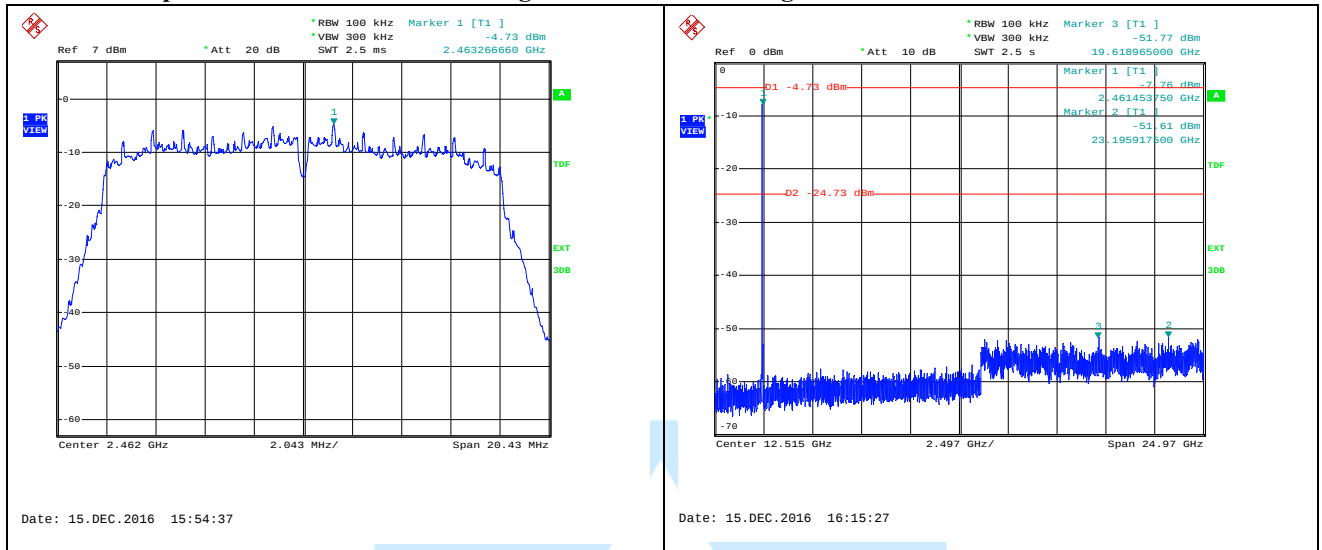


Conducted spurious Emission Plot on Configuration : IEEE 802.11n 1ch

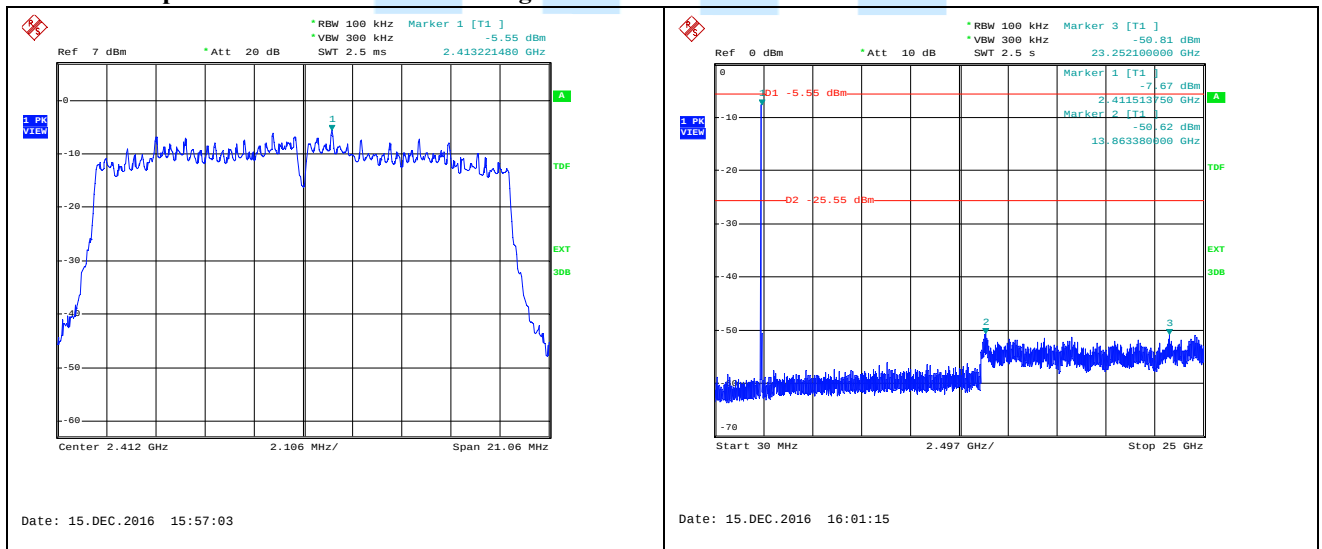




Conducted spurious Emission Plot on Configuration : IEEE 802.11b 6ch

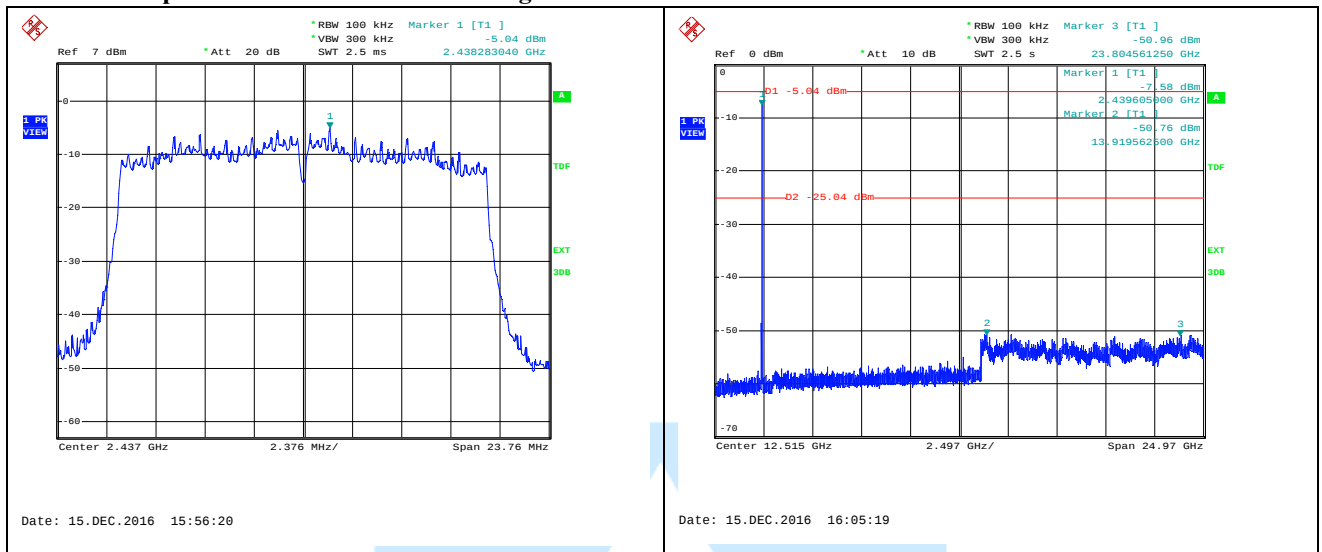


Conducted spurious Emission Plot on Configuration : IEEE 802.11b 11ch

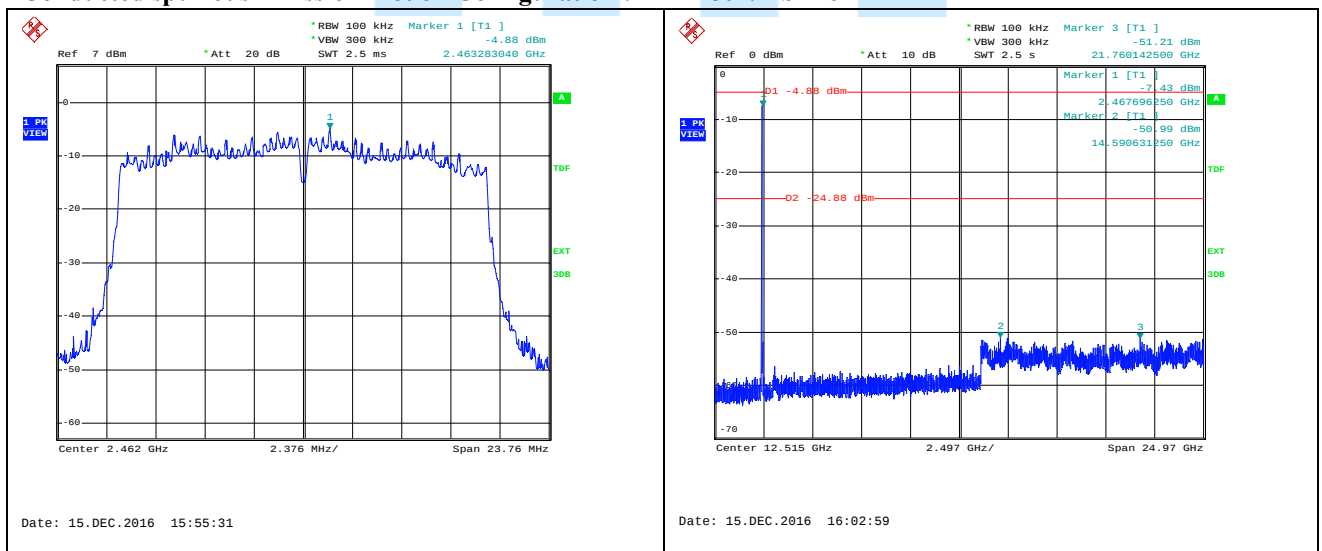




Low Band Edge Plot on Configuration : IEEE 802.11b 1ch

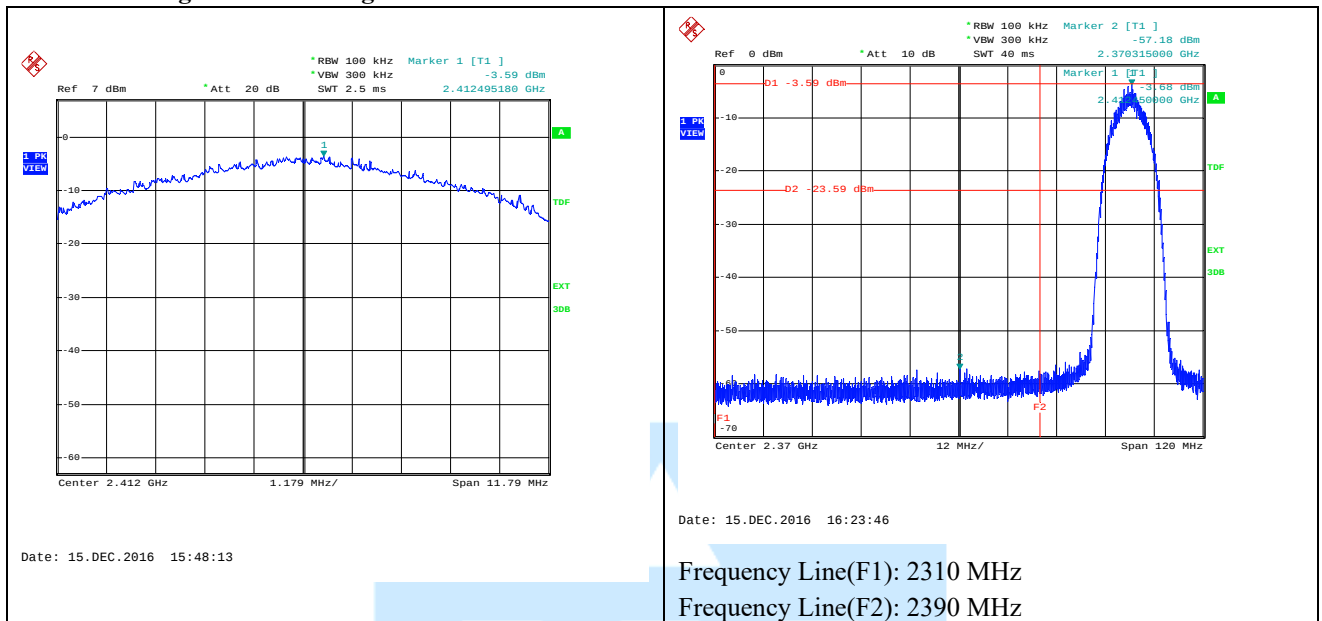


High Band Edge Plot on Configuration : IEEE 802.11b 11ch

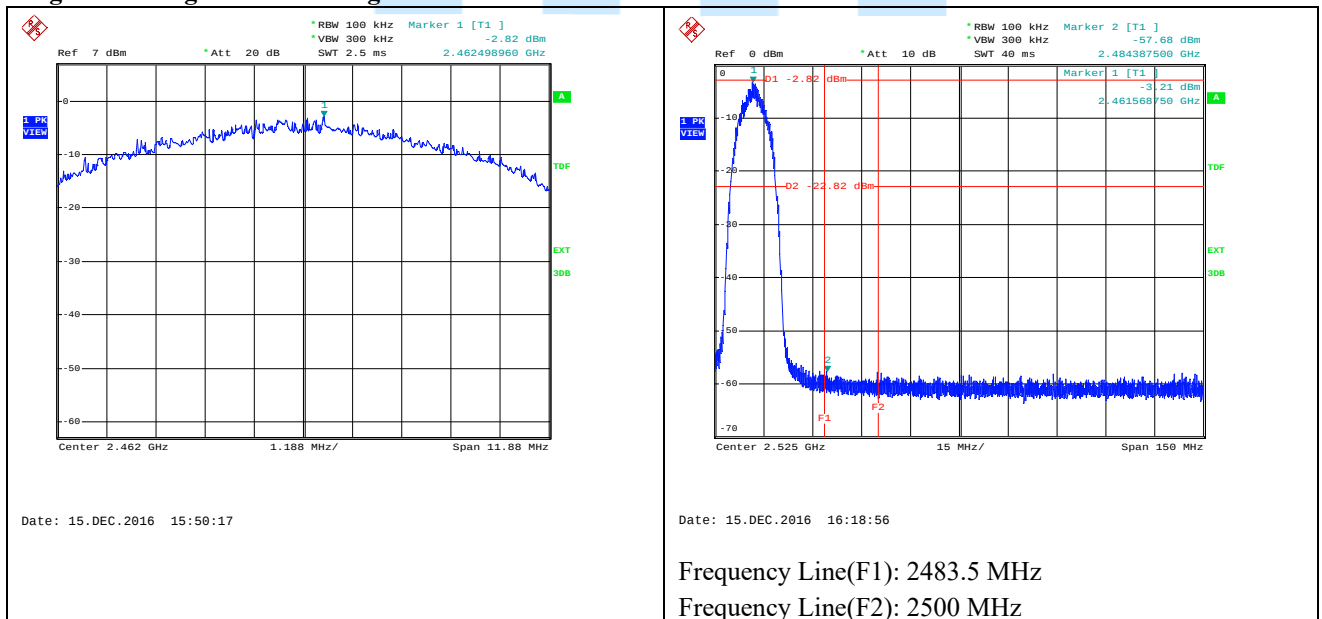




Low Band Edge Plot on Configuration : IEEE 802.11g 1ch

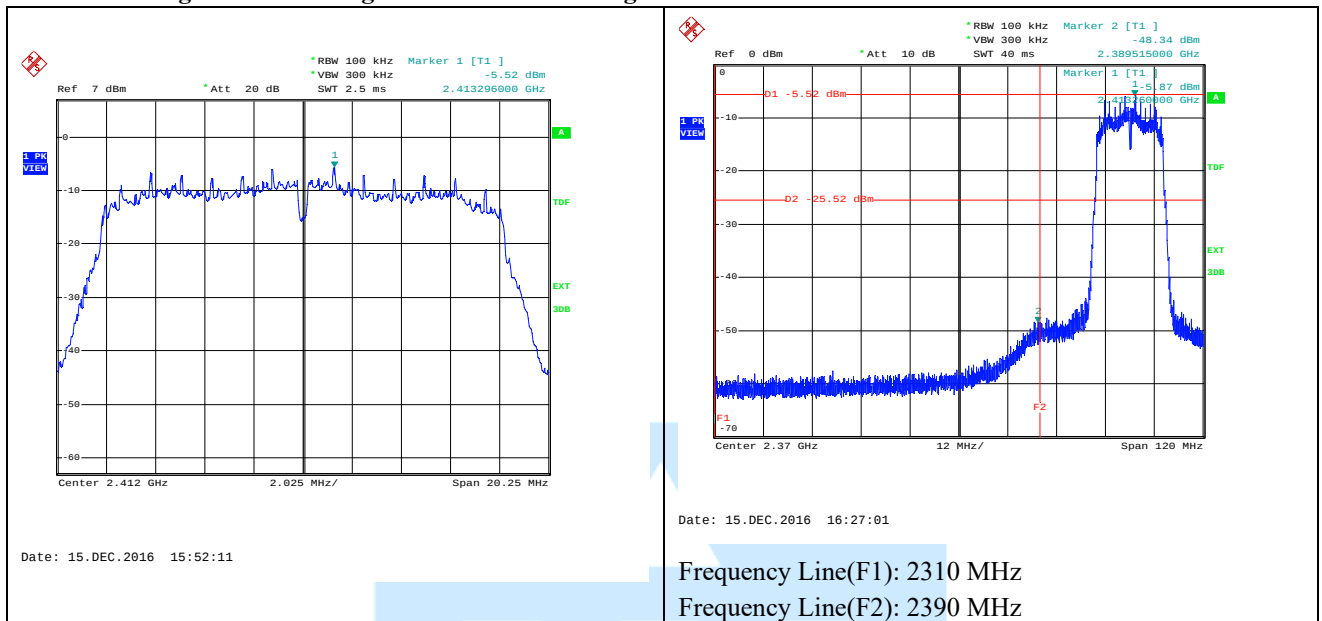


High Band Edge Plot on Configuration : IEEE 802.11g 11ch

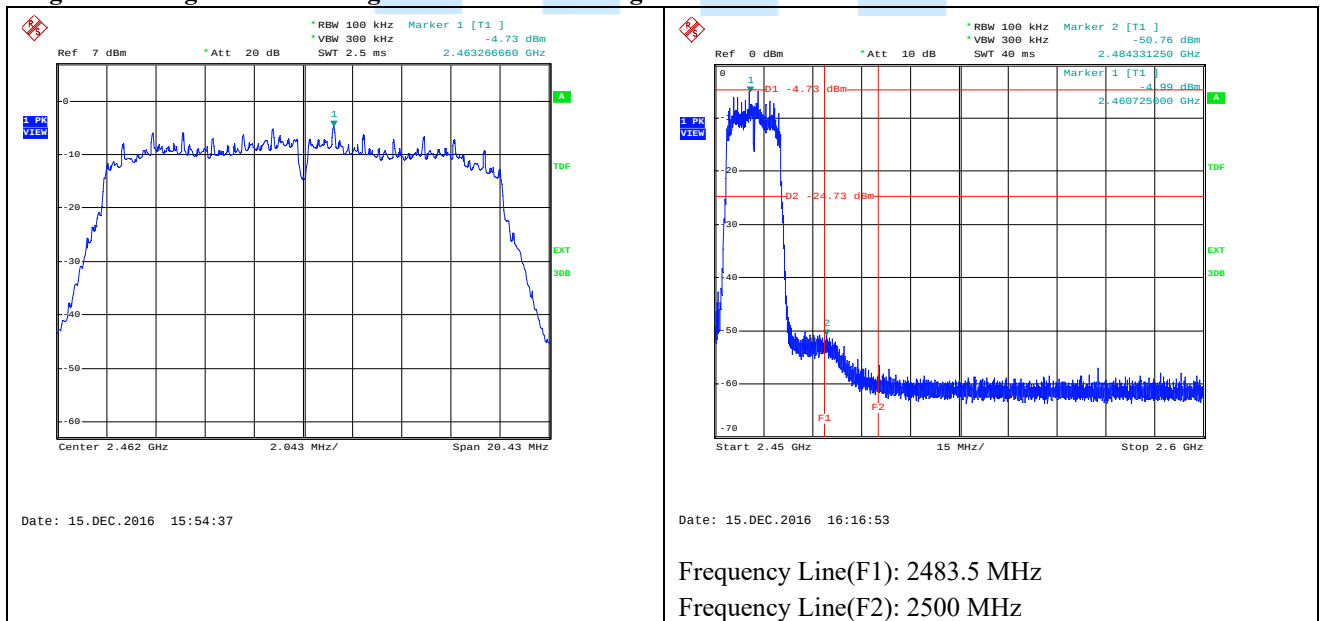




Low Band Edge Plot on Configuration : IEEE 802.11n 1ch

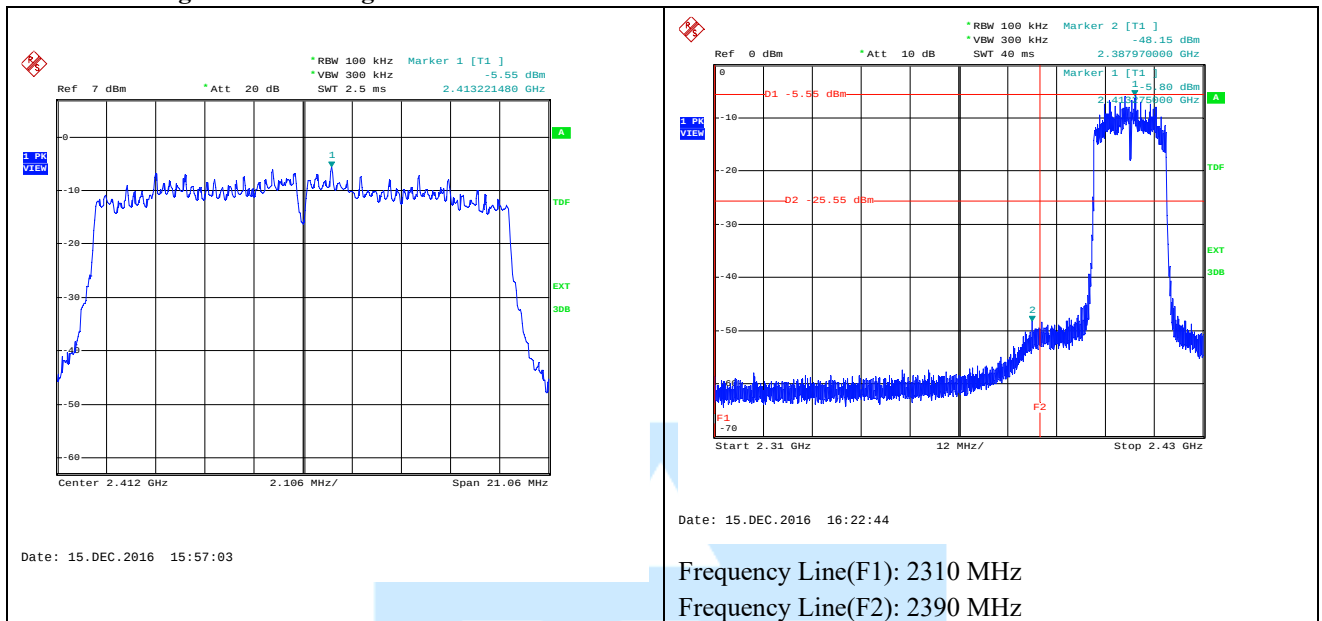

High Band Edge Plot on Configuration : IEEE 802.11n 11ch

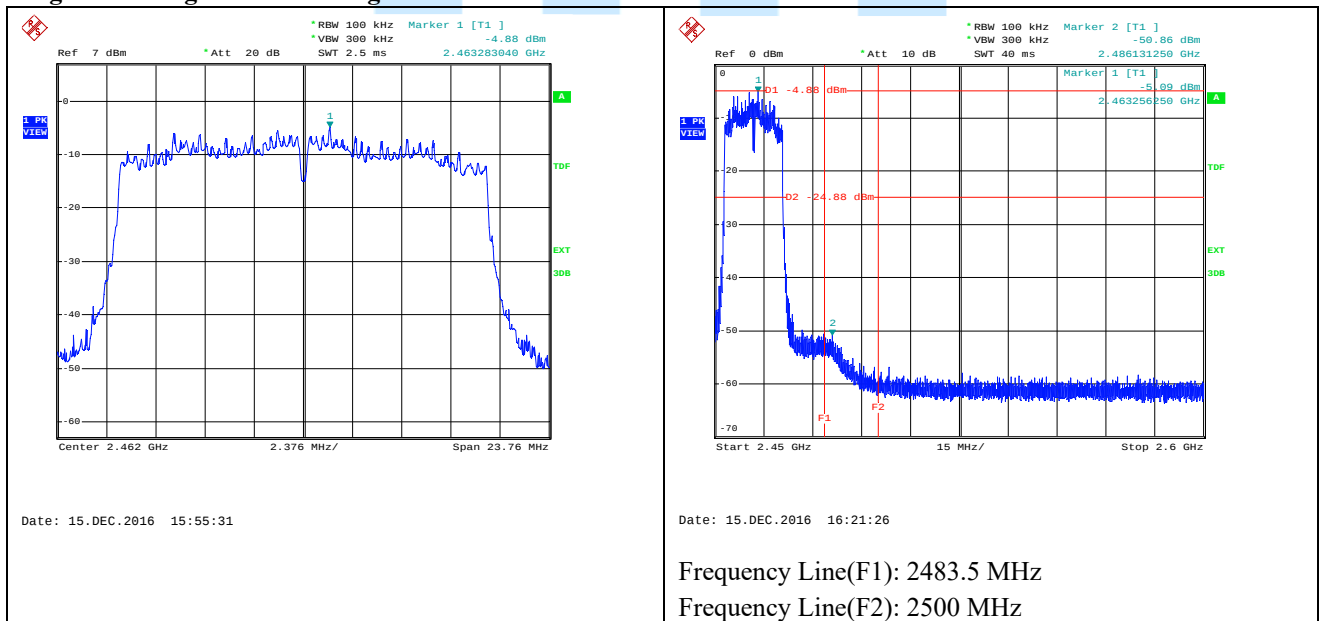



12. AC Power line Conducted emission

-Test Description

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure. (Test firm Registration Number: 269701)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ENV216) and the support equipment is powered from the Rohde & Schwarz LISN (ENV216). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCI).

Exploratory measurements were conducted to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Exploratory measurements were scanned using Peak mode of EMI Test receiver from 150 kHz to 30 MHz with 20 ms sweep time. The final measurements were measured with Quasi-Peak and Average mode.

The bandwidth of EMI Test Receiver was set to 9 kHz. Interface cables were connected to the available interface ports of the test unit. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

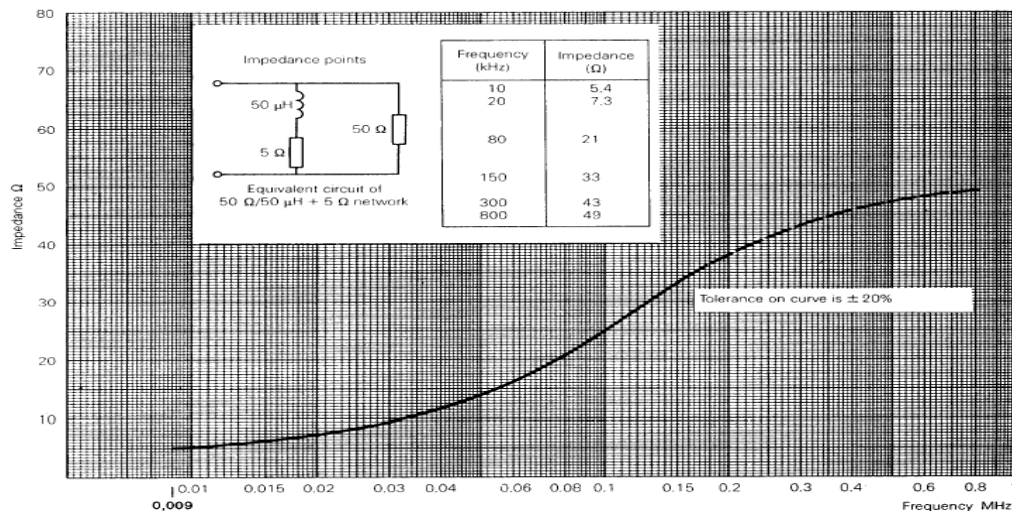


Fig 2. Impedance of LISN



12.1 Operating Environment

Temperature : 22.5 °C
Relative Humidity : 37.9 % R.H.

12.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

12.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO "Guide to the expression of uncertainty in measurement."

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	3.85 dB	Confidence level of approximately 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	3.32 dB	Confidence level of approximately 95 % ($k = 2$)



12.4 Limit

RFI Conducted	FCC Limit(dBμV/m) Class B	
Freq. Range	Quasi-Peak	Average
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

12.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■- ESCI	Rohde & Schwarz	EMI test receiver	100237	Apr 18. 2017
■- ENV216	Rohde & Schwarz	LISN	100172	Apr 19. 2017
□- ENV216	Rohde & Schwarz	LISN	100173	Apr 19. 2017
□ - ISN T8	TESEQ. GmbH	ISN	24568	Apr 22. 2017


12.6 Test data for Conducted Emission

- Test Date : December 16, 2016
- Reference Standard : Part 15 Subpart C, Sec. 15.207
- Test Procedure(s) : ANSI C63.10 (2013)
- Operating Condition : RF transmitting mode
- Power Source : AC 120 V / 60 Hz
- Frequency rage : 0.15 MHz ~ 30 MHz
- Line : AC Power line(Live with Neutral)
- Comment : N/A



12.7 Test Result

Test Condition : IEEE 802.11b 6ch

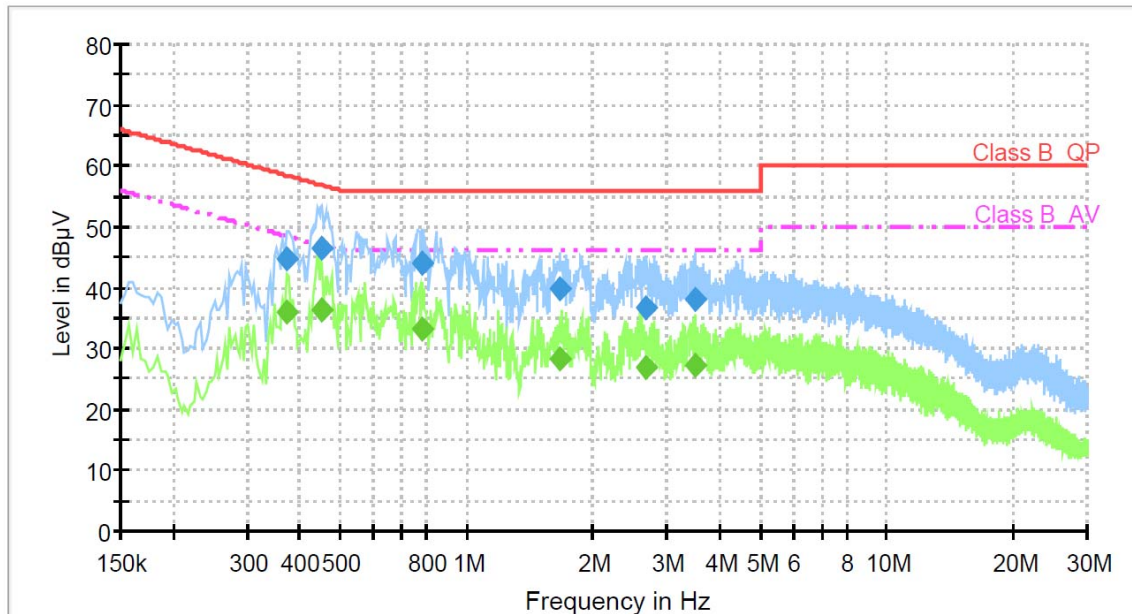

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.373875	44.9	100.0	9.000	Off	L1	9.6	13.5	58.4	
0.452231	46.6	100.0	9.000	Off	L1	9.6	10.3	56.8	
0.780581	43.9	100.0	9.000	Off	L1	9.7	12.1	56.0	
1.661156	39.9	100.0	9.000	Off	L1	9.7	16.1	56.0	
2.683519	36.7	100.0	9.000	Off	L1	9.7	19.3	56.0	
3.485738	38.1	100.0	9.000	Off	L1	9.8	17.9	56.0	


Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.373875	36.0	100.0	9.000	Off	L1	9.6	12.4	48.4	
0.452231	36.2	100.0	9.000	Off	L1	9.6	10.7	46.8	
0.780581	33.3	100.0	9.000	Off	L1	9.7	12.7	46.0	
1.661156	28.2	100.0	9.000	Off	L1	9.7	17.8	46.0	
2.683519	26.9	100.0	9.000	Off	L1	9.7	19.1	46.0	
3.485738	27.2	100.0	9.000	Off	L1	9.8	18.8	46.0	

※ Since only the highest value measured graph and list result are the cumulative measurement results indicated lower N is not expressed.



Test Condition : IEEE 802.11g 6ch

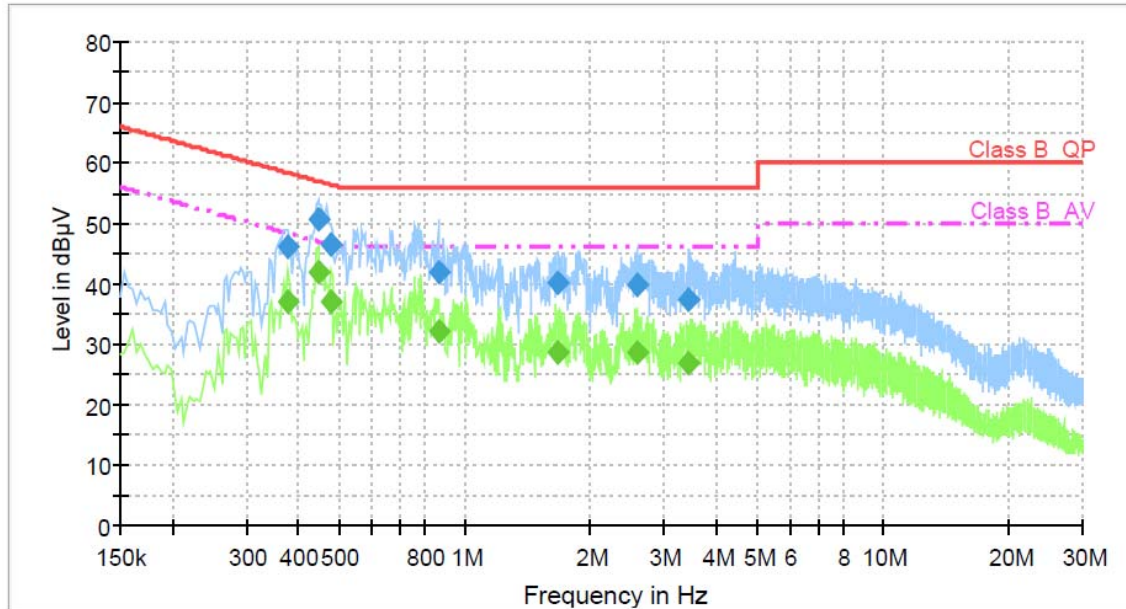

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.377606	46.3	100.0	9.000	Off	L1	9.6	12.1	58.3	
0.444769	50.8	100.0	9.000	Off	L1	9.6	6.2	57.0	
0.478350	46.3	100.0	9.000	Off	L1	9.6	10.0	56.4	
0.866400	41.9	100.0	9.000	Off	L1	9.7	14.1	56.0	
1.672350	40.0	100.0	9.000	Off	L1	9.7	16.0	56.0	
2.571581	39.7	100.0	9.000	Off	L1	9.7	16.3	56.0	
3.411113	37.2	100.0	9.000	Off	L1	9.7	18.8	56.0	


Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.377606	37.1	100.0	9.000	Off	L1	9.6	11.2	48.3	
0.444769	41.9	100.0	9.000	Off	L1	9.6	5.0	47.0	
0.478350	36.9	100.0	9.000	Off	L1	9.6	9.5	46.4	
0.866400	32.3	100.0	9.000	Off	L1	9.7	13.7	46.0	
1.672350	28.7	100.0	9.000	Off	L1	9.7	17.3	46.0	
2.571581	28.7	100.0	9.000	Off	L1	9.7	17.3	46.0	
3.411113	26.8	100.0	9.000	Off	L1	9.7	19.2	46.0	

※ Since only the highest value measured graph and list result are the cumulative measurement results indicated lower N is not expressed.



Test Condition : IEEE 802.11n 6ch

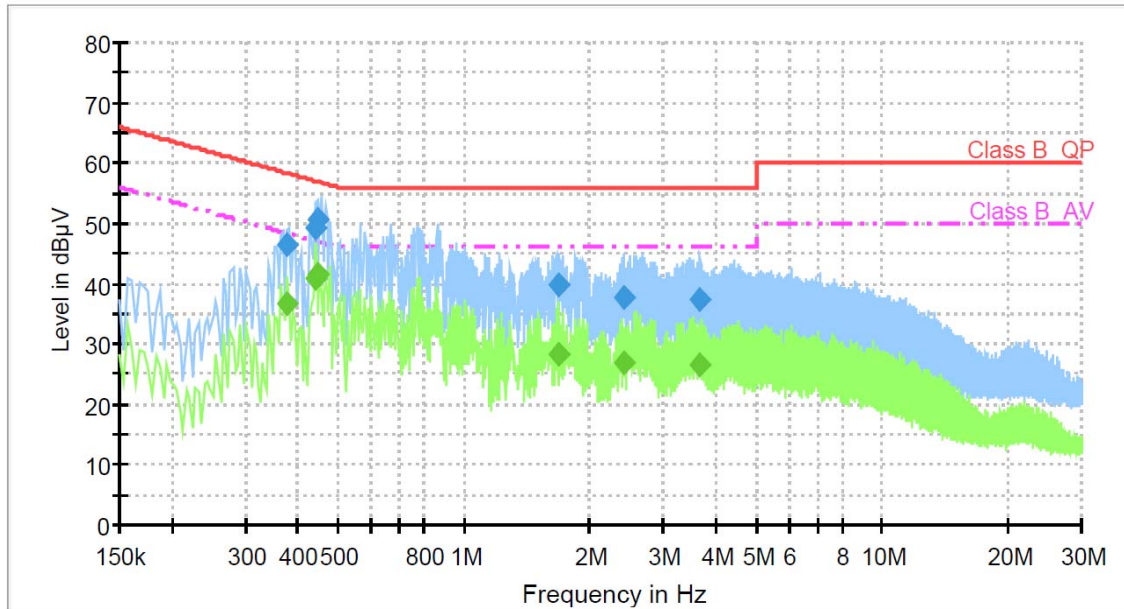

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.377606	46.4	100.0	9.000	Off	L1	9.6	11.9	58.3	
0.441038	49.2	100.0	9.000	Off	L1	9.6	7.8	57.0	
0.444769	50.8	100.0	9.000	Off	L1	9.6	6.2	57.0	
1.679813	39.8	100.0	9.000	Off	L1	9.7	16.2	56.0	
2.411138	37.7	100.0	9.000	Off	L1	9.7	18.3	56.0	
3.679763	37.3	100.0	9.000	Off	L1	9.8	18.7	56.0	

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.377606	36.7	100.0	9.000	Off	L1	9.6	11.6	48.3	
0.441038	41.0	100.0	9.000	Off	L1	9.6	6.0	47.0	
0.444769	41.7	100.0	9.000	Off	L1	9.6	5.3	47.0	
1.679813	28.2	100.0	9.000	Off	L1	9.7	17.8	46.0	
2.411138	26.9	100.0	9.000	Off	L1	9.7	19.1	46.0	
3.679763	26.5	100.0	9.000	Off	L1	9.8	19.5	46.0	

※ Since only the highest value measured graph and list result are the cumulative measurement results indicated lower N is not expressed.

13. Radiated Spurious & Restricted Band Edge Emission

Exploratory Radiated measurements were conducted at the 3m semi anechoic chamber in order to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Final measurements of below 1GHz were made at 3m or 10 m Chamber that complies with CISPR 16/ANSI C63.10. Above 1GHz final measurements were conducted at the 3m Chamber only.

For measurements above 1GHz, the bottom side of 3m chamber was installed with absorbers in order to meet SVSWR Limit.

Exploratory measurements were scanned using Peak mode of EMI Test receiver and final measurements were measured with Quasi-Peak mode (Below 1GHz) and Peak & Average mode (Above 1GHz).

The measurements were performed by rotating the EUT 360° and adjusting the receive antenna height from 1.0 m to 4.0 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

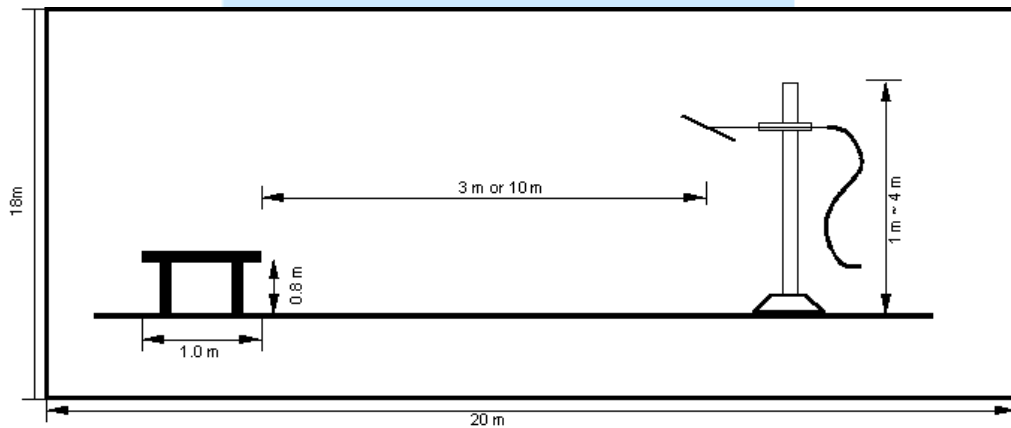


Fig 3. Dimensions of test site (Below 1GHz)

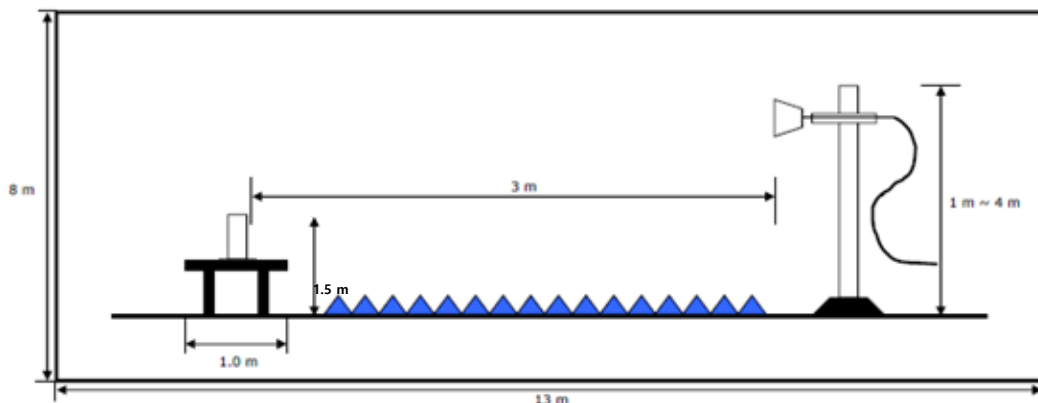


Fig 4. Dimensions of test site (Above 1GHz)



13.1 Operating environment

Temperature : 21.5 °C
Relative humidity : 52.5 % R.H.

13.2 Test set-up

A preliminary and final measurement was at 3 m anechoic chamber.

The EUT was placed on a non-conducting table.

For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane.

For emission measurements above 1 GHz, the table height is 1.5 m above the reference ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

13.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test items(Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	4.78 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	4.77 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	5.06 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	5.03 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 6 000 MHz, 3 m, V/H)	5.42 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (6 000 MHz ~ 18 000 MHz, 3 m, V/H)	5.64 dB	Confidence level of approximately 95 % ($k = 2$)



13.4 Limit

20 dB in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2 400/F (kHz)	300
0.490 ~ 1.705	2 400/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

13.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESU40	Rohde & Schwarz	EMI Test Receiver	100266	Jul. 20, 2017
■ - HFH2-Z2	Rohde & Schwarz	Loop Antenna	100041	Dec. 21, 2017
■ - VULB9160	Schwarzbeck	Broadband Test Antenna	3099	Aug. 03. 2017
■ - BBHA9120D	Schwarzbeck	Horn Antenna	207	Mar. 16. 2017
■ - 3160-09	Schwarzbeck	Horn Antenna	LM3981	Nov. 29. 2017
■ - MCU066	maturo GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	maturo GmbH	Turntable	1390307	N/A
■ - AM 4.0	maturo GmbH	Antenna Mast	1390308	N/A
■ - AFS 44 00101800-25-10P-44	MITEQ	Preamplifier	1258943	Jan. 05. 2017
■ - SCU-F1826-G47-BZ42-CSS	BONN Elektronik	Preamplifier	10003	Jan. 12. 2017
■ - WHKX3.0/18G-10SS	WAINWRIGHT INSTRUMENTS	High pass filter	SN31	Apr. 19, 2017




13.6 Test data for Radiated Spurious Emission

- Test Date : December 12 ~ 28, 2016
- Reference Standard : Part 15 Subpart C, Sec. 15.247(d)
- Measuring Distance : 3 m
- Resolution Bandwidth : 200 Hz, 9 kHz(Below 30 MHz) / 120 kHz(30 MHz ~ 1GHz) / 1 MHz(Above 1GHz)
- Detector mode : Quasi Peak detector mode / Peak detector mode / Average detector mode
- Power Source : DC 3.7 V
- Note : Through three orthogonal axes were investigated and the worst case is report

Radiated Spurious Emission (9 kHz to 30 MHz)

※ The emission level was not found.

Radiated Spurious Emission (30 MHz to 1 000 MHz)

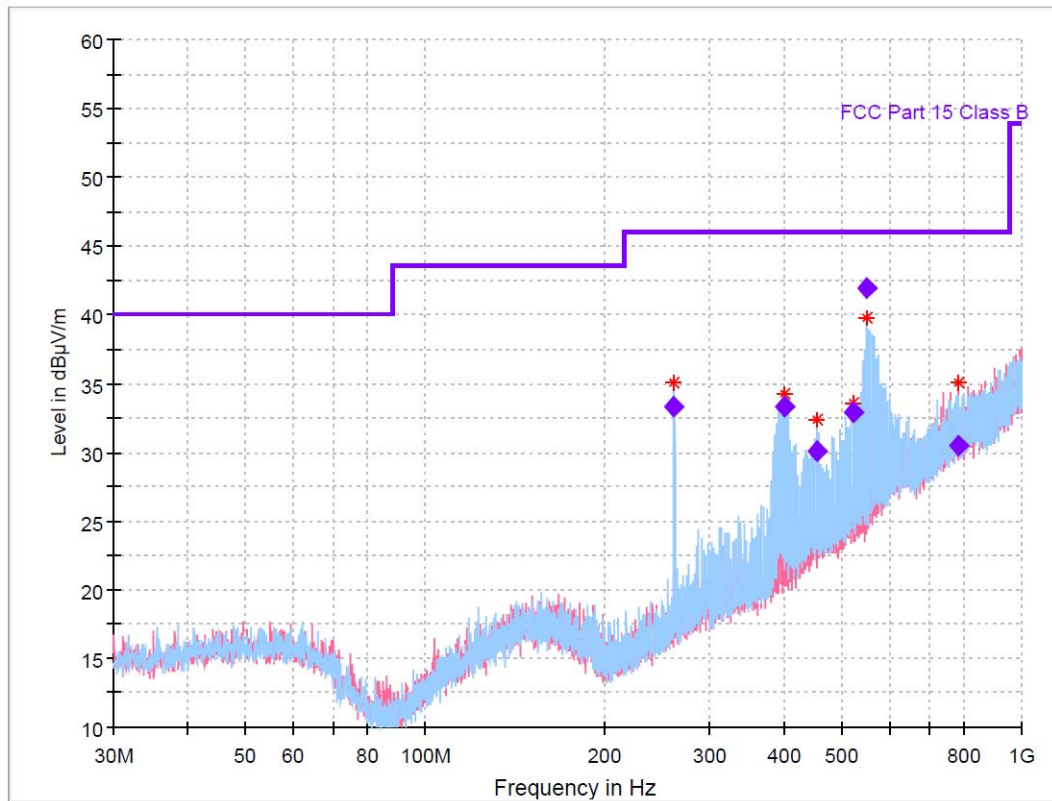

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
261.830000	33.26	46.00	12.74	1000.0	120.000	107.0	H	70.0	15.4
398.984375	33.27	46.00	12.73	1000.0	120.000	100.0	H	94.0	19.7
454.496250	30.03	46.00	15.97	1000.0	120.000	225.0	H	274.0	21.6
520.476875	32.92	46.00	13.08	1000.0	120.000	175.0	H	280.0	22.9
550.486250	41.88	46.00	4.12	1000.0	120.000	175.0	H	94.0	23.4
785.468750	30.49	46.00	15.51	1000.0	120.000	190.0	V	197.0	28.3

EUT Type: RF Remote Controller

FCC ID.: OZ5URCHSR200





Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11b 1ch

Frequency (MHz)	Measurement Level							Limit (dBµV/m)		Margin (dB)		Positioning System		
	Reading Value (dBµV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBµV/m)						Pol.	Height	Angle
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
1042.24	48.98	35.05	24.76	-38.49	-	35.25	21.32	74.00	54.00	38.75	32.68	V	114	99
1521.45	48.16	35.10	25.06	-37.53	-	35.69	22.63	74.00	54.00	38.31	31.37	V	125	218
2906.61	48.26	34.81	27.89	-36.59	-	39.56	26.11	74.00	54.00	34.44	27.89	H	107	7
10872.90	43.63	30.65	39.68	-34.10	-	49.21	36.23	74.00	54.00	24.79	17.77	H	125	15
14885.30	44.72	31.62	42.77	-34.10	-	53.39	40.29	74.00	54.00	20.61	13.71	V	125	184
17981.00	13.02	30.25	49.26	-34.10	-	28.18	45.41	74.00	54.00	45.82	8.59	H	184	15

Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11b 6ch

Frequency (MHz)	Measurement Level							Limit (dBµV/m)		Margin (dB)		Positioning System		
	Reading Value (dBµV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBµV/m)						Pol.	Height	Angle
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
1507.52	48.51	35.12	25.04	-37.53	-	36.02	22.63	74.00	54.00	37.98	31.37	V	109	44
1569.57	47.95	34.65	25.12	-37.53	-	35.54	22.24	74.00	54.00	38.46	31.76	H	125	353
2291.86	49.85	36.05	26.59	-37.11	-	39.33	25.53	74.00	54.00	34.67	28.47	H	132	152
2878.32	48.84	34.81	27.85	-36.65	-	40.04	26.01	74.00	54.00	33.96	27.99	V	125	141
11130.00	44.01	30.91	39.82	-34.10	-	49.73	36.63	74.00	54.00	24.27	17.37	H	225	335
14359.40	44.38	37.17	42.80	-34.10	-	53.08	45.87	74.00	54.00	20.92	8.13	H	110	76
17986.80	43.64	30.63	49.34	-34.10	-	58.88	45.87	74.00	54.00	15.12	8.13	H	110	172

Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11b 11ch

Frequency (MHz)	Measurement Level							Limit (dBμV/m)		Margin (dB)		Positioning System		
	Reading Value (dBμV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBμV/m)						Pol.	Height	Angle
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
1482.02	49.31	35.72	25.02	-37.72	-	36.61	23.02	74.00	54.00	37.39	30.98	V	149	15
2310.59	50.58	37.03	26.65	-36.94	-	40.29	26.74	74.00	54.00	33.71	27.26	GH	125	169
2560.01	49.55	36.54	27.36	-36.86	-	40.05	27.04	74.00	54.00	33.95	26.96	H	125	164
2758.29	48.54	34.96	27.66	-36.71	-	39.49	25.91	74.00	54.00	34.51	28.09	H	175	307
11145.00	43.34	30.82	39.82	-34.10	-	49.06	36.54	74.00	54.00	24.94	17.46	H	221	269
14383.70	44.05	31.45	42.90	-34.10	-	52.85	40.25	74.00	54.00	21.15	13.75	H	125	331
17919.70	43.26	30.78	48.44	-34.10	-	57.60	45.12	74.00	54.00	16.40	8.88	H	200	313

Note:

If the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

Test result = Reading: + AF+AMP / CL

Where, AF : Antenna Collection Factor,

AMP / CL = Cable loss + Preamplifier gain + High Pass filter.

※ High Pass filter use to range of 3 GHz to 18 GHz

Pol.: H(Horizontal), V(Vertical)



Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11g 1ch

Frequency (MHz)	Measurement Level						Limit (dBμV/m)		Margin (dB)		Positioning System			
	Reading Value (dBμV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBμV/m)					Pol.	Height	Angle	
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
1494.62	47.96	34.96	25.03	-37.54	-	35.45	22.45	74.00	54.00	38.55	31.55	V	171	347
1966.34	48.47	35.32	25.60	-37.25	-	36.82	23.67	74.00	54.00	37.18	30.33	H	125	247
2309.87	53.61	38.69	26.65	-36.93	-	43.33	28.41	74.00	54.00	30.67	25.59	H	100	161
2501.19	49.59	36.26	27.27	-36.98	-	39.88	26.55	74.00	54.00	34.12	27.45	H	125	162
9971.10	36.51	23.66	38.58	-26.32	-	48.77	35.92	74.00	54.00	25.23	18.08	H	100	194
14892.10	36.86	22.94	42.76	-25.23	-	54.39	40.47	74.00	54.00	19.61	13.53	H	107	250
17983.50	33.89	20.82	49.29	-24.72	-	58.46	45.39	74.00	54.00	15.54	8.61	V	109	59

Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11g 6ch

Frequency (MHz)	Measurement Level						Limit (dBμV/m)		Margin (dB)		Positioning System			
	Reading Value (dBμV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBμV/m)					Pol.	Height	Angle	
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
1460.93	48.42	35.34	25.01	-37.61	-	35.82	22.74	74.00	54.00	38.18	31.26	V	134	39
1790.19	48.64	34.60	25.39	-37.32	-	36.71	22.67	74.00	54.00	37.29	31.33	V	175	106
2305.87	50.18	37.38	26.64	-36.94	-	39.88	27.08	74.00	54.00	34.12	26.92	H	106	160
2927.70	47.89	34.72	27.92	-36.52	-	39.29	26.12	74.00	54.00	34.71	27.88	V	135	173
9971.10	36.51	23.66	38.58	-26.32	-	48.77	35.92	74.00	54.00	25.23	18.08	H	100	194
14892.10	36.86	22.94	42.76	-25.23	-	54.39	40.47	74.00	54.00	19.61	13.53	H	107	250
17980.50	33.93	20.86	49.25	-24.72	-	58.46	45.39	74.00	54.00	15.54	8.61	V	109	59

Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11g 11ch

Frequency (MHz)	Measurement Level							Limit (dBμV/m)		Margin (dB)		Positioning System		
	Reading Value (dBμV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBμV/m)						Pol.	Height	Angle
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
1052.08	49.64	35.02	24.77	-38.41	-	36.00	21.38	74.00	54.00	38.00	32.62	H	151	241
2308.70	52.01	37.52	26.65	-36.93	-	41.73	27.24	74.00	54.00	32.27	26.76	H	153	163
2767.59	48.42	34.92	27.68	-36.67	-	39.43	25.93	74.00	54.00	34.57	28.07	V	120	125
2997.57	48.18	34.90	28.03	-36.33	-	39.88	26.60	74.00	54.00	34.12	27.40	V	175	345
11714.70	35.24	22.51	39.54	-26.29	-	48.49	35.76	74.00	54.00	25.51	18.24	V	181	243
14905.90	35.49	22.76	42.74	-25.22	-	53.01	40.28	74.00	54.00	20.99	13.72	V	113	295
17992.80	33.41	20.62	49.42	-24.72	-	58.11	45.32	74.00	54.00	15.89	8.68	V	113	235

Note:

If the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

Test result = Reading: + AF+AMP / CL

Where, AF : Antenna Collection Factor,

AMP / CL = Cable loss + Preamplifier gain + High Pass filter.

※ High Pass filter use to range of 3 GHz to 18 GHz

Pol.: H(Horizontal), V(Vertical)



Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11n 1ch

Frequency (MHz)	Measurement Level							Limit (dBµV/m)		Margin (dB)		Positioning System		
	Reading Value (dBµV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBµV/m)						Pol.	Height	Angle
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
1052.08	49.64	35.02	24.77	-38.41	-	36.00	21.38	74.00	54.00	38.00	32.62	H	151	241
2308.70	52.01	37.52	26.65	-36.93	-	41.73	27.24	74.00	54.00	32.27	26.76	H	153	163
2767.59	48.42	34.92	27.68	-36.67	-	39.43	25.93	74.00	54.00	34.57	28.07	V	120	125
2997.57	48.18	34.90	28.03	-36.33	-	39.88	26.60	74.00	54.00	34.12	27.40	V	175	345
11777.80	35.26	22.62	39.44	-26.26	-	48.44	35.80	74.00	54.00	25.56	18.20	H	225	15
14987.60	35.61	22.80	42.61	-25.19	-	53.03	40.22	74.00	54.00	20.97	13.78	H	225	14
17989.80	33.85	20.83	49.38	-24.72	-	58.51	45.49	74.00	54.00	15.49	8.51	H	182	280

Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11n 6ch

Frequency (MHz)	Measurement Level							Limit (dBμV/m)		Margin (dB)		Positioning System		
	Reading Value (dBμV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBμV/m)						Pol.	Height	Angle
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
1434.41	48.23	35.18	25.00	-37.66	-20.93	35.57	22.52	74.00	54.00	38.43	31.48	V	125	182
2244.12	48.03	34.70	26.44	-37.04	-20.93	37.43	24.10	74.00	54.00	36.57	29.90	H	125	153
2311.91	54.20	39.07	26.66	-36.93	-20.93	43.93	28.80	74.00	54.00	30.07	25.20	H	125	154
2540.89	49.98	36.80	27.33	-36.93	-20.93	40.38	27.20	74.00	54.00	33.62	26.80	H	175	168
11224.90	36.32	22.84	39.84	-26.53	-20.93	49.63	36.15	74.00	54.00	24.37	17.85	V	220	262
14437.40	35.08	22.53	43.12	-25.42	-20.93	52.78	40.23	74.00	54.00	21.22	13.77	H	220	274
17989.50	33.90	20.91	49.37	-24.72	-20.93	58.55	45.56	74.00	54.00	15.45	8.44	V	125	57

Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11n 11ch

Frequency (MHz)	Measurement Level							Limit (dBµV/m)		Margin (dB)		Positioning System		
	Reading Value (dBµV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBµV/m)						Pol.	Height	Angle
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
1051.65	49.09	34.91	24.77	-38.41	-	35.45	21.27	74.00	54.00	38.55	32.73	H	171	227
1428.08	49.11	35.14	24.99	-37.67	-	36.43	22.46	74.00	54.00	37.57	31.54	V	132	356
2310.80	53.70	39.48	26.65	-36.93	-	43.42	29.20	74.00	54.00	30.58	24.80	H	134	162
2556.57	48.64	35.67	27.35	-36.87	-	39.12	26.15	74.00	54.00	34.88	27.85	H	175	172
2569.87	48.65	35.43	27.37	-36.87	-	39.15	25.93	74.00	54.00	34.85	28.07	H	106	174
9980.90	37.11	23.76	38.59	-26.31	-	49.39	36.04	74.00	54.00	24.61	17.96	V	181	298
14821.20	34.91	22.38	42.87	-25.26	-	52.52	39.99	74.00	54.00	21.48	14.01	V	100	359
17985.30	34.21	20.88	49.32	-24.72	-	58.81	45.48	74.00	54.00	15.19	8.52	H	125	15

Note:

If the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

Test result = Reading: + AF+AMP / CL

Where, AF : Antenna Collection Factor,

AMP / CL = Cable loss + Preamplifier gain + High Pass filter.

※ High Pass filter use to range of 3 GHz to 18 GHz

Pol.: H(Horizontal), V(Vertical)



13.7 Test data for Radiated Restricted Band Edge Emission

- Test Date : December 16 ~ 29, 2016
- Reference Standard : Part 15 Subpart C, Sec. 15.247(d)
- Measuring Distance : 3 m
- Resolution Bandwidth : 1 MHz
- Detector mode : Peak detector mode / Average detector mode
- Power Source : DC 3.7 V
- Note : Through three orthogonal axes were investigated and the worst case is report

IEEE 802.11b (1ch, 11ch)

Frequency (MHz)	Measurement Level						Limit (dBμV/m)		Margin (dB)		Positioning System			
	Reading Value (dBμV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBμV/m)					Pol.	Height	Angle	
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
2388.59	55.14	41.95	26.90	-36.99	-	45.05	31.86	74.00	54.00	28.95	22.14	H	144	153

Frequency (MHz)	Measurement Level						Limit (dBμV/m)		Margin (dB)		Positioning System			
	Reading Value (dBμV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBμV/m)					Pol.	Height	Angle	
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
2484.00	53.25	39.45	27.21	-36.95	-	43.51	29.71	74.00	54.00	30.49	24.29	H	147	153

IEEE 802.11g(1ch, 11ch)

Frequency (MHz)	Measurement Level						Limit (dBµV/m)		Margin (dB)		Positioning System			
	Reading Value (dBµV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBµV/m)					Pol.	Height	Angle	
	Peak	Average				(dB/m)	(dB)	(dB)	Peak	Average				Peak
2389.95	76.25	57.03	26.91	-36.99	-	66.17	46.95	74.00	54.00	7.83	7.05	H	150	147

Frequency (MHz)	Measurement Level						Limit (dBµV/m)		Margin (dB)		Positioning System			
	Reading Value (dBµV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBµV/m)					Pol.	Height	Angle	
	Peak	Average				(dB/m)	(dB)	(dB)	Peak	Average				Peak
2484.71	70.32	53.31	27.22	-36.95	-	60.59	43.58	74.00	54.00	13.41	10.42	H	144	149

IEEE 802.11n(1ch, 11ch)

Frequency (MHz)	Measurement Level						Limit (dBμV/m)		Margin (dB)		Positioning System			
	Reading Value (dBμV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBμV/m)					Pol.	Height (cm)	Angle (°)	
	Peak	Average				(dB/m)	(dB)	(dB)	Peak	Average				Peak
2389.99	78.63	59.94	26.91	-36.99	-	68.55	49.86	74.00	54.00	5.45	4.14	H	153	158

Frequency (MHz)	Measurement Level						Limit (dBµV/m)		Margin (dB)		Positioning System			
	Reading Value (dBµV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBµV/m)					Pol.	Height (cm)	Angle (°)	
	Peak	Average				(dB/m)	(dB)	(dB)	Peak	Average				(H/V)
2484.55	74.36	54.57	27.21	-36.95	-	64.62	44.83	74.00	54.00	9.38	9.17	H	174	152

Note:

Test result = Reading: + Transducer Factor.

Where, ACF : Antenna Collection Factor,

CL = Cable loss + Preamplifier gain + High Pass filter

※ High Pass filter use to range of 3 GHz to 18 GHz

Pol.: H(Horizontal), V(Vertical)

EUT Type: RF Remote Controller

FCC ID.: OZ5URCHSR200





14. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

14.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV = 8.8 dB

14.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss	= 5.8 dB
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ - 36.8 dB $\mu\text{V}/\text{m}$ = 3.2 dB



15. Recommendation & Conclusion

The data collected shows that the **Ohsung Electronics Co., Ltd. RF Remote Controller (Model Name: HS-R200)** was complies with §15.247 of the FCC Rules.

- The end -

